

# The Hong Kong Standards and Testing Centre Ltd

## TEST REPORT

1998-03-18

No.: WE1546/504

**APPLICANT:** (CODE : 000459)  
GOLDMEN ELECTRONIC CO., LTD.

**DATE OF SAMPLES RECEIVED:** 1998-02-12

**DATE OF TESTING:** 1998.02.20

### DESCRIPTION OF SAMPLE(S):

A sample of product said to be:

Product: Walkie Talkies  
Manufacturer: Goldmen Electronic Co., Ltd.  
Model Number: 9350  
Brand Name: NIL  
Rating: DC 9V ("6F22" size battery X 1)  
Origin: Made in China

### INVESTIGATIONS REQUESTED:

Measurement to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart B -  
Unintentional Radiator and Subpart C - Intentional Radiator.


**RESULT/ REMARK:** Please see attached sheet(s).

### CONCLUSION:

From the measurement data obtained, the tested sample was considered to have COMPLIED after modifications with the clause 15.109(a) and ANSI C63.4-1992 Section 12.1.1.1-2 for the Receiver Section and with the clause 15.235 for the Transmitter Section of Federal Communications Commission Rules and Regulations Part 15.

**MODIFICATION:** Please see Appendix B

**TEST EQUIPMENT AUDIT:** Please see Appendix A

  
Gulam Hussein Bharuchi  
for Managing Director

**Note:**

Attention is drawn to the conditions printed overleaf under which this report is issued.  
The test results of this report refer only to the sample tested and do not apply to the bulk, unless the sampling has been carried out by The Hong Kong Standards and Testing Centre Ltd and is stated as such in the report.  
This report may not be reproduced either in its entirety or in part, without the written approval of The Hong Kong Standards and Testing Centre Ltd.

# The Hong Kong Standards and Testing Centre Ltd

1998-03-18

No.: WE1546/504

## TEST SUMMARY

### RECEIVER SECTION :

(A) Measurement of Radiated Emissions ..... Satisfactory  
(B) Line Conducted Voltage Test ..... Not applicable

### TRANSMITTER SECTION (INTENTIONAL RADIATOR) :

(1) Measurement of Emission of RF energy on the carrier frequency ..... Satisfactory  
Measurement of the out-of band emissions including harmonics ..... Satisfactory  
(2) Measurement of Emission Within Band Edges ..... Satisfactory  
(3) Measurement of Line-Conducted Voltage onto AC Power Line ..... Not applicable

## TEST DATA

Please refer to the attached result sheets.

# The Hong Kong Standards and Testing Centre Ltd

1998-03-18

No.: WE1546/504

## NOTES FOR THE RADIATION MEASUREMENT

### (1) Test site facility:

Open field test site located at Taipo (Hong Kong) with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC rules.

### (2) Distance between the ET and measuring antenna:

3 meters.

### (3) Measuring instrumentation's:

CISPR Quasi-peak type field strength meter (25 MHz - 1000 MHz). 6 dB bandwidth set at 120 KHz. Also, peak level of the fundamental emissions was measured in order to determine compliance with the 20dB peak to average limit specified in Section 15.35(b) of the FCC new Rules.

### (4) Measuring antenna:

Broad band antenna for the frequency range 25-1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable. included in the Antenna Factor for measurement data. The antenna are capable of measuring both horizontal and vertical polarizations.

### (5) Frequency range scanned:

The frequency range from 25 MHz to 1000 MHz had been searched. Readings of the highest emissions relating to the limit were reported as above.

### (6) Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

### (7) Measuring Procedure:

In accordance with the relevant clauses of the FCC Rules Part 15 section 15.109(a) and ANSI C63.4:1992 section 12.1.1.1-2.

### (8) Measuring Uncertainty:

The calculated uncertainty for measurement performed at 3M test distance are:-  
30MHz to 200MHz =  $\pm 3.7$ dB, 200MHz to 1000MHz =  $+ 3.0$ dB/- $2.7$ dB.

**Remark:** Purpose of this test is to provide the Applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under FCC's Equipment Authorization Program. This test itself is not an Approval Test.

# The Hong Kong Standards and Testing Centre Ltd

1998-03-18

No.: WE1546/504

\*\*\* INTENTIONAL RADIATOR \*\*\*

## (1) Measurement of Radiated Interference

TEST REFERENCE: FCC Rules Part 15 Subpart Section 15.235(49.82-49.90 MHz)

TEST CONDITION : Normal

TEST DATE : 1998.02.20

### Emission of RF energy on the carrier frequency – 49.859 MHz

(PEAK VALUE)

Emission Frequency	Meter Reading	Polarization	Antenna Factor	Field Strength (at 3m)	FCC Limit
MHz	dB( $\mu$ V)	H-V	dB	dB( $\mu$ V/m)	$\mu$ V/m
49.90	36.0	V +	15.0	51.0	354.8 100000

### Emission of RF energy on the carrier frequency – 49.859 MHz

(AVERAGE VALUE)

Emission Frequency	Meter Reading	Polarization	Antenna Factor	Field Strength (at 3m)	FCC Limit
MHz	dB( $\mu$ V)	H-V	dB	dB( $\mu$ V/m)	$\mu$ V/m
49.90	35.9	V +	15.0	50.9	350.6 10000

... to be continued

# The Hong Kong Standards and Testing Centre Ltd

1998-03-18

No.: WE1546/504

\*\*\* INTENTIONAL RADIATOR \*\*\*

## (1) Measurement of Radiated Interference . . Continued ..

TEST REFERENCE: FCC Rules Part 15 Section 15.235(49.82-49.90 MHz)

TEST CONDITION : Normal

TEST DATE : 1998.02.20

**The out-of-band emissions, including harmonics (25-1000 MHz)**

(CISPR VALUE)

Emission Frequency MHz	Meter Reading dB( $\mu$ V)	Polarization		Antenna Factor dB	Field Strength (at 3m)		FCC Limit $\mu$ V/m
		H	V		dB( $\mu$ V/m)	$\mu$ V/m	
99.7	13.5	H	+	12.2	25.7	19.3	150
149.6	13.3	H	+	9.8	23.1	14.3	150
199.4	21.8	H	+	11.5	33.3	46.3	150
249.3	19.2	H	+	15.9	35.1	56.9	200
299.1	23.6	H	+	17.0	40.6	107.2	200
348.8	12.9	H	+	17.2	30.1	32.0	200
398.6	12.7	V	+	18.8	31.5	37.6	200
448.5	13.2	H	+	19.7	32.9	44.2	200
498.3	20.5	H	+	20.6	41.1	113.5	200
543.1	15.6	H	+	22.2	37.8	77.6	200
598.1	10.5	H	+	23.4	33.9	49.5	200
647.8	11.5	H	+	23.5	35.0	56.2	200
697.4	9.9	H	+	25.0	34.9	55.6	200
747.8	<1.0		+	26.2	< 27.2	< 22.8	200
797.7	<1.0		+	27.2	< 28.2	< 28.2	200
847.5	<1.0		+	27.2	< 28.2	< 28.2	200
897.4	<1.0		+	27.2	< 28.2	< 28.2	200
947.2	<1.0		+	27.8	< 28.8	< 27.6	200
997.1	<1.0		+	28.5	< 29.5	< 29.5	500

### SUMMARY

data is within limits

Broad-band Antennas were used and both polarizations of emissions were measured.  
 polarizations at highest reading indicated as:

H -- Horizontal      V -- Vertical

# The Hong Kong Standards and Testing Centre Ltd

1998-03-18

No.: WE1546/504


\*\*\* INTENTIONAL RADIATOR \*\*\*

## (2) Measurement of Emissions Within Band Edges.

TEST REFERENCE: FCC Rules Part 15 section 15.235(49.82-49.90 MHz)

TEST CONDITION: Normal

TEST DATE : 1998.02.20

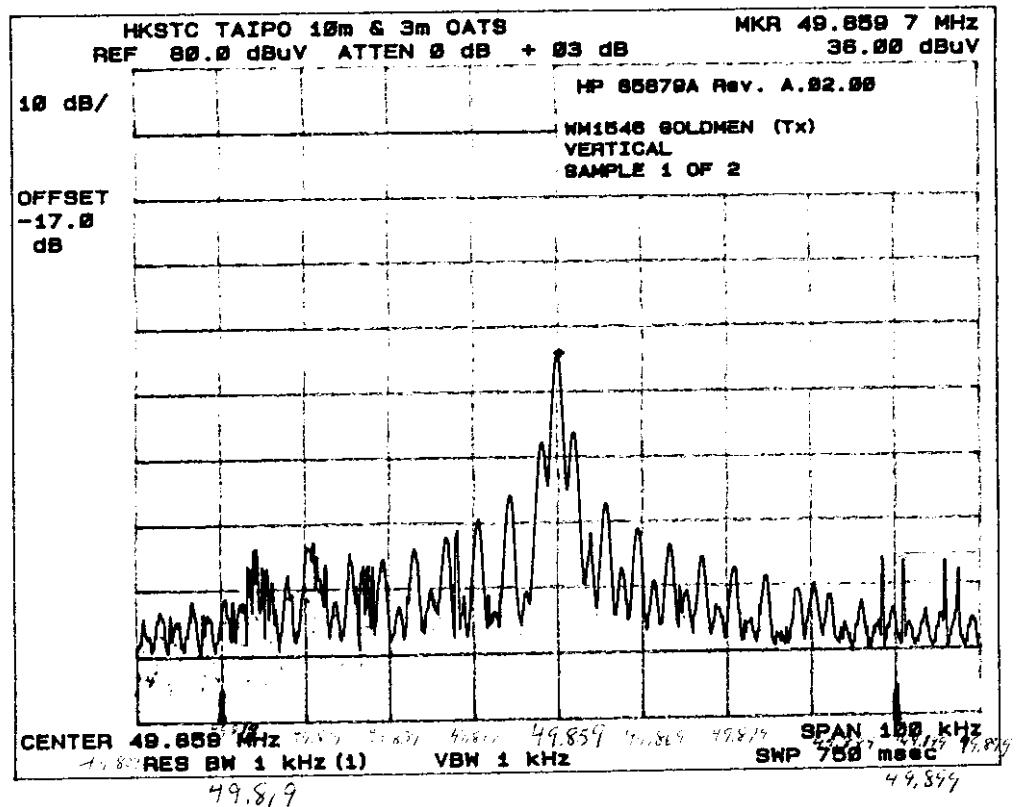

## RESULTS AND NOTES

- L: FCC Lower Band Edge.....>49.820MHz
- H: FCC Higher Band Edge.....> 49.900MHz
- C: Unmodulated carrier at frequency.....> 49.859MHz
- D: No. of dB from unmodulated carrier.....> 36.0dB

## SPECTRUM ANALYZER SETTINGS

- Resolution bandwidth : 1.0KHz
- Frequency span : 10.0KHz/div
- No. of dB/div : 10.0dB/div

## FCC Limit

Minimum No. of dB from unmodulated carrier required : 26.0dB

**SUMMARY**  
 All data is within limits

# The Hong Kong Standards and Testing Centre Ltd

No.: WE1546/504

Date: 1998-03-18

## Appendix A

### TEST EQUIPMENT AUDIT

#### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL.
EM007	SPECTRUM ANALYZER	HP	HP85660B	3144A21192	02/05/97
EM008	SPECTRUM ANALYZER DISPLAY	HP	HP85662A	3144A20514	02/05/97
EM009	QUASI-PEAK ADAPTER	HP	HP85650A	3303A01702	02/05/97
EM010	RF PSELECTOR	HP	HP85651A	3221A01410	02/05/97
EM011	ATTENUATOR SWITCH	HP	HP11713A	2508A10595	02/05/97
EM012	PPE-AMPLIFIER	HP	HP8498	3008A00262	02/05/97
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE	HP	HP9000 HP A1097C HP91331	6226A60314 3151J39517 2623A02468	CM N.A. N.A.
EM014	FLOPPY DRIVE				
EM015	ANTENNA	ARA INC.	IPB-2513 A	1069	31/12/97
EM016	SIGNAL GENERATOR	HP	8649B	1948A11892	15/03/97
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	16/02/98

#### ABBREVIATIONS:

CM: Corrective Maintenance

N.A.: Not Applicable

**Members of:**

Federation of Hong Kong Industries  
International Safe Transit Association  
American Society for Testing & Materials  
The Hong Kong General Chamber of Commerce



The Hong Kong Toys Council  
The Hong Kong Exporter's Association  
The Hong Kong Association of Certification Laboratories

# The Hong Kong Standards and Testing Centre Ltd

## Appendix B

1998-03-18

No.: WE1546/504

### **MODIFICATION:**

A. Add a capacitor of 10P.

B. Add a capacitor of 120P.

