



FCC RF Test Report

APPLICANT : Wacom Co., Ltd.
EQUIPMENT : Portable Pad
BRAND NAME : Wacom
MODEL NAME : DTHA140
FCC ID : HV4DTHA140
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jul. 09, 2025 ~ Sep. 12, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	8
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	23
3.4 Unwanted Emissions Measurement	26
3.5 AC Conducted Emission Measurement.....	31
3.6 Antenna Requirements	33
4 LIST OF MEASURING EQUIPMENT	34
5 MEASUREMENT UNCERTAINTY	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR552114D	Rev. 01	Initial issue of report	Aug. 20, 2025
FR552114D	Rev. 02	Added co-location test data with the EMR mode This report is an updated version, replacing the report issued on Aug. 20, 2025	Sep. 15, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 2.54 dB at 7726.47 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 5.92 dB at 0.175 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Wacom Co., Ltd.

2-510-1 Toyonodai, Kazo-shi, Saitama 349-1148 Japan

1.2 Manufacturer

Wacom Co., Ltd.

2-510-1 Toyonodai, Kazo-shi, Saitama 349-1148 Japan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Pad
Brand Name	Wacom
Model Name	DTHA140
FCC ID	HV4DTHA140
SN Code	Conducted: 5fls1u1000088 Conduction: 5gls1u10000228 Radiation: JPDDBG7636A00332
HW Version	V2
SW Version	Wacom_MovinkPad_14-userdebug 15 Mimosa_DEV_ userdebug_TC_11 20250629 release-keys
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	MIMO <Ant. 1 + 2> <5180 MHz ~ 5240 MHz> 802.11a : 13.05 dBm / 0.0202 W 802.11n HT20 : 12.66 dBm / 0.0185 W 802.11n HT40 : 12.66 dBm / 0.0185 W 802.11ac VHT20: 12.69 dBm / 0.0186 W 802.11ac VHT40: 12.68 dBm / 0.0185 W 802.11ac VHT80: 12.37 dBm / 0.0173 W 802.11ac VHT160: 12.50 dBm / 0.0178 W 802.11ax HE20: 12.72 dBm / 0.0187 W 802.11ax HE40: 12.71 dBm / 0.0187 W 802.11ax HE80: 12.41 dBm / 0.0174 W 802.11ax HE160: 12.53 dBm / 0.0179 W <5260 MHz ~ 5320 MHz> 802.11a : 13.59 dBm / 0.0229 W 802.11n HT20 : 13.14 dBm / 0.0206 W 802.11n HT40 : 12.99 dBm / 0.0199 W 802.11ac VHT20: 13.23 dBm / 0.0210 W 802.11ac VHT40: 13.06 dBm / 0.0202 W 802.11ac VHT80: 12.69 dBm / 0.0186 W 802.11ac VHT160: 12.50 dBm / 0.0178 W 802.11ax HE20: 13.26 dBm / 0.0212 W 802.11ax HE40: 13.08 dBm / 0.0203 W 802.11ax HE80: 12.72 dBm / 0.0187 W 802.11ax HE160: 12.53 dBm / 0.0179 W <5500 MHz ~ 5720 MHz > 802.11a : 11.47 dBm / 0.0140 W 802.11n HT20 : 10.97 dBm / 0.0125 W 802.11n HT40 : 10.33 dBm / 0.0108 W 802.11ac VHT20: 11.07 dBm / 0.0128 W 802.11ac VHT40: 10.41 dBm / 0.0110 W 802.11ac VHT80: 10.66 dBm / 0.0116 W 802.11ac VHT160: 9.05 dBm / 0.0080 W 802.11ax HE20: 11.14 dBm / 0.0130 W 802.11ax HE40: 10.47 dBm / 0.0111 W 802.11ax HE80: 10.73 dBm / 0.0118 W 802.11ax HE160: 9.13 dBm / 0.0082 W <5745 MHz ~ 5825 MHz> 802.11a : 10.53 dBm / 0.0113 W 802.11n HT20 : 10.07 dBm / 0.0102 W 802.11n HT40 : 10.21 dBm / 0.0105 W 802.11ac VHT20: 10.15 dBm / 0.0104 W 802.11ac VHT40: 10.28 dBm / 0.0107 W 802.11ac VHT80: 9.78 dBm / 0.0095 W 802.11ax HE20: 10.25 dBm / 0.0106 W 802.11ax HE40: 10.38 dBm / 0.0109 W 802.11ax HE80: 9.85 dBm / 0.0097 W



99% Occupied Bandwidth	MIMO <Ant. 1 + 2> <5180 MHz ~ 5240 MHz> 802.11a : 16.610 MHz 802.11ac VHT20 : 17.810 MHz 802.11ac VHT40 : 36.267 MHz 802.11ac VHT80 : 75.733 MHz 802.11ac VHT160 : 155.581 MHz 802.11ax HE20: 19.067 MHz 802.11ax HE40: 37.943 MHz 802.11ax HE80: 77.486 MHz 802.11ax HE160: 157.257 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.610 MHz 802.11ac VHT20 : 17.810 MHz 802.11ac VHT40 : 36.305 MHz 802.11ac VHT80 : 75.886 MHz 802.11ac VHT160 : 155.581 MHz 802.11ax HE20: 19.086 MHz 802.11ax HE40: 37.943 MHz 802.11ax HE80: 77.410 MHz 802.11ax HE160: 157.257 MHz <5500 MHz ~ 5720 MHz> 802.11a : 16.667 MHz 802.11ac VHT20 : 17.790 MHz 802.11ac VHT40 : 36.267 MHz 802.11ac VHT80 : 75.886 MHz 802.11ac VHT160 : 155.886 MHz 802.11ax HE20: 19.067 MHz 802.11ax HE40: 38.019 MHz 802.11ax HE80: 77.638 MHz 802.11ax HE160: 157.105 MHz <5745 MHz ~ 5825 MHz> 802.11a : 16.724 MHz 802.11ac VHT20 : 17.810 MHz 802.11ac VHT40 : 36.305 MHz 802.11ac VHT80 : 75.962 MHz 802.11ax HE20: 19.067 MHz 802.11ax HE40: 37.943 MHz 802.11ax HE80: 77.562 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 1> : Metal frame antenna type with gain -0.76 dBi <Ant. 2> : Metal frame antenna type with gain 1.23 dBi <5260 MHz ~ 5320 MHz> <Ant. 1> : Metal frame antenna type with gain -0.14 dBi <Ant. 2> : Metal frame antenna type with gain 0.76 dBi <5500 MHz ~ 5720 MHz> <Ant. 1> : Metal frame antenna type with gain -1.01 dBi <Ant. 2> : Metal frame antenna type with gain 1.41 dBi <5745 MHz ~ 5825 MHz> <Ant. 1> : Metal frame antenna type with gain 0.54 dBi <Ant. 2> : Metal frame antenna type with gain 1.35 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. The device supports WLAN MIMO CDD mode.
2. For 802.11n HT20 /ac VHT20 and 802.11n HT40 /ac VHT40 mode, the whole testing have assessed only 802.11ac VHT20/40/80/160MHz by referring to the higher output power.
3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210	50##	5250
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640
	-	-	114##	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#" are 80MHz bandwidth.
3. The above Frequency and Channel in "##" are 160MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link (5G) + USB Cable1 (Charging from Adapter)
Remark: For Radiated Test Cases, the tests were performance with Adapter and USB Cable1.	

RSE Co-location
Bluetooth-LE_GSKF (2Mbps) CH39 2480 Ant 1 TX + 802.11ax HE40 CH159 5795 MIMO TX Bluetooth-LE_GSKF (2Mbps) CH39 2480 Ant 2 TX + 802.11ax HE40 CH159 5795 MIMO TX Bluetooth-LE_GSKF (2Mbps) CH39 2480 Ant 2 TX + 802.11ax HE40 CH159 5795 MIMO TX + EMR 593.75KHz ASK TX



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		160M BW		160M BW	160M BW
M	Middle	50		114	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

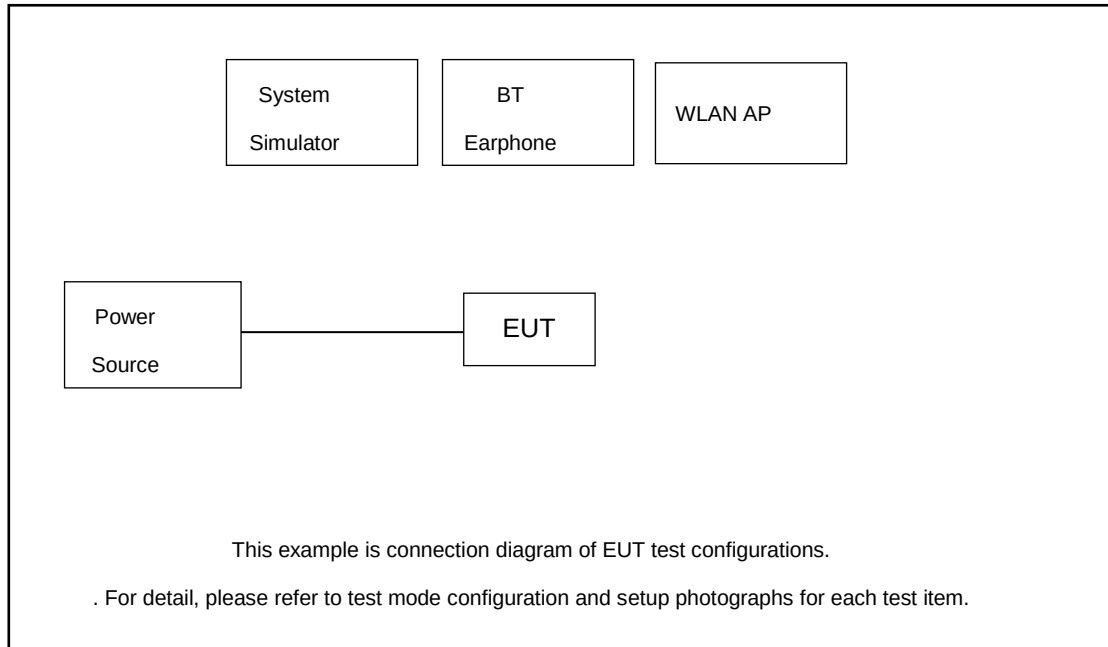

Radiated Emission:

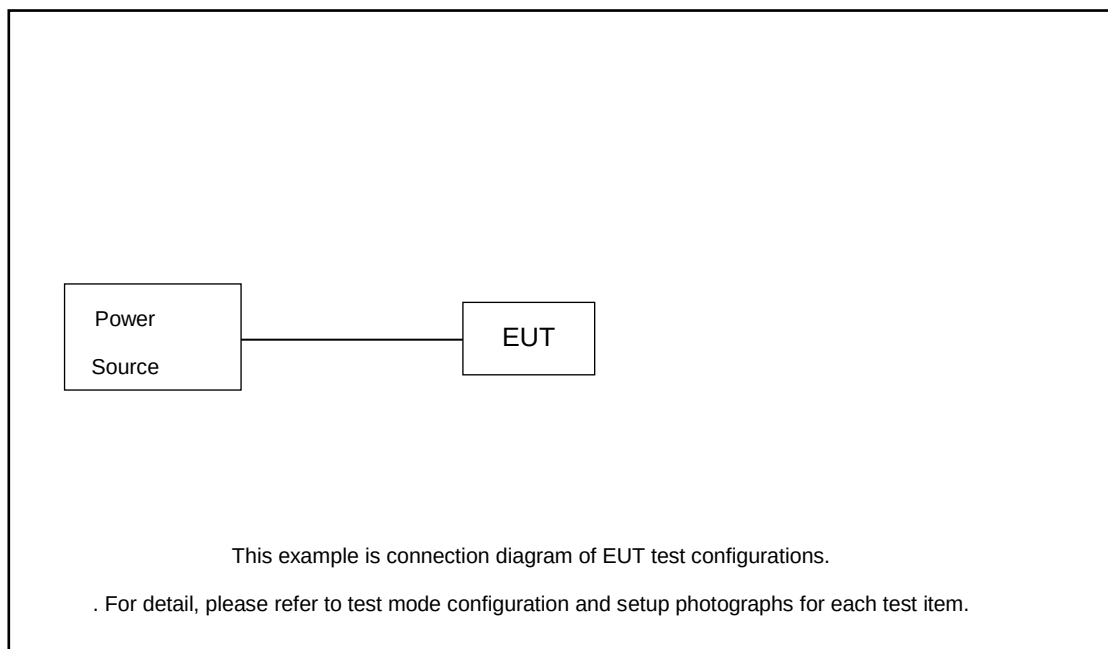

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 14.36 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 14.36 + 10 = 24.36 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 \times RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.

3.1.4 Test Setup

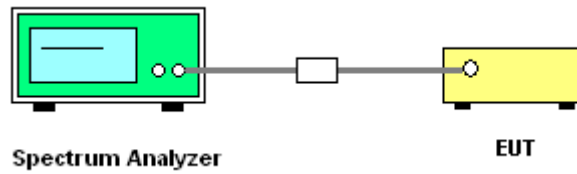

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

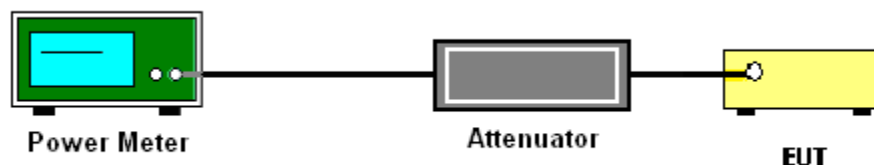



3.2.5 Test Result of Maximum Conducted Output Power

U-NII-1														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Conducted Power Limit (dBm)	Gain(dBi)	EIRP Power (dBm)	Pass/Fail
Band	CDD	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 1	Ant 2	Ant 1+2		Ant 1+2	Ant 1+2	
11a	CDD	2	36	5180	6Mbps	-	10.00	9.74	9.58	12.68	24.00	1.23	13.91	Pass
11a	CDD	2	44	5220	6Mbps	-	10.00	9.90	9.70	12.82	24.00	1.23	14.05	Pass
11a	CDD	2	48	5240	6Mbps	-	10.00	10.15	9.91	13.05	24.00	1.23	14.28	Pass
HT20	CDD	2	36	5180	MCS0	-	10.00	9.45	9.20	12.34	24.00	1.23	13.57	Pass
HT20	CDD	2	44	5220	MCS0	-	10.00	9.63	9.30	12.48	24.00	1.23	13.71	Pass
HT20	CDD	2	48	5240	MCS0	-	10.00	9.77	9.53	12.66	24.00	1.23	13.89	Pass
HT40	CDD	2	38	5190	MCS0	-	10.00	9.37	9.23	12.31	24.00	1.23	13.54	Pass
HT40	CDD	2	46	5230	MCS0	-	10.00	9.98	9.30	12.66	24.00	1.23	13.89	Pass
VHT20	CDD	2	36	5180	MCS0	-	10.00	9.46	9.23	12.36	24.00	1.23	13.59	Pass
VHT20	CDD	2	44	5220	MCS0	-	10.00	9.65	9.33	12.50	24.00	1.23	13.73	Pass
VHT20	CDD	2	48	5240	MCS0	-	10.00	9.80	9.56	12.69	24.00	1.23	13.92	Pass
VHT40	CDD	2	38	5190	MCS0	-	10.00	9.40	9.24	12.33	24.00	1.23	13.56	Pass
VHT40	CDD	2	46	5230	MCS0	-	10.00	10.00	9.32	12.68	24.00	1.23	13.91	Pass
VHT80	CDD	2	42	5210	MCS0	-	10.00	9.65	9.05	12.37	24.00	1.23	13.60	Pass
VHT160	CDD	2	50	5250	MCS0	-	10.00	9.67	9.31	12.50	24.00	1.23	13.73	Pass
HE20	CDD	2	36	5180	MCS0	Full	10.00	9.50	9.26	12.39	24.00	1.23	13.62	Pass
HE20	CDD	2	36	5180	MCS0	RU 26/0	1.00	0.47	0.22	3.36	24.00	1.23	4.59	Pass
HE20	CDD	2	36	5180	MCS0	RU 52/37	4.00	3.56	3.13	6.36	24.00	1.23	7.59	Pass
HE20	CDD	2	36	5180	MCS0	RU 106/53	7.00	6.25	5.94	9.11	24.00	1.23	10.34	Pass
HE20	CDD	2	44	5220	MCS0	Full	10.00	9.66	9.35	12.52	24.00	1.23	13.75	Pass
HE20	CDD	2	44	5220	MCS0	RU 26/8	1.00	0.84	0.14	3.51	24.00	1.23	4.74	Pass
HE20	CDD	2	44	5220	MCS0	RU 52/40	4.00	3.71	3.16	6.45	24.00	1.23	7.68	Pass
HE20	CDD	2	44	5220	MCS0	RU 106/54	6.50	6.11	5.66	8.90	24.00	1.23	10.13	Pass
HE20	CDD	2	48	5240	MCS0	Full	10.00	9.83	9.58	12.72	24.00	1.23	13.95	Pass
HE20	CDD	2	48	5240	MCS0	RU 26/8	0.50	0.44	0.39	3.43	24.00	1.23	4.66	Pass
HE20	CDD	2	48	5240	MCS0	RU 52/40	3.50	3.01	2.97	6.00	24.00	1.23	7.23	Pass
HE20	CDD	2	48	5240	MCS0	RU 106/54	6.50	6.15	5.79	8.98	24.00	1.23	10.21	Pass
HE40	CDD	2	38	5190	MCS0	Full	10.00	9.43	9.27	12.36	24.00	1.23	13.59	Pass
HE40	CDD	2	46	5230	MCS0	Full	10.00	10.03	9.35	12.71	24.00	1.23	13.94	Pass
HE80	CDD	2	42	5210	MCS0	Full	10.00	9.70	9.07	12.41	24.00	1.23	13.64	Pass
HE160	CDD	2	50	5250	MCS0	Full	10.00	9.69	9.34	12.53	24.00	1.23	13.76	Pass



U-NII-2A																
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			FCC Conducted Power Limit (dBm)	IC Conducted Power Limit (dBm)	Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	CDD	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 1	Ant 2	Ant 1+2	Ant 1+2	Ant 1+2	Ant 1+2	Ant 1+2	Ant 1+2	
11a	CDD	2	52	5260	6Mbps	-	10.00	9.94	9.77	12.87	23.90	23.19	0.76	13.63	26.99	Pass
11a	CDD	2	60	5300	6Mbps	-	10.00	10.43	10.34	13.40	23.92	23.19	0.76	14.16	26.99	Pass
11a	CDD	2	64	5320	6Mbps	-	10.00	10.61	10.53	13.59	23.91	23.20	0.76	14.35	26.99	Pass
HT20	CDD	2	52	5260	MCS0	-	10.00	9.43	9.33	12.39	23.98	23.50	0.76	13.15	26.99	Pass
HT20	CDD	2	60	5300	MCS0	-	10.00	9.96	9.87	12.93	23.98	23.49	0.76	13.69	26.99	Pass
HT20	CDD	2	64	5320	MCS0	-	10.00	10.18	10.08	13.14	23.98	23.50	0.76	13.90	26.99	Pass
HT40	CDD	2	54	5270	MCS0	-	10.00	10.10	9.86	12.99	23.98	23.98	0.76	13.75	26.99	Pass
HT40	CDD	2	62	5310	MCS0	-	10.00	10.07	9.31	12.72	23.98	23.98	0.76	13.48	26.99	Pass
VHT20	CDD	2	52	5260	MCS0	-	10.00	9.53	9.42	12.49	23.98	23.50	0.76	13.25	26.99	Pass
VHT20	CDD	2	60	5300	MCS0	-	10.00	10.03	9.96	13.01	23.98	23.49	0.76	13.77	26.99	Pass
VHT20	CDD	2	64	5320	MCS0	-	10.00	10.28	10.15	13.23	23.98	23.50	0.76	13.99	26.99	Pass
VHT40	CDD	2	54	5270	MCS0	-	10.00	10.18	9.91	13.06	23.98	23.98	0.76	13.82	26.99	Pass
VHT40	CDD	2	62	5310	MCS0	-	10.00	10.17	9.40	12.81	23.98	23.98	0.76	13.57	26.99	Pass
VHT80	CDD	2	58	5290	MCS0	-	10.00	9.85	9.51	12.69	23.98	23.98	0.76	13.45	26.99	Pass
VHT160	CDD	2	50	5250	MCS0	-	10.00	9.67	9.31	12.50	23.98	23.98	0.76	13.26	26.99	Pass
HE20	CDD	2	52	5260	MCS0	Full	10.00	9.55	9.46	12.52	23.98	23.79	0.76	13.28	26.99	Pass
HE20	CDD	2	52	5260	MCS0	RU 26/0	0.50	0.17	-0.28	2.96	23.98	23.79	0.76	3.72	26.99	Pass
HE20	CDD	2	52	5260	MCS0	RU 52/37	3.50	3.36	2.83	6.11	23.98	23.79	0.76	6.87	26.99	Pass
HE20	CDD	2	52	5260	MCS0	RU 106/53	6.50	6.08	5.81	8.96	23.98	23.79	0.76	9.72	26.99	Pass
HE20	CDD	2	60	5300	MCS0	Full	10.00	10.06	10.00	13.04	23.98	23.79	0.76	13.80	26.99	Pass
HE20	CDD	2	60	5300	MCS0	RU 26/8	0.50	0.66	0.41	3.55	23.98	23.79	0.76	4.31	26.99	Pass
HE20	CDD	2	60	5300	MCS0	RU 52/40	3.00	3.28	2.92	6.11	23.98	23.79	0.76	6.87	26.99	Pass
HE20	CDD	2	60	5300	MCS0	RU 106/54	6.00	6.07	5.96	9.03	23.98	23.79	0.76	9.79	26.99	Pass
HE20	CDD	2	64	5320	MCS0	Full	10.00	10.30	10.20	13.26	23.98	23.80	0.76	14.02	26.99	Pass
HE20	CDD	2	64	5320	MCS0	RU 26/8	0.00	0.13	0.29	3.22	23.98	23.80	0.76	3.98	26.99	Pass
HE20	CDD	2	64	5320	MCS0	RU 52/40	3.00	2.98	3.22	6.11	23.98	23.80	0.76	6.87	26.99	Pass
HE20	CDD	2	64	5320	MCS0	RU 106/54	6.00	6.01	6.04	9.04	23.98	23.80	0.76	9.80	26.99	Pass
HE40	CDD	2	54	5270	MCS0	Full	10.00	10.20	9.94	13.08	23.98	23.98	0.76	13.84	26.99	Pass
HE40	CDD	2	62	5310	MCS0	Full	10.00	10.20	9.42	12.84	23.98	23.98	0.76	13.60	26.99	Pass
HE80	CDD	2	58	5290	MCS0	Full	10.00	9.87	9.54	12.72	23.98	23.98	0.76	13.48	26.99	Pass
HE160	CDD	2	50	5250	MCS0	Full	10.00	9.69	9.34	12.53	23.98	23.01	0.76	13.29	26.99	Pass



U-NII-2C																
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			FCC Conducted Power Limit (dBm)	IC Conducted Power Limit (dBm)	Gain (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	CDD	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 1	Ant 2	Ant 1+2	Ant 1+2	Ant 1+2	Ant 1+2	Ant 1+2	Ant 1+2	
11a	CDD	2	100	5500	6Mbps	-	8.00	8.70	8.20	11.47	23.98	23.20	1.41	12.88	26.99	Pass
11a	CDD	2	116	5580	6Mbps	-	8.00	8.05	8.06	11.07	23.96	23.20	1.41	12.48	26.99	Pass
11a	CDD	2	140	5700	6Mbps	-	8.00	7.74	8.46	11.13	23.90	23.19	1.41	12.54	26.99	Pass
11a	CDD	2	144	5720	6Mbps	-	8.00	7.47	8.35	10.95	23.84	23.19	1.41	12.36	26.99	Pass
HT20	CDD	2	100	5500	MCS0	-	8.00	8.22	7.69	10.97	23.98	23.50	1.41	12.38	26.99	Pass
HT20	CDD	2	116	5580	MCS0	-	4.00	3.24	3.83	6.56	23.98	23.50	1.41	7.97	26.99	Pass
HT20	CDD	2	140	5700	MCS0	-	7.00	6.25	6.56	9.42	23.98	23.50	1.41	10.83	26.99	Pass
HT20	CDD	2	144	5720	MCS0	-	7.00	6.10	5.91	9.02	23.98	23.49	1.41	10.43	26.99	Pass
HT40	CDD	2	102	5510	MCS0	-	7.00	5.97	6.89	9.46	23.98	23.98	1.41	10.87	26.99	Pass
HT40	CDD	2	110	5550	MCS0	-	8.00	7.40	7.23	10.33	23.98	23.98	1.41	11.74	26.99	Pass
HT40	CDD	2	134	5670	MCS0	-	7.00	6.56	6.46	9.52	23.98	23.98	1.41	10.93	26.99	Pass
HT40	CDD	2	142	5710	MCS0	-	7.00	5.75	6.53	9.17	23.98	23.98	1.41	10.58	26.99	Pass
VHT20	CDD	2	100	5500	MCS0	-	8.00	8.32	7.78	11.07	23.98	23.50	1.41	12.48	26.99	Pass
VHT20	CDD	2	118	5580	MCS0	-	4.00	3.31	3.89	6.62	23.98	23.50	1.41	8.03	26.99	Pass
VHT20	CDD	2	140	5700	MCS0	-	7.00	6.35	6.65	9.51	23.98	23.50	1.41	10.92	26.99	Pass
VHT20	CDD	2	144	5720	MCS0	-	7.00	6.17	5.96	9.08	23.98	23.49	1.41	10.49	26.99	Pass
VHT40	CDD	2	102	5510	MCS0	-	7.00	6.05	6.94	9.53	23.98	23.98	1.41	10.94	26.99	Pass
VHT40	CDD	2	110	5550	MCS0	-	8.00	7.46	7.33	10.41	23.98	23.98	1.41	11.82	26.99	Pass
VHT40	CDD	2	134	5670	MCS0	-	7.00	6.66	6.56	9.62	23.98	23.98	1.41	11.03	26.99	Pass
VHT40	CDD	2	142	5710	MCS0	-	7.00	5.84	6.63	9.26	23.98	23.98	1.41	10.67	26.99	Pass
VHT80	CDD	2	106	5530	MCS0	-	8.00	7.91	7.37	10.66	23.98	23.98	1.41	12.07	26.99	Pass
VHT80	CDD	2	122	5610	MCS0	-	7.00	5.75	6.51	9.16	23.98	23.98	1.41	10.57	26.99	Pass
VHT80	CDD	2	138	5690	MCS0	-	7.00	6.21	6.24	9.24	23.98	23.98	1.41	10.65	26.99	Pass
VHT160	CDD	2	114	5570	MCS0	-	7.00	5.85	6.23	9.05	23.98	23.98	1.41	10.46	26.99	Pass
HE20	CDD	2	100	5500	MCS0	Full	8.00	8.41	7.84	11.14	23.98	23.79	1.41	12.55	26.99	Pass
HE20	CDD	2	100	5500	MCS0	RU 26/0	-1.00	-0.47	-1.34	2.13	23.98	23.79	1.41	3.54	26.99	Pass
HE20	CDD	2	100	5500	MCS0	RU 52/37	2.00	2.67	1.43	5.10	23.98	23.79	1.41	6.51	26.99	Pass
HE20	CDD	2	100	5500	MCS0	RU 106/53	5.00	5.25	4.43	7.87	23.98	23.79	1.41	9.28	26.99	Pass
HE20	CDD	2	116	5580	MCS0	Full	4.00	3.36	3.95	6.68	23.98	23.79	1.41	8.09	26.99	Pass
HE20	CDD	2	116	5580	MCS0	RU 26/0	-5.00	-5.68	-5.38	-2.52	23.98	23.79	1.41	-1.11	26.99	Pass
HE20	CDD	2	116	5580	MCS0	RU 52/37	-2.00	-2.97	-2.62	0.22	23.98	23.79	1.41	1.63	26.99	Pass
HE20	CDD	2	116	5580	MCS0	RU 106/53	1.00	-0.22	0.27	3.04	23.98	23.79	1.41	4.45	26.99	Pass
HE20	CDD	2	140	5700	MCS0	Full	7.00	6.44	6.75	9.61	23.98	23.79	1.41	11.02	26.99	Pass
HE20	CDD	2	140	5700	MCS0	RU 26/8	-2.00	-3.33	-2.68	0.02	23.98	23.79	1.41	1.43	26.99	Pass
HE20	CDD	2	140	5700	MCS0	RU 52/40	1.00	-0.49	-0.01	2.77	23.98	23.79	1.41	4.18	26.99	Pass
HE20	CDD	2	140	5700	MCS0	RU 106/54	4.00	2.80	2.77	5.80	23.98	23.79	1.41	7.21	26.99	Pass
HE20	CDD	2	144	5720	MCS0	Full	7.00	6.25	6.01	9.14	23.98	23.79	1.41	10.55	26.99	Pass
HE20	CDD	2	144	5720	MCS0	RU 26/8	-2.00	-3.72	-3.17	-0.43	23.98	23.79	1.41	0.98	26.99	Pass
HE20	CDD	2	144	5720	MCS0	RU 52/40	1.00	-0.86	-0.38	2.40	23.98	23.79	1.41	3.81	26.99	Pass
HE20	CDD	2	144	5720	MCS0	RU 106/54	4.00	2.35	2.33	5.35	23.98	23.79	1.41	6.76	26.99	Pass
HE40	CDD	2	102	5510	MCS0	Full	7.00	6.13	7.34	9.79	23.98	23.98	1.41	11.20	26.99	Pass
HE40	CDD	2	110	5550	MCS0	Full	8.00	7.51	7.40	10.47	23.98	23.98	1.41	11.88	26.99	Pass
HE40	CDD	2	134	5670	MCS0	Full	7.00	6.71	6.64	9.69	23.98	23.98	1.41	11.10	26.99	Pass
HE40	CDD	2	142	5710	MCS0	Full	7.00	5.93	6.68	9.33	23.98	23.98	1.41	10.74	26.99	Pass
HE80	CDD	2	106	5530	MCS0	Full	8.00	7.98	7.44	10.73	23.98	23.98	1.41	12.14	26.99	Pass
HE80	CDD	2	122	5610	MCS0	Full	7.00	5.84	6.56	9.23	23.98	23.98	1.41	10.64	26.99	Pass
HE80	CDD	2	138	5690	MCS0	Full	7.00	6.31	6.29	9.31	23.98	23.98	1.41	10.72	26.99	Pass
HE160	CDD	2	114	5570	MCS0	Full	7.00	5.94	6.29	9.13	23.98	23.01	1.41	10.54	26.99	Pass



U-NII-3															
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Conducted Power Limit (dBm)	Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	CDD	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 1	Ant 2	Ant 1+2		Ant 1+2	Ant 1+2		
11a	CDD	2	149	5745	6Mbps	-	7.00	7.05	7.93	10.53	30.00	1.35	11.88	36.00	Pass
11a	CDD	2	157	5785	6Mbps	-	7.00	6.65	7.69	10.22	30.00	1.35	11.57	36.00	Pass
11a	CDD	2	165	5825	6Mbps	-	7.00	7.08	7.56	10.34	30.00	1.35	11.69	36.00	Pass
HT20	CDD	2	149	5745	MCS0	-	7.00	6.47	7.58	10.07	30.00	1.35	11.42	36.00	Pass
HT20	CDD	2	157	5785	MCS0	-	7.00	6.18	7.25	9.76	30.00	1.35	11.11	36.00	Pass
HT20	CDD	2	165	5825	MCS0	-	7.00	6.58	7.21	9.92	30.00	1.35	11.27	36.00	Pass
HT40	CDD	2	151	5755	MCS0	-	7.00	5.49	6.87	9.24	30.00	1.35	10.59	36.00	Pass
HT40	CDD	2	159	5795	MCS0	-	7.00	6.87	7.51	10.21	30.00	1.35	11.56	36.00	Pass
VHT20	CDD	2	149	5745	MCS0	-	7.00	6.57	7.64	10.15	30.00	1.35	11.50	36.00	Pass
VHT20	CDD	2	157	5785	MCS0	-	7.00	6.24	7.35	9.84	30.00	1.35	11.19	36.00	Pass
VHT20	CDD	2	159	5795	MCS0	-	7.00	6.67	7.27	9.99	30.00	1.35	11.34	36.00	Pass
VHT40	CDD	2	151	5755	MCS0	-	7.00	5.58	6.94	9.32	30.00	1.35	10.67	36.00	Pass
VHT40	CDD	2	159	5795	MCS0	-	7.00	6.96	7.56	10.28	30.00	1.35	11.63	36.00	Pass
VHT80	CDD	2	155	5775	MCS0	-	7.00	6.16	7.30	9.78	30.00	1.35	11.13	36.00	Pass
HE20	CDD	2	149	5745	MCS0	Full	7.00	6.67	7.74	10.25	30.00	1.35	11.60	36.00	Pass
HE20	CDD	2	149	5745	MCS0	RU 26/0	-2.00	-2.46	-1.44	1.09	30.00	1.35	2.44	36.00	Pass
HE20	CDD	2	149	5745	MCS0	RU 52/37	1.00	0.42	1.37	3.93	30.00	1.35	5.28	36.00	Pass
HE20	CDD	2	149	5745	MCS0	RU 106/53	4.00	3.27	4.21	6.78	30.00	1.35	8.13	36.00	Pass
HE20	CDD	2	157	5785	MCS0	Full	7.00	6.29	7.45	9.92	30.00	1.35	11.27	36.00	Pass
HE20	CDD	2	157	5785	MCS0	RU 26/0	-2.00	-3.10	-1.85	0.58	30.00	1.35	1.93	36.00	Pass
HE20	CDD	2	157	5785	MCS0	RU 52/37	1.00	-0.30	0.92	3.36	30.00	1.35	4.71	36.00	Pass
HE20	CDD	2	157	5785	MCS0	RU 106/53	4.00	2.74	3.78	6.30	30.00	1.35	7.65	36.00	Pass
HE20	CDD	2	165	5825	MCS0	Full	7.00	6.74	7.35	10.07	30.00	1.35	11.42	36.00	Pass
HE20	CDD	2	165	5825	MCS0	RU 26/8	-2.00	-2.88	-1.66	0.78	30.00	1.35	2.13	36.00	Pass
HE20	CDD	2	165	5825	MCS0	RU 52/40	1.00	0.01	0.97	3.53	30.00	1.35	4.88	36.00	Pass
HE20	CDD	2	165	5825	MCS0	RU 106/54	4.00	3.59	3.64	6.63	30.00	1.35	7.98	36.00	Pass
HE40	CDD	2	151	5755	MCS0	Full	7.00	5.68	7.04	9.42	30.00	1.35	10.77	36.00	Pass
HE40	CDD	2	159	5795	MCS0	Full	7.00	7.05	7.66	10.38	30.00	1.35	11.73	36.00	Pass
HE80	CDD	2	155	5775	MCS0	Full	7.00	6.22	7.38	9.85	30.00	1.35	11.20	36.00	Pass



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

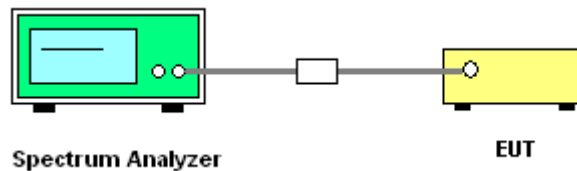

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

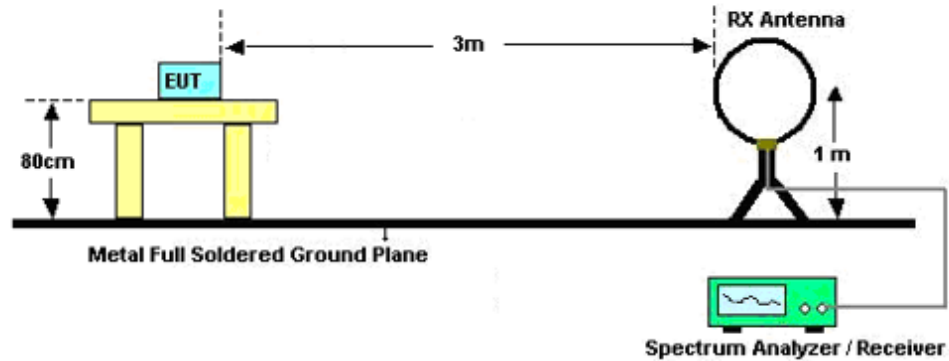

For radiated emissions from 30MHz to 1GHz

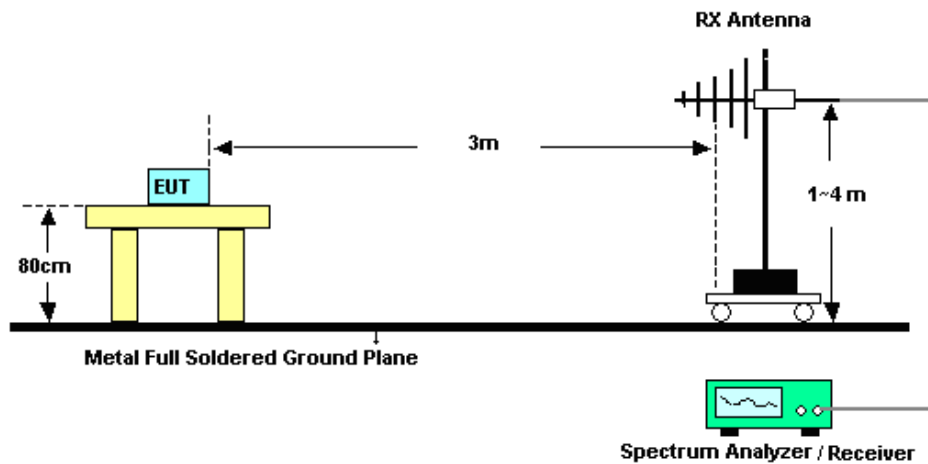

For radiated emissions above 1GHz

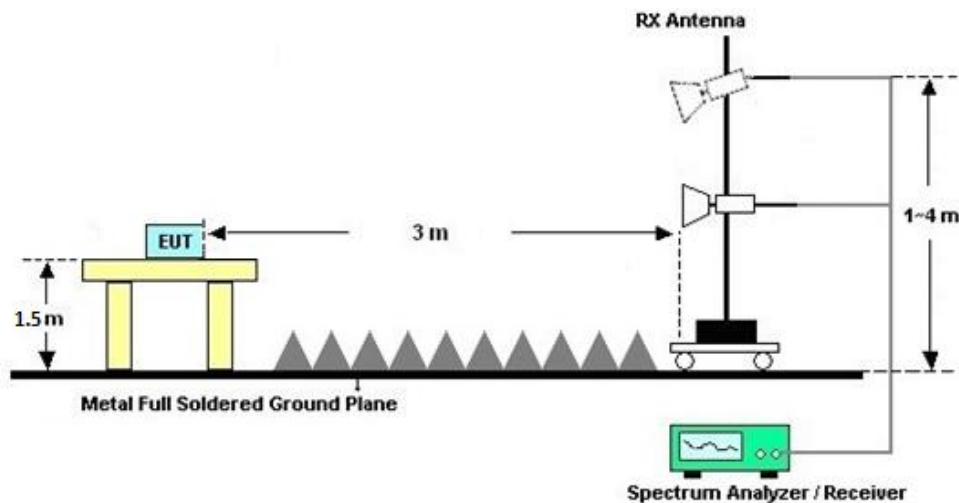

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

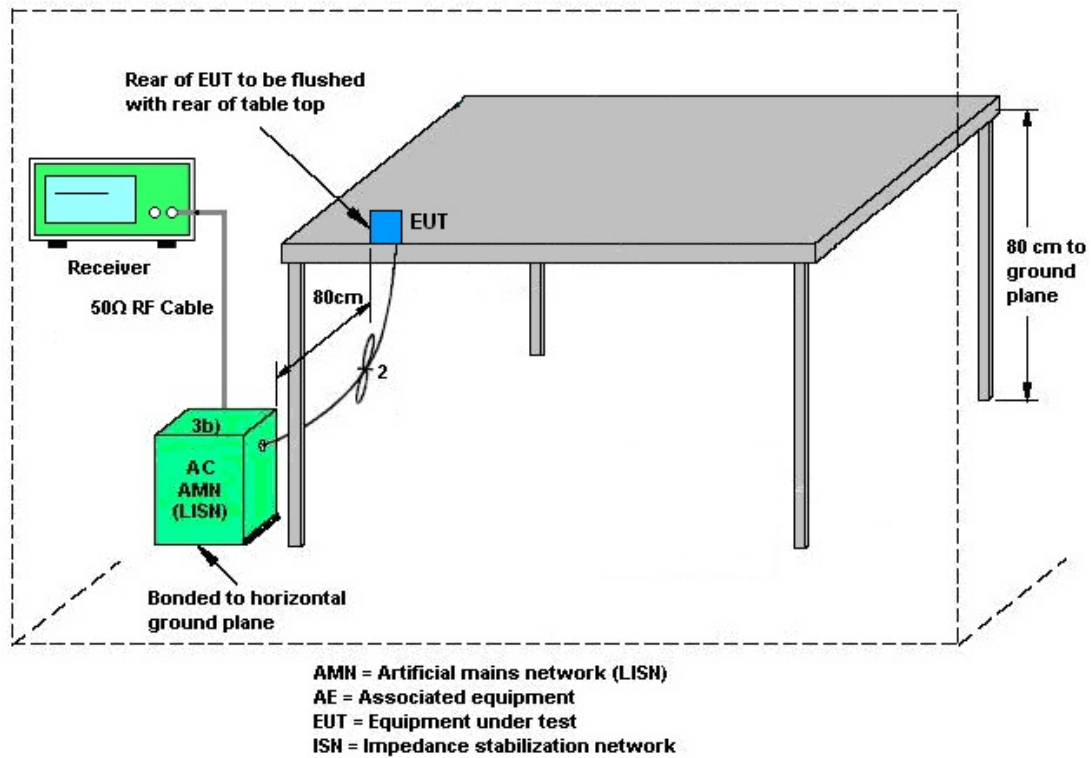

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(\text{NANT}/\text{NSS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $\text{NANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
UNII-1	-0.76	1.23	1.23	3.30	0.00	0.00
UNII-2A	-0.14	0.76	0.76	3.33	0.00	0.00
UNII-2C	-1.01	1.41	1.41	3.29	0.00	0.00
UNII-3	0.54	1.35	1.35	3.96	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Jul. 15, 2025~ Aug. 18, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Jul. 15, 2025~ Aug. 18, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Jul. 15, 2025~ Aug. 18, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Jul. 26, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jul. 26, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Jul. 26, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jul. 26, 2025	Oct. 08, 2025	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz; Max 30dBm	Feb. 22, 2025	Jul. 09, 2025~ Sep. 12, 2025	Feb. 21, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2025	Jul. 09, 2025~ Sep. 12, 2025	Jul. 03, 2026	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Jul. 09, 2025~ Sep. 12, 2025	Sep. 07, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 07, 2025		Sep. 06, 2026	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Jul. 09, 2025~ Sep. 12, 2025	Sep. 02, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 02, 2025		Sep. 01, 2026	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 06, 2025	Jul. 09, 2025~ Sep. 12, 2025	Jul. 05, 2026	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Jul. 09, 2025~ Sep. 12, 2025	Oct. 21, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 04, 2025	Jul. 09, 2025~ Sep. 12, 2025	Jul. 03, 2026	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Jul. 09, 2025~ Sep. 12, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 03, 2025	Jul. 09, 2025~ Sep. 12, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Jul. 09, 2025~ Sep. 12, 2025	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 09, 2025~ Sep. 12, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 09, 2025~ Sep. 12, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 09, 2025~ Sep. 12, 2025	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	± 2.26 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Conducted Power Spectral Density	± 0.90 dB
Frequency	± 0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.36 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2025.7.15~2025.8.18

Test Engineer: Zhu Chong

Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant1	5180	19.63	5169.83	5189.46	---	---
	Ant2	5180	19.72	5170.50	5190.22	---	---
	Ant1	5220	19.58	5210.02	5229.60	---	---
	Ant2	5220	20.06	5210.21	5230.27	---	---
	Ant1	5240	19.72	5229.83	5249.55	---	---
	Ant2	5240	20.01	5230.16	5250.17	---	---
	Ant1	5260	19.49	5249.88	5269.36	---	---
	Ant2	5260	20.06	5250.16	5270.22	---	---
	Ant1	5300	19.58	5290.02	5309.60	---	---
	Ant2	5300	20.01	5290.21	5310.22	---	---
	Ant1	5320	19.53	5310.26	5329.79	---	---
	Ant2	5320	20.30	5309.88	5330.17	---	---
	Ant1	5500	19.96	5489.88	5509.84	---	---
	Ant2	5500	20.01	5490.16	5510.17	---	---
	Ant1	5580	19.77	5569.83	5589.60	---	---
	Ant2	5580	19.87	5570.35	5590.22	---	---
	Ant1	5700	19.72	5689.92	5709.65	---	---
	Ant2	5700	19.49	5690.21	5709.70	---	---
	Ant1	5720	19.87	5709.92	5729.79	---	---
	Ant2	5720	19.25	5710.35	5729.60	---	---
	Ant1	5745	20.30	5734.83	5755.12	---	---
	Ant2	5745	21.49	5733.73	5755.22	---	---
	Ant1	5785	20.39	5774.92	5795.31	---	---
	Ant2	5785	20.06	5775.21	5795.27	---	---
	Ant1	5825	20.01	5815.07	5835.08	---	---
	Ant2	5825	19.96	5815.21	5835.17	---	---
11AC20MIMO	Ant1	5180	20.77	5169.69	5190.46	---	---
	Ant2	5180	20.58	5169.88	5190.46	---	---
	Ant1	5220	20.39	5209.88	5230.27	---	---
	Ant2	5220	20.68	5209.69	5230.36	---	---
	Ant1	5240	20.58	5229.78	5250.36	---	---
	Ant2	5240	20.68	5229.83	5250.51	---	---
	Ant1	5260	20.58	5249.73	5270.31	---	---
	Ant2	5260	20.20	5249.97	5270.17	---	---
	Ant1	5300	20.63	5289.78	5310.41	---	---
	Ant2	5300	20.06	5290.07	5310.12	---	---
	Ant1	5320	20.68	5309.78	5330.46	---	---
	Ant2	5320	20.49	5309.92	5330.41	---	---
	Ant1	5500	20.58	5489.88	5510.46	---	---
	Ant2	5500	20.30	5489.88	5510.17	---	---
	Ant1	5580	20.58	5569.83	5590.41	---	---
	Ant2	5580	21.11	5569.59	5590.70	---	---
	Ant1	5700	20.87	5689.88	5710.74	---	---
	Ant2	5700	21.20	5689.45	5710.65	---	---
	Ant1	5720	20.49	5709.83	5730.31	---	---
	Ant2	5720	20.91	5709.45	5730.36	---	---
	Ant1	5745	21.06	5734.69	5755.74	---	---



	Ant2	5745	20.68	5734.78	5755.46	---	---
	Ant1	5785	21.06	5774.49	5795.55	---	---
	Ant2	5785	20.82	5774.88	5795.70	---	---
	Ant1	5825	21.06	5814.78	5835.84	---	---
11AC40MIMO	Ant2	5825	20.72	5814.40	5835.12	---	---
	Ant1	5190	40.02	5170.13	5210.15	---	---
	Ant2	5190	39.92	5170.04	5209.96	---	---
	Ant1	5230	40.11	5209.94	5250.06	---	---
	Ant2	5230	40.02	5210.04	5250.06	---	---
	Ant1	5270	40.50	5249.75	5290.25	---	---
	Ant2	5270	40.11	5250.23	5290.34	---	---
	Ant1	5310	39.92	5290.13	5330.06	---	---
	Ant2	5310	40.11	5290.04	5330.15	---	---
	Ant1	5510	39.92	5490.13	5530.06	---	---
	Ant2	5510	39.73	5490.23	5529.96	---	---
	Ant1	5550	40.02	5530.13	5570.15	---	---
	Ant2	5550	40.30	5529.85	5570.15	---	---
	Ant1	5670	40.21	5650.04	5690.25	---	---
	Ant2	5670	40.30	5649.75	5690.06	---	---
	Ant1	5710	40.21	5690.13	5730.34	---	---
	Ant2	5710	40.30	5689.85	5730.15	---	---
	Ant1	5755	40.21	5735.13	5775.34	---	---
	Ant2	5755	40.02	5735.23	5775.25	---	---
	Ant1	5795	40.21	5774.85	5815.06	---	---
	Ant2	5795	40.40	5774.66	5815.06	---	---
11AC80MIMO	Ant1	5210	82.13	5169.12	5251.26	---	---
	Ant2	5210	81.37	5169.70	5251.07	---	---
	Ant1	5290	83.28	5248.74	5332.02	---	---
	Ant2	5290	81.75	5249.70	5331.45	---	---
	Ant1	5530	82.52	5488.74	5571.26	---	---
	Ant2	5530	81.75	5489.12	5570.88	---	---
	Ant1	5610	105.19	5546.45	5651.64	---	---
	Ant2	5610	81.94	5569.12	5651.07	---	---
	Ant1	5690	97.95	5633.50	5731.45	---	---
	Ant2	5690	82.13	5649.12	5731.26	---	---
	Ant1	5775	82.90	5733.17	5816.07	---	---
	Ant2	5775	81.18	5734.50	5815.69	---	---
11AC160MIMO	Ant1	5250	164.65	5167.48	5332.13	---	---
	Ant2	5250	165.03	5168.25	5333.28	---	---
	Ant1	5570	165.41	5487.10	5652.52	---	---
	Ant2	5570	164.27	5488.25	5652.52	---	---
11AX20MIMO	Ant1	5180	21.11	5169.69	5190.79	---	---
	Ant2	5180	21.30	5169.45	5190.74	---	---
	Ant1	5220	21.06	5209.54	5230.60	---	---
	Ant2	5220	20.68	5209.64	5230.31	---	---
	Ant1	5240	20.82	5229.64	5250.46	---	---
	Ant2	5240	20.91	5229.64	5250.55	---	---
	Ant1	5260	21.11	5249.59	5270.70	---	---
	Ant2	5260	21.20	5249.35	5270.55	---	---
	Ant1	5300	21.06	5289.49	5310.55	---	---
	Ant2	5300	21.06	5289.49	5310.55	---	---
	Ant1	5320	20.72	5309.83	5330.55	---	---
	Ant2	5320	20.87	5309.69	5330.55	---	---
	Ant1	5500	20.77	5489.59	5510.36	---	---
	Ant2	5500	21.20	5489.21	5510.41	---	---
	Ant1	5580	21.15	5569.45	5590.60	---	---
	Ant2	5580	21.25	5569.30	5590.55	---	---



	Ant1	5700	20.91	5689.54	5710.46	---	---
	Ant2	5700	20.87	5689.49	5710.36	---	---
	Ant1	5720	20.82	5709.64	5730.46	---	---
	Ant2	5720	20.63	5709.69	5730.31	---	---
	Ant1	5745	20.68	5734.69	5755.36	---	---
	Ant2	5745	20.82	5734.59	5755.41	---	---
	Ant1	5785	21.11	5774.49	5795.60	---	---
	Ant2	5785	20.87	5774.59	5795.46	---	---
11AX40MIMO	Ant1	5825	21.25	5814.21	5835.46	---	---
	Ant2	5825	20.77	5814.69	5835.46	---	---
	Ant1	5190	40.50	5169.85	5210.34	---	---
	Ant2	5190	40.30	5169.85	5210.15	---	---
	Ant1	5230	40.69	5209.66	5250.34	---	---
	Ant2	5230	41.16	5209.37	5250.53	---	---
	Ant1	5270	40.40	5249.85	5290.25	---	---
	Ant2	5270	40.11	5250.04	5290.15	---	---
	Ant1	5310	40.30	5290.04	5330.34	---	---
	Ant2	5310	41.07	5289.47	5330.53	---	---
	Ant1	5510	40.11	5490.04	5530.15	---	---
	Ant2	5510	40.59	5489.94	5530.53	---	---
	Ant1	5550	40.21	5529.94	5570.15	---	---
	Ant2	5550	40.78	5529.56	5570.34	---	---
	Ant1	5670	40.30	5649.94	5690.25	---	---
	Ant2	5670	40.50	5649.75	5690.25	---	---
	Ant1	5710	40.69	5689.56	5730.25	---	---
	Ant2	5710	40.69	5689.75	5730.44	---	---
	Ant1	5755	40.59	5734.85	5775.44	---	---
	Ant2	5755	40.40	5735.13	5775.53	---	---
11AX80MIMO	Ant1	5795	40.59	5774.66	5815.25	---	---
	Ant2	5795	40.40	5774.66	5815.06	---	---
	Ant1	5210	81.94	5169.31	5251.26	---	---
	Ant2	5210	82.13	5168.93	5251.07	---	---
	Ant1	5290	81.75	5249.12	5330.88	---	---
	Ant2	5290	81.75	5249.50	5331.26	---	---
	Ant1	5530	81.56	5489.31	5570.88	---	---
	Ant2	5530	82.13	5488.93	5571.07	---	---
	Ant1	5610	82.52	5568.93	5651.45	---	---
	Ant2	5610	82.13	5568.93	5651.07	---	---
	Ant1	5690	96.62	5634.45	5731.07	---	---
	Ant2	5690	82.52	5648.74	5731.26	---	---
11AX160MIMO	Ant1	5775	97.19	5720.21	5817.40	---	---
	Ant2	5775	81.56	5734.50	5816.07	---	---
	Ant1	5250	164.65	5168.25	5332.90	---	---
	Ant2	5250	165.41	5167.48	5332.90	---	---
	Ant1	5570	165.03	5487.10	5652.13	---	---
	Ant2	5570	163.13	5488.63	5651.75	---	---



Test Graphs

