



FCC RADIO TEST REPORT

Applicant : Micro-Star Int'l Co.,Ltd.

Address : No.69, Lide St., Zhonghe Dist. New Taipei City 235
Taiwan

Equipment : Wireless USB dongle

Model No. : WD05

Trade Name : msi

FCC ID : I4L-WD05

I HEREBY CERTIFY THAT :

The sample was received on Jun. 16, 2025 and the testing was completed on Jun. 25, 2025 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	13
4.1 Standard Applicable	13
4.2 Antenna Construction and Directional Gain.....	13
5. Test of AC Power Line Conducted Emission	14
5.1 Test Limit	14
5.2 Test Procedures	14
5.3 Typical Test Setup	15
5.4 Test Result and Data.....	16
5.5 Test Photographs	18
6. Test of Spurious Emission (Radiated)	19
6.1 Test Limit	19
6.2 Test Procedures	20
6.3 Typical Test Setup	21
6.4 Test Result and Data (9kHz ~ 30MHz).....	23
6.5 Test Result and Data (30MHz ~ 1GHz).....	23
6.6 Test Result and Data (1GHz ~ 25GHz).....	25
6.7 Restricted Bands of Operation	31
6.8 Test Photographs (30MHz ~ 1GHz)	32
6.9 Test Photographs (1GHz ~ 25GHz)	33
7. Test of Spurious Emission (Conducted).....	35
7.1 Test Limit	35
7.2 Test Procedure	35
7.3 Test Setup Layout	35
7.4 Test Result and Data.....	35
8. On Time, Duty Cycle and Measurement methods	38
8.1 Test Limit	38
8.2 Test Procedure	38
8.3 Test Setup Layout	38
8.4 Test Result and Data.....	38
9. 6dB Bandwidth Measurement Data.....	40
9.1 Test Limit	40



9.2	Test Procedures	40
9.3	Test Setup Layout	40
9.4	Test Result and Data	40
10.	Maximum Average Output Power	42
10.1	Test Limit	42
10.2	Test Procedures	42
10.3	Test Setup Layout	42
10.4	Test Result and Data	43
11.	Power Spectral Density	44
11.1	Test Limit	44
11.2	Test Procedures	44
11.3	Test Setup Layout	44
11.4	Test Result and Data	44



History of this test report

Report No.	Issued Date	Description
25060279-TRFCC01	Jul. 16, 2025	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Output Power	PASS
15.247(e)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(25060279-TEFV01).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	2400-2483.5MHz
Center Frequency Range	2408-2474MHz
Modulation Type	GFSK
Modulation Technology	DTS
Data Rate	1Mbps
Antenna Type	PCB Antenna
Antenna Gain	1.80 dBi

Note: For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)
*1	2408	18	2442
2	2410	19	2444
3	2412	20	2446
4	2414	21	2448
5	2416	22	2450
6	2418	23	2452
7	2420	24	2454
8	2422	25	2456
9	2424	26	2458
10	2426	27	2460
11	2428	28	2462
12	2430	29	2464
13	2432	30	2466
14	2434	31	2468
15	2436	32	2470
16	2438	33	2472
*17	2440	*34	2474

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "RF TEST & EMI MODE ver.1.0.0.4" under Windows OS system was executed to transmit and receive data via SRD.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps), From System
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), From System
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), From System
caused "Test Mode 1" generated the worst case, it was reported as the final data.	

Note: There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.
For AC Power Line Conducted Emission, AC 120V / 60Hz is worst case.
For Radiated Spurious Emission(9KHz ~30MHz & 30MHz ~ 1GHz), AC 240V / 60Hz is worst case.

Modulation Type	TX CONFIGURATION
GFSK (1Mbps)	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
USB Cable(AtoB)	BENEVO	BUSB0301AMFB	0.8m / NS	N/A
Notebook	AUAS	P2430U	N/A	Adapter / 1.8m / NS
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	AUAS	P2430U	N/A	Adapter / 1.8m / NS



2.5 General Information of Test

Organization	CerpPASS Technology Corp.		
☒ Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	IC	4934E-1, 4934E-2	
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz		
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2025/06/25	26.3°C / 48%	Leon Huang
Radiated Emissions	3M03-NK	2025/06/20	21.6°C / 57%	Leon Huang
Radiated Emissions	3M03-NK	2025/06/23	23.1°C / 58%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2025/06/20	21.5°C / 56%	Leon Huang

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.2dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±5.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±7.6%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M03-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Sunol	JB1	A020514-2	2024/07/09	2025/07/08
Active Loop Antenna	EMCO	6507	00040855	2025/04/28	2026/04/27
Horn Antenna	EMCO	3116	31974	2024/10/18	2025/10/17
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2024/08/28	2025/08/27
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2024/08/22	2025/08/21
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2024/07/16	2025/07/15
Preamplifier	EMC INSTRUMENTS	EMC0518A45SE	981069	2024/12/17	2025/12/16
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2024/10/15	2025/10/14
Preamplifier	EM Electronics corp.	EM330	60611	2025/03/28	2026/03/27
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
Cable-8m(10M-26.5G)	HUBER SUHNER	SF126E	587396/126E	2024/10/14	2025/10/13
Cable-3m(10M-26.5G)	HUBER SUHNER	SF126E	587399/126E	2024/10/14	2025/10/13
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2024/10/14	2025/10/13
Cable-1m(1G-26.5G)	HUBER SUHNER	SF126E	589848/126E	2024/10/14	2025/10/13
Cable-4m(30M-1G)	HUBER SUHNER	RG-214	02953M	2024/09/04	2025/09/03
Cable-1m(30M-1G)	HUBER SUHNER	RG-214	05094M	2024/09/04	2025/09/03
Cable-9m(30M-1G)	HUBER SUHNER	RG-214	00402M	2024/09/04	2025/09/03
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2024/07/03	2025/07/02
Highpass Filter	WOKEN	WFIL-H7000-18000F-01	WR377WC2B2	2024/10/15	2025/10/14

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2025/03/03	2026/03/02
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2024/10/24	2025/10/23
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Switch Box	Theda	1-4	TW5451159	NA	NA



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2024/07/16	2025/07/15
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2024/08/27	2025/08/26
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	PCB Antenna
Antenna Gain	1.80 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3 Typical Test Setup

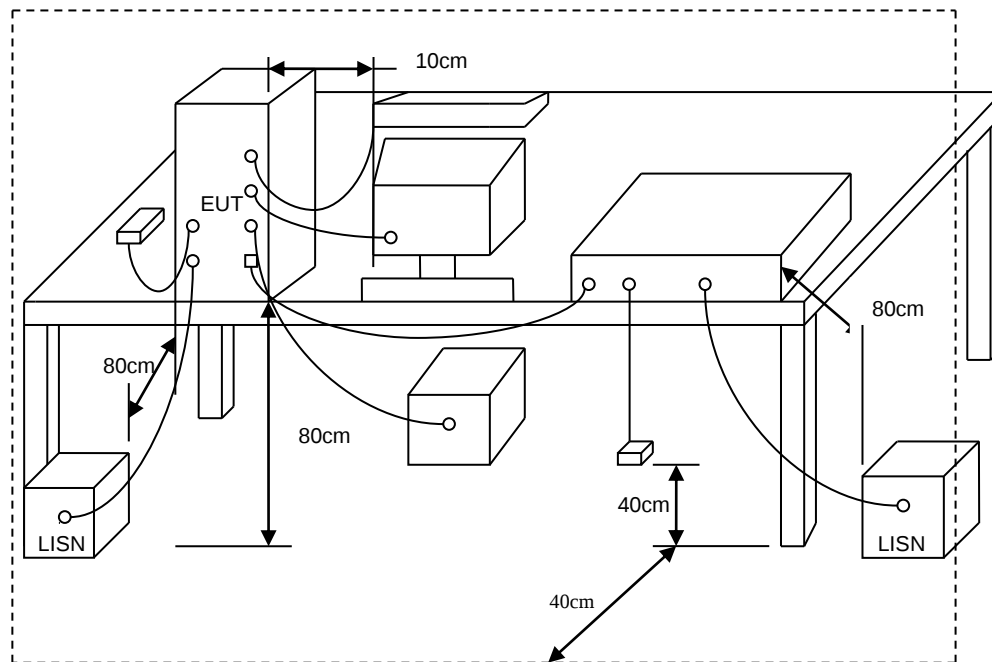




5.4 Test Result and Data

Test Mode : SRD 1TX 2408MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Phase : Line

Data: 1

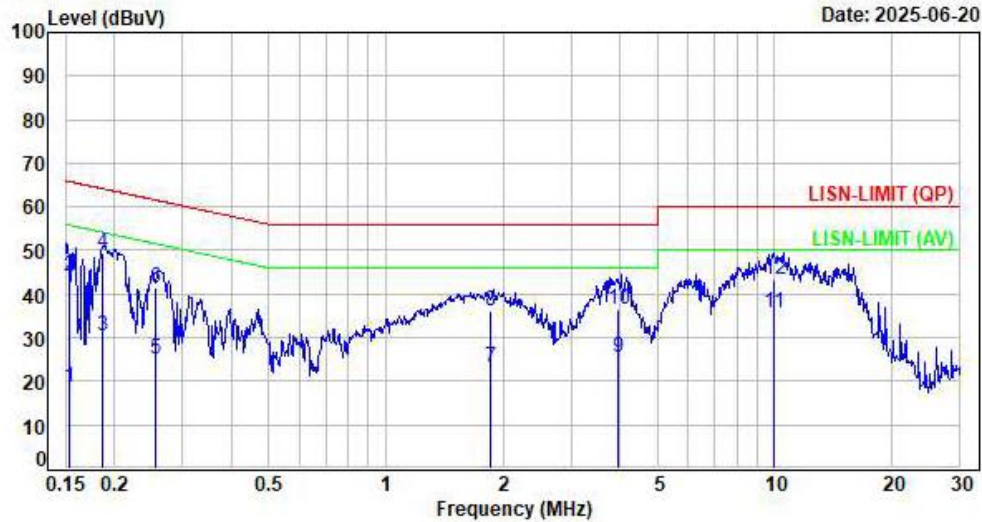

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1527	9.63	8.91	18.54	55.85	-37.31	Average	P
2	0.1527	9.63	34.55	44.18	65.85	-21.67	QP	P
3	0.1863	9.63	20.97	30.60	54.20	-23.60	Average	P
4	0.1863	9.63	39.65	49.28	64.20	-14.92	QP	P
5	0.2567	9.63	15.35	24.98	51.54	-26.56	Average	P
6	0.2567	9.63	31.80	41.43	61.54	-20.11	QP	P
7	1.8622	9.68	13.61	23.29	46.00	-22.71	Average	P
8	1.8622	9.68	26.47	36.15	56.00	-19.85	QP	P
9	3.9688	9.74	15.79	25.53	46.00	-20.47	Average	P
10	3.9688	9.74	26.73	36.47	56.00	-19.53	QP	P
11	9.9717	9.82	25.87	35.69	50.00	-14.31	Average	P
12	9.9717	9.82	33.69	43.51	60.00	-16.49	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : SRD 1TX 2408MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Phase : Neutral

Data: 2

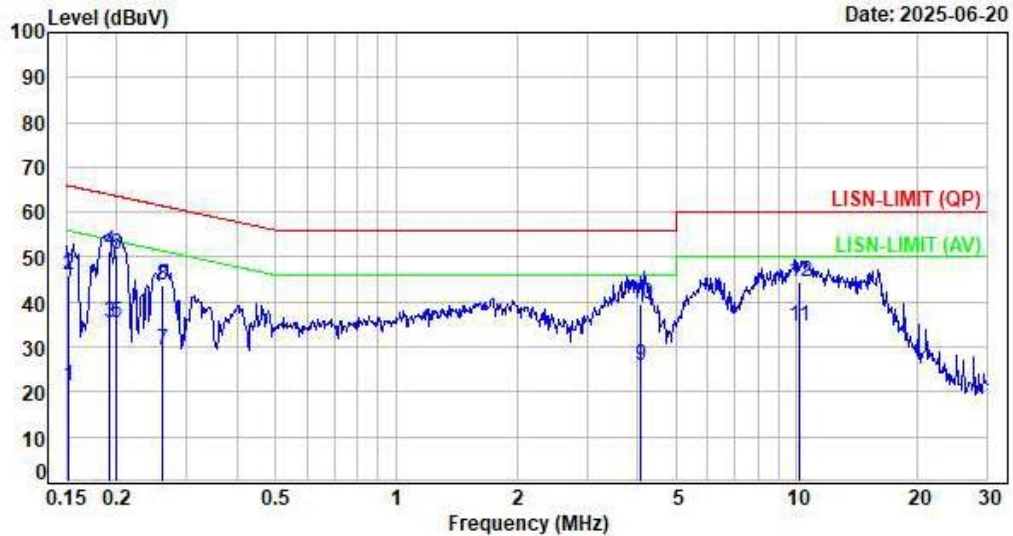

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1514	9.61	11.75	21.36	55.92	-34.56	Average	P
2	0.1514	9.61	36.27	45.88	65.92	-20.04	QP	P
3	0.1926	9.61	25.78	35.39	53.93	-18.54	Average	P
4	0.1926	9.61	41.84	51.45	63.93	-12.48	QP	P
5	0.2001	9.61	25.94	35.55	53.61	-18.06	Average	P
6	0.2001	9.61	41.10	50.71	63.61	-12.90	QP	P
7	0.2612	9.61	19.51	29.12	51.39	-22.27	Average	P
8	0.2612	9.61	34.03	43.64	61.39	-17.75	QP	P
9	4.0676	9.71	16.19	25.90	46.00	-20.10	Average	P
10	4.0676	9.71	29.87	39.58	56.00	-16.42	QP	P
11	10.1709	9.82	24.60	34.42	50.00	-15.58	Average	P
12	10.1709	9.82	34.55	44.37	60.00	-15.63	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(X-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup

Below 30MHz test setup

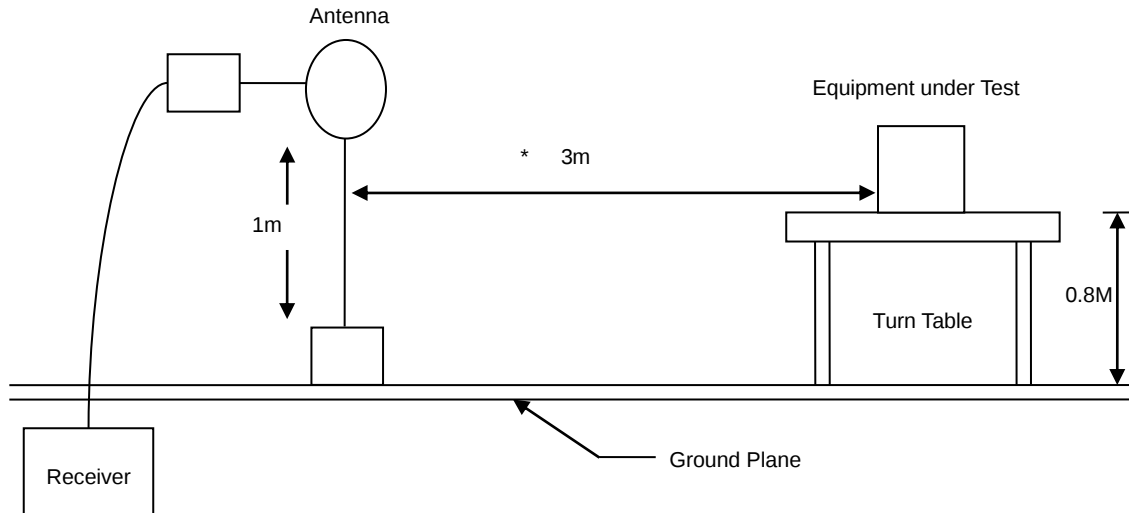


30MHz- 1GHz Test Setup

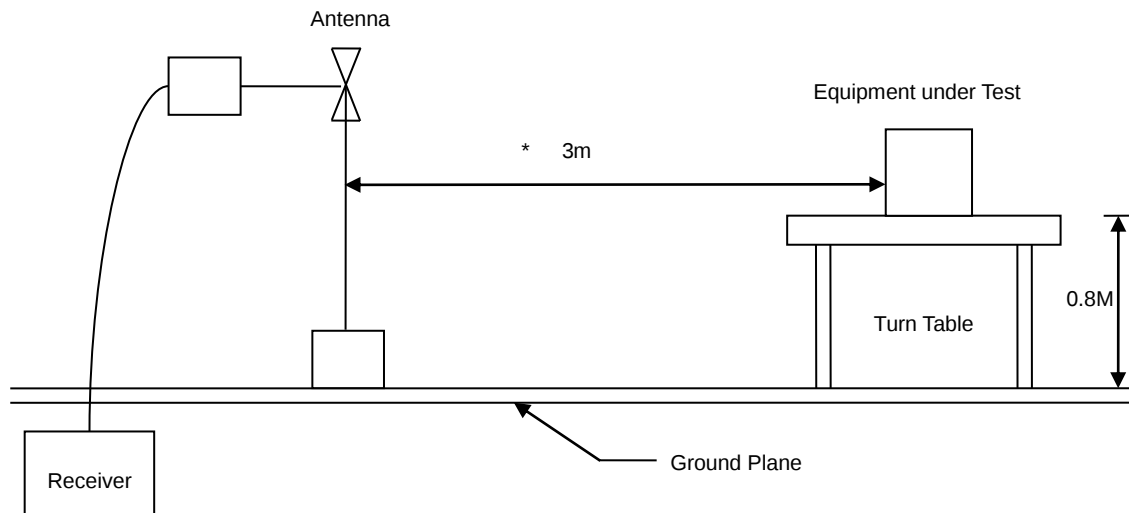



Above 1GHz Test Setup

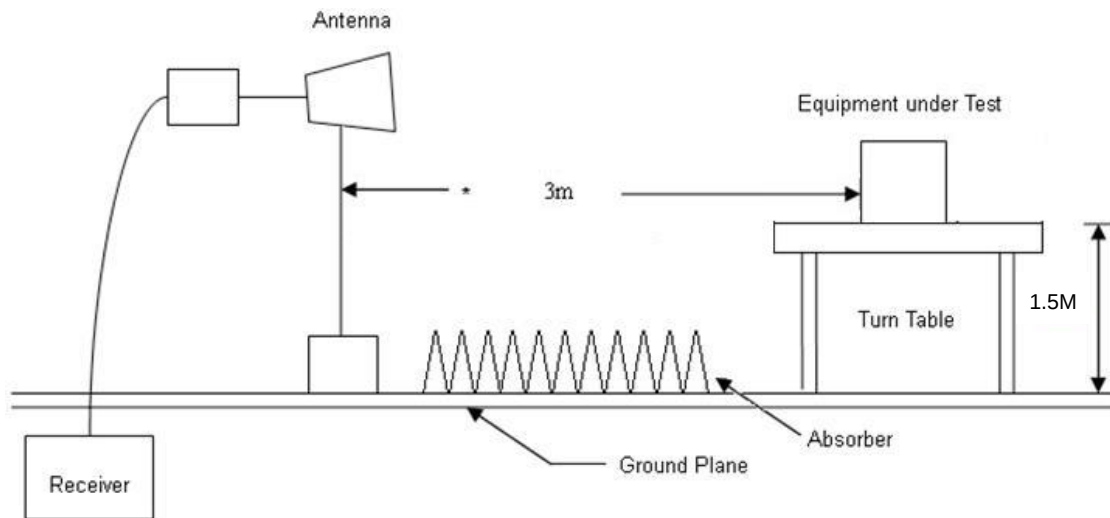




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Test Mode : SRD 1TX 2408MHz 1Mbps
Voltage : From System(AC 240V/60Hz)
Pol : Vertical

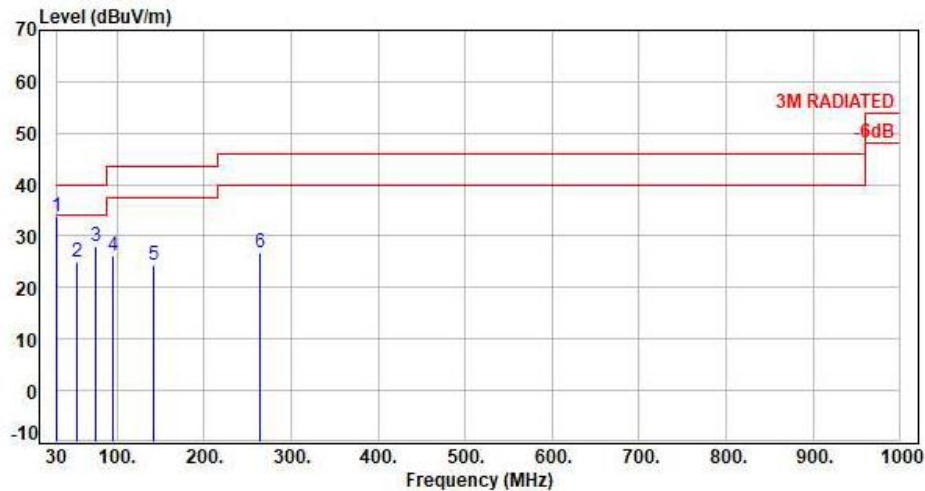

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-2.10	35.76	33.66	40.00	-6.34	Peak	400	360	P
2	53.28	-15.99	40.83	24.84	40.00	-15.16	Peak	400	360	P
3	74.62	-15.51	43.45	27.94	40.00	-12.06	Peak	400	360	P
4	95.96	-14.49	40.77	26.28	43.50	-17.22	Peak	400	360	P
5	142.52	-9.82	34.10	24.28	43.50	-19.22	QP	100	222	P
6	264.74	-9.18	36.10	26.92	46.00	-19.08	Peak	400	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2408MHz 1Mbps
Voltage : From System(AC 240V/60Hz)
Pol : Horizontal

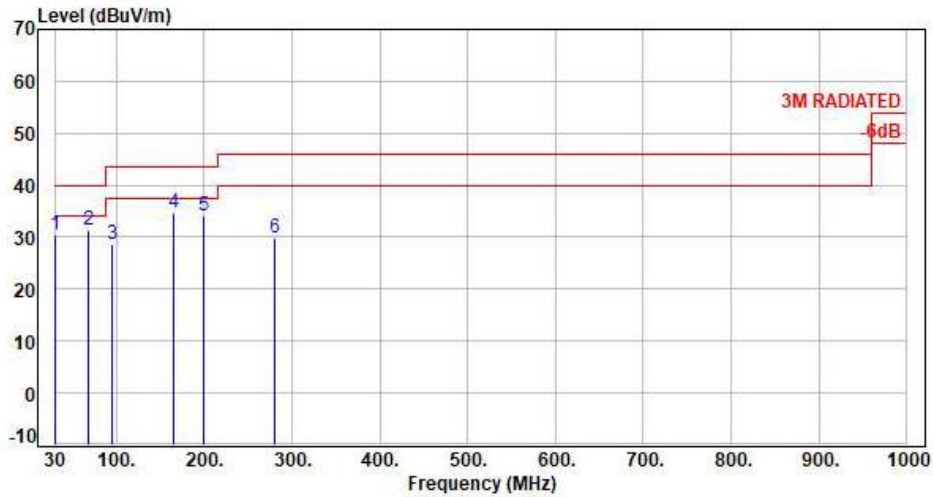

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-2.10	32.49	30.39	40.00	-9.61	Peak	400	360	P
2	68.80	-15.37	46.77	31.40	40.00	-8.60	Peak	400	360	P
3	95.96	-14.49	43.15	28.66	43.50	-14.84	Peak	400	360	P
4	165.80	-10.54	45.22	34.68	43.50	-8.82	Peak	400	360	P
5	198.78	-9.29	43.44	34.15	43.50	-9.35	Peak	400	360	P
6	280.26	-8.58	38.34	29.76	46.00	-16.24	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Test Mode : SRD 1TX 2408MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Pol : Vertical

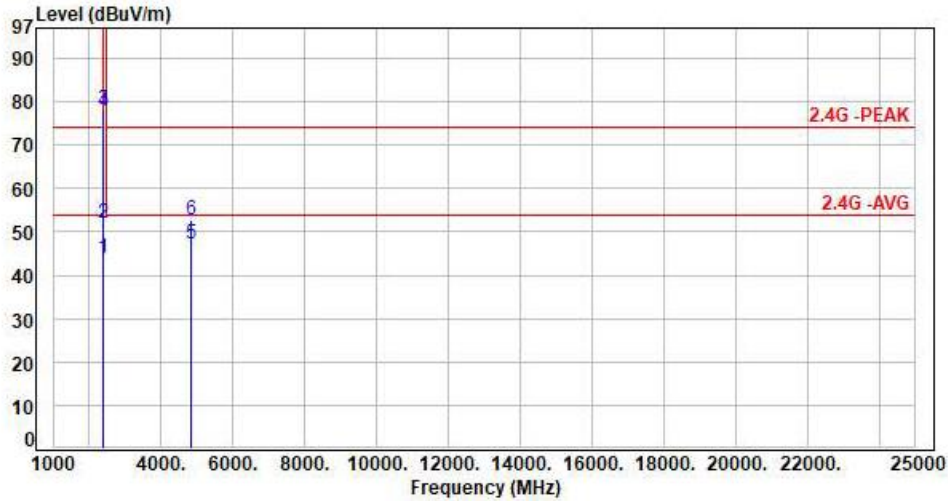

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.33	50.13	43.80	54.00	-10.20	Average	100	268	P
2	2390.00	-6.33	58.44	52.11	74.00	-21.89	Peak	100	268	P
3	2408.00	-6.49	84.61	78.12	200.00	-121.88	Average	100	268	P
4	2408.00	-6.49	84.49	78.00	200.00	-122.00	Peak	100	268	P
5	4816.00	0.70	46.41	47.11	54.00	-6.89	Average	101	274	P
6	4816.00	0.70	52.14	52.84	74.00	-21.16	Peak	101	274	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2408MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Pol : Horizontal

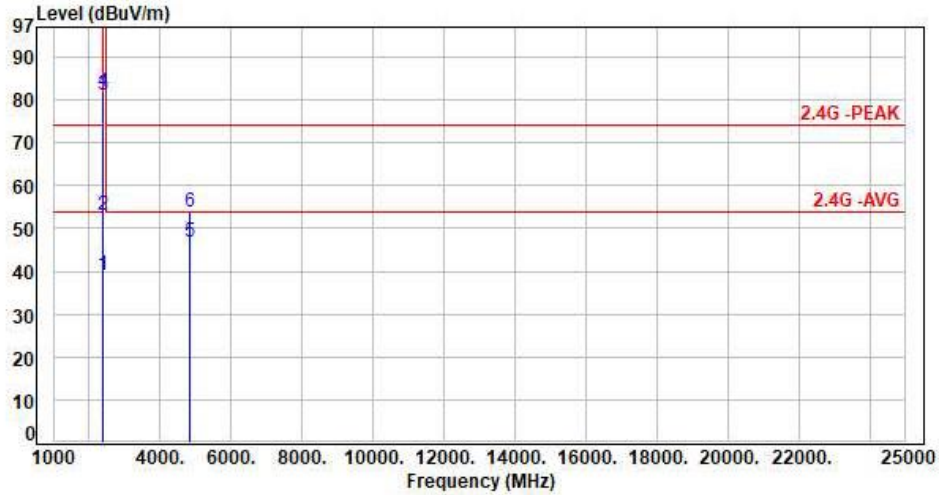

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.33	45.59	39.26	54.00	-14.74	Average	100	331	P
2	2390.00	-6.33	59.53	53.20	74.00	-20.80	Peak	100	331	P
3	2408.00	-6.49	87.77	81.28	200.00	-118.72	Average	100	331	P
4	2408.00	-6.49	88.39	81.90	200.00	-118.10	Peak	100	331	P
5	4816.00	0.70	46.08	46.78	54.00	-7.22	Average	101	245	P
6	4816.00	0.70	53.11	53.81	74.00	-20.19	Peak	101	245	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2440MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Pol : Vertical

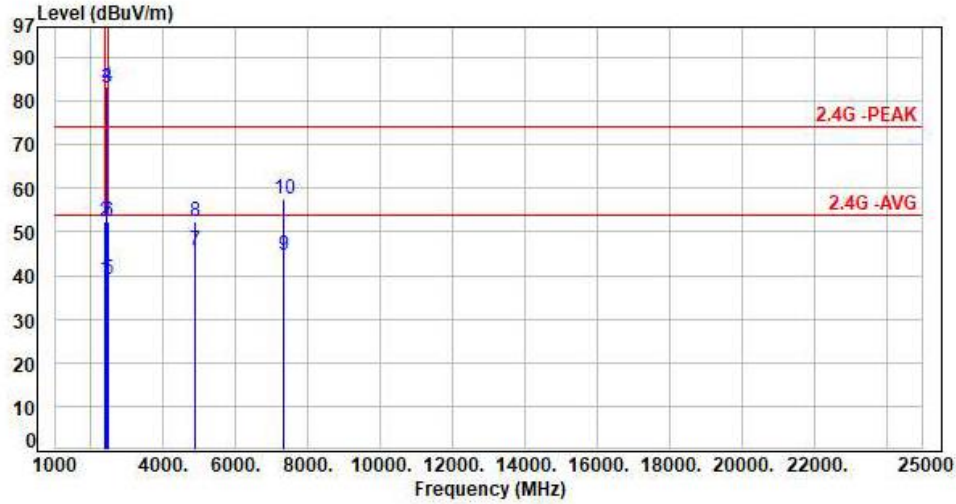

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.33	45.43	39.10	54.00	-14.90	Average	100	261	P
2	2390.00	-6.33	58.83	52.50	74.00	-21.50	Peak	100	261	P
3	2440.00	-6.59	89.68	83.09	200.00	-116.91	Average	100	261	P
4	2440.00	-6.59	89.87	83.28	200.00	-116.72	Peak	100	261	P
5	2483.50	-6.56	45.53	38.97	54.00	-15.03	Average	100	261	P
6	2483.50	-6.56	58.88	52.32	74.00	-21.68	Peak	100	261	P
7	4880.00	0.82	44.96	45.78	54.00	-8.22	Average	100	257	P
8	4880.00	0.82	51.71	52.53	74.00	-21.47	Peak	100	257	P
9	7320.00	4.68	40.00	44.68	54.00	-9.32	Average	100	350	P
10	7320.00	4.68	52.92	57.60	74.00	-16.40	Peak	100	350	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2440MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Pol : Horizontal

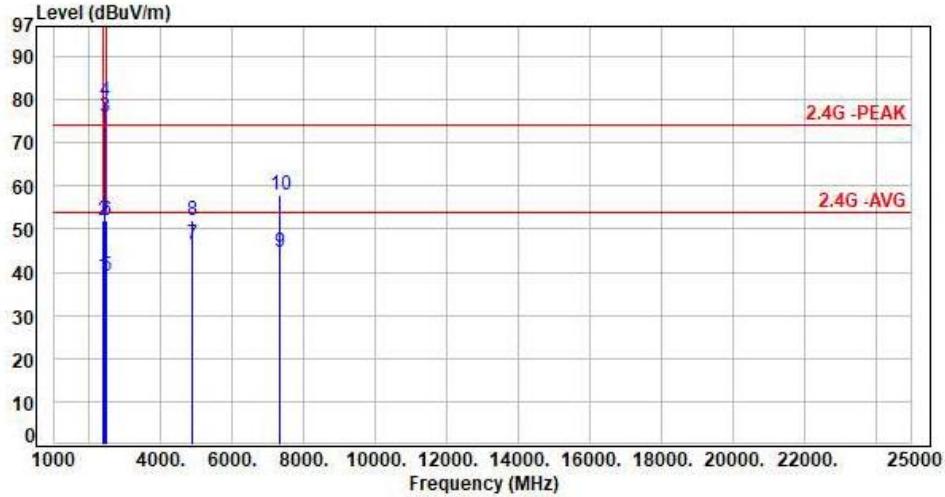


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-6.33	45.48	39.15	54.00	-14.85	Average	133	171	P
2	2390.00	-6.33	58.23	51.90	74.00	-22.10	Peak	133	171	P
3	2440.00	-6.59	82.69	76.10	200.00	-123.90	Average	133	171	P
4	2440.00	-6.59	86.20	79.61	200.00	-120.39	Peak	133	171	P
5	2483.50	-6.56	45.53	38.97	54.00	-15.03	Average	133	171	P
6	2483.50	-6.56	58.65	52.09	74.00	-21.91	Peak	133	171	P
7	4880.00	0.82	45.74	46.56	54.00	-7.44	Average	117	245	P
8	4880.00	0.82	51.11	51.93	74.00	-22.07	Peak	117	245	P
9	7320.00	4.68	40.02	44.70	54.00	-9.30	Average	100	350	P
10	7320.00	4.68	53.19	57.87	74.00	-16.13	Peak	100	350	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2474MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Pol : Vertical

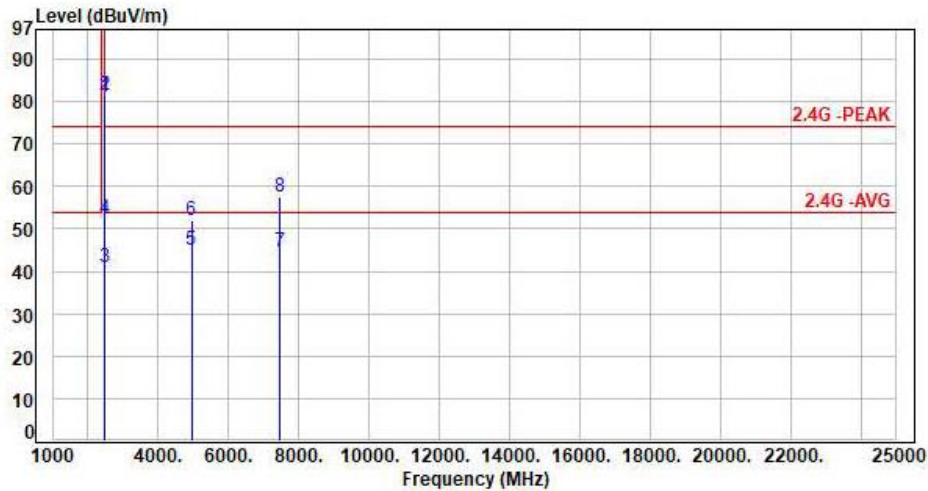

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2474.00	-6.57	87.80	81.23	200.00	-118.77	Average	100	224	P
2	2474.00	-6.57	88.19	81.62	200.00	-118.38	Peak	100	224	P
3	2483.50	-6.56	47.52	40.96	54.00	-13.04	Average	100	224	P
4	2483.50	-6.56	59.10	52.54	74.00	-21.46	Peak	100	224	P
5	4948.00	1.08	43.96	45.04	54.00	-8.96	Average	114	250	P
6	4948.00	1.08	50.81	51.89	74.00	-22.11	Peak	114	250	P
7	7442.00	4.60	40.02	44.62	54.00	-9.38	Average	100	350	P
8	7442.00	4.60	53.07	57.67	74.00	-16.33	Peak	100	350	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2474MHz 1Mbps
Voltage : From System(AC 120V/60Hz)
Pol : Horizontal

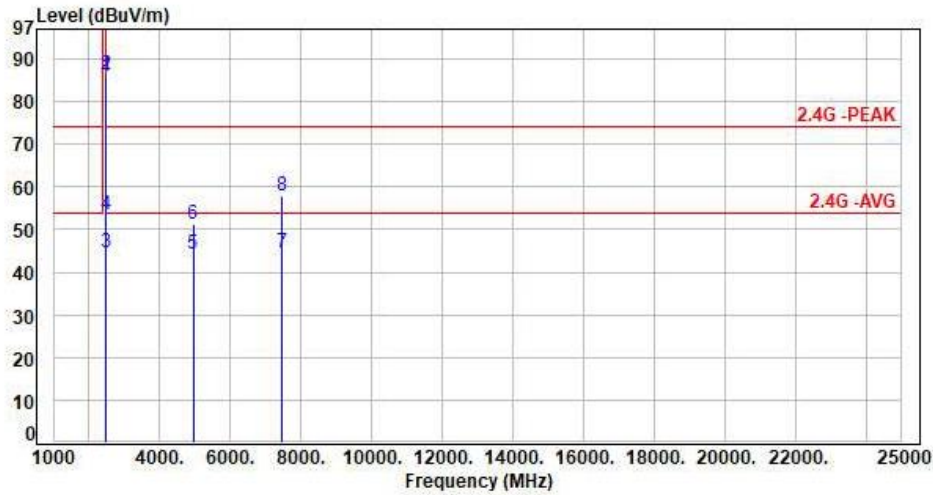

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2474.00	-6.57	92.63	86.06	200.00	-113.94	Average	100	168	P
2	2474.00	-6.57	93.03	86.46	200.00	-113.54	Peak	100	168	P
3	2483.50	-6.56	51.35	44.79	54.00	-9.21	Average	100	168	P
4	2483.50	-6.56	60.09	53.53	74.00	-20.47	Peak	100	168	P
5	4948.00	1.08	43.13	44.21	54.00	-9.79	Average	119	247	P
6	4948.00	1.08	50.16	51.24	74.00	-22.76	Peak	119	247	P
7	7442.00	4.60	39.88	44.48	54.00	-9.52	Average	100	10	P
8	7442.00	4.60	53.45	58.05	74.00	-15.95	Peak	100	10	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below –30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3


- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data


Note: Test plots refer to the following pages.

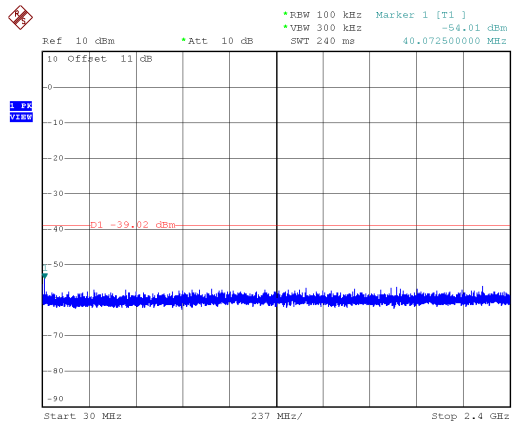Modulation Type: GFSK(1Mbps)
CH01


Date: 25.JUN.2025 15:47:47

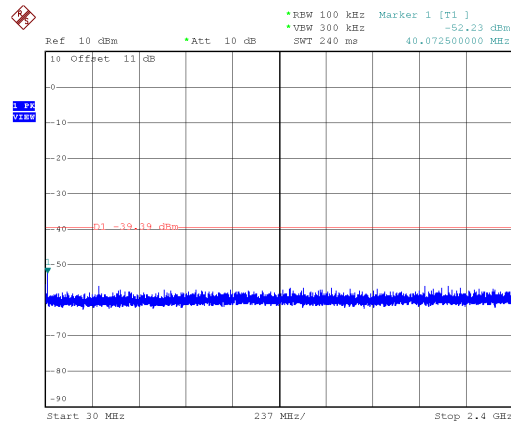Modulation Type: GFSK(1Mbps)
CH17


Date: 25.JUN.2025 16:24:10

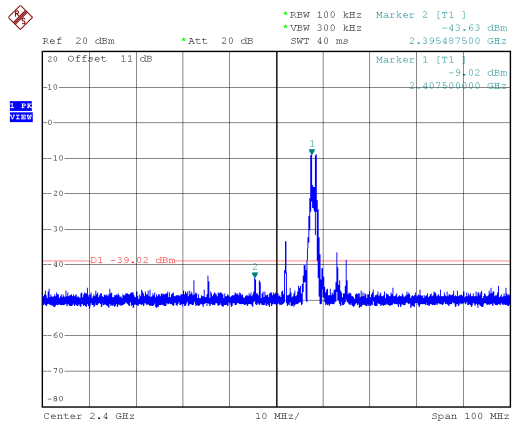


Date: 25.JUN.2025 15:47:05

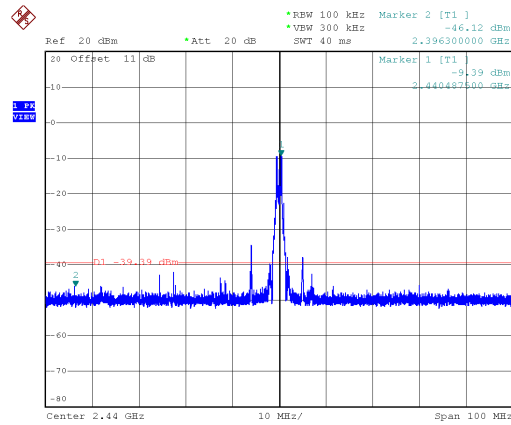

Date: 25.JUN.2025 16:23:27

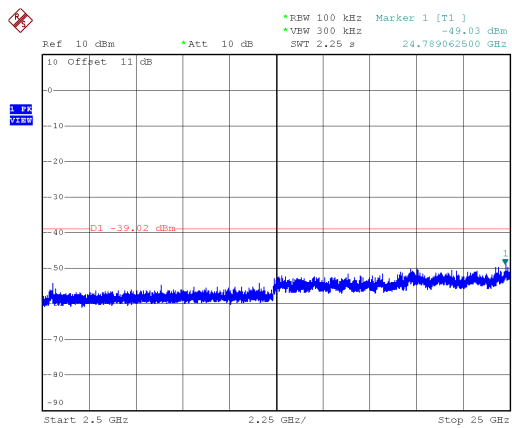


Date: 25.JUN.2025 15:48:30

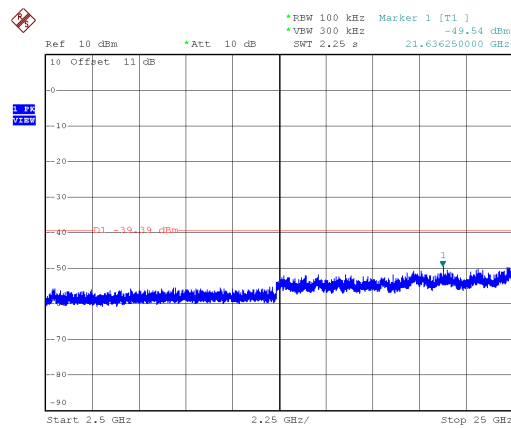


Date: 25.JUN.2025 16:24:53




Modulation Type: GFSK(1Mbps)
CH34

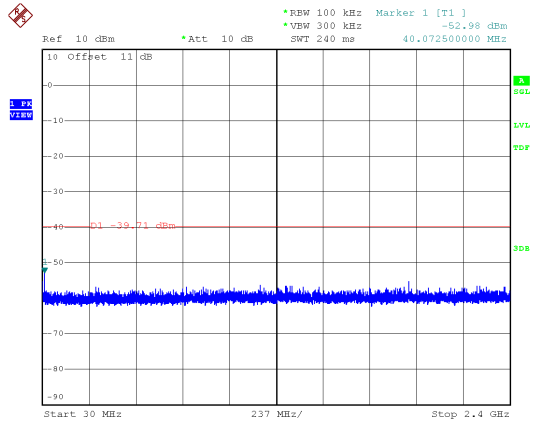

Date: 25.JUN.2025 16:39:26

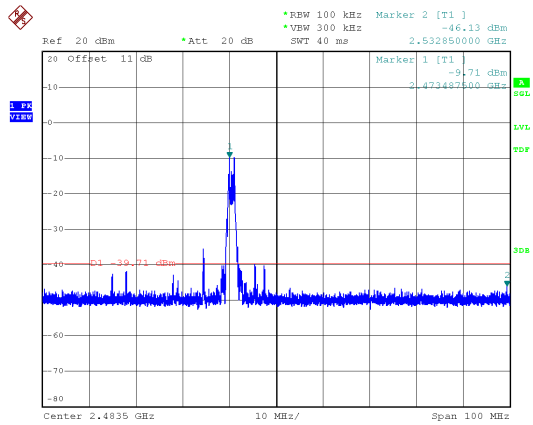

Date: 25.JUN.2025 16:38:43

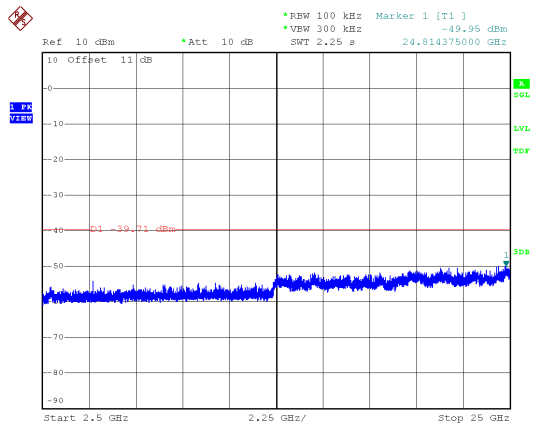

Date: 25.JUN.2025 16:40:08



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK	3.58	64.26	5.58%



Modulation Type: GFSK(1Mbps)

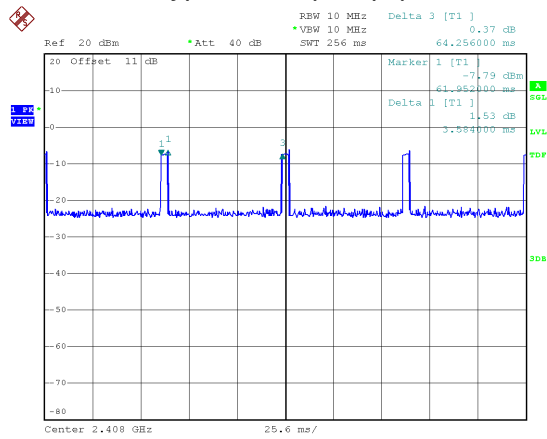

Date: 25.JUN.2025 15:33:13



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout




9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK	1	2408	1161.00	500
	17	2440	1167.00	500
	34	2474	1176.00	500




Modulation Type: GFSK(1Mbps)
CH01

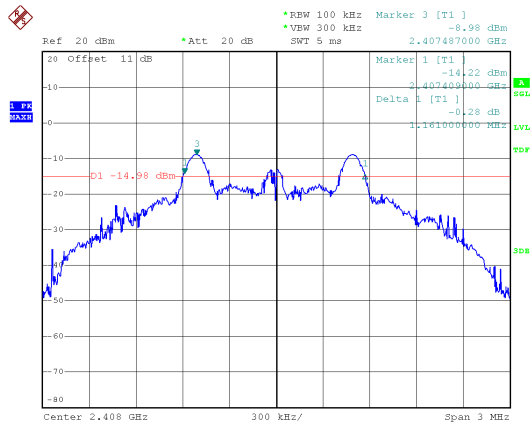


Date: 25.JUN.2025 15:34:17

Modulation Type: GFSK(1Mbps)
CH17

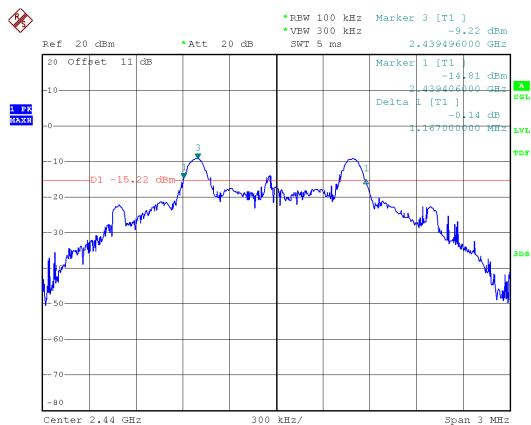

Date: 25.JUN.2025 16:10:38

Modulation Type: GFSK(1Mbps)
CH34

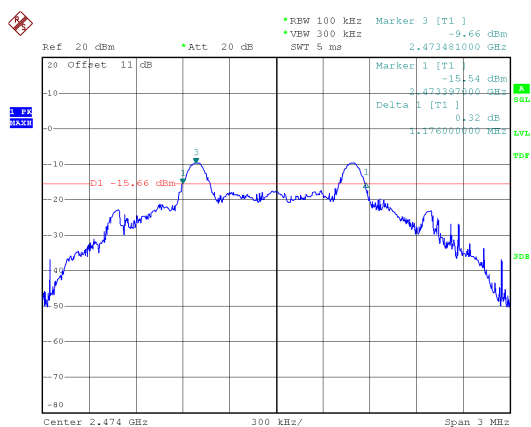

Date: 25.JUN.2025 16:41:21



10. Maximum Average Output Power

10.1 Test Limit


The Maximum Output Power Measurement is 30dBm.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



**10.4 Test Result and Data**

Conducted Setting	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
				Average	Average
Default	GFSK	1	2408	-9.25	0.119
Default		17	2440	-9.52	0.112
Default		34	2474	-10.02	0.100



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10.1

11.3 Test Setup Layout




11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit
GFSK	1	2408	-26.25	12.54	-13.71	8.00
	17	2440	-26.6	12.54	-14.06	8.00
	34	2474	-26.95	12.54	-14.41	8.00




Modulation Type: GFSK(1Mbps)
CH01

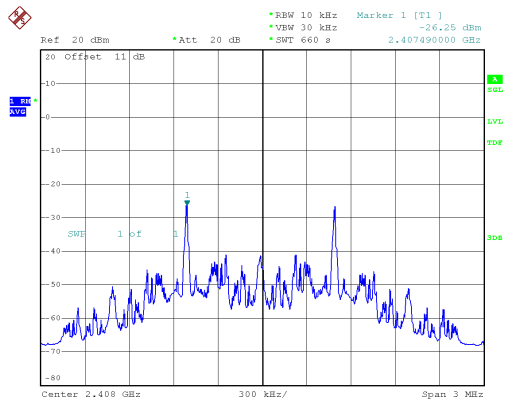


Date: 25.JUN.2025 15:46:21

Modulation Type: GFSK(1Mbps)
CH17

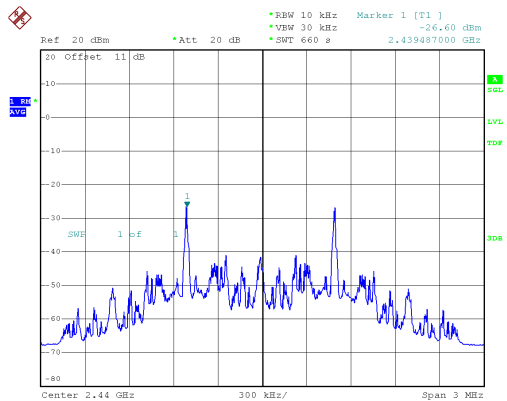

Date: 25.JUN.2025 16:22:44

Modulation Type: GFSK(1Mbps)
CH34

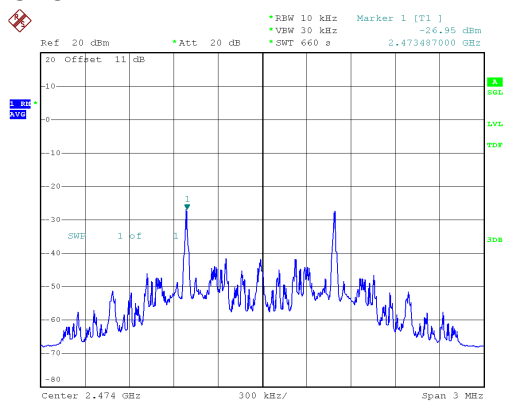

Date: 25.JUN.2025 16:53:30

-----THE END OF REPORT-----