



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170700778203  
Page: 1 of 91

# TEST REPORT

**Application No.:** SZEM1707007782CR  
**Applicant:** Creative Labs Inc.  
**Address of Applicant:** 1901 McCarthy Blvd., Milpitas, California United States  
**Manufacturer:** Creative Labs Pte. Ltd.  
**Address of Manufacturer:** 31 International Business Park #03-01 CREATIVE RESOURCE SINGAPORE 609921  
**Equipment Under Test (EUT):**  
**EUT Name:** Creative X-Fi Sonic Carrier  
**Model No.:** MF8235  
**Trade mark:** CREATIVE  
**FCC ID:** IBAMF8235  
**Standards:** 47 CFR Part 15, Subpart C 15.247 (2016)  
**Date of Receipt:** 2017-07-31  
**Date of Test:** 2017-08-09 to 2017-08-28  
**Date of Issue:** 2017-08-29

<b>Test Result :</b>	<b>Pass*</b>
----------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-08-29		Original

Authorized for issue by:			
		Vincent Chen /Project Engineer	
		Eric Fu /Reviewer	

## 2 Test Summary

<b>Radio Spectrum Technical Requirement</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.4	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

**Remark:**

Model No: MF8235

This test report (Ref. No.: SZEM170700778203) is only valid with the original test report (Ref. No.: SZEM170200069904).

Compared with the original report, this report changed the board except the Bluetooth, WiFi, Wireless Audio module board. Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest. Therefore in this report Conducted Emissions at AC Power Line (150kHz-30MHz), Conducted Peak Output Power and Radiated Spurious Emissions were fully retested on model MF8235 and shown the data in this report, other tests please refer to original report SZEM170200069904.

### 3 Contents

	Page
1 COVER PAGE .....	1
2 TEST SUMMARY .....	3
3 CONTENTS .....	4
4 GENERAL INFORMATION .....	5
4.1 DETAILS OF E.U.T .....	5
4.2 DESCRIPTION OF SUPPORT UNITS .....	5
4.3 MEASUREMENT UNCERTAINTY .....	5
4.4 TEST LOCATION .....	6
4.5 TEST FACILITY .....	6
4.6 DEVIATION FROM STANDARDS .....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
5 EQUIPMENT LIST .....	7
6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....	9
6.1 ANTENNA REQUIREMENT .....	9
6.1.1 Test Requirement: .....	9
6.1.2 Conclusion .....	9
7 RADIO SPECTRUM MATTER TEST RESULTS .....	10
7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz) .....	10
7.1.1 E.U.T. Operation .....	11
7.1.2 Test Setup Diagram .....	11
7.1.3 Measurement Data .....	11
7.2 CONDUCTED PEAK OUTPUT POWER .....	14
7.2.1 E.U.T. Operation .....	15
7.2.2 Test Setup Diagram .....	15
7.2.3 Measurement Procedure and Data .....	15
7.3 RADIATED SPURIOUS EMISSIONS .....	16
7.3.1 E.U.T. Operation .....	17
7.3.2 Test Setup Diagram .....	17
7.3.3 Measurement Procedure and Data .....	18
8 PHOTOGRAPHS .....	71
8.1 RADIATED SPURIOUS EMISSIONS TEST SETUP .....	71
8.2 EUT CONSTRUCTIONAL DETAILS .....	71
9 APPENDIX .....	72
9.1 APPENDIX 15.247 .....	72
LS9-AC11DBT .....	85-91

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	AC 120V/60Hz
Cable:	AC cable for MF8235: 162cm unshielded with one ferrite core
Operation Frequency:	(CDW-B18821A-00 & LS9-AC11DBT-AC11DBT) IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Sample Type:	Fixed production
Antenna Type:	PIFA
Antenna Gain:	3.0dBi

### 4.2 Description of Support Units

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 <sup>-8</sup>
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz) 4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (30MHz-1GHz) 4.8dB (1GHz-18GHz)
9	Temperature test	1 °C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%

#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053      Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None

## 5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017-05-10	2018-05-10
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09
LISN	ETS-LINDGREN	3816/2	SEM007-02	2017-04-14	2018-04-13
8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-09-28	2017-09-28
4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-09-28	2017-09-28
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2016-09-28	2017-09-28

RF Conducted Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2017-04-14	2018-04-13
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

RE in chamber					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2017-03-05	2020-03-05
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
Horn Antenna(15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-14	2017-06-16	2020-06-15

Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
Low Noise Amplifier(100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
Pre-amplifier(0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-10	2016-10-17	2017-10-17
Pre-amplifier(26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14
Band filter	N/A	N/A	SEM023-01	N/A	N/A

RE in chamber					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2017-05-10	2018-05-10
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
EMI Test Receiver (9kHz-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2017-04-14	2018-04-13
Trilog-Broadband Antenna(30MHz-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2019-01-26
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2017-06-05	2018-06-04
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-18

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

#### 6.1.2 Conclusion


Standard Requirment:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna( LS9-AC11DBT, CDW-B18821A-00)

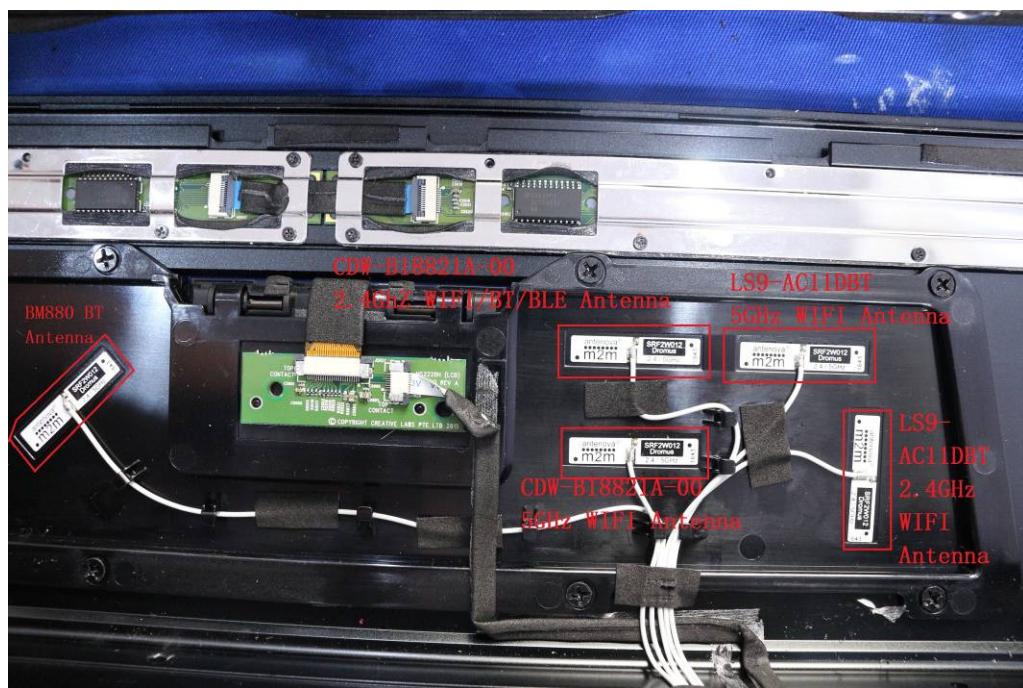

The antenna uses a unique coupling to the intentional radiator and no consideration of replacement. The best case gain of the antenna is 3dBi.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207  
Test Method: ANSI C63.10 (2013) Section 6.2  
Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 7.1.1 E.U.T. Operation

## Operating Environment:

Temperature: 25.0 °C      Humidity: 55 % RH      Atmospheric Pressure: 1020 mbar

h: WIFI 2.4G TX (CDW-B18821A-00): Keep the EUT transmitting.

i: WIFI 2.4G TX (LS9-AC11DBT) : Keep the EUT transmitting.


h: WIFI 2.4G TX (CDW-B18821A-00): Keep the EUT transmitting.

i: WIFI 2.4G TX (LS9-AC11DBT) : Keep the EUT transmitting.

The worst case for final test: Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)

Only the worst case is recorded in the report


### 7.1.2 Test Setup Diagram

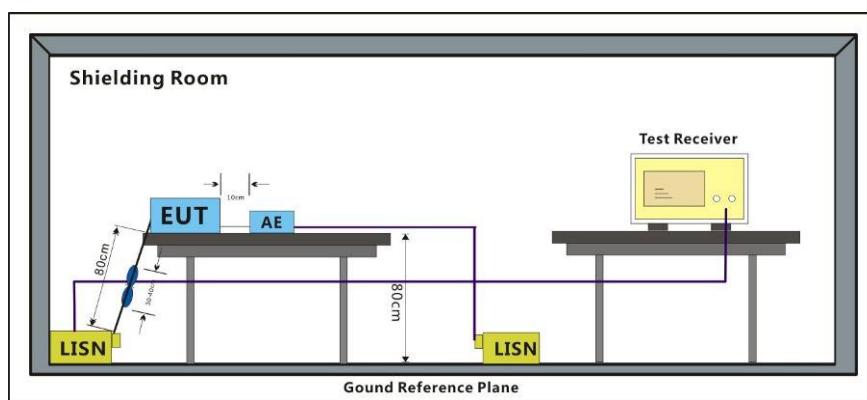

### 7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\text{ohm}/50\mu\text{H} + 5\text{ohm}$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Mode:h; Line:Live Line

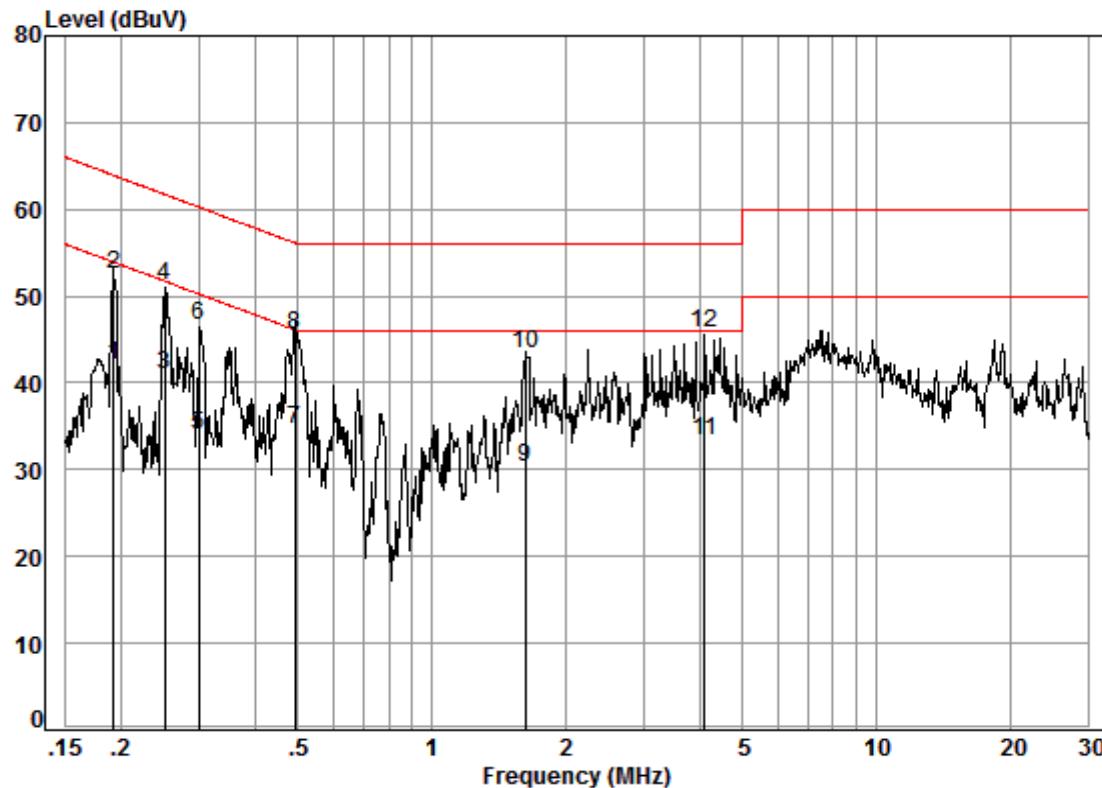

Site : Shielding Room


Condition: Line

Job No. : 07782CR

Test mode: h

Freq	Cable	LISN	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Level	Level	Line	Limit
1	0.19	0.02	9.63	32.52	42.17	53.93	-11.76 Average
2	0.19	0.02	9.63	42.82	52.47	63.93	-11.46 QP
3	0.25	0.01	9.63	31.39	41.03	51.73	-10.70 Average
4	0.25	0.01	9.63	41.67	51.31	61.73	-10.42 QP
5	0.30	0.01	9.63	24.46	34.10	50.28	-16.18 Average
6	0.30	0.01	9.63	36.93	46.57	60.28	-13.71 QP
7	0.49	0.01	9.63	25.02	34.66	46.14	-11.48 Average
8	0.49	0.01	9.63	35.91	45.55	56.14	-10.59 QP
9	1.63	0.02	9.65	20.52	30.19	46.00	-15.81 Average
10	1.63	0.02	9.65	33.80	43.47	56.00	-12.53 QP
11	4.11	0.01	9.69	23.57	33.27	46.00	-12.73 Average
12	4.11	0.01	9.69	36.07	45.77	56.00	-10.23 QP

Mode:h; Line:Neutral Line

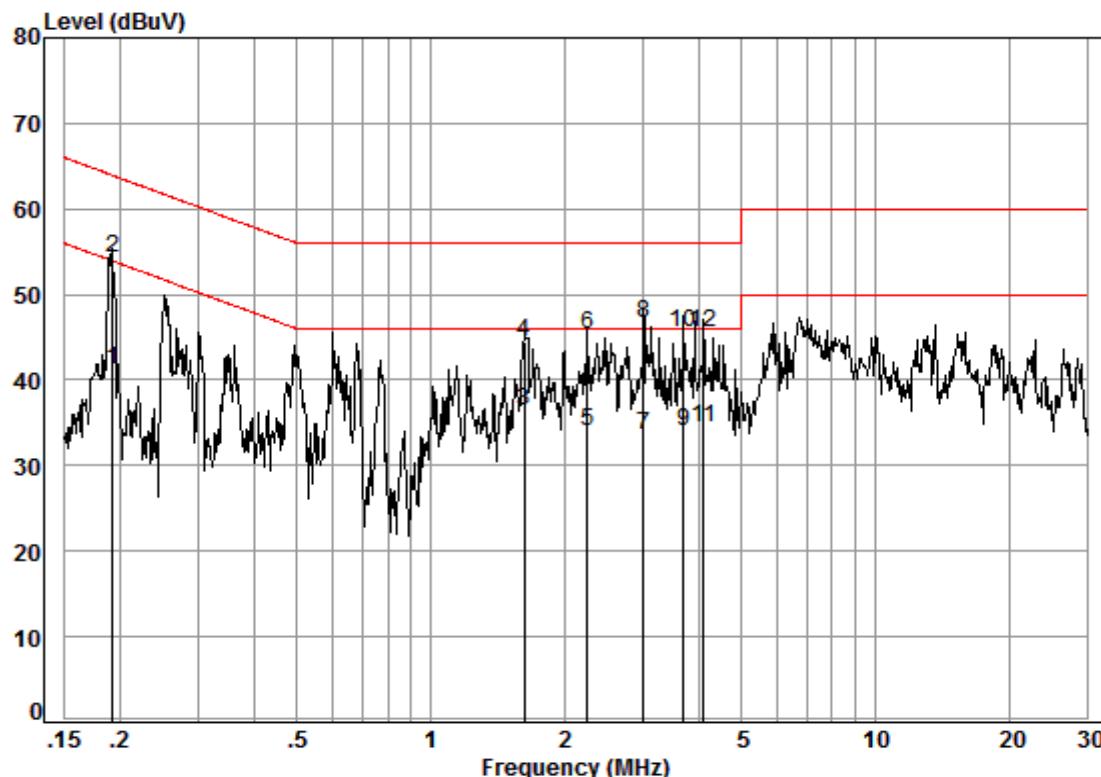

Site : Shielding Room

Condition: Neutral

Job No. : 07782CR

Test mode: h

Freq	Cable	LISN	Read	Limit	Over	Remark
	Loss	Factor	Level			
	MHz	dB	dBuV	dBuV	dBuV	dB
1	0.19	0.02	9.63	31.49	41.14	53.93 -12.79 Average
2	0.19	0.02	9.63	44.70	54.35	63.93 -9.58 QP
3	1.63	0.02	9.65	26.64	36.31	46.00 -9.69 Average
4	1.63	0.02	9.65	34.70	44.37	56.00 -11.63 QP
5	2.25	0.02	9.66	24.35	34.03	46.00 -11.97 Average
6	2.25	0.02	9.66	35.57	45.25	56.00 -10.75 QP
7	3.01	0.02	9.67	23.81	33.50	46.00 -12.50 Average
8	3.01	0.02	9.67	36.96	46.65	56.00 -9.35 QP
9	3.70	0.02	9.68	24.32	34.02	46.00 -11.98 Average
10	3.70	0.02	9.68	35.80	45.50	56.00 -10.50 QP
11	4.11	0.01	9.69	24.82	34.52	46.00 -11.48 Average
12	4.11	0.01	9.69	35.94	45.64	56.00 -10.36 QP

## 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

**7.2.1 E.U.T. Operation**

Operating Environment:


Temperature: 24.0 °C      Humidity: 54 % RH      Atmospheric Pressure: 1020 mbar

Test mode      h: WIFI 2.4G TX (CDW-B18821A-00): Keep the EUT transmitting.  
i: WIFI 2.4G TX (LS9-AC11DBT) : Keep the EUT transmitting.

h: WIFI 2.4G TX (CDW-B18821A-00): Keep the EUT transmitting.

i: WIFI 2.4G TX (LS9-AC11DBT) : Keep the EUT transmitting.

The worst case for final test: Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)

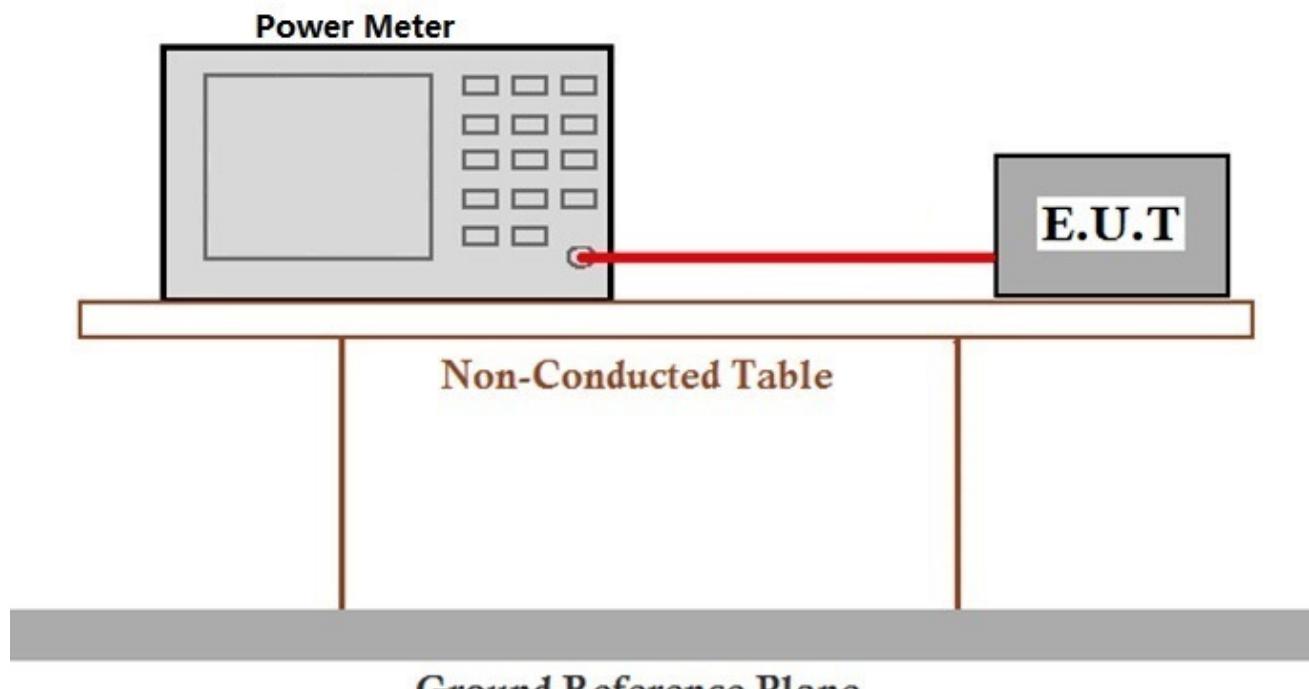**7.2.2 Test Setup Diagram****7.2.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.247

### 7.3 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.4

Measurement Distance: 10m and 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.3.1 E.U.T. Operation

## Operating Environment:

Temperature: 23 °C      Humidity: 54 % RH      Atmospheric Pressure: 1000 mbar

Test mode h: WIFI 2.4G TX (CDW-B18821A-00): Keep the EUT transmitting.

i: WIFI 2.4G TX (LS9-AC11DBT) : Keep the EUT transmitting.

The worst case  
for final test:


h: WIFI 2.4G TX (CDW-B18821A-00): Keep the EUT transmitting.

i: WIFI 2.4G TX (LS9-AC11DBT) : Keep the EUT transmitting.

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)

Only the worst case is recorded in the report.

### 7.3.2 Test Setup Diagram

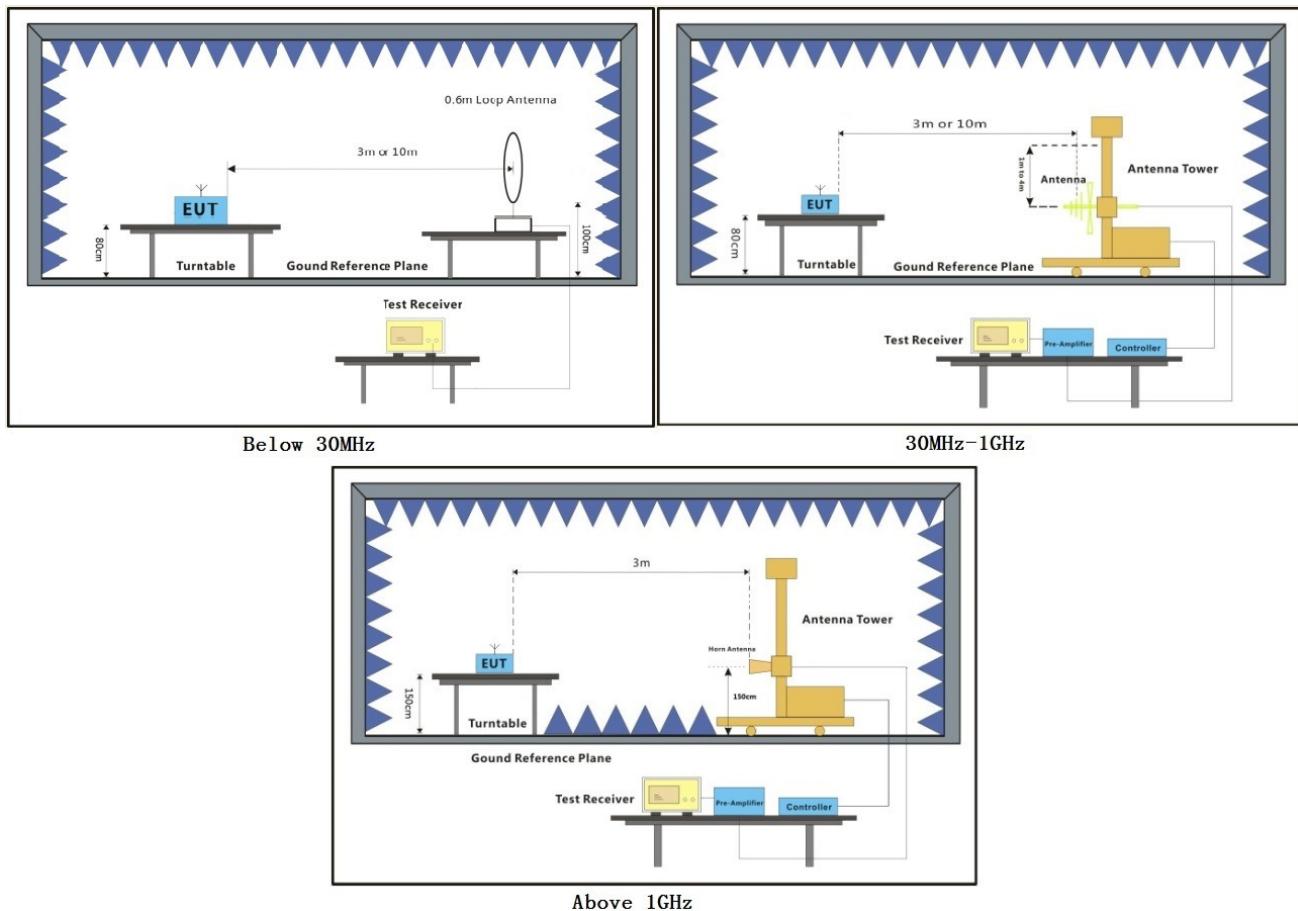

### **7.3.3 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

**Radiated Emission below 1GHz**

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

$L_3$ : Level @ 3m distance. Unit: uV/m;

$L_{10}$ : Level @ 10m distance. Unit: uV/m;

$D_3$ : 3m distance. Unit: m


$D_{10}$ : 10m distance. Unit: m

The level at 3m test distance is below:

Mode a:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
41.28	25.32	18.45	61.50	35.78	40.00	-4.22	H
67.20	25.17	18.13	60.45	35.63	40.00	-4.37	H
180.02	28.50	26.61	88.69	38.96	43.50	-4.54	H
297.22	31.44	37.33	124.42	41.90	46.00	-4.10	H
351.71	31.67	38.33	127.76	42.13	46.00	-3.87	H
651.94	31.23	36.43	121.44	41.69	46.00	-4.31	H
42.45	25.78	19.45	64.85	36.24	40.00	-3.76	V
58.20	25.58	19.01	63.37	36.04	40.00	-3.96	V
82.94	25.70	19.28	64.25	36.16	40.00	-3.84	V
102.72	29.10	28.51	95.03	39.56	43.50	-3.94	V
229.29	31.26	36.56	121.86	41.72	46.00	-4.28	V
704.23	30.71	34.32	114.39	41.17	46.00	-4.83	V

30MHz~1GHz (QP)		
Test mode:	h	Horizontal

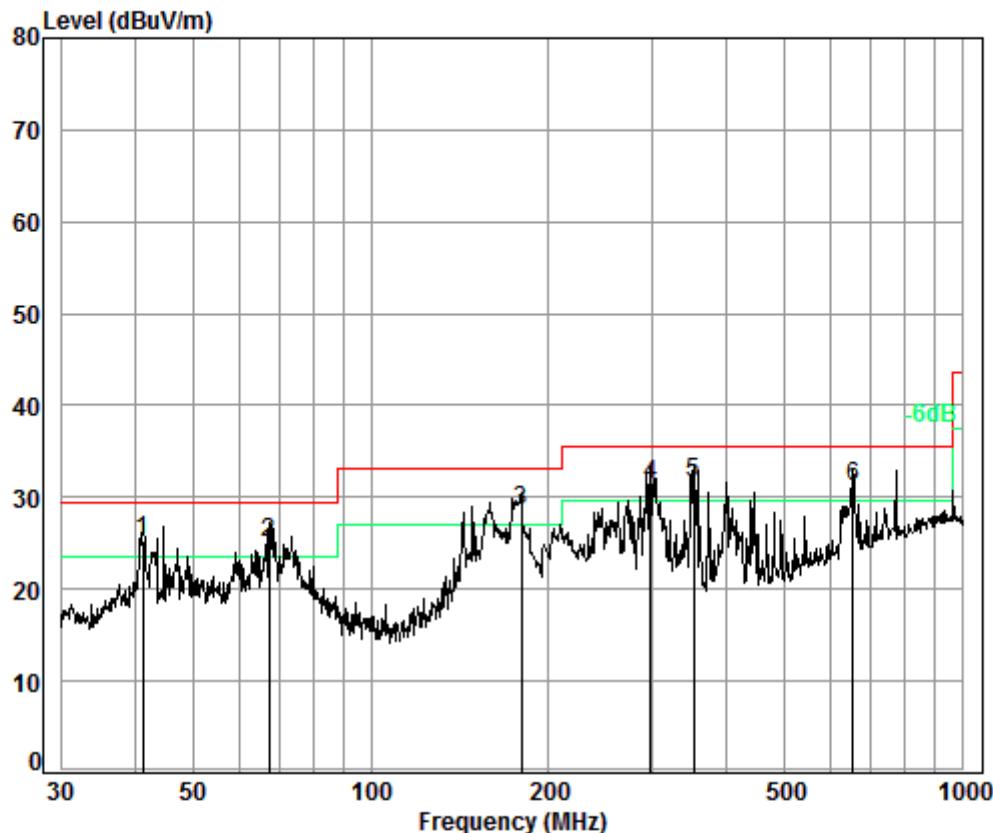


Condition: 10m HORIZONTAL

Job No. : 07782CR

Test Mode: h

Freq	Cable	Ant	Preamp	Read	Limit	Over	Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	41.28	6.80	13.21	32.99	38.30	25.32	29.50	-4.18
2	67.20	6.96	10.58	32.91	40.54	25.17	29.50	-4.33
3	180.02	7.50	10.92	32.72	42.80	28.50	33.10	-4.60
4	297.22	8.04	12.59	32.60	43.41	31.44	35.60	-4.16
5 pp	351.71	8.26	13.88	32.60	42.13	31.67	35.60	-3.93
6	651.94	9.03	19.56	32.60	35.24	31.23	35.60	-4.37

Test mode:	h	Vertical
------------	---	----------

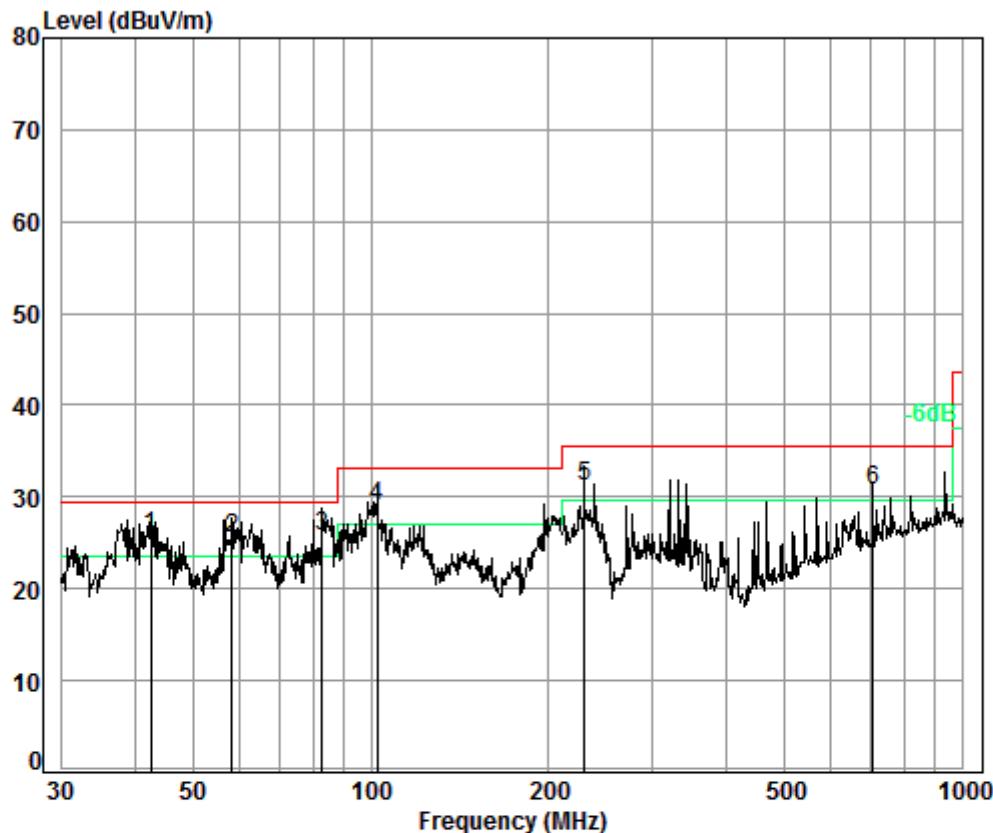

Condition: 10m VERTICAL


Job No. : 07782CR

Test Mode: h

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Limit			
				MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1 pp	42.45	6.80	13.11	32.99	38.86	25.78	29.50	25.78	29.50	-3.72
2	58.20	7.00	12.13	32.96	39.41	25.58	29.50	25.58	29.50	-3.92
3	82.94	7.13	8.59	32.85	42.83	25.70	29.50	25.70	29.50	-3.80
4	102.72	7.21	9.67	32.80	45.02	29.10	33.10	29.10	33.10	-4.00
5	229.29	7.75	10.74	32.67	45.44	31.26	35.60	31.26	35.60	-4.34
6	704.23	9.16	20.17	32.60	33.98	30.71	35.60	30.71	35.60	-4.89

**CDW-B18821A-00**

Mode:h; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

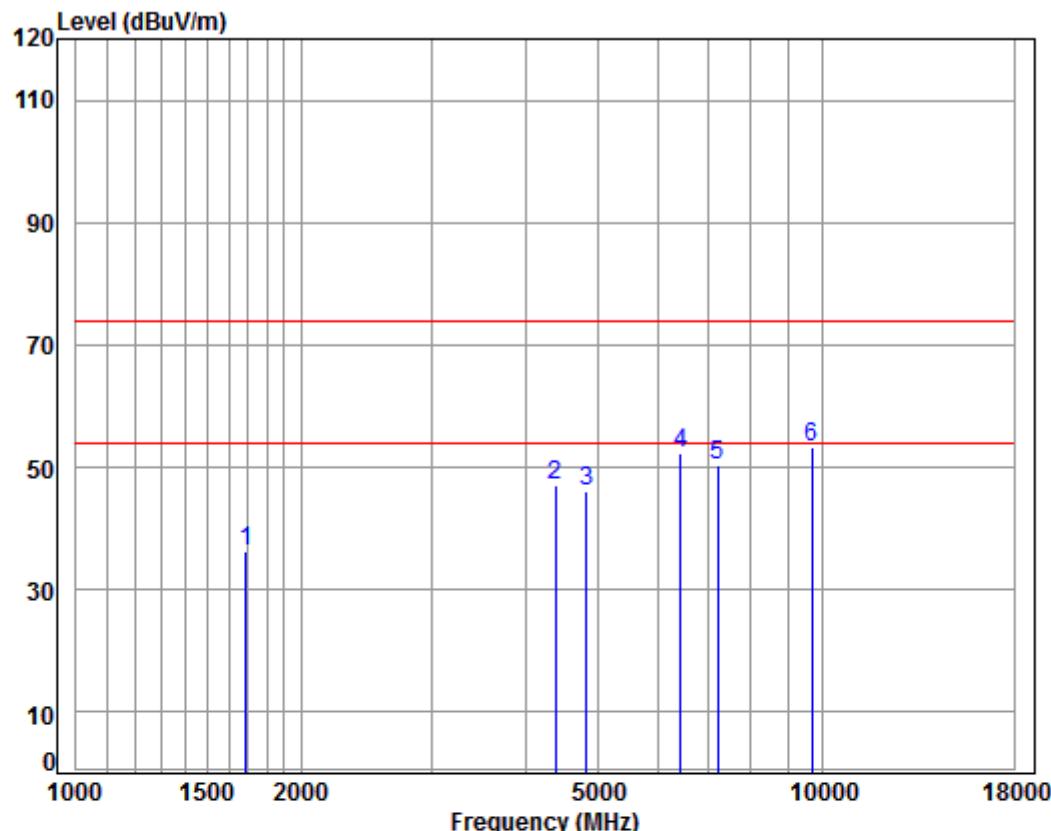

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11B

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1687.347	5.24	26.62	38.02	42.37	36.21	74.00	-37.79 peak
2	4379.699	7.43	33.60	38.20	44.13	46.96	74.00	-27.04 peak
3	4824.000	7.91	34.19	38.42	42.58	46.26	74.00	-27.74 peak
4	6451.353	11.45	35.06	37.83	43.48	52.16	74.00	-21.84 peak
5	7236.000	10.07	36.40	37.08	41.06	50.45	74.00	-23.55 peak
6 pp	9648.000	10.77	37.53	35.07	40.08	53.31	74.00	-20.69 peak

Mode:h; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

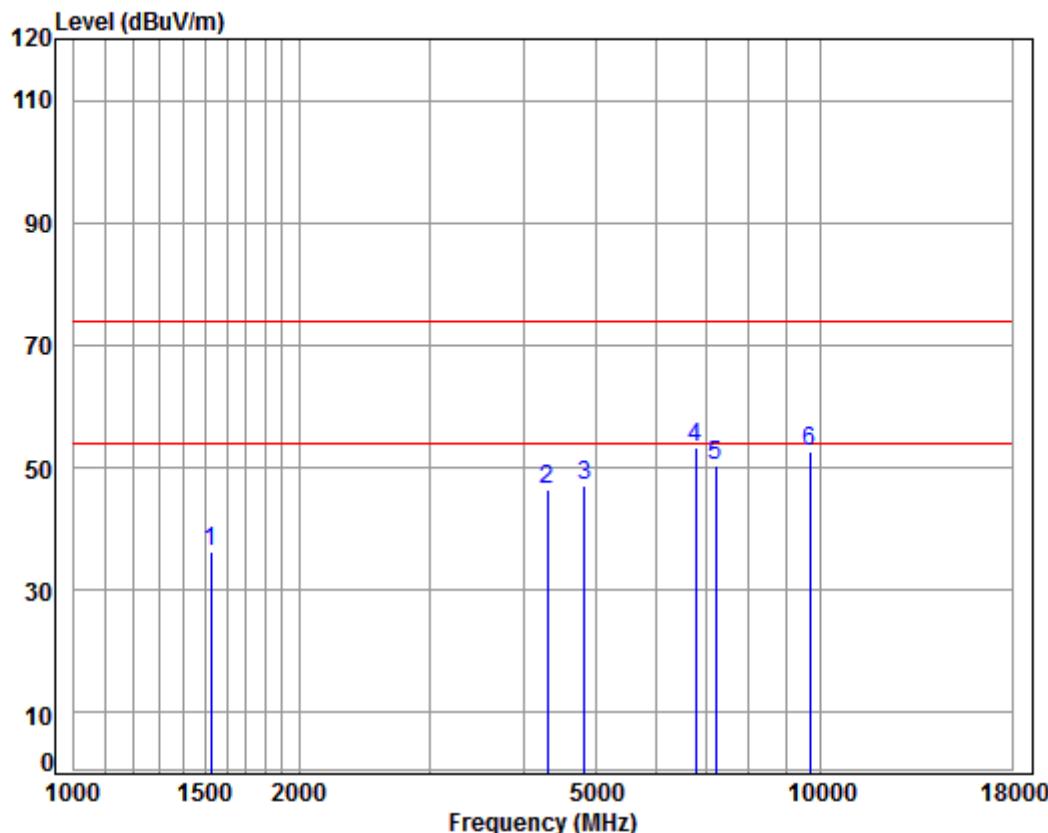

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	38.04	43.07	36.39	74.00	-37.61	peak
2	4304.400	7.34	33.60	38.16	43.55	46.33	74.00	-27.67	peak
3	4824.000	7.91	34.19	38.42	43.29	46.97	74.00	-27.03	peak
4 pp	6795.879	10.69	35.94	37.49	44.23	53.37	74.00	-20.63	peak
5	7236.000	10.07	36.40	37.08	41.02	50.41	74.00	-23.59	peak
6	9648.000	10.77	37.53	35.07	39.29	52.52	74.00	-21.48	peak

Mode:h; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

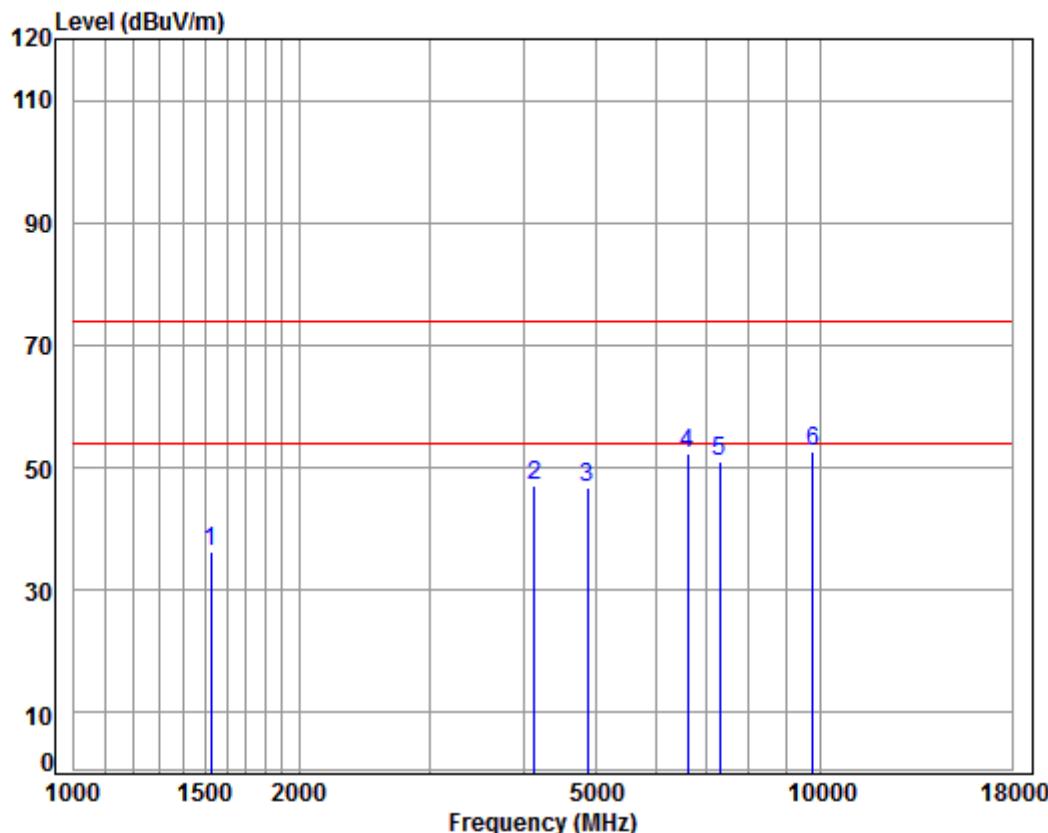

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11B

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	38.04	42.93	36.25	74.00	-37.75	peak
2	4133.699	7.14	33.60	38.07	44.30	46.97	74.00	-27.03	peak
3	4874.000	7.96	34.28	38.44	42.99	46.79	74.00	-27.21	peak
4	6621.375	11.19	35.45	37.66	43.28	52.26	74.00	-21.74	peak
5	7311.000	10.05	36.37	37.01	41.53	50.94	74.00	-23.06	peak
6 pp	9748.000	10.82	37.55	35.02	39.19	52.54	74.00	-21.46	peak

Mode:h; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

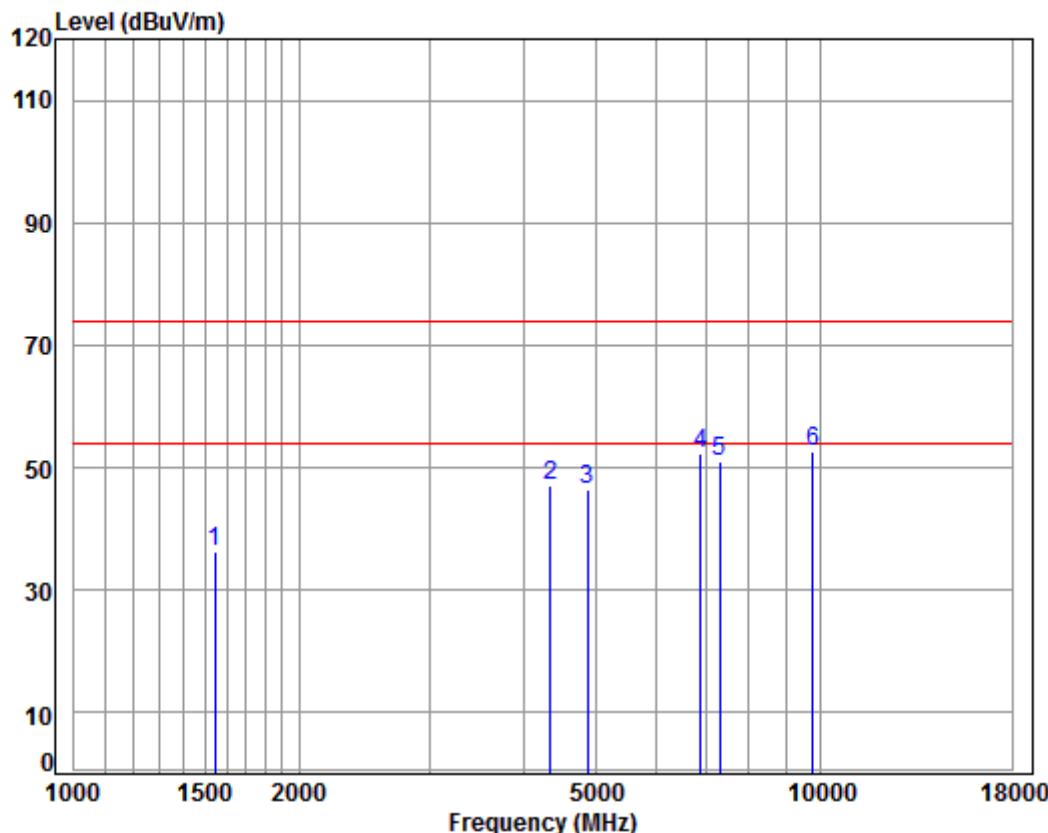

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	38.04	42.95	36.33	74.00	-37.67	peak
2	4341.886	7.38	33.60	38.18	44.41	47.21	74.00	-26.79	peak
3	4874.000	7.96	34.28	38.44	42.56	46.36	74.00	-27.64	peak
4	6894.806	10.42	36.21	37.40	43.03	52.26	74.00	-21.74	peak
5	7311.000	10.05	36.37	37.01	41.45	50.86	74.00	-23.14	peak
6	pp 9748.000	10.82	37.55	35.02	39.24	52.59	74.00	-21.41	peak

Mode:h; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

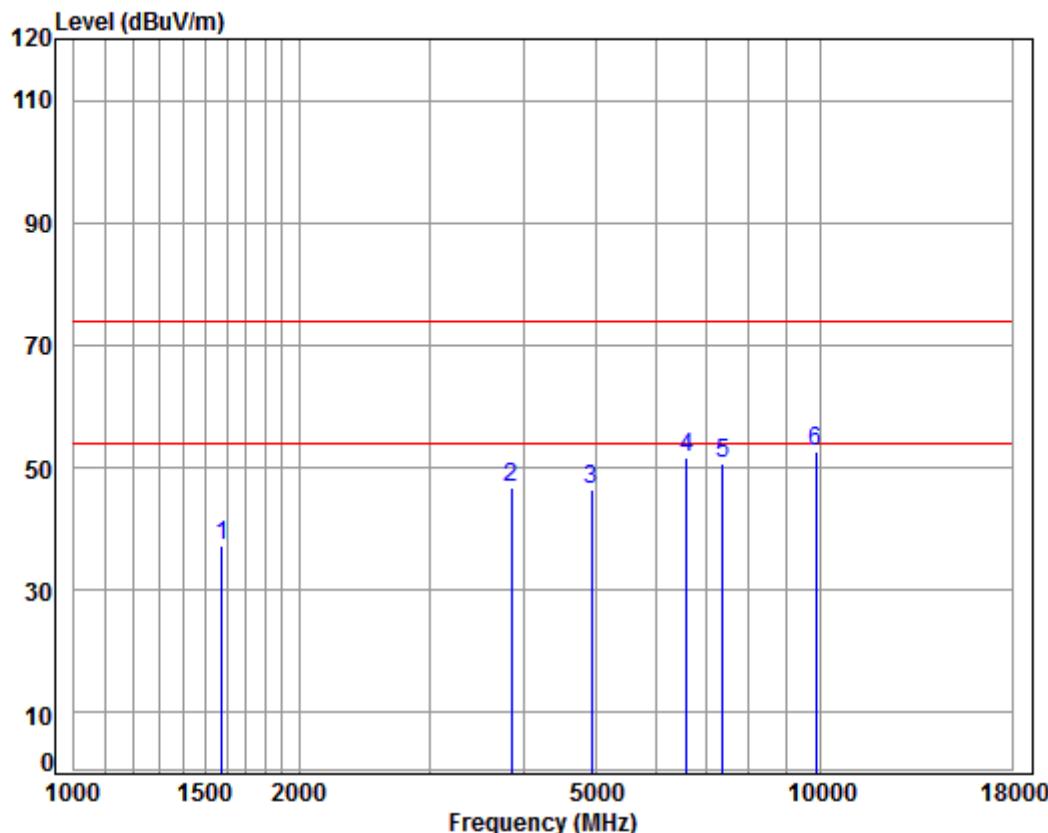

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1578.822	5.38	26.16	38.03	43.68	37.19	74.00	-36.81	peak
2	3845.537	6.83	33.19	37.99	44.76	46.79	74.00	-27.21	peak
3	4924.000	8.01	34.37	38.47	42.63	46.54	74.00	-27.46	peak
4	6602.265	11.24	35.39	37.68	42.87	51.82	74.00	-22.18	peak
5	7386.000	10.03	36.34	36.94	41.25	50.68	74.00	-23.32	peak
6 pp	9848.000	10.87	37.57	34.97	39.24	52.71	74.00	-21.29	peak

Mode:h; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

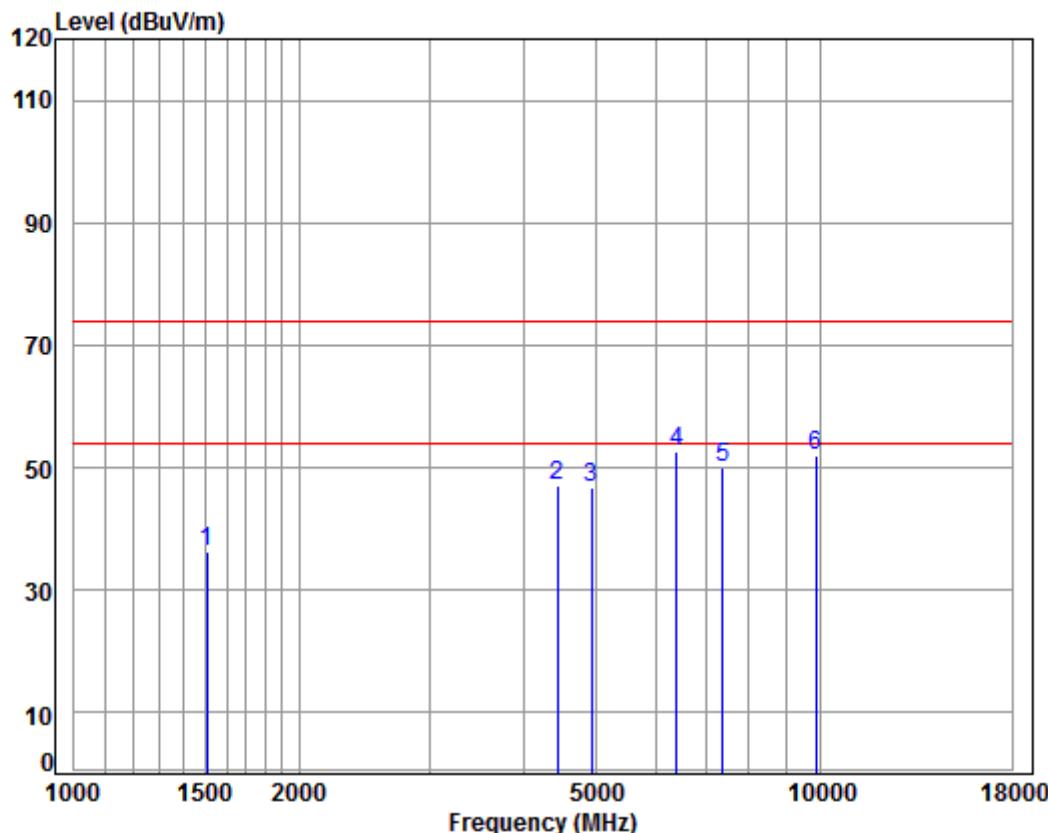

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11B

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1507.470	5.47	25.83	38.04	43.13	36.39	74.00	-37.61	peak	
2	4443.453	7.50	33.60	38.24	44.14	47.00	74.00	-27.00	peak	
3	4924.000	8.01	34.37	38.47	42.94	46.85	74.00	-27.15	peak	
4 pp	6414.167	11.38	35.03	37.87	43.95	52.49	74.00	-21.51	peak	
5	7386.000	10.03	36.34	36.94	40.74	50.17	74.00	-23.83	peak	
6	9848.000	10.87	37.57	34.97	38.58	52.05	74.00	-21.95	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

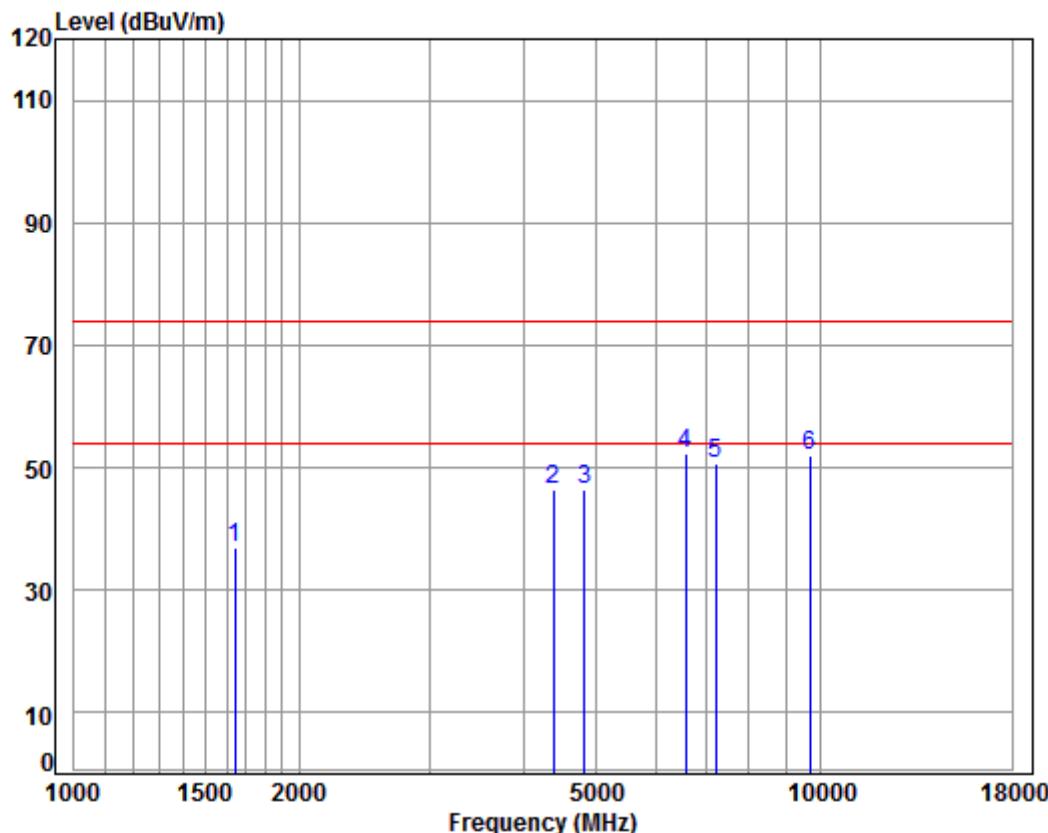

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	38.03	43.38	37.09	74.00	-36.91	peak
2	4379.699	7.43	33.60	38.20	43.74	46.57	74.00	-27.43	peak
3	4824.000	7.91	34.19	38.42	42.66	46.34	74.00	-27.66	peak
4 pp	6583.209	11.30	35.34	37.70	43.27	52.21	74.00	-21.79	peak
5	7236.000	10.07	36.40	37.08	41.13	50.52	74.00	-23.48	peak
6	9648.000	10.77	37.53	35.07	38.90	52.13	74.00	-21.87	peak

Mode:h; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

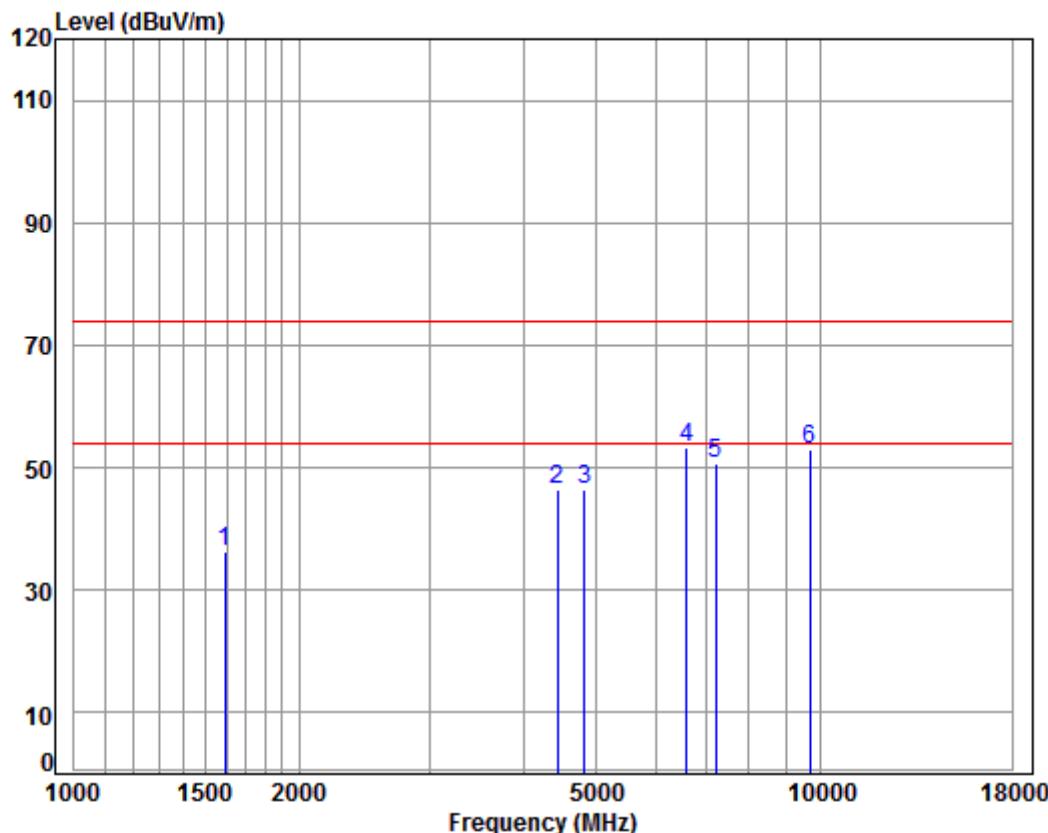

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1592.571	5.36	26.22	38.03	42.67	36.22	74.00	-37.78	peak	
2	4430.628	7.48	33.60	38.23	43.52	46.37	74.00	-27.63	peak	
3	4824.000	7.91	34.19	38.42	42.61	46.29	74.00	-27.71	peak	
4 pp	6602.265	11.24	35.39	37.68	44.31	53.26	74.00	-20.74	peak	
5	7236.000	10.07	36.40	37.08	41.38	50.77	74.00	-23.23	peak	
6	9648.000	10.77	37.53	35.07	39.60	52.83	74.00	-21.17	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

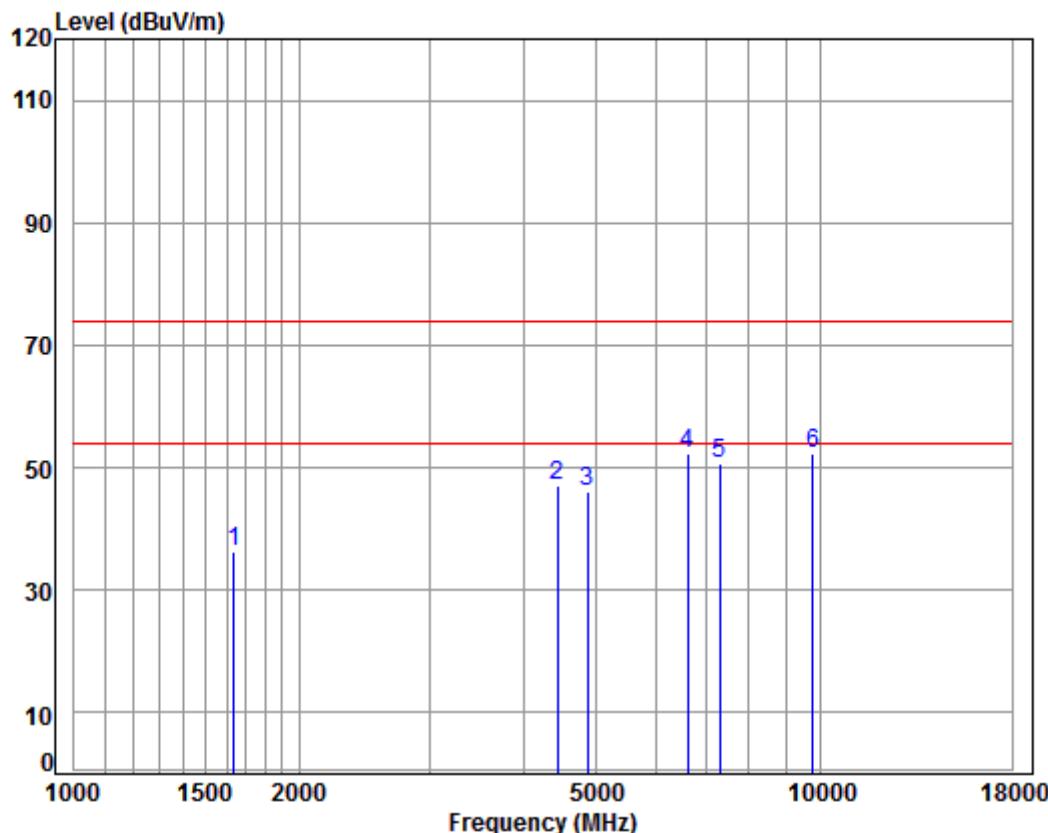

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	1639.274	5.30	26.42	38.03	42.75	36.44	74.00	-37.56	peak		
2	4430.628	7.48	33.60	38.23	44.26	47.11	74.00	-26.89	peak		
3	4874.000	7.96	34.28	38.44	42.36	46.16	74.00	-27.84	peak		
4	6621.375	11.19	35.45	37.66	43.45	52.43	74.00	-21.57	peak		
5	7311.000	10.05	36.37	37.01	41.34	50.75	74.00	-23.25	peak		
6	pp 9748.000	10.82	37.55	35.02	39.08	52.43	74.00	-21.57	peak		

Mode:h; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

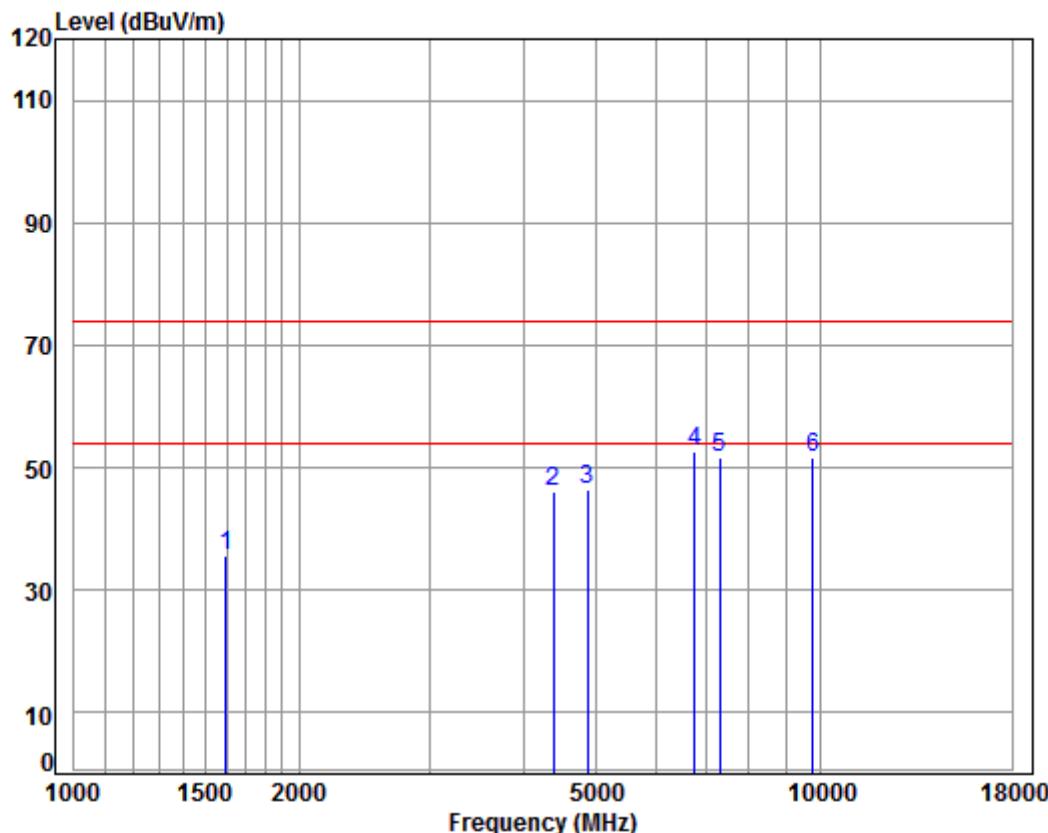

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	38.03	42.07	35.63	74.00	-38.37	peak	
2	4379.699	7.43	33.60	38.20	43.22	46.05	74.00	-27.95	peak	
3	4874.000	7.96	34.28	38.44	42.47	46.27	74.00	-27.73	peak	
4 pp	6776.265	10.75	35.89	37.51	43.45	52.58	74.00	-21.42	peak	
5	7311.000	10.05	36.37	37.01	42.16	51.57	74.00	-22.43	peak	
6	9748.000	10.82	37.55	35.02	38.28	51.63	74.00	-22.37	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

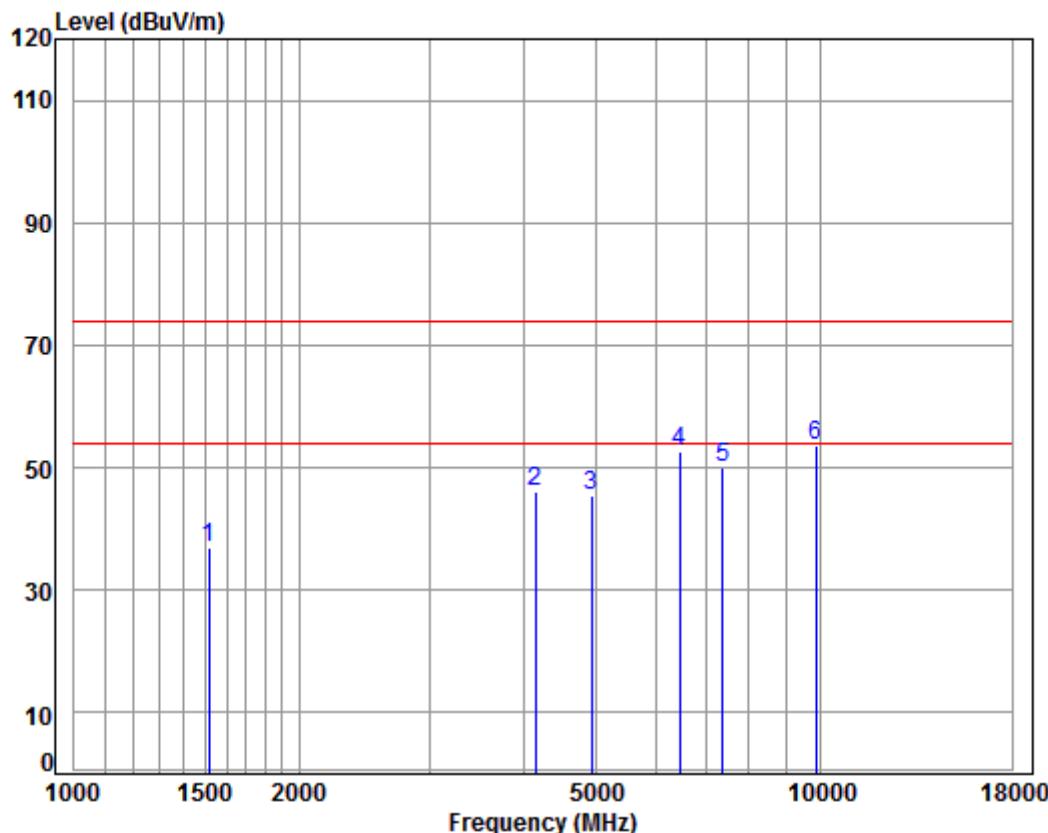

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1516.210	5.46	25.87	38.04	43.53	36.82	74.00	-37.18	peak
2	4145.664	7.16	33.60	38.08	43.50	46.18	74.00	-27.82	peak
3	4924.000	8.01	34.37	38.47	41.64	45.55	74.00	-28.45	peak
4	6470.026	11.48	35.08	37.81	43.99	52.74	74.00	-21.26	peak
5	7386.000	10.03	36.34	36.94	40.69	50.12	74.00	-23.88	peak
6	pp 9848.000	10.87	37.57	34.97	40.06	53.53	74.00	-20.47	peak

Mode:h; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

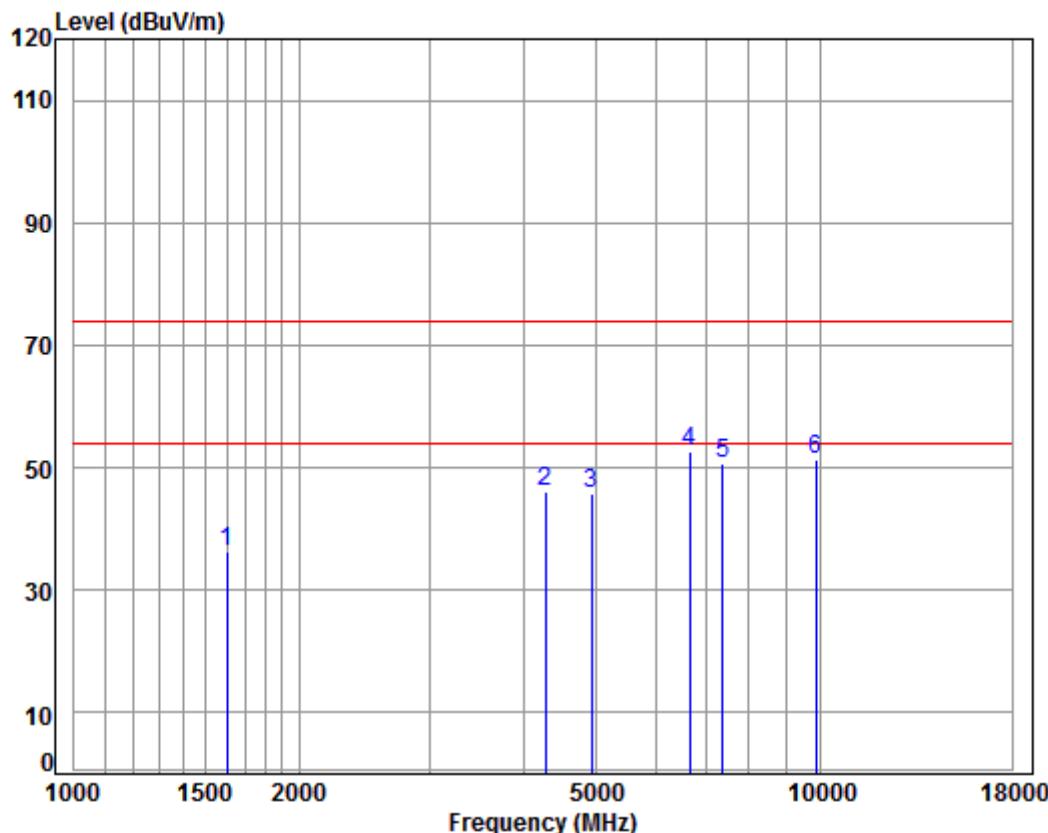

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	5.35	26.26	38.03	42.84	36.42	74.00	-37.58	peak	
2	4279.589	7.31	33.60	38.15	43.29	46.05	74.00	-27.95	peak	
3	4924.000	8.01	34.37	38.47	41.90	45.81	74.00	-28.19	peak	
4 pp	6659.763	11.08	35.56	37.62	43.55	52.57	74.00	-21.43	peak	
5	7386.000	10.03	36.34	36.94	41.12	50.55	74.00	-23.45	peak	
6	9848.000	10.87	37.57	34.97	37.99	51.46	74.00	-22.54	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

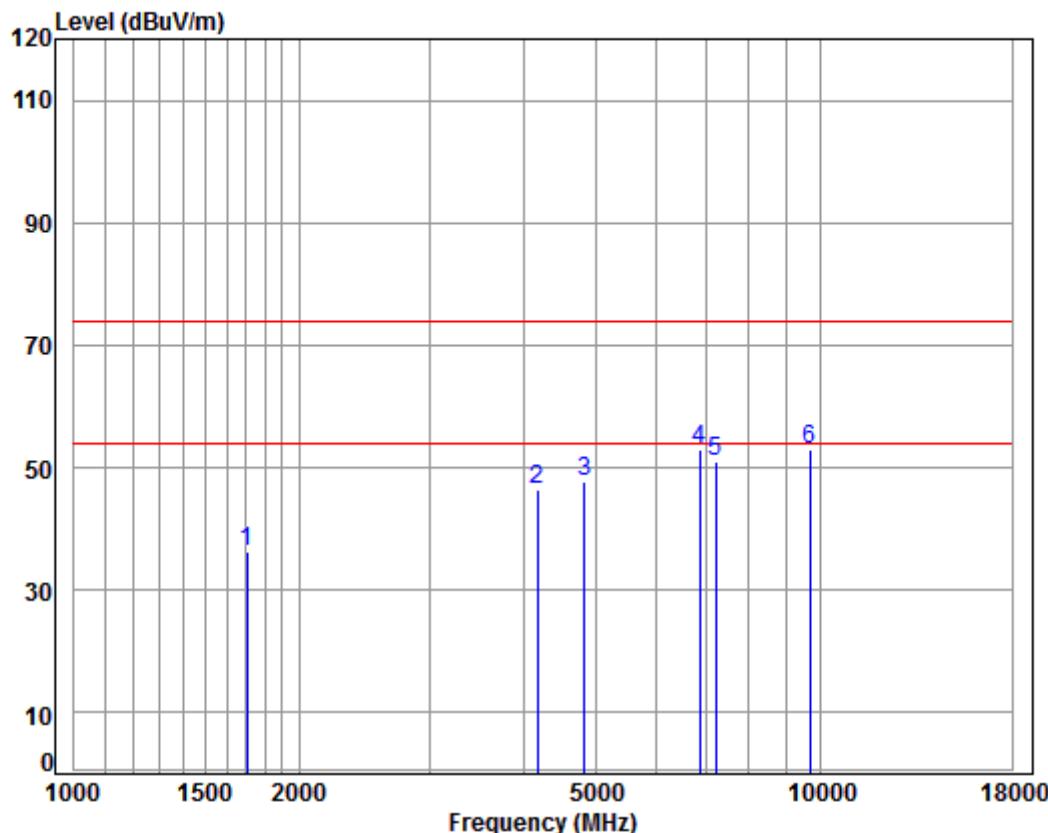

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11N20

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1702.042	5.23	26.68	38.02	42.32	36.21	74.00	-37.79 peak
2	4169.698	7.18	33.60	38.09	43.68	46.37	74.00	-27.63 peak
3	4824.000	7.91	34.19	38.42	44.02	47.70	74.00	-26.30 peak
4 pp	6874.906	10.47	36.16	37.42	43.92	53.13	74.00	-20.87 peak
5	7236.000	10.07	36.40	37.08	41.75	51.14	74.00	-22.86 peak
6	9648.000	10.77	37.53	35.07	39.73	52.96	74.00	-21.04 peak

Mode:h; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

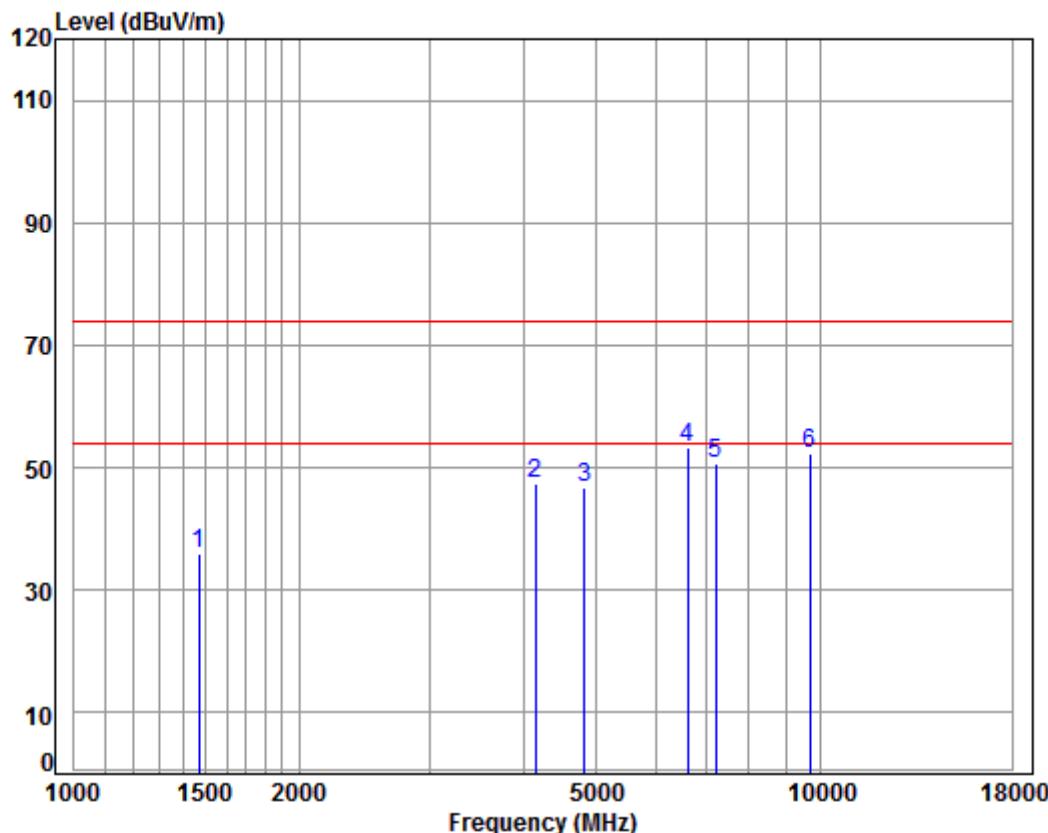

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1468.761	5.38	25.68	38.04	42.80	35.82	74.00	-38.18	peak	
2	4145.664	7.16	33.60	38.08	44.67	47.35	74.00	-26.65	peak	
3	4824.000	7.91	34.19	38.42	43.01	46.69	74.00	-27.31	peak	
4 pp	6621.375	11.19	35.45	37.66	44.39	53.37	74.00	-20.63	peak	
5	7236.000	10.07	36.40	37.08	41.15	50.54	74.00	-23.46	peak	
6	9648.000	10.77	37.53	35.07	39.18	52.41	74.00	-21.59	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

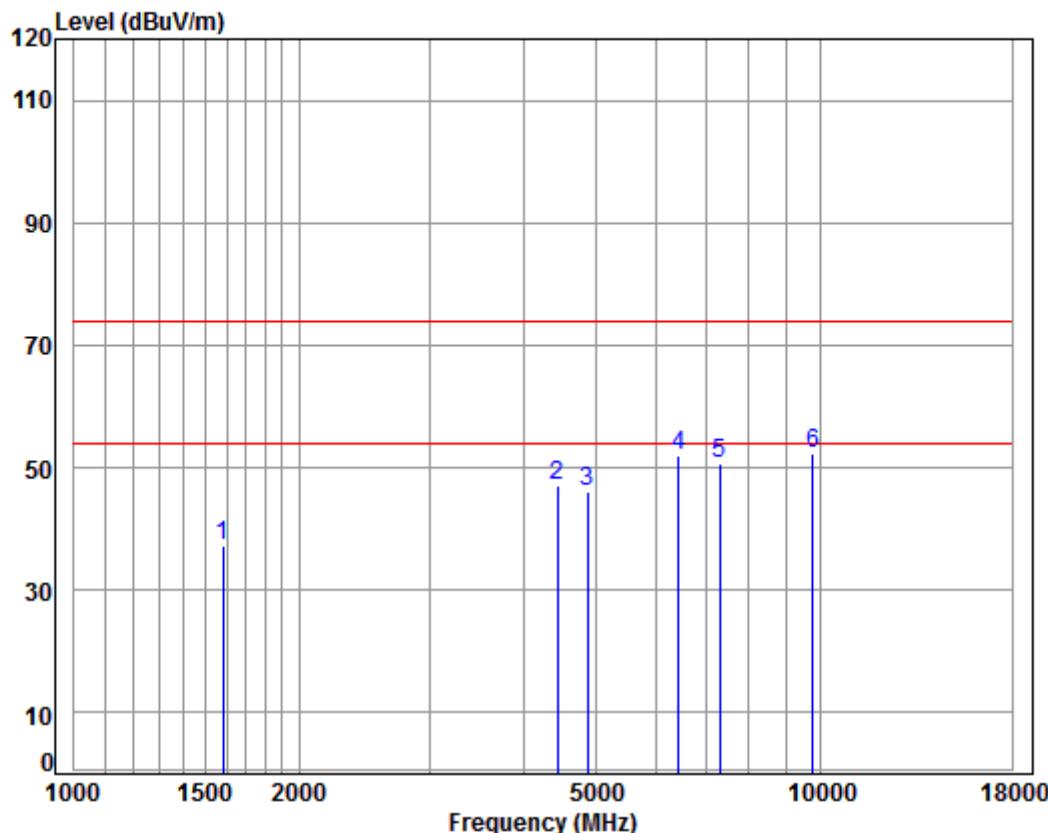

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N20

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1583.392	5.37	26.18	38.03	43.84	37.36	74.00	-36.64 peak
2	4430.628	7.48	33.60	38.23	44.34	47.19	74.00	-26.81 peak
3	4874.000	7.96	34.28	38.44	42.16	45.96	74.00	-28.04 peak
4	6451.353	11.45	35.06	37.83	43.39	52.07	74.00	-21.93 peak
5	7311.000	10.05	36.37	37.01	41.14	50.55	74.00	-23.45 peak
6 pp	9748.000	10.82	37.55	35.02	39.03	52.38	74.00	-21.62 peak

Mode:h; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

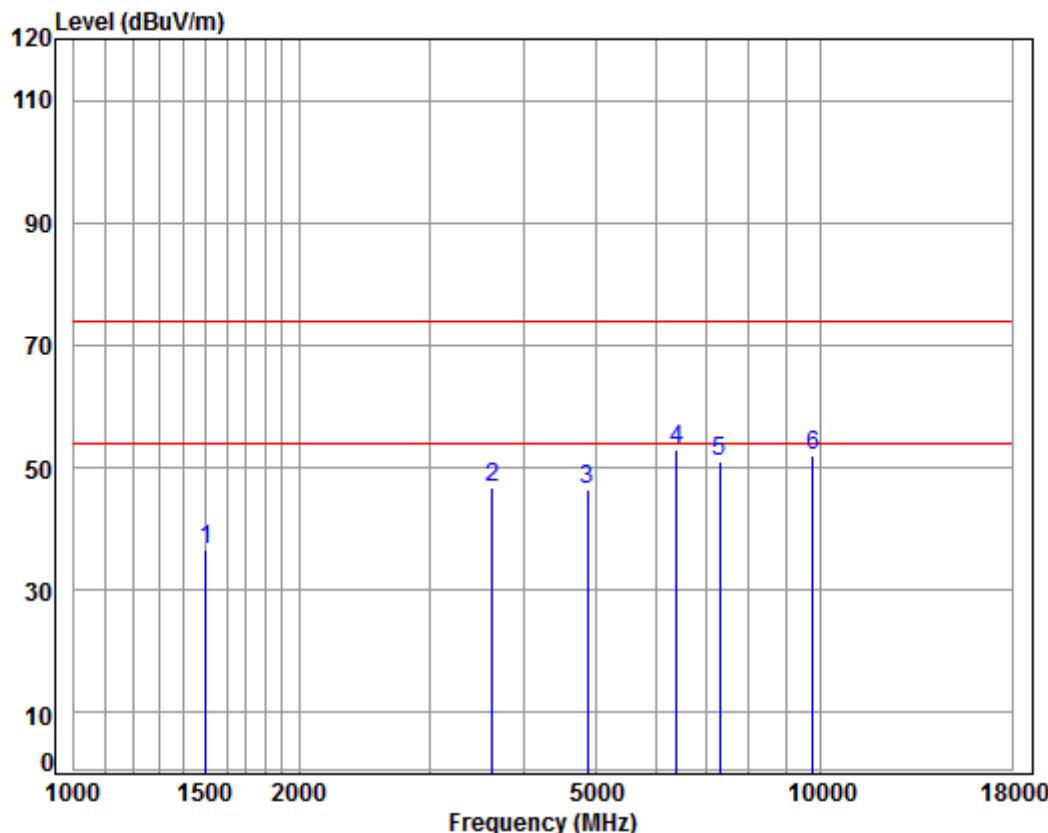

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N20

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1503.119	5.48	25.81	38.04	43.26	36.51	74.00	-37.49 peak
2	3629.540	6.60	32.58	37.97	45.51	46.72	74.00	-27.28 peak
3	4874.000	7.96	34.28	38.44	42.58	46.38	74.00	-27.62 peak
4 pp	6414.167	11.38	35.03	37.87	44.50	53.04	74.00	-20.96 peak
5	7311.000	10.05	36.37	37.01	41.50	50.91	74.00	-23.09 peak
6	9748.000	10.82	37.55	35.02	38.55	51.90	74.00	-22.10 peak

Mode:h; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

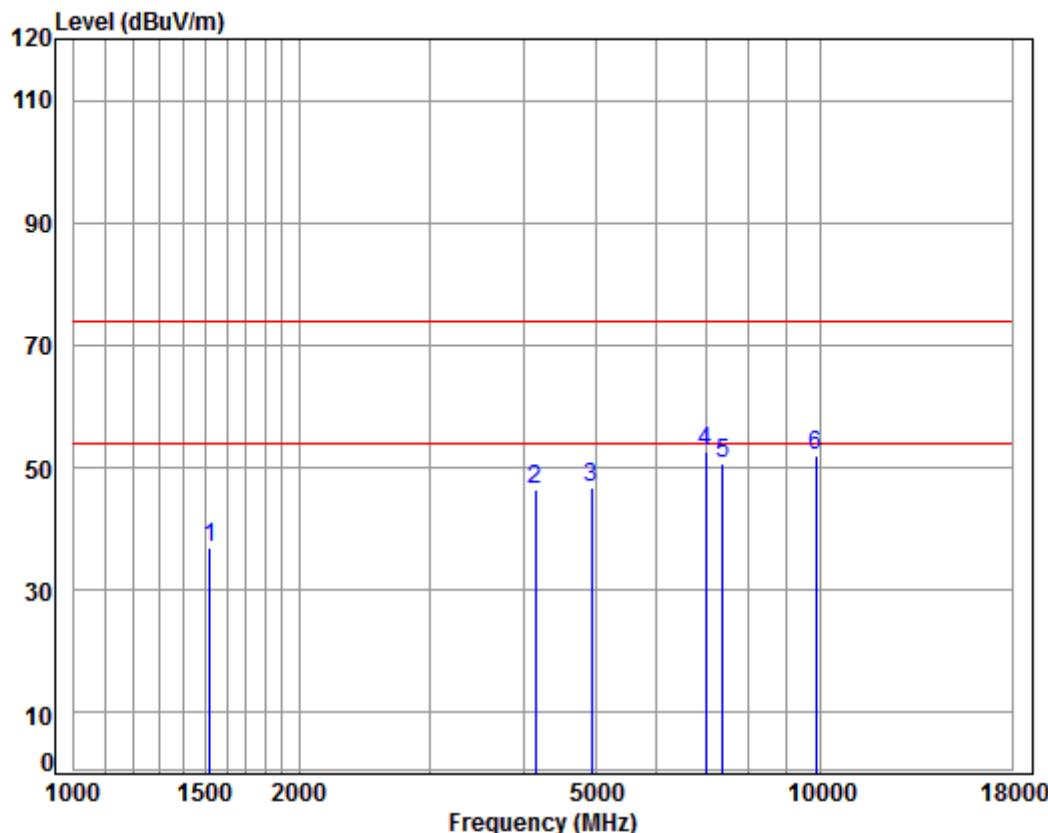

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1520.598	5.45	25.89	38.04	43.54	36.84	74.00	-37.16	peak	
2	4145.664	7.16	33.60	38.08	43.61	46.29	74.00	-27.71	peak	
3	4924.000	8.01	34.37	38.47	42.94	46.85	74.00	-27.15	peak	
4 pp	6995.172	10.14	36.49	37.30	43.27	52.60	74.00	-21.40	peak	
5	7386.000	10.03	36.34	36.94	41.39	50.82	74.00	-23.18	peak	
6	9848.000	10.87	37.57	34.97	38.44	51.91	74.00	-22.09	peak	


Mode:h; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

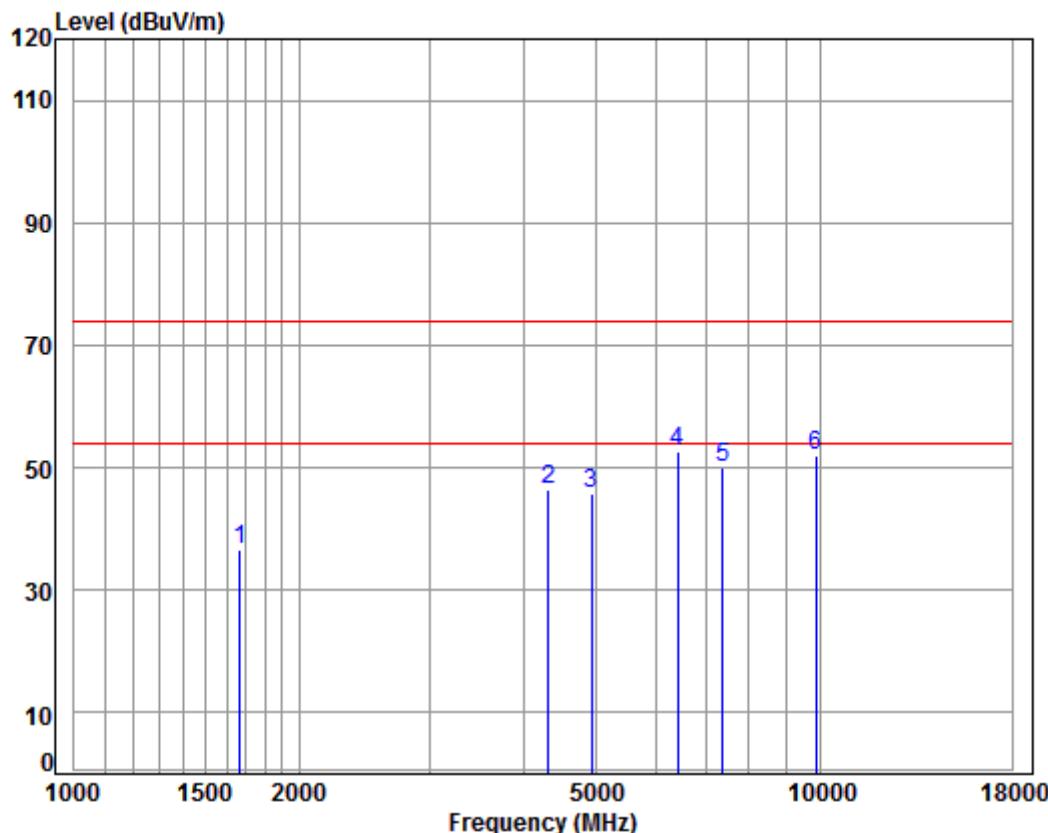

Condition: 3m VERTICAL  
Job No : 07782CR  
Mode : 2462 TX RSE  
: 2.4G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Over Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	38.03	42.70	36.48	74.00	-37.52	peak	
2	4316.859	7.36	33.60	38.17	43.67	46.46	74.00	-27.54	peak	
3	4924.000	8.01	34.37	38.47	41.76	45.67	74.00	-28.33	peak	
4 pp	6432.732	11.41	35.05	37.85	43.94	52.55	74.00	-21.45	peak	
5	7386.000	10.03	36.34	36.94	40.55	49.98	74.00	-24.02	peak	
6	9848.000	10.87	37.57	34.97	38.53	52.00	74.00	-22.00	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

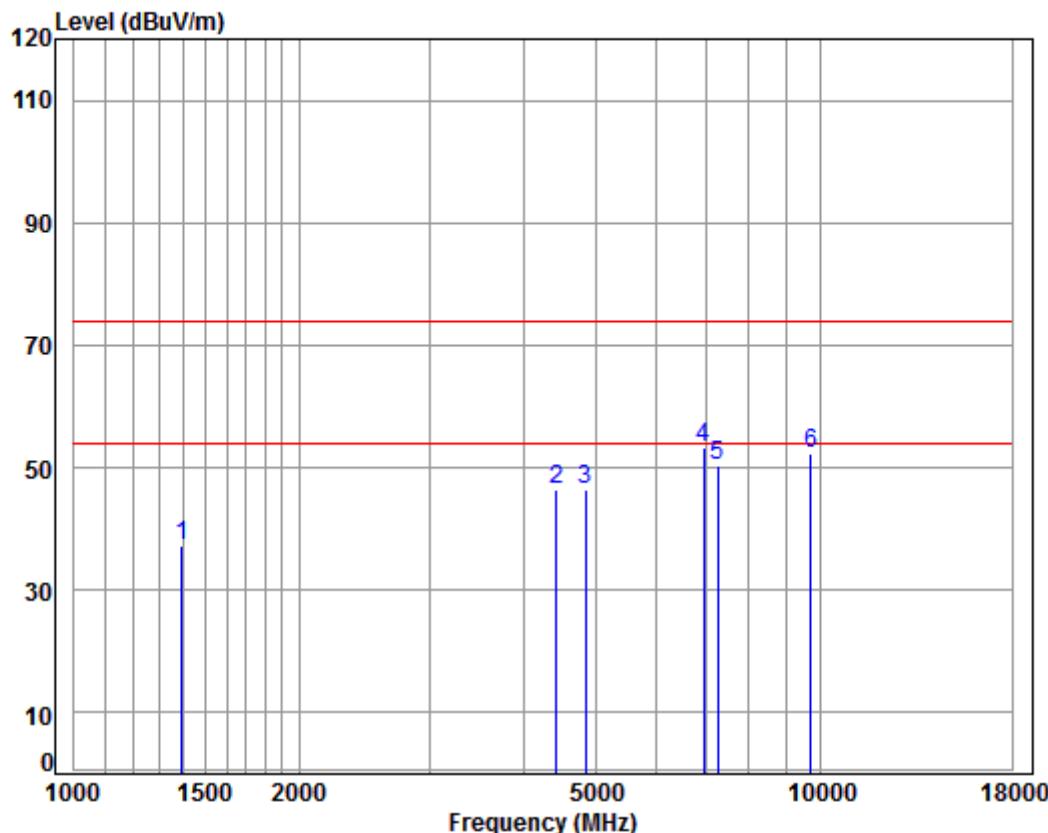

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2422 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Over Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1394.300	5.13	25.37	38.05	44.80	37.25	74.00	-36.75	peak	
2	4417.841	7.47	33.60	38.22	43.51	46.36	74.00	-27.64	peak	
3	4844.000	7.93	34.23	38.43	42.81	46.54	74.00	-27.46	peak	
4 pp	6954.852	10.25	36.38	37.34	43.96	53.25	74.00	-20.75	peak	
5	7266.000	10.06	36.39	37.05	41.02	50.42	74.00	-23.58	peak	
6	9688.000	10.79	37.54	35.05	38.92	52.20	74.00	-21.80	peak	

Mode:h; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

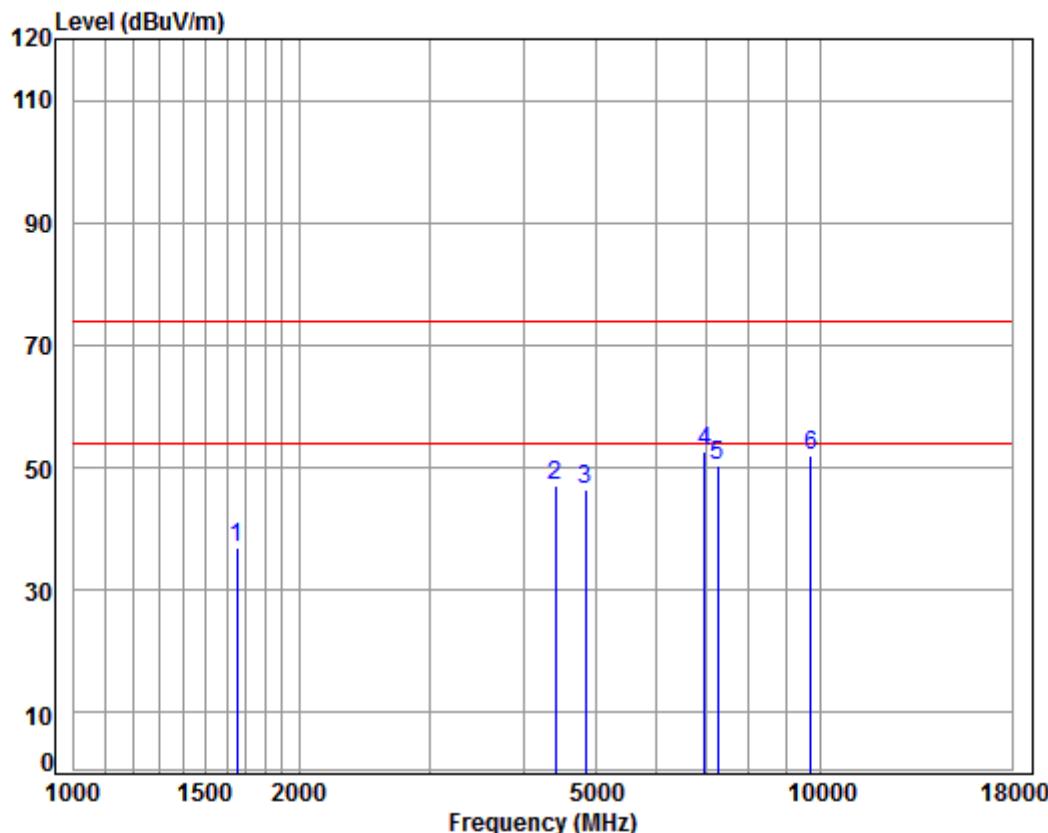

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2422 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1653.550	5.28	26.48	38.03	43.31	37.04	74.00	-36.96	peak	
2	4405.090	7.46	33.60	38.22	44.40	47.24	74.00	-26.76	peak	
3	4844.000	7.93	34.23	38.43	42.76	46.49	74.00	-27.51	peak	
4 pp	6974.982	10.20	36.43	37.32	43.30	52.61	74.00	-21.39	peak	
5	7266.000	10.06	36.39	37.05	41.06	50.46	74.00	-23.54	peak	
6	9688.000	10.79	37.54	35.05	38.55	51.83	74.00	-22.17	peak	

Mode:h; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

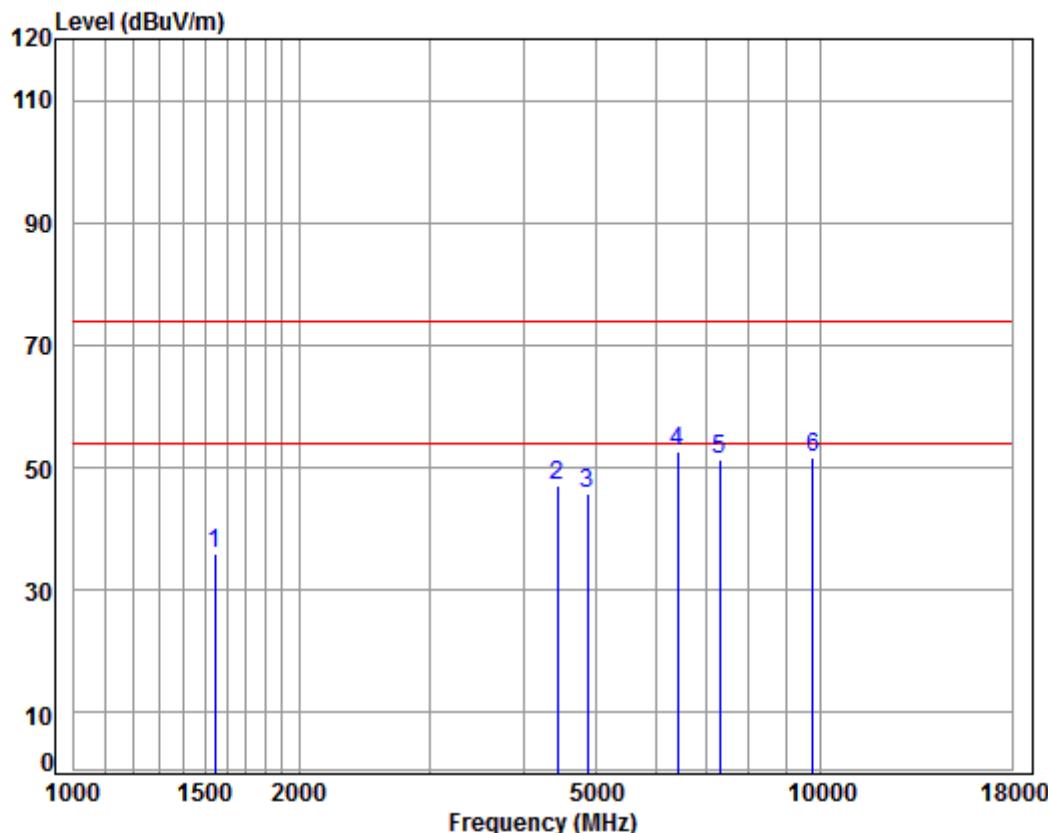

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	38.04	42.47	35.85	74.00	-38.15	peak	
2	4443.453	7.50	33.60	38.24	44.31	47.17	74.00	-26.83	peak	
3	4874.000	7.96	34.28	38.44	41.82	45.62	74.00	-28.38	peak	
4 pp	6432.732	11.41	35.05	37.85	44.06	52.67	74.00	-21.33	peak	
5	7311.000	10.05	36.37	37.01	42.00	51.41	74.00	-22.59	peak	
6	9748.000	10.82	37.55	35.02	38.18	51.53	74.00	-22.47	peak	

Mode:h; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

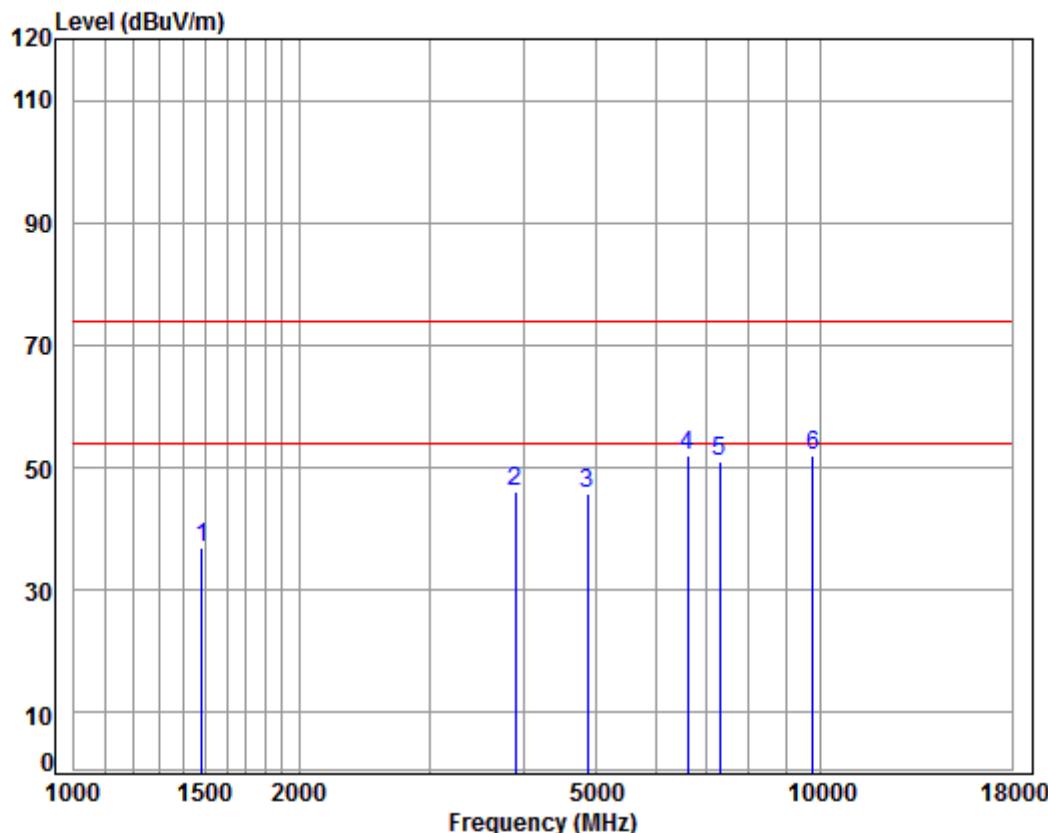

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N40

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1481.553	5.42	25.73	38.04	43.73	36.84	74.00	-37.16	peak
2	3901.516	6.88	33.34	37.99	43.85	46.08	74.00	-27.92	peak
3	4874.000	7.96	34.28	38.44	41.83	45.63	74.00	-28.37	peak
4 pp	6621.375	11.19	35.45	37.66	43.03	52.01	74.00	-21.99	peak
5	7311.000	10.05	36.37	37.01	41.55	50.96	74.00	-23.04	peak
6	9748.000	10.82	37.55	35.02	38.52	51.87	74.00	-22.13	peak

Mode:h; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

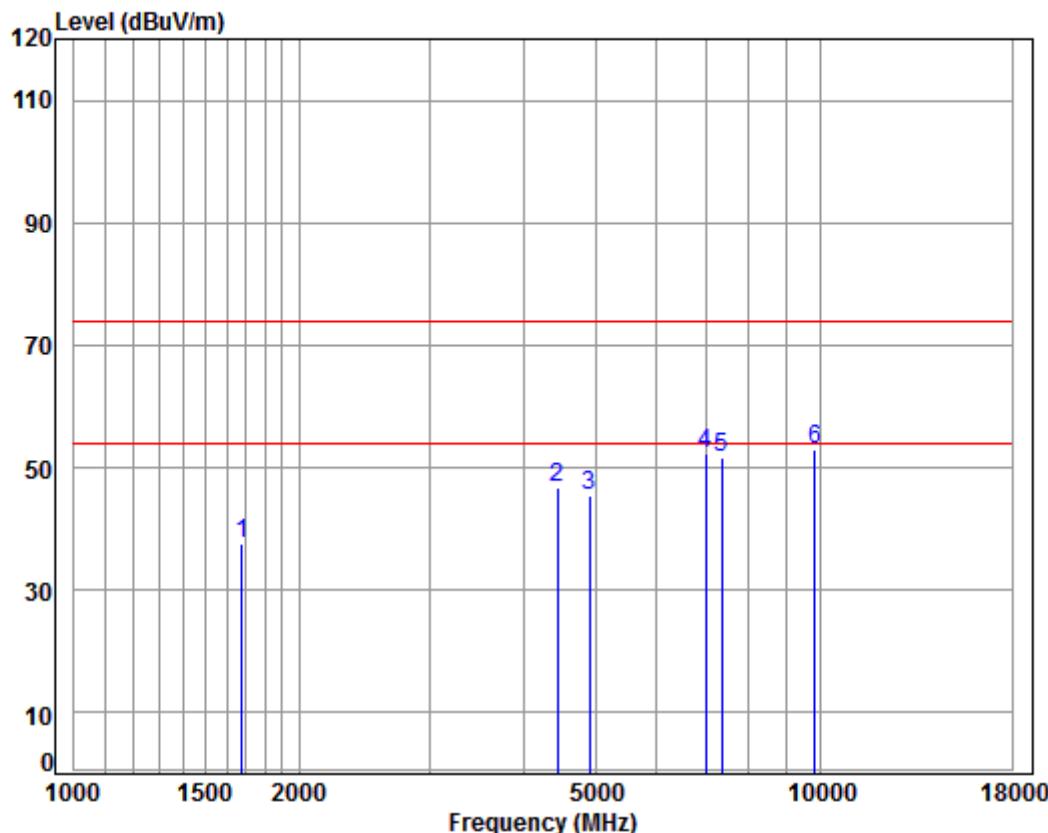

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2452 TX RSE

: 2.4G WIFI 11N40

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	38.03	43.86	37.66	74.00	-36.34	peak
2	4430.628	7.48	33.60	38.23	43.93	46.78	74.00	-27.22	peak
3	4904.000	7.99	34.33	38.46	41.44	45.30	74.00	-28.70	peak
4	6995.172	10.14	36.49	37.30	43.12	52.45	74.00	-21.55	peak
5	7356.000	10.04	36.36	36.97	42.26	51.69	74.00	-22.31	peak
6	pp 9808.000	10.85	37.56	34.99	39.52	52.94	74.00	-21.06	peak

Mode:h; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

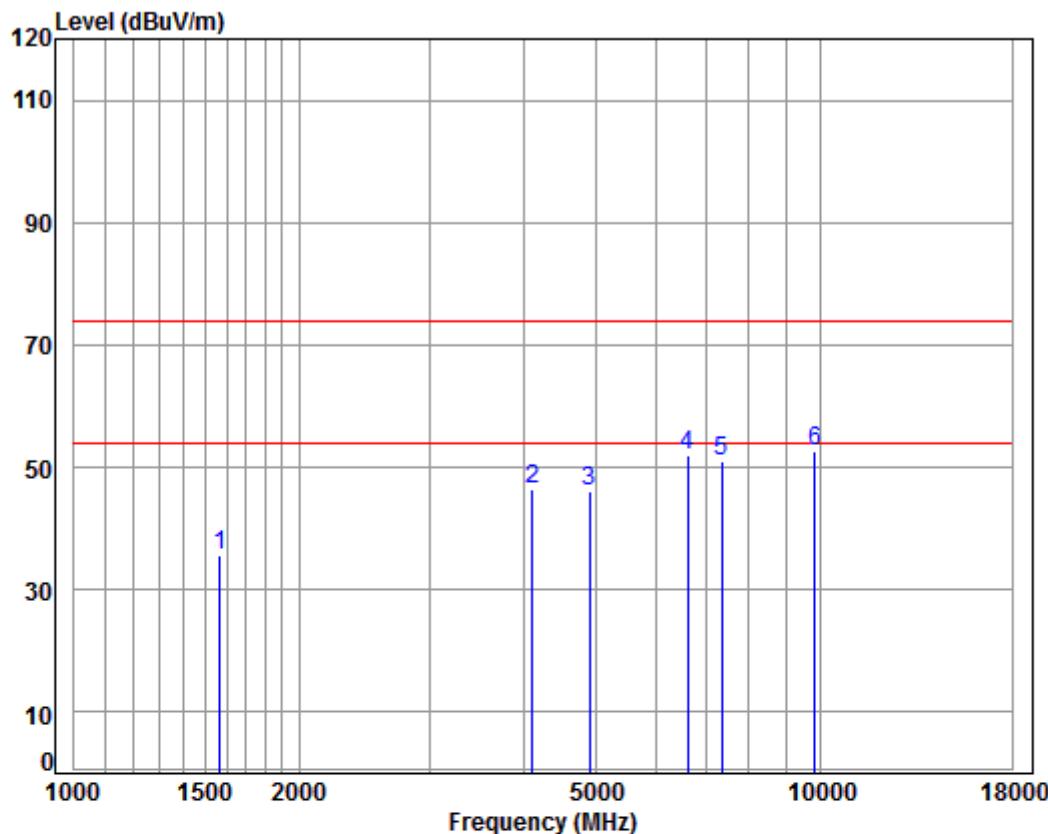

Condition: 3m VERTICAL

Job No : 07782CR


Mode : 2452 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1569.721	5.39	26.12	38.03	42.18	35.66	74.00	-38.34	peak
2	4109.872	7.11	33.60	38.06	43.84	46.49	74.00	-27.51	peak
3	4904.000	7.99	34.33	38.46	42.38	46.24	74.00	-27.76	peak
4	6621.375	11.19	35.45	37.66	43.12	52.10	74.00	-21.90	peak
5	7356.000	10.04	36.36	36.97	41.60	51.03	74.00	-22.97	peak
6 pp	9808.000	10.85	37.56	34.99	39.20	52.62	74.00	-21.38	peak

**LS9-AC11DBT**

Mode:i; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

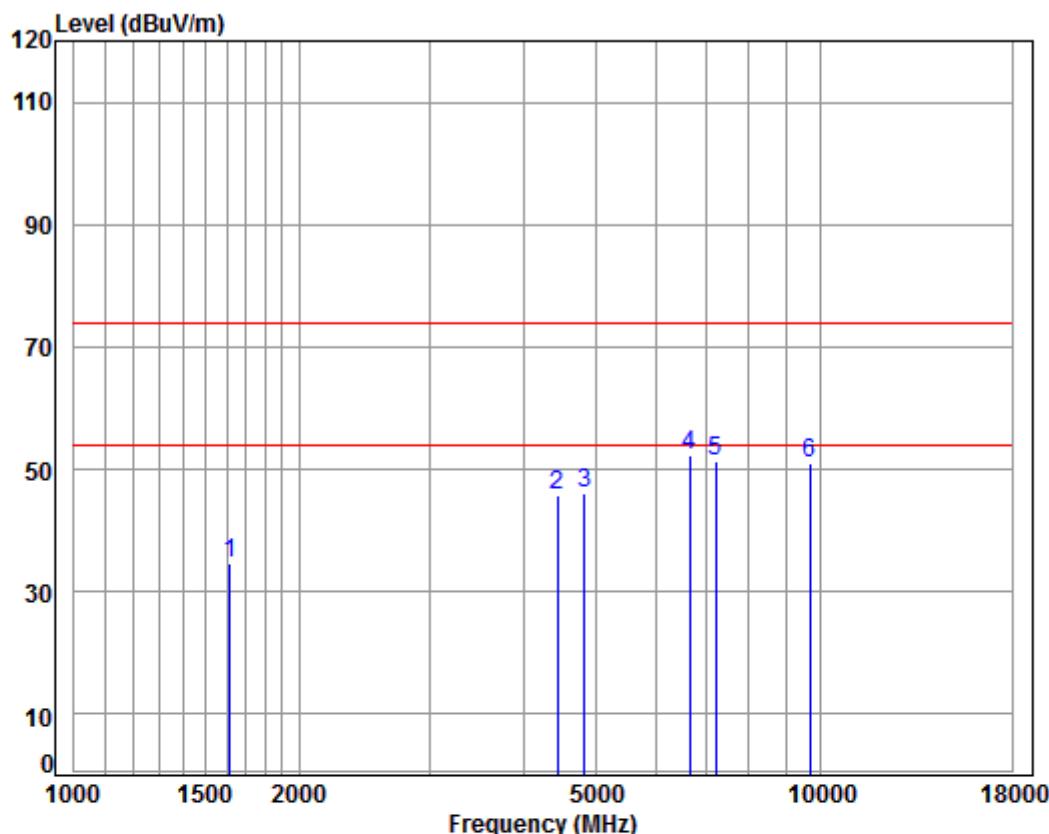

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11B

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line Limit	Over Line Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1615.754	5.33	26.32	38.03	41.17	34.79	74.00	-39.21	peak
2	4430.628	7.48	33.60	38.23	43.08	45.93	74.00	-28.07	peak
3	4824.000	7.91	34.19	38.42	42.48	46.16	74.00	-27.84	peak
4 pp	6659.763	11.08	35.56	37.62	43.26	52.28	74.00	-21.72	peak
5	7236.000	10.07	36.40	37.08	42.10	51.49	74.00	-22.51	peak
6	9648.000	10.77	37.53	35.07	37.72	50.95	74.00	-23.05	peak

Mode:i; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

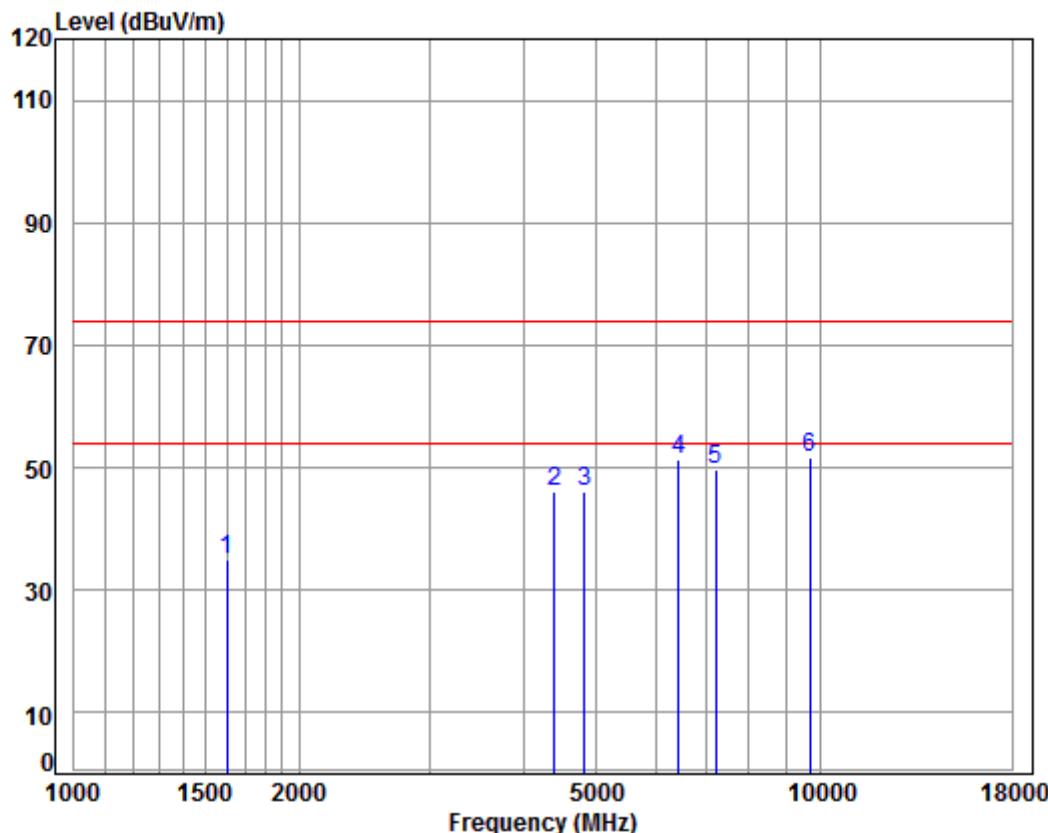

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11B

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	5.35	26.26	38.03	41.41	34.99	74.00	-39.01	peak
2	4392.376	7.44	33.60	38.21	43.22	46.05	74.00	-27.95	peak
3	4824.000	7.91	34.19	38.42	42.42	46.10	74.00	-27.90	peak
4	6451.353	11.45	35.06	37.83	42.81	51.49	74.00	-22.51	peak
5	7236.000	10.07	36.40	37.08	40.40	49.79	74.00	-24.21	peak
6	pp 9648.000	10.77	37.53	35.07	38.54	51.77	74.00	-22.23	peak

Mode:i; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

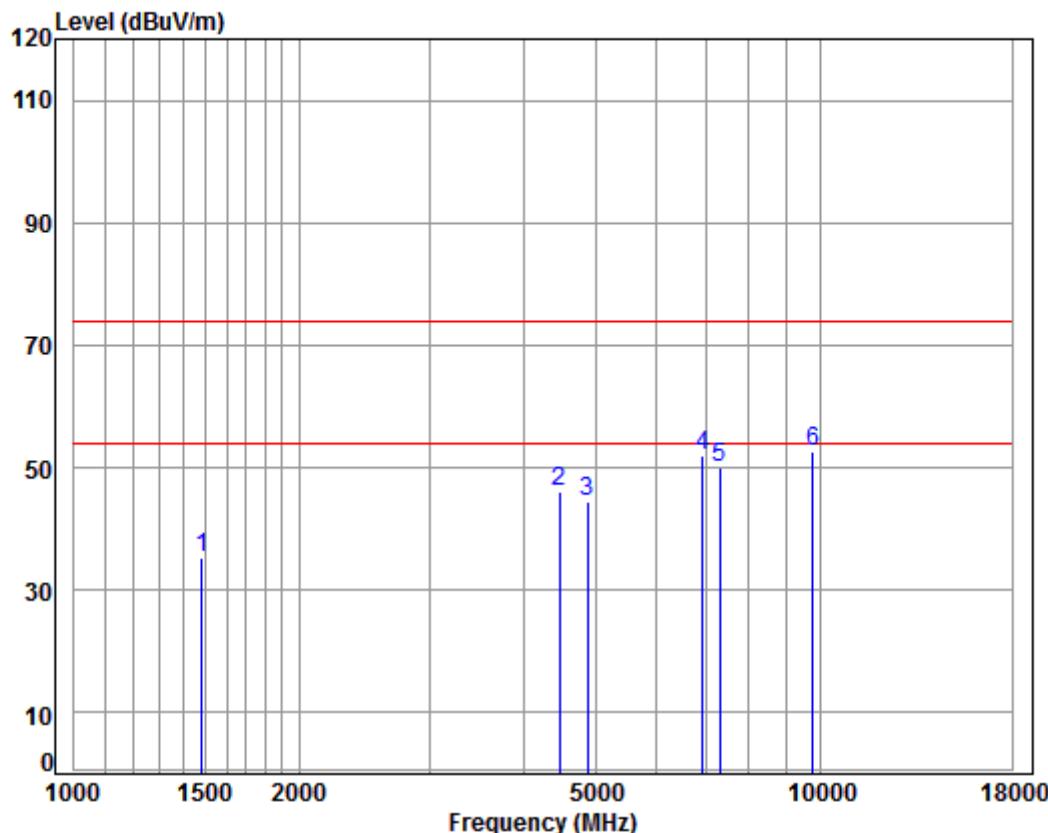

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11B

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Over Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1481.553	5.42	25.73	38.04	42.27	35.38	74.00	-38.62	peak	
2	4469.214	7.53	33.60	38.25	43.26	46.14	74.00	-27.86	peak	
3	4874.000	7.96	34.28	38.44	40.72	44.52	74.00	-29.48	peak	
4	6934.778	10.31	36.32	37.36	42.62	51.89	74.00	-22.11	peak	
5	7311.000	10.05	36.37	37.01	40.60	50.01	74.00	-23.99	peak	
6	pp 9748.000	10.82	37.55	35.02	39.28	52.63	74.00	-21.37	peak	

Mode:i; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

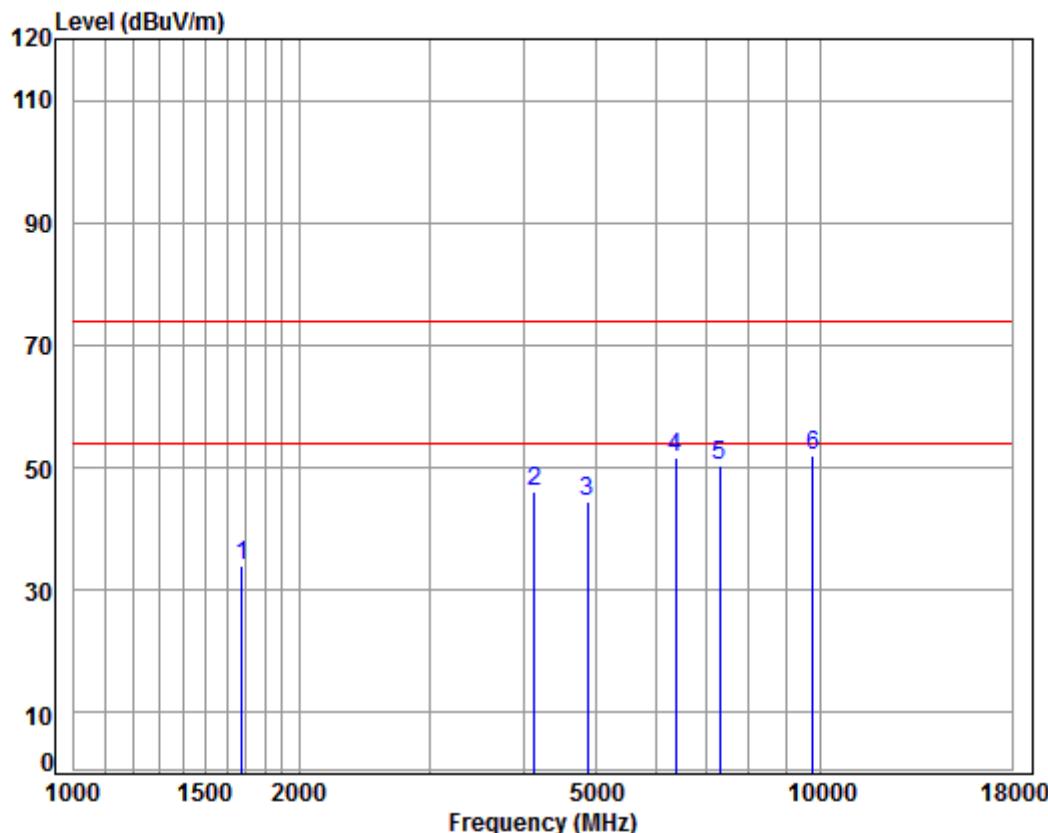


Condition: 3m VERTICAL

Job No : 07782CR

Mode : 2437 TX RSE  
: 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	38.03	40.37	34.17	74.00	-39.83	peak
2	4133.699	7.14	33.60	38.07	43.58	46.25	74.00	-27.75	peak
3	4874.000	7.96	34.28	38.44	40.53	44.33	74.00	-29.67	peak
4	6377.195	11.31	35.00	37.90	43.28	51.69	74.00	-22.31	peak
5	7311.000	10.05	36.37	37.01	40.91	50.32	74.00	-23.68	peak
6	pp 9748.000	10.82	37.55	35.02	38.75	52.10	74.00	-21.90	peak

Mode:i; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

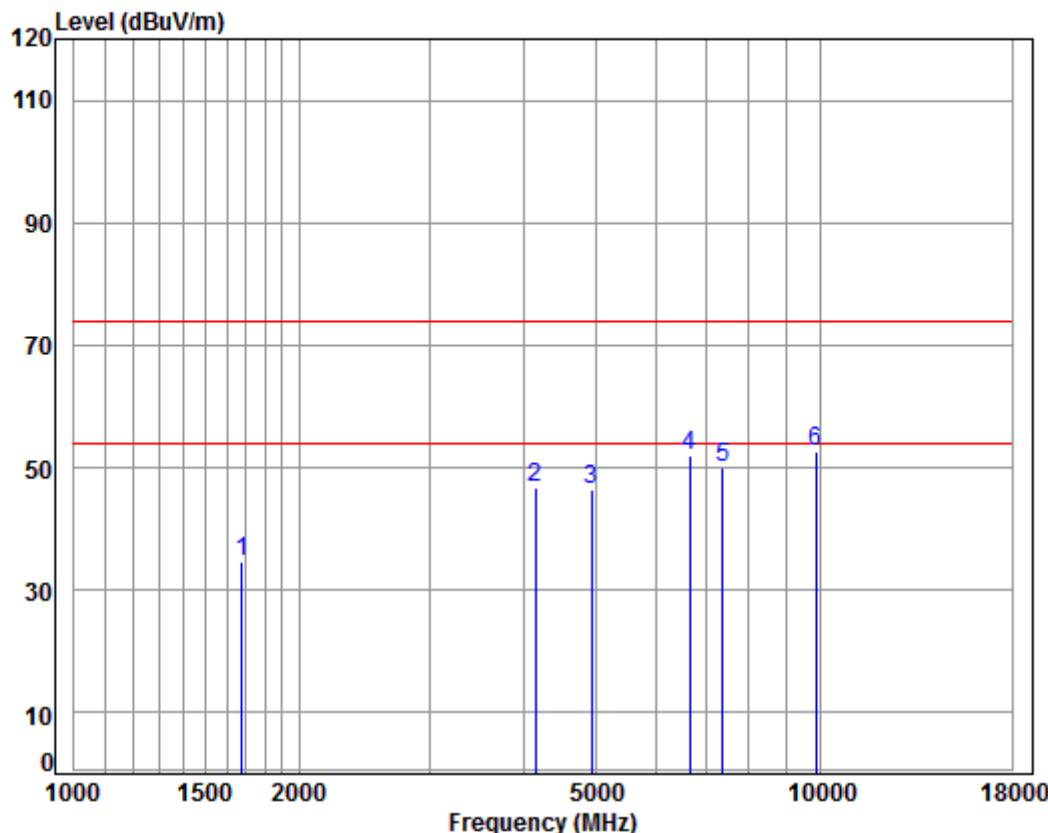

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11B

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	38.03	40.99	34.79	74.00	-39.21	peak
2	4145.664	7.16	33.60	38.08	44.12	46.80	74.00	-27.20	peak
3	4924.000	8.01	34.37	38.47	42.58	46.49	74.00	-27.51	peak
4	6659.763	11.08	35.56	37.62	43.12	52.14	74.00	-21.86	peak
5	7386.000	10.03	36.34	36.94	40.55	49.98	74.00	-24.02	peak
6	pp 9848.000	10.87	37.57	34.97	39.23	52.70	74.00	-21.30	peak

Mode:i; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

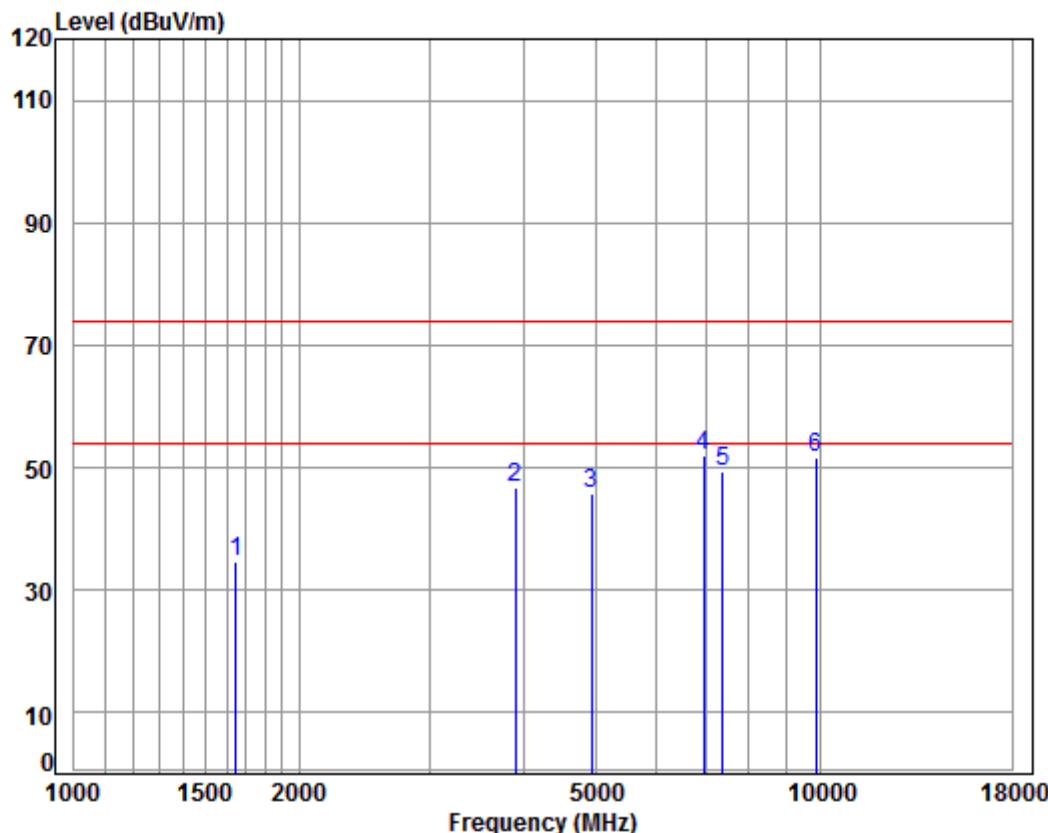

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11B

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1648.778	5.29	26.46	38.03	40.91	34.63	74.00	-39.37	peak	
2	3901.516	6.88	33.34	37.99	44.65	46.88	74.00	-27.12	peak	
3	4924.000	8.01	34.37	38.47	41.83	45.74	74.00	-28.26	peak	
4 pp	6954.852	10.25	36.38	37.34	42.64	51.93	74.00	-22.07	peak	
5	7386.000	10.03	36.34	36.94	40.10	49.53	74.00	-24.47	peak	
6	9848.000	10.87	37.57	34.97	38.10	51.57	74.00	-22.43	peak	

Mode:i; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

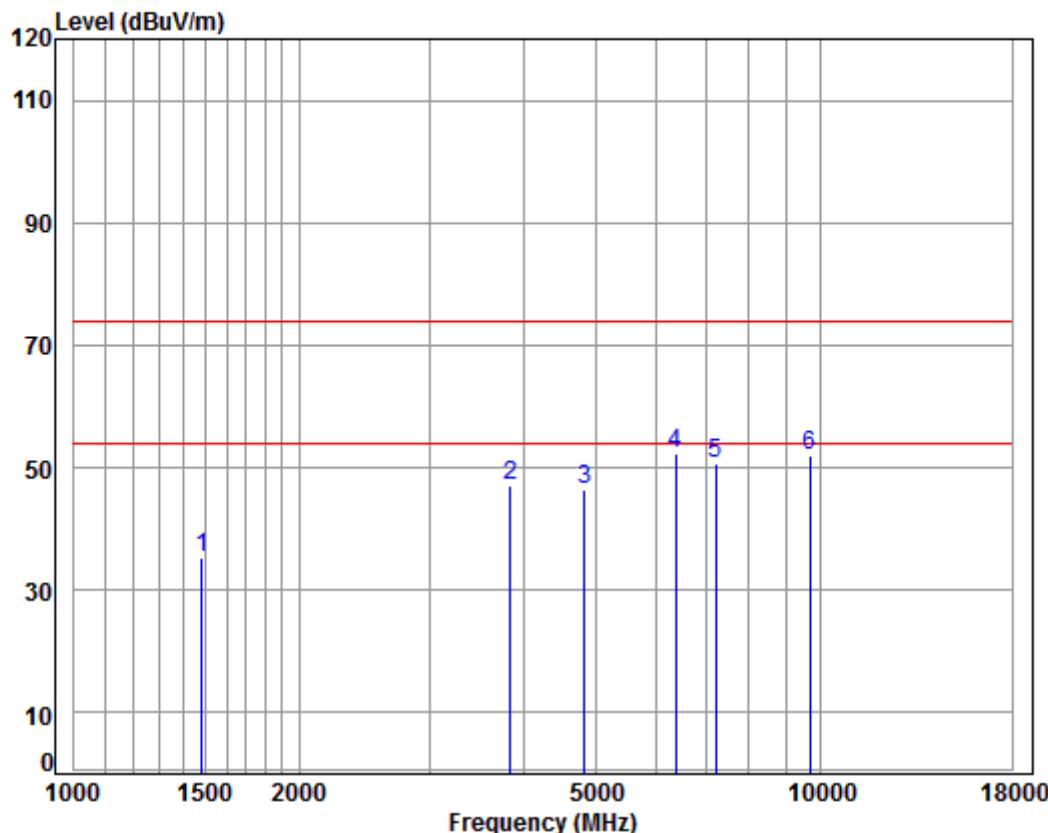

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1481.553	5.42	25.73	38.04	42.16	35.27	74.00	-38.73	peak	
2	3834.438	6.82	33.16	37.99	44.98	46.97	74.00	-27.03	peak	
3	4824.000	7.91	34.19	38.42	42.80	46.48	74.00	-27.52	peak	
4 pp	6395.654	11.34	35.02	37.89	43.80	52.27	74.00	-21.73	peak	
5	7236.000	10.07	36.40	37.08	41.14	50.53	74.00	-23.47	peak	
6	9648.000	10.77	37.53	35.07	38.68	51.91	74.00	-22.09	peak	

Mode:i; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

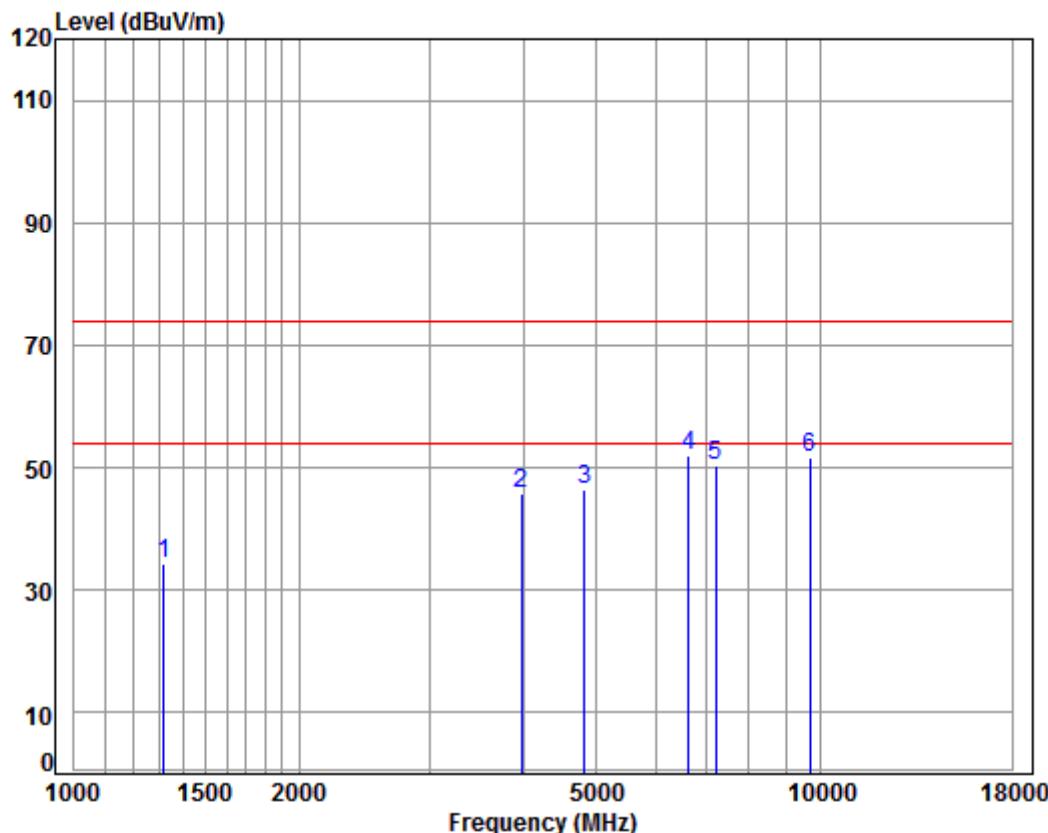

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1319.794	4.87	25.04	38.06	42.38	34.23	74.00	-39.77	peak
2	3969.767	6.95	33.52	38.00	43.45	45.92	74.00	-28.08	peak
3	4824.000	7.91	34.19	38.42	42.74	46.42	74.00	-27.58	peak
4 pp	6640.542	11.13	35.50	37.64	42.85	51.84	74.00	-22.16	peak
5	7236.000	10.07	36.40	37.08	40.85	50.24	74.00	-23.76	peak
6	9648.000	10.77	37.53	35.07	38.48	51.71	74.00	-22.29	peak

Mode:i; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

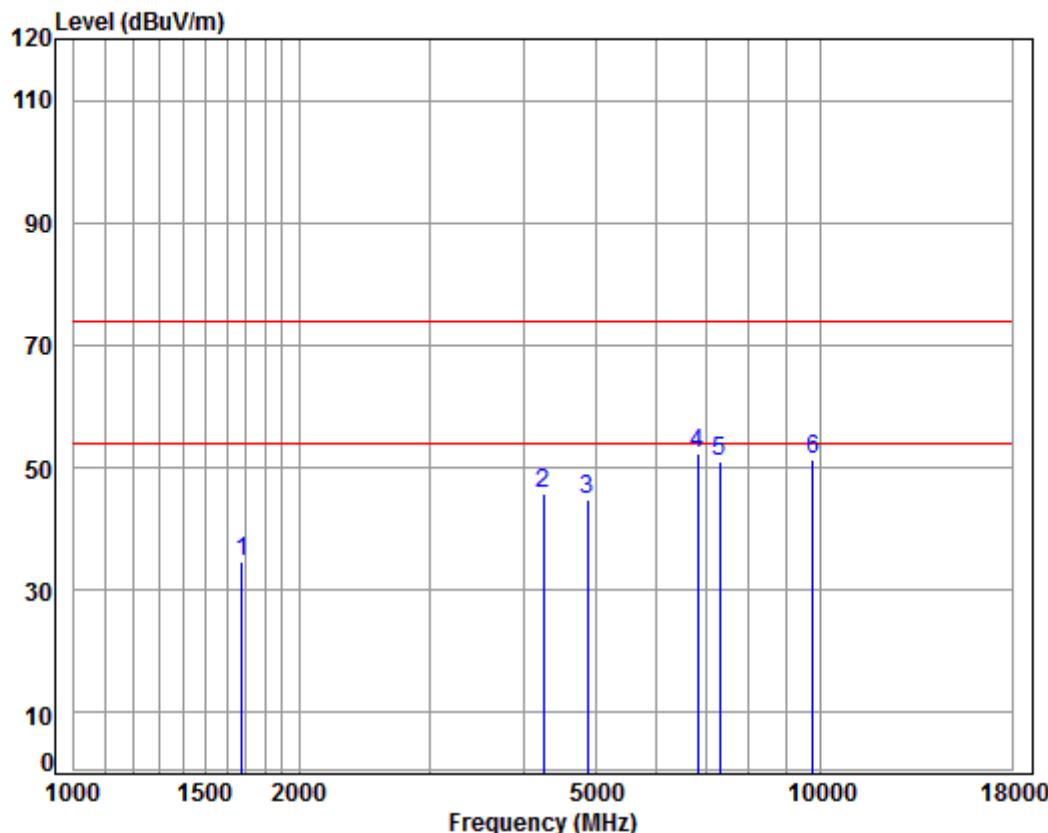

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	38.03	40.73	34.53	74.00	-39.47	peak	
2	4242.641	7.27	33.60	38.13	42.99	45.73	74.00	-28.27	peak	
3	4874.000	7.96	34.28	38.44	40.86	44.66	74.00	-29.34	peak	
4 pp	6835.278	10.58	36.05	37.45	43.08	52.26	74.00	-21.74	peak	
5	7311.000	10.05	36.37	37.01	41.48	50.89	74.00	-23.11	peak	
6	9748.000	10.82	37.55	35.02	38.11	51.46	74.00	-22.54	peak	

Mode:i; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

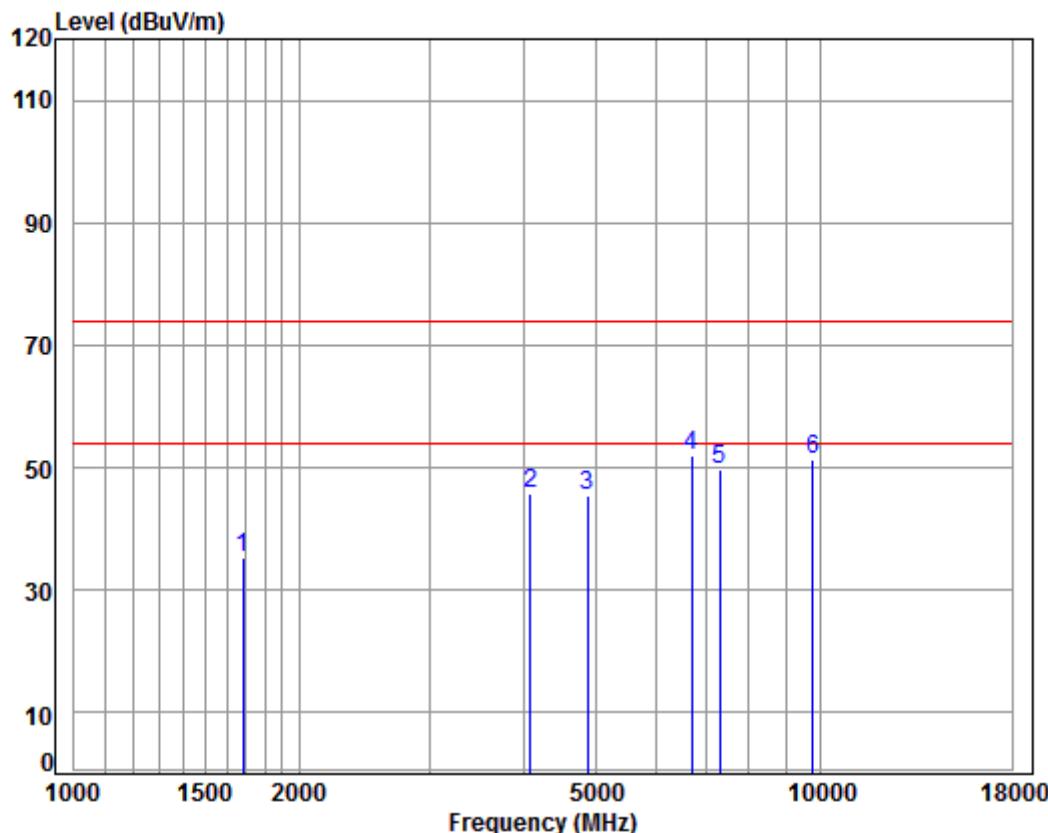

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11G

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1682.477	5.25	26.60	38.02	41.51	35.34	74.00	-38.66	peak	
2	4086.182	7.08	33.60	38.05	42.99	45.62	74.00	-28.38	peak	
3	4874.000	7.96	34.28	38.44	41.62	45.42	74.00	-28.58	peak	
4 pp	6717.762	10.91	35.72	37.57	42.94	52.00	74.00	-22.00	peak	
5	7311.000	10.05	36.37	37.01	40.39	49.80	74.00	-24.20	peak	
6	9748.000	10.82	37.55	35.02	38.14	51.49	74.00	-22.51	peak	

Mode:i; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

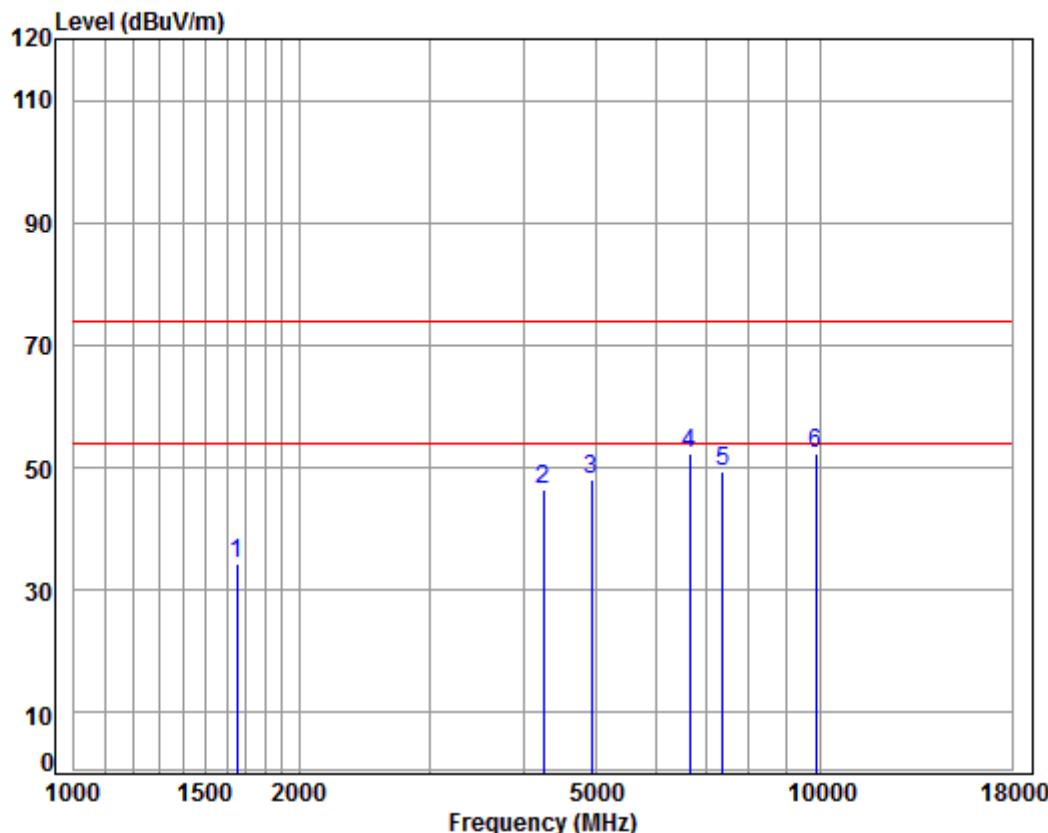

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1653.550	5.28	26.48	38.03	40.56	34.29	74.00	-39.71	peak
2	4254.921	7.28	33.60	38.14	43.72	46.46	74.00	-27.54	peak
3	4924.000	8.01	34.37	38.47	44.28	48.19	74.00	-25.81	peak
4	6659.763	11.08	35.56	37.62	43.15	52.17	74.00	-21.83	peak
5	7386.000	10.03	36.34	36.94	39.81	49.24	74.00	-24.76	peak
6	pp 9848.000	10.87	37.57	34.97	38.94	52.41	74.00	-21.59	peak

Mode:i; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

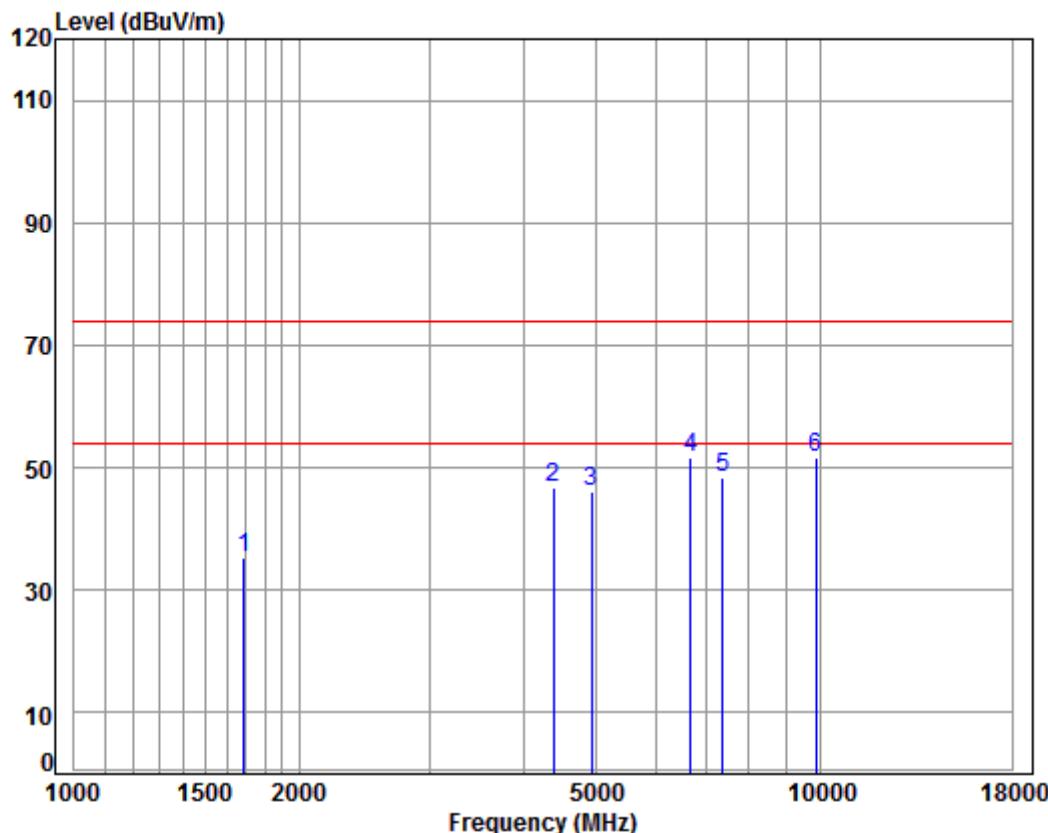


Condition: 3m VERTICAL

Job No : 07782CR

Mode : 2462 TX RSE  
: 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	38.02	41.36	35.20	74.00	-38.80	peak
2	4379.699	7.43	33.60	38.20	43.98	46.81	74.00	-27.19	peak
3	4924.000	8.01	34.37	38.47	42.26	46.17	74.00	-27.83	peak
4	6679.040	11.02	35.61	37.60	42.65	51.68	74.00	-22.32	peak
5	7386.000	10.03	36.34	36.94	39.04	48.47	74.00	-25.53	peak
6	pp 9848.000	10.87	37.57	34.97	38.25	51.72	74.00	-22.28	peak

Mode:i; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

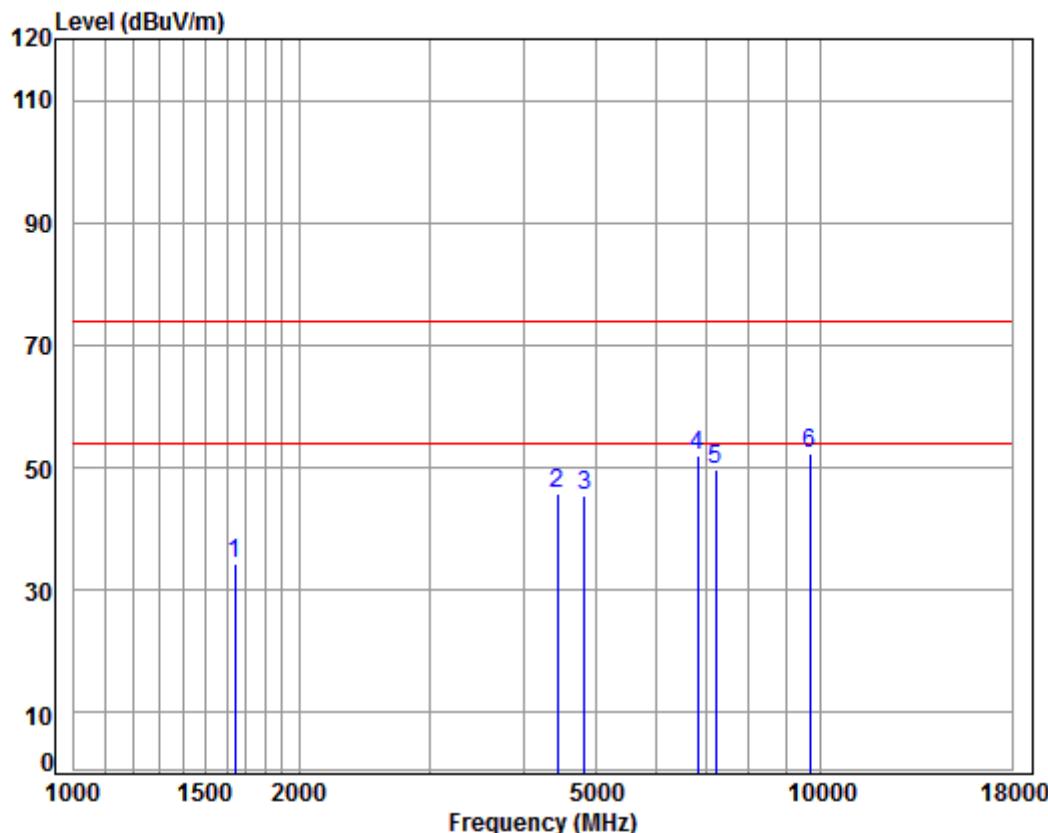

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	38.03	40.62	34.33	74.00	-39.67	peak
2	4430.628	7.48	33.60	38.23	43.06	45.91	74.00	-28.09	peak
3	4824.000	7.91	34.19	38.42	41.91	45.59	74.00	-28.41	peak
4	6835.278	10.58	36.05	37.45	42.97	52.15	74.00	-21.85	peak
5	7236.000	10.07	36.40	37.08	40.24	49.63	74.00	-24.37	peak
6	pp 9648.000	10.77	37.53	35.07	38.98	52.21	74.00	-21.79	peak

Mode:i; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

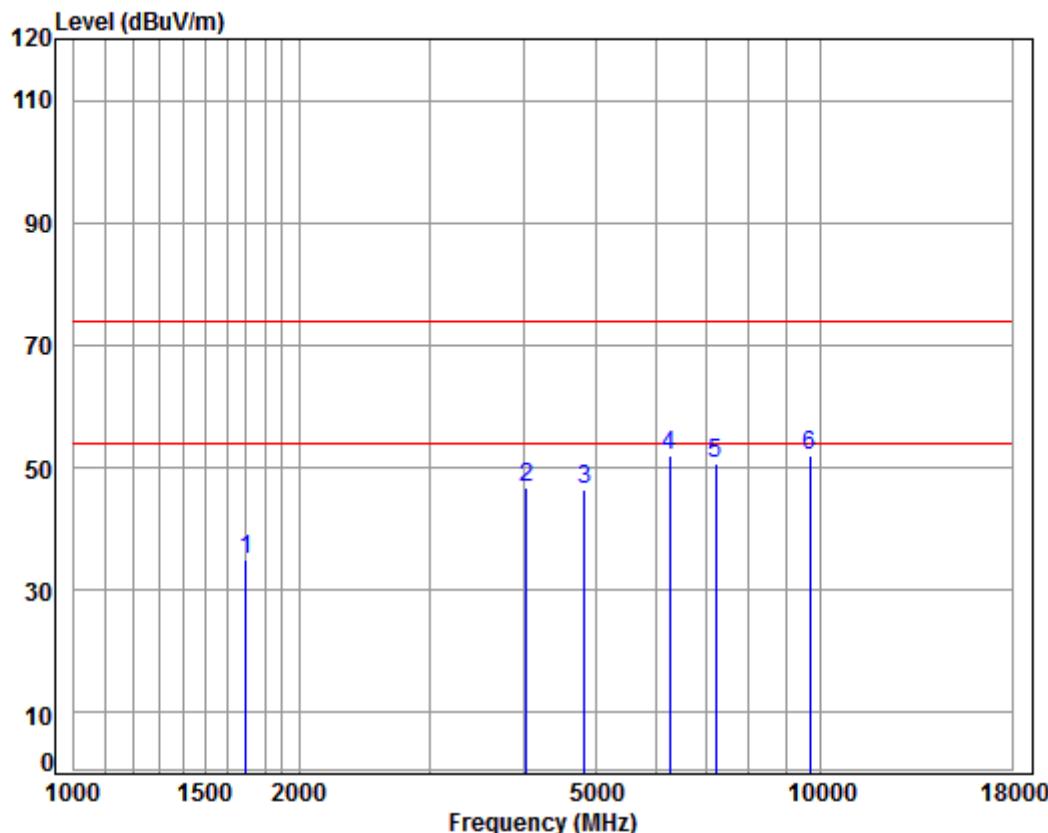

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2412 TX RSE

: 2.4G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	5.23	26.66	38.02	41.16	35.03	74.00	-38.97	peak	
2	4027.554	7.01	33.60	38.02	44.30	46.89	74.00	-27.11	peak	
3	4824.000	7.91	34.19	38.42	42.84	46.52	74.00	-27.48	peak	
4 pp	6267.553	11.10	34.92	38.02	43.89	51.89	74.00	-22.11	peak	
5	7236.000	10.07	36.40	37.08	41.14	50.53	74.00	-23.47	peak	
6	9648.000	10.77	37.53	35.07	38.60	51.83	74.00	-22.17	peak	

Mode:i; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

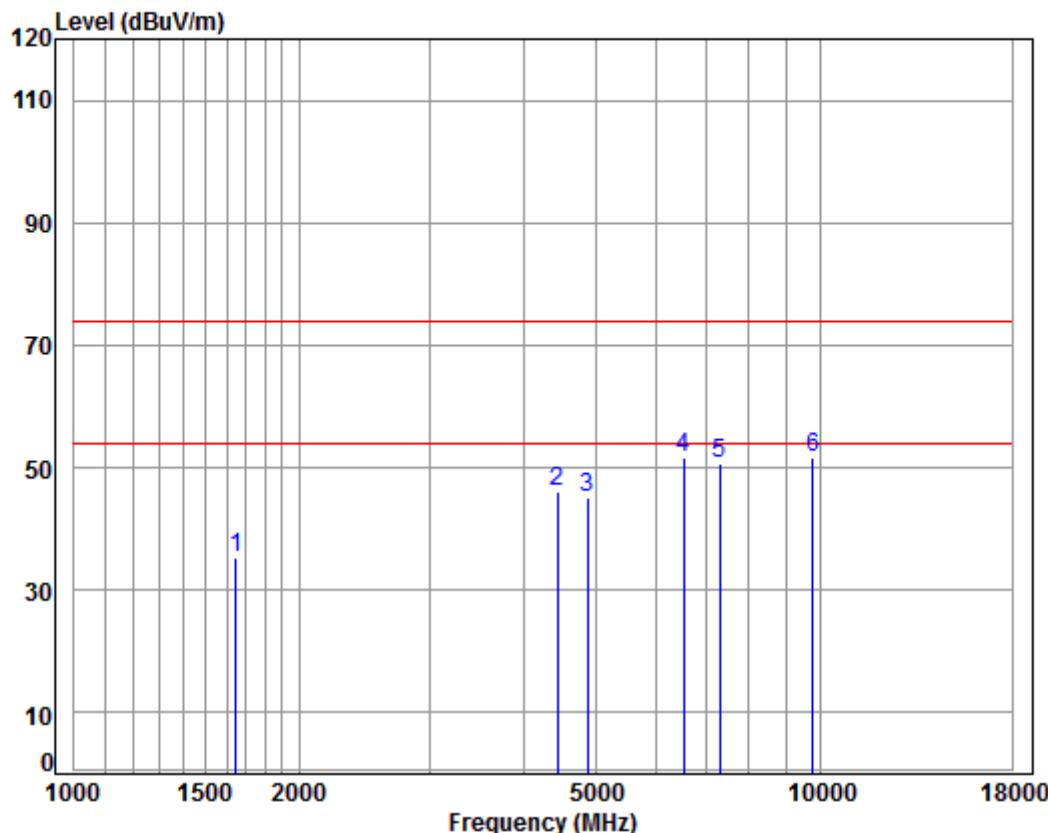

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Over Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1648.778	5.29	26.46	38.03	41.46	35.18	74.00	-38.82	peak	
2	4443.453	7.50	33.60	38.24	43.11	45.97	74.00	-28.03	peak	
3	4874.000	7.96	34.28	38.44	41.41	45.21	74.00	-28.79	peak	
4	6545.263	11.41	35.23	37.74	42.70	51.60	74.00	-22.40	peak	
5	7311.000	10.05	36.37	37.01	41.15	50.56	74.00	-23.44	peak	
6	pp 9748.000	10.82	37.55	35.02	38.41	51.76	74.00	-22.24	peak	

Mode:i; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

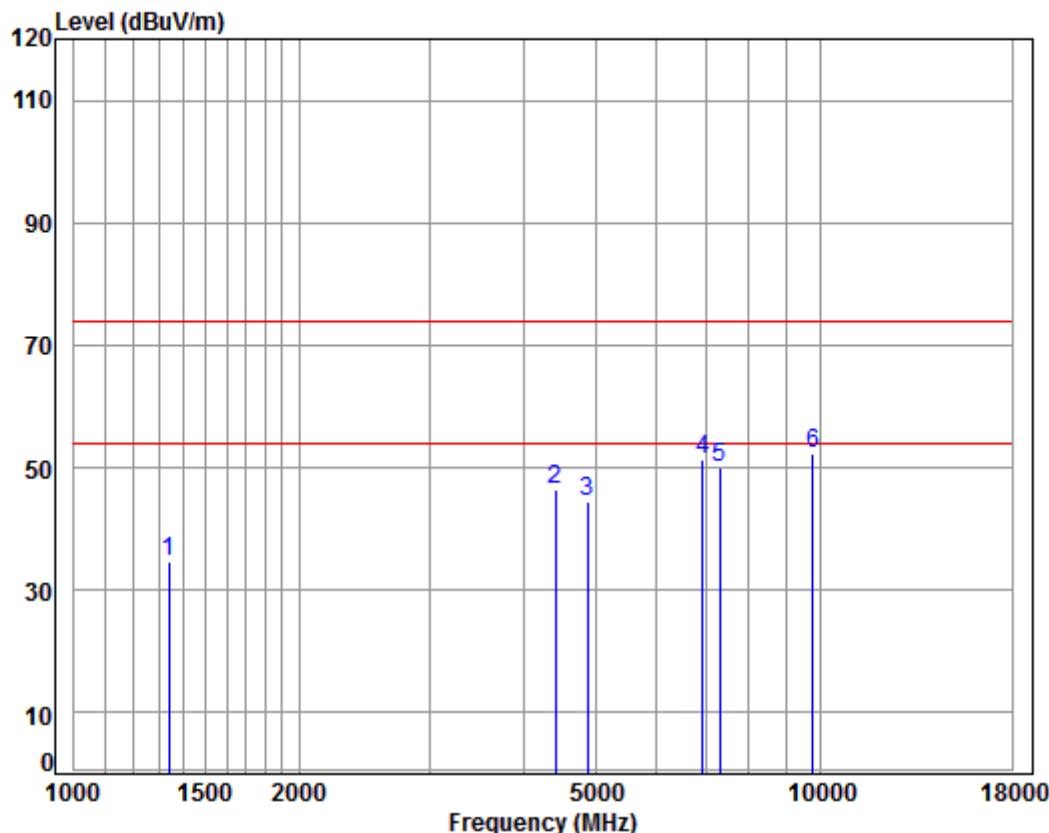

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1339.006	4.94	25.13	38.06	42.72	34.73	74.00	-39.27	peak
2	4405.090	7.46	33.60	38.22	43.50	46.34	74.00	-27.66	peak
3	4874.000	7.96	34.28	38.44	40.63	44.43	74.00	-29.57	peak
4	6934.778	10.31	36.32	37.36	42.12	51.39	74.00	-22.61	peak
5	7311.000	10.05	36.37	37.01	40.71	50.12	74.00	-23.88	peak
6 pp	9748.000	10.82	37.55	35.02	38.97	52.32	74.00	-21.68	peak

Mode:i; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

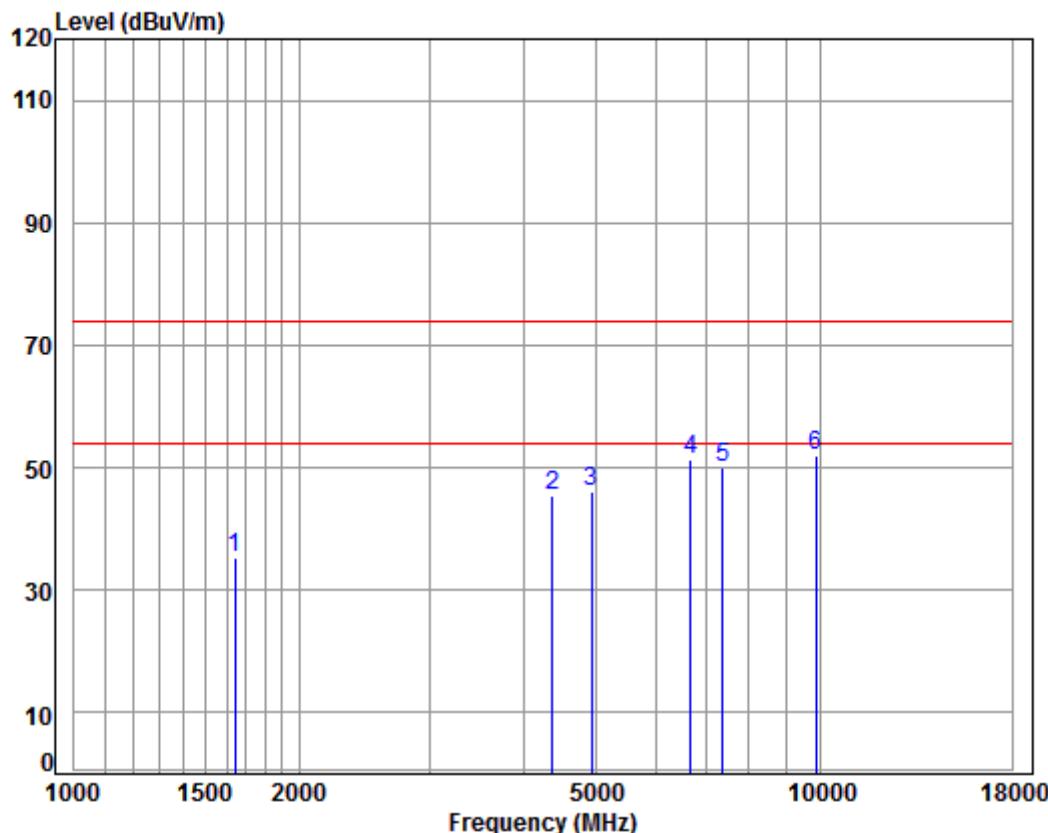

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	38.03	41.48	35.19	74.00	-38.81	peak
2	4367.058	7.41	33.60	38.20	42.80	45.61	74.00	-28.39	peak
3	4924.000	8.01	34.37	38.47	42.31	46.22	74.00	-27.78	peak
4	6679.040	11.02	35.61	37.60	42.28	51.31	74.00	-22.69	peak
5	7386.000	10.03	36.34	36.94	40.47	49.90	74.00	-24.10	peak
6	pp 9848.000	10.87	37.57	34.97	38.39	51.86	74.00	-22.14	peak

Mode:i; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

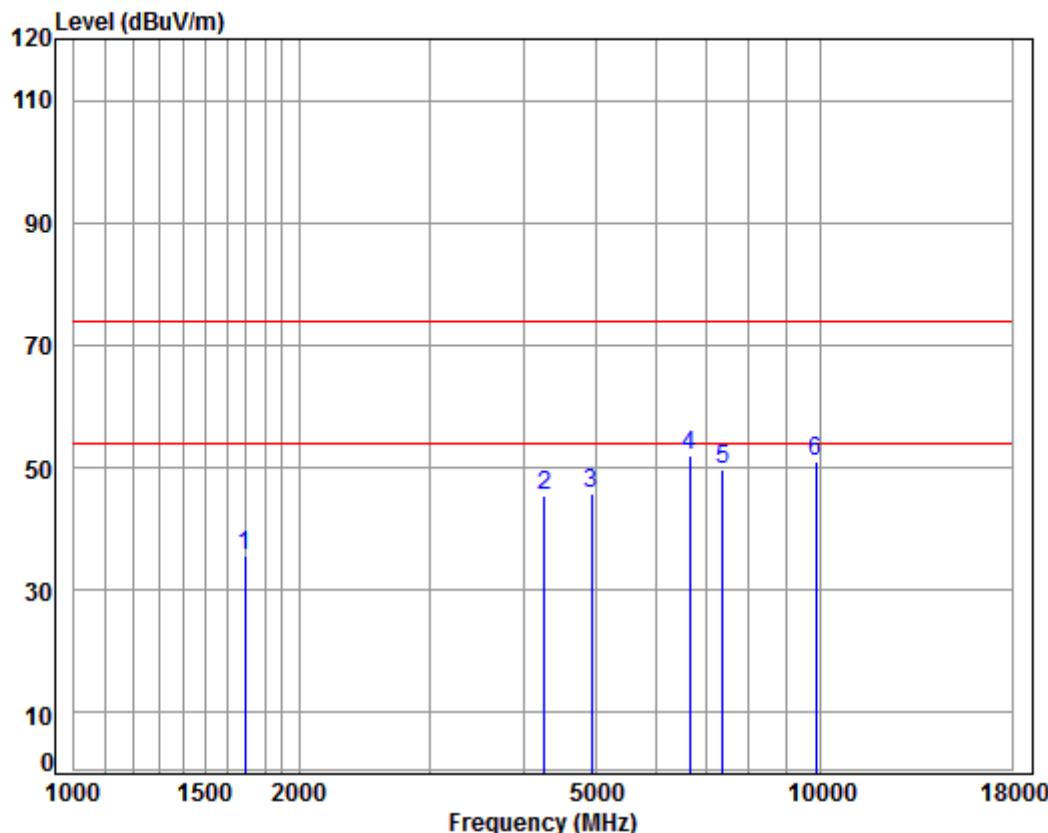

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2462 TX RSE

: 2.4G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	38.02	41.88	35.74	74.00	-38.26	peak	
2	4267.237	7.30	33.60	38.14	42.84	45.60	74.00	-28.40	peak	
3	4924.000	8.01	34.37	38.47	41.96	45.87	74.00	-28.13	peak	
4 pp	6659.763	11.08	35.56	37.62	42.91	51.93	74.00	-22.07	peak	
5	7386.000	10.03	36.34	36.94	40.31	49.74	74.00	-24.26	peak	
6	9848.000	10.87	37.57	34.97	37.49	50.96	74.00	-23.04	peak	

Mode:i; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

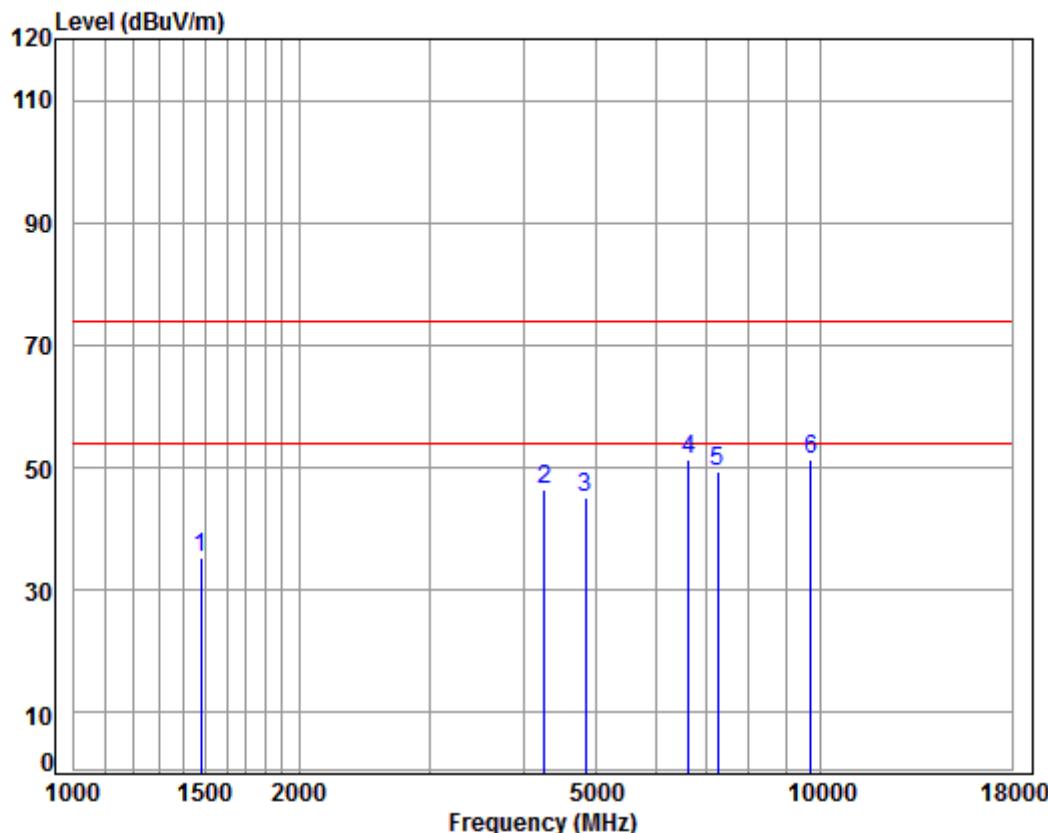

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2422 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	1477.276	5.41	25.71	38.04	42.26	35.34	74.00	-38.66	peak		
2	4267.237	7.30	33.60	38.14	43.82	46.58	74.00	-27.42	peak		
3	4844.000	7.93	34.23	38.43	41.34	45.07	74.00	-28.93	peak		
4 pp	6640.542	11.13	35.50	37.64	42.50	51.49	74.00	-22.51	peak		
5	7266.000	10.06	36.39	37.05	40.04	49.44	74.00	-24.56	peak		
6	9688.000	10.79	37.54	35.05	38.00	51.28	74.00	-22.72	peak		

Mode:i; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

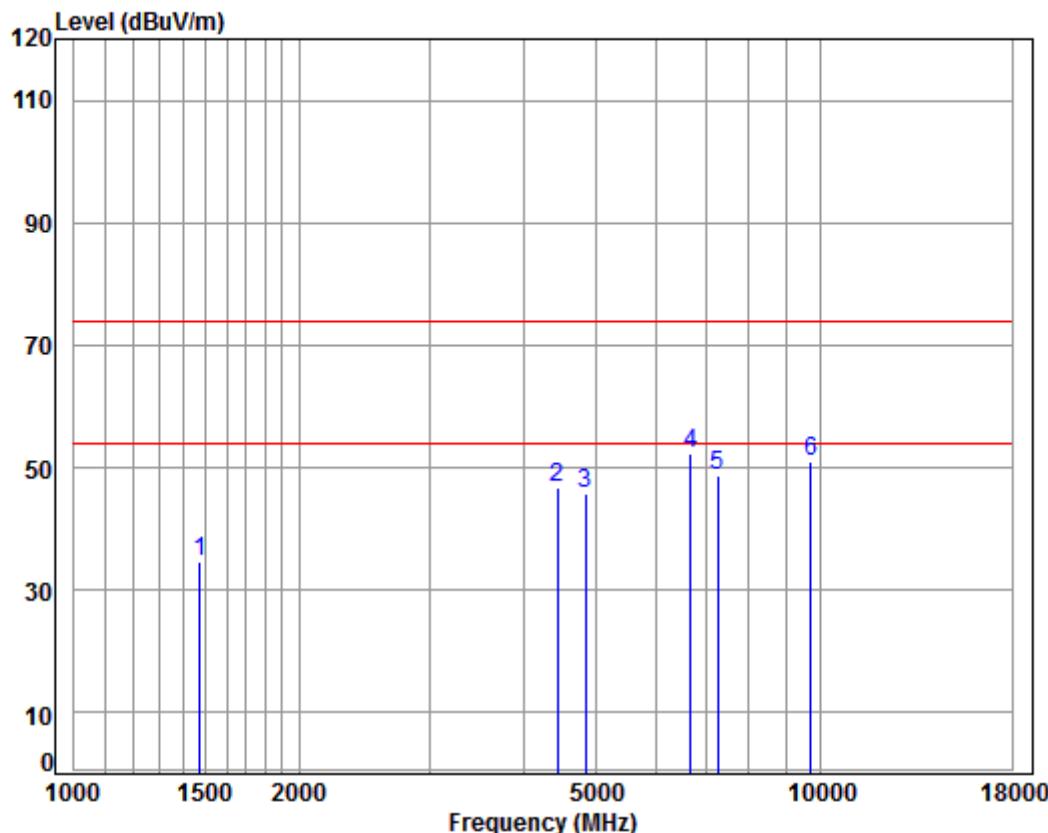

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2422 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	1473.013	5.39	25.69	38.04	41.72	34.76	74.00	-39.24	peak		
2	4443.453	7.50	33.60	38.24	43.91	46.77	74.00	-27.23	peak		
3	4844.000	7.93	34.23	38.43	41.98	45.71	74.00	-28.29	peak		
4 pp	6679.040	11.02	35.61	37.60	43.22	52.25	74.00	-21.75	peak		
5	7266.000	10.06	36.39	37.05	39.47	48.87	74.00	-25.13	peak		
6	9688.000	10.79	37.54	35.05	37.79	51.07	74.00	-22.93	peak		

Mode:i; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

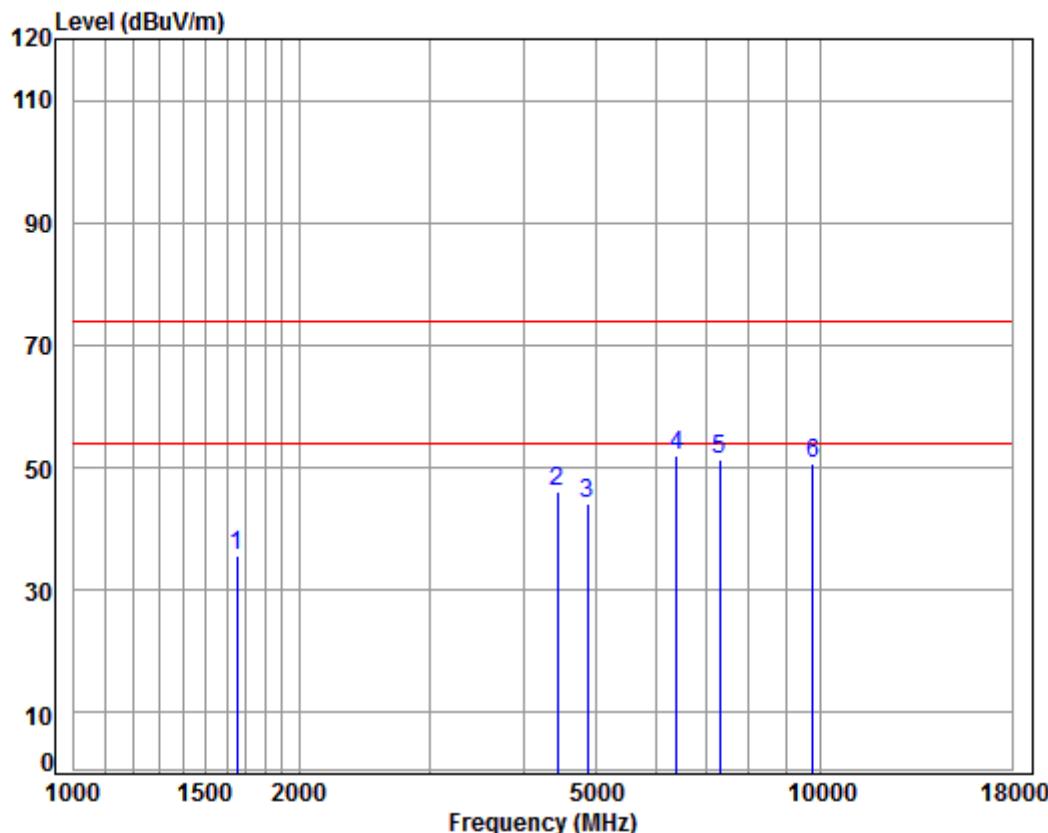

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Over Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1653.550	5.28	26.48	38.03	41.85	35.58	74.00	-38.42	peak	
2	4430.628	7.48	33.60	38.23	43.11	45.96	74.00	-28.04	peak	
3	4874.000	7.96	34.28	38.44	40.37	44.17	74.00	-29.83	peak	
4 pp	6414.167	11.38	35.03	37.87	43.59	52.13	74.00	-21.87	peak	
5	7311.000	10.05	36.37	37.01	41.95	51.36	74.00	-22.64	peak	
6	9748.000	10.82	37.55	35.02	37.35	50.70	74.00	-23.30	peak	

Mode:i; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

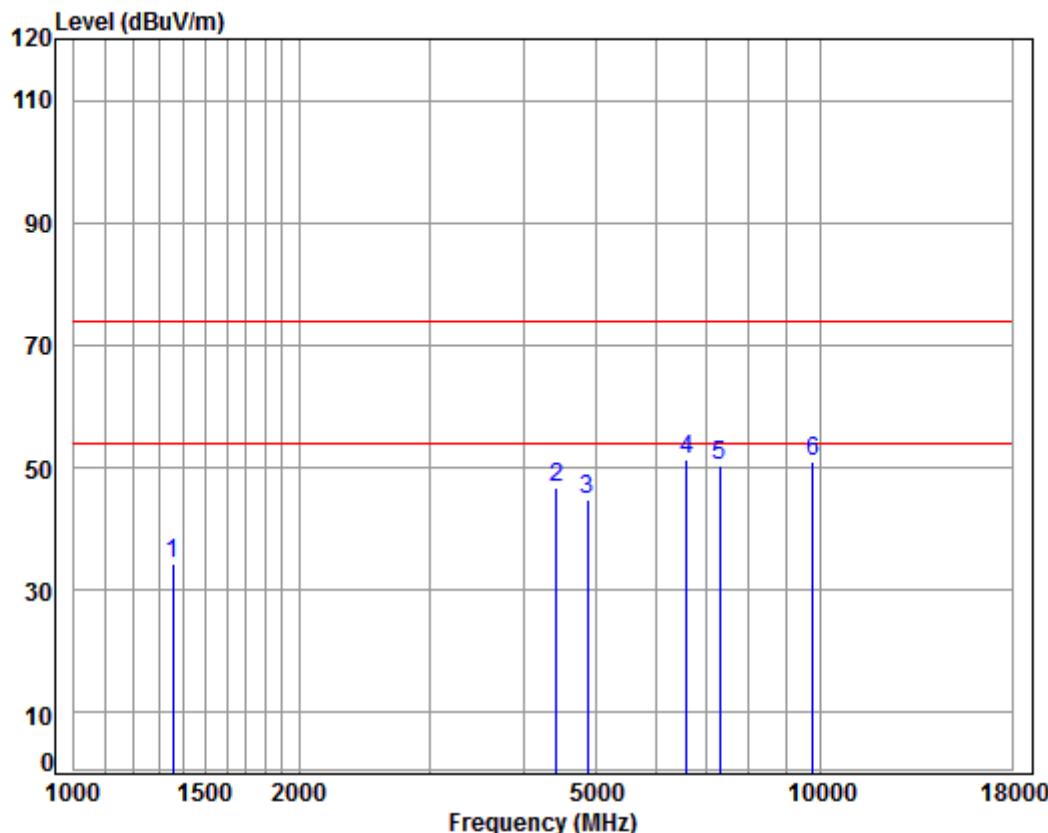

Condition: 3m VERTICAL


Job No : 07782CR

Mode : 2437 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Over Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1354.577	4.99	25.20	38.06	42.11	34.24	74.00	-39.76	peak	
2	4417.841	7.47	33.60	38.22	44.00	46.85	74.00	-27.15	peak	
3	4874.000	7.96	34.28	38.44	40.97	44.77	74.00	-29.23	peak	
4 pp	6602.265	11.24	35.39	37.68	42.49	51.44	74.00	-22.56	peak	
5	7311.000	10.05	36.37	37.01	40.99	50.40	74.00	-23.60	peak	
6	9748.000	10.82	37.55	35.02	37.60	50.95	74.00	-23.05	peak	

Mode:i; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

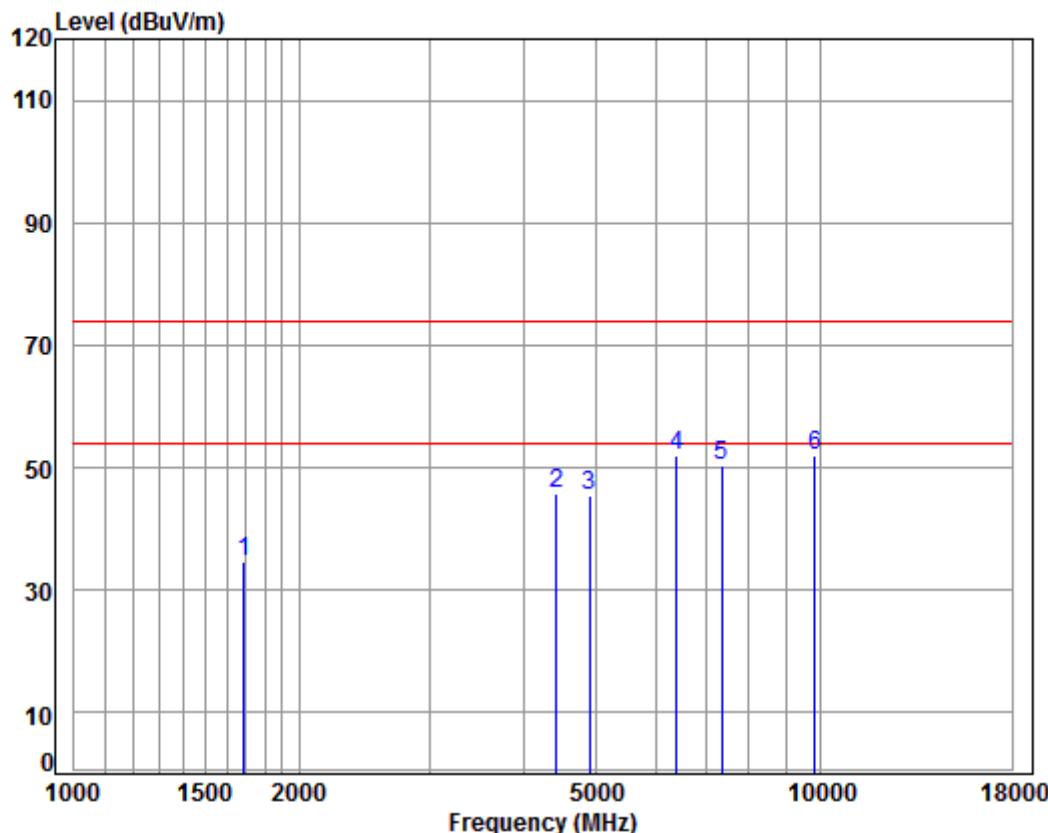

Condition: 3m HORIZONTAL


Job No : 07782CR

Mode : 2452 TX RSE

: 2.4G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1687.347	5.24	26.62	38.02	40.89	34.73	74.00	-39.27	peak
2	4417.841	7.47	33.60	38.22	42.90	45.75	74.00	-28.25	peak
3	4904.000	7.99	34.33	38.46	41.45	45.31	74.00	-28.69	peak
4 pp	6414.167	11.38	35.03	37.87	43.58	52.12	74.00	-21.88	peak
5	7356.000	10.04	36.36	36.97	40.98	50.41	74.00	-23.59	peak
6	9808.000	10.85	37.56	34.99	38.53	51.95	74.00	-22.05	peak

Mode:i; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

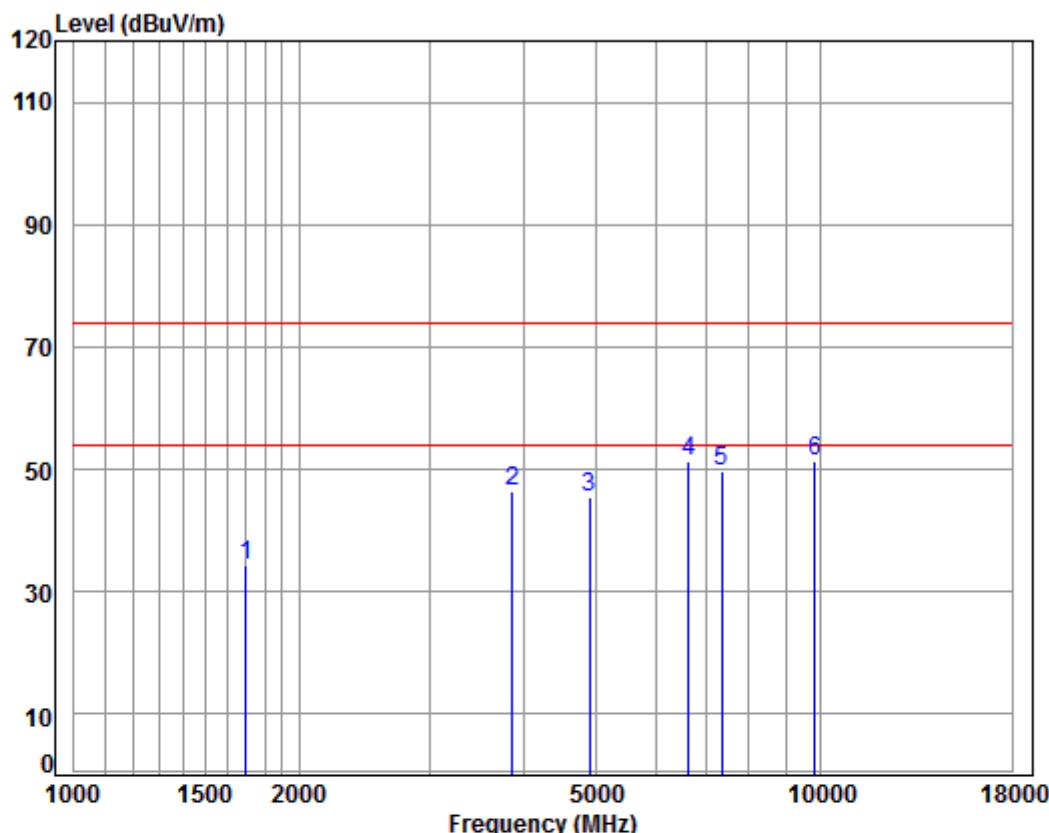

Condition: 3m VERTICAL

Job No : 07782CR

Mode : 2452 TX RSE

: 2.4G WIFI 11N40


		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1697.129	5.23	26.66	38.02	40.59	34.46	74.00	-39.54	peak
2	3856.668	6.84	33.22	37.99	44.51	46.58	74.00	-27.42	peak
3	4904.000	7.99	34.33	38.46	41.65	45.51	74.00	-28.49	peak
4 pp	6640.542	11.13	35.50	37.64	42.48	51.47	74.00	-22.53	peak
5	7356.000	10.04	36.36	36.97	40.40	49.83	74.00	-24.17	peak
6	9808.000	10.85	37.56	34.99	37.92	51.34	74.00	-22.66	peak

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 8 Photographs

### 8.1 Radiated Spurious Emissions Test Setup

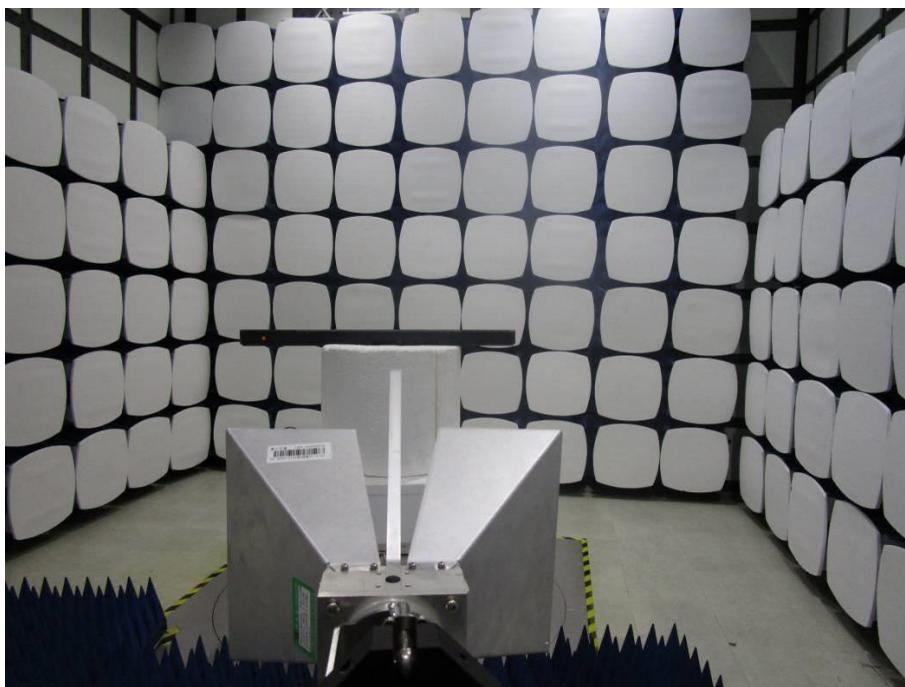

### 8.2 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1707007782CR.


## 9 Appendix


### 9.1 Appendix 15.247


CDW-B18821A-00


#### 1. Maximum peak conducted output power


Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
11B	2412	17.79	<30	PASS
11B	2437	16.67	<30	PASS
11B	2462	17.93	<30	PASS
11G	2412	15.75	<30	PASS
11G	2437	16.07	<30	PASS
11G	2462	15.90	<30	PASS
11N20SISO	2412	14.82	<30	PASS
11N20SISO	2437	14.84	<30	PASS
11N20SISO	2462	15.51	<30	PASS
11N40SISO	2422	14.29	<30	PASS
11N40SISO	2437	14.38	<30	PASS
11N40SISO	2452	14.86	<30	PASS

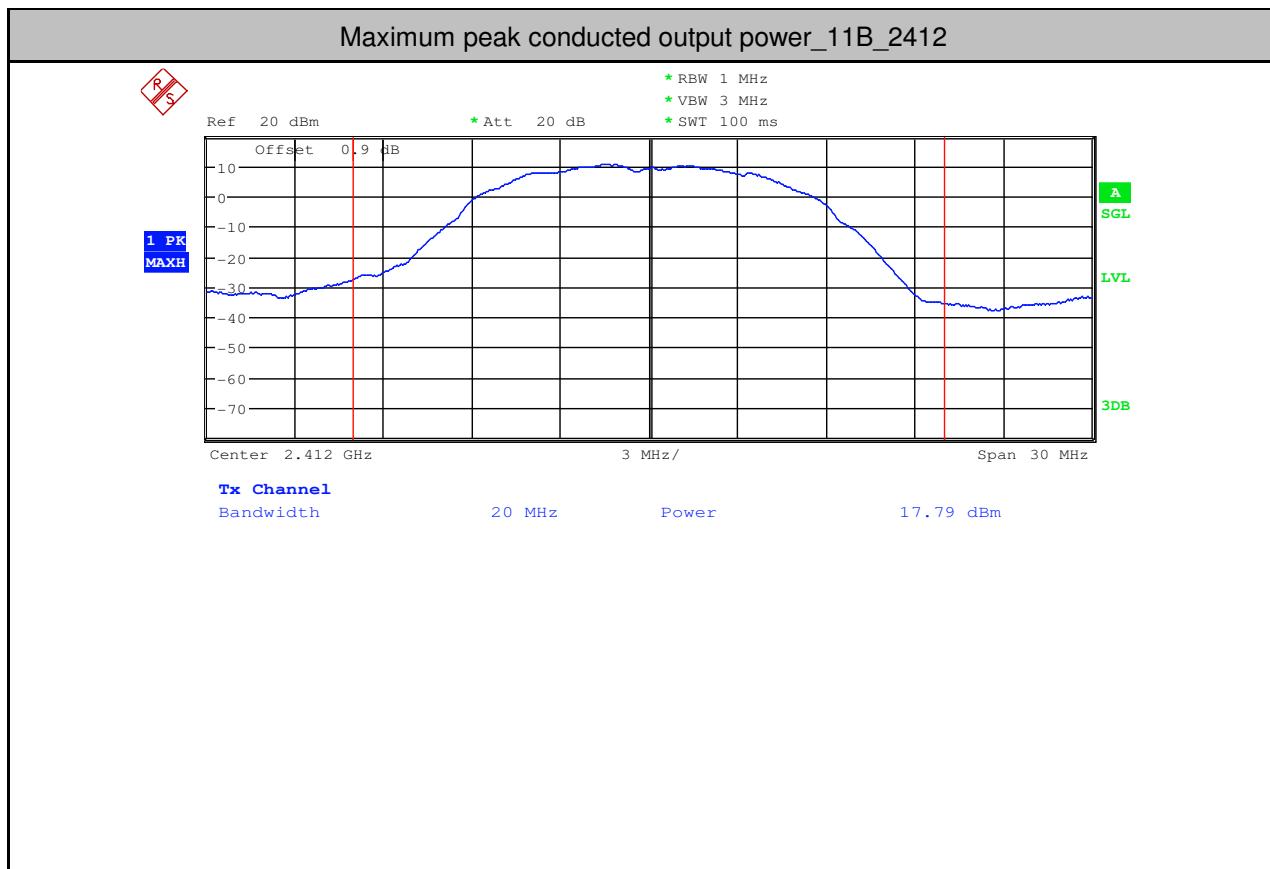


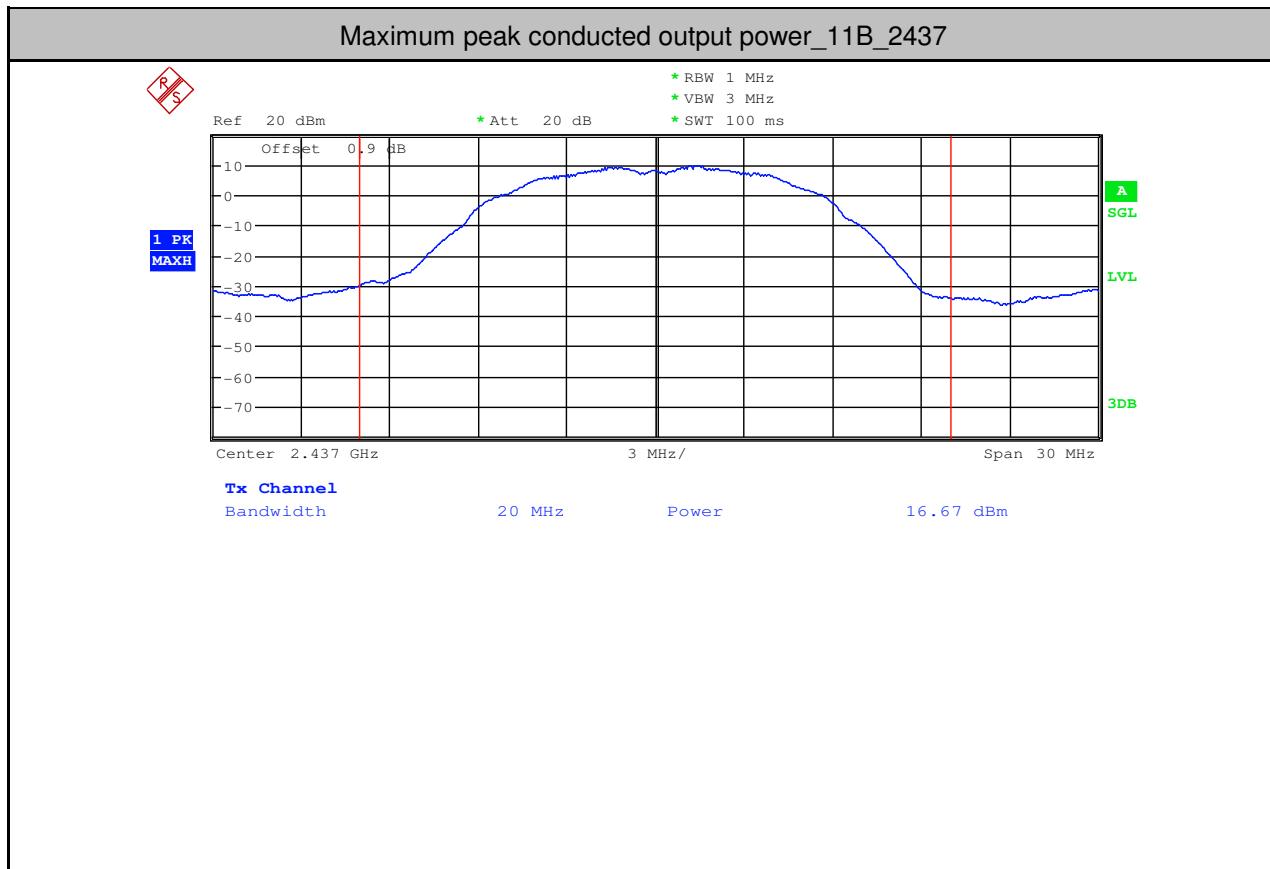


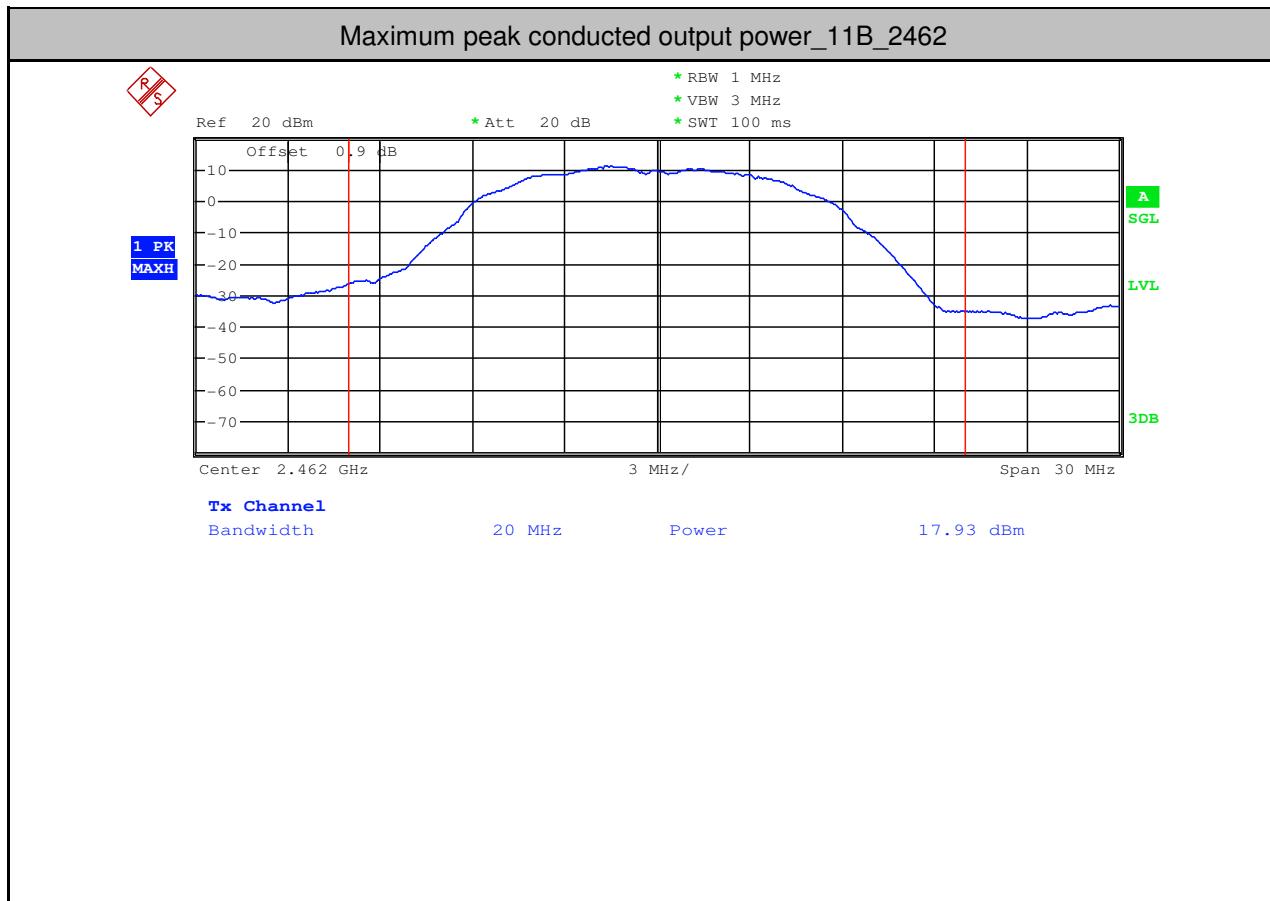


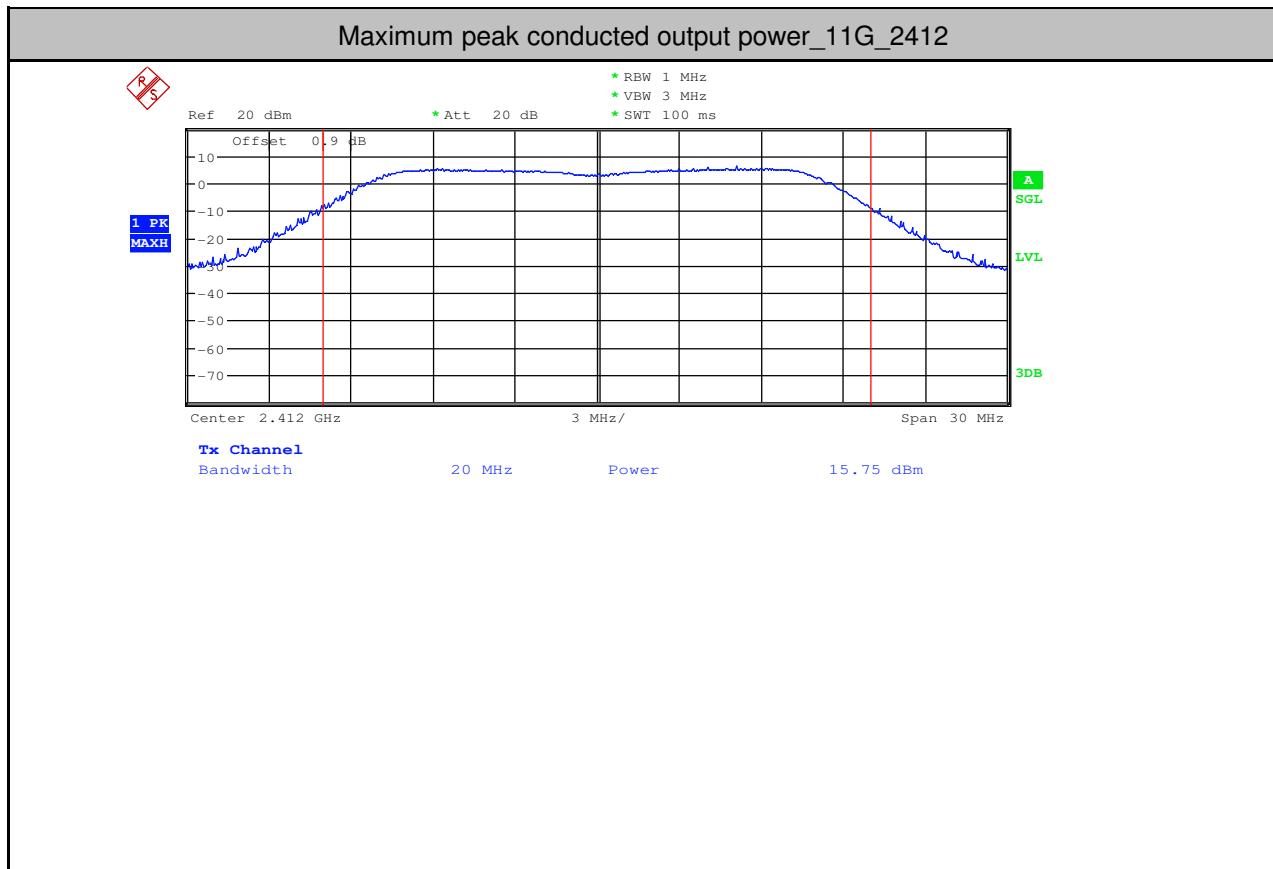


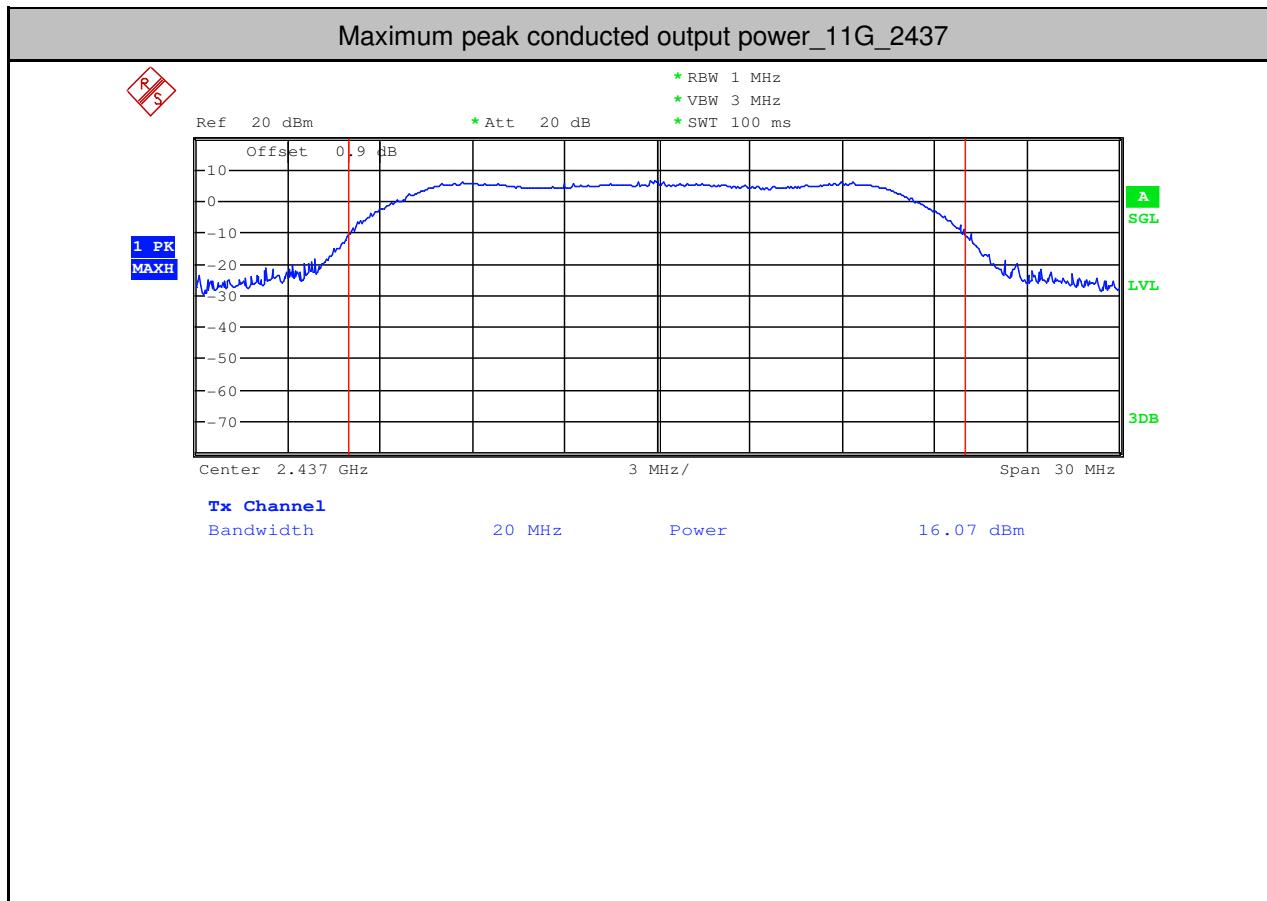


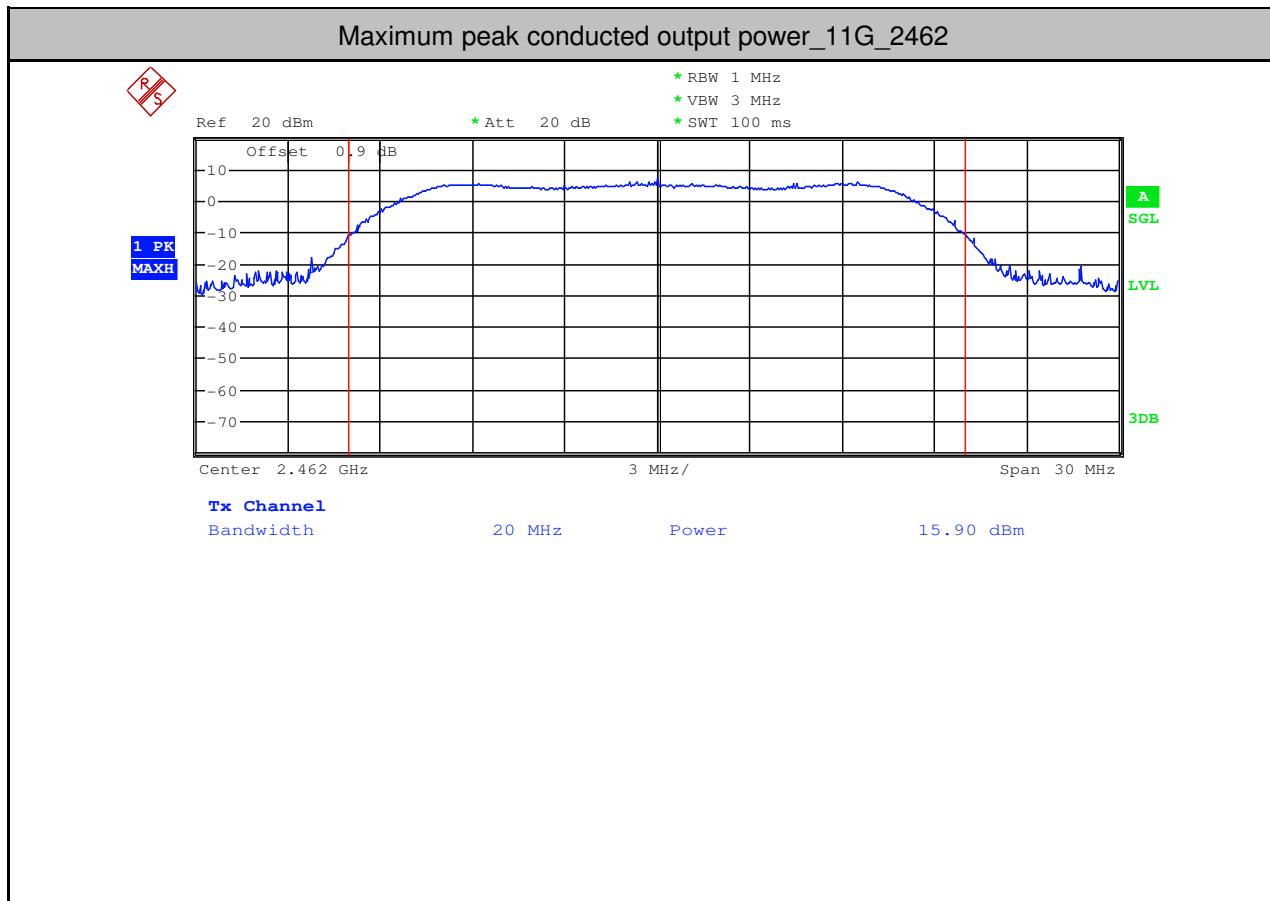


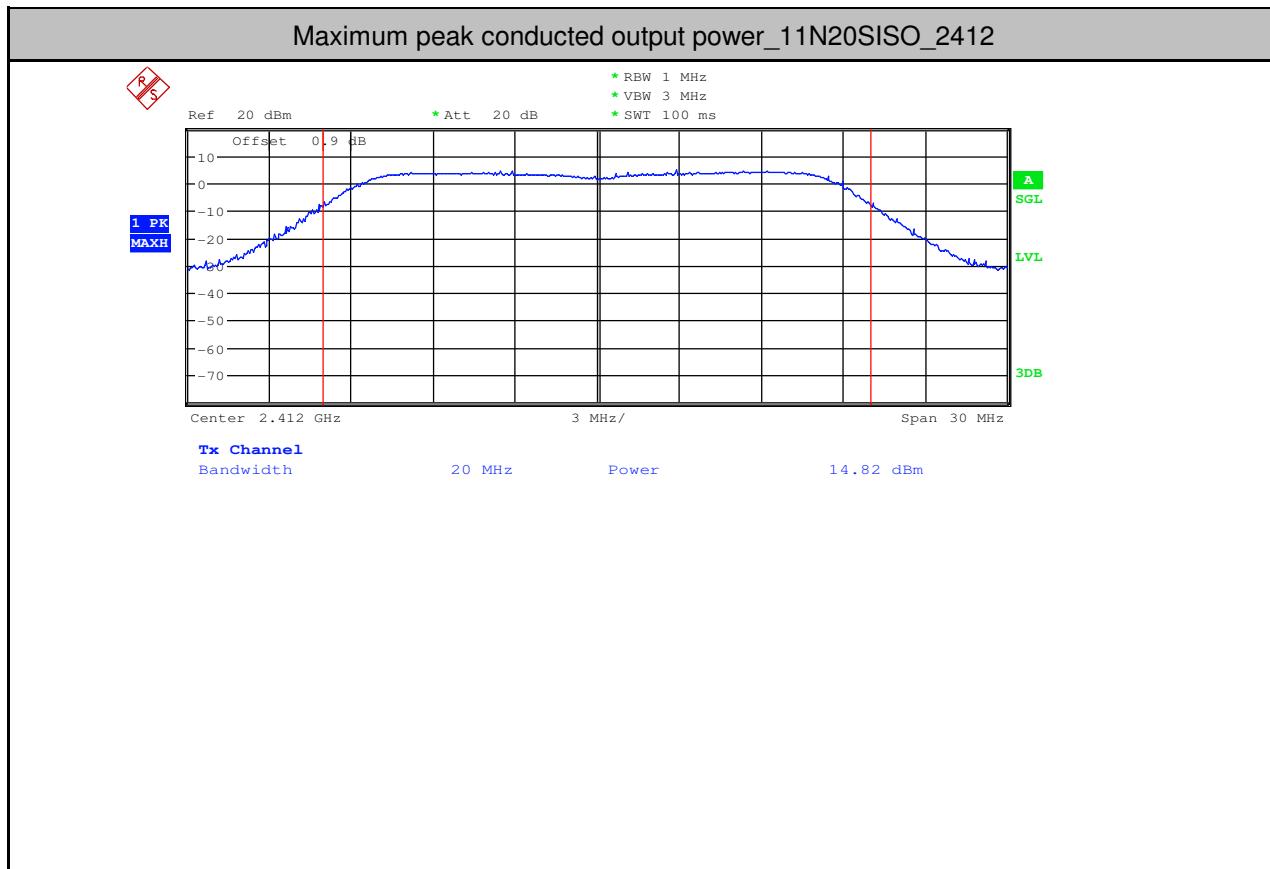


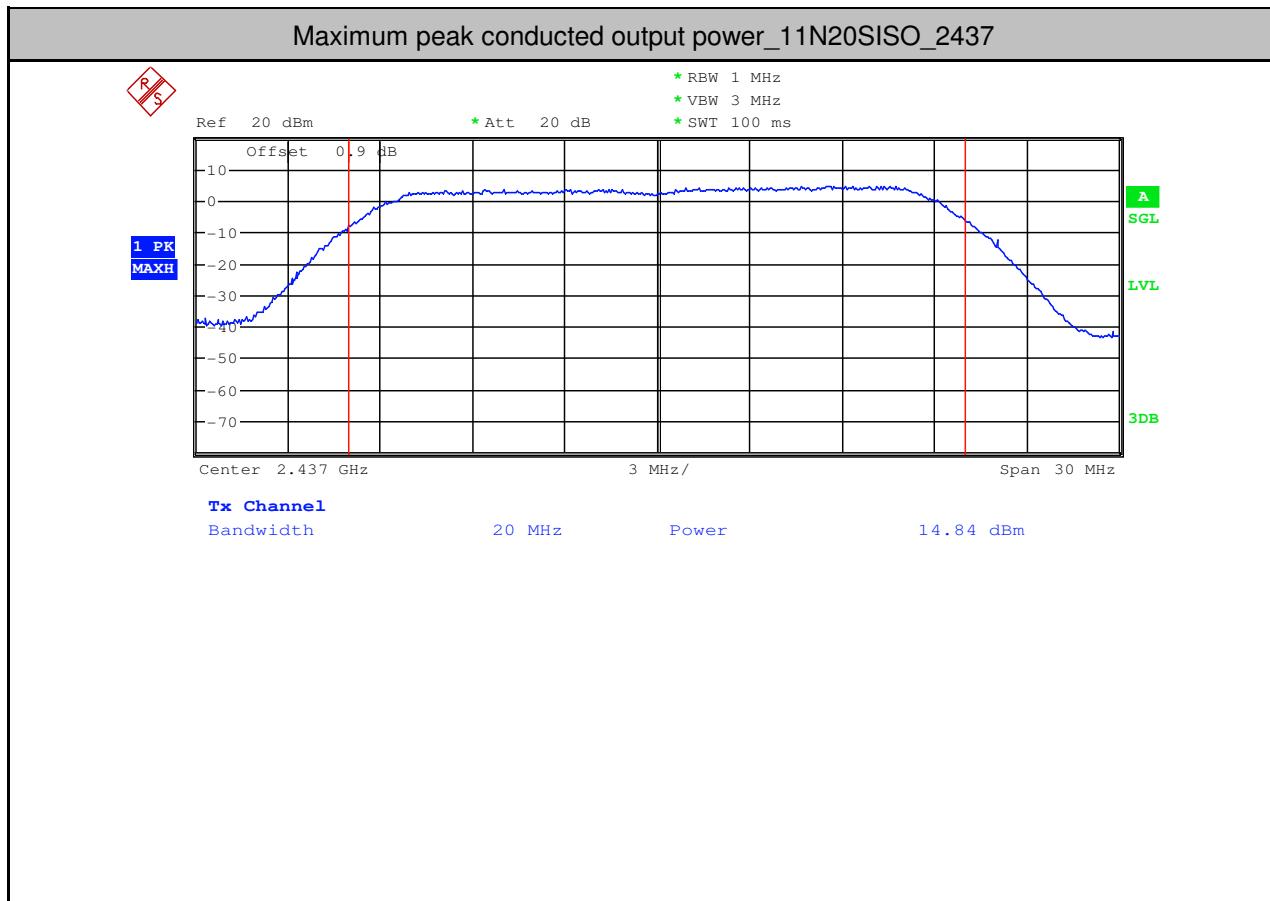

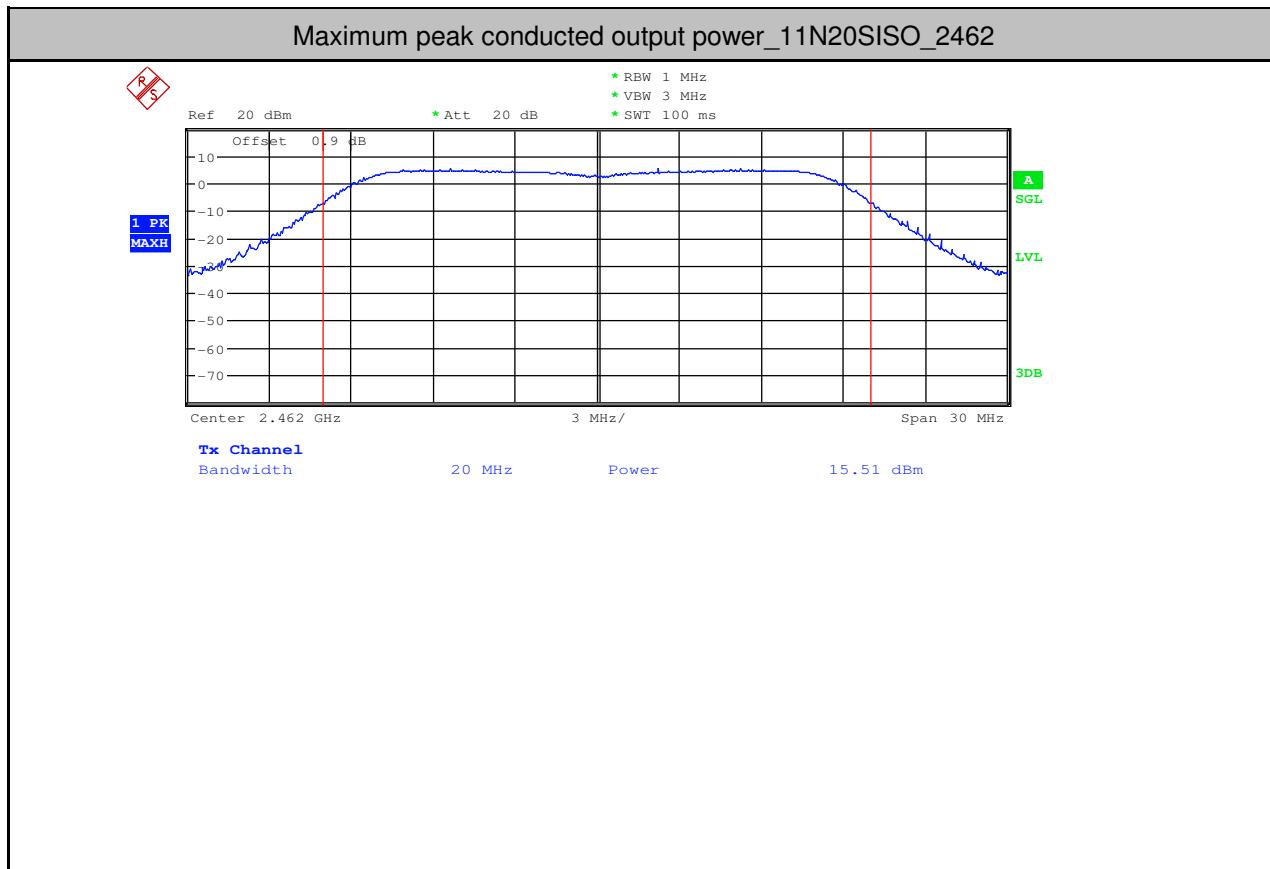

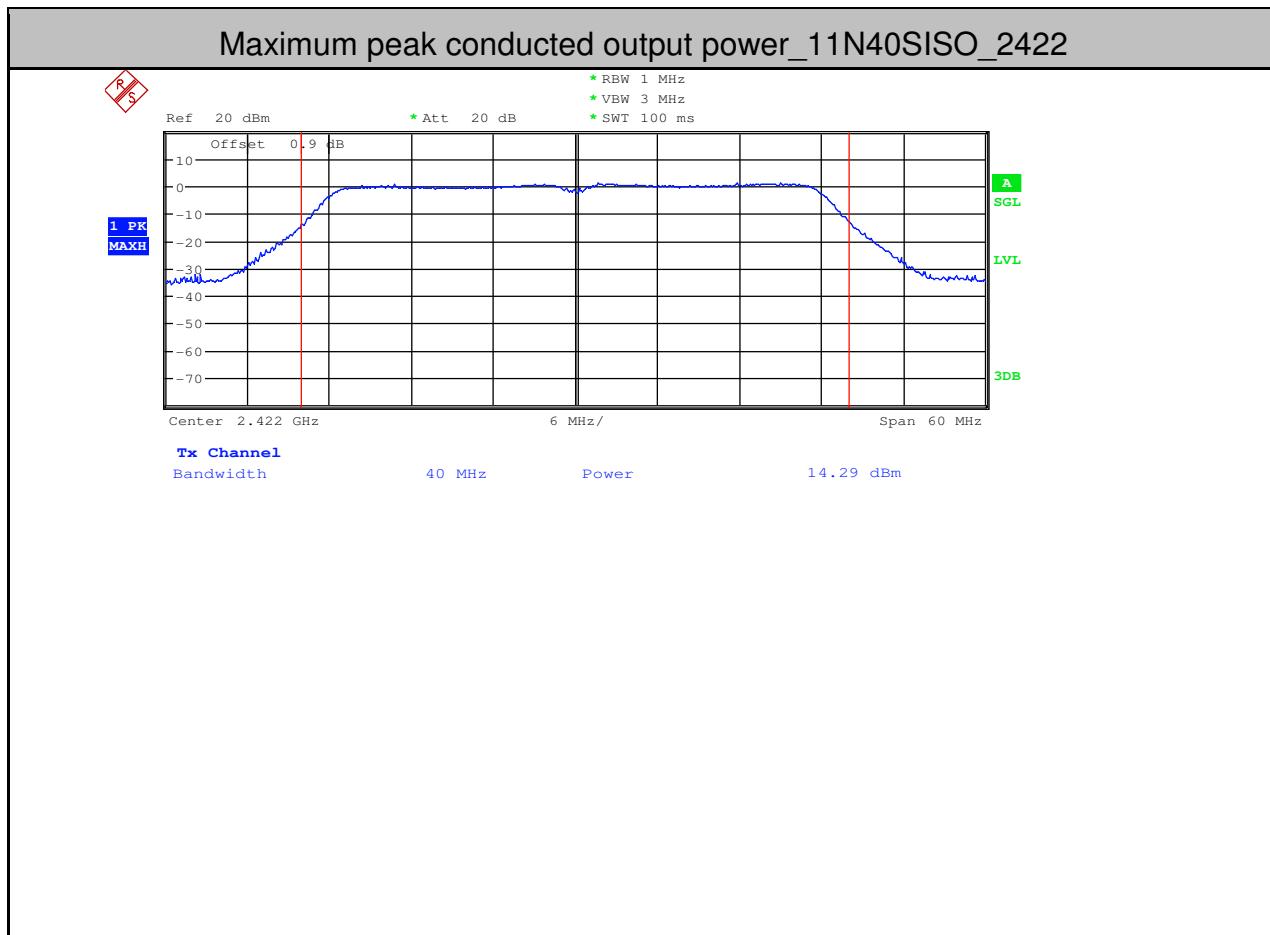

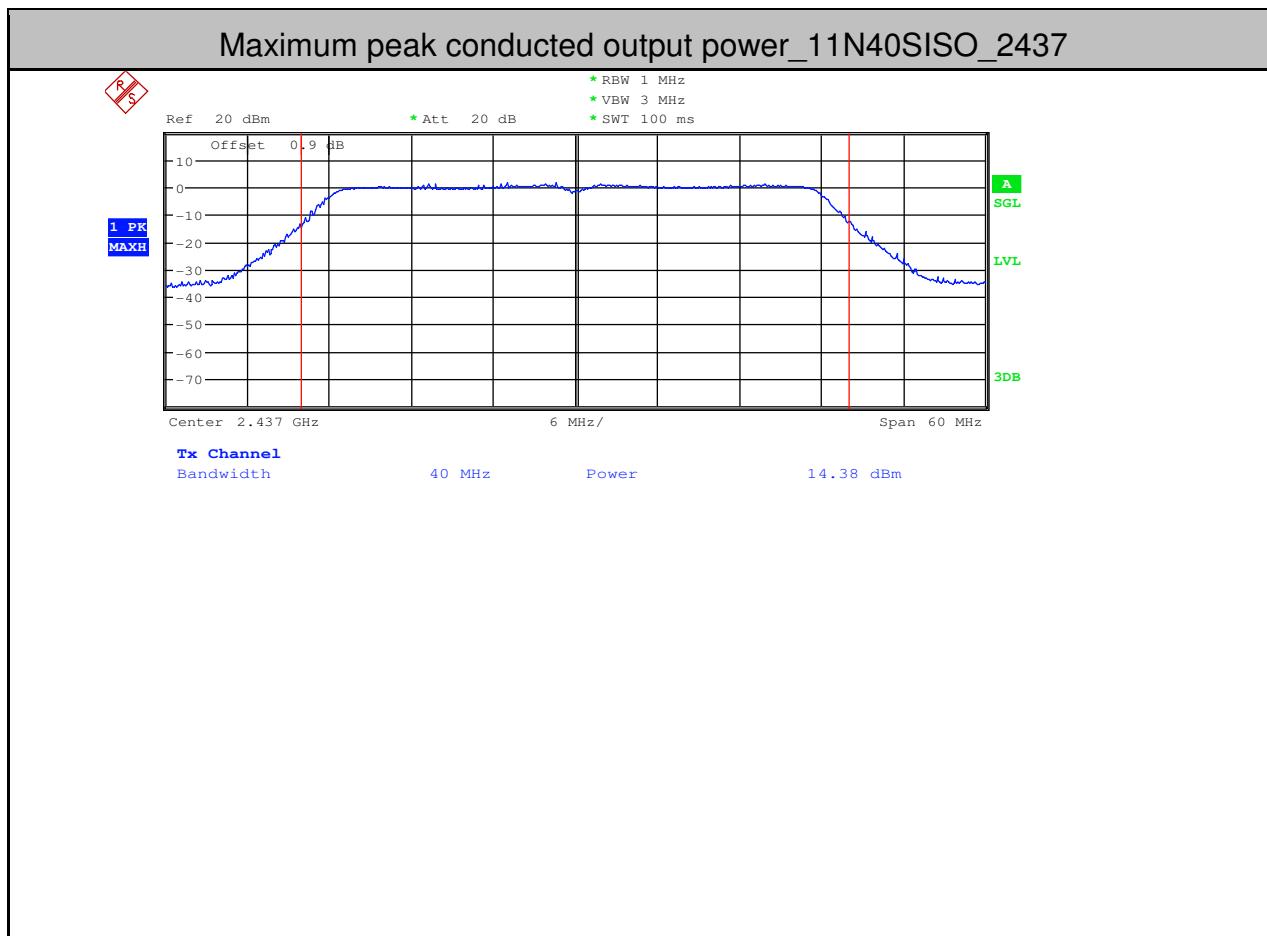

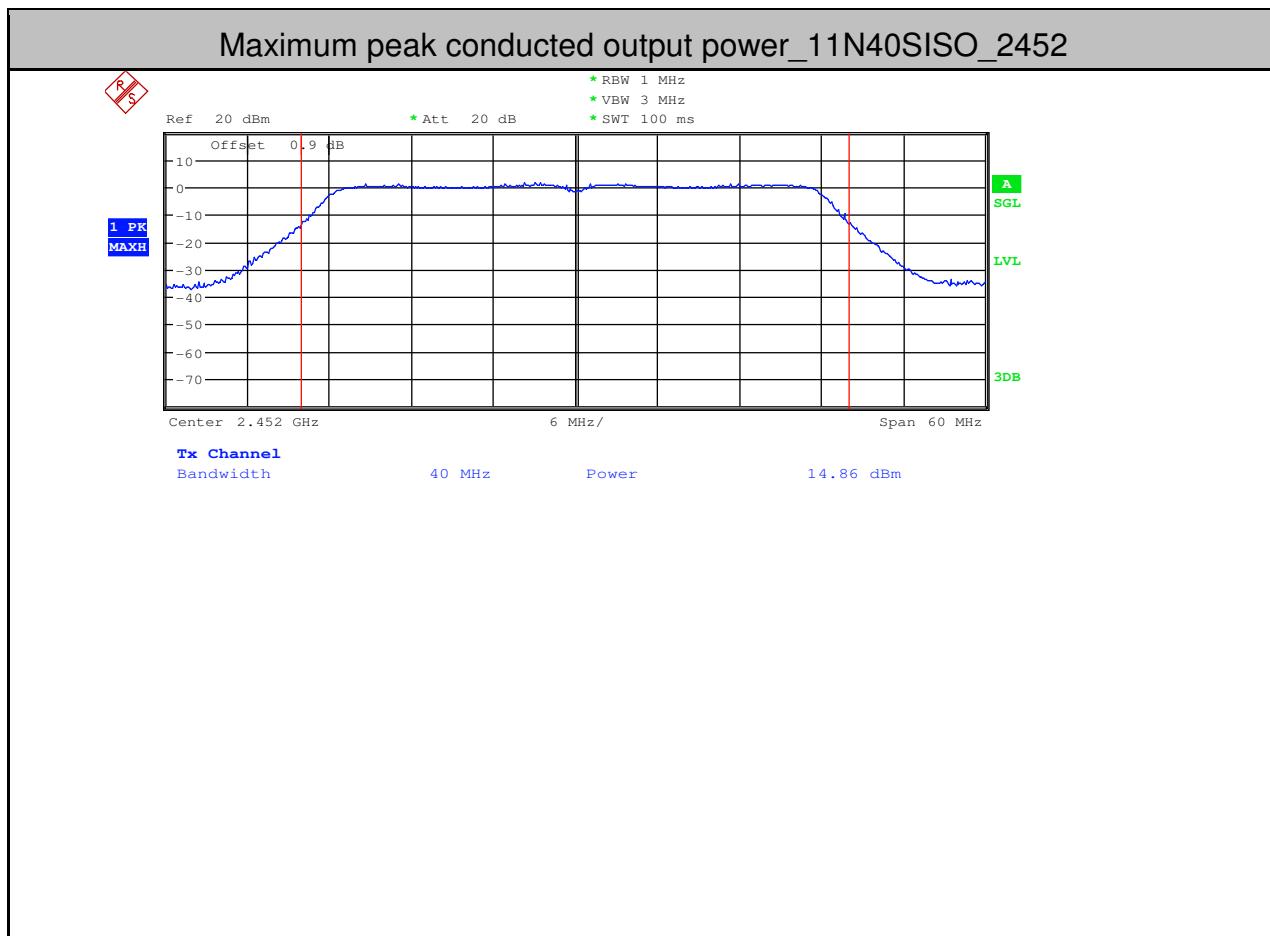

**LS9-AC11DBT****1. Maximum peak conducted output power**

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
11B	2412	16.54	<30	PASS
11B	2437	16.18	<30	PASS
11B	2462	15.35	<30	PASS
11G	2412	15.21	<30	PASS
11G	2437	14.67	<30	PASS
11G	2462	14.36	<30	PASS
11N20SISO	2412	14.95	<30	PASS
11N20SISO	2437	14.02	<30	PASS
11N20SISO	2462	14.28	<30	PASS
11N40SISO	2422	18.38	<30	PASS
11N40SISO	2437	18.97	<30	PASS
11N40SISO	2452	19.15	<30	PASS

