



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Arbitron Inc.

9705 Patuxent Woods Drive, Columbia, MD 21076, USA

FCC ID: IGKDA114A

Report Type: Original Report	Product Type: Gen2 Beacon
Test Engineer: <u>Vicent Kang</u> <i>Vicent Kang</i>	
Report Number: <u>RSC10011951-247</u>	
Report Date: <u>2010-03-30</u>	
Reviewed By: <u>EMC Engineer</u> <i>Merry Zhao</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i), §1.1307 (b)(1) & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
STANDARD APPLICABLE	9
TEST DATA	9
FCC§15.203 – ANTENNA REQUIREMENT	10
STANDARD APPLICABLE	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207(a) - CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a)(1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST PROCEDURE	20
TEST DATA	20

FCC §15.247(a)(1) – 20 dB BANDWIDTH TESTING	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.247(a)(1)(iii)-QUANTITY OF HOPPING CHANNEL TEST	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(a)(1)(iii) -TIME OF OCCUPANCY (DWELL TIME).....	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT	34
APPLICABLE STANDARD	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(d) - BAND EDGES TESTING	37
APPLICABLE STANDARD	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST PROCEDURE	37
TEST DATA	38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Arbitron Inc.*'s product, model number: *DA114* (FCC ID: *IGKDA114A*) or the "EUT" as referred to in this report is a *Gen2 Beacon (Bluetooth device)*, which measures approximately: 6.7 cm L x 3.8 cm W x 2.3 cm H, rated input voltage: AC 100-240V 50/60 Hz .

** All measurement and test data in this report was gathered from production sample serial number: Serial number: 1001005 (Assigned by Shenzhen BACL). The EUT was received on 2010-01-19.*

Objective

This Type approval report is prepared on behalf of *Arbitron Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications

No modification was made to the unit tested.

EUT Exercise Software


Bluetest 2.0.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number	FCC ID
Arbitron Inc	Gen2 Meter	DA113	N/A	DOC

Configuration of Test Setup

For conducted emissions:

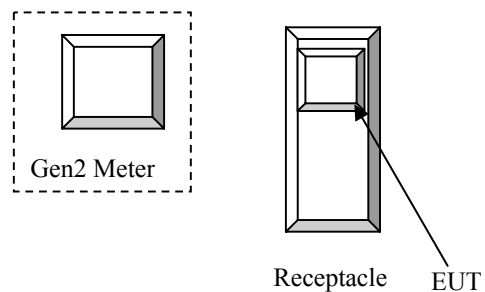


For radiated emissions:

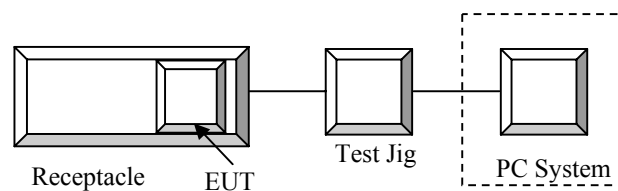


Block Diagram of Test Setup

For conducted emissions:

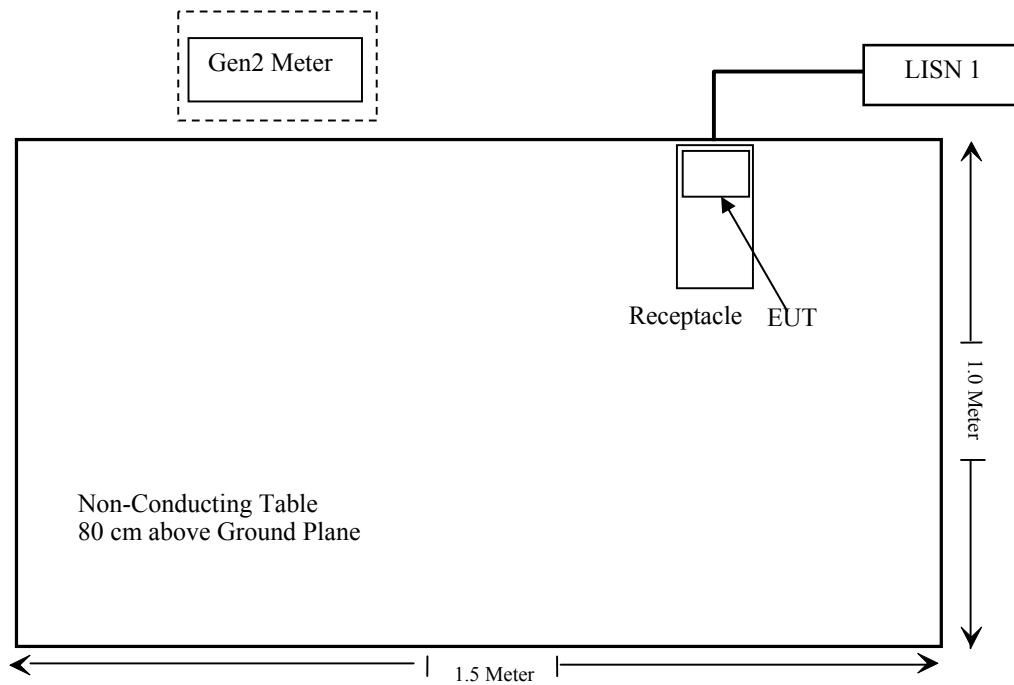

For radiated emissions:

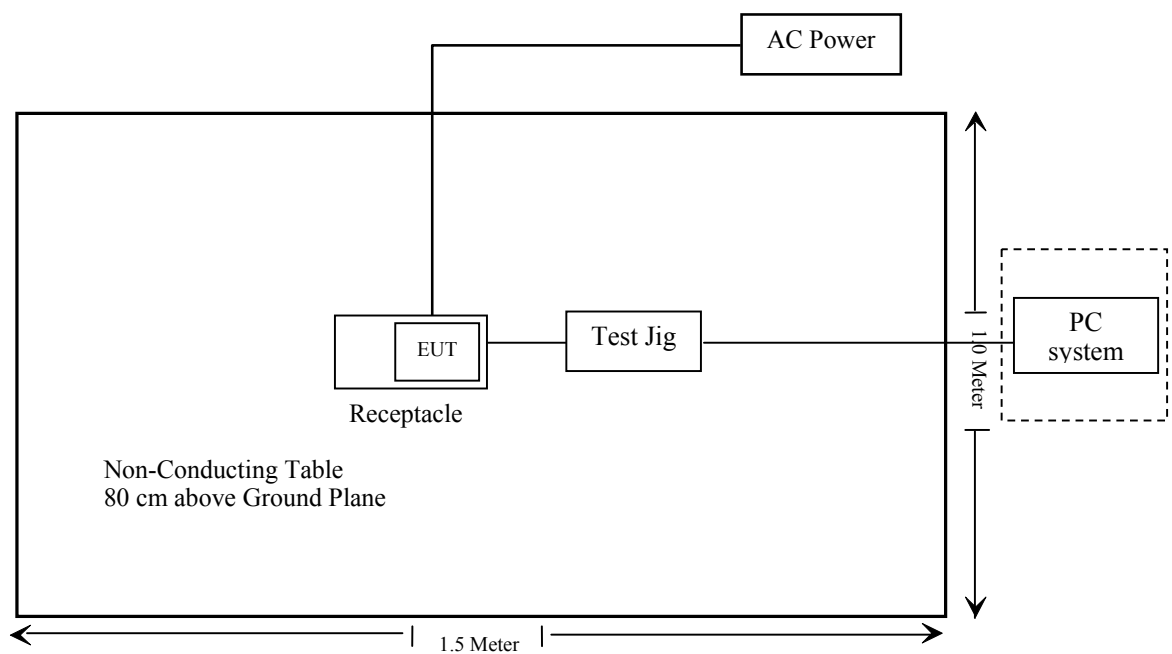

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

FCC §15.247 (i), §1.1307 (b)(1) & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 2.57 (dBm)

Maximum peak output power at antenna input terminal: 1.807 (mW)

Predication distance: >20 (cm)

Predication frequency: 2480 (MHz)

Antenna Gain (typical): 2 (dBi)

Antenna Gain (typical): 1.5849 numeric

The worst case is power density at predication frequency at 20 cm: 0.00057(mW/cm²)

MPE limit for general population exposure at predication frequency: 1 (mW/cm²)

$$0.00057(\text{mW}/\text{cm}^2) < 1 (\text{mW}/\text{cm}^2)$$

Result: Pass

FCC§15.203 – ANTENNA REQUIREMENT

Standard Applicable

According to FCC§15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an unique spring contact leg antenna; the gain is 2.0 dBi, Which in accordance to section 15.203.

Result: Compliant.

FCC §15.207(a) - CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

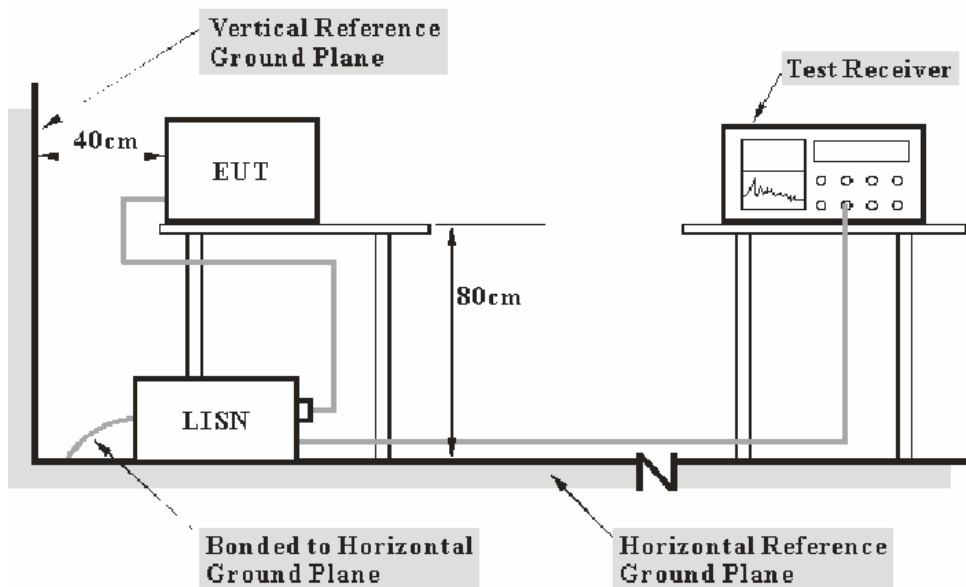

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2009-04-28	2010-04-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-04-28	2010-04-27

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

33.26 dB at 0.170 MHz in the Line conductor mode
30.44 dB at 0.170 MHz in the Neutral conductor mode


Test Data

Environmental Conditions


Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Vicent Kang on 2010-03-23.

Test Mode: Transmitting

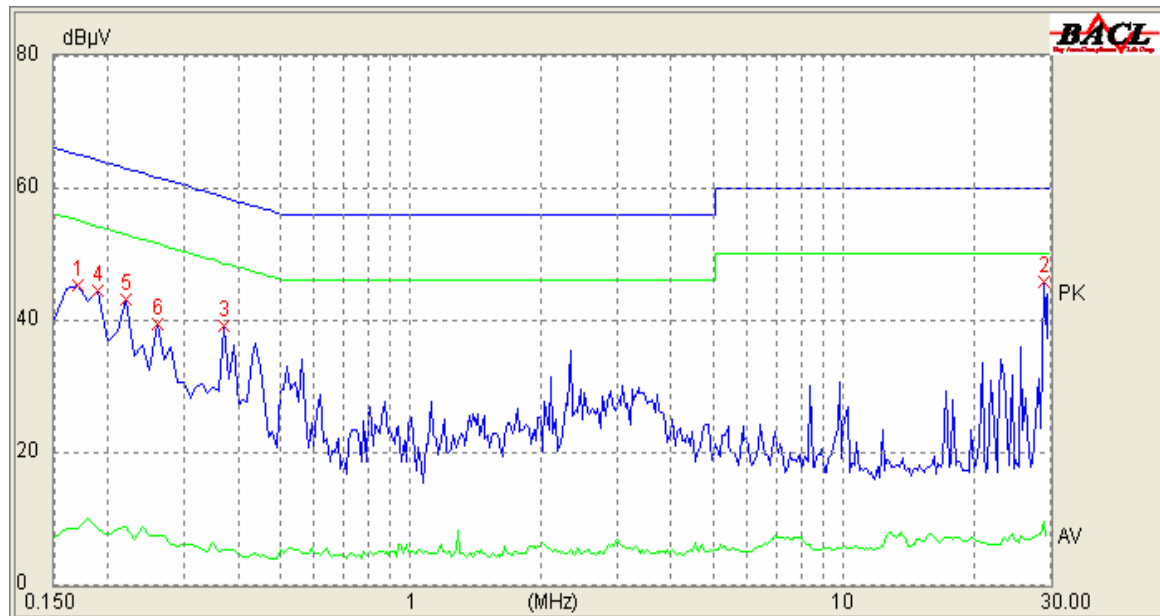120V/60 Hz, Line:

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.170	10.10	31.75	65.01	33.26	QP
0.190	10.10	29.79	64.13	34.34	QP
0.260	10.10	25.68	61.49	35.81	QP
0.220	10.10	26.25	62.92	36.67	QP
0.370	10.10	21.19	58.52	37.33	QP
29.180	10.30	9.43	50.00	40.57	AV
0.370	10.10	5.07	48.52	43.45	AV
0.260	10.10	7.32	51.49	44.17	AV
0.220	10.10	8.60	52.92	44.32	AV
0.190	10.10	8.51	54.13	45.62	AV
0.170	10.10	8.28	55.01	46.73	AV
29.180	10.30	13.14	60.00	46.86	QP

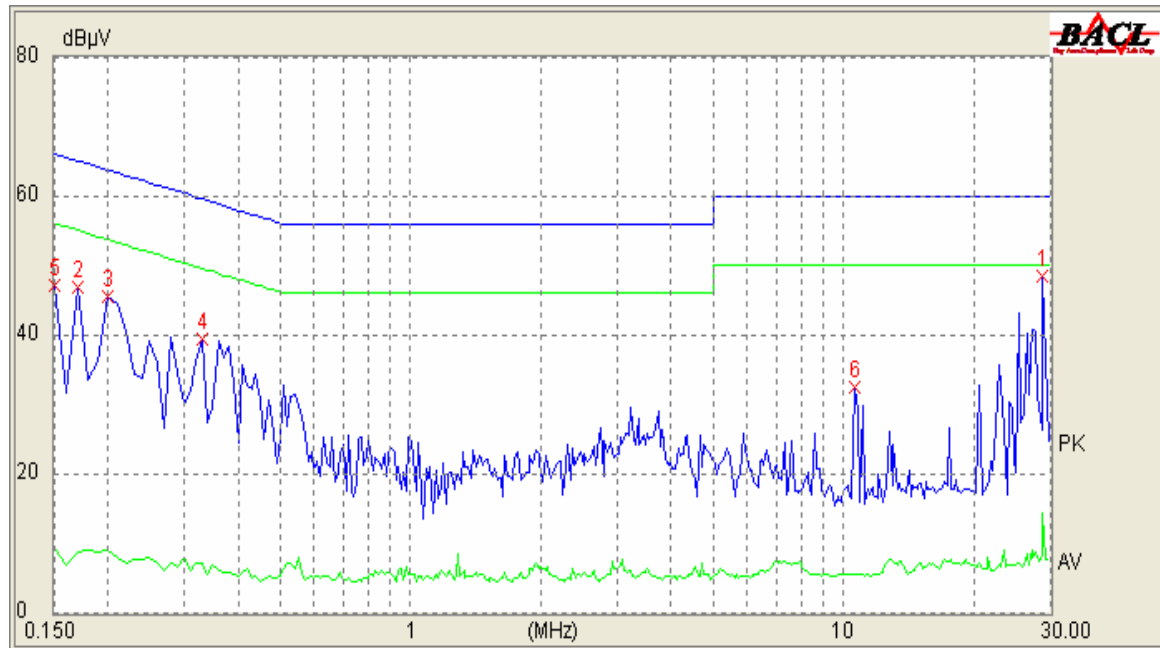120 V/60 Hz, Neutral:

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.170	10.10	34.57	65.01	30.44	QP
0.200	10.10	31.63	63.69	32.06	QP
28.910	10.30	14.34	50.00	35.66	AV
0.150	10.10	29.43	66.00	36.57	QP
0.330	10.10	22.90	59.51	36.61	QP
0.330	10.10	7.11	49.51	42.40	AV
10.590	10.30	5.55	50.00	44.45	AV
0.200	10.10	8.88	53.69	44.81	AV
0.170	10.10	8.69	55.01	46.32	AV
0.150	10.10	9.16	56.00	46.84	AV
28.910	10.30	12.31	60.00	47.69	QP
10.590	10.30	9.83	60.00	50.17	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209 & §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

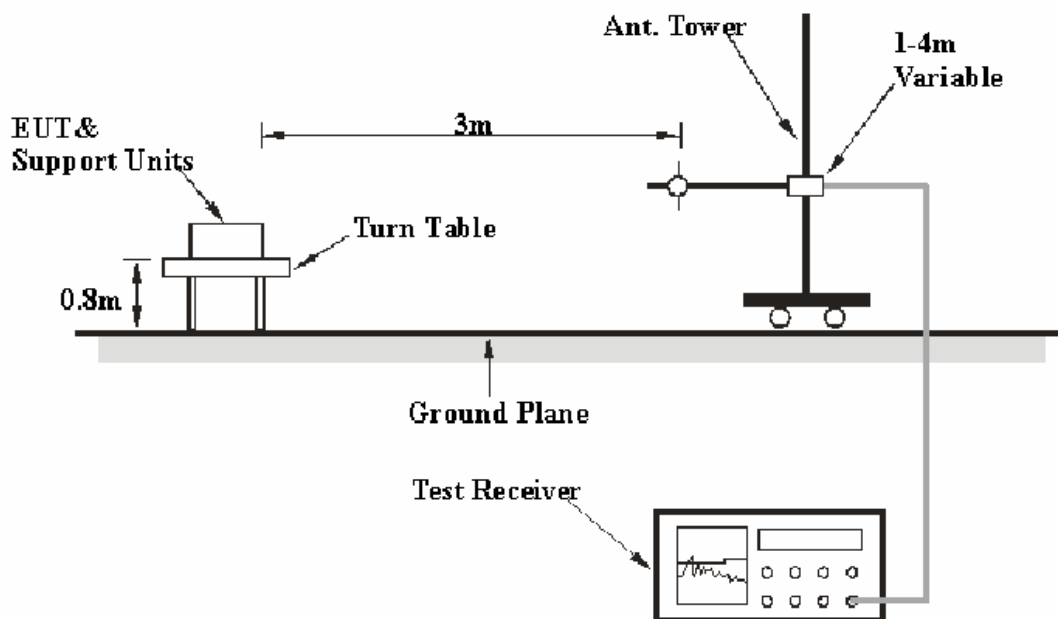

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	AV

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
HP	Amplifier	8449B	3008A00277	2009-09-12	2010-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-05-05	2010-05-04
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-07-08	2010-07-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

Below 1 GHz:

9.1 dB at **145.350250/ 148.003000 MHz** in the **Horizontal** polarization

Above 1 GHz:

8.73 dB at **4804.00 MHz** in the **Vertical** polarization (Low Channel)

6.91 dB at **4882.00 MHz** in the **Horizontal** polarization (Middle Channel)

3.79 dB at **4960.00 MHz** in the **Vertical** polarization (High Channel)

Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

** The testing was performed by Vicent Kang on 2010-03-23.*

Test Mode: Transmitting

Below 1 GHz (Worst case)

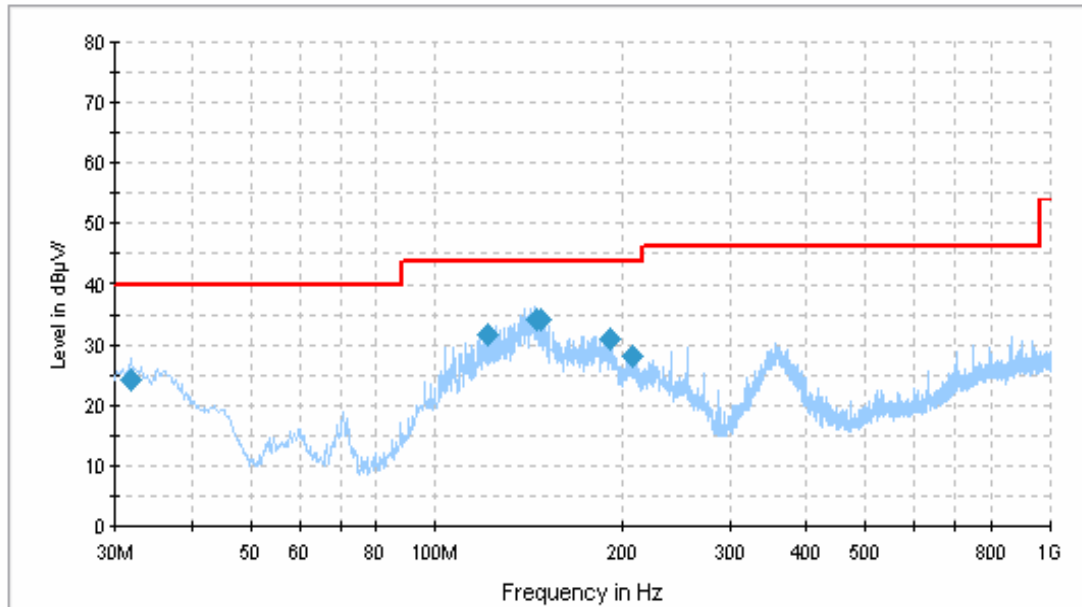

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
145.350250	34.4	205.0	H	159.0	-14.9	43.5	9.1
148.003000	34.4	205.0	H	126.0	-15.2	43.5	9.1
121.337000	31.7	295.0	H	129.0	-13.7	43.5	11.8
192.004250	31.1	173.0	H	44.0	-15.5	43.5	12.4
207.969750	28.4	173.0	H	27.0	-15.2	43.5	15.1
31.986750	24.3	101.0	V	8.0	-7.5	40.0	15.7

Above 1 GHz

Freq. (MHz)	S.A. Reading (dBμV/m)	Detector (PK/QP/AV)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBμV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	Remarks
Low Channel (2402 MHz)												
4804.00	35.67	AV	180	1.0	V	35.4	7.60	33.4	45.27	54	8.73	harmonic
4804.00	33.17	AV	240	1.5	H	36.6	7.60	33.4	43.97	54	10.03	harmonic
4804.00	52.62	PK	180	1.0	V	35.4	7.60	33.4	62.22	74	11.78	harmonic
4804.00	50.30	PK	240	1.5	H	36.6	7.60	33.4	61.10	74	12.90	harmonic
2330.19	31.42	AV	320	1.5	V	30.9	7.91	34.0	36.23	54	17.77	spurious
2311.92	31.25	AV	146	1.3	H	30.9	7.91	34.0	36.06	54	17.94	spurious
3580.16	30.31	AV	59	1.3	V	32.2	5.77	33.7	34.58	54	19.42	spurious
2330.19	47.83	PK	320	1.5	V	30.9	7.91	34.0	52.64	74	21.36	spurious
2311.92	47.65	PK	146	1.3	H	30.9	7.91	34.0	52.46	74	21.54	spurious
1601.68	32.56	AV	156	1.5	H	27.5	5.62	34.4	31.28	54	22.72	spurious
3580.16	46.77	PK	59	1.3	V	32.2	5.77	33.7	51.04	74	22.96	spurious
1601.68	49.32	PK	156	1.5	H	27.5	5.62	34.4	48.04	74	25.96	spurious
Middle Channel (2441 MHz)												
4882.00	36.28	AV	250	1.6	H	36.6	7.61	33.4	47.09	54	6.91	harmonic
4882.00	37.09	AV	178	1.7	V	35.4	7.61	33.4	46.7	54	7.30	harmonic
4882.00	53.59	PK	250	1.6	H	36.6	7.61	33.4	64.4	74	9.60	harmonic
4882.00	53.70	PK	178	1.7	V	35.4	7.61	33.4	63.31	74	10.69	harmonic
1629.53	32.23	AV	175	1.3	H	27.5	5.62	34.4	30.95	54	23.05	spurious
1627.85	31.28	AV	154	1.5	V	27.8	5.62	34.4	30.3	54	23.70	spurious
1629.53	48.93	PK	175	1.3	H	27.5	5.62	34.4	47.65	74	26.35	spurious
1627.85	47.98	PK	155	1.5	V	27.8	5.62	34.4	47.0	74	27.00	spurious
High Channel (2480 MHz)												
4960.00	40.58	AV	355	1.6	V	35.4	7.63	33.4	50.21	54	3.79*	harmonic
4960.00	57.84	PK	355	1.6	V	35.4	7.63	33.4	67.47	74	6.53	harmonic
4960.00	33.85	AV	35	1.6	H	36.6	7.63	33.4	44.68	54	9.32	harmonic
4960.00	50.69	PK	35	1.6	H	36.6	7.63	33.4	61.52	74	12.48	harmonic
2483.79	34.99	AV	89	1.3	H	30.9	7.93	34.0	39.82	54	14.18	spurious
2484.51	34.93	AV	210	1.5	V	30.9	7.93	34.0	39.76	54	14.24	spurious
2484.51	52.03	PK	210	1.5	V	30.9	7.93	34.0	56.86	74	17.14	spurious
2483.79	51.69	PK	89	1.3	H	30.9	7.93	34.0	56.52	74	17.48	spurious
1654.61	31.26	AV	150	1.1	H	27.5	5.62	34.4	29.98	54	24.02	spurious
1654.61	30.87	AV	280	1.2	V	27.8	5.62	34.4	29.89	54	24.11	spurious
1654.61	47.96	PK	150	1.1	H	27.5	5.62	34.4	46.68	74	27.32	spurious
1654.61	47.57	PK	280	1.2	V	27.8	5.62	34.4	46.59	74	27.41	spurious

*With measurement uncertainty!

FCC §15.247(a)(1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another true
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Vicent Kang on 2010-03-18.


Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.000	0.5333	Pass
Adjacent Channel	2403			
Mid Channel	2441	1.000	0.53067	Pass
Adjacent Channel	2442			
High Channel	2480	1.000	0.5867	Pass
Adjacent Channel	2479			

Please refer to the following plots.

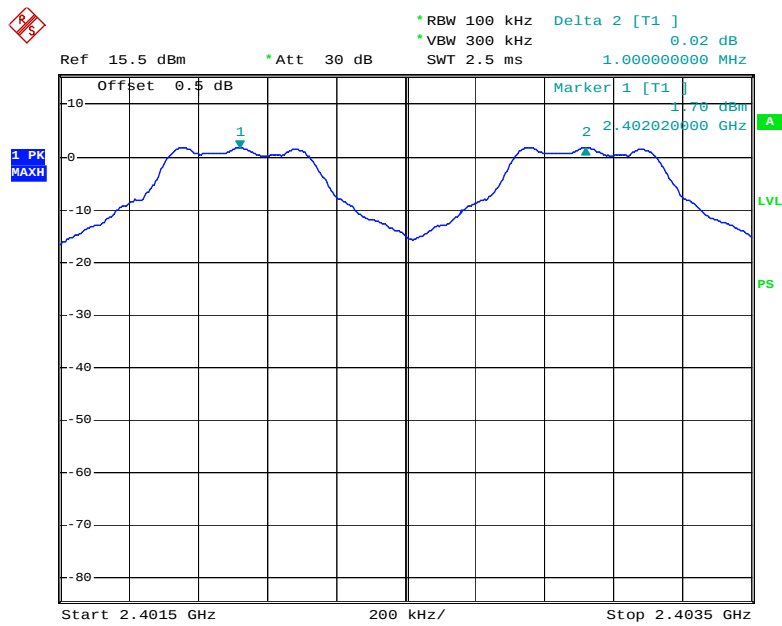Low Channel


Date: 18.MAR.2010 13:13:59

Middle Channel

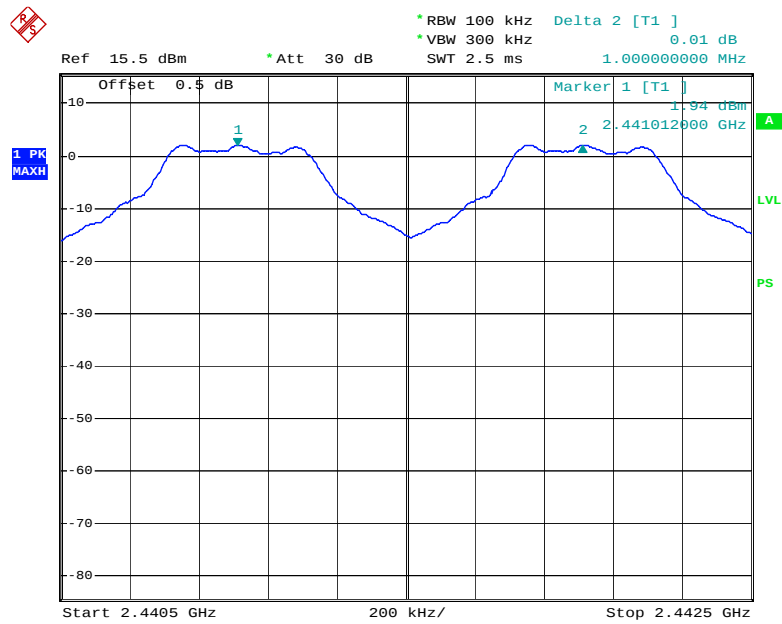

Date: 18.MAR.2010 13:14:59

High Channel

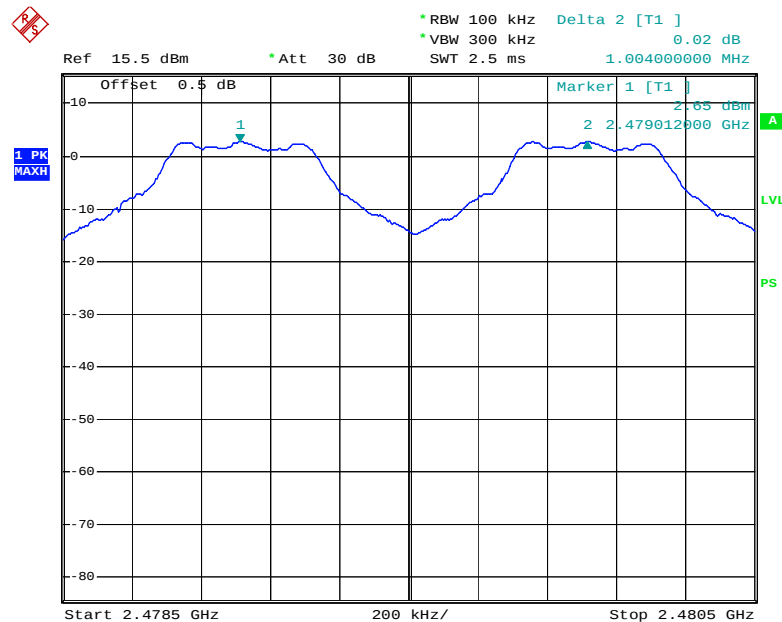

Date: 18.MAR.2010 13:15:38

FCC §15.247(a)(1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Vicent Kang on 2010-03-18.

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.800
Middle	2441	0.796
High	2480	0.808


Please refer to the following plots.

Low Channel

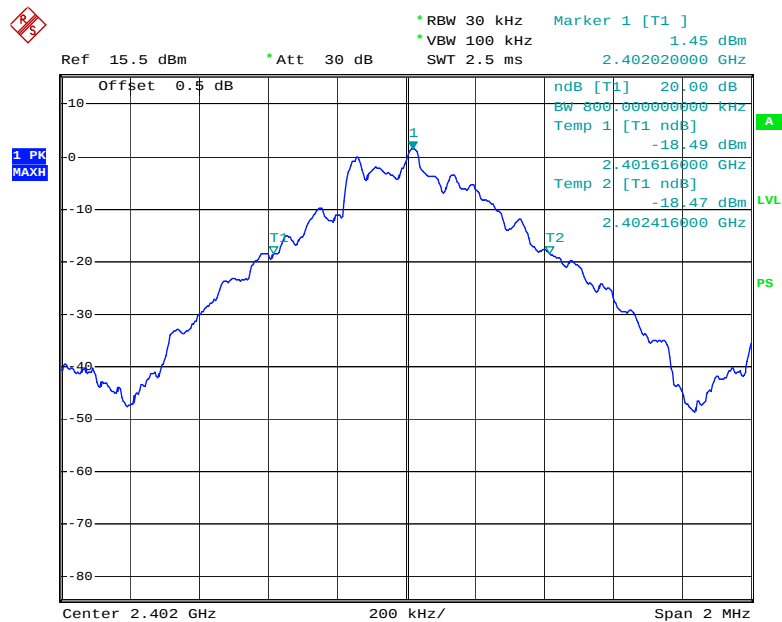


Date: 18.MAR.2010 13:18:49

Middle Channel

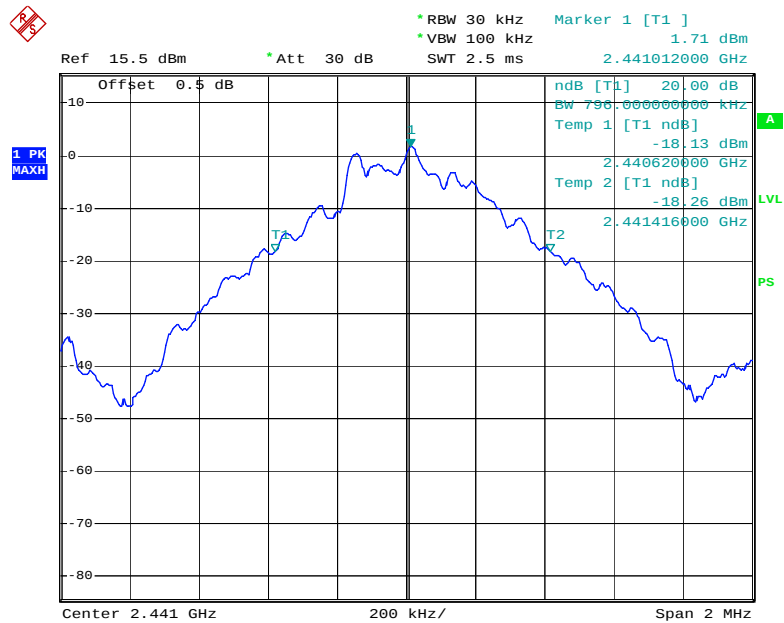

Date: 18.MAR.2010 13:18:15

High Channel

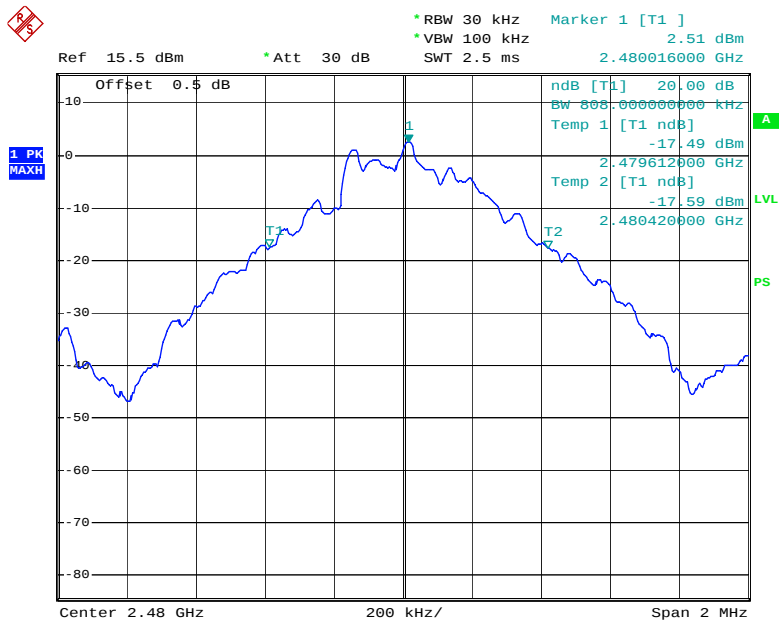

Date: 18.MAR.2010 13:17:40

FCC §15.247(a)(1)(iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Vicent Kang on 2010-03-18.


Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

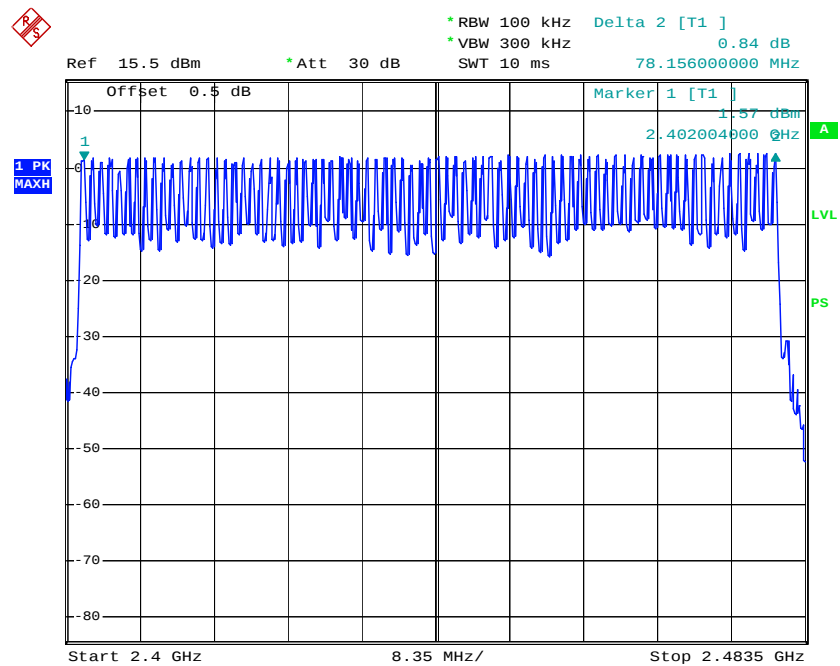

Date: 18.MAR.2010 11:32:54

FCC §15.247(a)(1)(iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Vicent Kang on 2010-03-18.

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
DH 1	Low	0.532	0.1702	0.4	Pass
	Middle	0.532	0.1702	0.4	Pass
	High	0.544	0.1741	0.4	Pass
	Note: Dwell time=Pulse width (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second				
DH 3	Low	1.416	0.2266	0.4	Pass
	Middle	1.404	0.2246	0.4	Pass
	High	1.404	0.2246	0.4	Pass
	Note: Dwell time=Pulse width (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second				
DH 5	Low	3.104	0.3311	0.4	Pass
	Middle	3.072	0.3277	0.4	Pass
	High	3.056	0.3260	0.4	Pass
	Note: Dwell time=Pulse width (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second				


Please refer to the following plots.

Low Channel for DH1

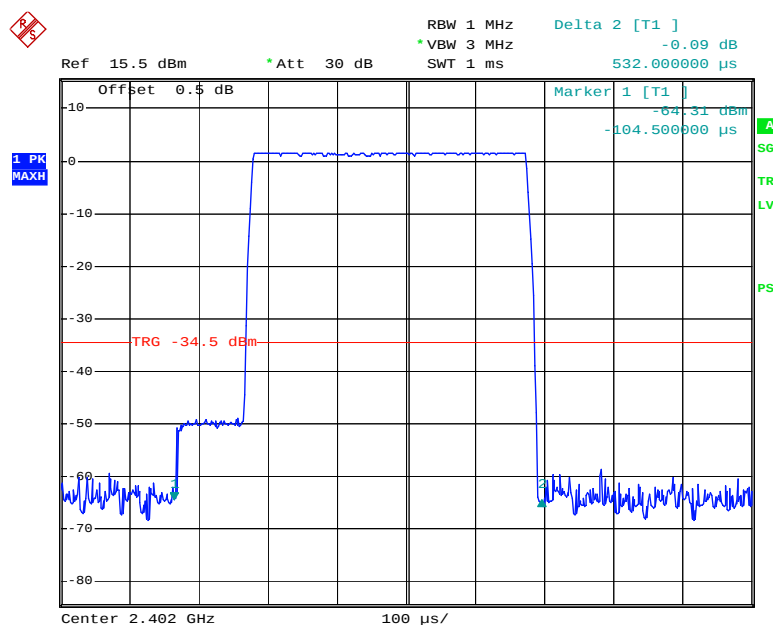


Date: 18.MAR.2010 13:28:35

Middle Channel for DH1

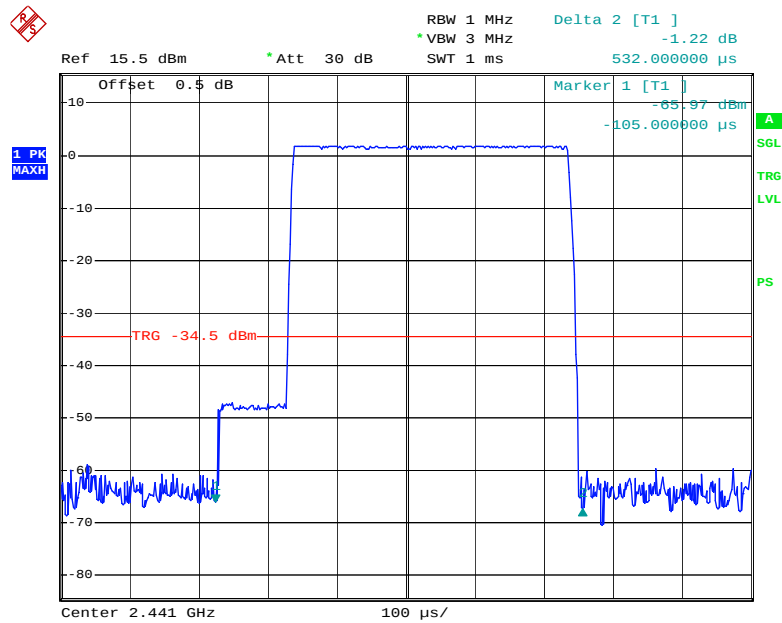


Date: 18.MAR.2010 13:32:45

High Channel for DH1

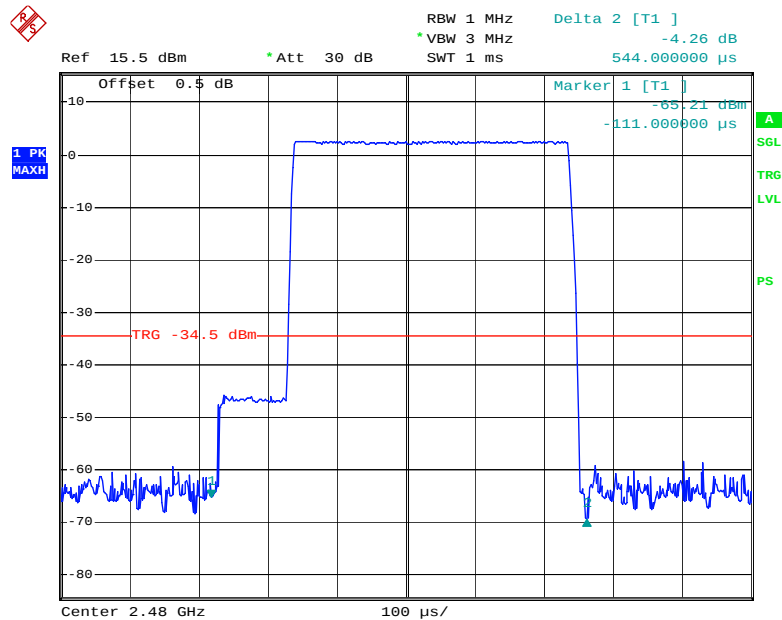


Date: 18.MAR.2010 13:33:43

Low Channel for DH3

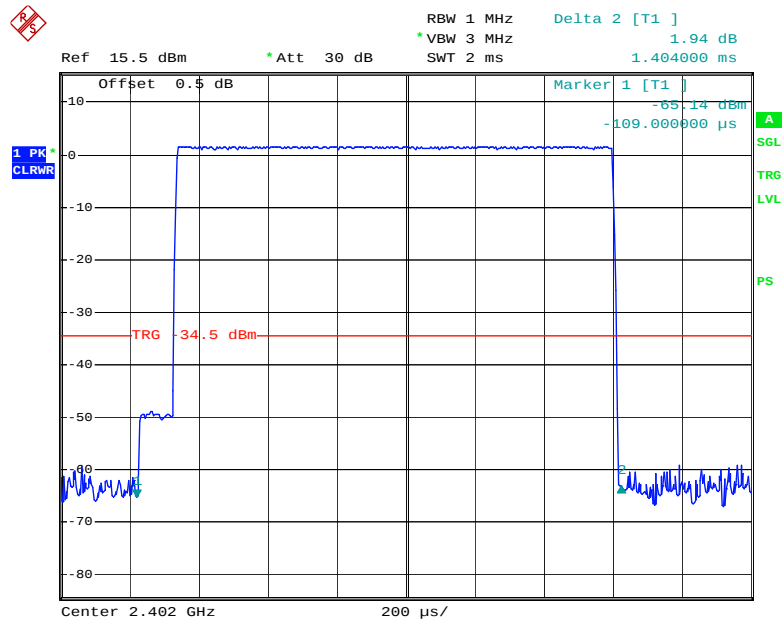


Date: 18.MAR.2010 13:40:11

Middle Channel for DH3

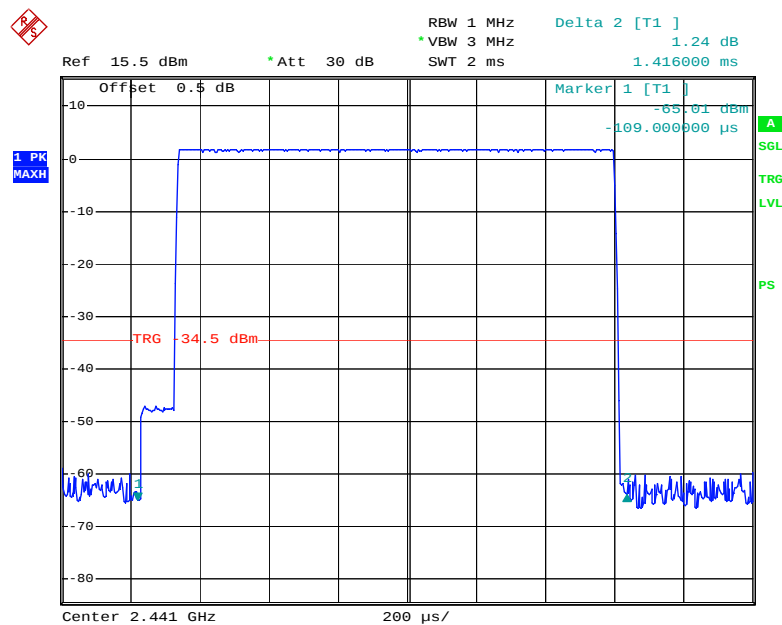


Date: 18.MAR.2010 13:37:56

High Channel for DH3

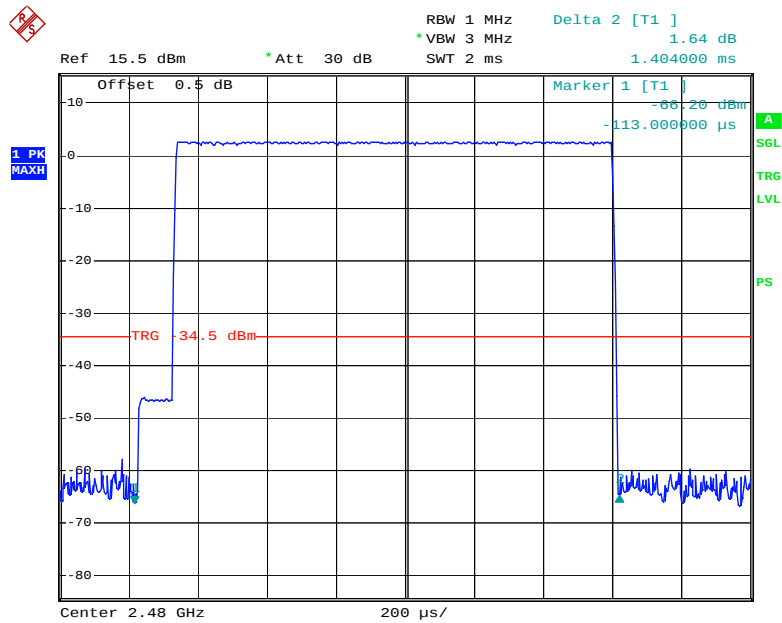


Date: 18.MAR.2010 13:36:20

Low Channel for DH5

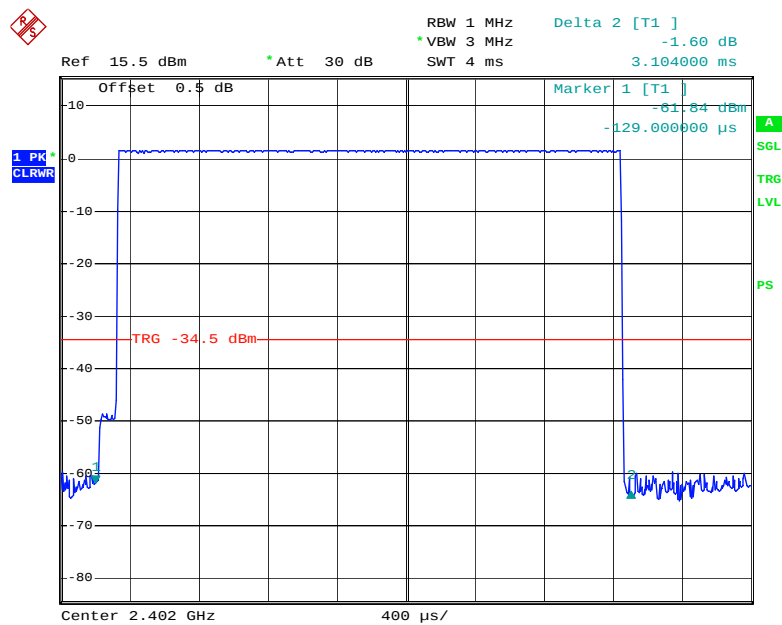


Date: 18.MAR.2010 13:49:02

Middle Channel for DH5

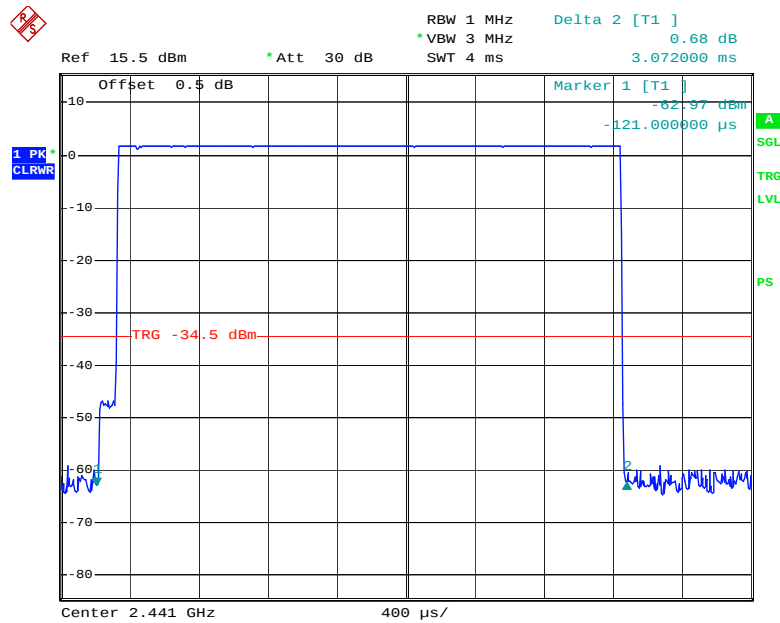

Date: 18.MAR.2010 13:50:21

High Channel for DH5

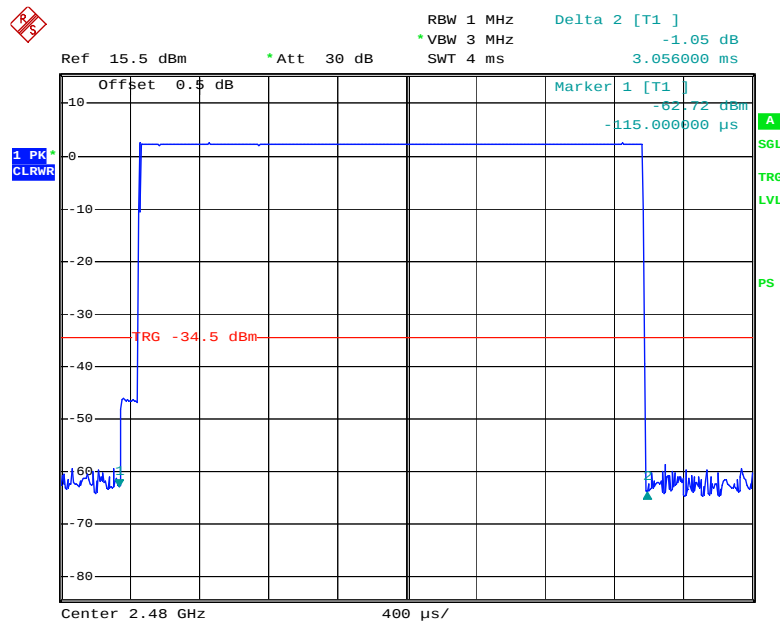

Date: 18.MAR.2010 14:01:20

FCC §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


* The testing was performed by Vicent Kang on 2010-03-18.

Test Result: Compliant.


Test Mode: Transmitting

Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
		(dBm)	(mW)	
Low	2402	1.75	1.496236	1000
Middle	2441	1.62	1.452112	1000
High	2480	2.57	1.807174	1000


Low Channel

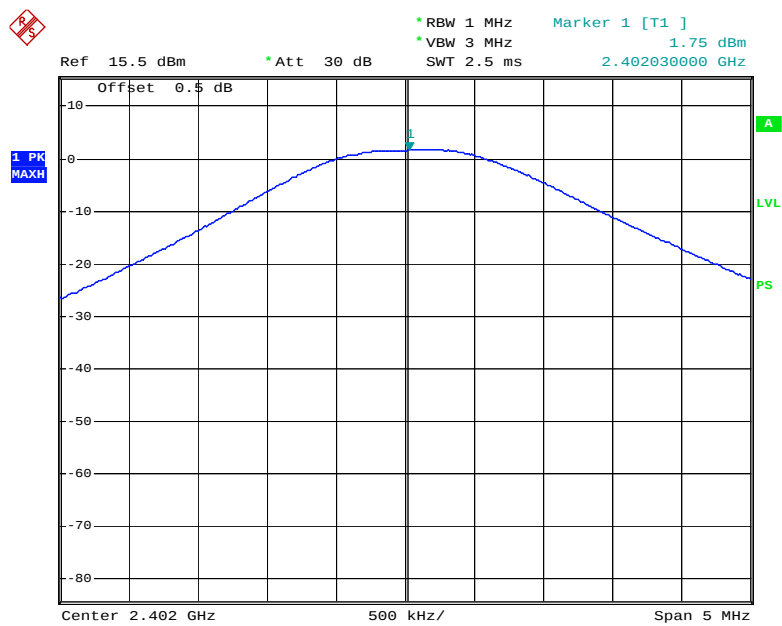

Date: 18.MAR.2010 10:22:57

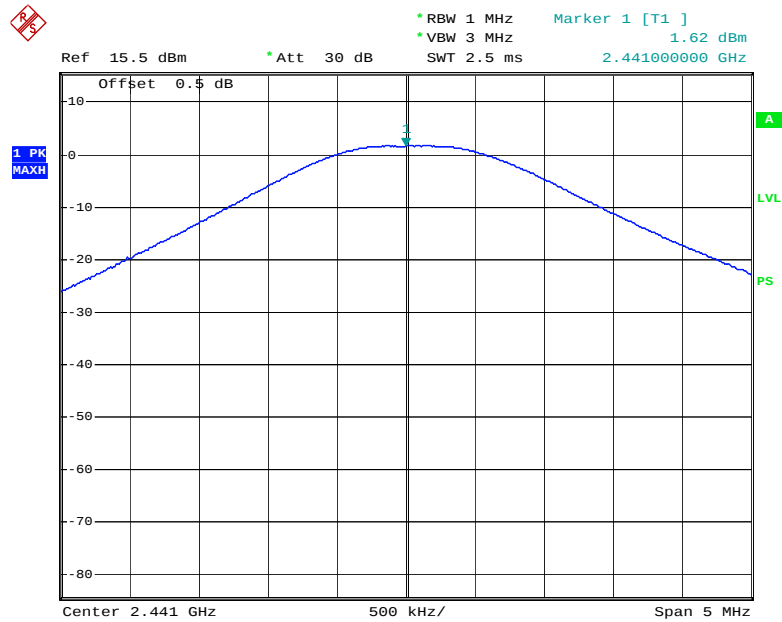Middle Channel

Date: 18.MAR.2010 10:24:12

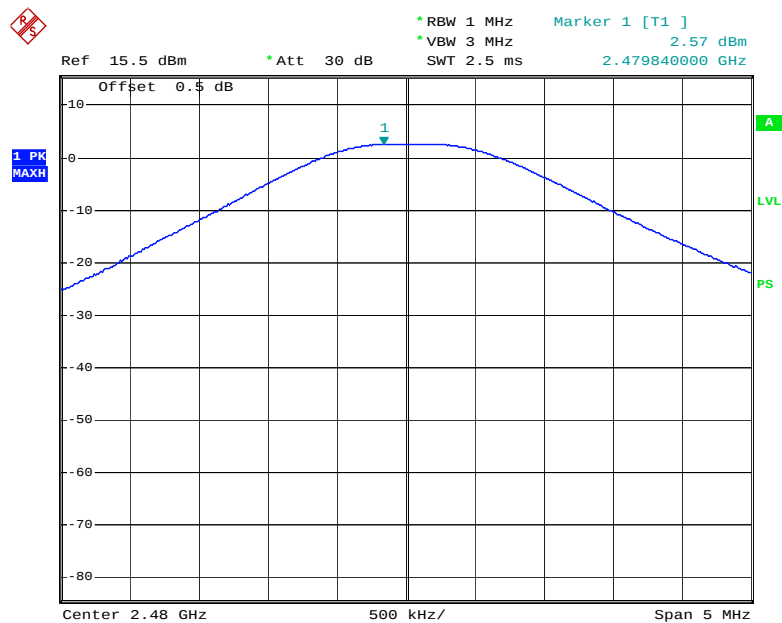High Channel

Date: 18.MAR.2010 11:29:50

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


*The testing was performed by Vicent Kang on 2010-02-03.

Test Result: Compliant


Please refer to the following table and plots.

Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.714	39.44	20
2484.020	46.49	20

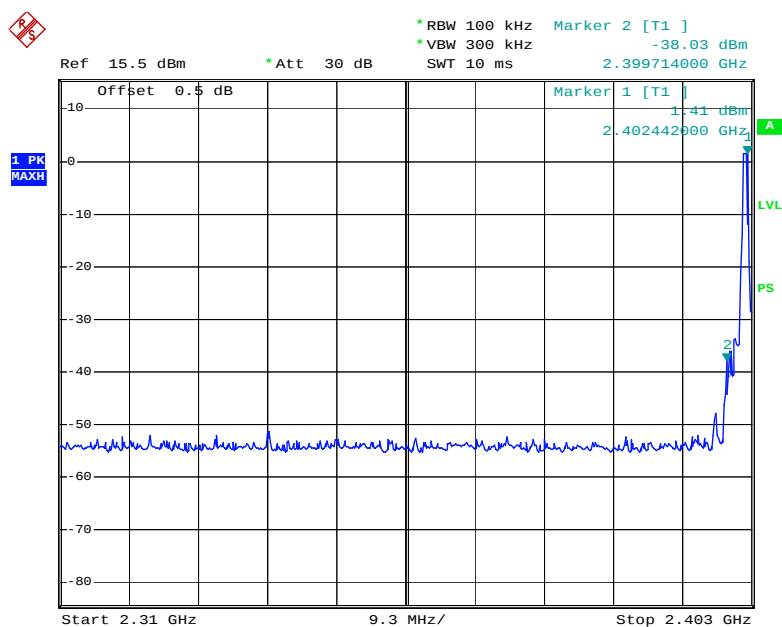Band Edge: Left Side

Date: 18.MAR.2010 15:37:39

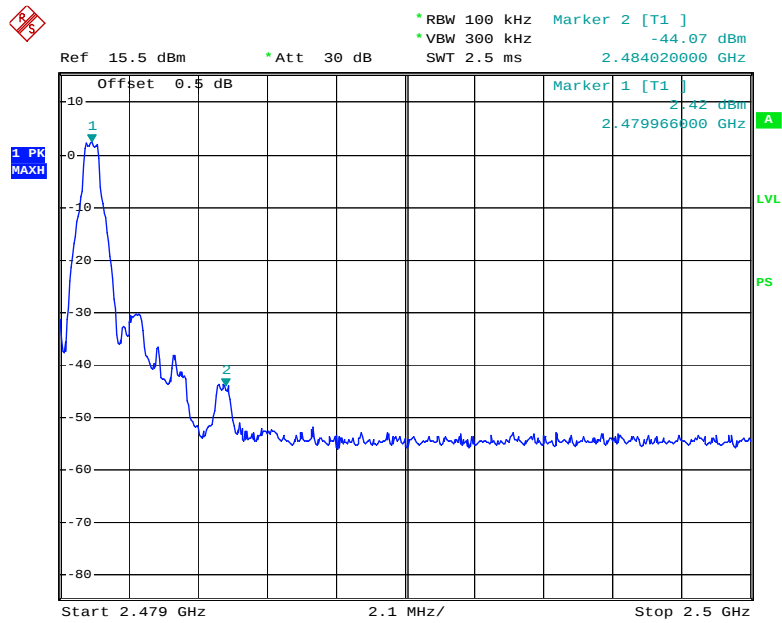Band Edge: Right Side

Date: 18.MAR.2010 15:39:06

******* END OF REPORT *******