



MOTOROLA

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT - Addendum

Test Report Number – 24607-1 BT

Report Date – 2011-08-26

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Hongpeng Yin

Title: EMC Project Manager

Test: 2011-08-24 to 2011-08-26

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2011-08-26

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885

IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ
ISO/IEC-17025:2005 accredited by UKAS



Table of Contents

Test Report Details 3
Applicable Standards 4
Summary of Testing..... 5
General and Special Conditions..... 5
Equipment and Cable Configurations 6
Measuring Equipment and Calibration Information 6
Description of Bluetooth (BT) Transmitter 7
Measurement Procedures and Data..... 8
 FIELD STRENGTH OF SPURIOUS EMISSIONS 8
 Measurement Procedure..... 8
 Measurement Results 8
 BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS..... 12
 Measurement Procedure..... 12
 Measurement Results 12

Test Report Details

Tests Performed By: Motorola (Beijing) Mobility Technologies Co., Ltd.
 Asia Global Compliance Labs
 No.1 Wang Jing East Road
 Chao Yang District
 Beijing, 100102, P. R. China
 Phone: +86 10 8499 5891
 FCC Registration Number: 177885
 IC Registration Number: 109AW-1

Tests Performed By: ADR Testing Service
 Location Code: ADR LV
 Motorola Mobility Inc
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 FCC Registration Number: 316588
 Industry Canada Number: 109O-1

Tests Requested By: Motorola Mobility, Inc.
 600 North US Hwy 45
 Libertyville, IL 60048
 United States

Product Type: Cell phone with embedded Bluetooth

Signaling Capability: WCDMA 850/2100/1900/900, CDMA 850/1900, GSM 850/900/1800/1900, LTE Band 13, HSDPA, CDMA EV-DO Release A/LTE, EDGE, Bluetooth, 802.11b/g/n

Serial Numbers: MEID 99000052572798
 MEID 99000052563675

FCC ID: IHDP56ME1

Project number: 24607-1

Testing Complete Date: 2011-08-26

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart C – Intentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 27 - Wireless Communications Service
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: ANSI C63.4-2003, RSS-GEN, RSS-210 (Bluetooth).

DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" published by the Federal Communications Commission was also used in the testing of this product.

The following tests were performed according to the regulations:

- The **spurious radiated emission** requirements of § **15.247(d) of CFR47 Part 15 2006**, specifically" radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Under this project only 30 to 1000 Hz, 1 to 26.5 GHz radiated emissions and radiated band-edge measurements were performed.
- For frequencies below 1 GHz a 100 kHz RBW (6 dB) is used and above 1 GHz a 1 MHz RBW (6 dB) is used.

Summary of Testing

| Test | Test Name | Pass/Fail |
|------|---|-----------|
| 1 | Field Strength of Spurious Emissions | Pass |
| 2 | Band-edge Compliance of RF Radiated Emissions | Pass |

| Test | Test Name | Results |
|------|---|-----------|
| 1 | Field Strength of Spurious Emissions | See plots |
| 2 | Band-edge Compliance of RF Radiated Emissions | See plots |

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The test sample was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 25 ° C ± 1 ° C and relative humidity of 45 % ± 6 % over the dates used for testing.

Equipment and Cable Configurations

The test sample was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Equipment related to the semi-anechoic chamber testing:

| Equipment | Model/type | Serial number | Operational range | Date of calibration |
|--------------------|----------------|---------------|---|---------------------|
| EMI analyzers | ESU 40 | 100036 | 20 Hz – 40 GHz | 11.05.2010 |
| Pre Amplifiers | PA-02-0001: | 2007343 | (10 kHz – 3 GHz) | 07.04.2011 |
| | PA-02-218 | 2007344 | 3 GHz – 18 GHz | 07.04.2011 |
| | PA-02-5 | 2007345 | 18 GHz – 40 GHz | 07.04.2011 |
| Radio com. Tester | CMU 200 | 112790 | GSM 850/900/1800/1900 IS95, UMTS, CDMA, Bluetooth | N/A |
| Band Reject Filter | WRCD | N/A | GSM 850/900/1800/1900 IS95, UMTS, CDMA | N/A |
| | 4N45-24241/3/6 | N/A | WLAN | N/A |

The antennas used in the various tests are listed in the below table. The log-periodic antenna is used as communication and link establishment antenna for Bluetooth.

| Antenna | Type | Serial number | Operational range | Date of calibration |
|---------------------|---------------|---------------|-------------------|---------------------|
| Hybrid-log periodic | TDK HLP 3003C | 130361 | 30 MHz – 3 GHz | 03.11.2011 |
| Double ridged Horn | TDK HRN0118 | 130303 | 1 GHz – 18 GHz | 01.21.2011 |
| Double ridged Horn | ETS HRN3116 | 00071938 | 18 GHz – 40 GHz | 10.17.08 |

Note that the hybrid antenna and horn antenna are on a three-year calibration cycle. All other equipments are on a one-year calibration cycle.

LV equipment list

| | | | | |
|-----------------|--------------|--------|----------|----------|
| ETS | Loop Antenna | 6507 | 00049471 | 02/17/12 |
| Rohde & Schwarz | Receiver | ESU 40 | 100286 | 07/13/12 |

Description of Bluetooth (BT) Transmitter

The 24607-1 cell phone sample offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483.5 MHz. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by the industrial standard. In this application, the test sample is battery-operated.

There is a switch in the Bluetooth/WLAN (BT/WiFi) module that switches between BT and WiFi. They share the same antenna, and you are able to use a BT headset while in a WiFi VoIP call, however, they do not transmit and receive at the same time. There is a 20 ms delay (for switching between the two systems in time domain) using an intelligent multiplexing scheme. Even though they share the same antenna they are NOT ON at the same time. The BT is therefore tested as a standalone transmitter.

The Equipment Under Test (EUT) offers Bluetooth LE+EDR as feature. Bluetooth LE is designed to operate from 2400-2483.5 MHz

Measurement Procedures and Data

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 15.205, 15.209, 15.247

Measurement Procedure

The test sample is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

Field Strength (dB μ V/m) = EMI Receiver Level (dB μ V) + Cable Loss (dB) - Amplifier Gain (dB) + Filter loss (dB) + Antenna Correction Factor (3/m)

For 18 GHz – 26.5 GHz:

Field Strength (dB μ V/m) = EMI Receiver Level (dB μ V) + Cable Loss (dB) - Amplifier Gain (dB) + Filter loss (dB) + Antenna Correction Factor (1/m)

A fully charged battery was used for the supply voltage.

The test sample was operated during the measurements under the following conditions:

- Tests were performed at low, mid and high channels.
- Tests were performed in both horizontal and vertical polarity.
- Tests were performed in X, Y and Z polarizations.

Measurement Results


All tests were done in Bluetooth version 4.0 Low Energy mode.

For peak emissions detected above 1 GHz, only those emissions that are higher than the AVG limit line plus 8 dB are selected for final emission analysis.

Radiated emissions were measured from 9 kHz to 30 MHz and all emissions were 20 dB below the limit.


Only the worst field strength of spurious emissions for each channel is displayed for Bluetooth.

Test title: FCC 15.205, 15.209, 15.247
Operator name: Jakuj Chen
EUT type: 24607, IMEI:990000525727998
EUT condition: HW:P2
Date: 8/25/2011
Time: 12:03:05 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 00 (2402 MHz) do in test mode. Orientation X=H
HLP 3003C antenna (30 MHz - 3 GHz).
HORN 0118 antenna (3 GHz-18 GHz).
Peak detector used.

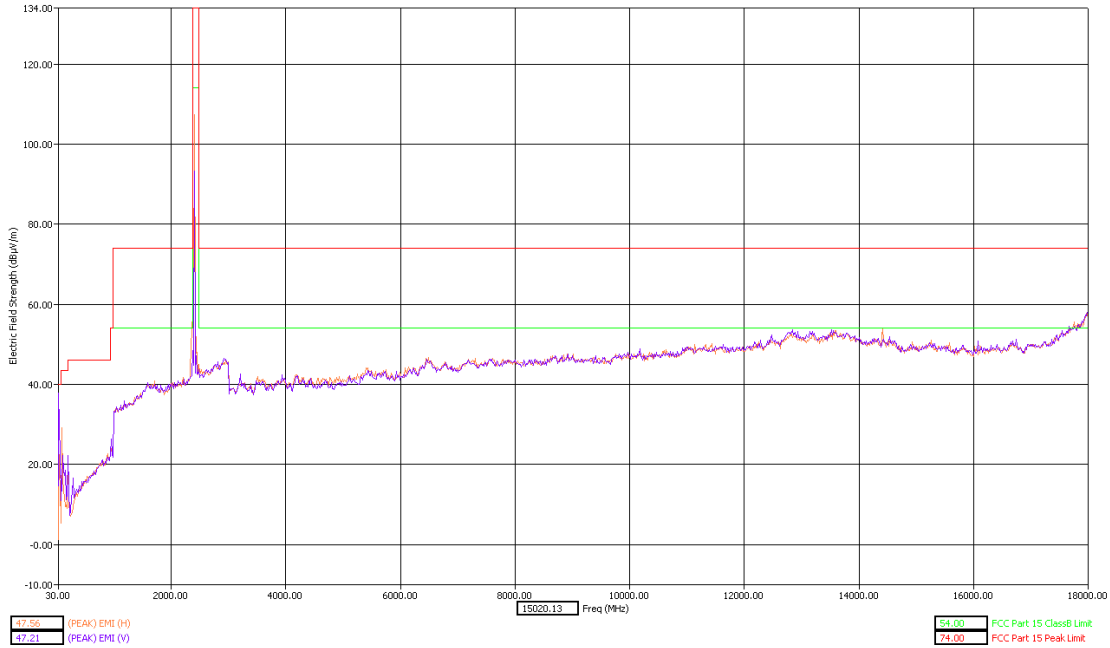


30 MHz – 18 GHz Low Channel Dual Polarization X

Test title: FCC 15.205, 15.209, 15.247
 Operator name: Jakui Chen
 EUT type: 24607, IMEI:990000525727998
 EUT condition: HW-P2
 Date: 8/24/2011
 Time: 4:04:57 PM
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
 BT ch. 39 (2441 MHz) do in test mode. Orientation X=H
 HLP 3003C antenna (30 MHz - 3 GHz).
 HRN 0118 antenna (3 GHz-18 GHz).
 Peak detector used.

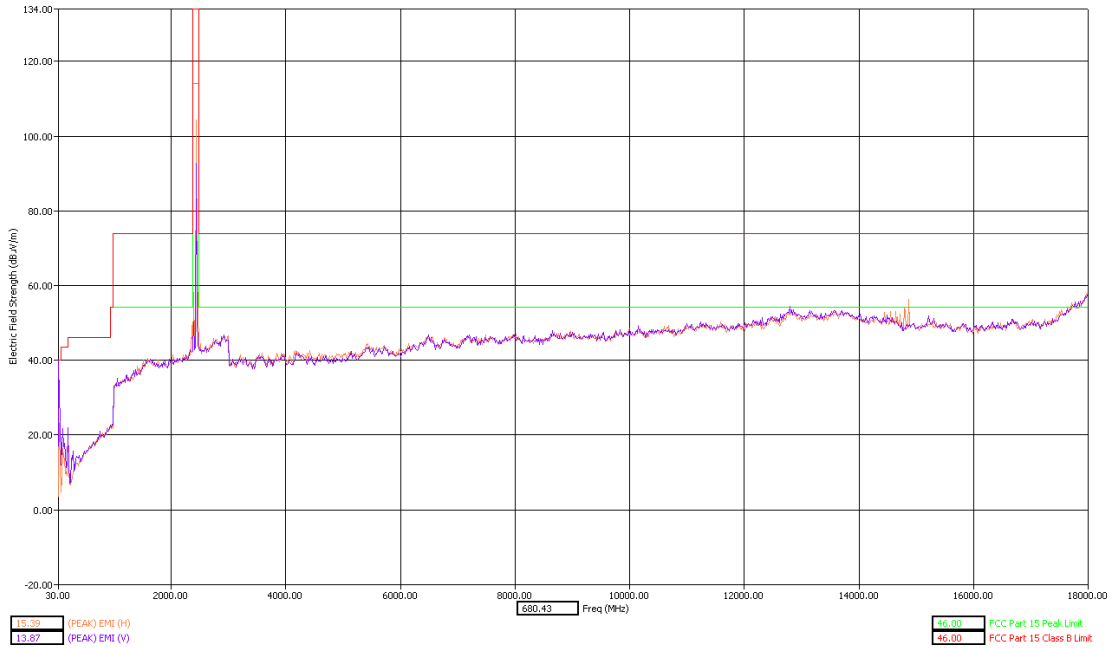

30 MHz – 18 GHz Middle Channel Dual Polarization X

Test title: FCC 15.205, 15.209, 15.247
 Operator name: Jakui Chen
 EUT type: 24607, IMEI:990000525727998
 EUT condition: HW-P2
 Date: 8/25/2011
 Time: 12:38:03 PM
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
 BT ch. 78 (2480 MHz) do in test mode. Orientation X=H
 HLP 3003C antenna (30 MHz - 3 GHz).
 HRN 0118 antenna (3 GHz-18 GHz).
 Peak detector used.

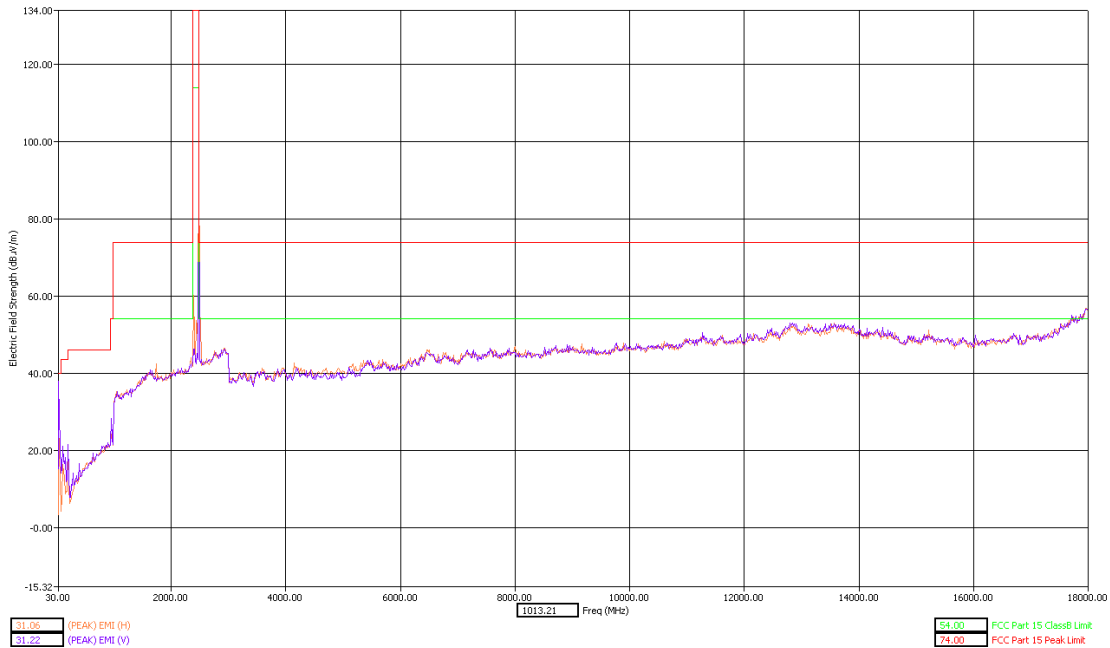

30 MHz – 18 GHz High Channel Dual Polarization X

There were no discernible emissions above the noise floor for 18 - 26.5 GHz for Low, Mid and High Channels and all polarizations in Bluetooth band.

BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS

CFR Part 15.247

Measurement Procedure

The test sample is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. Test is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{EMI Receiver Level (dB}\mu\text{V)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Filter loss (dB)} + \text{Antenna Correction Factor (3/m)}$$

For 18 GHz – 26.5 GHz:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{EMI Receiver Level (dB}\mu\text{V)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Filter loss (dB)} + \text{Antenna Correction Factor (1/m)}$$

The test sample was operated in Bluetooth single channel test mode. A fully charged battery was used for the supply voltage.

Measurement Results

Comments:


All tests were done in Bluetooth version 4.0 Low Energy mode.

The band edge measurements crossing the corner for the low/high channel with respect to the average limit line is acceptable when applying the FCC rule specified in CFR 47 part 15.35(b) for the use of peak detector above 1 GHz. The peak detector limit line has been added to the graphical plots.


The peak detector limit line has been added to the graphical plots.

See Attached:

Test title: FCC 15.205, 15.209, 15.247
Operator name: Jakui Chen
EUT type: 24607, IMEI:990000525727998
EUT condition: FW/P2
Date: 9/25/2011
Time: 12:03:05 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 00 (2402 MHz) do in test mode. Orientation X-H
HLP 3003C antenna (30 MHz - 3 GHz).
HRN 0118 antenna (3 GHz-18 GHz).
Peak detector used.

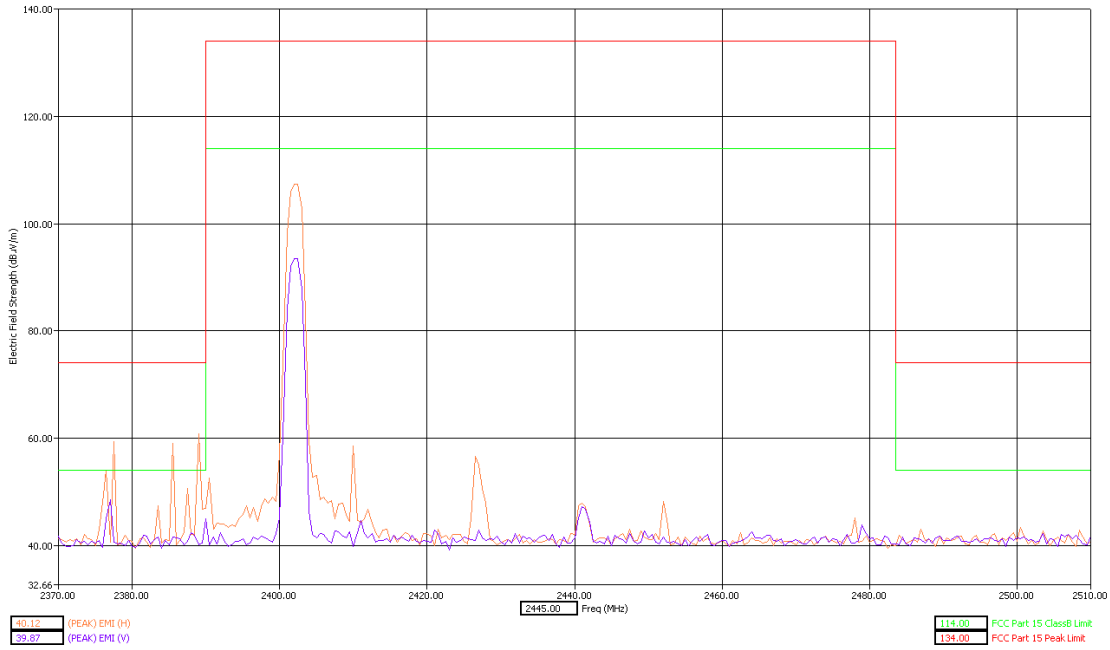


Test title: FCC 15.205, 15.209, 15.247
Operator name: Jakui Chen
EUT type: 24607, IMEI:990000525727998
EUT condition: FW/P2
Date: 9/25/2011
Time: 12:19:32 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 00 (2402 MHz) do in test mode. Orientation X-H
HLP 3003C antenna (30 MHz - 3 GHz).
AVG detector used.

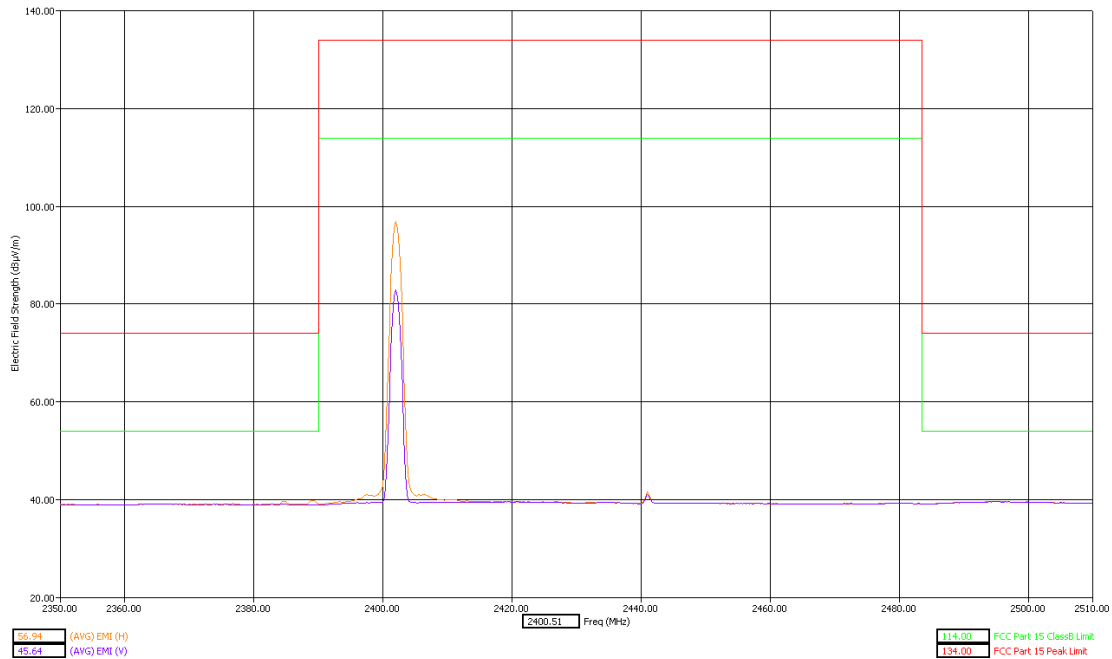


Authorized Band Emissions Low Channel Dual Polarization X

Test title: FCC 15.205, 15.209, 15.247
Operator name: Jakui Chen
EUT type: 24607, IMEI:990000525727998
EUT condition: HW:P2
Date: 9/25/2011
Time: 12:38:03 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) do in test mode. Orientation X-H
HLP 3003C antenna (30 MHz - 3 GHz).
HRN 0118 antenna (3 GHz-18 GHz).
Peak detector used.

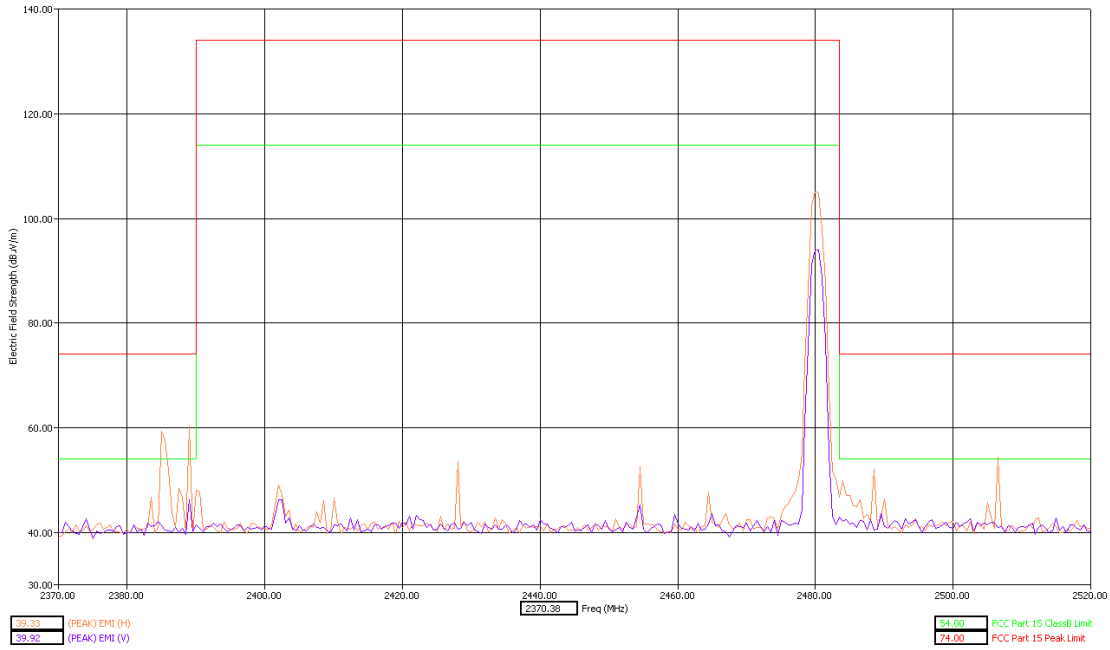

Test title: FCC 15.205, 15.209, 15.247
Operator name: Jakui Chen
EUT type: 24607, IMEI:990000525727998
EUT condition: HW:P2
Date: 9/25/2011
Time: 12:48:43 PM
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.
BT ch. 78 (2480 MHz) do in test mode. Orientation X-H
HLP 3003C antenna (30 MHz - 3 GHz).
AVG detector used.

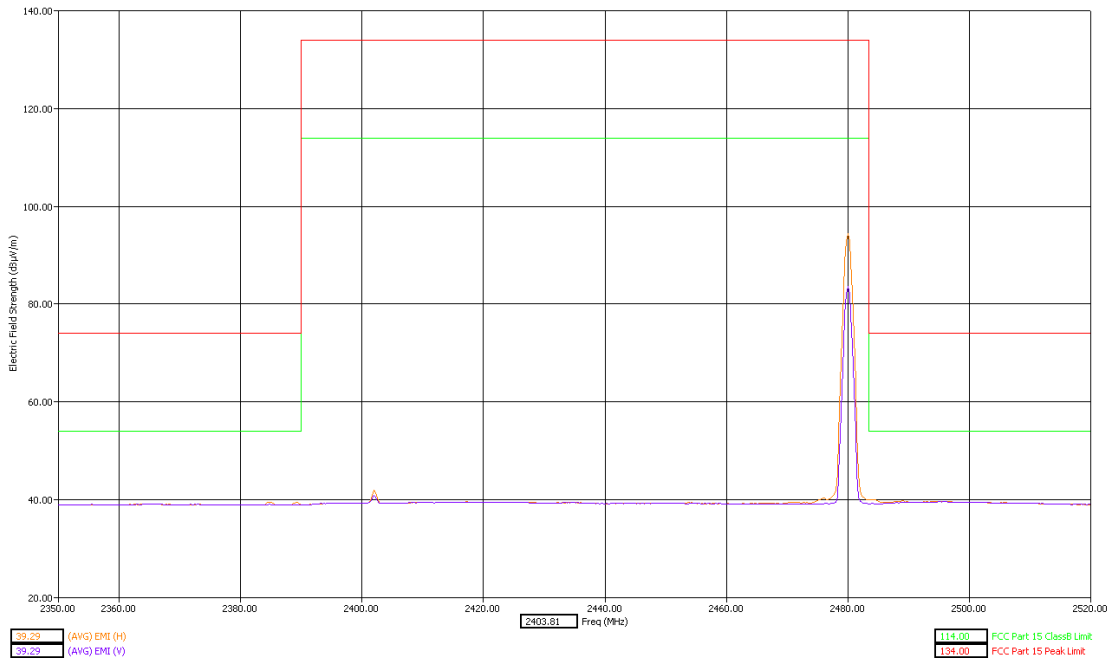

Authorized Band Emissions High Channel Dual Polarization X

End of Test Report