



# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2309-2  
FCC ID : IHDT56AH5  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Nov. 21, 2022 ~ Nov. 28, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 8

    1.6. Test Location ..... 8

    1.7. Test Software ..... 8

    1.8. Applicable Standards ..... 8

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 13

    2.4. EUT Operation Test Setup ..... 14

**3. TEST RESULT ..... 15**

    3.1. Test of AC Conducted Emission Measurement ..... 15

    3.2. Test of Radiated Emission Measurement ..... 19

**4. LIST OF MEASURING EQUIPMENT ..... 24**

**5. UNCERTAINTY OF EVALUATION ..... 25**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC202807	Rev. 01	Initial issue of report	Dec. 08, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 3.97 dB at 0.177 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.67 dB at 48.43 MHz

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2309-2
FCC ID	IHDT56AH5
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40/ WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE GNSS/NFC/WPT
IMEI Code	Conduction: 358554730016874/358554730016882 Radiation: 358554730016510/358554730016528
HW Version	DVT2
SW Version	T1TB33.3
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1 is dual SIM slot, sample 2 is single SIM slot, we choose sample 1 for full test.
3. The device supports WPT RX only.





	<p>LTE Band 41 : 2496 MHz ~ 2690 MHz          LTE Band 42 : 3450 MHz ~ 3550 MHz          LTE Band 43 : 3600 MHz ~ 3700 MHz          LTE Band 48 : 3550 MHz ~ 3700 MHz          LTE Band 66 : 2110 MHz~ 2200 MHz          5G NR n2 : 1930 MHz ~ 1990 MHz          5G NR n5 : 869 MHz ~ 894 MHz          5G NR n7 : 2620 MHz ~ 2690 MHz          5G NR n38: 2570 MHz ~ 2620 MHz          5G NR n41 : 2496 MHz ~ 2690 MHz          5G NR n66 : 2110 MHz~ 2200 MHz          5G NR n77 : ;3700 MHz ~ 3980 MHz;          5G NR n78 : 3700 MHz ~ 3800 MHz;          802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz          802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz;                            5250 MHz ~ 5350 MHz;                            5470 MHz ~ 5725 MHz                            5725 MHz ~ 5850 MHz          Bluetooth: 2400 MHz ~ 2483.5 MHz          802.11a/ax: 5925 MHz ~ 7125 MHz          NFC : 13.56 MHz          GNSS : 1559 MHz ~ 1610 MHz, 1164 MHz ~ 1215 MHz          WPT: 110kHz~ 148 kHz</p>
<b>Antenna Type</b>	<p>WWAN : Metal Antenna          WLAN : Metal Antenna          Bluetooth : Metal Antenna          GNSS: Metal Antenna          NFC: FPC Antenna          WPT: Coil Antenna</p>
<b>Type of Modulation</b>	<p>GSM/GPRS: GMSK          EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK          WCDMA : BPSK          HSPA : QPSK          HSPA+ : 16QAM          DC-HSDPA : 64QAM          LTE: QPSK / 16QAM / 64QAM / 256QAM          5G NR:          DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM)          CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)          802.11b : DSSS (DBPSK / DQPSK / CCK)          802.11a/g/n/ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)          Bluetooth LE : GFSK          Bluetooth (1Mbps) : GFSK          Bluetooth (2Mbps) :<math>\pi/4</math>-DQPSK          Bluetooth (3Mbps) : 8-DPSK          GNSS : BPSK          NFC: ASK          WPT: ASK</p>



### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

### 1.9. Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name MC-681N
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name MC-682N
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name MC-683N
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name MC-685N
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name MC-686N
AC Adapter 1(BR)	Brand Name	Motorola (Chenyang)	Model Name MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola (Chenyang)	Model Name MC-689N
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name MC-681N
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name MC-682N
AC Adapter 2(UK)	Brand Name	Motorola (Acbel)	Model Name MC-683N
AC Adapter 2(AU)	Brand Name	Motorola (Acbel)	Model Name MC-685N
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name MC-686N
AC Adapter 2(BR)	Brand Name	Motorola (Acbel)	Model Name MC-687N
AC Adapter 3(IN)	Brand Name	Motorola (Salom)	Model Name MC-684
Battery	Brand Name	Motorola(SCUD)	Model Name PB50
Earphone	Brand Name	Motorola (Lyand)	Model Name MI181C(SH38D62338)
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name SC18D24968
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name SC18D71644
Wireless Charging dock	Marketing Name	TurboPower 15W Wireless Charging Stand	Model Name MW - 03



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + NFC On+Battery 1 + USB Cable 1 (Charging from Adapter 1) + SIM 1 for Sample 1
	Mode 2: WCDMA 850 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + Battery 1 + USB Cable 1 (Charging from Adapter 2) + SIM2 for Sample 1
	Mode 3: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (WIFI 6E) Idle + Camera(Front) + Battery 1 + USB Cable 1 (Charging from Adapter 3) + SIM 1 for Sample 1
	Mode 4: LTE Band 17 Rx(High)+Bluetooth Idle+WLAN (2.4G) Idle+MPEG4(Run Color Bar)+Battery 1 +USB Cable 1 (Charging from Adapter (3) ) + SIM1 for Sample 1
	Mode 5: LTE Band 26 Rx(Low) + Bluetooth Idle+WLAN (5G) Idle + GNSS Rx+Battery 1 + USB Cable 1 (EUT Charging from Wireless charger ) + Adapter (3) Connect to Wireless charger + SIM 1 for Sample 1
	Mode 6: LTE Band 12 Rx(Middle) + Bluetooth Idle+WLAN (WIFI 6E) Idle + Camera(Front) + Battery 1+USB Cable 1 (Data Link with Notebook)+EUT (eMMC) USB Data Link to PC/NB + SIM1 for Sample 1
	Mode 7:5G N5 Rx(Middle)Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front)+Battery 1+USB Cable 1 (Data Link with Notebook)+PC/NB USB Data Link to EUT (eMMC) + SIM1 for Sample 1




Radiated Emissions	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle+NFC On + Battery 1 + USB Cable 1 (Charging from Adapter 1) + SIM 1 for Sample 1
	Mode 2: WCDMA 850 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle+Camera(Rear)+Battery 1 + USB Cable 1 (Charging from Adapter 2) + SIM 2 for Sample 1
	Mode 3: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (WIFI 6E) Idle + Camera(Front) + Battery 1 + USB Cable 1 (Charging from Adapter 3) + SIM 2 for Sample 1
	Mode 4: LTE Band 17 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Battery 1 + Earphone + SIM 2 for Sample 1
	Mode 5: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx+Battery 1+USB Cable 1 (EUT Charging from Wireless charger ) + SIM 2 for Sample 1
	Mode 6: LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx+Battery 1+USB Cable 1 (Data Link with Notebook)+EUT (eMMC) USB Data Link to PC/NB+Battery 1+ SIM 2 for Sample 1
	Mode 7: 5G N5 Rx(Middle)Idle+Bluetooth Idle+WLAN (2.4G) Idle + GNSS Rx + Battery 1 + USB Cable 1 (Data Link with Notebook)+PC/NB USB Data Link to EUT (eMMC) + SIM 2 for Sample 1

**Remark:**

1. The worst case of AC is mode 3; only the test data of this mode is reported.
2. The worst case of RE is mode 5; only the test data of this mode is reported.
3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.
4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA 850/LTE Band 12/13 /17 /26 and 5G N5, the worst channel was recorded in this report.

## 2.2.Connection Diagram of Test System

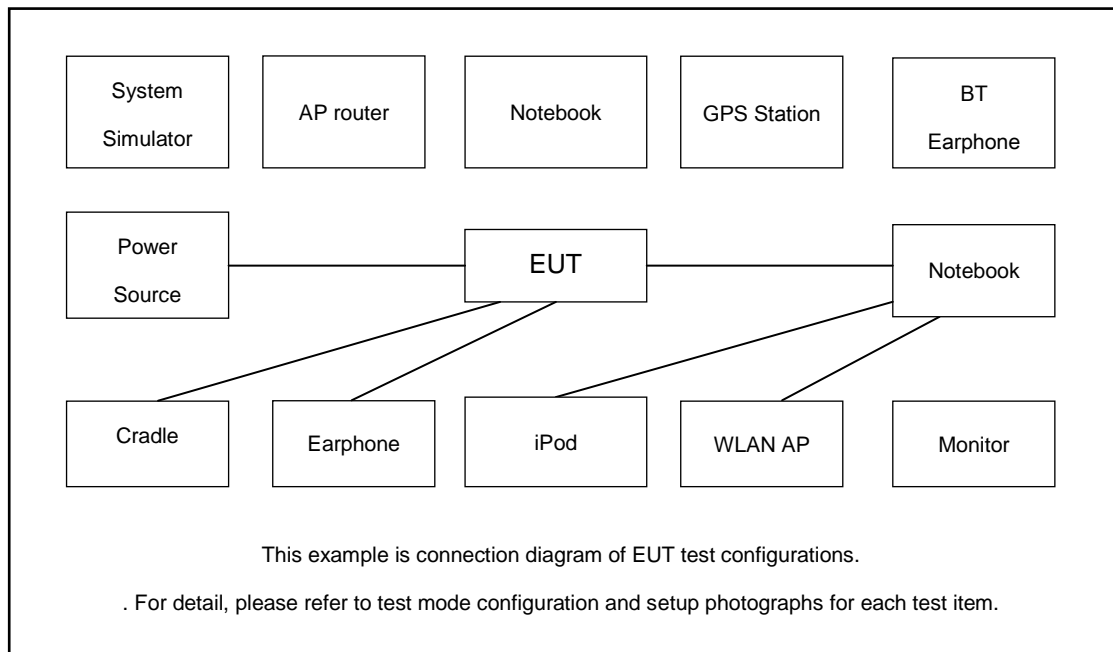

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	LTE Base Station	Anritus	MT8820C	N/A	N/A	N/A
3.	Signal Generator	R&S	SMBV100A	N/A	N/A	N/A
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
6.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	N/A
7.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
8.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	N/A
9.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
10.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
11.	Hard disk	KINGSHARE	KSP6120G	N/A	N/A	N/A
12.	SD Card	SanDisk	Uitra	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

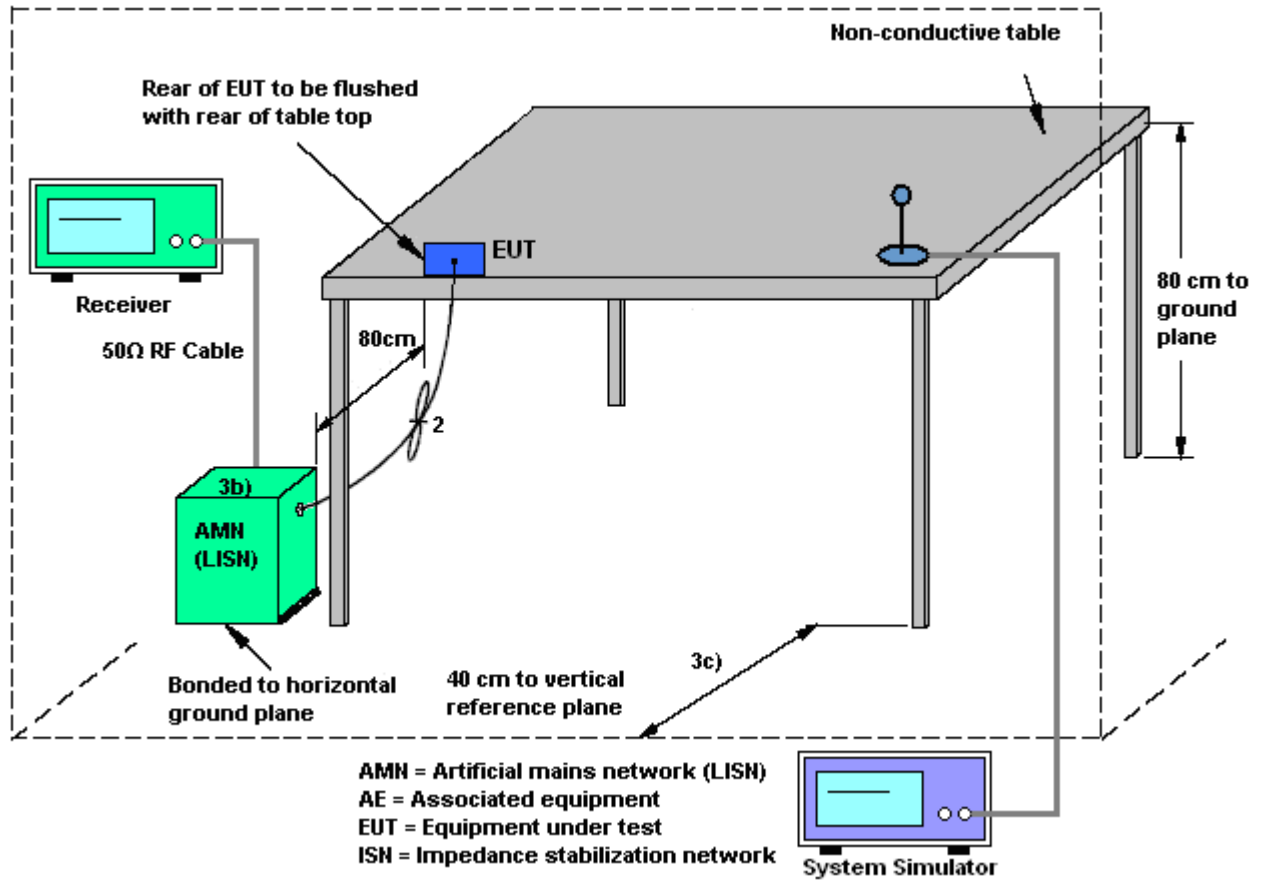



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

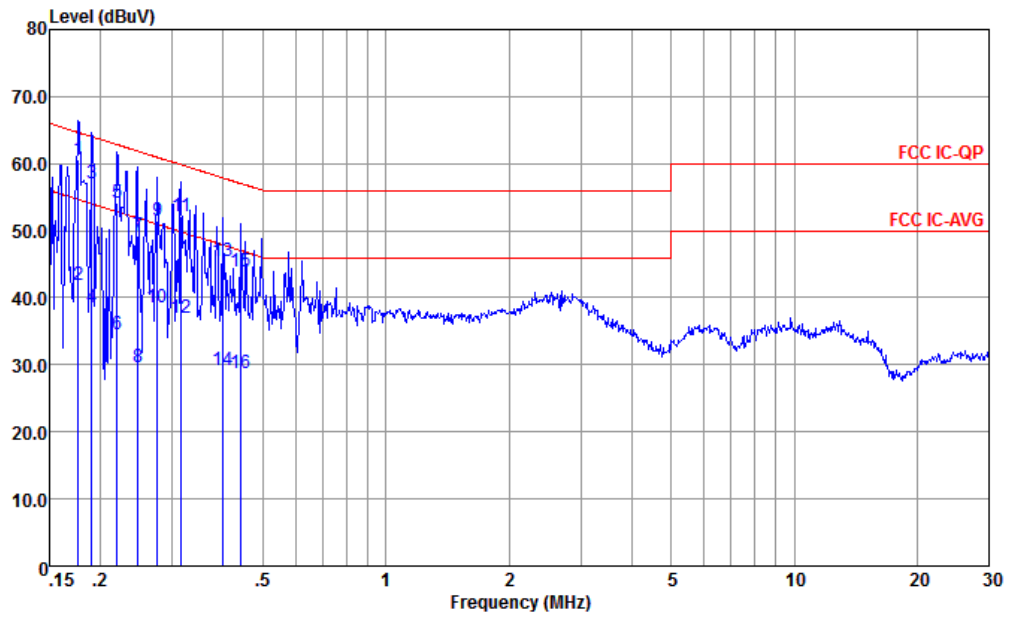


Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.177	60.67	-3.97	64.64	50.21	0.04	10.42	QP
2	0.177	41.97	-12.67	54.64	31.51	0.04	10.42	Average
3	0.190	57.05	-6.97	64.02	46.60	0.03	10.42	QP
4	0.190	38.65	-15.37	54.02	28.20	0.03	10.42	Average
5	0.220	54.23	-8.60	62.83	43.80	0.03	10.40	QP
6	0.220	34.63	-18.20	52.83	24.20	0.03	10.40	Average
7	0.247	49.22	-12.64	61.86	38.80	0.04	10.38	QP
8	0.247	29.62	-22.24	51.86	19.20	0.04	10.38	Average
9	0.276	51.52	-9.42	60.94	41.11	0.05	10.36	QP
10	0.276	38.62	-12.32	50.94	28.21	0.05	10.36	Average
11	0.315	52.19	-7.65	59.84	41.80	0.05	10.34	QP
12	0.315	36.99	-12.85	49.84	26.60	0.05	10.34	Average
13	0.398	45.51	-12.39	57.90	35.20	0.01	10.30	QP
14	0.398	29.21	-18.69	47.90	18.90	0.01	10.30	Average
15	0.442	43.85	-13.17	57.02	33.60	-0.01	10.26	QP
16	0.442	28.85	-18.17	47.02	18.60	-0.01	10.26	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

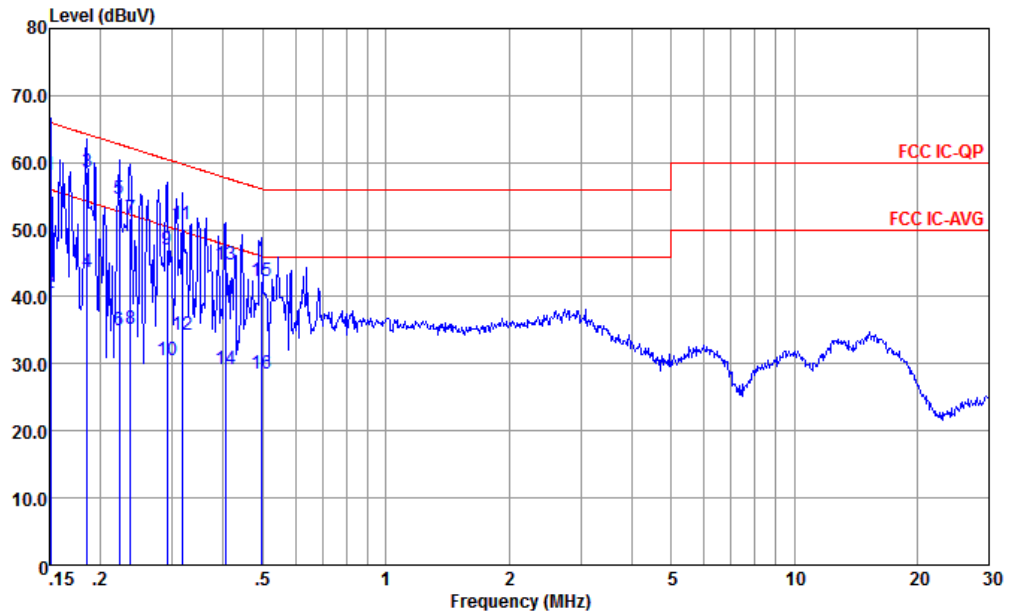

Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	58.26	-7.70	65.96	47.80	0.03	10.43	QP
2	0.151	40.66	-15.30	55.96	30.20	0.03	10.43	Average
3 *	0.185	58.57	-5.67	64.24	48.11	0.04	10.42	QP
4	0.185	43.77	-10.47	54.24	33.31	0.04	10.42	Average
5	0.222	54.63	-8.11	62.74	44.21	0.02	10.40	QP
6	0.222	35.03	-17.71	52.74	24.61	0.02	10.40	Average
7	0.237	51.60	-10.62	62.22	41.20	0.01	10.39	QP
8	0.237	35.30	-16.92	52.22	24.90	0.01	10.39	Average
9	0.291	46.91	-13.59	60.50	36.60	-0.04	10.35	QP
10	0.291	30.61	-19.89	50.50	20.30	-0.04	10.35	Average
11	0.317	50.89	-8.91	59.80	40.60	-0.05	10.34	QP
12	0.317	34.39	-15.41	49.80	24.10	-0.05	10.34	Average
13	0.404	44.73	-13.04	57.77	34.50	-0.07	10.30	QP
14	0.404	29.13	-18.64	47.77	18.90	-0.07	10.30	Average
15	0.494	42.33	-13.77	56.10	32.20	-0.08	10.21	QP
16	0.494	28.63	-17.47	46.10	18.50	-0.08	10.21	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

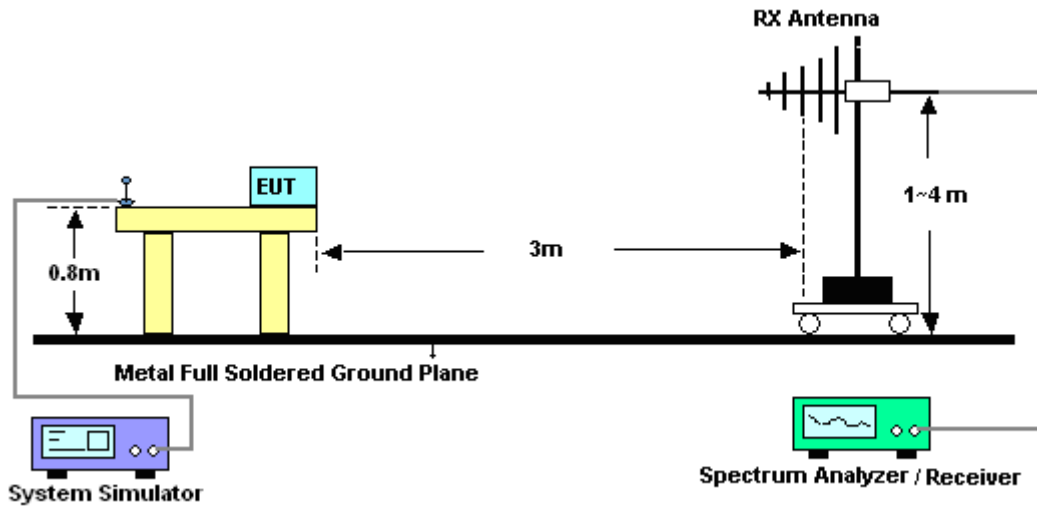


For radiated emissions above 1GHz

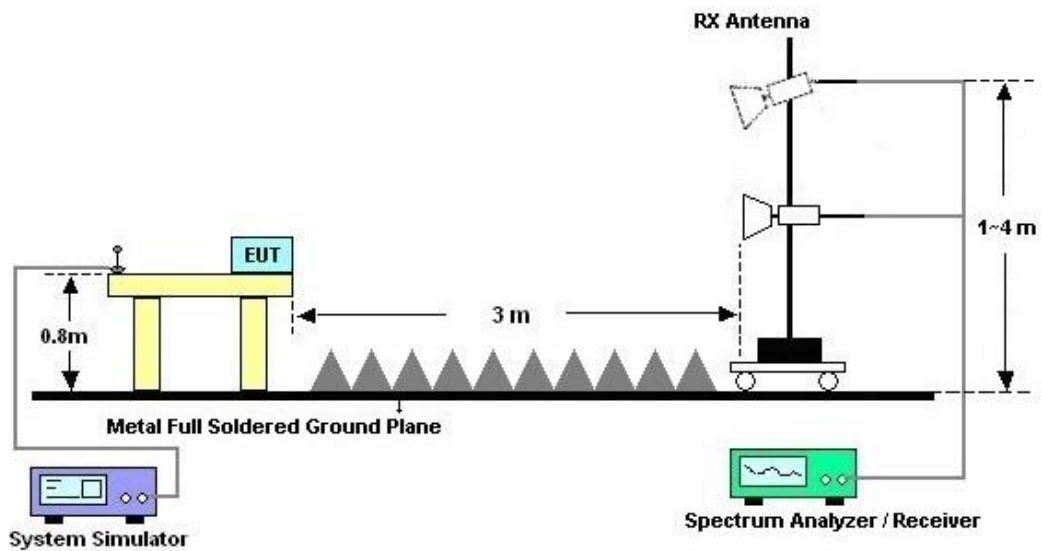



3.2.5. Test Result of Radiated Emission

Test Engineer :	Feng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

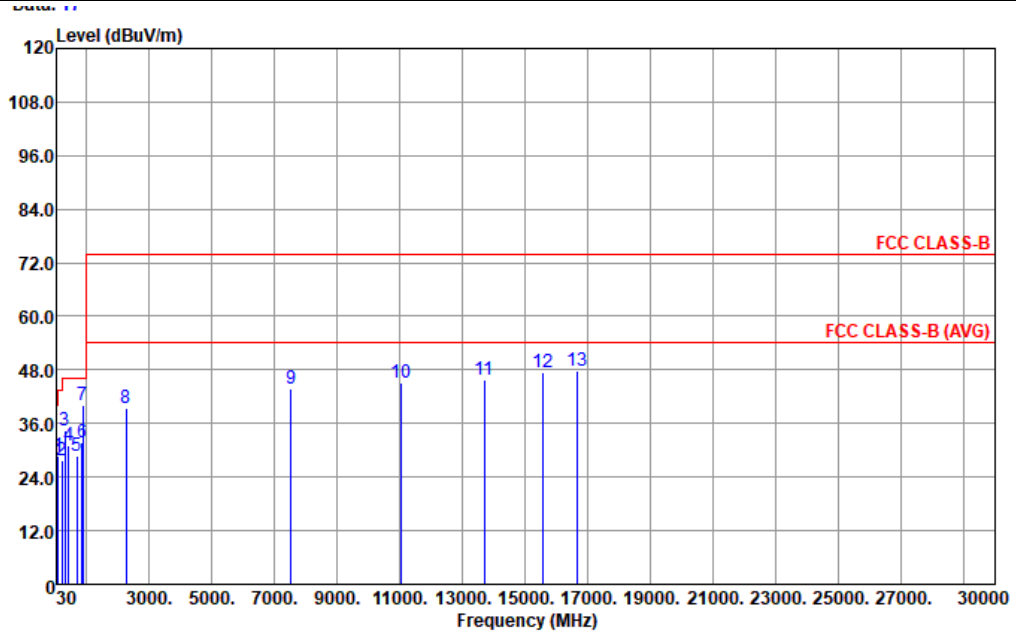


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 49921 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	95.96	28.59	-14.91	43.50	44.04	15.56	1.39	32.40	---	---	Peak
2	199.75	27.73	-15.77	43.50	43.04	15.00	2.09	32.40	---	---	Peak
3	295.78	34.41	-11.59	46.00	45.04	19.25	2.52	32.40	---	---	Peak
4	414.12	30.98	-15.02	46.00	38.16	22.18	3.04	32.40	---	---	Peak
5	694.45	28.90	-17.10	46.00	30.68	26.69	3.93	32.40	---	---	Peak
6	862.26	31.68	-14.32	46.00	30.41	28.75	4.32	31.80	---	---	Peak
7	871.00	40.22			38.76	28.83	4.36	31.73	---	---	Peak
8	2258.00	39.38	-34.62	74.00	35.98	31.08	7.16	34.84	---	---	Peak
9	7528.00	43.69	-30.31	74.00	27.53	35.97	13.66	33.47	---	---	Peak
10	11013.00	45.15	-28.85	74.00	24.79	38.94	16.62	35.20	---	---	Peak
11	13682.00	45.92	-28.08	74.00	22.63	39.83	18.75	35.29	---	---	Peak
12	15569.00	47.50	-26.50	74.00	21.83	40.84	19.96	35.13	---	---	Peak
13	16674.00	47.92	-26.08	74.00	21.20	40.97	20.81	35.06	---	---	Peak



Test Engineer :	Feng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

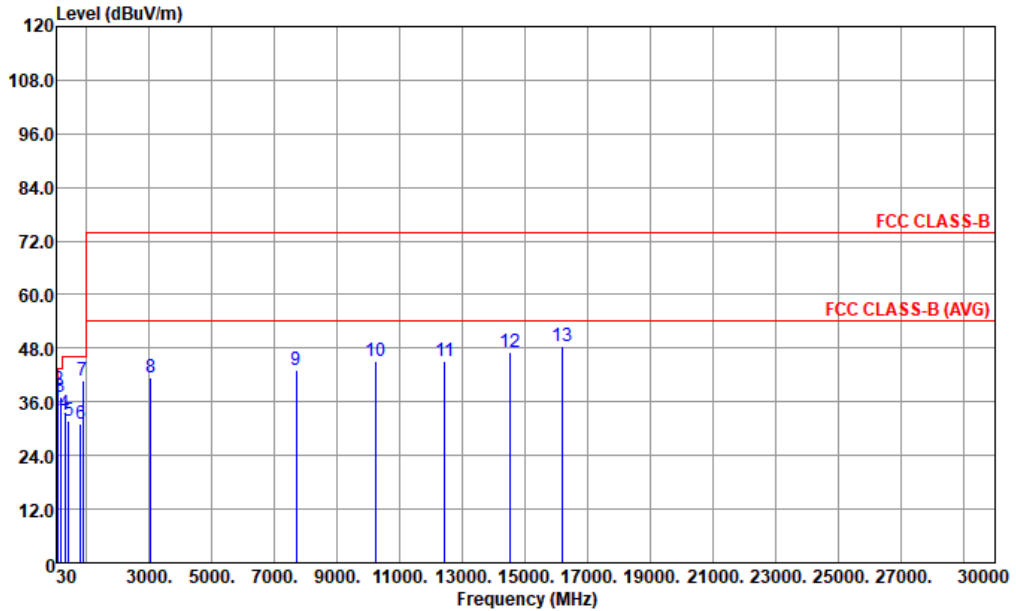

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 49921 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	48.43	36.33	-3.67	40.00	52.30	15.45	0.98	32.40	100	173	Peak
2	95.96	38.83	-4.67	43.50	54.28	15.56	1.39	32.40	---	---	Peak
3	167.74	36.98	-6.52	43.50	51.52	15.98	1.88	32.40	---	---	Peak
4	295.78	33.28	-12.72	46.00	43.91	19.25	2.52	32.40	---	---	Peak
5	415.09	31.71	-14.29	46.00	38.87	22.20	3.04	32.40	---	---	Peak
6	810.85	31.23	-14.77	46.00	30.76	28.30	4.23	32.06	---	---	Peak
7	871.00	40.88			39.42	28.83	4.36	31.73	---	---	Peak
8	3040.00	41.39	-32.61	74.00	34.06	32.69	8.41	33.77	---	---	Peak
9	7681.00	43.20	-30.80	74.00	27.44	35.82	13.82	33.88	---	---	Peak
10	10231.00	45.22	-28.78	74.00	25.94	38.37	16.12	35.21	---	---	Peak
11	12441.00	44.97	-29.03	74.00	22.93	39.71	17.84	35.51	---	---	Peak
12	14515.00	47.29	-26.71	74.00	22.37	40.86	19.25	35.19	---	---	Peak
13	16164.00	48.38	-25.62	74.00	22.54	40.62	20.46	35.24	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 12, 2022	Nov. 21, 2022	Oct. 11, 2023	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 12, 2022	Nov. 21, 2022	Oct. 11, 2023	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Nov. 21, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 8, 2021	Nov. 21, 2022	Nov. 7, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Nov. 21, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Nov. 21, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan 05, 2022	Nov. 21, 2022	Jan 04, 2023	Radiation (03CH02-KS)
Amplifier	EM	EM01G18G	060806	1GHz~18GHz	Oct. 12, 2022	Nov. 21, 2022	Oct. 11, 2023	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 21, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Nov. 21, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Nov. 21, 2022	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May. 24, 2022	Nov. 28, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Nov. 28, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Nov. 28, 2022	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Nov. 28, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.78dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------