



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-3
FCC ID : IHDT56AS9
STANDARD : 47 CFR Part 2, 22, 24, 27, 90S
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 05, 2024 ~ Aug. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Specification of Accessory.....	5
1.6 Testing Site.....	5
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	14
4 MEASUREMENT UNCERTAINTY	17
APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471919-01A	Rev. 01	Initial issue of report	Sep. 03, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-3
FCC ID	IHDT56AS9
IMEI Code	Conducted/DFS/CBP: 359867620008119/359867620008127 Radiation: 359867620006634 Conduction: 359867620006899/359867620006907
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1((CHILE))	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(ATL)	Model Name	RW50
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	SH38D62338
Earphone 2	Brand Name	Motorola(Juwei)	Model Name	S928E43096
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

1.6 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS 03CH02-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616
3.	03CH02-KS	AUDIX	E3	6.2009-8-24al
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22, 24, 27, 90S, 90S
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015

2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2437-3, FCC ID: IHDT56AS9) is electrically identical to the reference device (Model: XT2437-1, XT2437-2, FCC ID: IHDT56AS8) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report.

For Conducted items of 5G NR bands please refer to report number: TR-24ADRTCC7017.

For SAR Reference detail, please refer to FCC SAR report FA471919-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AS9 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AS8 and FCC ID: IHDT56AS9 is as below:

- Remove WCDMA IV and LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32 and 5G NR n8/n20/n38/n41/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AS9 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AS8	Full test	FR471919A	IHDT56AS9	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AS8	Full test	FR471919B	IHDT56AS9	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AS8	Full test	FR471919C	IHDT56AS9	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AS8	Full test	FR471919D	IHDT56AS9	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5500~5720	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5745~5825	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AS8	Full test	FZ471919	IHDT56AS9	Spot check	Y, All test items
	6XD	5925~7125	IHDT56AS8	Full test	FR471919F	IHDT56AS9	Spot check	Y, All test items
22 24	PCE (GSM, WCDMA)	GSM 850/1900 WCDMA B2/B5	IHDT56AS8	Full test	FG471919A	IHDT56AS9	Spot check	Y, All test items
22 24 27 90	PCE (LTE)	LTE B2/B5/B7/B7C/B26/B38/B38C/B42/B42C	IHDT56AS8	Full test	FG471919B FG471919C FG471919D FG471919E FG471919F	IHDT56AS9	Spot check	Y, All test items
22 27	PCE (NR)	5G NR n5/n7/n26	IHDT56AS8	Full test	FG471919G	IHDT56AS9	Spot check	Y, RSE item.

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB}/20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation	Deviation Limit
BT 1Mbps (CH78)	Number of Channels (N)	79	79	0.00	3
	Hopping Channel Separation (MHz)	1.009	1.003	0.01	3
	Dwell Time of Each Channel(s)	0.31	0.31	0.00	3
	20dB Bandwidth(MHz)	0.95	0.94	0.01	3
	99% Bandwidth(MHz)	0.836	0.836	0.00	3
	Conducted Band Edges(dBm)	-52.28	-51.03	1.25	3
	Conducted Spurious Emission(dBm)	-43.36	-45.96	2.60	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	56.36	57.48	-1.12	3
BT	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
BLE 1Mbps (CH39)	6dB Bandwidth (MHz)	0.67	0.67	0.00	3
	99% Bandwidth (MHz)	1.02	1.02	0.00	3
	Power Spectral Density (dBm/3KHz)	-9.35	-9.50	0.15	3
	Conducted Band Edges and Spurious Emission (dBm)	-55.57	-52.79	2.78	3
	Conducted Spurious Emission (dBm)	-50.79	-49.64	1.15	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission (dBuV/m)	45.97	46.01	-0.04	3
BLE	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.06	8.02	0.04	3
	99% Bandwidth (MHz)	12.895	13.287	0.39	3
	Power Spectral Density (dBm/3KHz)	-0.08	-0.15	0.07	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.75	-36.73	1.98	3
	Conducted Spurious Emission (dBm)	-50.78	-49.45	1.33	3
WIFI 2.4G (802.11ax HE40 CH03)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.69	48.16	2.53	3
WIFI 2.4G	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 5G (802.11a CH149)	26dB Emission Bandwidth (MHz)	20.91	20.45	0.46	3
	99% Occupied Bandwidth (MHz)	16.69	16.38	0.31	3
	Power Spectral Density (dBm/MHz)	8.39	7.80	0.59	3
	DFS (s)	0.763225	0.972832	0.209607	3
WIFI 5G (11ax HE40_Ch62)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.80	50.41	0.39	3



WIFI 5G	AC Conducted Emission (dBuV)	36.87	36.45	0.42	3
WIFI 6G UNII-8 (802.11ax HE80 CH199)	26dB Emission Bandwidth (MHz)	81.18	80.99	0.19	3
	99% Occupied Bandwidth (MHz)	76.952	76.876	0.08	3
	Fundamental Maximum EIRP (dBm)	11.34	11.06	0.28	3
	Fundamental Power Spectral Density (dBm/MHz)	-2.05	-2.56	0.51	3
	In-Band Emissions (Channel Mask) (dB)	-37.39	-37.15	0.24	3
WIFI 6G UNII-7 (802.11ax HE160 CH199)	Contention Based Protocol (dBm)	-69.05	-68.09	0.96	3
WIFI 6G (11ax HE160 Ch15)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.62	50.46	0.16	3
WLAN 6G	AC Conducted Emission (dBuV)	43.18	45.05	1.87	3
Part 15C NFC	20dB Emission Bandwidth (KHz)	2.49	2.49	0	3
	99% Occupied Bandwidth (KHz)	2.11	2.10	0.01	3
	Field Strength of Fundamental (dBuV/m @ 30m)	9.36	11.95	2.59	3
	Radiated Spurious Emissions (dBuV/m)	29.5	30.68	1.18	3
	AC Power Line Conducted Emissions(dBuV)	45.12	43.97	1.15	3
Part 22/24/27/90 (Worst LTE Band 7C)	Conducted Power(dBm)	23.01	22.85	0.16	3
	Equivalent Isotropic Radiated Power(dBm)	20.84	20.68	0.16	3
	Peak-to-Average Ratio (dB)	6.46	6.34	0.12	3
	Occupied Bandwidth(MHz)	37.80	38.12	0.32	3
	Conducted Band Edge (dBm)	-26.52	-28.49	1.97	3
	Conducted Spurious Emission(dBm)	-50.27	-51.26	0.99	3
	Frequency Stability (ppm)	0.0029	0.0026	0.00	3



Test Item	Mode	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	14.05	13.76	0.29	3
	BLE 1Mbps	5.69	5.39	0.3	3
	BLE 2Mbps	5.94	5.49	0.45	3
	11b, 2.4GHz	24.78	24.42	0.36	3
	11g, 2.4GHz	27.79	27.65	0.14	3
	11n HT20, 2.4GHz	27.88	27.25	0.63	3
	11n HT40, 2.4GHz	26.14	25.2	0.94	3
	11ax 20, 2.4GHz	28.03	27.41	0.62	3
	11ax 40, 2.4GHz	26.19	25.29	0.9	3
	11a, 5.2GHz	19.36	19.01	0.35	3
	11a, 5.3GHz	20.05	19.86	0.19	3
	11a, 5.5GHz	19.69	19.12	0.57	3
	11a, 5.8GHz	21.09	20.81	0.28	3
	11n HT20, 5.2GHz	19.54	19.12	0.42	3
	11n HT20, 5.3GHz	19.66	19.25	0.41	3
	11n HT20, 5.5GHz	19.92	19.34	0.58	3
	11n HT20, 5.8GHz	20.91	20.53	0.38	3
	11ac VHT20, 5.2GHz	19.59	19.24	0.35	3
	11ac VHT20, 5.3GHz	19.72	19.34	0.38	3
	11ac VHT20, 5.5GHz	19.74	19.62	0.12	3
	11ac VHT20, 5.8GHz	20.92	20.63	0.29	3
	11ax HE20, 5.2GHz	19.67	19.08	0.59	3
	11ax HE20, 5.3GHz	19.80	19.71	0.09	3
	11ax HE20, 5.5GHz	20.02	19.27	0.75	3
	11ax HE20, 5.8GHz	21.05	20.75	0.3	3
	11n HT40, 5.2GHz	19.82	19.33	0.49	3
	11n HT40, 5.3GHz	19.60	19.17	0.43	3
	11n HT40, 5.5GHz	19.99	19.27	0.72	3
	11n HT40, 5.8GHz	19.74	19.31	0.43	3
	11ac VHT40, 5.2GHz	19.96	19.56	0.4	3
	11ac VHT40, 5.3GHz	19.71	19.22	0.49	3
	11ac VHT40, 5.5GHz	19.99	19.54	0.45	3
	11ac VHT40, 5.8GHz	19.83	19.32	0.51	3
	11ax HE40, 5.2GHz	20.37	20.02	0.35	3
	11ax HE40, 5.3GHz	20.06	19.54	0.52	3
	11ax HE40, 5.5GHz	20.39	19.98	0.41	3
	11ax HE40, 5.8GHz	20.31	19.98	0.33	3
	11ac VHT80, 5.2GHz	17.13	16.88	0.25	3
	11ac VHT80, 5.3GHz	17.56	17.11	0.45	3
	11ac VHT80, 5.5GHz	18.95	18.45	0.5	3
	11ac VHT80, 5.8GHz	18.69	18.19	0.5	3
	11ax HE80, 5.2GHz	17.19	16.84	0.35	3
	11ax HE80, 5.3GHz	17.63	17.38	0.25	3
	11ax HE80, 5.5GHz	19.63	19.31	0.32	3
	11ax HE80, 5.8GHz	19.21	18.96	0.25	3
	11ac VHT160, 5.2GHz	15.34	14.98	0.36	3
	11ac VHT160, 5.5GHz	14.75	14.32	0.43	3
	11ax HE160, 5.2GHz	15.36	15.13	0.23	3
	11ax HE160, 5.5GHz	14.76	14.35	0.41	3
	11ax HE20, U-NII-5	10.00	9.23	0.77	3



11ax HE20, U-NII-6	9.31	8.7	0.61	3
11ax HE20, U-NII-7	9.42	9.03	0.39	3
11ax HE20, U-NII-8	10.04	9.82	0.22	3
11ax HE40, U-NII-5	13.09	12.62	0.47	3
11ax HE40, U-NII-6	12.27	12.04	0.23	3
11ax HE40, U-NII-7	12.49	11.89	0.60	3
11ax HE40, U-NII-8	13.39	13.13	0.26	3
11ax HE80, U-NII-5	15.01	14.24	0.77	3
11ax HE80, U-NII-6	14.70	14.22	0.48	3
11ax HE80, U-NII-7	14.44	13.66	0.78	3
11ax HE80, U-NII-8	15.64	15.36	0.28	3
11ax HE160, U-NII-5	16.44	15.68	0.76	3
11ax HE160, U-NII-6	16.22	15.78	0.44	3
11ax HE160, U-NII-7	16.31	15.75	0.56	3
11ax HE160, U-NII-8	15.37	15.17	0.2	3
GSM 850	32.84	32.82	0.02	3
GSM 1900	29.16	28.93	0.23	3
WCDMA 850	23.03	22.93	0.1	3
WCDMA1900	22.81	22.79	0.02	3
LTE B2	22.92	22.61	0.31	3
LTE B5	22.94	22.92	0.02	3
LTE B26 (Part 22H)	23.06	23.05	0.01	3
LTE B26 (Part 90S)	22.82	22.71	0.11	3
LTE B7	23.03	23.01	0.02	3
LTE B7C	23.01	22.85	0.16	3
LTE B38	23.16	23.12	0.04	3
LTE B38C	23.11	22.81	0.30	3
LTE B42	23.15	23.02	0.13	3
LTE B42C	23.04	22.96	0.08	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS/CBP. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WiFi:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 15, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 15, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 15, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000081 1	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2024	Aug. 05, 2024	Jan. 02, 2025	DFS (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Aug. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 05, 2024	NCR	DFS (DFS01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 21, 2024	Jan. 01, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Aug. 21, 2024	Apr. 16, 2025	CBP (DFS01-KS)

NCR: No Calibration Required.

**For NFC:**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Aug. 18, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 16, 2024~ Aug. 18, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz

Uncertainty of Conducted Measurement (WIFI 6G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	±0.4 Hz

**Uncertainty of Conducted Measurement (DFS)**

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------



03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04dB
---	--------

03CH03-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83dB
---	--------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	22 ~ 23 °C
		Temperature :	41 ~ 42 %





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2400-2483.5	6	Bluetooth-LE_GSKF	39	2480	2Mbps	Full	-
	U-NII-2A	5.25-5.35	CDD 6+8	802.11ax HE40	62	5310	MCS0	Full	-
	Part 27M B41 BW=20M								
	NFC on								

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	39	2496.34	46.04	54.00	-7.96	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	4960.00	41.94	74.00	-32.06	V	PEAK	Pass	Harmonic
	802.11ax HE40	62	5350.20	50.85	54.00	-3.15	H	Average	Pass	Band Edge
	802.11ax HE40	62	7752.40	62.37	70.20	-7.83	V	Peak	Pass	Harmonic

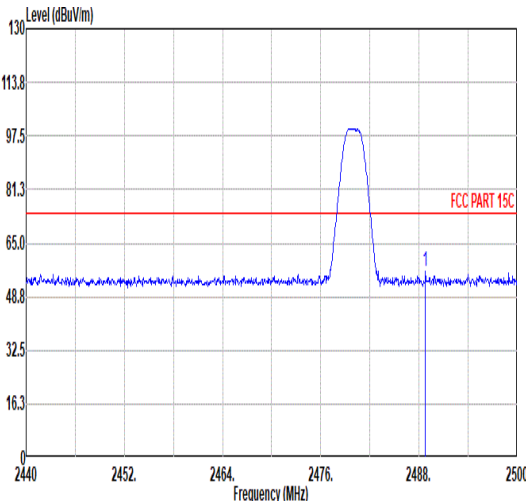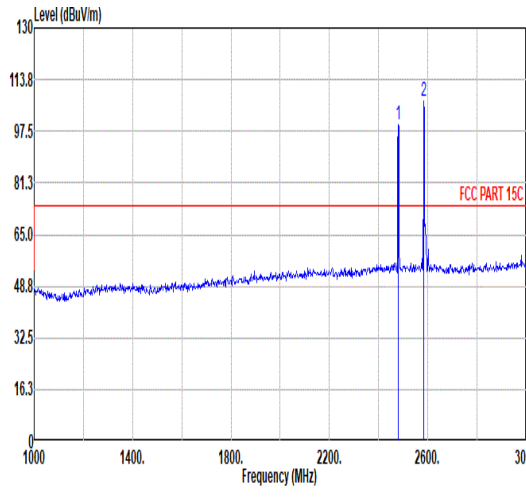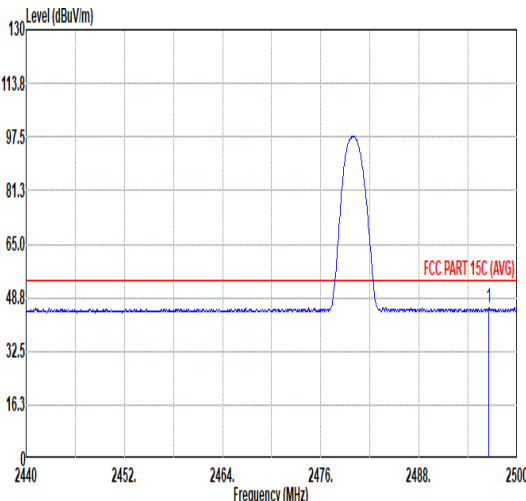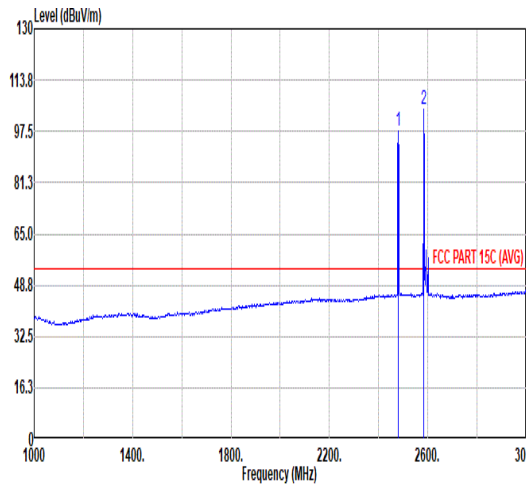

		1																																																																		
Mode		Co-location Band Edge																																																																		
		Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																		
ANT		6																																																																		
Pol.		Horizontal																																																																		
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.78</td><td>56.44</td><td>74.00</td><td>-17.56</td><td>43.31</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>309</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	309	PEAK											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	309	PEAK																																																									
Fundamental																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.82</td><td>-----</td><td>86.74</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>307</td><td>309</td><td>Peak</td></tr><tr><td>2</td><td>2584.00</td><td>106.92</td><td>-----</td><td>93.93</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak	2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak																																																									
2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309	Peak																																																									
Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.52</td><td>45.66</td><td>54.00</td><td>-8.34</td><td>32.47</td><td>32.68</td><td>6.75</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2496.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE																																																								
Average																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.66</td><td>-----</td><td>84.58</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>307</td><td>309</td><td>Average</td></tr><tr><td>2</td><td>2584.00</td><td>104.57</td><td>-----</td><td>91.58</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>Average</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average	2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average																																																									
2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309	Average																																																									







		1																																																																																																										
Mode		Co-location Band Edge																																																																																																										
		Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																										
ANT		6																																																																																																										
Pol.	Vertical										Fundamental																																																																																																	
Peak																																																																																																												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	94.01	-----	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak	2 2584.00	106.81	-----	-----	93.82	32.36	6.87	32.24	6.00	245	0 Peak									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 2480.00	94.01	-----	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak																																																																																																		
2 2584.00	106.81	-----	-----	93.82	32.36	6.87	32.24	6.00	245	0 Peak																																																																																																		
Avg																																																																																																												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	91.80	-----	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average	2 2584.00	104.50	-----	-----	91.51	32.36	6.87	32.24	6.00	245	0 Average									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 2480.00	91.80	-----	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average																																																																																																		
2 2584.00	104.50	-----	-----	91.51	32.36	6.87	32.24	6.00	245	0 Average																																																																																																		





Mode	1																																																											
	Co-location Harmonic																																																											
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																											
ANT	6																																																											
Pol.	Horizontal						Vertical																																																					
Peak Avg																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.34</td><td>74.00</td><td>-32.66</td><td>58.89</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>---</td><td>---</td></tr><tr><td>2</td><td>5310.40</td><td>59.83</td><td>74.00</td><td>-14.17</td><td>76.23</td><td>34.52</td><td>9.89</td><td>60.81</td><td>0.00</td><td>---</td><td>---</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg	1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	---	---	2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	---	---
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																	
1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	---	---																																																	
2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	---	---																																																	
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>59.49</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>---</td><td>---</td></tr><tr><td>2</td><td>5313.20</td><td>60.97</td><td>74.00</td><td>-13.03</td><td>77.36</td><td>34.53</td><td>9.89</td><td>60.81</td><td>0.00</td><td>---</td><td>---</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg	1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	---	---	2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	---	---	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																	
1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	---	---																																																	
2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	---	---																																																	

Note: #2 is co-location of WLAN 5G_CH62 TX fundamental signal.

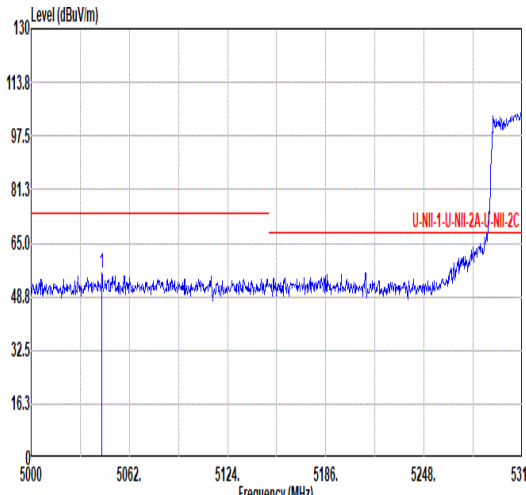
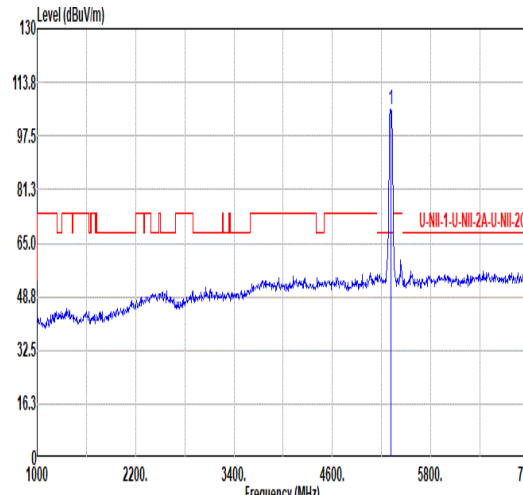
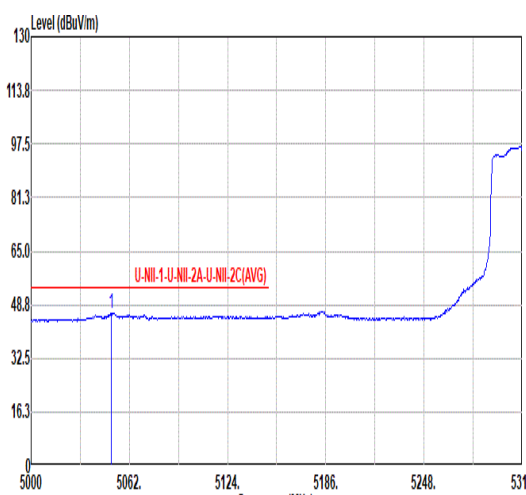
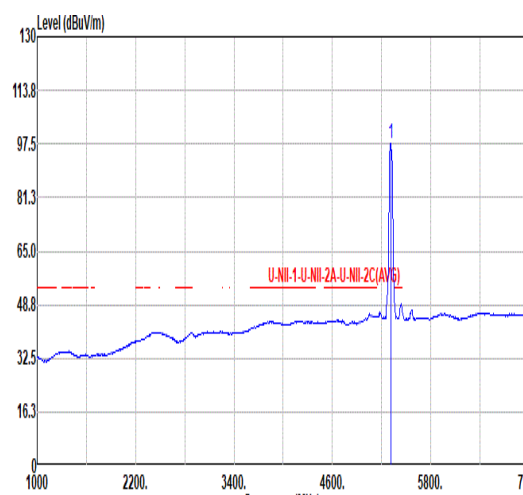


		1																																																						
Mode		Co-location Band Edge																																																						
		802.11ax HE40_CH62_5310MHz_Full																																																						
ANT		CDD 6+8																																																						
Pol.		Horizontal																																																						
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5044.64</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>44.14</td><td>34.00</td><td>9.69</td><td>31.95</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100	334 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>105.68</td><td>-----</td><td>93.06</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	105.68	-----	93.06	34.53	9.89	31.80	0.00	100	334 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5310.00	105.68	-----	93.06	34.53	9.89	31.80	0.00	100	334 PEAK																																														
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5050.53</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>34.51</td><td>34.00</td><td>9.70</td><td>31.94</td><td>0.00</td><td>100</td><td>334 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334 AVERAGE																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>97.53</td><td>-----</td><td>84.93</td><td>34.52</td><td>9.89</td><td>31.81</td><td>0.00</td><td>100</td><td>334 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	97.53	-----	84.93	34.52	9.89	31.81	0.00	100	334 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5310.00	97.53	-----	84.93	34.52	9.89	31.81	0.00	100	334 AVERAGE																																														

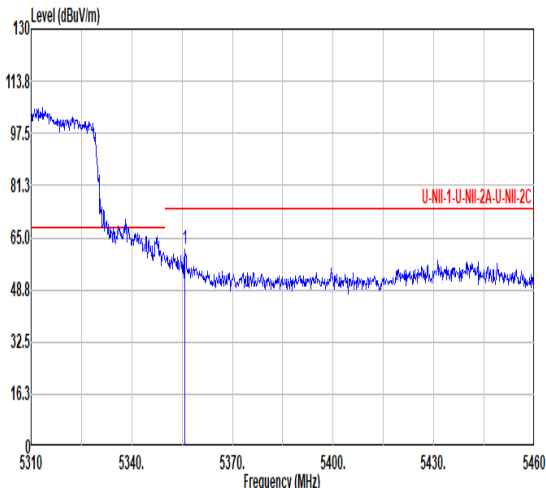
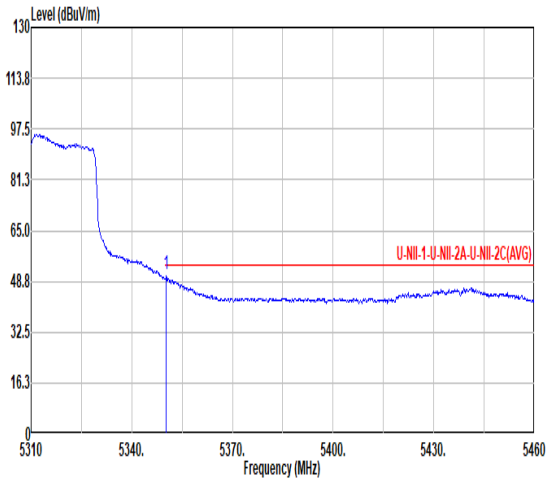


Mode	1																																														
	Co-location Band Edge																																														
	802.11ax HE40_CH62_5310MHz_Full																																														
ANT	CDD 6+8																																														
Pol.	Horizontal										Fundamental																																				
Peak	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5355.90</td><td>61.36</td><td>74.00</td><td>-12.64</td><td>48.62</td><td>34.61</td><td>9.91</td><td>31.78</td><td>0.00</td><td>100</td><td>334</td><td>PEAK</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5355.90	61.36	74.00	-12.64	48.62	34.61	9.91	31.78	0.00	100	334	PEAK	Blank
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5355.90	61.36	74.00	-12.64	48.62	34.61	9.91	31.78	0.00	100	334	PEAK																																				
Avg	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5350.20</td><td>50.85</td><td>54.00</td><td>-3.15</td><td>38.12</td><td>34.60</td><td>9.91</td><td>31.78</td><td>0.00</td><td>100</td><td>334</td><td>Average</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.20	50.85	54.00	-3.15	38.12	34.60	9.91	31.78	0.00	100	334	Average	Blank
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5350.20	50.85	54.00	-3.15	38.12	34.60	9.91	31.78	0.00	100	334	Average																																				

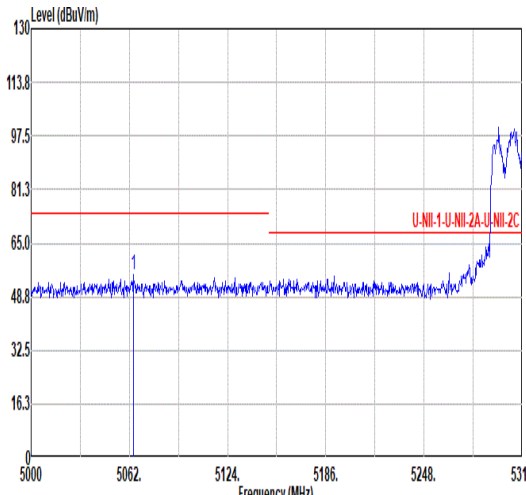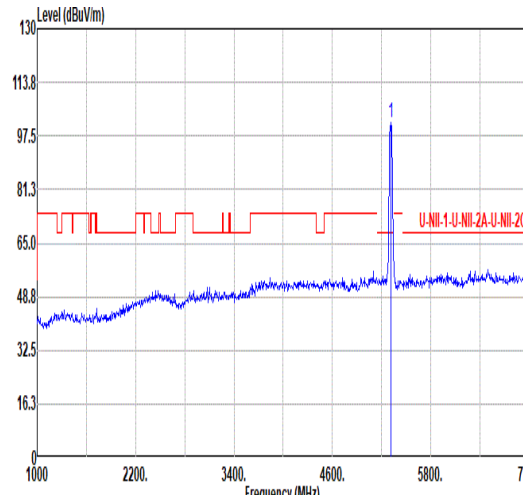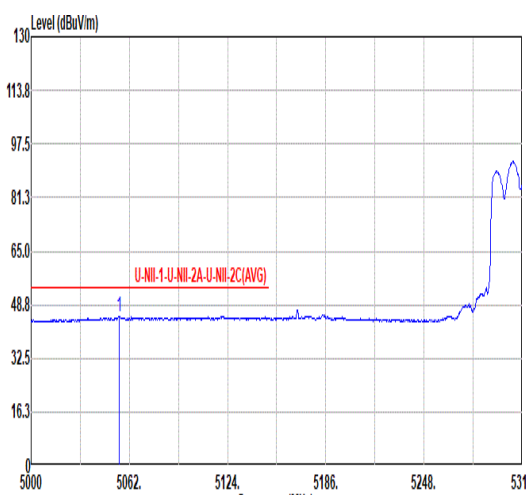
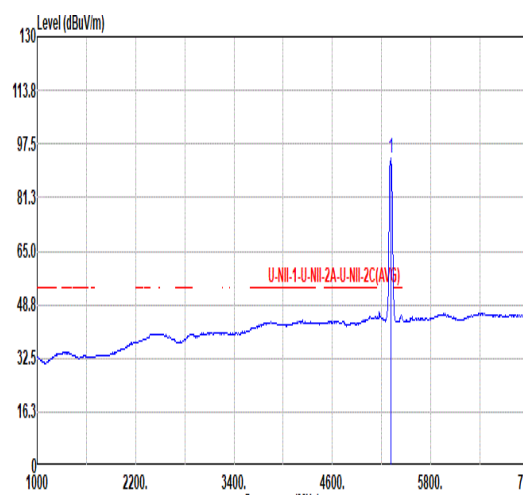


		1																																																																																																												
Mode		Co-location Band Edge																																																																																																												
		802.11ax HE40_CH62_5310MHz_Full																																																																																																												
ANT		CDD 6+8																																																																																																												
Pol.		Vertical					Fundamental																																																																																																							
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5064.48</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>43.45</td><td>34.03</td><td>9.71</td><td>31.94</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>101.35</td><td>-----</td><td>88.73</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	101.35	-----	88.73	34.53	9.89	31.80	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311 PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5310.00	101.35	-----	88.73	34.53	9.89	31.80	0.00	300	311 PEAK																																																																																																				
Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5055.49</td><td>45.23</td><td>54.00</td><td>-8.77</td><td>33.46</td><td>34.01</td><td>9.70</td><td>31.94</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>93.01</td><td>-----</td><td>80.39</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	93.01	-----	80.39	34.53	9.89	31.80	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311 AVERAGE																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5310.00	93.01	-----	80.39	34.53	9.89	31.80	0.00	300	311 AVERAGE																																																																																																				

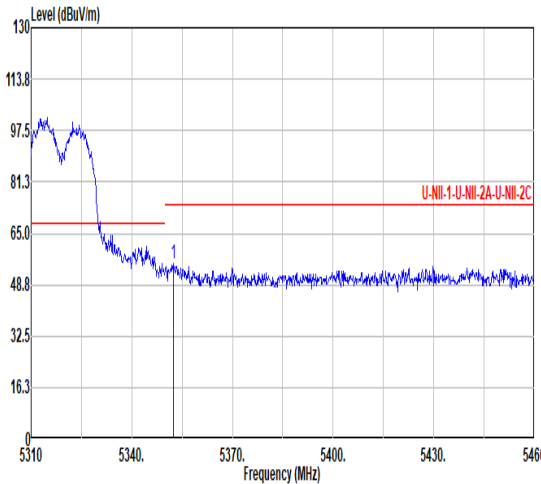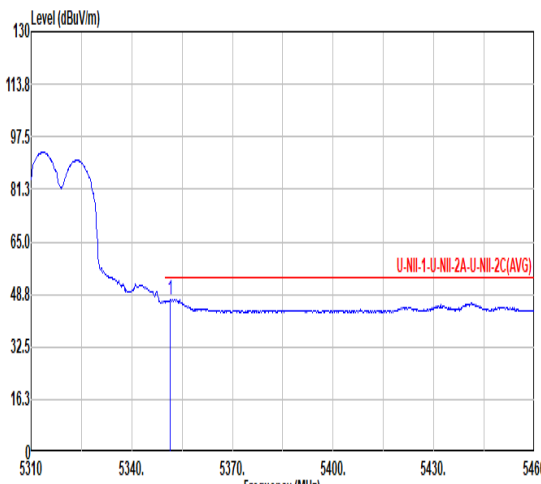



Mode	1																																																						
	Co-location Band Edge																																																						
	802.11ax HE40_CH62_5310MHz_Full																																																						
ANT	CDD 6+8																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5352.45</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>42.88</td><td>34.60</td><td>9.91</td><td>31.78</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5352.45	55.61	74.00	-18.39	42.88	34.60	9.91	31.78	0.00	300	311 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5352.45	55.61	74.00	-18.39	42.88	34.60	9.91	31.78	0.00	300	311 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5351.55</td><td>47.26</td><td>54.00</td><td>-6.74</td><td>34.53</td><td>34.60</td><td>9.91</td><td>31.78</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5351.55	47.26	54.00	-6.74	34.53	34.60	9.91	31.78	0.00	300	311 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5351.55	47.26	54.00	-6.74	34.53	34.60	9.91	31.78	0.00	300	311 AVERAGE																																													

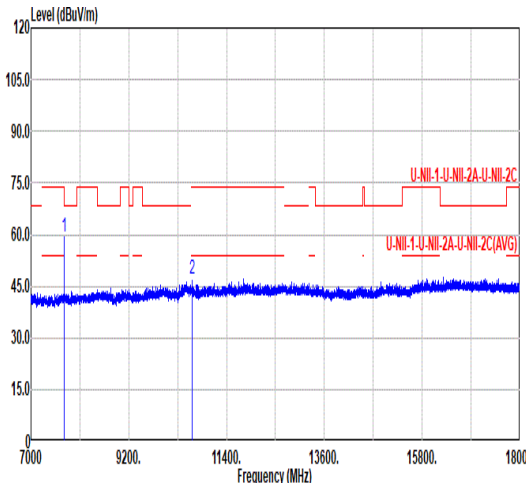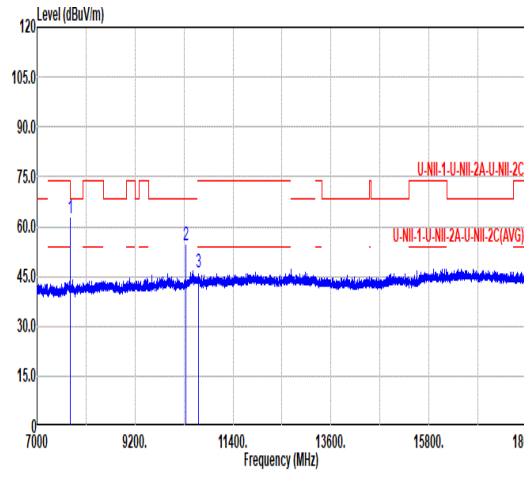

Mode	1																																																																																																																														
	Co-location Harmonic																																																																																																																														
	802.11ax HE40_CH62_5310MHz_Full																																																																																																																														
ANT	CDD 6+8																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7752.40	59.18	70.20	-11.02	71.84	35.90	12.10	60.66	0.00	100	262	Peak	2	10620.00	46.88	74.00	-27.12	55.95	37.88	14.31	61.26	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7752.40</td><td>62.37</td><td>70.20</td><td>-7.83</td><td>75.03</td><td>35.90</td><td>12.10</td><td>60.66</td><td>0.00</td><td>100</td><td>265</td><td>Peak</td></tr><tr><td>2</td><td>10336.30</td><td>54.56</td><td>68.20</td><td>-13.64</td><td>64.36</td><td>37.37</td><td>14.11</td><td>61.28</td><td>0.00</td><td>100</td><td>91</td><td>Peak</td></tr><tr><td>3</td><td>10620.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>55.35</td><td>37.88</td><td>14.31</td><td>61.26</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7752.40	62.37	70.20	-7.83	75.03	35.90	12.10	60.66	0.00	100	265	Peak	2	10336.30	54.56	68.20	-13.64	64.36	37.37	14.11	61.28	0.00	100	91	Peak	3	10620.00	46.28	74.00	-27.72	55.35	37.88	14.31	61.26	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	7752.40	59.18	70.20	-11.02	71.84	35.90	12.10	60.66	0.00	100	262	Peak																																																																																																																			
2	10620.00	46.88	74.00	-27.12	55.95	37.88	14.31	61.26	0.00	---	---	PEAK																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	7752.40	62.37	70.20	-7.83	75.03	35.90	12.10	60.66	0.00	100	265	Peak																																																																																																																			
2	10336.30	54.56	68.20	-13.64	64.36	37.37	14.11	61.28	0.00	100	91	Peak																																																																																																																			
3	10620.00	46.28	74.00	-27.72	55.35	37.88	14.31	61.26	0.00	---	---	PEAK																																																																																																																			

Note: #1 is the 3rd harmonic from LTE B41, the limit should be -25dBm and converted to field strength limit 70.2dBuV/m @3m distance, the test results is Pass.

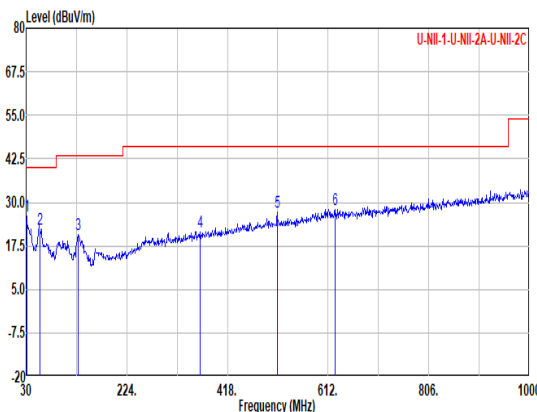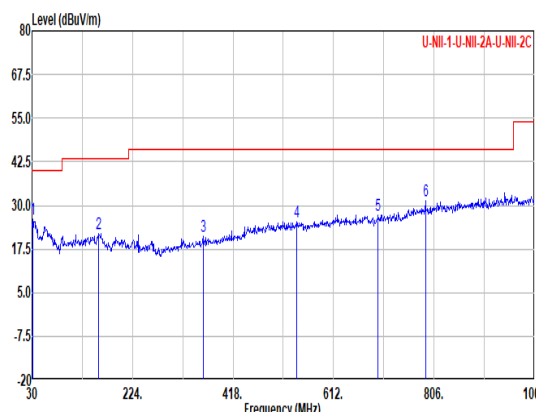

Mode	1																																																																																																																																																																																																																																										
	30-1G																																																																																																																																																																																																																																										
	802.11ax HE40_CH62_5310MHz_Full																																																																																																																																																																																																																																										
ANT	CDD 6+8																																																																																																																																																																																																																																										
Pol.	Horizontal												Vertical																																																																																																																																																																																																																														
Peak																																																																																																																																																																																																																																											
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>25.90</td><td>40.00</td><td>-14.10</td><td>33.01</td><td>25.09</td><td>0.76</td><td>32.96</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>57.16</td><td>22.33</td><td>40.00</td><td>-17.67</td><td>41.19</td><td>12.85</td><td>1.04</td><td>32.75</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>130.88</td><td>20.91</td><td>43.50</td><td>-22.59</td><td>34.37</td><td>17.56</td><td>1.69</td><td>32.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>364.65</td><td>21.59</td><td>46.00</td><td>-24.41</td><td>30.88</td><td>20.98</td><td>2.83</td><td>33.10</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>514.03</td><td>27.10</td><td>46.00</td><td>-18.90</td><td>33.04</td><td>24.33</td><td>3.15</td><td>33.42</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>625.58</td><td>27.94</td><td>46.00</td><td>-18.06</td><td>31.46</td><td>26.32</td><td>3.69</td><td>33.53</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		deg		1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	---	---	Peak	2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	---	---	Peak	3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	---	---	Peak	4	364.65	21.59	46.00	-24.41	30.88	20.98	2.83	33.10	0.00	---	---	Peak	5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	---	---	Peak	6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	---	---	Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>25.95</td><td>40.00</td><td>-14.05</td><td>33.76</td><td>24.39</td><td>0.76</td><td>32.96</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>159.01</td><td>21.96</td><td>43.50</td><td>-21.54</td><td>36.23</td><td>16.57</td><td>1.84</td><td>32.68</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>360.77</td><td>20.98</td><td>46.00</td><td>-25.02</td><td>30.36</td><td>20.88</td><td>2.81</td><td>33.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>540.22</td><td>25.32</td><td>46.00</td><td>-20.68</td><td>30.76</td><td>24.90</td><td>3.18</td><td>33.52</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>698.33</td><td>27.11</td><td>46.00</td><td>-18.89</td><td>30.02</td><td>26.71</td><td>3.95</td><td>33.57</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>789.51</td><td>31.24</td><td>46.00</td><td>-14.76</td><td>32.30</td><td>28.04</td><td>4.19</td><td>33.29</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		deg		1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	---	---	Peak	2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	---	---	Peak	3	360.77	20.98	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	---	---	Peak	4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	---	---	Peak	5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	---	---	Peak	6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	---	---
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		deg																																																																																																																																																																																																																																
1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	---	---	Peak																																																																																																																																																																																																																															
2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	---	---	Peak																																																																																																																																																																																																																															
3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	---	---	Peak																																																																																																																																																																																																																															
4	364.65	21.59	46.00	-24.41	30.88	20.98	2.83	33.10	0.00	---	---	Peak																																																																																																																																																																																																																															
5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	---	---	Peak																																																																																																																																																																																																																															
6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	---	---	Peak																																																																																																																																																																																																																															
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		deg																																																																																																																																																																																																																																
1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	---	---	Peak																																																																																																																																																																																																																															
2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	---	---	Peak																																																																																																																																																																																																																															
3	360.77	20.98	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	---	---	Peak																																																																																																																																																																																																																															
4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	---	---	Peak																																																																																																																																																																																																																															
5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	---	---	Peak																																																																																																																																																																																																																															
6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	---	---	Peak																																																																																																																																																																																																																															



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-1, XT2437-2
FCC ID : IHDT56AS8
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 28, 2024 ~ Aug. 08, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power and Emission Designator	7
1.7 Testing Location	7
1.8 Test Software	7
1.9 Applicable Standards	8
1.10 Specification of Accessory	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels.....	11
3 CONDUCTED TEST RESULT.....	12
3.1 Measuring Instruments.....	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test.....	12
3.4 Conducted Output Power and ERP/EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Field Strength of Spurious Radiation Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471919A	Rev. 01	Initial issue of report	Aug. 21, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053; §22.917(a); §24.238(a); §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 23.63 dB at 5640.000 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-1, XT2437-2
FCC ID	IHDT56AS8
IMEI Code	Conducted: 355709740017816/355709740017824 Radiation: 355709740016735
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The two model names are only for market segment, no other difference.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824 MHz ~ 849 MHz 1900: 1850MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990 MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850<ANT0>: 32.84 dBm 1900<ANT1>: 29.16 dBm WCDMA: Band V<ANT0>: 23.03 dBm Band II<ANT1>: 22.81 dBm Band IV<ANT1>: 22.92 dBm
Antenna Type	LDS+MDA Antenna
Antenna Gain	Cellular Band<ANT0>: -5.16 dBi PCS Band<ANT1>: -2.18 dBi AWS Band<ANT1>: -1.25 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM(16QAM not support uplink) DC-HSDPA : 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power and Emission Designator

FCC Rule	Frequency Band	Frequency Range (MHz)	Type of Modulation	Maximum ERP/EIRP (W)	Emission Designator
Part 22	GSM850 (GSM)	824.2 ~ 848.8	GMSK	0.3573	244KGXW
Part 22	GSM850 (EDGE)	824.2 ~ 848.8	8PSK	0.0881	239KG7W
Part 22	WCDMA Band V	826.4 ~ 846.6	BPSK	0.0373	4M13F9W
Part 24	GSM1900 (GSM)	1850.2 ~ 1909.8	GMSK	0.4989	242KGXW
Part 24	GSM1900 (EDGE)	1850.2 ~ 1909.8	8PSK	0.2089	245KG7W
Part 24	WCDMA Band II	1852.4 ~ 1907.6	BPSK	0.1156	4M14F9W
Part 27	WCDMA Band IV	1712.4 ~ 1752.6	BPSK	0.1469	4M15F9W

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	Part2224_Ver5.0 200330	5.0
2.	03CH03-KS	AUDIX	E3	210616

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.10 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery	Brand Name	Motorola(ATL)	Model Name	RW50
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.(Y/Z Plane)

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link	■ GSM Link
	■ EDGE 1 Tx slots Link	■ EDGE 1 Tx slots Link
GSM 1900	■ GSM Link	■ GSM Link
	■ EDGE 1 Tx slots Link	■ EDGE 1 Tx slots Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

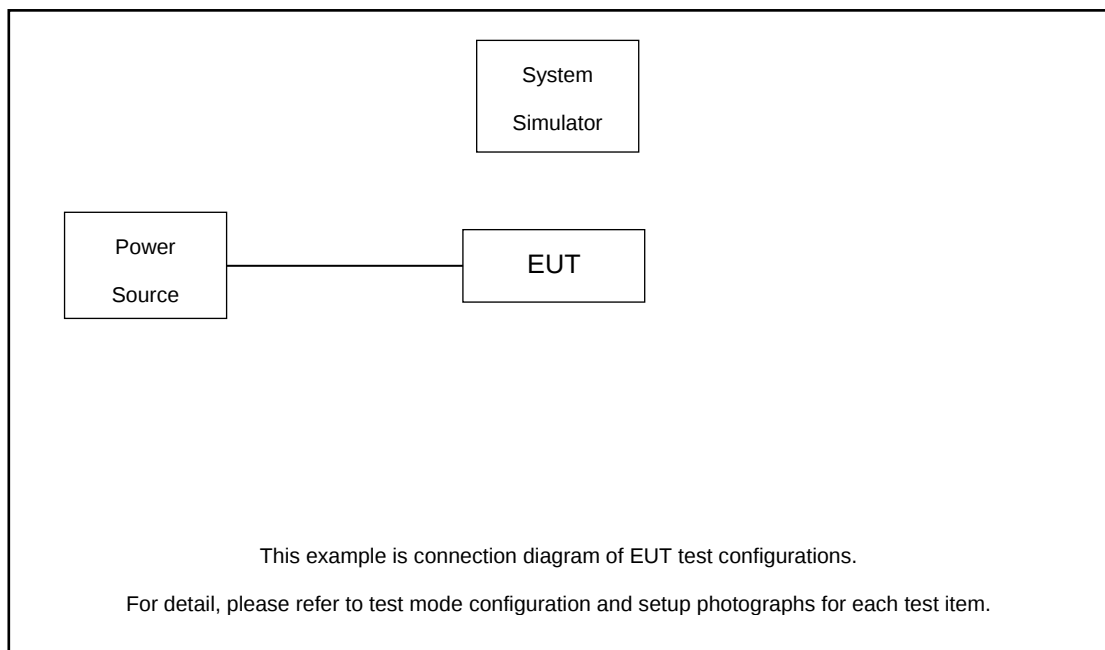

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 5.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.2 + 10 = 15.2 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

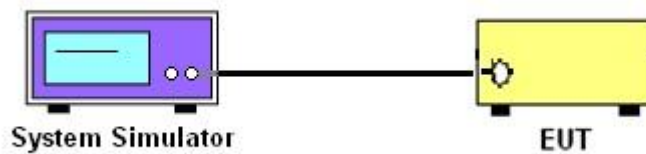

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

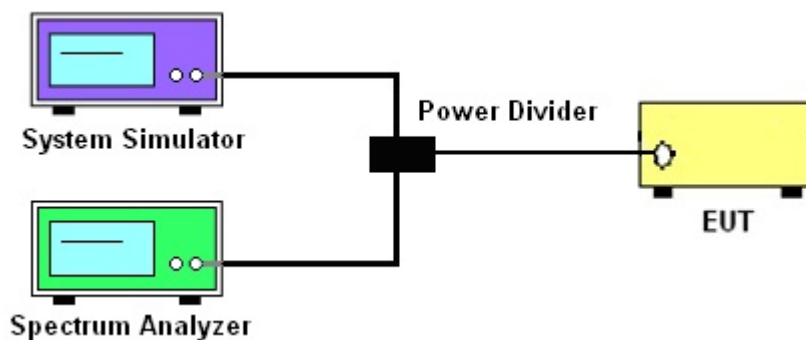

3.2.3 Frequency Stability

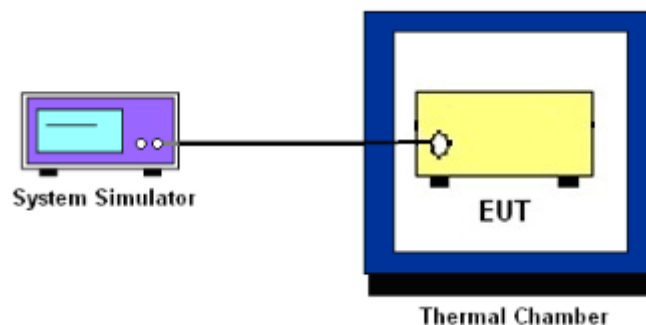

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

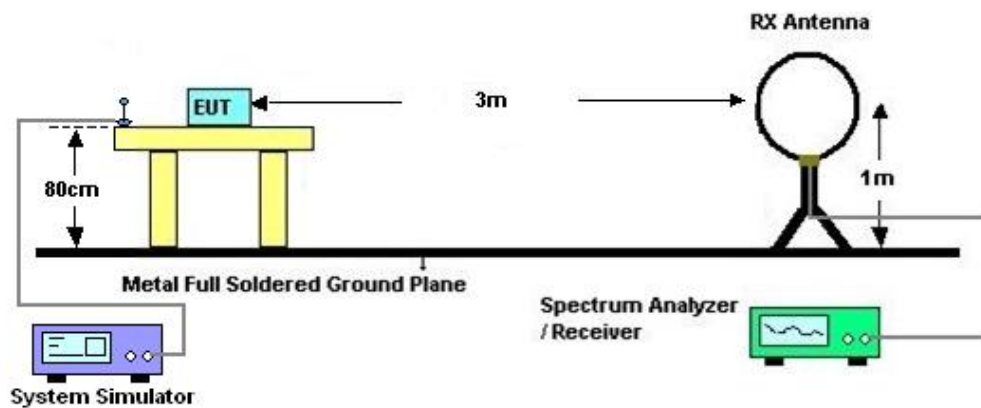

4.2.2 For radiated test from 30MHz to 1GHz

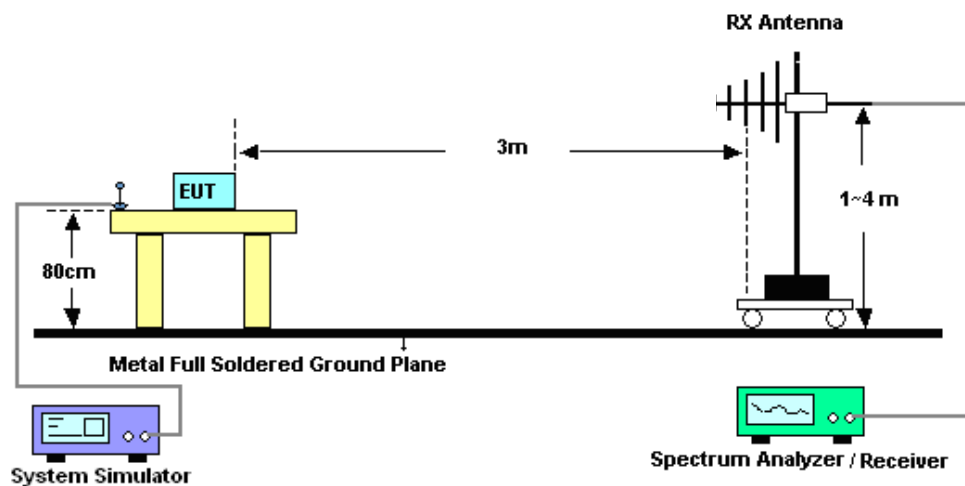

4.2.3 For radiated test above 1GHz

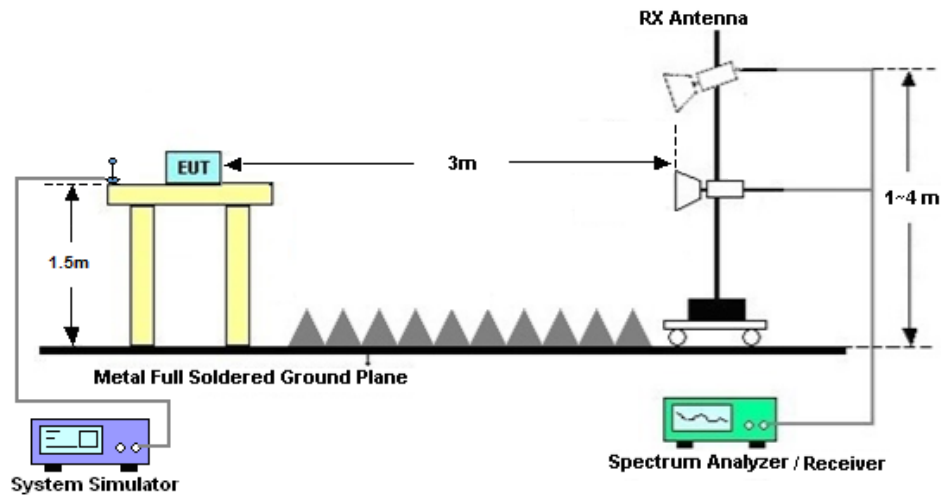

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 28, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 28, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 28, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.50 dB
Frequency Stability	±0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and ERP/EIRP

GSM850_ANT.0

GSM850	Burst Average Power (dBm)			ERP(W)		
TX Channel	128	189	251			
Frequency (MHz)	824.2	836.4	848.8	L	M	H
GSM 1 Tx slot	32.75	32.84	32.78	0.3499	0.3573	0.3524
GPRS 1 Tx slot	32.72	32.81	32.76	0.3475	0.3548	0.3508
GPRS 2 Tx slots	29.53	29.31	29.55	0.1667	0.1585	0.1675
GPRS 3 Tx slots	27.72	27.53	27.50	0.1099	0.1052	0.1045
GPRS 4 Tx slots	26.41	26.38	26.30	0.0813	0.0807	0.0793
EDGE 1 Tx slot	26.76	26.71	26.73	0.0881	0.0871	0.0875
EDGE 2 Tx slots	25.39	25.32	25.35	0.0643	0.0632	0.0637
EDGE 3 Tx slots	23.86	23.66	23.70	0.0452	0.0432	0.0436
EDGE 4 Tx slots	21.64	21.65	21.54	0.0271	0.0272	0.0265

GSM1900_ANT.1

GSM1900	Burst Average Power (dBm)			EIRP(W)		
TX Channel	512	661	810			
Frequency (MHz)	1850.2	1880	1909.8	L	M	H
GSM 1 Tx slot	29.15	29.16	29.09	0.4977	0.4989	0.4909
GPRS 1 Tx slot	29.12	29.14	29.05	0.4943	0.4966	0.4864
GPRS 2 Tx slots	25.60	25.63	25.81	0.2198	0.2213	0.2307
GPRS 3 Tx slots	23.92	23.73	23.93	0.1493	0.1429	0.1496
GPRS 4 Tx slots	22.30	22.37	22.38	0.1028	0.1045	0.1047
EDGE 1 Tx slot	25.37	25.19	25.38	0.2084	0.2000	0.2089
EDGE 2 Tx slots	23.65	23.64	23.75	0.1403	0.1400	0.1435
EDGE 3 Tx slots	21.78	21.76	21.81	0.0912	0.0908	0.0918
EDGE 4 Tx slots	19.85	19.69	19.88	0.0585	0.0564	0.0589



WCDMA Band V_Ant.0

Band		WCDMA V			ERP(W)		
TX Channel		4132	4182	4233			
Rx Channel		4357	4407	4458			
Frequency (MHz)		826.4	836.4	846.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.89	22.96	22.78	0.0361	0.0367	0.0352
3GPP Rel 99	RMC 12.2Kbps	22.95	23.03	22.96	0.0366	0.0373	0.0367
3GPP Rel 6	HSDPA Subtest-1	22.05	22.00	21.90	0.0298	0.0294	0.0288
3GPP Rel 6	HSDPA Subtest-2	22.01	21.98	21.99	0.0295	0.0293	0.0294
3GPP Rel 6	HSDPA Subtest-3	21.53	21.58	21.52	0.0264	0.0267	0.0264
3GPP Rel 6	HSDPA Subtest-4	21.47	21.46	21.52	0.0261	0.0260	0.0264
3GPP Rel 8	DC-HSDPA Subtest-1	22.02	21.95	22.03	0.0296	0.0291	0.0296
3GPP Rel 8	DC-HSDPA Subtest-2	22.04	22.04	21.92	0.0297	0.0297	0.0289
3GPP Rel 8	DC-HSDPA Subtest-3	21.50	21.48	21.37	0.0262	0.0261	0.0255
3GPP Rel 8	DC-HSDPA Subtest-4	21.37	21.62	21.49	0.0255	0.0270	0.0262
3GPP Rel 6	HSUPA Subtest-1	21.93	22.02	22.03	0.0290	0.0296	0.0296
3GPP Rel 6	HSUPA Subtest-2	20.05	19.97	19.96	0.0188	0.0185	0.0184
3GPP Rel 6	HSUPA Subtest-3	21.05	20.94	20.85	0.0237	0.0231	0.0226
3GPP Rel 6	HSUPA Subtest-4	19.84	20.12	20.03	0.0179	0.0191	0.0187
3GPP Rel 6	HSUPA Subtest-5	21.85	22.14	21.86	0.0284	0.0304	0.0285

WCDMA Band II_Ant.1

Band		WCDMA II			EIRP(W)		
TX Channel		9262	9400	9538			
Rx Channel		9662	9800	9938			
Frequency (MHz)		1852.4	1880	1907.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.58	22.80	22.75	0.1096	0.1153	0.1140
3GPP Rel 99	RMC 12.2Kbps	22.76	22.81	22.78	0.1143	0.1156	0.1148
3GPP Rel 6	HSDPA Subtest-1	21.65	21.80	21.66	0.0885	0.0916	0.0887
3GPP Rel 6	HSDPA Subtest-2	21.83	21.92	21.69	0.0923	0.0942	0.0893
3GPP Rel 6	HSDPA Subtest-3	21.42	21.33	21.35	0.0839	0.0822	0.0826
3GPP Rel 6	HSDPA Subtest-4	21.38	21.48	21.39	0.0832	0.0851	0.0834
3GPP Rel 8	DC-HSDPA Subtest-1	21.75	21.83	21.82	0.0906	0.0923	0.0920
3GPP Rel 8	DC-HSDPA Subtest-2	21.84	21.91	21.88	0.0925	0.0940	0.0933
3GPP Rel 8	DC-HSDPA Subtest-3	21.42	21.52	21.42	0.0839	0.0859	0.0839
3GPP Rel 8	DC-HSDPA Subtest-4	21.43	21.48	21.38	0.0841	0.0851	0.0832
3GPP Rel 6	HSUPA Subtest-1	21.72	21.79	21.86	0.0899	0.0914	0.0929
3GPP Rel 6	HSUPA Subtest-2	19.70	19.79	19.67	0.0565	0.0577	0.0561
3GPP Rel 6	HSUPA Subtest-3	20.87	20.88	20.95	0.0740	0.0741	0.0753
3GPP Rel 6	HSUPA Subtest-4	19.76	19.79	19.86	0.0573	0.0577	0.0586
3GPP Rel 6	HSUPA Subtest-5	21.78	21.81	21.80	0.0912	0.0918	0.0916

**WCDMA Band IV_Ant.1**

Band		WCDMA IV			EIRP(W)		
TX Channel		1312	1413	1513			
Rx Channel		1537	1638	1738			
Frequency (MHz)		1712.4	1732.6	1752.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.83	22.70	22.72	0.1439	0.1396	0.1403
3GPP Rel 99	RMC 12.2Kbps	22.87	22.92	22.89	0.1452	0.1469	0.1459
3GPP Rel 6	HSDPA Subtest-1	21.75	21.73	21.84	0.1122	0.1117	0.1146
3GPP Rel 6	HSDPA Subtest-2	21.83	21.75	21.75	0.1143	0.1122	0.1122
3GPP Rel 6	HSDPA Subtest-3	21.33	21.49	21.47	0.1019	0.1057	0.1052
3GPP Rel 6	HSDPA Subtest-4	21.29	21.43	21.42	0.1009	0.1042	0.1040
3GPP Rel 8	DC-HSDPA Subtest-1	21.74	21.90	21.86	0.1119	0.1161	0.1151
3GPP Rel 8	DC-HSDPA Subtest-2	21.68	21.82	21.78	0.1104	0.1140	0.1130
3GPP Rel 8	DC-HSDPA Subtest-3	21.25	21.46	21.40	0.1000	0.1050	0.1035
3GPP Rel 8	DC-HSDPA Subtest-4	21.29	21.37	21.27	0.1009	0.1028	0.1005
3GPP Rel 6	HSUPA Subtest-1	21.74	21.80	21.76	0.1119	0.1135	0.1125
3GPP Rel 6	HSUPA Subtest-2	19.83	19.82	19.78	0.0721	0.0719	0.0713
3GPP Rel 6	HSUPA Subtest-3	20.83	20.89	20.92	0.0908	0.0920	0.0927
3GPP Rel 6	HSUPA Subtest-4	19.95	19.93	19.86	0.0741	0.0738	0.0726
3GPP Rel 6	HSUPA Subtest-5	21.68	21.79	21.85	0.1104	0.1132	0.1148



A1. GSM

Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.23	2.99	PASS
Middle CH	0.23	3.07	
Highest CH	0.23	2.90	

Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.35	3.16	PASS
Middle CH	0.41	3.51	
Highest CH	0.43	3.39	




GSM850 (GSM)

Lowest Channel




GSM850 (EDGE class 8)


Lowest Channel

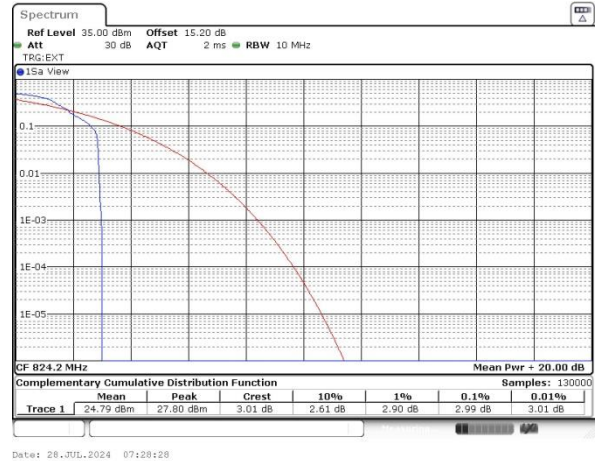


Middle Channel

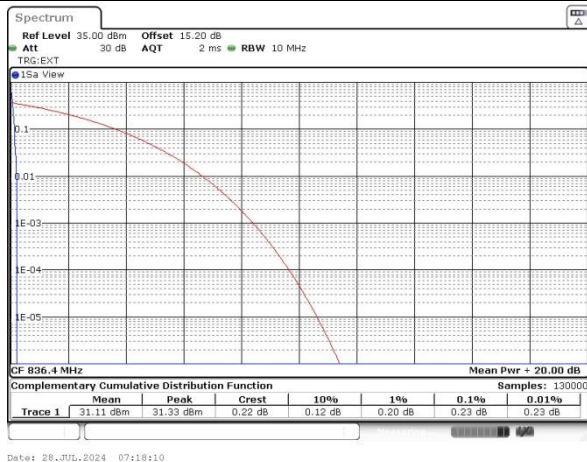


Middle Channel

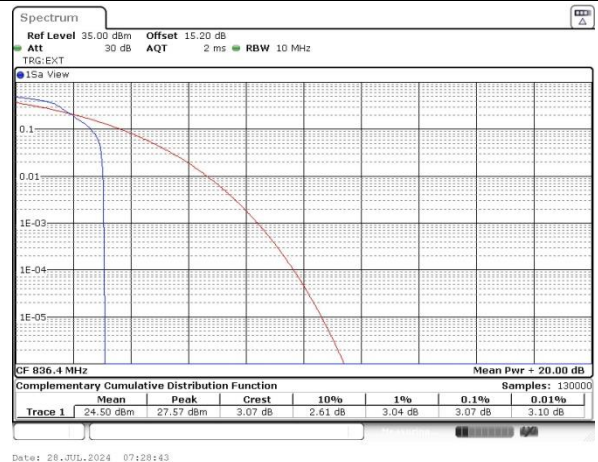

Highest Channel

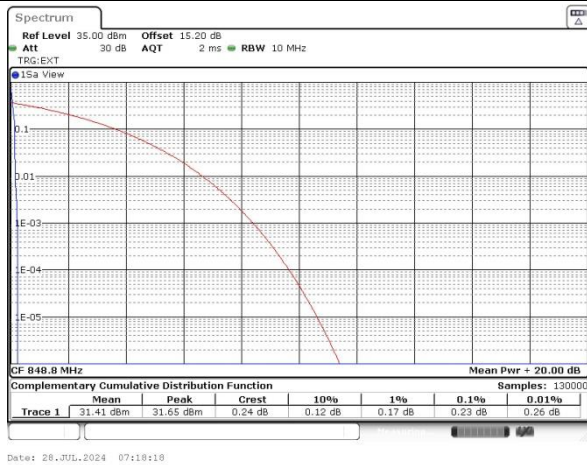

Highest Channel

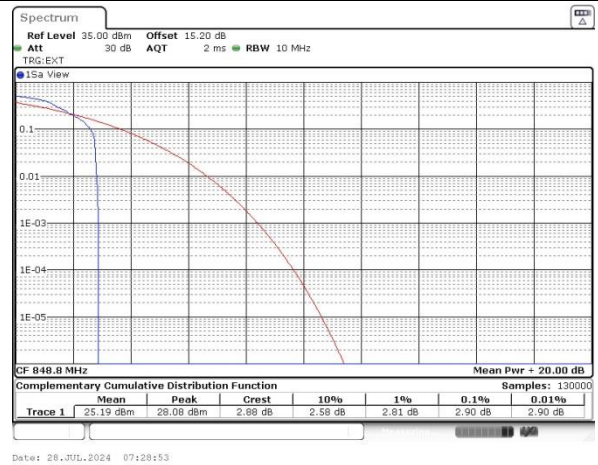



GSM1900 (GSM)

Lowest Channel




GSM1900 (EDGE class 8)


Lowest Channel




Middle Channel

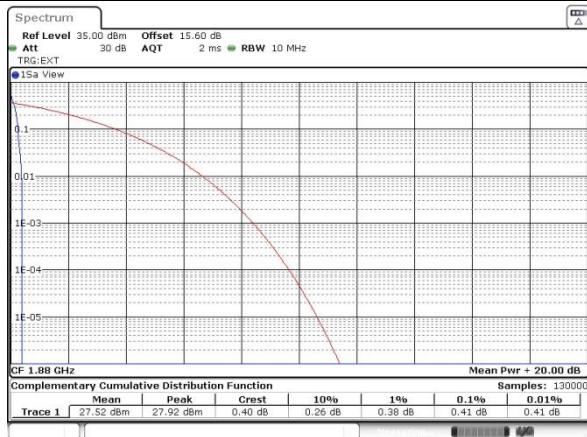


Middle Channel

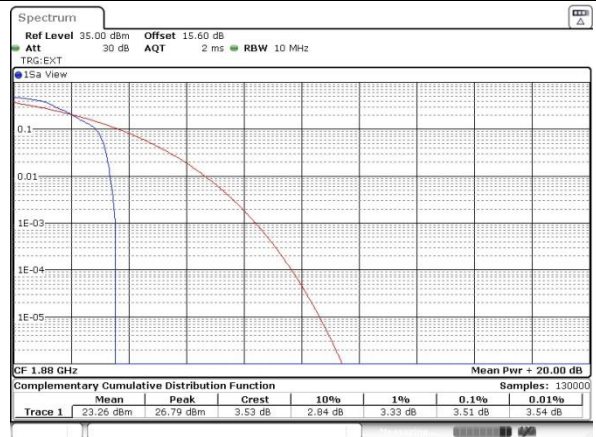

Highest Channel

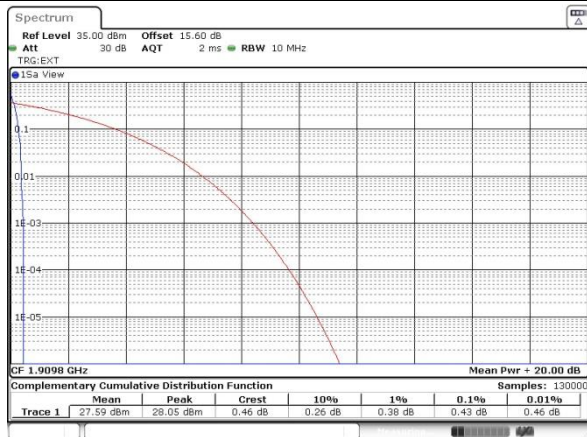

Highest Channel

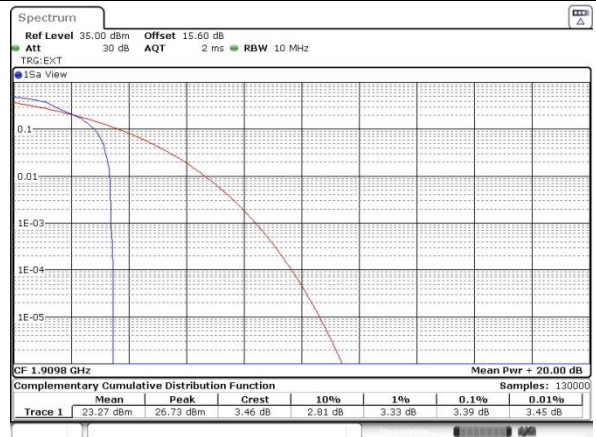



26dB Bandwidth

Mode	GSM850	
Mod.	GSM	EDGE class 8
Lowest CH	0.31	0.32
Middle CH	0.31	0.31
Highest CH	0.31	0.31

Mode	GSM1900	
Mod.	GSM	EDGE class 8
Lowest CH	0.31	0.31
Middle CH	0.31	0.31
Highest CH	0.31	0.31



GSM850 (GSM)

Lowest Channel




GSM850 (EDGE class 8)


Lowest Channel




Middle Channel

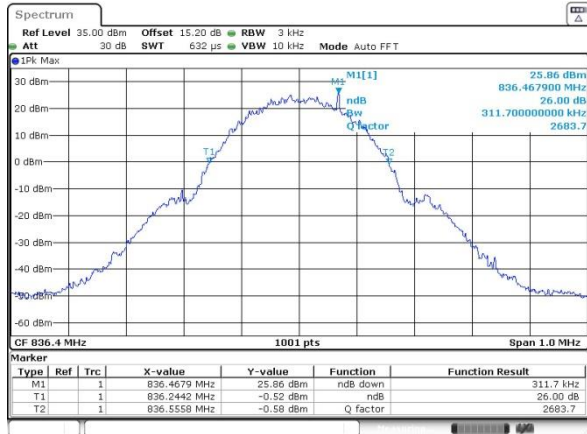


Middle Channel

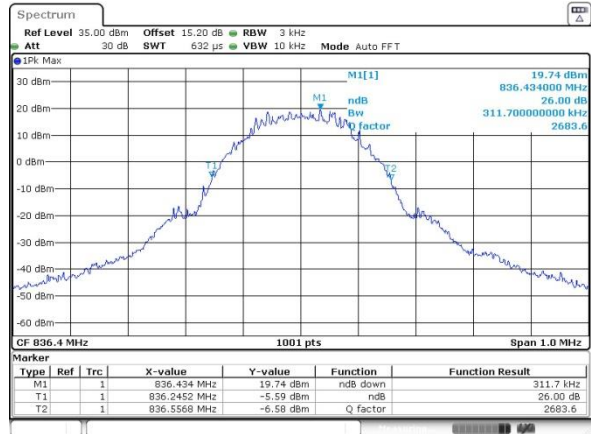

Highest Channel

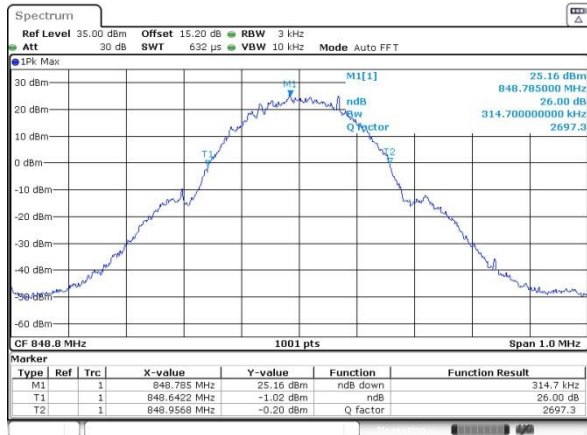


Highest Channel

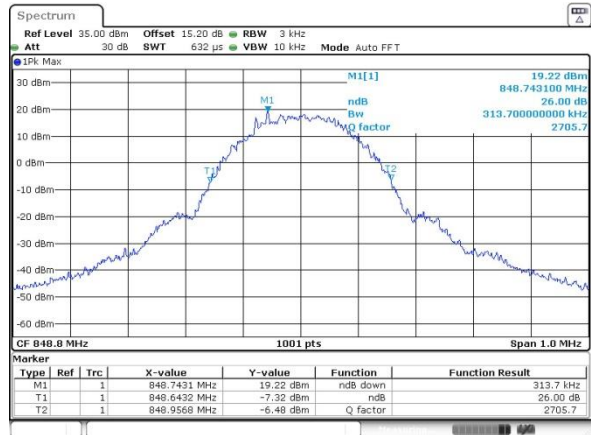



GSM1900 (GSM)


Lowest Channel

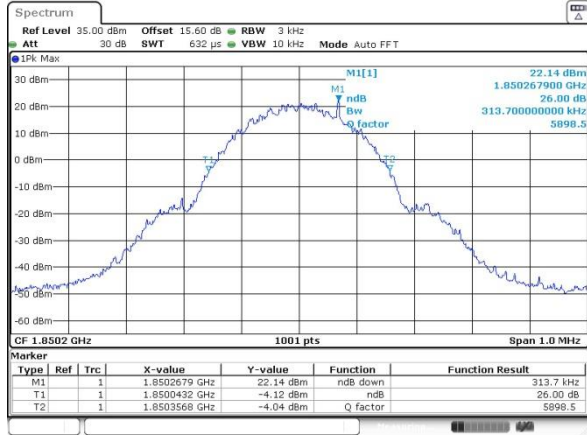

Date: 28.JUL.2024 06:44:29


GSM1900 (EDGE class 8)

Lowest Channel

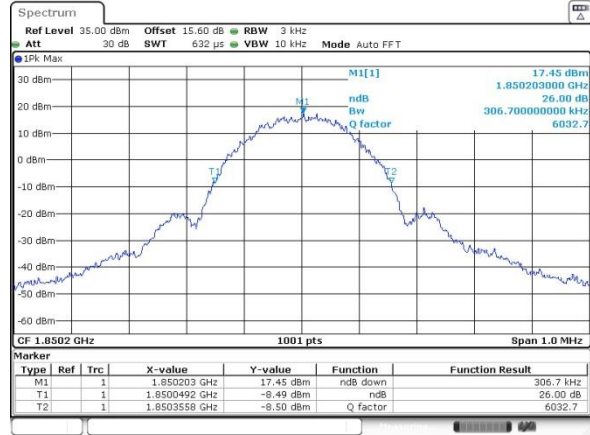

Date: 28.JUL.2024 06:55:37

Middle Channel

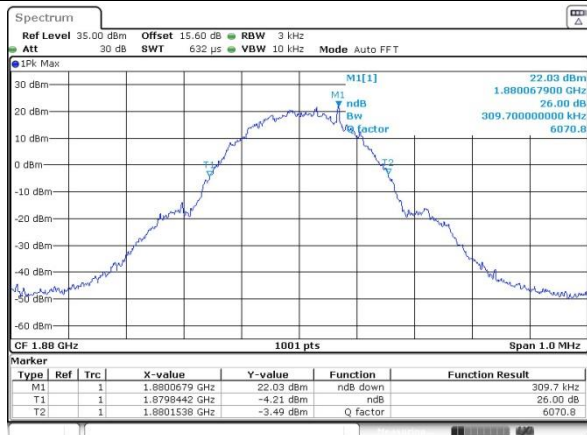


Date: 28.JUL.2024 06:45:03

Middle Channel



Date: 28.JUL.2024 06:56:02

Highest Channel

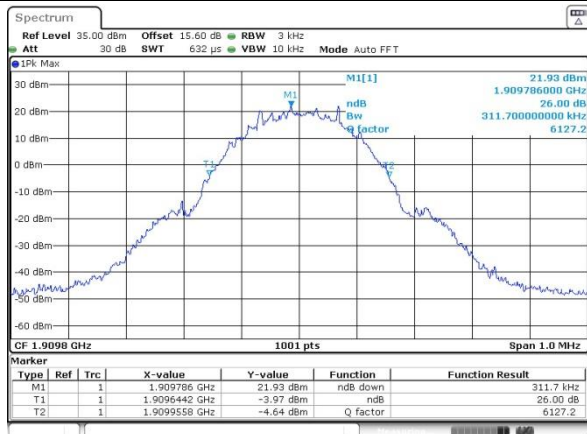

Date: 28.JUL.2024 06:45:24

Highest Channel



Date: 28.JUL.2024 06:56:24



Occupied Bandwidth


Mode	GSM850	
Mod.	GSM	EDGE class 8
Lowest CH	0.244	0.239
Middle CH	0.242	0.239
Highest CH	0.241	0.239

Mode	GSM1900	
Mod.	GSM	EDGE class 8
Lowest CH	0.242	0.242
Middle CH	0.240	0.245
Highest CH	0.241	0.242




GSM850 (GSM)

Lowest Channel

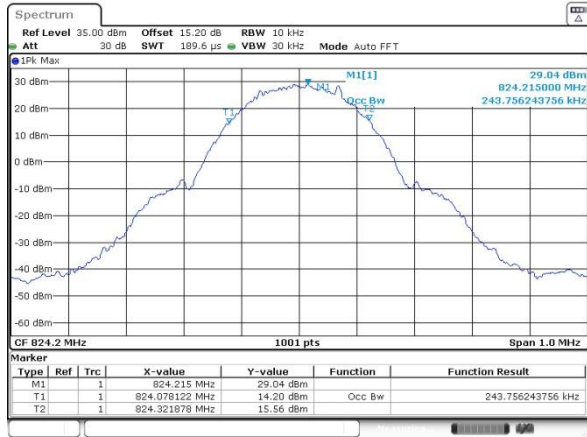


GSM850 (EDGE class 8)


Lowest Channel

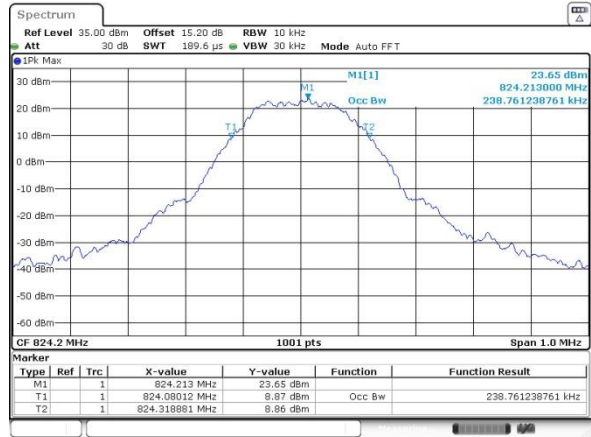


Middle Channel

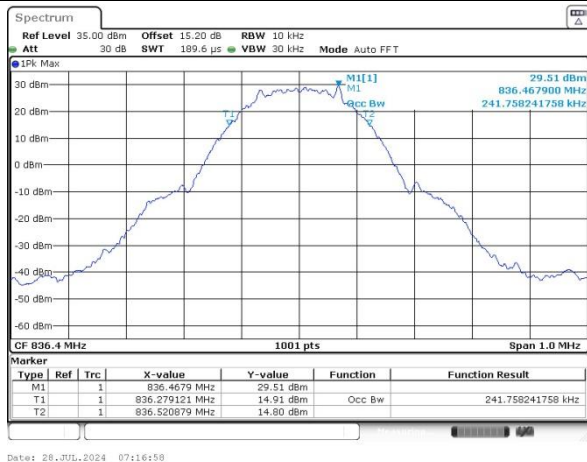


Middle Channel

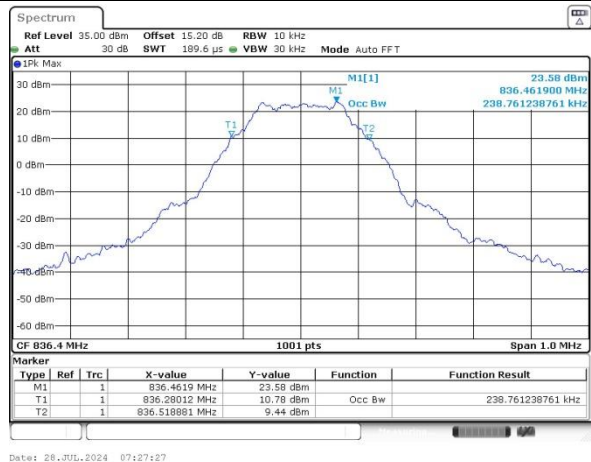

Highest Channel

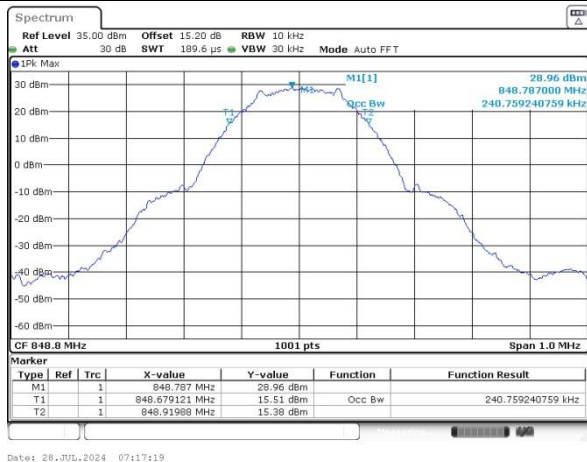


Highest Channel

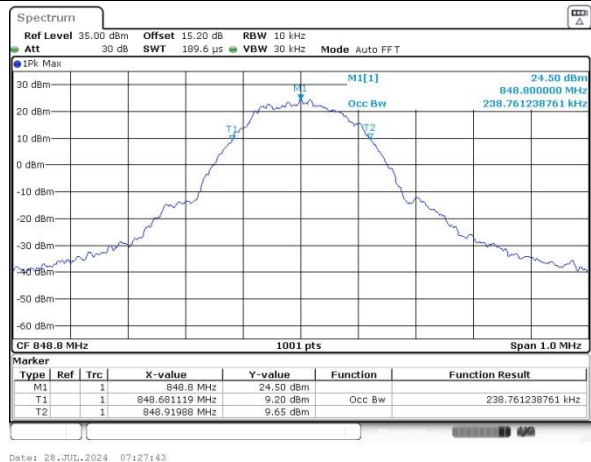




GSM1900 (GSM)

Lowest Channel

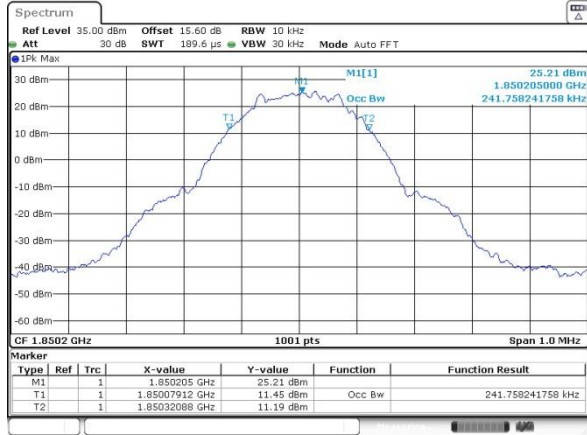

GSM1900 (EDGE class 8)


Lowest Channel

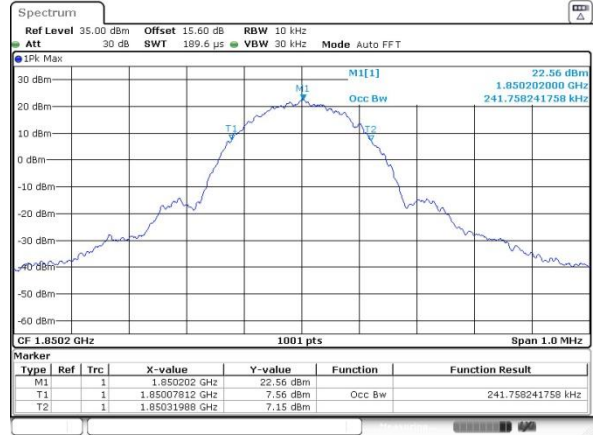


Middle Channel




Middle Channel

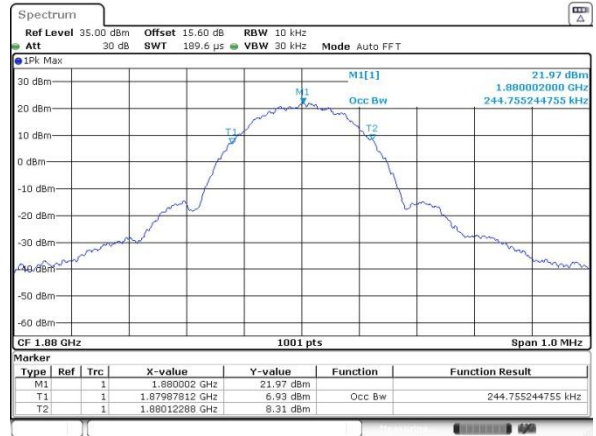

Highest Channel

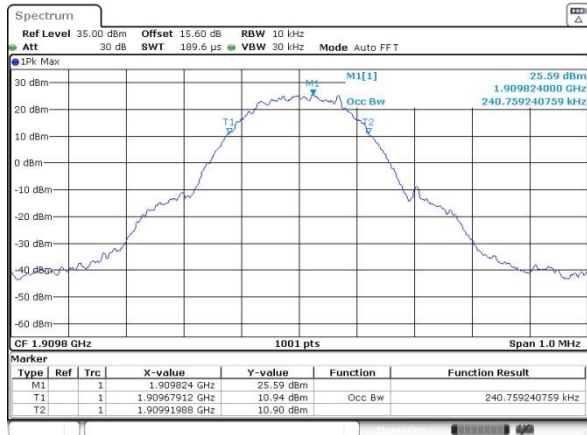

Highest Channel

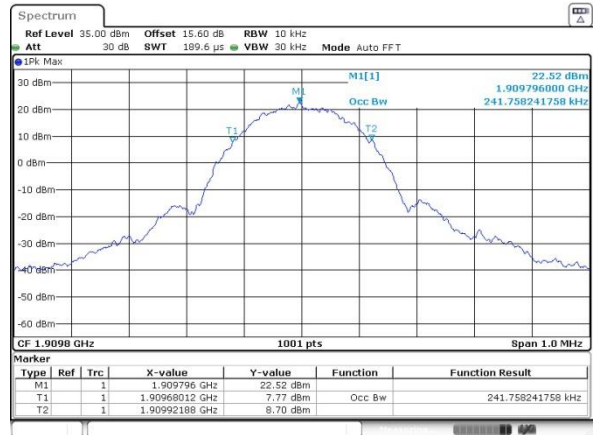





Conducted Band Edge

GSM850 (GSM)

Lowest Band Edge

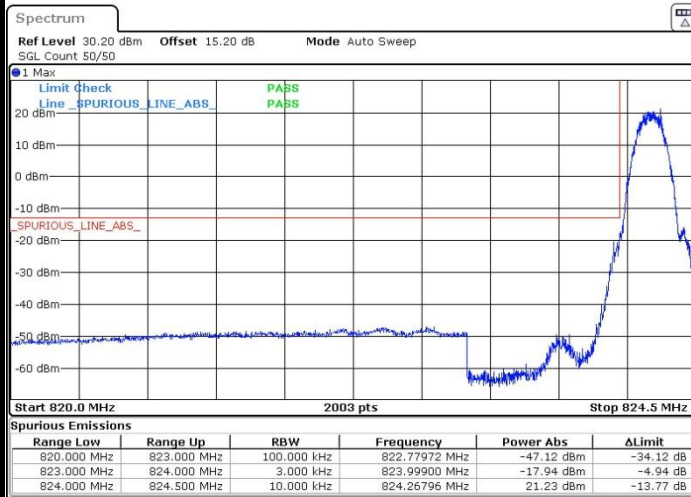


Highest Band Edge

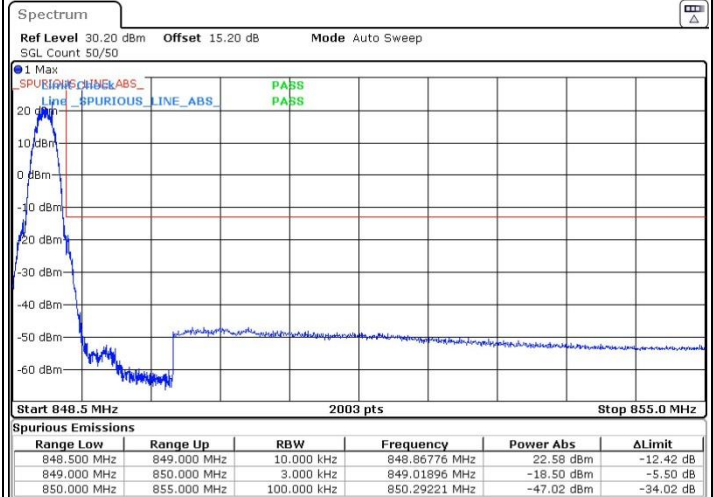


GSM850 (EDGE class 8)

Lowest Band Edge

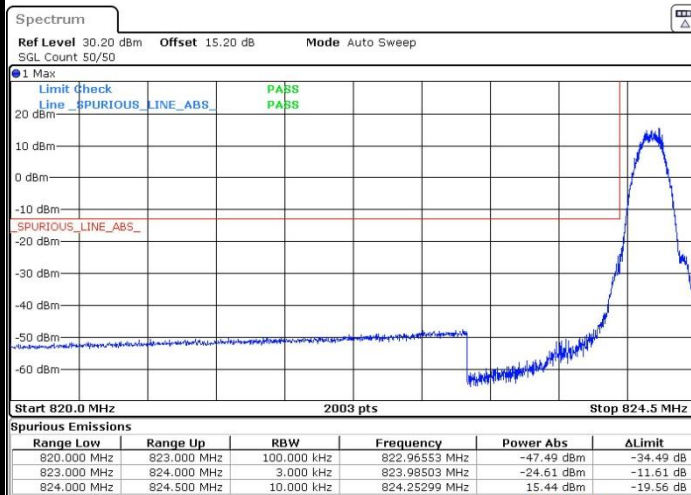

Highest Band Edge

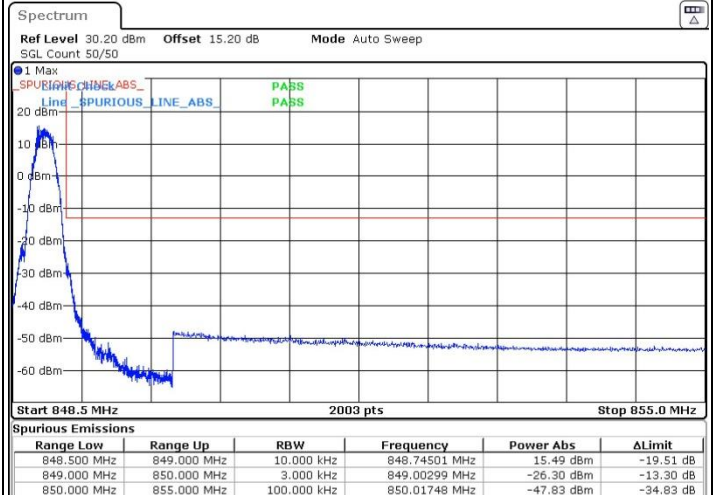




GSM1900 (GSM)

Lowest Band Edge




Highest Band Edge

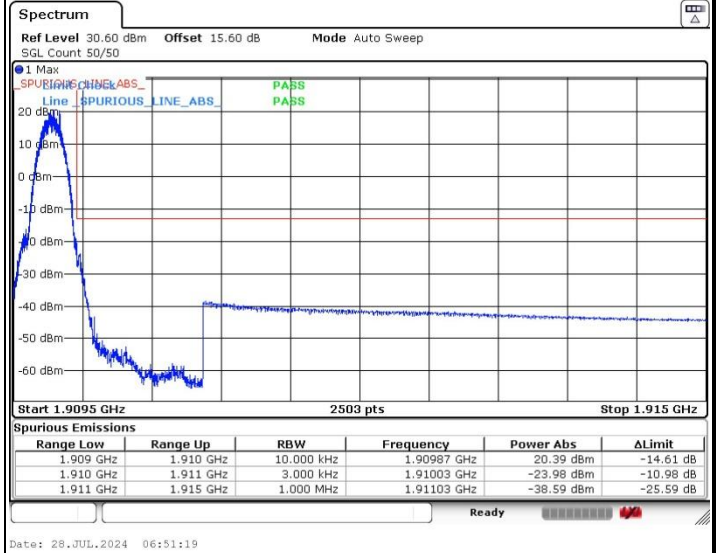

GSM1900 (EDGE class 8)

Lowest Band Edge

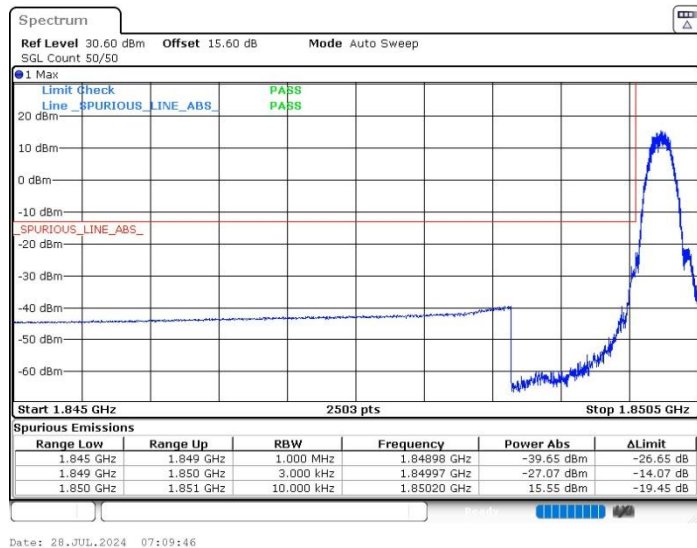

Highest Band Edge

