


MOTOROLA

Exhibit 11: SAR Test Report IHDT56GA1

Date of test: 1/05/2006 through 1/13/2006
Date of Report: 1/18/2006

Laboratory: Motorola Mobile Devices Business Product Safety & Compliance Laboratory
 600 N. US Highway 45
 Room: MW113
 Libertyville, Illinois 60048

Test Responsible: Paul Ma
 RF Engineer

Accreditation: This laboratory is accredited to ISO/IEC 17025-1999 to perform the following tests:



Tests:
 Electromagnetic Specific Absorption Rate

Procedures:
 ANSI/IEEE C95.1-1992, 1999
 (SAR) IEEE C95.3-1991
 IEEE 1528, IEC 62209-1
 FCC OET Bulletin 65 (*including Supplements A, B, C*)
 Australian Communications Authority Radio
 Communications (Electromagnetic Radiation – Human
 Exposure) Standard 1999
 CENELEC EN 50361 (2001)
 APP-0247
 DOI-0876, 0900, 0902, 0904, 0915

Simulated Tissue Preparation
 RF Power Measurement

On the following products or types of products:

Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

A2LA certificate #1651-01

Statement of Compliance:

Motorola declares under its sole responsibility that portable cellular telephone FCC ID IHDT56GA1 to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093). It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2005

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. INTRODUCTION	3
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	3
2.1 Antenna description	3
2.2 Device description.....	3
3. TEST EQUIPMENT USED.....	4
3.1 Dosimetric System	4
3.2 Additional Equipment.....	4
4. ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID	4
5. SYSTEM ACCURACY VERIFICATION.....	5
6. TEST RESULTS.....	6
6.1 Head Adjacent Test Results.....	7
6.2 Body Worn Test Results	10
APPENDIX 1: SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION	13
APPENDIX 2: SAR DISTRIBUTION PLOTS FOR PHANTOM HEAD ADJACENT USE	14
APPENDIX 3: SAR DISTRIBUTION PLOTS FOR BODY WORN CONFIGURATION	15
APPENDIX 4: PROBE CALIBRATION CERTIFICATE	16
APPENDIX 5: MEASUREMENT UNCERTAINTY BUDGET.....	17
APPENDIX 6: PHOTOGRAPHS OF DEVICE UNDER TEST.....	20
APPENDIX 7: DIPOLE CHARACTERIZATION CERTIFICATE	25

1 Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of portable cellular phone (FCC ID IHDT56GA1). The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with FCC OET Bulletin 65 Supplement C 01-01.

2 Description of the Device Under Test

2.1 Antenna description

Type	Internal Antenna	
Location	Top of the Transceiver Back Housing	
Dimensions	Length	85 mm
	Width	1 mm
Configuration	FJA	

2.2 Device description

FCC ID Number	IHDT56GA1								
Serial number	G00V06006N								
Mode(s) of Operation	GSM 850	GSM 900	GSM 1800	GSM 1900	GPRS 850	GPRS 900	GPRS 1800	GPRS 1900	Blue Tooth
Modulation Mode(s)	GMSK	GMSK	GMSK	GMSK	GMSK	GMSK	GMSK	GMSK	GFSK
Maximum Output Power Setting	32.50 dBm	32.50 dBm	30.00 dBm	30.00 dBm	32.50 dBm	32.50 dBm	30.00 dBm	30.00 dBm	20.00 dBm
Duty Cycle	1:8	1:8	1:8	1:8	2:8	2:8	2:8	2:8	1:1
Transmitting Frequency Rang(s)	824.2-848.8 MHz	880.2-914.8 MHz	1710.2-1784.8 MHz	1850.20 – 1909.80 MHz	824.2-848.8 MHz	880.2-914.8 MHz	1710.2-1784.8 MHz	1850.20 – 1909.80 MHz	2400 - 2483.5 MHz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype								
Device Category	Portable								
RF Exposure Limits	General Population / Uncontrolled								

3 Test Equipment Used

3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.5) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall RSS uncertainty of the measurement system is $\pm 11.1\%$ ($K=1$) with an expanded uncertainty of $\pm 22.2\%$ ($K=2$). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg. The list of calibrated equipment used for the measurements is shown below.

Description	Serial Number	Cal Due Date
DASY4 DAE4	376	9/5/2006
DASY4 DAE3	387	7/11/2006
E-Field Probe ET3DV6	1514	7/20/2006
E-Field Probe ET3DV6	1520	4/22/2006
Dipole Validation Kit, D900V2	078	
Dipole Validation Kit, D1800V2	273TR	
Dipole Validation Kit, D2450V2	740	
S.A.M. Phantom used for 800MHz	TP-1106	
S.A.M. Phantom used for 1900MHz	TP-1235	
S.A.M. Phantom used for 2450MHz	TP-1250	

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04632	9/20/2006
Signal Generator HP8648C	3847A04810	8/19/2006
Power Meter E4419B	GB39511084	8/19/2006
Power Meter E4419B	GB39511086	3/22/2006
Power Sensor #1 - E9301A	US39210918	9/21/2006
Power Sensor #2 - E9301A	US39210934	9/21/2006
Power Sensor #1 - E9301A	US39210930	8/29/2006
Power Sensor #2 - E9301A	US39211006	8/29/2006
Network Analyzer HP8753ES	US39172529	2/21/2006
Dielectric Probe Kit HP85070B	US99360070	N/A

4 Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the HP85070 Dielectric Probe Kit. These values, along with the temperature of the tissue simulate are shown in the table below. The recommended limits for maximum permittivity and minimum conductivity are also shown. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. It is seen that the measured parameters are satisfactory for compliance testing.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (°C)
835	Head	Measured, 1/7/2006	43.2	0.92	19.2
		Recommended Limits	41.5 $\pm$ 5%	0.90 $\pm$ 5%	18-25
	Body	Measured, 1/7/2006	53.2	0.96	20.0
		Recommended Limits	55.2 $\pm$ 5%	0.97 $\pm$ 5%	18-25
1880	Head	Measured, 1/6/2006	38.5	1.46	19.3
		Recommended Limits	40.0 $\pm$ 5%	1.40 $\pm$ 5%	18-25
	Body	Measured, 1/6/2006	51.8	1.58	19.2
		Recommended Limits	53.3 $\pm$ 5%	1.52 $\pm$ 5%	18-25
2450	Head	Measured, 1/8/2006	39.0	1.89	21.5
		Recommended Limits	39.2 $\pm$ 5%	1.80 $\pm$ 5%	18-25
	Body	Measured, 1/8/2006	55.0	2.04	21.4
		Recommended Limits	52.7 $\pm$ 5%	1.95 $\pm$ 5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	800MHz Head	800MHz Body	1900MHz Head	1900MHz Body
Sugar	57.0	44.9	--	--
DGBE	--	--	47.0	30.80
Water	40.45	53.06	52.8	68.91
Salt	1.45	0.94	0.2	0.29
HEC	1.0	1.0	--	--
Bact.	0.1	0.1	--	--

5 System Accuracy Verification

A system accuracy verification of the DASY4 v4.6 was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within center section of the SAM phantom.

A SAR measurement was performed to see if the measured SAR was within $\pm$ 10% from the target SAR indicated in Section 8.3.7 Reference SAR Values in IEEE 1528. These tests were done at 900MHz, 1800MHz. These frequencies are within 100MHz of the mid-band frequency of the test device. This is within the allowable window given in Supplement C 01-01 *Appendix D System Verification* section item #5. The test was conducted on the same days as the measurement of the DUT. Recommended limits for maximum permittivity, minimum conductivity are shown in the table below. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. The obtained results from the system accuracy verification are displayed in the table below. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm $\pm$ 0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1. SAR values are normalized to 1W forward power delivered to the dipole.

f (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ϵ_r	σ (S/m)		
900	Measured, 1/6/2006	11.3	40.1	0.96	23.0	18.9
	Measured, 1/7/2006	10.7	42.5	0.98	23.0	20.1
	Recommended Limits	11.3	41.5 $\pm$ 5%	0.97 $\pm$ 5%	18-25	18-25
1800	Measured, 1/6/2006	35.7	38.9	1.38	23.0	19.9
	Recommended Limits	38.1	40.0 $\pm$ 5%	1.4 $\pm$ 5%	18-25	18-25
2450	Measured, 1/8/2006	57.8	39.0	1.89	23.0	21.5
	Recommended Limits	57.6	39.2 $\pm$ 5%	1.80 $\pm$ 5%	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	SN1514	900	5.89	8 of 9
		1810	5.09	8 of 9
		2450	4.38	8 of 9
	SN1520	900	6.32	8 of 9
		1810	5.08	8 of 9
		2450	4.51	8 of 9

6 Test Results

The test sample was operated in a test mode that allows control of the transmitter without the need to place actual phone calls. For the purposes of this test the unit is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in OET Bulletin 65 Supplement C 01-01. Motorola also followed the requirements in Supplement. C / Appendix D: SAR Measurement Procedures, section titled “*Devices Operating Next To A Person’s Ear* “. These directions state “The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).”

The DASY4 v4.6 SAR measurement system specified in section 3.1 was utilized within the intended operations as set by the SPEAG™ setup. The phone was positioned into the measurement configurations using the positioner supplied with the DASY4 v4.6 SAR measurement system. The measured dielectric constant of the material used for the positioner is less than 2.9 and the loss tangent is less than 0.02 ($\pm$ 30%) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and use for measurements. The grid spacing of the course scan was set to 15cm as shown in the SAR plots included in appendix 2 and 3. Please refer to the DASY manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone (FCC ID IHDT56GA1) has the following battery options:

SNN5744A 1000 mAH Battery
 SNN5766A 810 mAH Battery
 SNN5771A 850 mAH Battery


The battery with the highest capacity is the SNN5744A. This battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configuration that resulted in the highest SAR values were tested using the other batteries listed above.

6.1 Head Adjacent Test Results

To aid in positioning repeatability, the ear reference line of the device and the axis reference line of the device have been physically added using a non-metallic marker.

- Per Figure 1, the "Ear Reference Line" is centered vertically through the center of the listening area (as defined by the speaker holes in the housing).
- The "Axis Reference Line" bisects the front surface of the device at its top and bottom edges.
- The intersection of these two lines defines the location of the "Ear Reference Point".

The lines drawn on the device extended to the outside edges, as shown in blue in the figure below, & wrap around the sides of the device.

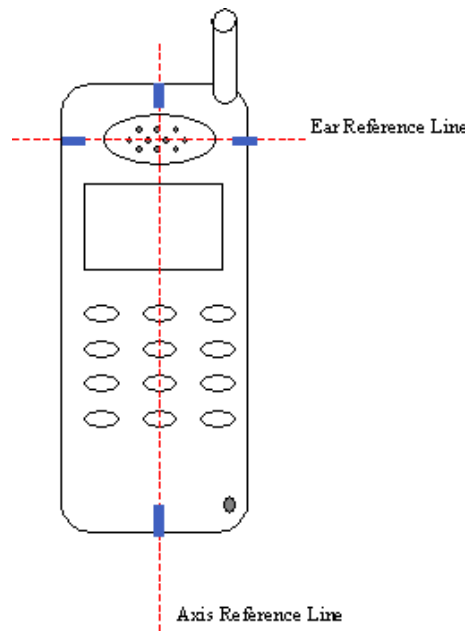

The SAR results shown in tables 1 through 6 are maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and tissue simulate are used for the system accuracy verification as the device SAR measurements, the Z-axis scans included in within Appendix 1 are applicable for verification of tissue simulate depth to be 15.0cm ±0.5cm.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	SN1514	900	5.89	8 of 9
		1810	5.09	8 of 9
		2450	4.38	8 of 9
	SN1520	900	6.32	8 of 9
		1810	5.08	8 of 9
		2450	4.51	8 of 9

f (MHz)	Description	Conducted Output Power (dBm)	Cheek / Touch Position							
			Left Head				Right Head			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz	Channel 128	32.51	1.36	0.03	1.36	20.2	1.41	0.02	1.41	20.2
	Channel 190	32.50	1.35	-0.04	1.36	20.1	1.37	-0.1	1.40	18.9
	Channel 251	32.50	1.38	-0.12	1.42	20.2	1.53	-0.05	1.55	20.2
Digital 1900MHz	Channel 512	30.01	0.78	0.18	0.78	19.2				
	Channel 661	30.01	0.87	0.01	0.87	19.4	0.74	0.05	0.74	19.4
	Channel 810	30.00	1.09	0	1.09	19.3				
Bluetooth 2400 MHz	N/A	20.00	0	0.56	0	21.5	0	0.38	0	21.5

Table 1: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the head in the Cheek/Touch Position.

f (MHz)	Description	Conducted Output Power (dBm)	15° Tilt Position							
			Left Head				Right Head			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz	Channel 128	32.51								
	Channel 190	32.50	0.38	0	0.38	19.6	0.42	0.05	0.42	19.1
	Channel 251	32.50								
Digital 1900MHz	Channel 512	30.01								
	Channel 661	30.01	0.44	-0.05	0.44	19.2	0.45	-0.05	0.46	19.2
	Channel 810	30.00								
Bluetooth 2400 MHz	N/A	20.00	0	0.21	0	21.5	0	-0.18	0	21.5

Table 2: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the head in the 15° Tilt Position.

f (MHz)	Description	Conducted Output Power (dBm)	Highest Cheek / Touch Position							
			Cheek with SNN5766A Battery				Cheek with SNN5771A Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz RIGHT HEAD	Channel 128	32.51								
	Channel 190	32.50								
	Channel 251	32.50	1.57	-0.02	1.58	19.2	1.49	0.03	1.49	19.2
Digital 1900MHz LEFT HEAD	Channel 512	30.01								
	Channel 661	30.01								
	Channel 810	30.00	1.02	-0.1	1.04	20.6	0.997	-0.06	1.01	20.6
Bluetooth 2400 MHz RIGHT HEAD	N/A	20.00	0.01	0.13	0.01	21.5	0.01	0.16	0.01	21.5

Table 3: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the head in the Cheek/Touch Position.

f (MHz)	Description	Conducted Output Power (dBm)	Highest 15° Tilt Position							
			Right Head 15° Tilt with SNN5766A Battery				Right Head 15° Tilt with SNN5771A Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz	Channel 128	32.51								
	Channel 190	32.50	0.44	0.066	0.44	19.3	0.45	-0.02	0.45	19.2
	Channel 251	32.50								
Digital 1900MHz	Channel 512	30.01								
	Channel 661	30.01	0.36	0.1	0.36	20.2	0.36	0.06	0.36	20.2
	Channel 810	30.00								
Bluetooth 2400 MHz	N/A	20.00	0.004	-0.7	0	21.5	0.003	-0.22	0	21.5

Table 4: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the head in the 15° Tilt Position.

f (MHz)	Description	Conducted Output Power (dBm)	Highest Head (Cheek / Touch Position) with FLV1911 Case							
			Cheek with SNN5766A Battery				Cheek with SNN5744A Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz RIGHT HEAD	Channel 128	32.51								
	Channel 190	32.50								
	Channel 251	32.50	1.6	0.02	1.6	19.2				
Digital 1900MHz LEFT HEAD	Channel 512	30.01								
	Channel 661	30.01								
	Channel 810	30.00					1.03	-0.03	1.04	20.6
Bluetooth 2400MHz RIGHT HEAD	N/A	20.00	0.01	0.08	0.01	21.5				

Table 5: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the head position.

f (MHz)	Description	Conducted Output Power (dBm)	Highest Head (15° Tilt Position) with FLV1911 Case							
			Right Head 15° Tilt with SNN5771A Battery				Right Head 15° Tilt with SNN5744A Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz	Channel 128	32.51								
	Channel 190	32.50	0.47	0.03	0.47	19.2				
	Channel 251	32.50								
Digital 1900MHz	Channel 512	30.01								
	Channel 661	30.01					0.33	0.18	0.33	20.2
	Channel 810	30.00								
Bluetooth 2400MHz	N/A	20.00	0	-0.69	0	20.7				

Table 6: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the head position.

6.2 Body Worn Test Results

The SAR results shown in tables 7 through 9 are the maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There is one Body-Worn Accessory available for this phone:
Fitted Case Model #FLV1911

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	SN1514	900	5.71	8 of 9
		1810	4.43	8 of 9
		2450	4.28	8 of 9
	SN1520	900	6.12	8 of 9
		1810	4.67	8 of 9
		2450	4.27	8 of 9

f (MHz)	Description	Conducted Output Power (dBm)	Body Worn							
			Front of phone 15 mm away from phantom (GSM)				Back of phone 15 mm away from phantom (GSM)			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz	Channel 128	32.51								
	Channel 190	32.50	0.16	-0.02	0.16	20.0	0.35	-0.25	0.37	20.0
	Channel 251	32.50								
Digital 1900MHz	Channel 512	30.01								
	Channel 661	30.01	0.13	-0.01	0.13	19.3	0.38	-0.02	0.38	19.2
	Channel 810	30.00								
Bluetooth 2400MHz	N/A	20.00	0	0	0	21.5	0	-0.65	0	21.4
Digital 850MHz & Bluetooth 2400MHz	summation of extrapolated SAR values	N/A			0.16				0.37	
Digital 1900MHz & Bluetooth 2400MHz	summation of extrapolated SAR values	N/A			0.13				0.38	

Table 7: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the body.

f (MHz)	Description	Conducted Output Power (dBm)	Body Worn							
			Back of phone 25 mm away from phantom							
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
GPRS 850MHz	Channel 128	32.51								
	Channel 190	32.50	0.21	-0.07	0.21	19.9				
	Channel 251	32.50								
GPRS 1900MHz	Channel 512	30.01								
	Channel 661	30.01	0.24	-0.13	0.25	19.2				
	Channel 810	30.00								
Bluetooth 2400MHz	N/A	20.00	0	-1.39	0	21.5				
GPRS 850MHz & Bluetooth 2400MHz	summation of extrapolated SAR values	N/A			0.21					
GPRS 1900MHz & Bluetooth 2400MHz	summation of extrapolated SAR values	N/A			0.25					

Table 8: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the body.

f (MHz)	Description	Conducted Output Power (dBm)	Body Worn							
			Back of phone 15 mm away from phantom with SNN5766A Battery				Back of phone 15 mm away from phantom with SNN5771A Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 850MHz	Channel 128	32.51								
	Channel 190	32.50	0.34	-0.01	0.34	20.2	0.15	-0.07	0.15	20.2
	Channel 251	32.50								
Digital 1900MHz	Channel 512	30.01								
	Channel 661	30.01	0.29	-0.05	0.3	19.8	0.3	-0.03	0.31	19.9
	Channel 810	30.00								
Bluetooth 2400MHz	N/A	20.00	0	1.35	0	21.4	0	-1.15	0	21.4
Digital 850MHz & Bluetooth 2400MHz	summation of extrapolated SAR values	N/A			0.34				0.15	
Digital 1900MHz & Bluetooth 2400MHz	summation of extrapolated SAR values	N/A			0.3				0.31	

Table 9: SAR measurement results for the portable cellular telephone FCC ID IHDT56GA1 at highest possible output power. Measured against the body.

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 1/6/2006 8:44:05 AM

Test Laboratory: Motorola

010606 900mhz good -0.4%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:078

Procedure Notes: 900MHz System Performance Check / Dipole Sn# 078

PM1 Power = 200mW Sim.Temp@meas = 18.9°C Sim.Temp@SPC = 18.9°C Room Temp @ SPC = 23°C

Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used: $\sigma = 0.96$ mho/m, $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.89, 5.89, 5.89); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.24 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.45 mW/g

Maximum value of SAR (measured) = 2.46 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = -0.027 dB



Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.24 mW/g; SAR(10 g) = 1.43 mW/g

Maximum value of SAR (measured) = 2.43 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

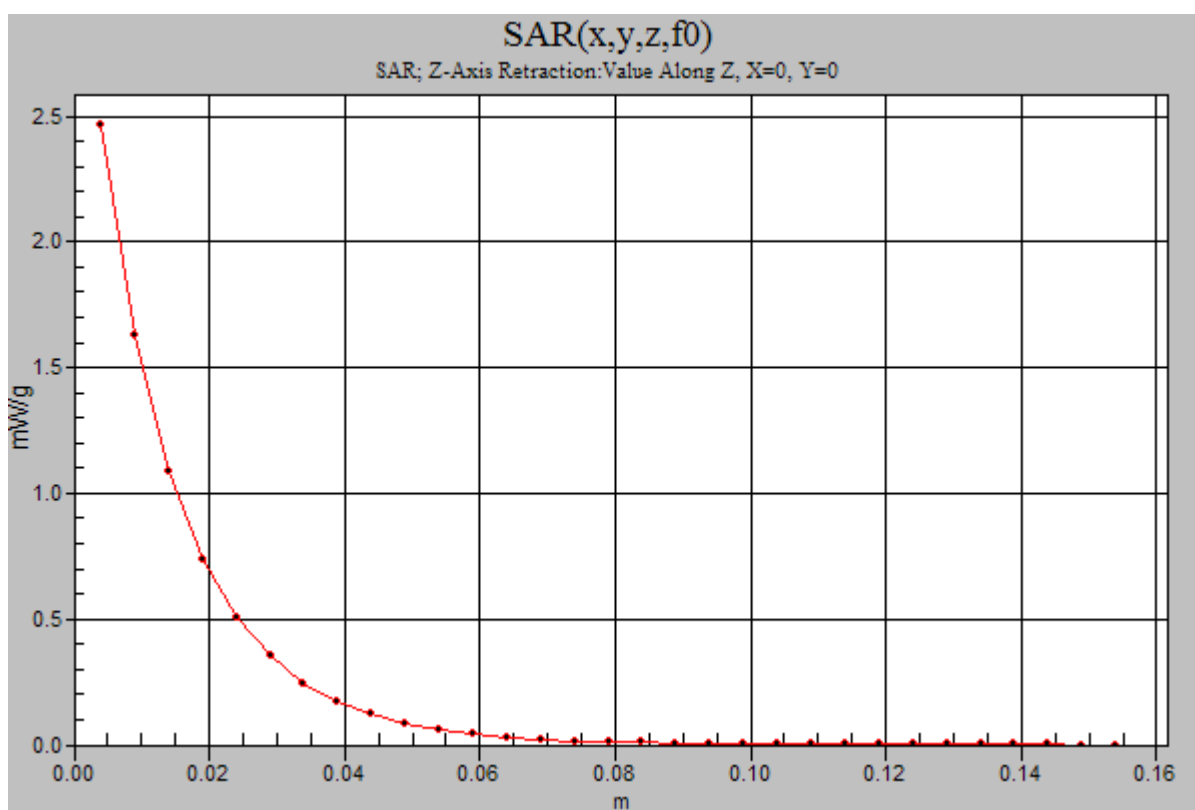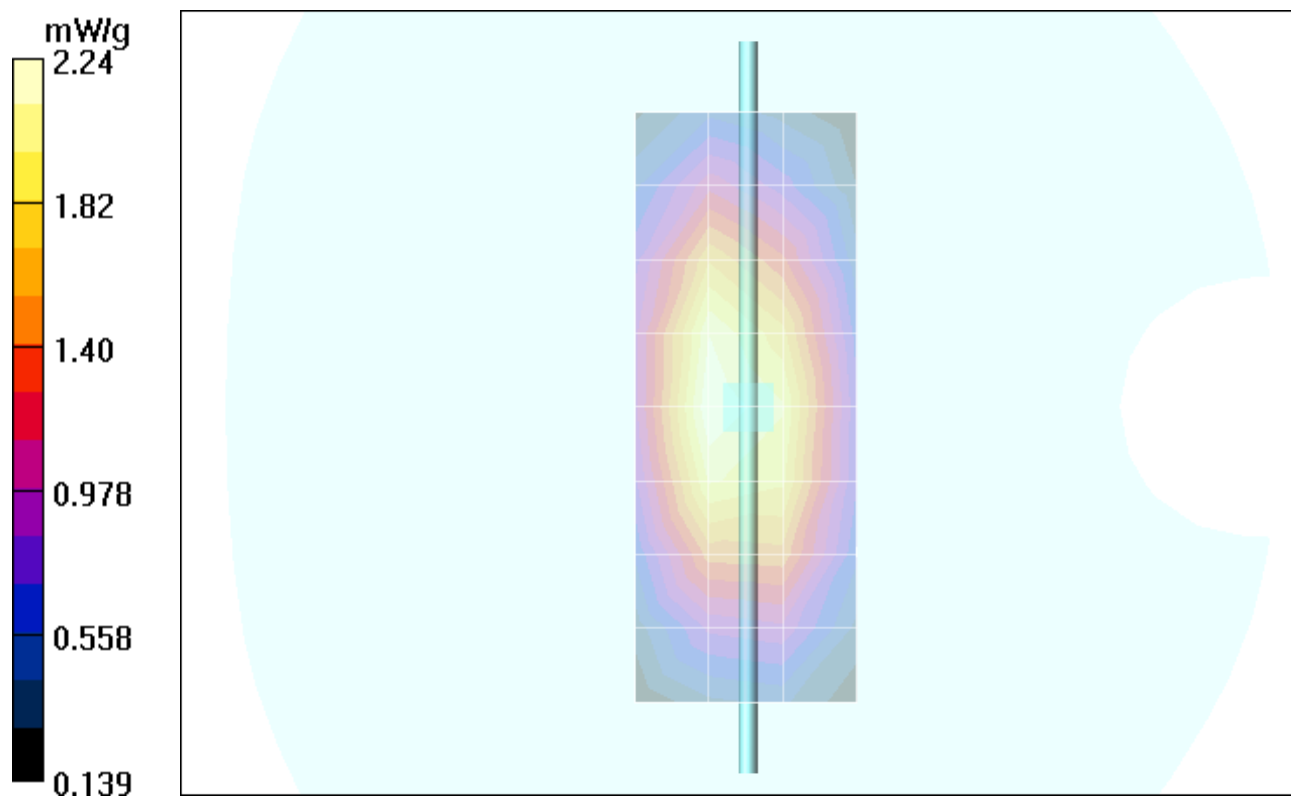

Date/Time: 1/6/2006 9:10:47 AM

Test Laboratory: Motorola

010606 1800mhz good -6.3%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:273TR

Procedure Notes: 1800MHz System Performance Check / Dipole Sn# 273tr

PM1 Power = 200mW Sim.Temp@meas = 20.7°C Sim.Temp@SPC = 19.9 Room Temp @ SPC = 23C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used: $\sigma = 1.38 \text{ mho/m}$, $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.09, 5.09, 5.09); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.94 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.6 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.19 mW/g; SAR(10 g) = 3.84 mW/g

Maximum value of SAR (measured) = 8.13 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.6 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 12.0 W/kg



SAR(1 g) = 7.09 mW/g; SAR(10 g) = 3.81 mW/g

Maximum value of SAR (measured) = 7.89 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 8.15 mW/g

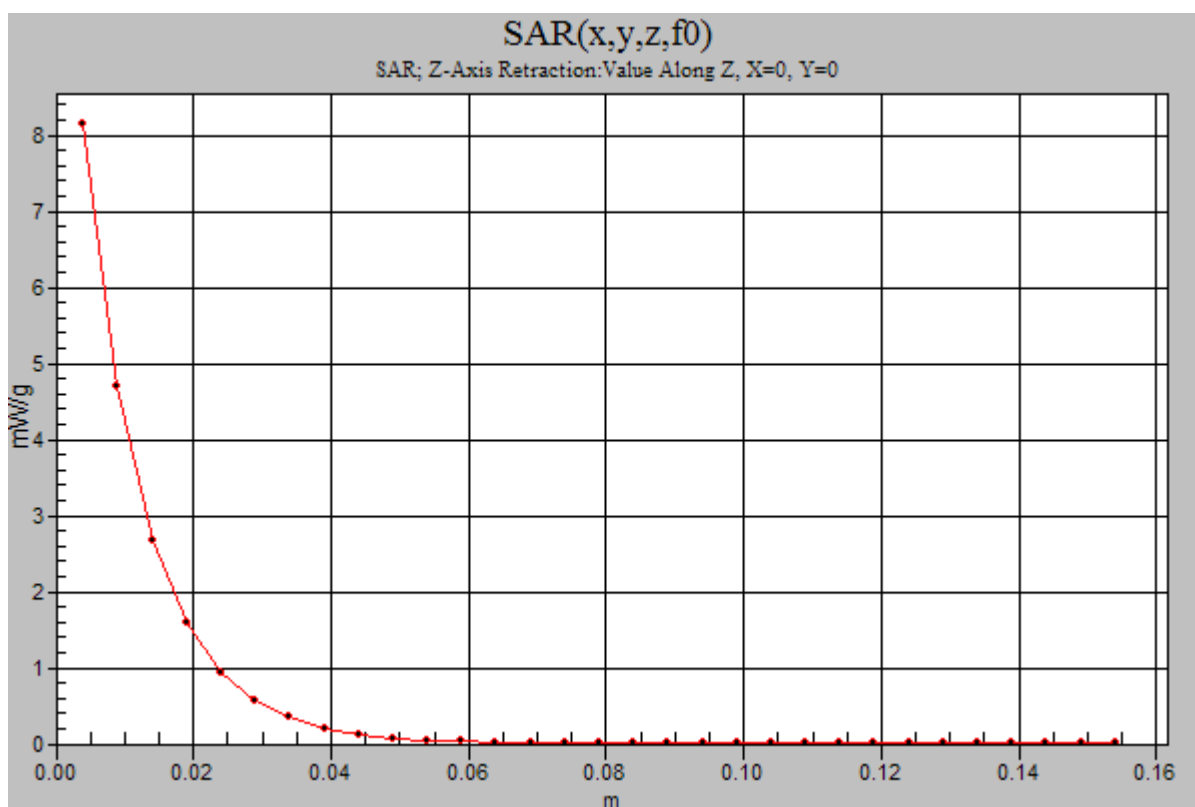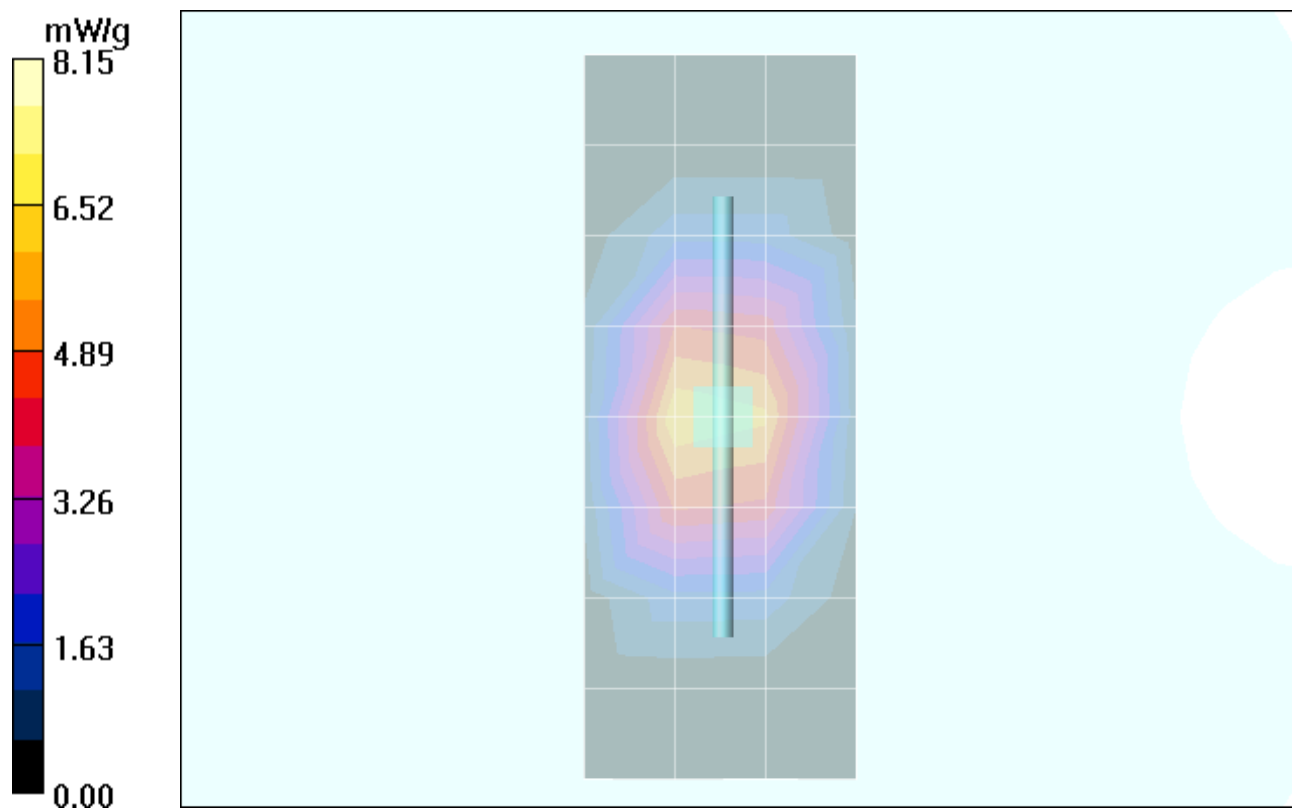

Date/Time: 1/7/2006 5:04:39 PM

Test Laboratory: Motorola

010706 900mhz Good -5.8%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:78

Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 78

PM1 Power = 200 mW Sim.Temp@meas = 20.2 Sim.Temp@SPC = 20.1 Room Temp @ SPC = 23

Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used: $\sigma = 0.98$ mho/m, $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.89, 5.89, 5.89); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.16 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 2.15 mW/g; SAR(10 g) = 1.38 mW/g

Maximum value of SAR (measured) = 2.34 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = -0.106 dB



Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 2.11 mW/g; SAR(10 g) = 1.36 mW/g

Maximum value of SAR (measured) = 2.21 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

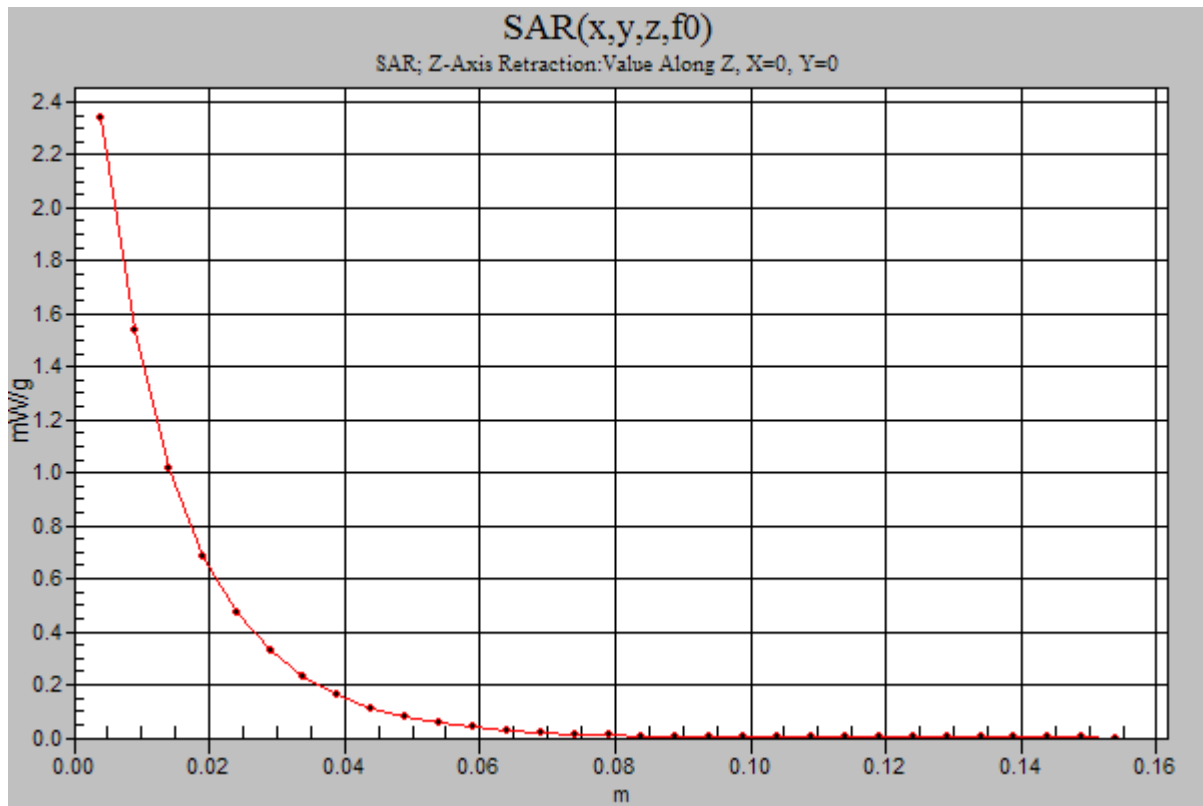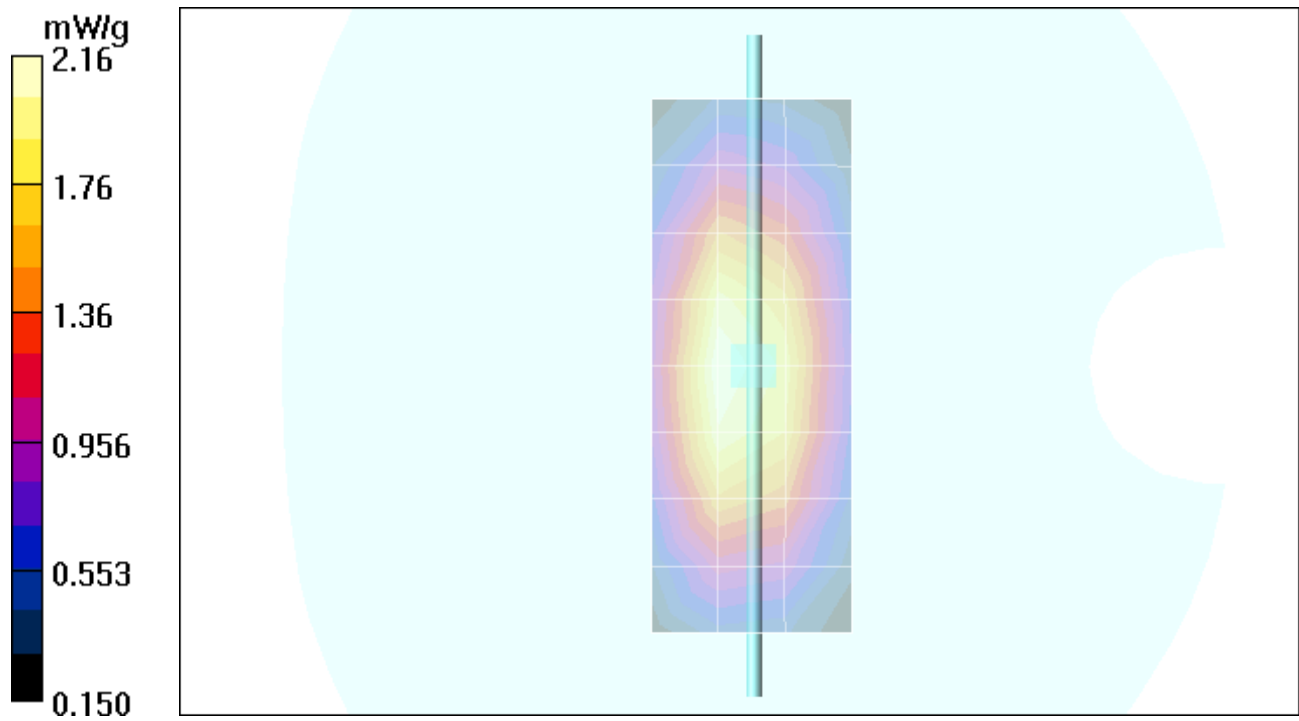

Date/Time: 1/8/2006 4:50:47 AM

Test Laboratory: Motorola

010806 2450 MHz GOOD +1.7%

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:740

Procedure Notes: 2450 MHz System Performance Check / Dipole Sn# 740

PM1 Power = 200 mW Sim.Temp@meas = 21.5°C Sim.Temp@SPC = 21.5°C Room Temp @ SPC = 23.0C

Communication System: CW - Dipole; Frequency: 2450 MHz; Channel Number: 11; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used: $\sigma = 1.89$ mho/m, $\epsilon_r = 39$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1520; ConvF(4.51, 4.51, 4.51); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.06 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.4 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 24.8 W/kg

SAR(1 g) = 11.6 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 12.9 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.4 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 24.5 W/kg



SAR(1 g) = 11.5 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 12.0 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 13.0 mW/g

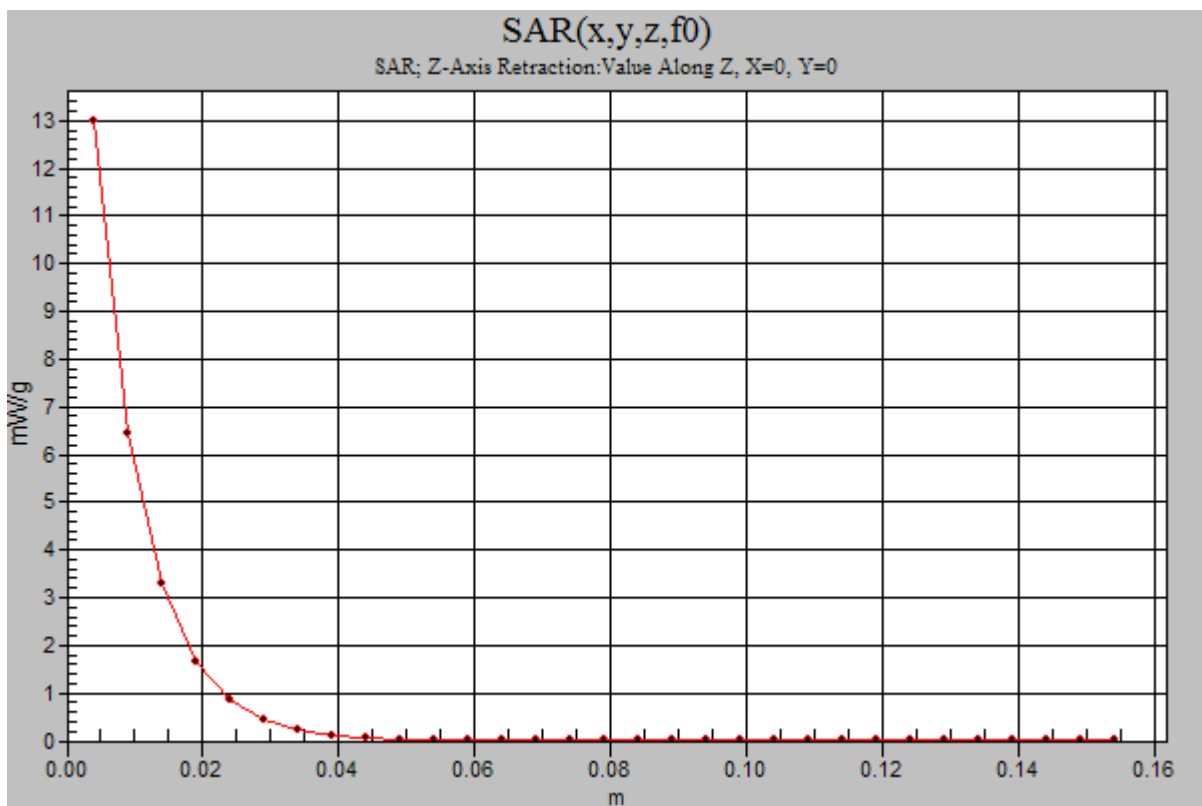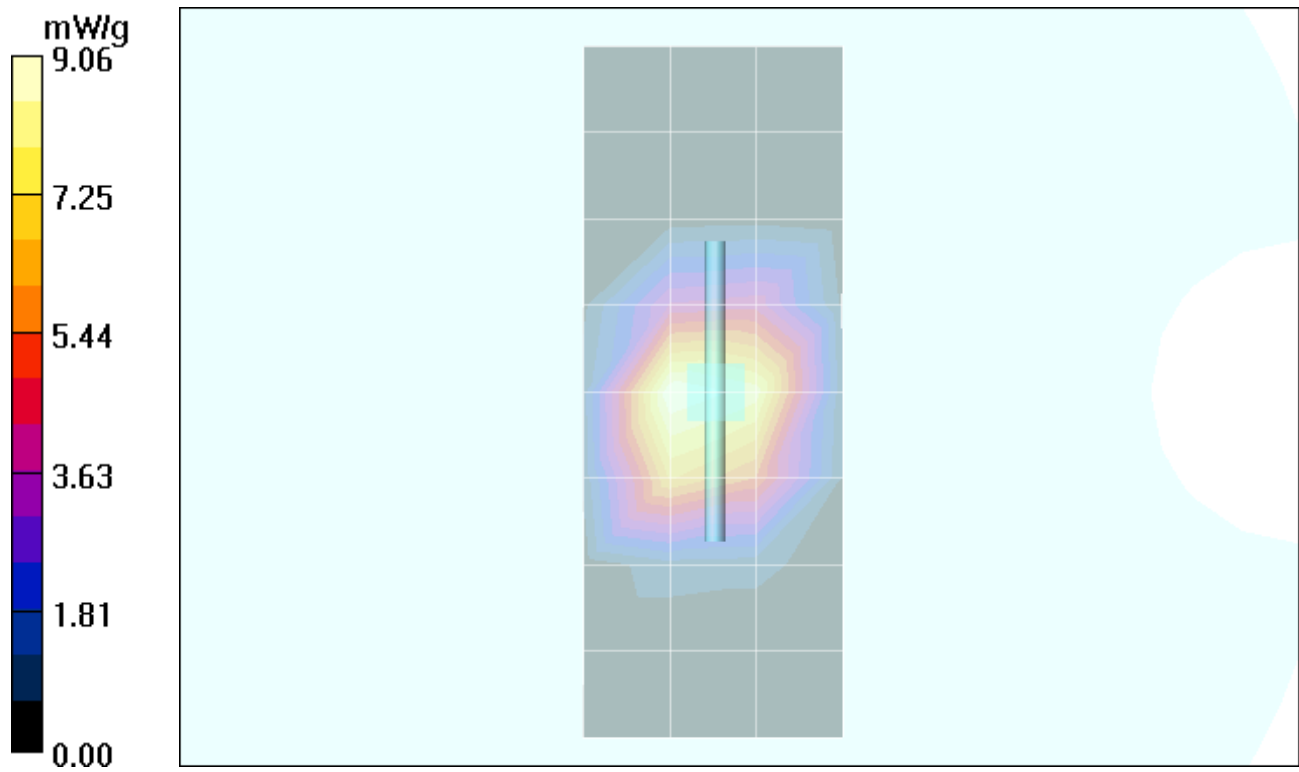

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 1/7/2006 10:02:10 PM

Test Laboratory: Motorola**850 RH Cheek FLV1911****Serial: G00V06006N**

Procedure Notes: Pwr Step: 5 Antenna Position: internal

Accessory Model #: FLV1911 case

Battery Model #: smn5766a DEVICE POSITION (cheek or rotated): cheek

Communication System: GSM 850; Frequency: 848.8 MHz; Channel Number: 251; Duty Cycle: 1:8

Medium: Low Freq Head; Medium parameters used: $\sigma = 0.92$ mho/m, $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.89, 5.89, 5.89); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.65 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 43.0 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 1.6 mW/g; SAR(10 g) = 1.04 mW/g

Maximum value of SAR (measured) = 1.72 mW/g

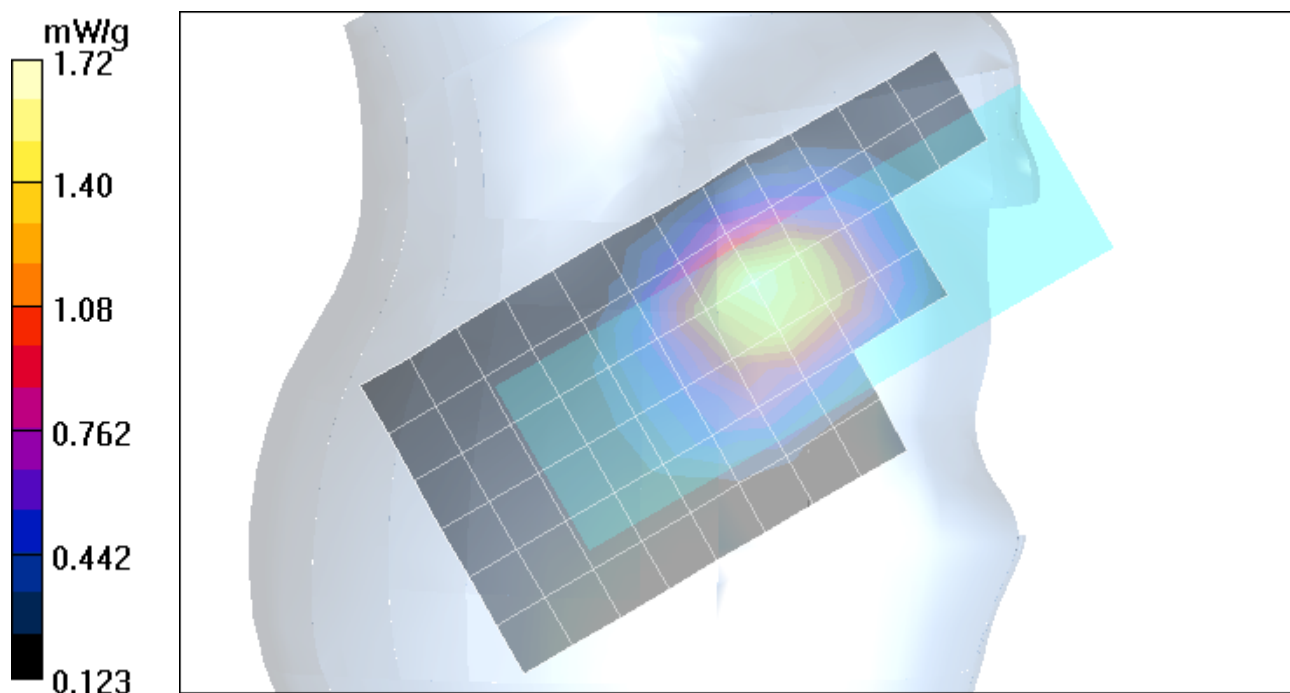

Date/Time: 1/8/2006 12:35:28 AM

Test Laboratory: Motorola**850 RH Tilt FLV1911**

Serial: G00V06006N

Procedure Notes: Pwr Step: 5 Antenna Position: internal Accessory Model #: FLV1911**Battery Model #: snn5771a DEVICE POSITION (cheek or rotated): tilted**

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head; Medium parameters used: $\sigma = 0.92$ mho/m, $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.89, 5.89, 5.89); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.482 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.499 mW/g

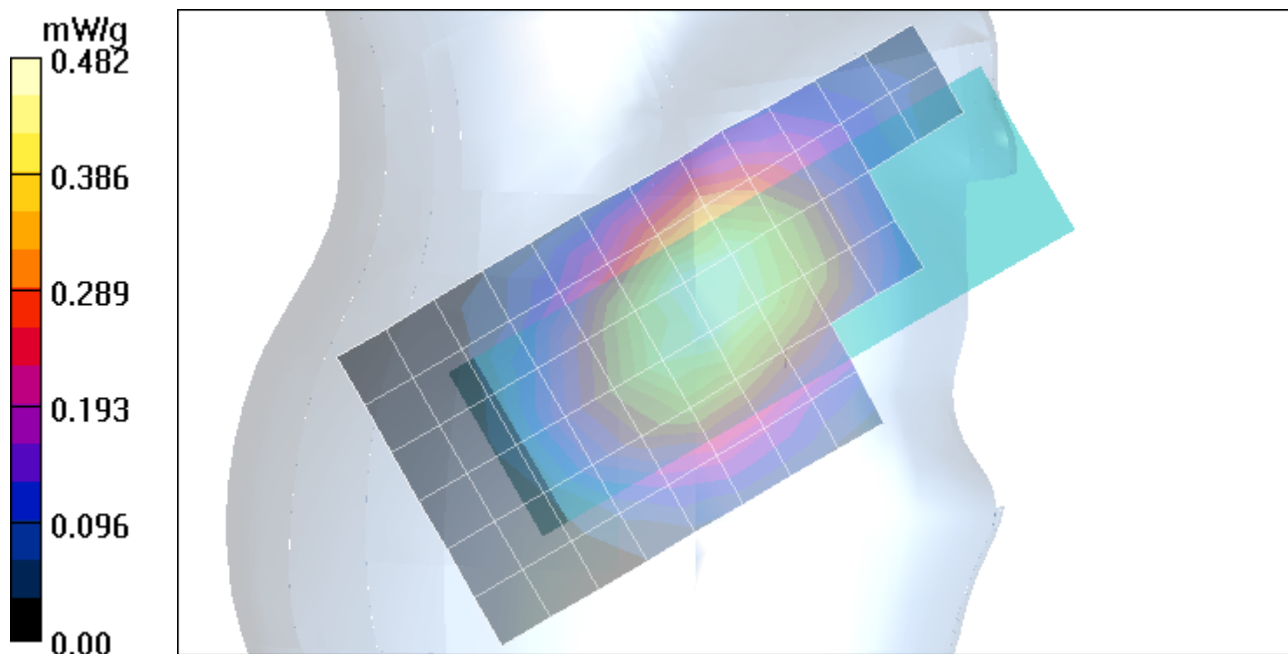

Date/Time: 1/6/2006 7:36:49 PM

Test Laboratory: Motorola**1900 LH Cheek****Serial: G00V06006N**

Procedure Notes: Pwr Step: 0

Antenna Position: INTERNAL

Battery Model #: SNN5744A

DEVICE POSITION: cheek

Communication System: GSM 1900; Frequency: 1909.8 MHz; Channel Number: 810; Duty Cycle: 1:8

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.46$ mho/m, $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.09, 5.09, 5.09); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Left Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.564 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

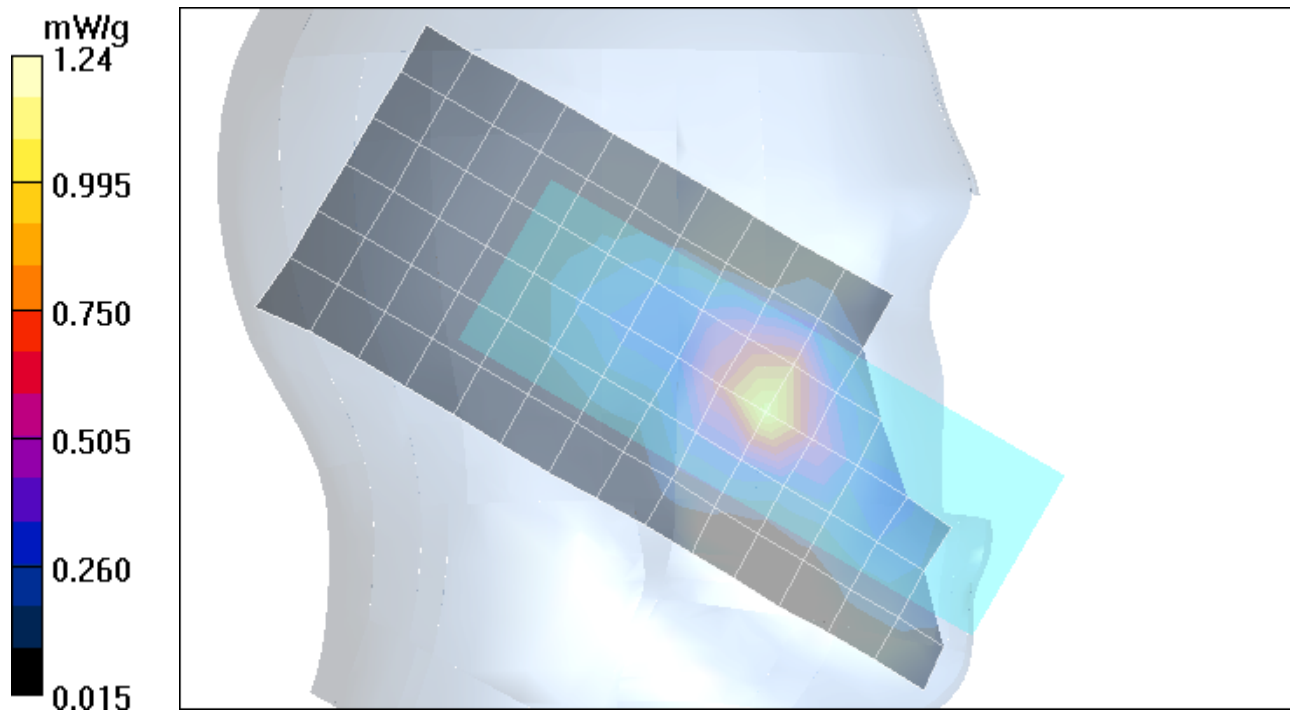

Test Laboratory: Motorola**1900 RH Tilt**

Serial: G00V06006N

Procedure Notes: Pwr Step: 0 Antenna Position: INTERNAL**Battery Model #: SNN5744A DEVICE POSITION: tilted**

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.46$ mho/m, $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.09, 5.09, 5.09); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.493 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.489 mW/g

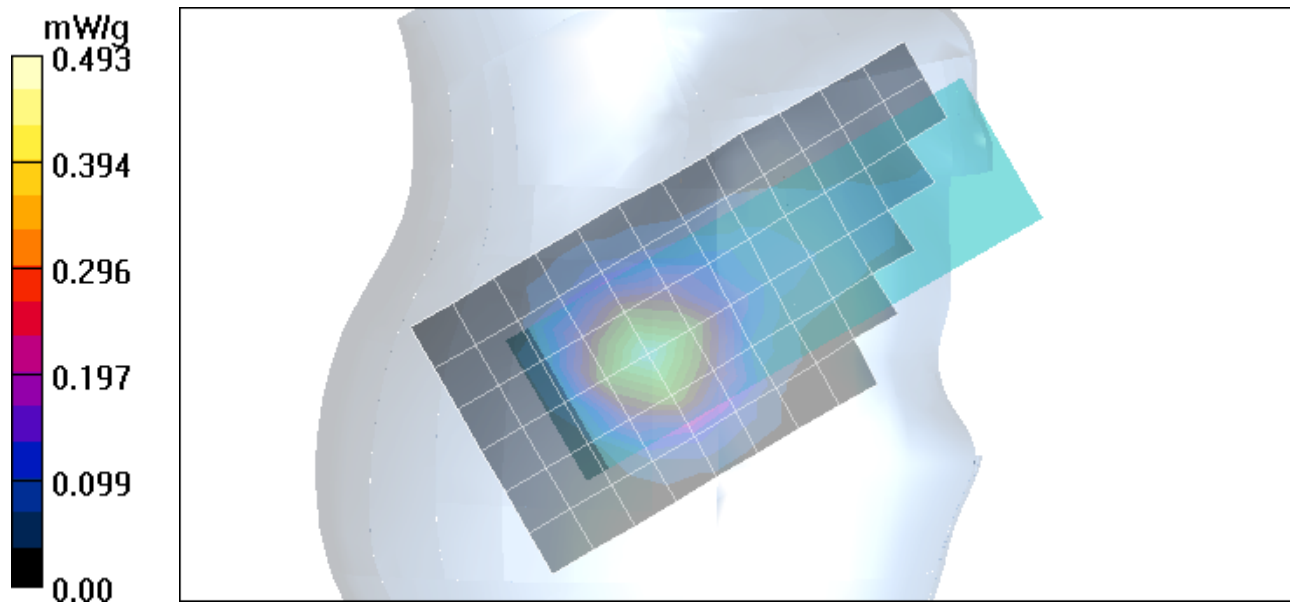

Date/Time: 1/8/2006 10:11:03 AM

Test Laboratory: Motorola**2441 Bluetooth RH Cheek FLV1911****Serial: G00V06006N**

Procedure Notes: Pwr Step: N/A Antenna Position: INTERNAL

Accessory Model #: case (FLV1911) Battery Model #: SNN5766A DEVICE POSITION: CHEEK

Communication System: Bluetooth; Frequency: 2441 MHz; Channel Number: 39; Duty Cycle: 1:1

Medium: 2450 Glycol Head; Medium parameters used: $\sigma = 1.89$ mho/m, $\epsilon_r = 39$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1520; ConvF(4.51, 4.51, 4.51); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.01 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.77 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 0.030 W/kg

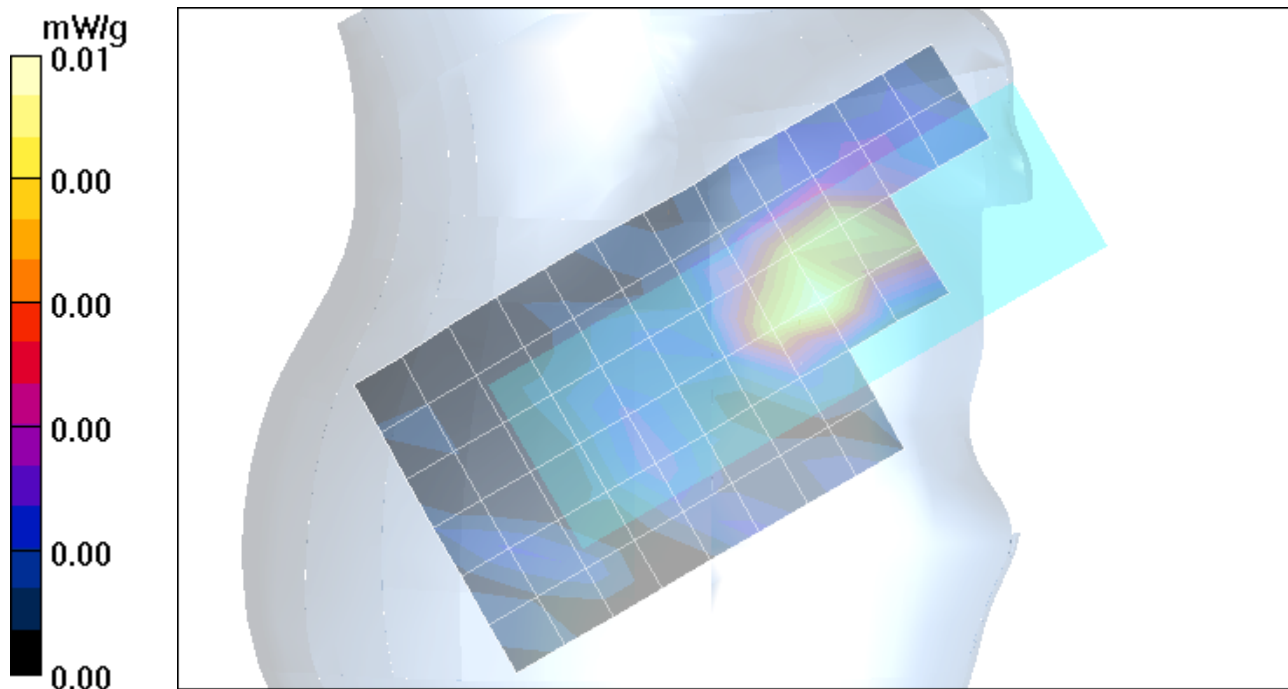SAR(1 g) = 0.00574 mW/g; SAR(10 g) = 0.00185 mW/g

Date/Time: 1/8/2006 10:53:56 AM

Test Laboratory: Motorola**2441 Bluetooth RH Tilt****Serial: G00V06006N**

Procedure Notes: Pwr Step: N/A Antenna Position: INTERNAL

Battery Model #: SNN5766A DEVICE POSITION: rotated 15*

Communication System: Bluetooth; Frequency: 2441 MHz; Channel Number: 39; Duty Cycle: 1:1

Medium: 2450 Glycol Head; Medium parameters used: $\sigma = 1.89$ mho/m, $\epsilon_r = 39$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1520; ConvF(4.51, 4.51, 4.51); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.34 V/m; Power Drift = -0.697 dB

Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.00417 mW/g; SAR(10 g) = 0.00118 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

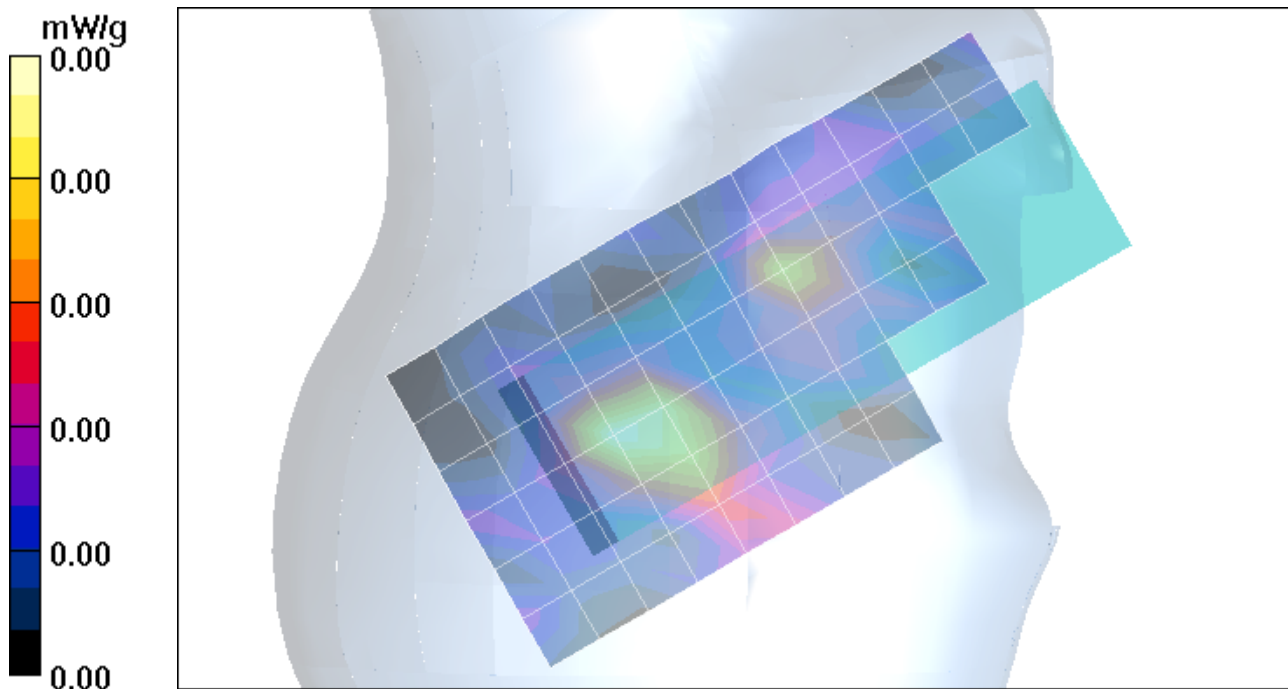

Appendix 3

SAR distribution plots for Body Worn Configuration

Date/Time: 1/7/2006 1:07:16 AM

Test Laboratory: Motorola**850 Bodyworn****Serial: G00V06006N**

Procedure Notes: Pwr Step:5 Antenna Position: internal

Battery Model #: SNN5744A

Accessory Model # =BODYWORN BACK OF PHONE 15MM AWAY FROM PHANTOM

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Body; Medium parameters used: $\sigma = 0.96$ mho/m, $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.71, 5.71, 5.71); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2 Sect 1, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.373 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.247 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.238 mW/g

Maximum value of SAR (measured) = 0.372 mW/g

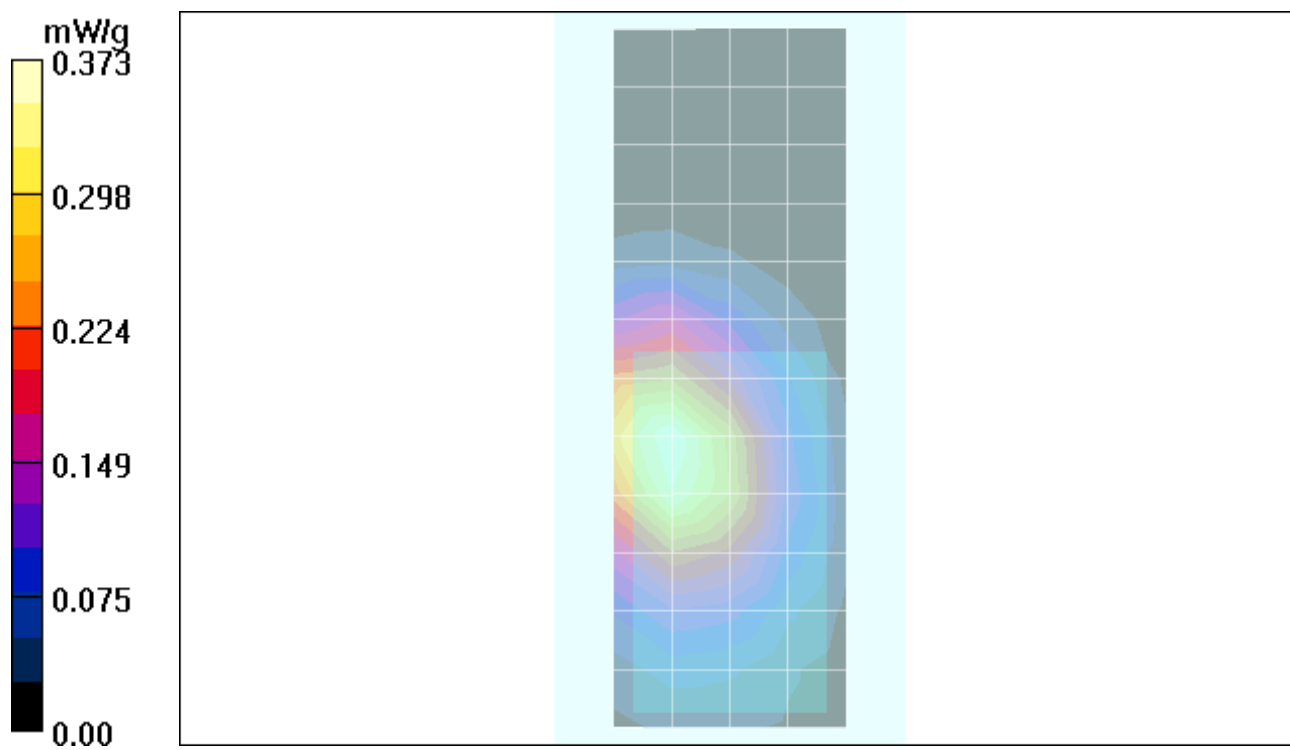

Test Laboratory: Motorola**1900 Bodyworn**

Serial: G00V06006N

Procedure Notes: Pwr Step: 0 Antenna Position: internal Battery Model #: SNN5744A**Accessory Model # = BODYWORN BACK OF PHONE 15MM AWAY FROM PHANTOM**

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.58$ mho/m, $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.43, 4.43, 4.43); Calibrated: 7/20/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn387; Calibrated: 7/11/2005
- Phantom: R2 Section 2, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.393 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.409 mW/g

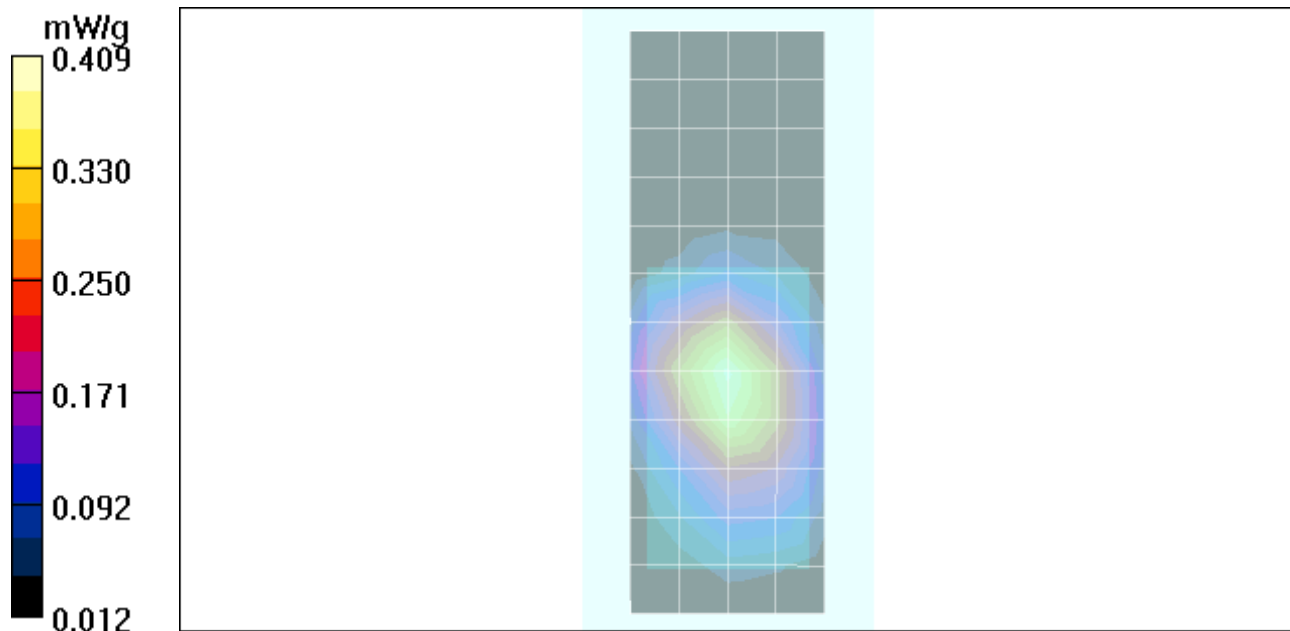

Date/Time: 1/8/2006 2:00:18 PM

Test Laboratory: Motorola**2441 Bodyworn Bluetooth****Serial: G00V06006N**

Procedure Notes: Pwr Step: N/A Antenna Position: internal

Battery Model #: snn5744 Accessory Model # = back of phone 15 mm

Communication System: Bluetooth; Frequency: 2441 MHz; Channel Number: 39; Duty Cycle: 1:1

Medium: 2450 Glycol Body; Medium parameters used: $\sigma = 2.04$ mho/m, $\epsilon_r = 55$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1520; ConvF(4.27, 4.27, 4.27); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.14 V/m; Power Drift = -0.652 dB

Peak SAR (extrapolated) = 0.01 W/kg

SAR(1 g) = 0.000114 mW/g; SAR(10 g) = 4.86e-005 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

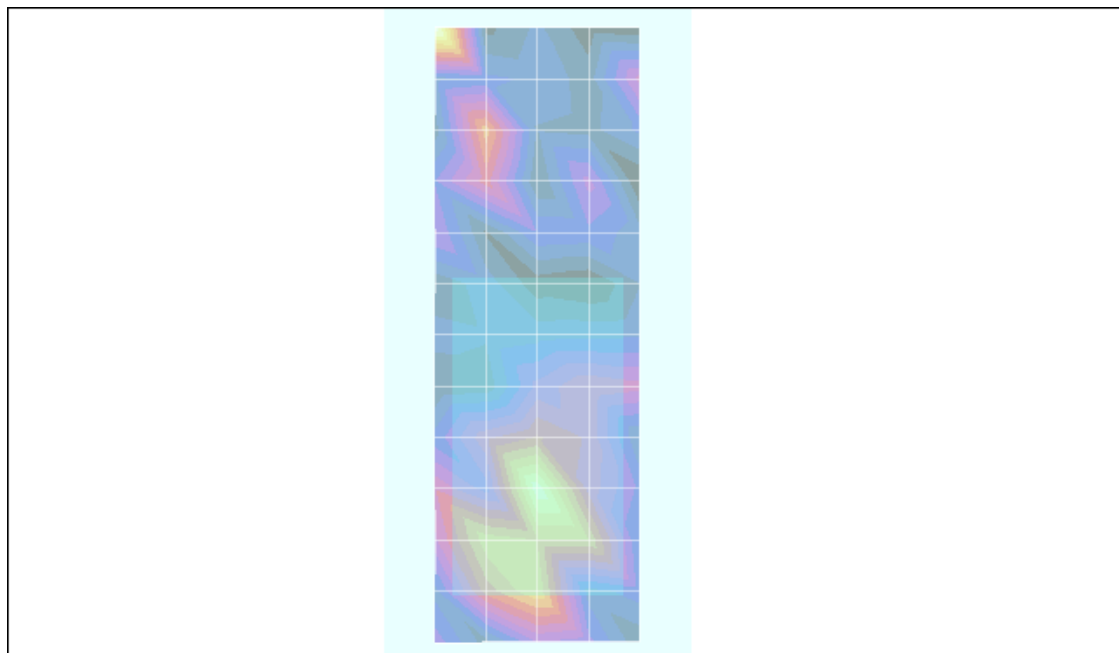

Appendix 4

Probe Calibration Certificate



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ET3-1514_Jul05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1514**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 20, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 907	21-Jun-05 (SPEAG, No. DAE4-907_Jun05)	Jun-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by: **Nico Vetterli** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: July 20, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1514

Manufactured:	November 24, 1999
Last calibrated:	July 22, 2004
Recalibrated:	July 20, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1514

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.75 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	90 mV
NormY	1.92 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	90 mV
NormZ	1.85 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	90 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	10.7	5.5
SAR _{be} [%]	With Correction Algorithm	0.1	0.3

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	15.4	9.9
SAR _{be} [%]	With Correction Algorithm	0.5	0.1

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

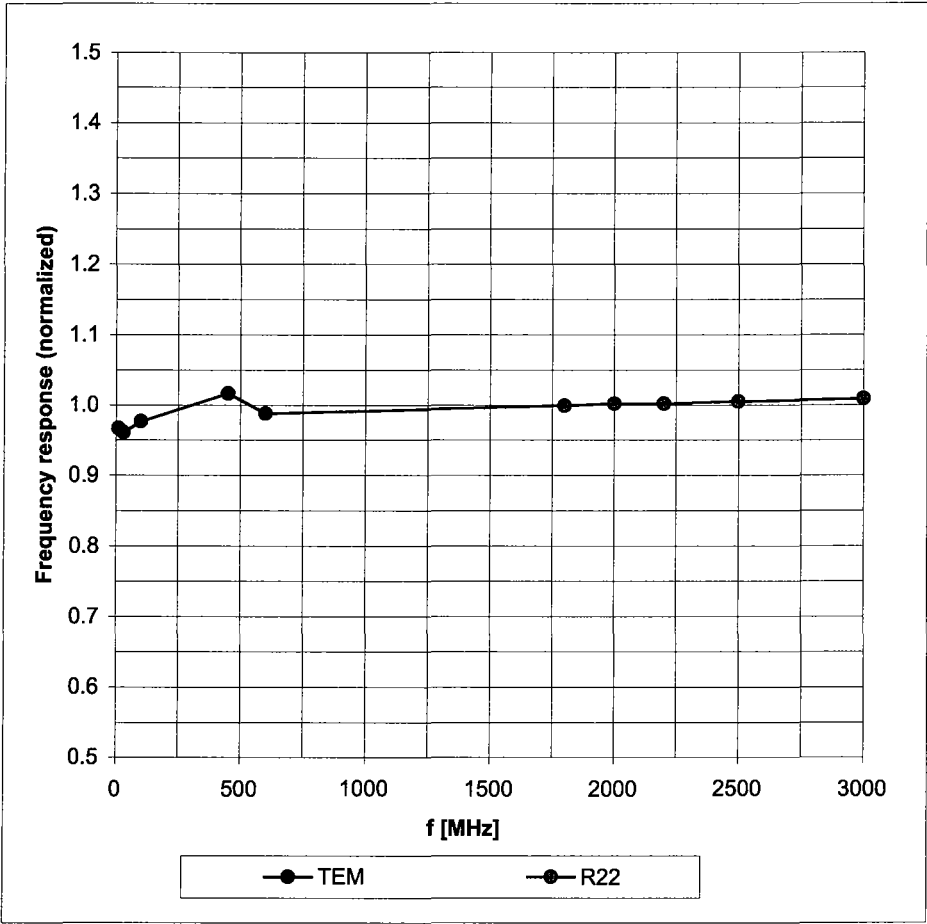


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

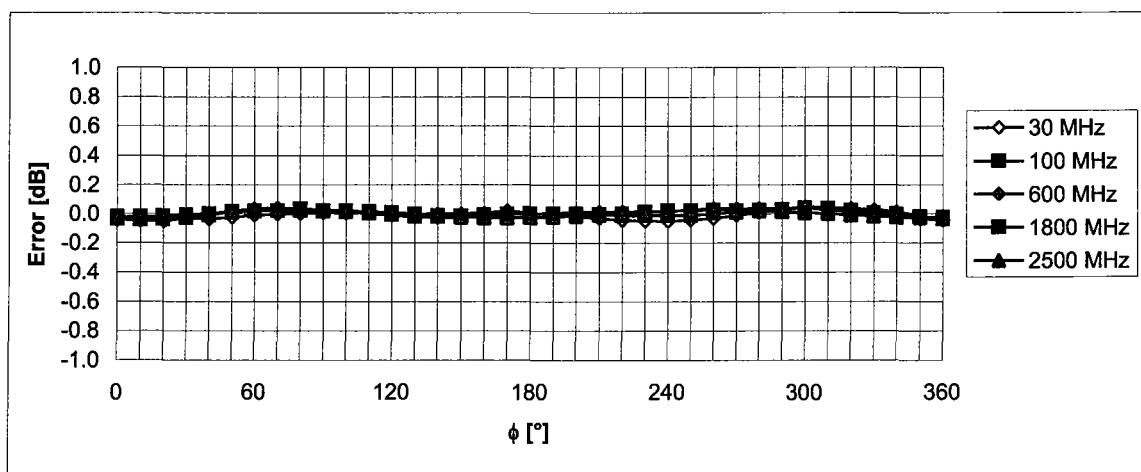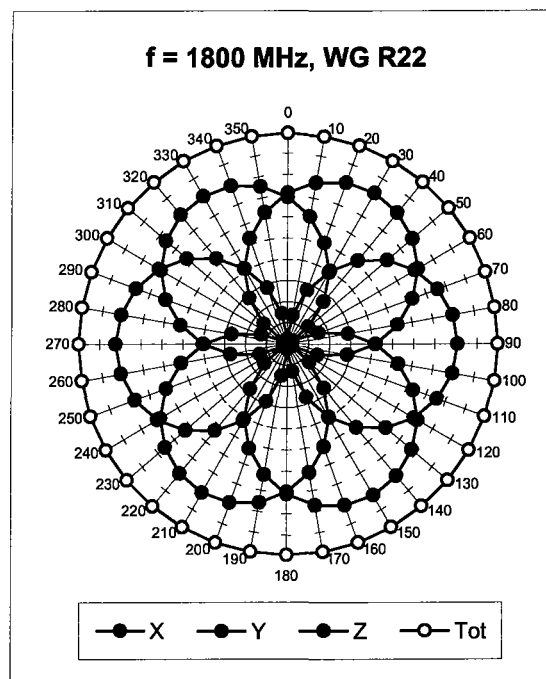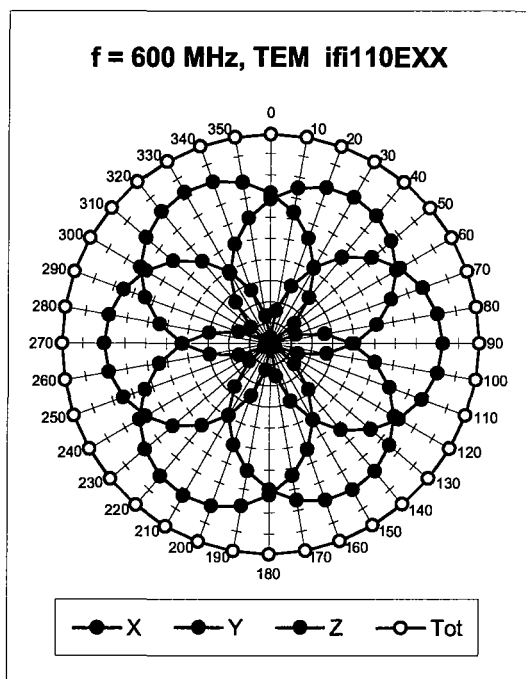



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

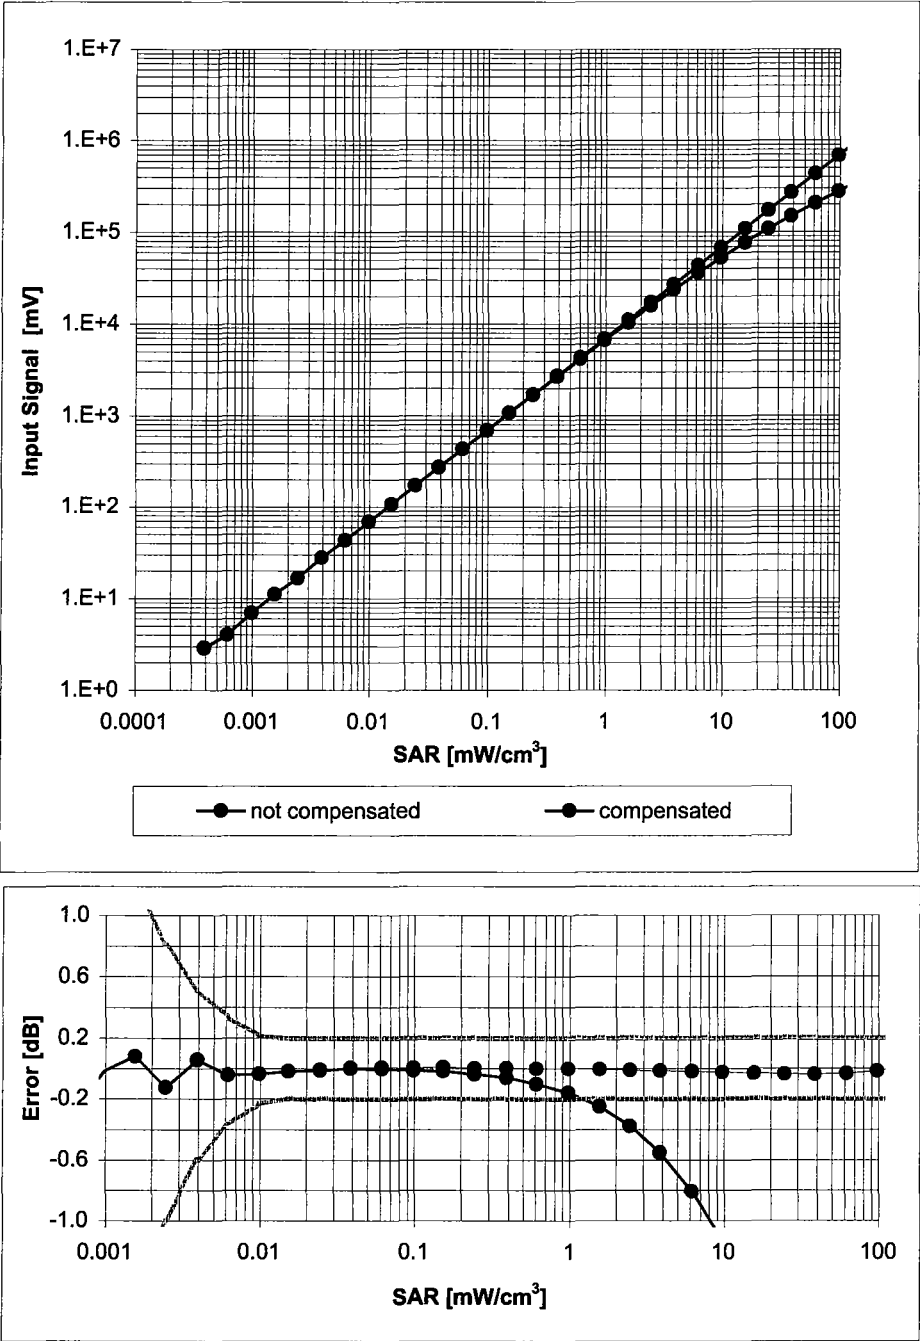

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

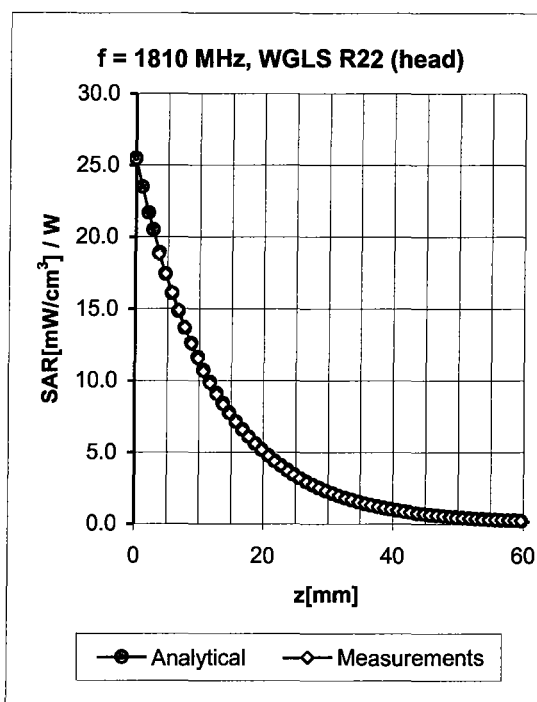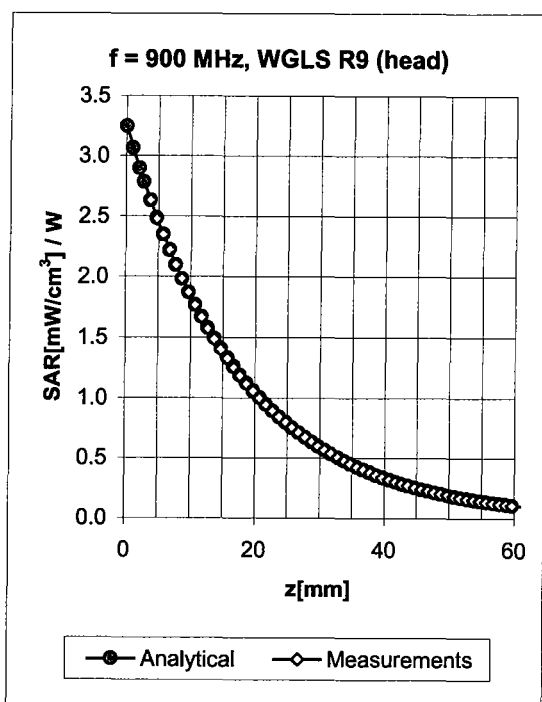


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.78	1.77	5.89 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.64	2.40	5.09 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.62	2.48	4.70 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.74	2.12	4.38 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.66	1.96	5.71 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.61	2.63	4.43 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.65	2.44	4.28 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.80	1.85	4.28 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

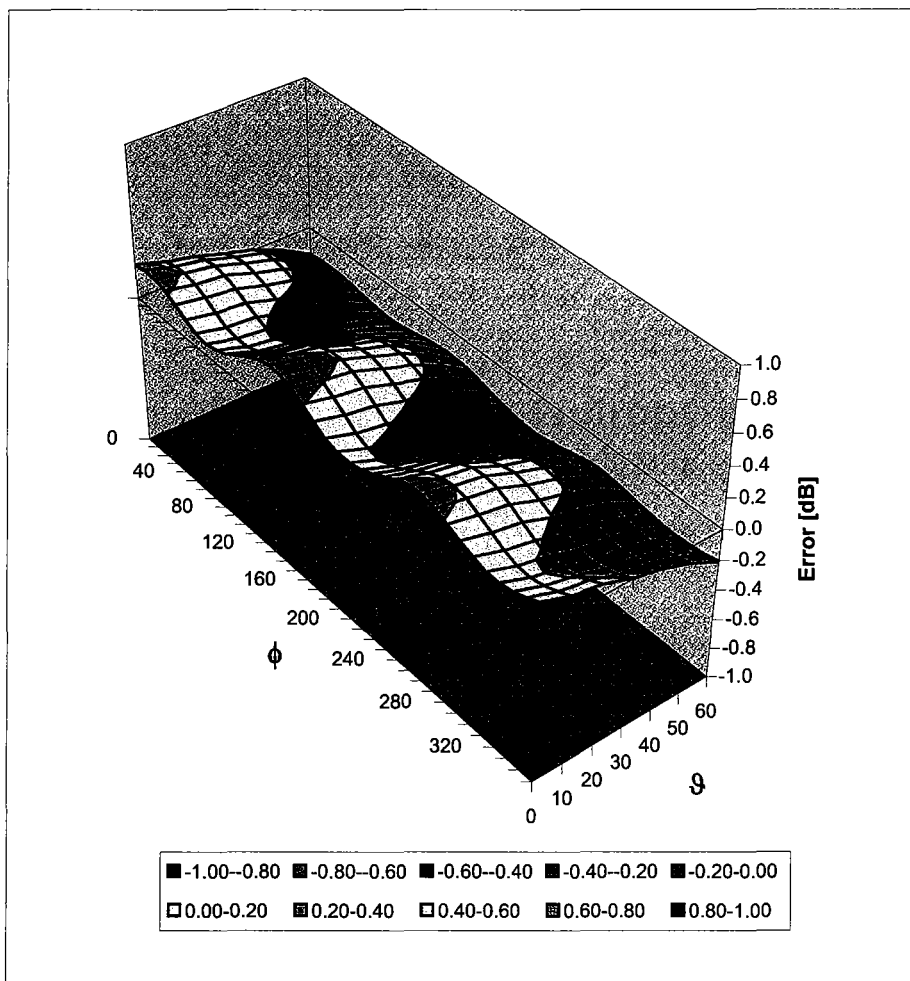

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



Accredited by the Swiss Federal Office of Metrology and Accreditation
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: SCS 108

Client Motorola MDb

Certificate No. ET3-1520_Apr05

CALIBRATION CERTIFICATE

Object

ET3DV6 - SN:1520

Calibration procedure(s)

QA-CAL-01 v5
Calibration procedure for dosimetric E-field probes

Calibration date:

April 22, 2005

Condition of the calibrated item

In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Name	Function	Signature
Calibrated by: Nico Vetterli	Laboratory Technician	
Approved by: Katja Pokovic	Technical Manager	

Issued: April 25, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1520

Manufactured:	February 1, 2000
Last calibrated:	May 27, 2004
Recalibrated:	April 22, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1520

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.89 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	95 mV
NormY	1.70 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	1.89 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	95 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	9.2	4.8
SAR _{be} [%]	With Correction Algorithm	0.1	0.2

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	13.7	9.2
SAR _{be} [%]	With Correction Algorithm	0.7	0.0

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

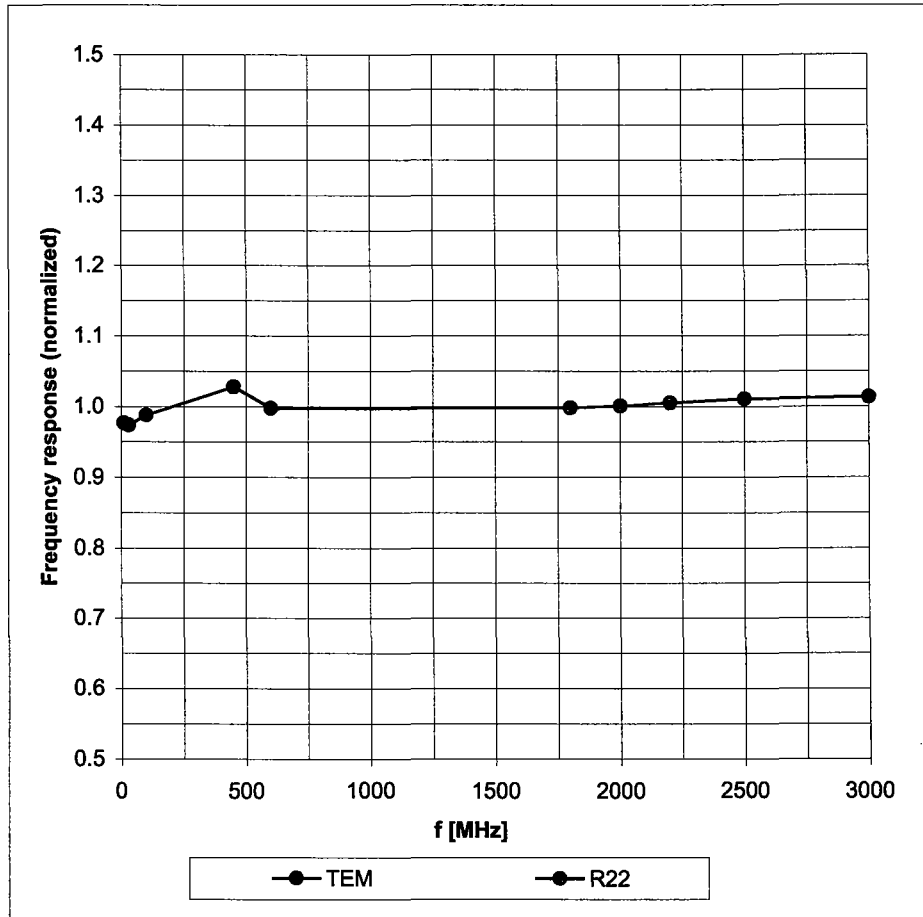


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

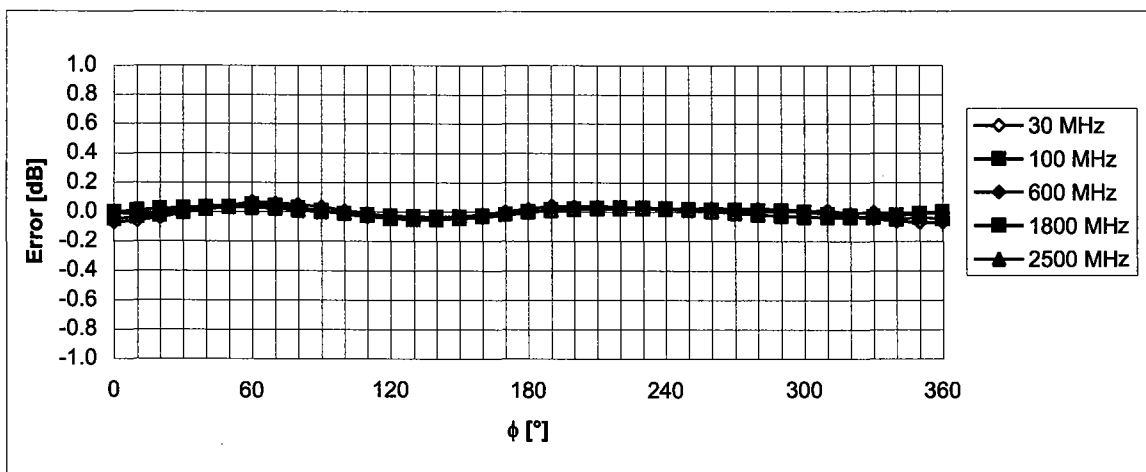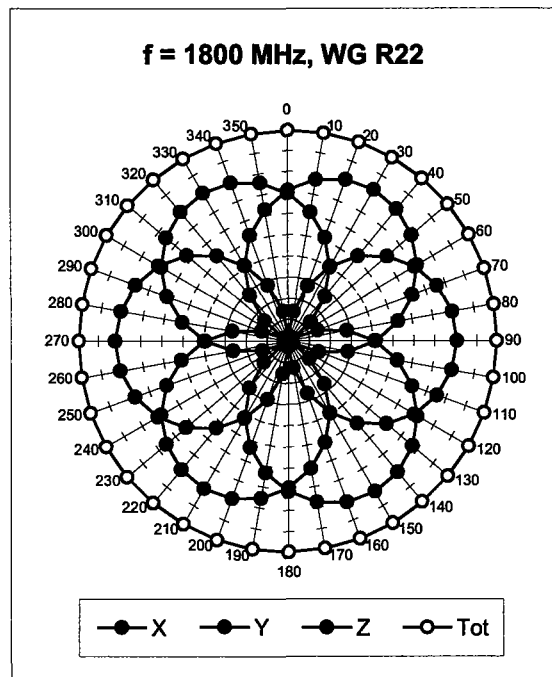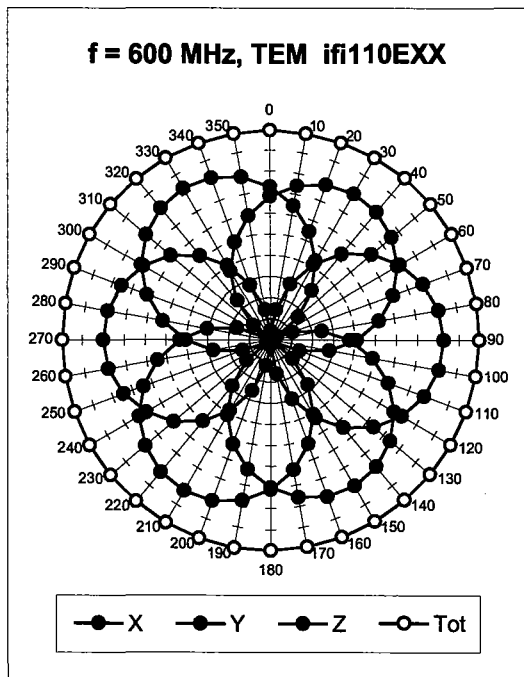



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

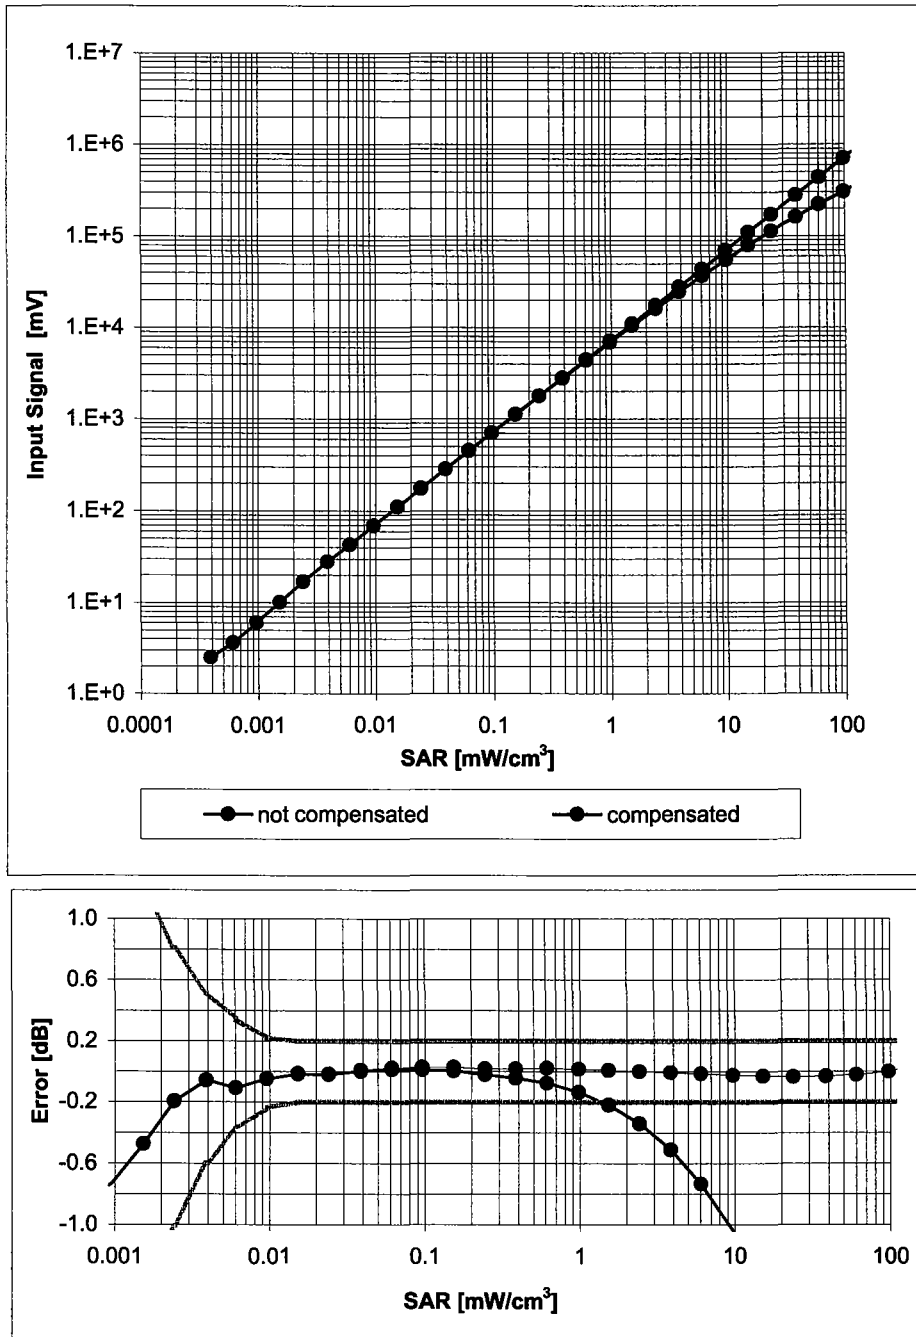

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

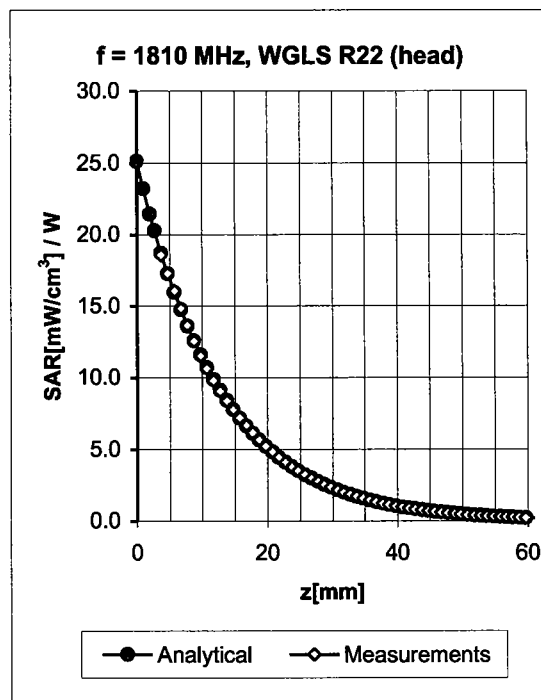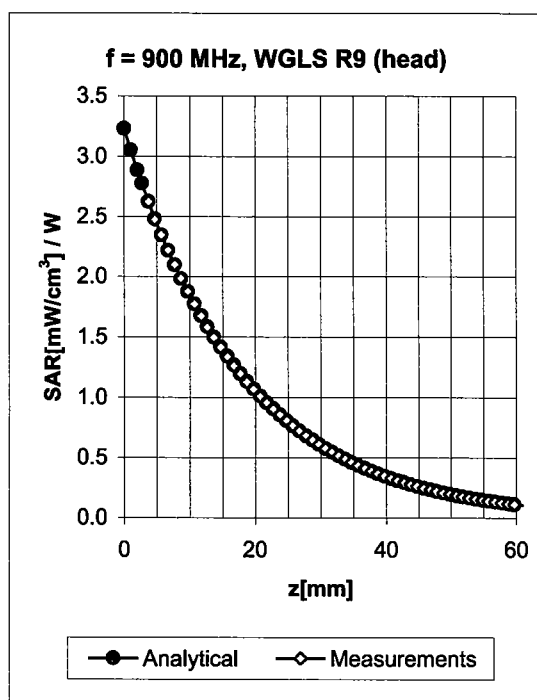


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.68	1.77	6.32 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.58	2.44	5.08 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.55	2.58	4.84 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.65	2.24	4.51 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.54	2.04	6.12 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.91	4.67 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.59	2.56	4.36 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.66	2.04	4.27 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

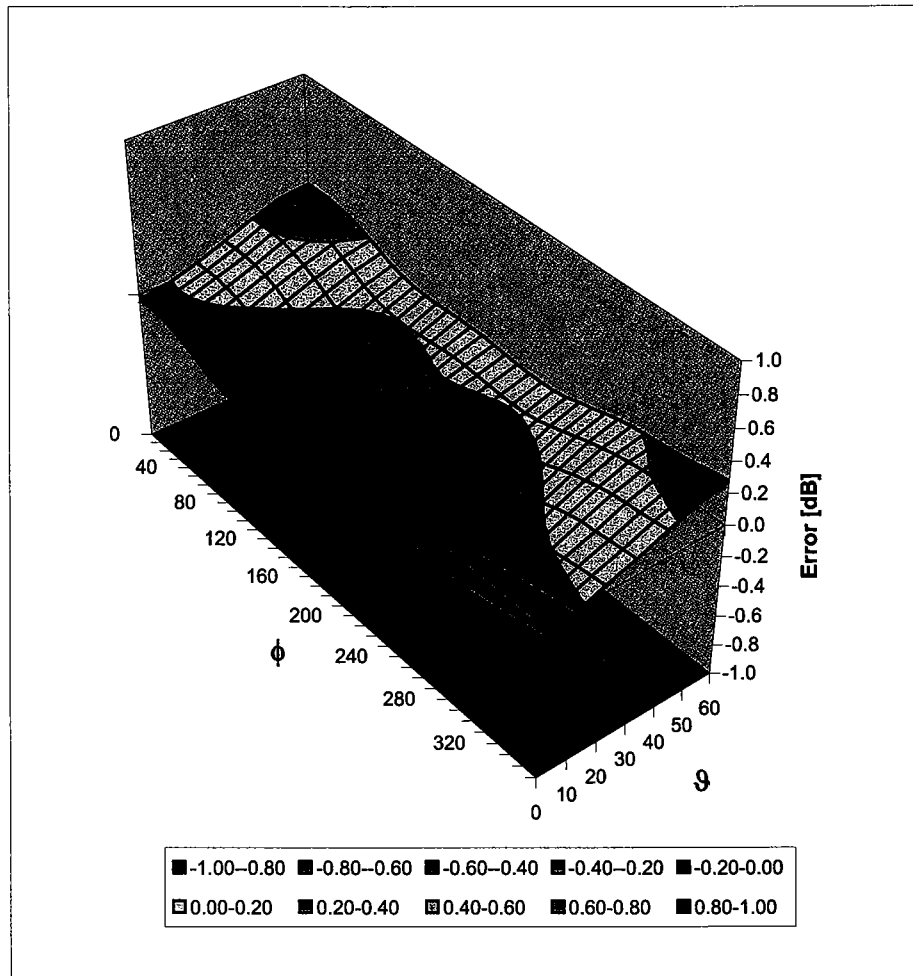

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Appendix 5

Measurement Uncertainty Budget

Uncertainty Budget for Device Under Test: 30 – 3000 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11.1	10.8	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				22.2	21.6	

Uncertainty Budget for System Check: 30 – 3000 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	⁸ , E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	⁸ , 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				9.0	8.8	9999 9
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				17.7	17.3	

Appendix 6

Photographs of the device under test



Figure 1: Front of phone



Figure 2: Back of phone



Figure 3. Phone Open



Figure 4. Phone Against the Head Phantom (Cheek Touch)



Figure 5. Phone Against the Head Phantom (15° Tilt)



Figure 6: Phone Against the Flat Phantom



Figure 7: FLV1911 Case (Front View)



Figure 8: FLV1911 Case (Side View)

Appendix 7

Dipole Characterization Certificate

Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-

	900MHz	
IEEE1528 Target:	10.8	(W/kg)
Measurement Uncertainty (k=1):	9.0%	
Measurement Period:	9-Nov-04 to 2-June-05	
# of tests performed:	813	
Grand Average:	11.3	(W/kg)
% Delta (Average - IEEE1528 Target)	4.4%	
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes	
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT	
	Historic data included the following 900MHz Dipoles:	
	69, 77	
	79, 80	
	91, 94	
	96, 97	

-New System Performance Check Targets- per APP-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
900MHz	11.3	41.5 ± 5%	0.97 ± 5%

-Approvals-

Submitted by:

Marge Kaunas

Date:

2-Jun-05

Signed:



Comments:

Spreadsheet detailing referenced historical measurements is available upon request.

Approved by:

Mark Douglas

Date:

2-Jun-05

Signed:



Comments:

=====

Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-

	2450MHz	
IEEE1528 Target:	52.4	(W/kg)
Measurement Uncertainty (k=1):	9.0%	
Measurement Period:	18-Nov-04 to 20-May-05	
# of tests performed:	52	
Grand Average:	56.8	(W/kg)
% Delta (Average - IEEE1528 Target)	8.4%	
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes	
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT	
	Historic data included the following 2450MHz Dipoles:	
	740	
	766	
	767	

-New System Performance Check Targets- per APP-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
2450MHz	56.8	39.2 ± 5%	1.80 ± 5%

-Approvals-

Submitted by:

Marge Kaunas

Date:

31-May-05

Signed:



Comments:

Spreadsheet detailing referenced historical measurements is available upon request.

Approved by:

Mark Douglas

Date:

1-Jun-05

Signed:



Comments:

=====