



PRODUCT SAFETY AND COMPLIANCE EMC LABORATORY

EMC TEST REPORT - Addendum

Test Report Number –24307-1 WLAN

Report Date – 2010-12-21

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2010-12-08 to 2010-12-21

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2010-12-22

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885
IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ
ISO/IEC-17025:2005 accredited by UKAS



Table of Contents

Test Report Details 3
Applicable Standards 3
Summary of Testing 4
General and Special Conditions 4
Equipment and Cable Configurations 5
Measuring Equipment and Calibration Information 5
Description of WLAN Transmitter 5
Measurement Procedures and Data 6
 Spectrum Bandwidth 6
 Measurement Procedure 6
 Measurement Results 6
 PEAK OUTPUT POWER 16
 Measurement Procedure 16
 Measurement Results 16
 Power Spectral Density 23
 Measurement Procedure 23
 Measurement Results 23
 SPURIOUS RF CONDUCTED EMISSIONS 24
 Measurement Procedure 24
 Measurement Results 24
 AC LINE CONDUCTED EMISSIONS 40
 Measurement Procedure 40
 Measurement Results 40

Test Report Details

Tests Performed By: Motorola (Beijing) Mobility Technologies Co., Ltd.
Asia Global Compliance Labs
No.1 Wang Jing East Road
Chao Yang District
Beijing, 100102, P. R. China
Phone: +86 10 8473 2610
FCC Registration Number: 177885
IC Registration Number: 109AW-1

Tests Requested By: Motorola Mobility, Inc
600 North US Hwy 45
Libertyville, IL 60048
United States

Product Type: Cell phone with embedded WLAN

Signaling Capability: CDMA 800, GSM 1900, Edge 1900, Bluetooth,
802.11 b & g & n

IMEI: 354711040002333

FCC ID: IHDT56MA1

Project number: 24307-1

Testing Complete Date: 2010-12-21

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

 X Part 15 Subpart C – Intentional Radiators

Applicable Standards: ANSI C63.4-2003, RSS-Gen Issue 2, RSS-210 Issue 7.

Summary of Testing

Test	Test Name	Pass/Fail
1	Spectrum Bandwidth	Pass
2	Peak Power	Pass
3	Power Spectral Density	Pass
4	Spurious RF Conducted Emissions	Pass
5	AC Line Conducted Emissions	Pass

Test	Test Name	Results
1	Spectrum Bandwidth	See plots
2	Peak Power	See plots
3	Power Spectral Density	See tables
4	Spurious RF Conducted Emissions	See plots
5	AC Line Conducted Emissions	See Plots

General and Special Conditions

The Cellular Phone hereinafter referred to as the Equipment under Test or EUT was tested using a fully charged model SNN5879A 1930mAH battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4-2003 Standard requirements during the entire duration of testing.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Manufacturer	Equipment Type	Model No.	Serial Number	Date of Calibration
Rohde Schwarz	Receiver	FSU26	200353	03/04/10
Rohde Schwarz	Receiver	ESCI	100650	03/07/10
Agilent	Attenuator	8491A	MY39263202	NCR
Rohde Schwarz	LISN	ENV216	100055	12/20/10

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list. The LISI is on a two-year calibration cycle. All other equipments are on a one-year calibration cycle.

Description of WLAN Transmitter

The EUT offers WLAN as a feature. The WLAN antenna is mounted inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a WLAN transmitter, it is designed operate with other WLAN devices as defined by the industrial standard. In this application, the device is battery operated.

De Facto EIRP Limit – Pursuant 47 CFR 15.247(b)(4); RSS-210 Section A8.4.

Criterion: The conducted output power limit of 1-watt is based on the use of antennas with directional gains that do not exceed 6 dB_i. If transmitting antennas of directional gain greater than 6 dB_i are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB_i.

The antenna employed by this transmitter is intended to be omni-directional, and thus will not exhibit directional gain in excess of 6 dB_i. The conducted power is less than the limits set forth (see elsewhere in this report for details).

Measurement Procedures and Data

Spectrum Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage.

The WLAN emission of the EUT was enabled. The spectrum analyzer used the following settings:


1. RBW \geq 100 kHz
2. VBW \geq RBW
3. Sweep = auto
4. Detector function = peak
5. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The n dB down function was used to measure 6 dB down one side of the emission. The n dB down function and marker was moved to the other side of the emission until it was even with the reference marker. The 6 dB down reading at this point was the 6 dB bandwidth of the emission. The same procedure was repeated for 20 dB bandwidth.

Measurement Results


See attached

802.11 b @ 11Mbps

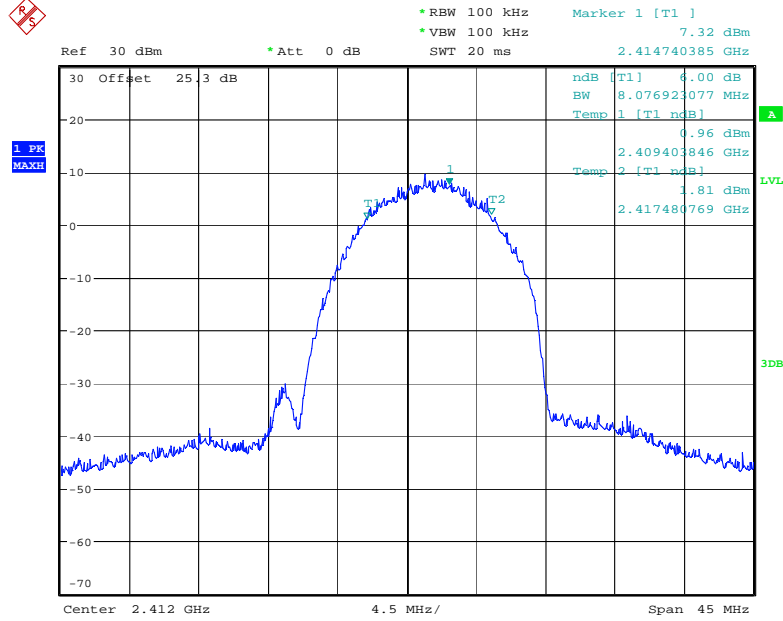


Date: 21.DEC.2010 10:29:28

6dB Bandwidth Channel 1 @ 11Mbps

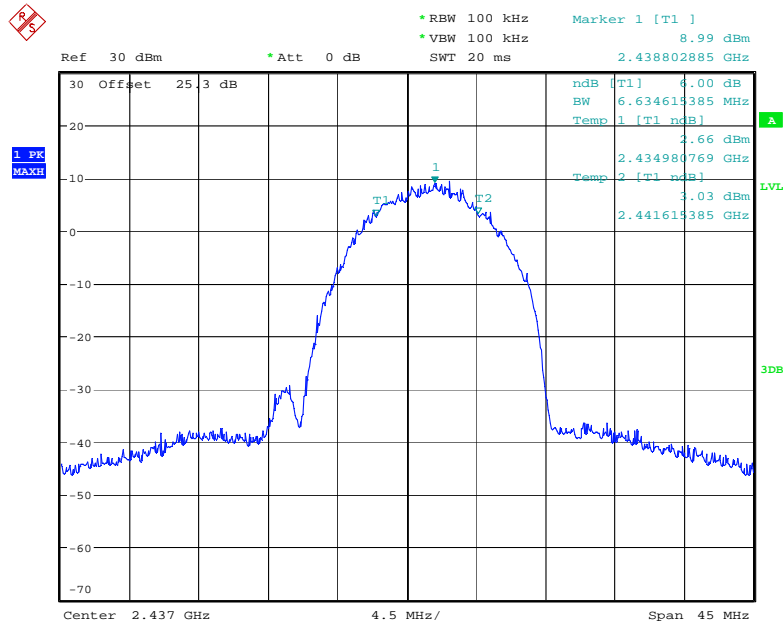


Date: 21.DEC.2010 10:28:18

6dB Bandwidth Channel 6 @ 11Mbps

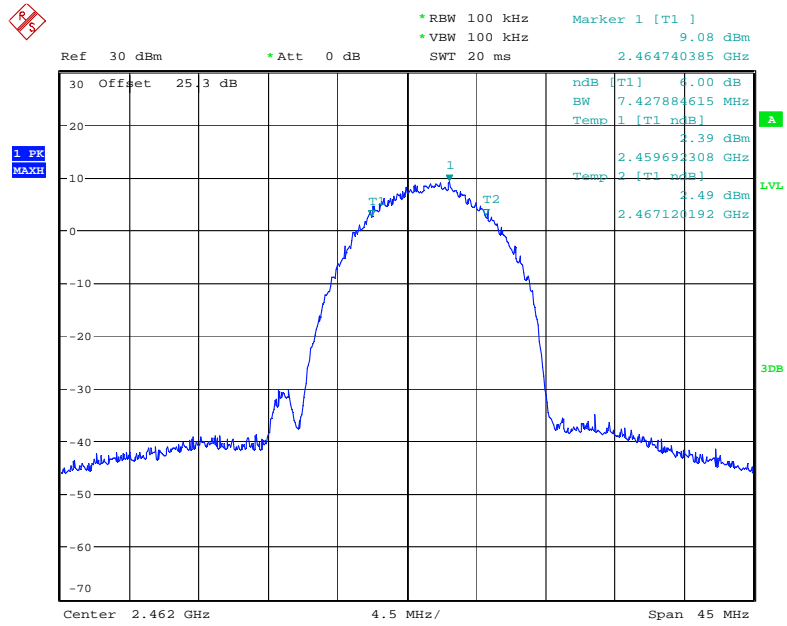


Date: 21.DEC.2010 10:27:12

6dB Bandwidth Channel 11 @ 11Mbps

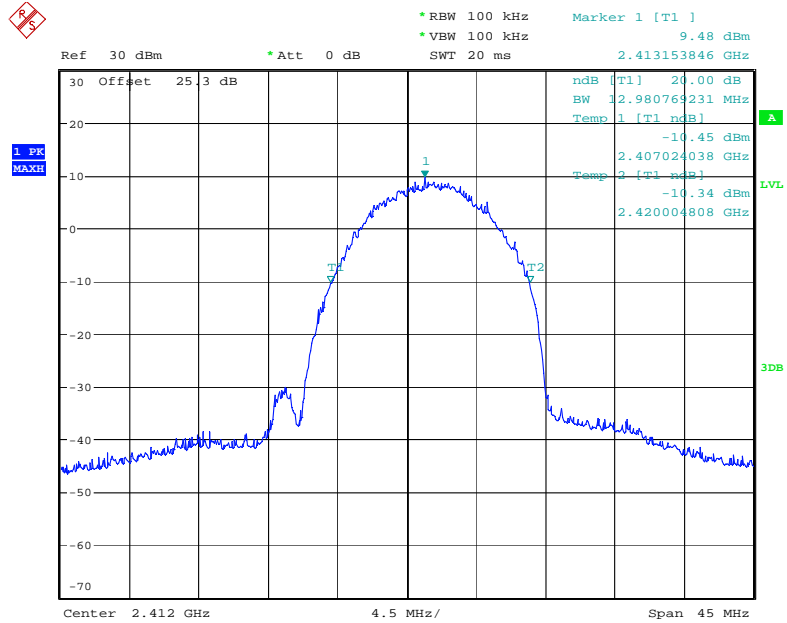


Date: 21.DEC.2010 10:29:51

20dB Bandwidth Channel 1 @ 11Mbps

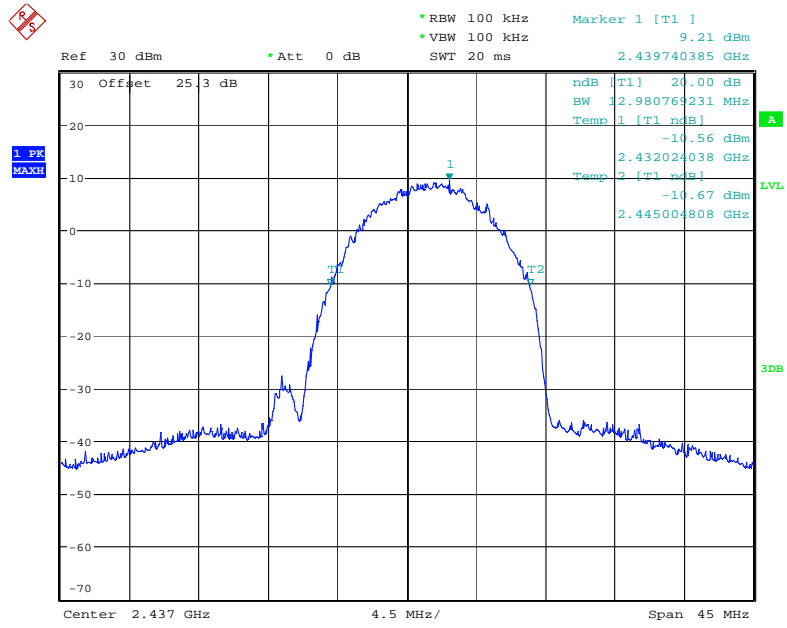

Date: 21.DEC.2010 10:28:37


20dB Bandwidth Channel 6 @ 11Mbps

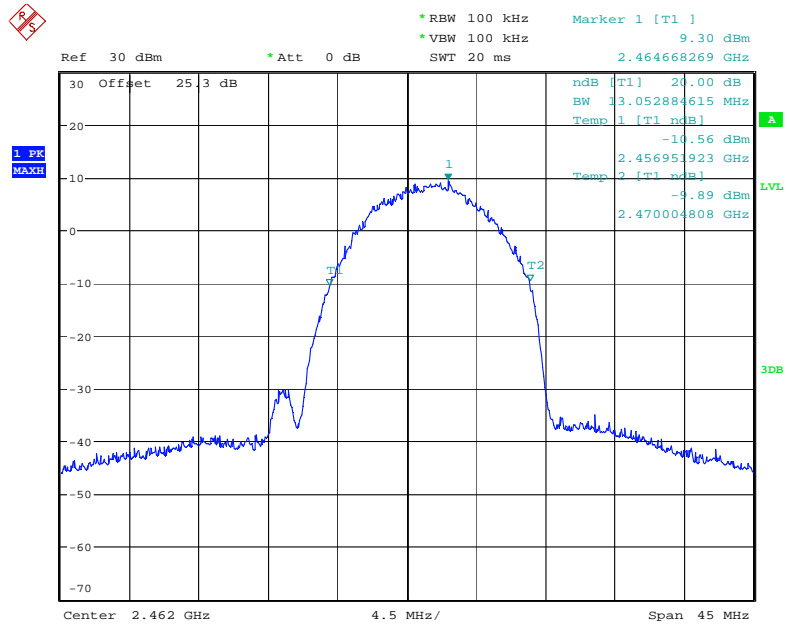

Date: 21.DEC.2010 10:27:28


20dB Bandwidth Channel 11 @ 11Mbps

802.11 g @ 6Mbps

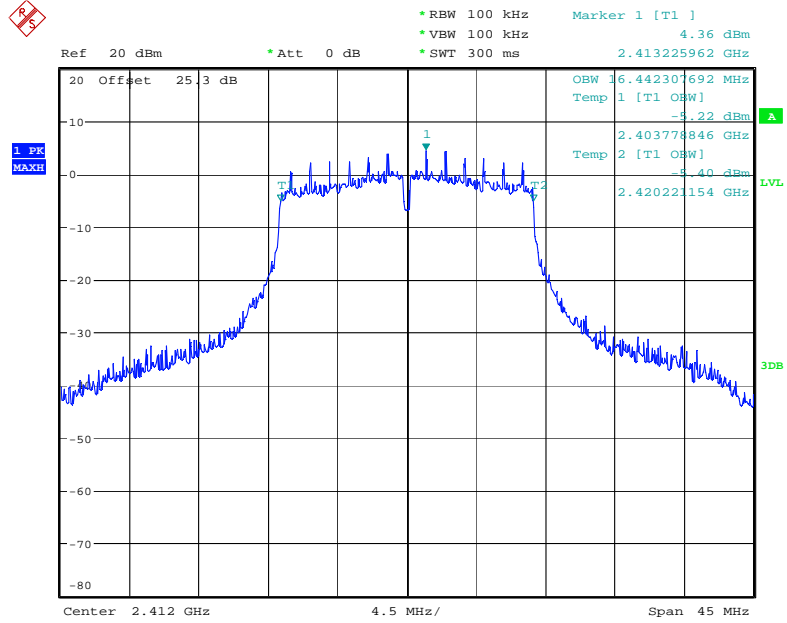


Date: 21.DEC.2010 11:25:07

6dB Bandwidth Channel 1 @6Mbps

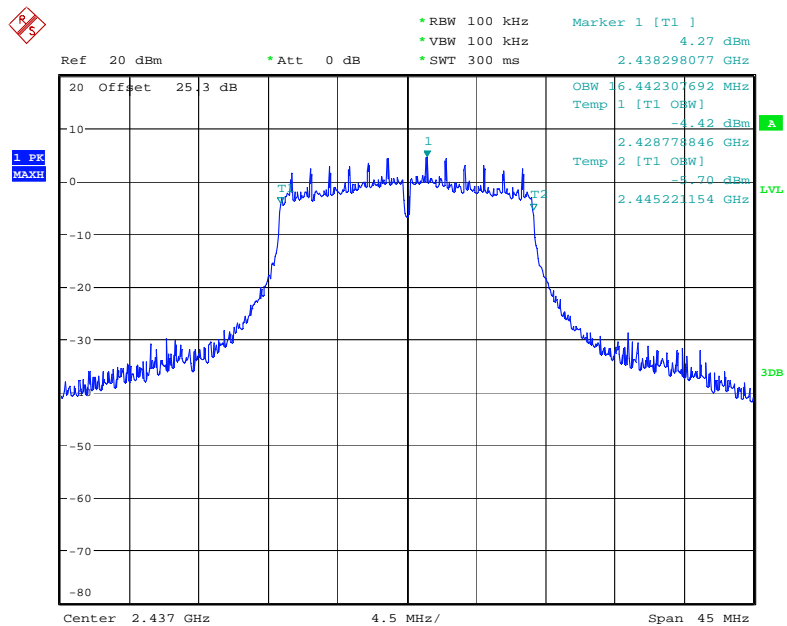


Date: 21.DEC.2010 11:15:05

6dB Bandwidth Channel 6 @ 6Mbps

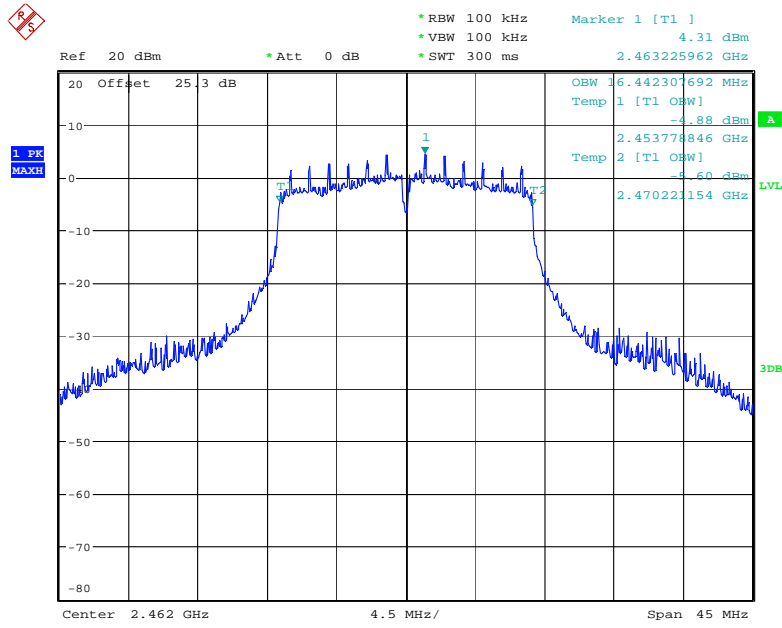


Date: 21.DEC.2010 11:14:09

6 dB Bandwidth Channel 11 @ 6Mbps

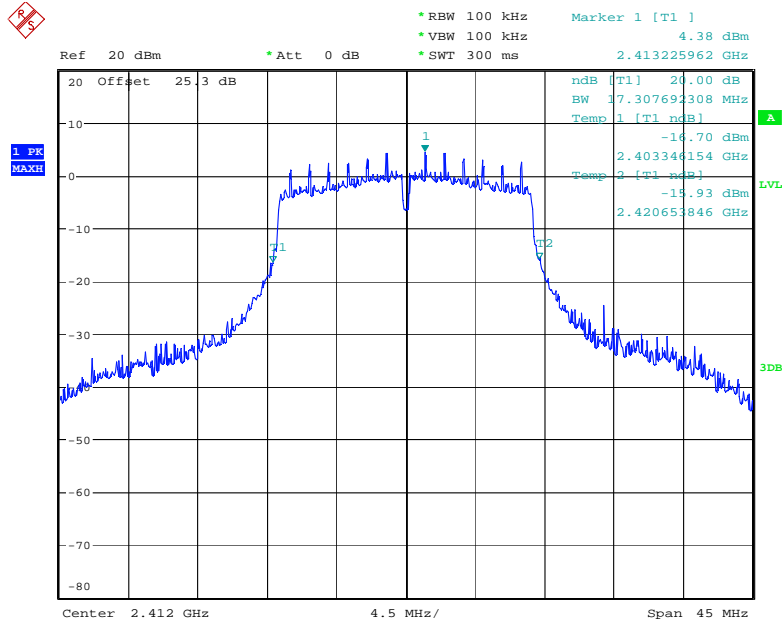


Date: 21.DEC.2010 11:24:28

20dB Bandwidth Channel 1 @ 6Mbps

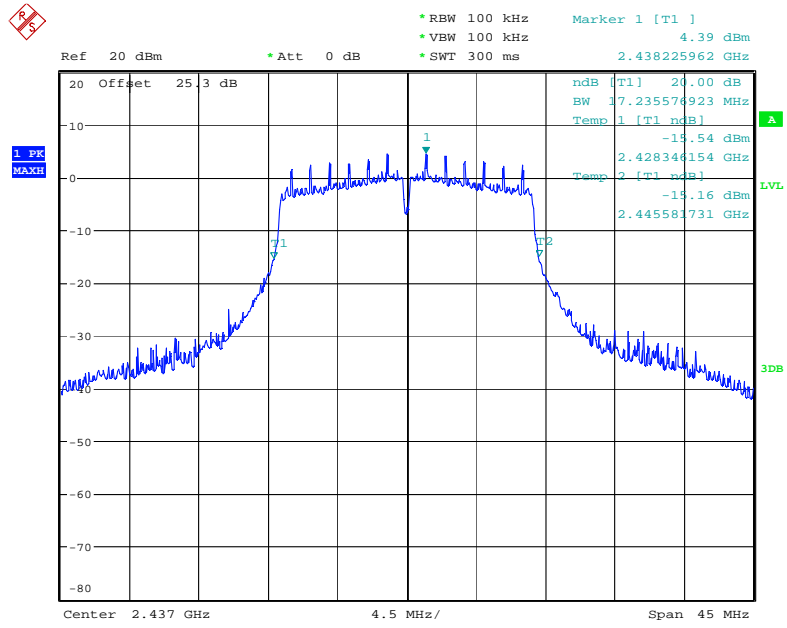

Date: 21.DEC.2010 11:15:35


20dB Bandwidth Channel 6 @ 6Mbps

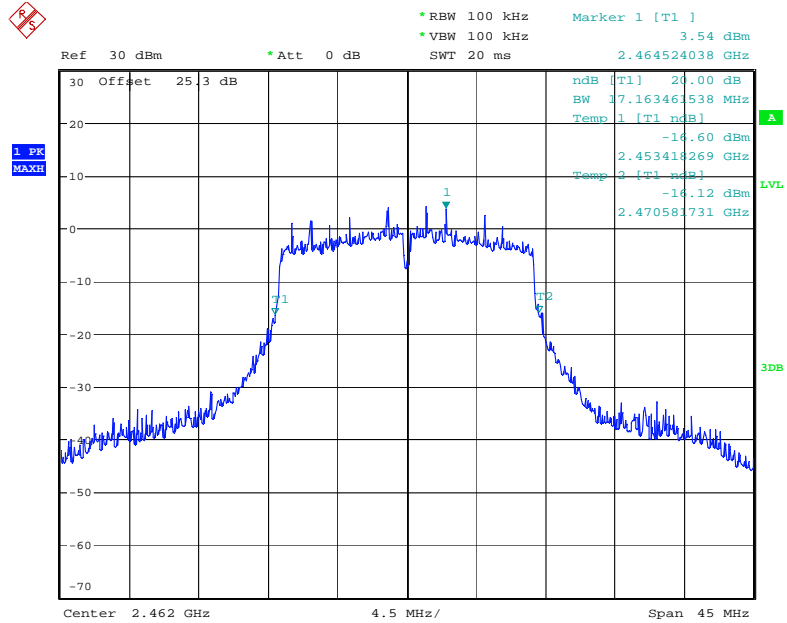

Date: 21.DEC.2010 11:12:27


20dB Bandwidth Channel 11 @ 6Mbps

802.11 n @ 13Mbps

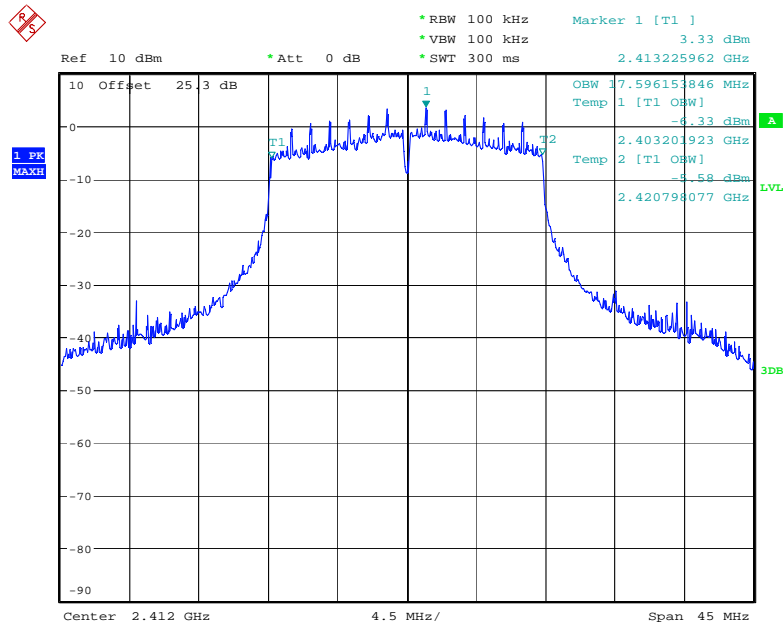


Date: 21.DEC.2010 13:20:04

6dB Bandwidth Channel 1 @ 13Mbps

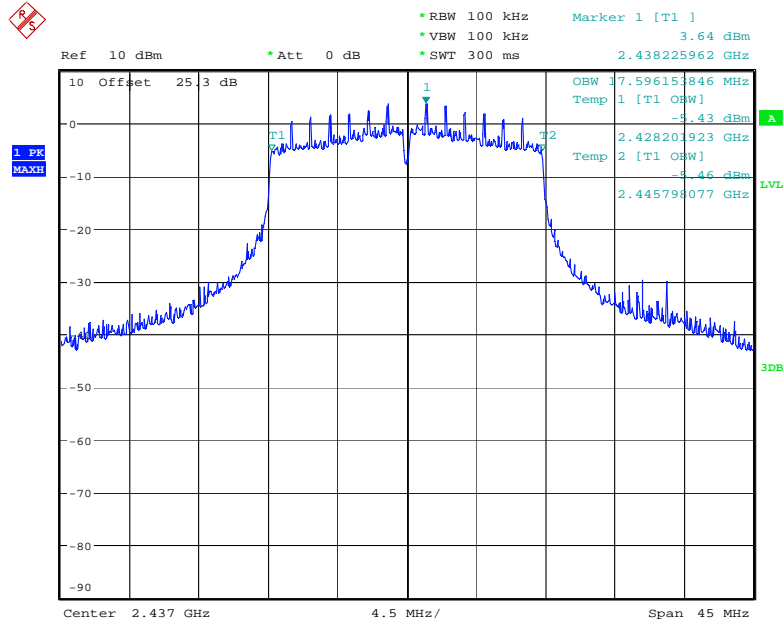


Date: 21.DEC.2010 13:30:48

6dB Bandwidth Channel 6 @ 13Mbps

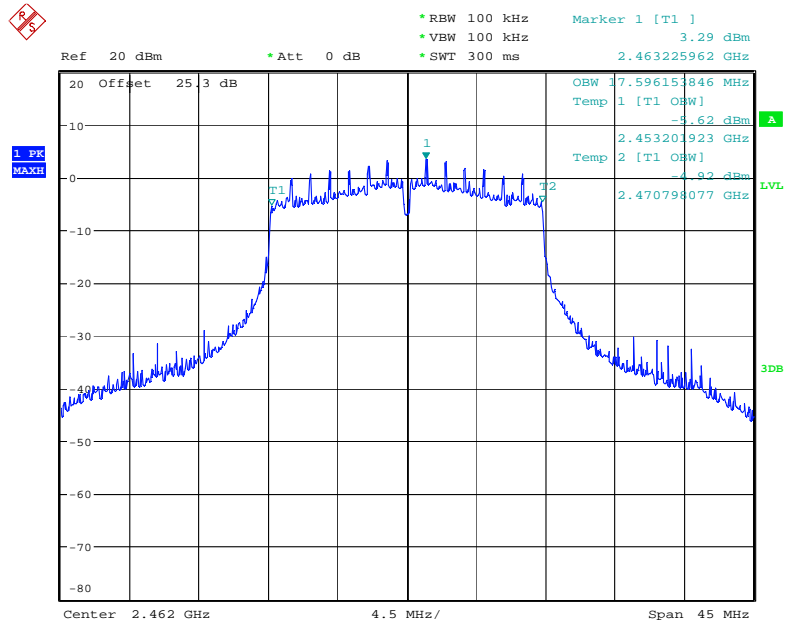


Date: 21.DEC.2010 13:48:35

6dB Bandwidth Channel 11 @ 13Mbps

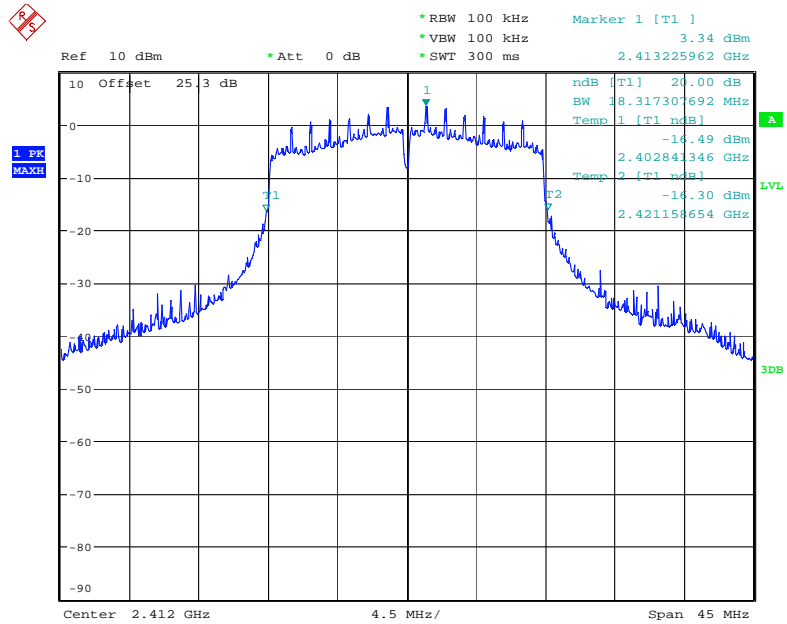


Date: 21.DEC.2010 13:20:37

20dB Bandwidth Channel 1 @ 13Mbps

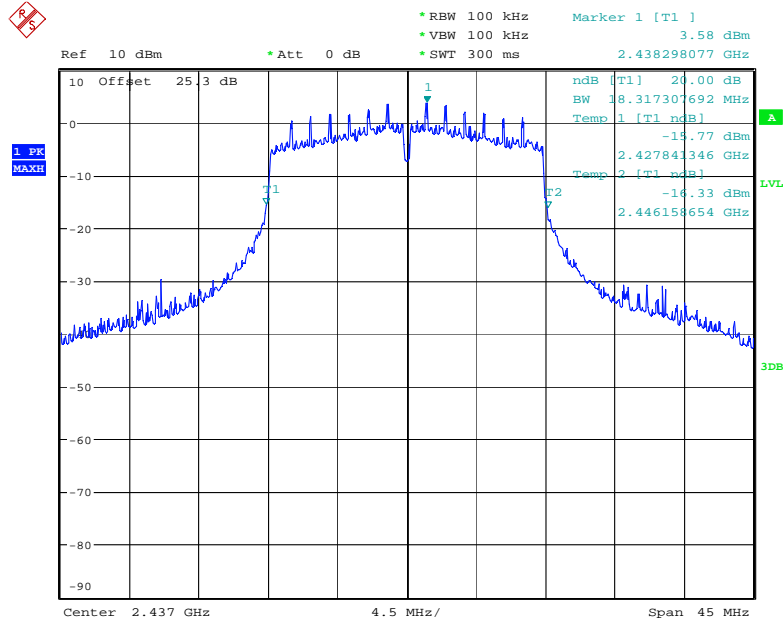

Date: 21.DEC.2010 13:31:26

20dB Bandwidth Channel 6 @ 13Mbps

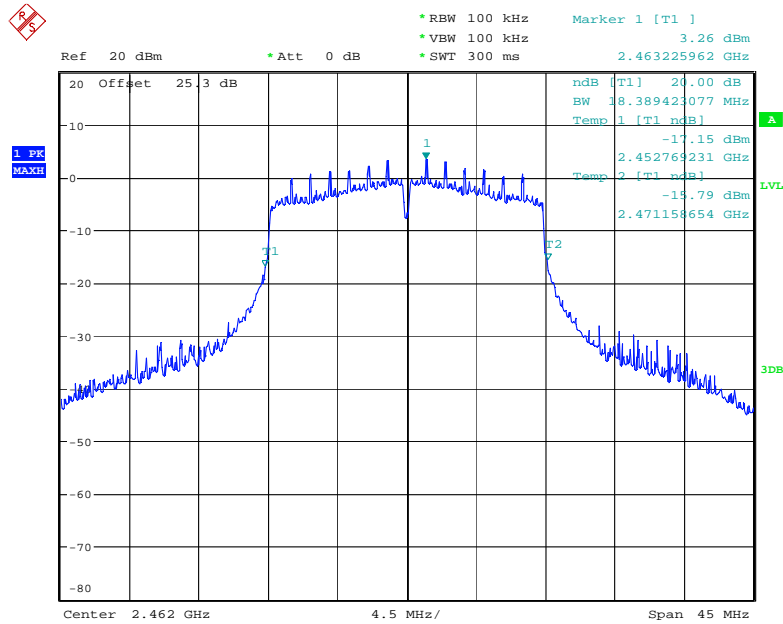

Date: 21.DEC.2010 13:49:23

20dB Bandwidth Channel 11 @ 13Mbps

PEAK OUTPUT POWER

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the Spectrum analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage. Initially, an average detector is used to measure power in the low, middle and high channels for all data rate. The average measurements are used to determine which data rate is to be fully tested for each supported mode. Using a peak detector, the power is then measured for the applicable data rates.

Measurement Results

See Attached

Initial average power measurements


Band	Channel	Average power (dBm) for <u>802.11b</u> Data Rates			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
WLAN (WIFI)	1	19.01	19.56	19.34	19.57
	6	18.67	19.01	19.17	18.99
	11	18.84	19.42	19.16	19.04

Band	Channel	Average power (dBm) for <u>802.11g</u> Data Rates							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
WLAN (WIFI)	1	15.36	15.27	15.32	15.05	14.42	14.2	13.92	13.93
	6	14.91	15.01	14.96	14.55	14.37	13.96	13.65	13.64
	11	15.13	15.14	15.15	14.89	14.32	14.08	13.85	13.68

Band	Channel	Average power (dBm) for 802.11n Data Rates							
		20 MHz BW, 800 ns GI							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
WLAN (WIFI)	1	13.5	14.63	13.76	13.92	13.77	13.72	13.47	13.15
	6	14.32	14.34	13.84	13.65	13.44	13.17	13.1	12.86
	11	14.49	14.44	14.03	13.65	13.62	13.25	13.37	12.77


Based on these initial measurements, it was determined that testing will be performed in the 11Mbps data for the 802.11b mode, the 6Mbps data rate for the 802.11g mode, the 13Mbps data rate for 802.11n 800ns GI mode. Plots showing the peak power measurements for the applicable data rates follow.

802.11b Mode

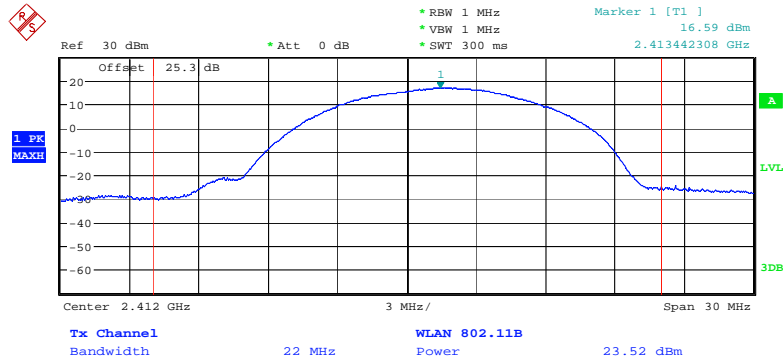


Date: 21.DEC.2010 10:20:37

Max. Power Channel 1 @ 11Mbps

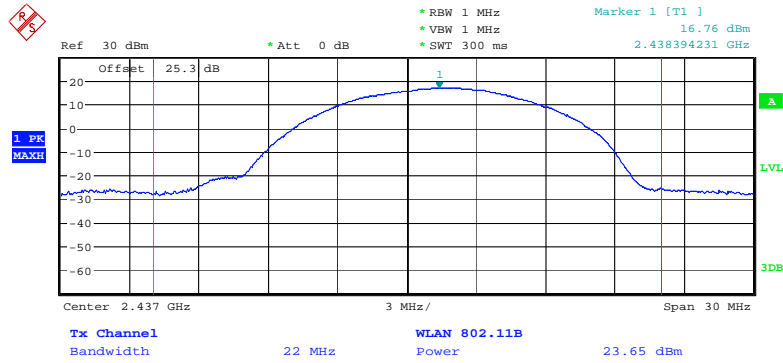

Date: 21.DEC.2010 10:22:33


Max. Power Channel 6 @ 11Mbps

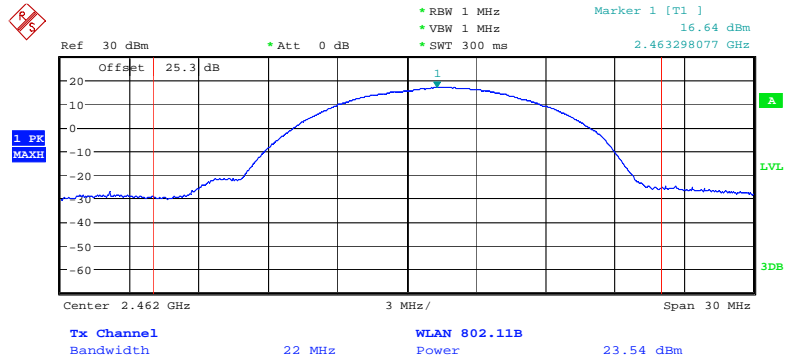

Date: 21.DEC.2010 10:25:58


Max. Power Channel 11 @ 11Mbps

802.11 g Mode

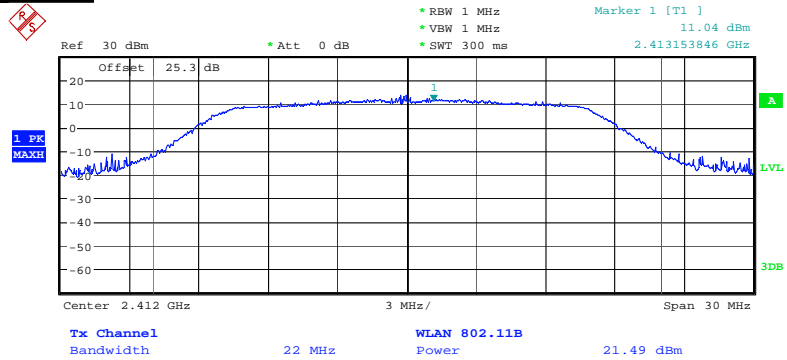

Date: 21.DEC.2010 12:26:22

Max. Power Channel 1 @ 6Mbps

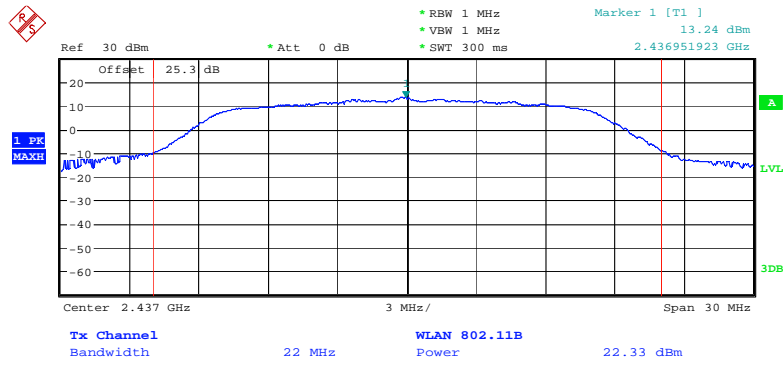

Date: 21.DEC.2010 12:31:05


Max. Power Channel 6 @ 6Mbps



Date: 21.DEC.2010 12:39:41


Max. Power Channel 11 @ 6Mbps

802.11n 800ns GI Mode

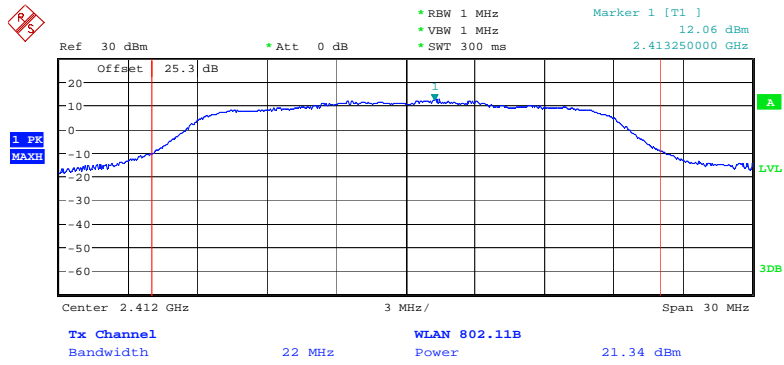


Date: 21.DEC.2010 13:57:28

Max. Power Channel 1 @ 13Mbps

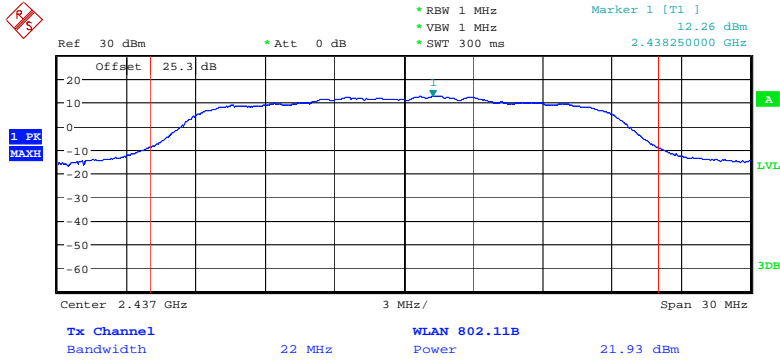

Date: 21.DEC.2010 13:36:20

Max. Power Channel 6 @ 13Mbps

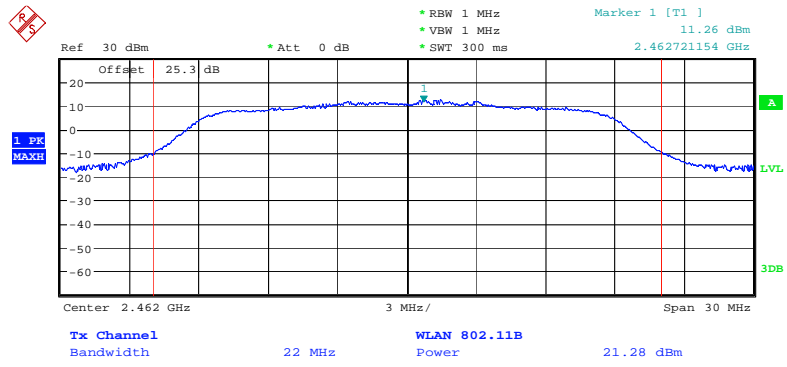

Date: 21.DEC.2010 13:44:57

Max. Power Channel 11 @ 13Mbps

Power Spectral Density

CFR 47 Part 15.247 (d)

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage.

The WLAN DSSS function of the EUT was enabled. The spectrum analyzer used the following settings:

- Span = 300kHz
- VBW =30kHz
- RBW=3kHz
- Sweep = 50ms
- Detector function = peak
- Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate.

Measurement Results

2412 MHz	2437MHz	2462MHz
-8.62	-8.69	-8.27

802.11 b @ 11Mbps

2412 MHz	2437MHz	2462MHz
-16.74	-15.97	-16.23

802.11 g @ 6 Mbps

2412 MHz	2437MHz	2462MHz
-18.46	-18.14	-18.83

802.11 n 800ns GI @ 13 Mbps

SPURIOUS RF CONDUCTED EMISSIONS

CFR 47 Part 15.247


Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

802.11b Mode @ 11Mbps

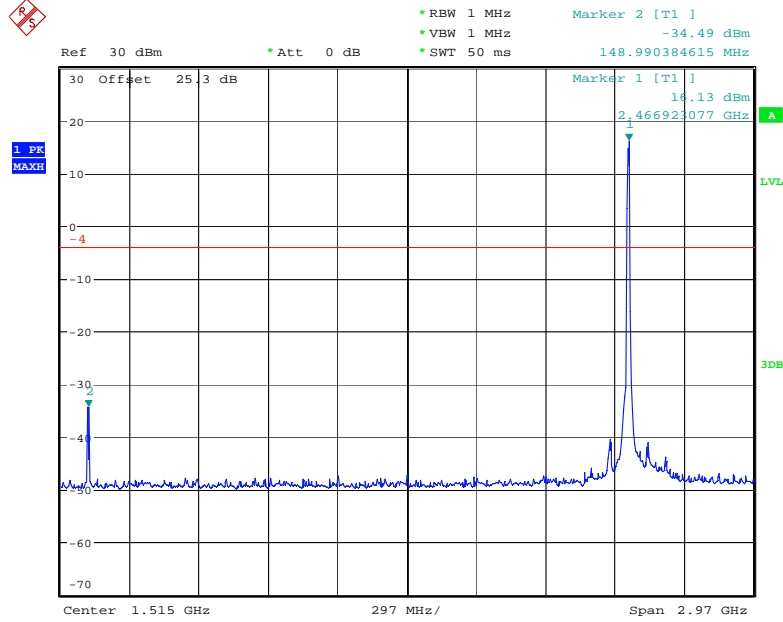


Date: 21.DEC.2010 10:35:05

Conducted Spurious Emissions 30-3000MHz (Low Channel)

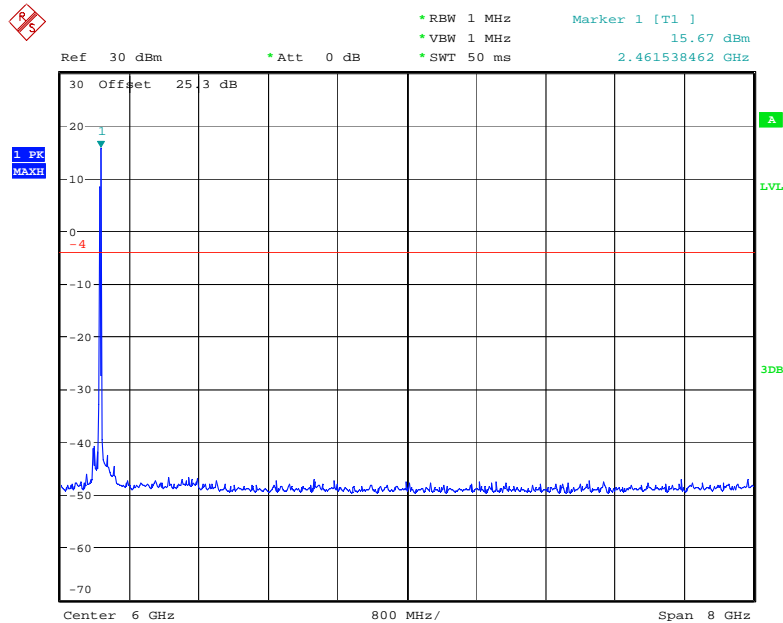


Date: 21.DEC.2010 10:35:52

Conducted Spurious Emissions 2-10GHz (Low Channel)

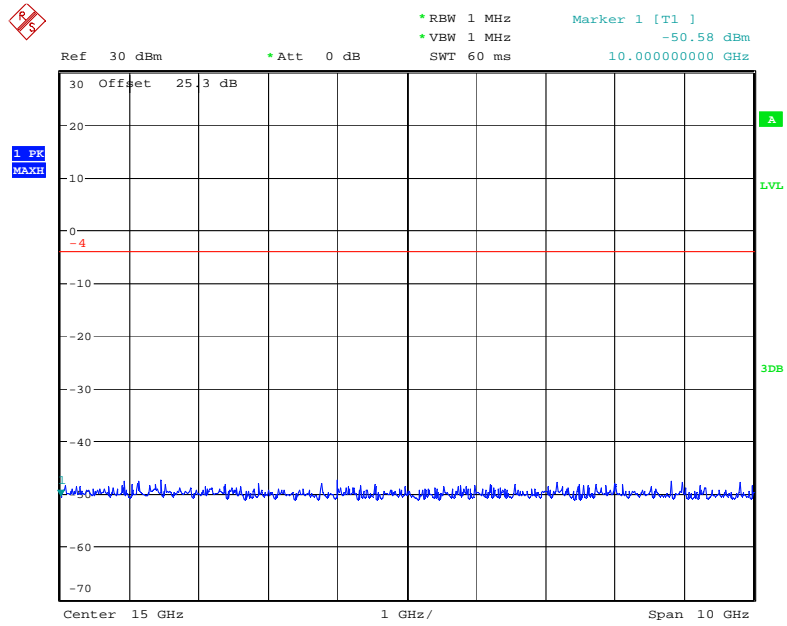


Date: 21.DEC.2010 10:36:45

Conducted Spurious Emissions 10-20GHz (Low Channel)

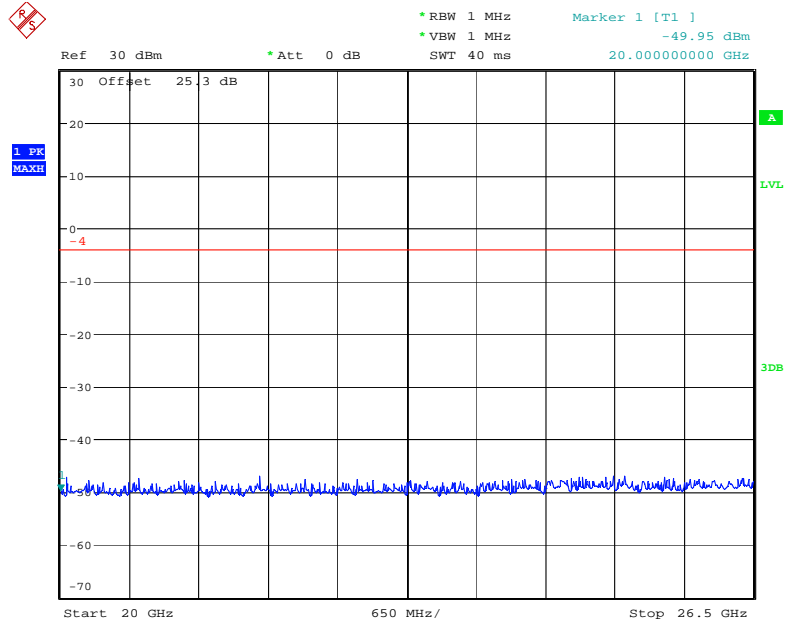


Date: 21.DEC.2010 10:37:14

Conducted Spurious Emissions 20-26.5GHz (Low Channel)

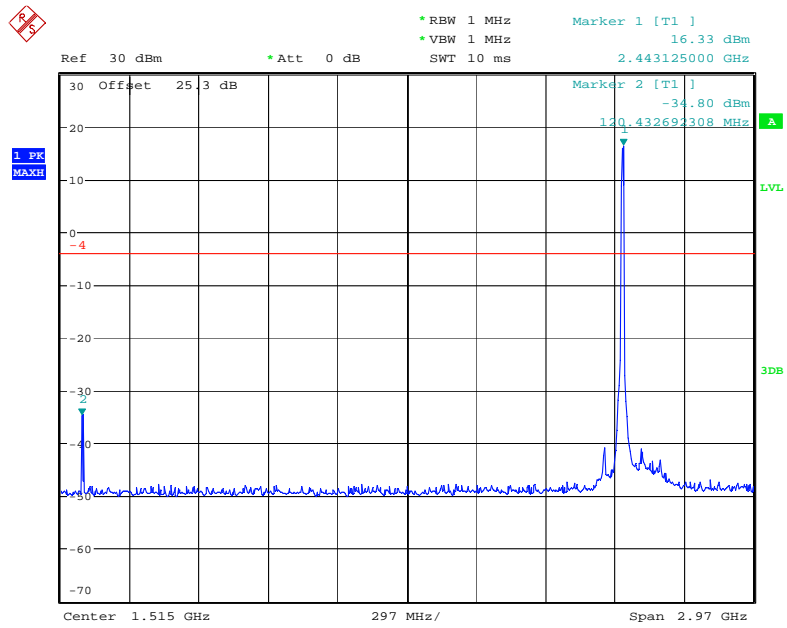


Date: 21.DEC.2010 10:38:59

Conducted Spurious Emissions 30-3000MHz (Mid Channel)

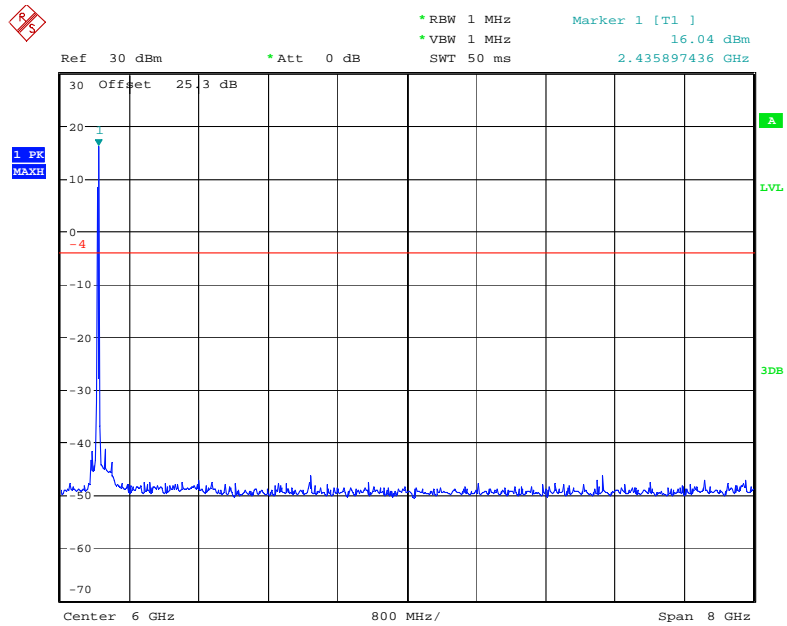


Date: 21.DEC.2010 10:39:32

Conducted Spurious Emissions 2-10GHz (Mid Channel)

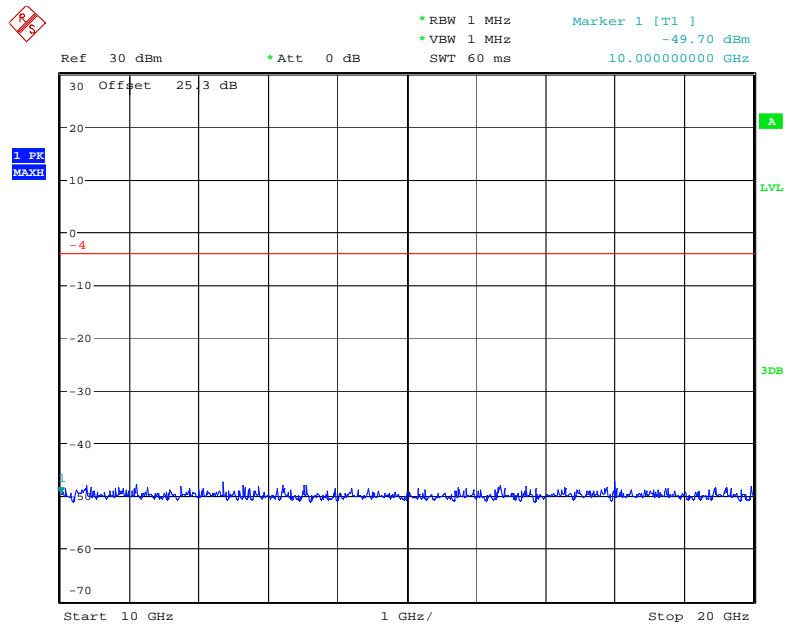


Date: 21.DEC.2010 10:39:51

Conducted Spurious Emissions 10-20GHz (Mid Channel)

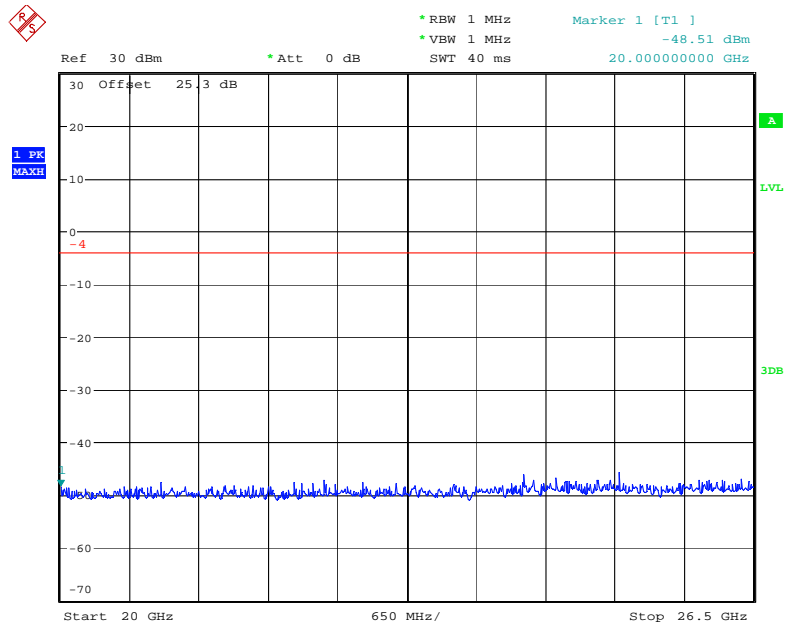


Date: 21.DEC.2010 10:40:01

Conducted Spurious Emissions 20-26.5GHz (Mid Channel)

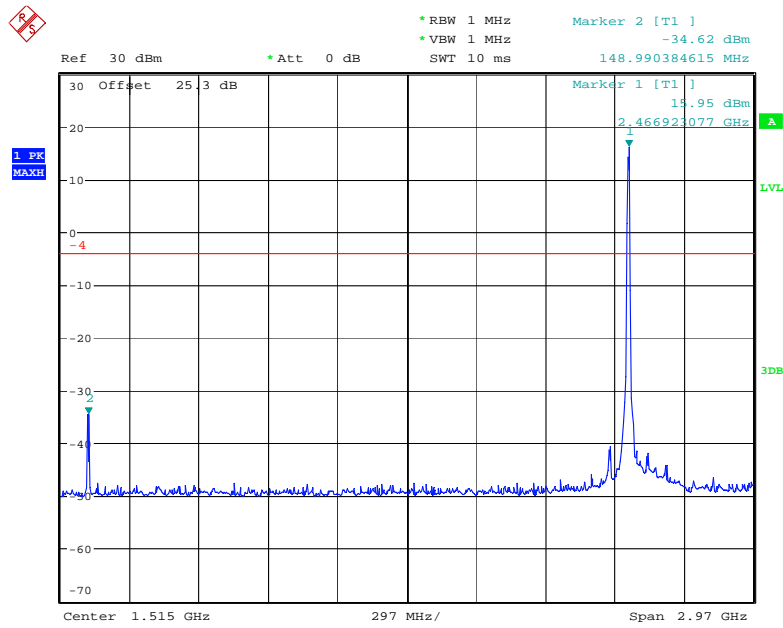


Date: 21.DEC.2010 10:41:10

Conducted Spurious Emissions 30-3000MHz (High Channel)

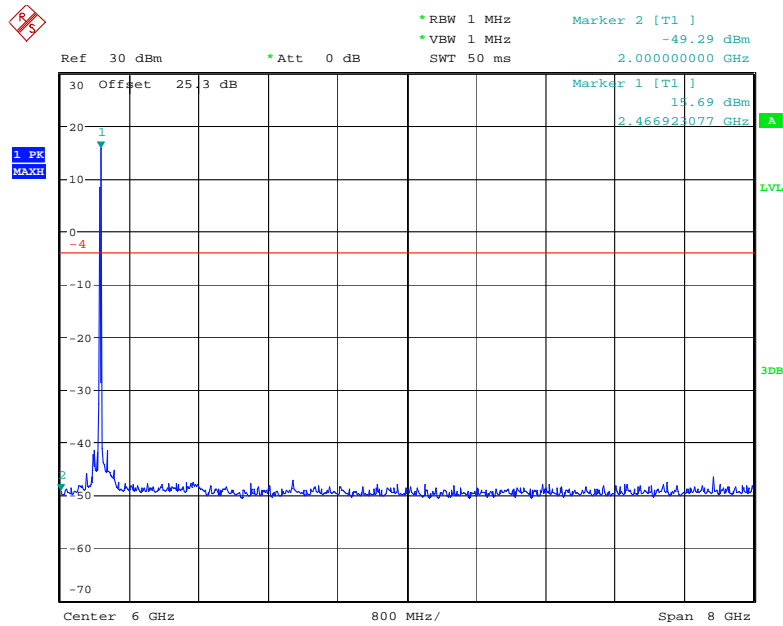


Date: 21.DEC.2010 10:41:33

Conducted Spurious Emissions 2-10GHz (High Channel)

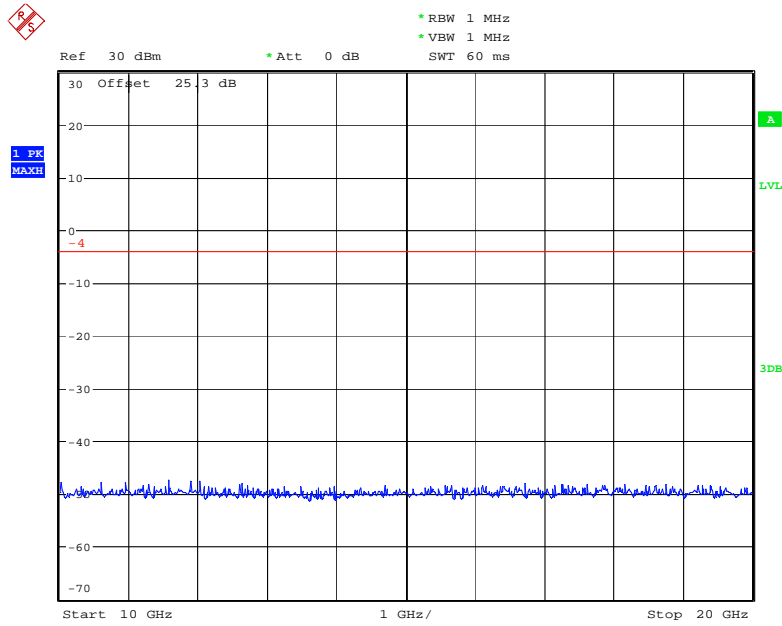

Date: 21.DEC.2010 10:41:57


Conducted Spurious Emissions 10-20GHz (High Channel)

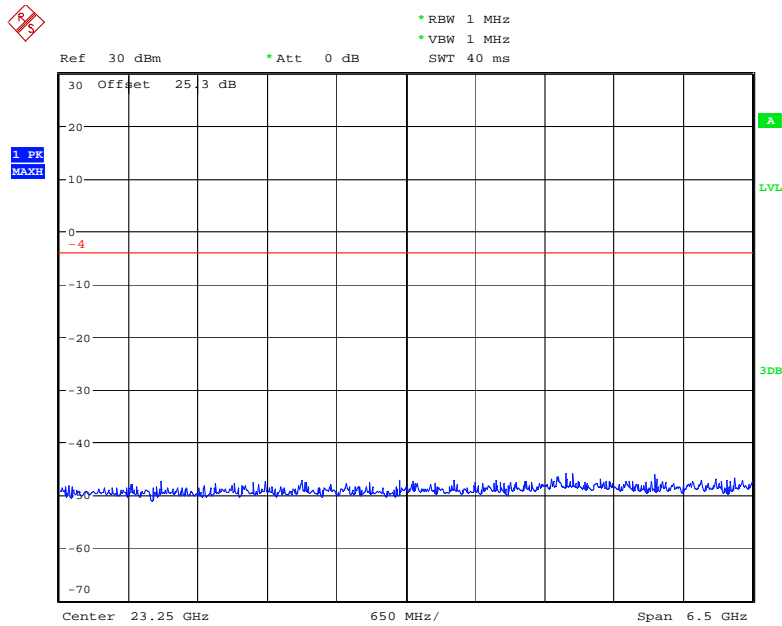

Date: 21.DEC.2010 10:42:11


Conducted Spurious Emissions 20-26.5GHz (High Channel)

802.11g Mode @ 6Mbps

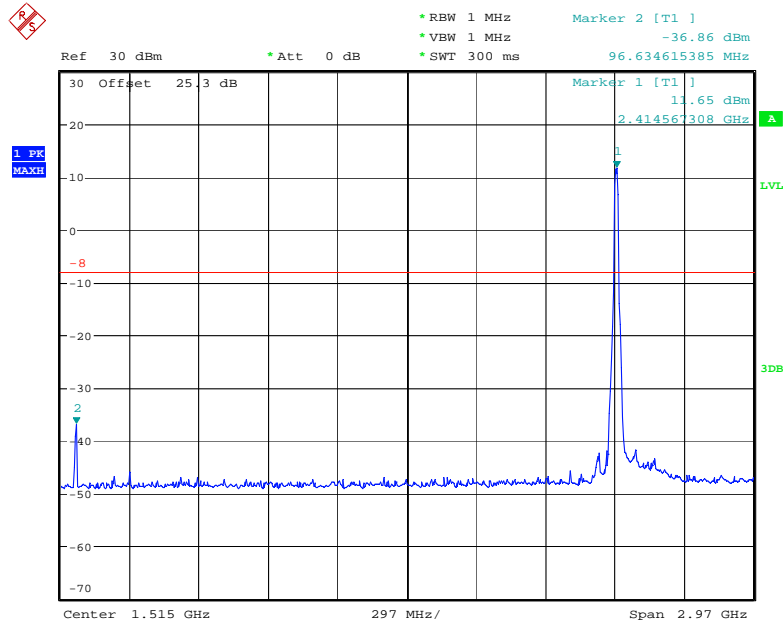


Date: 21.DEC.2010 12:48:14

Conducted Spurious Emissions 30-3000MHz (Low Channel)

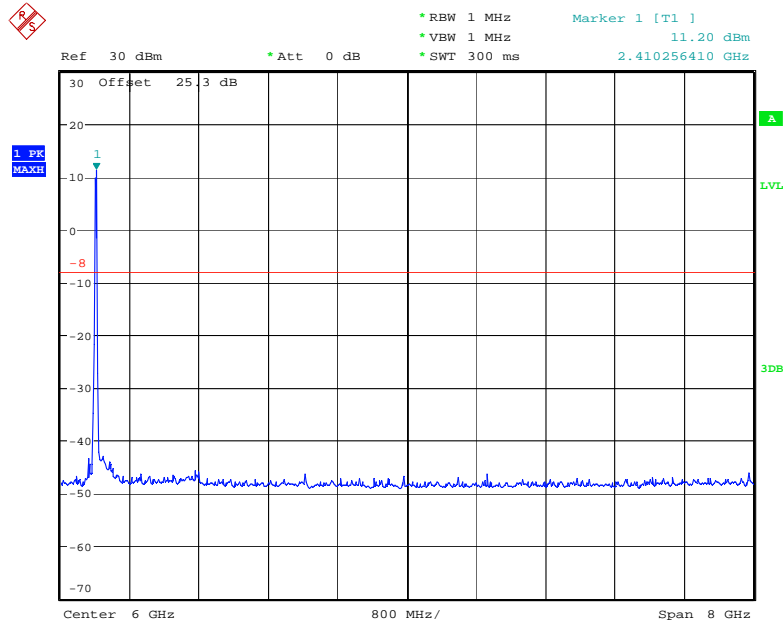


Date: 21.DEC.2010 12:49:06

Conducted Spurious Emissions 2-10GHz (Low Channel)

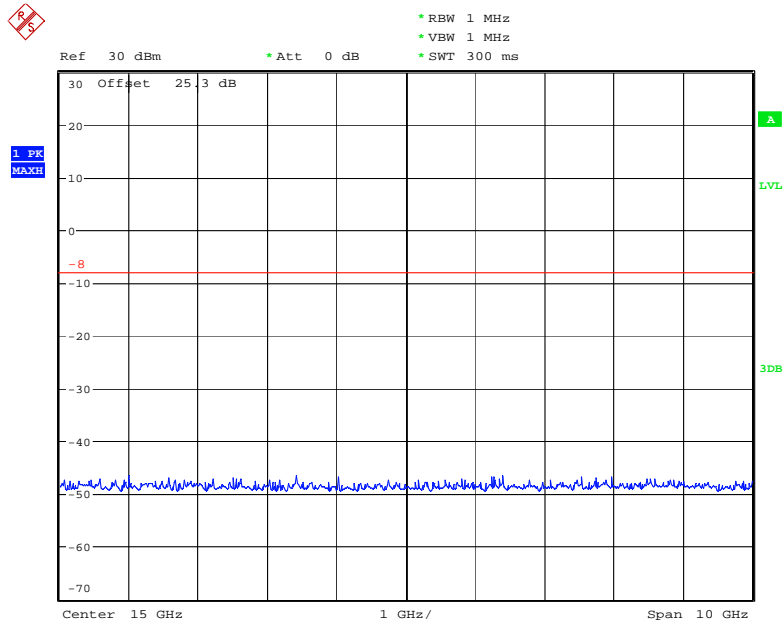


Date: 21.DEC.2010 12:49:41

Conducted Spurious Emissions 10-20GHz (Low Channel)

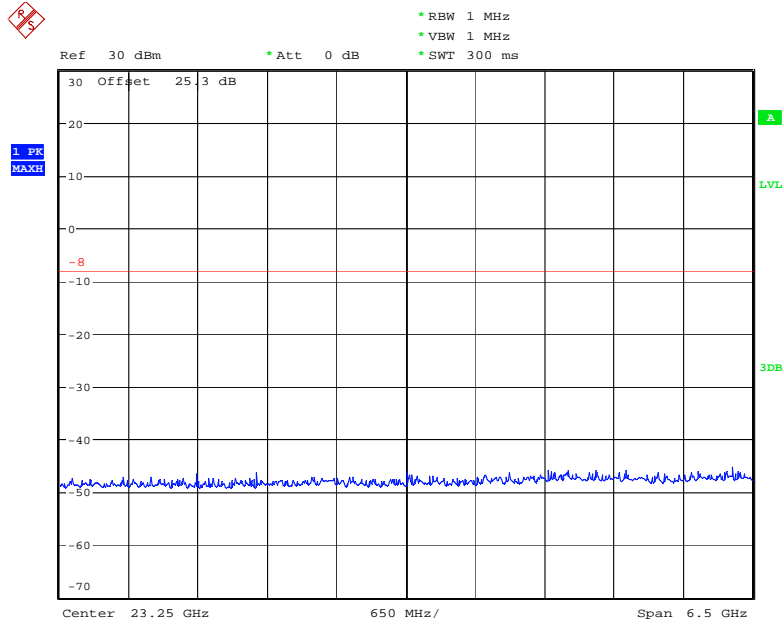


Date: 21.DEC.2010 12:50:07

Conducted Spurious Emissions 20-26.5GHz (Low Channel)

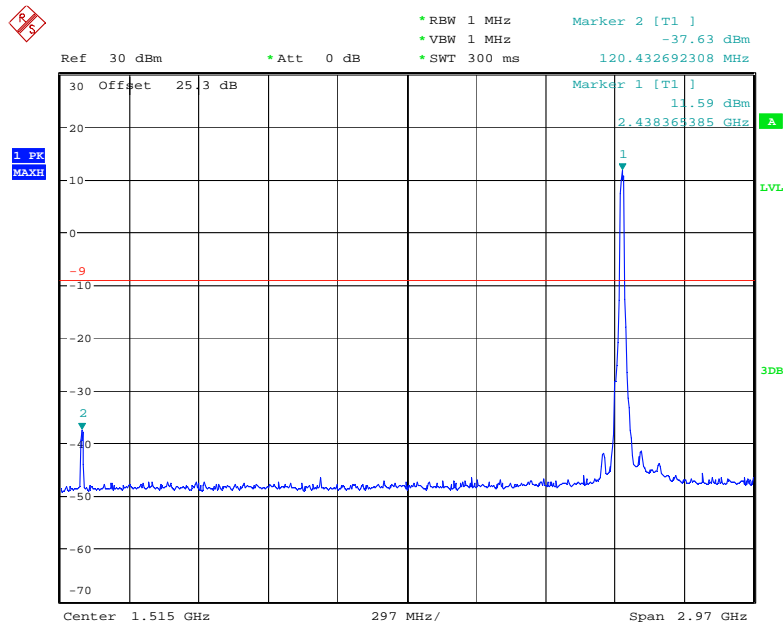


Date: 21.DEC.2010 12:52:43

Conducted Spurious Emissions 30-3000MHz (Mid Channel)

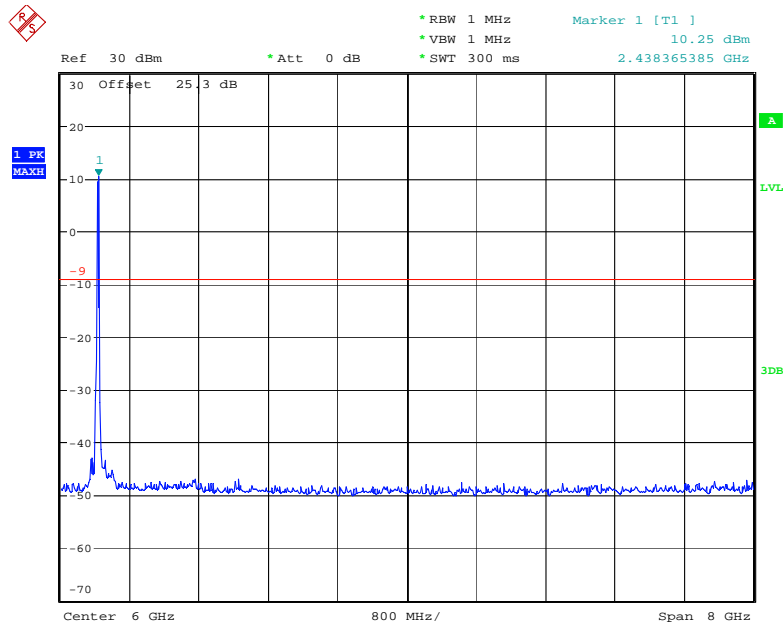


Date: 21.DEC.2010 12:53:20

Conducted Spurious Emissions 2-10GHz (Mid Channel)

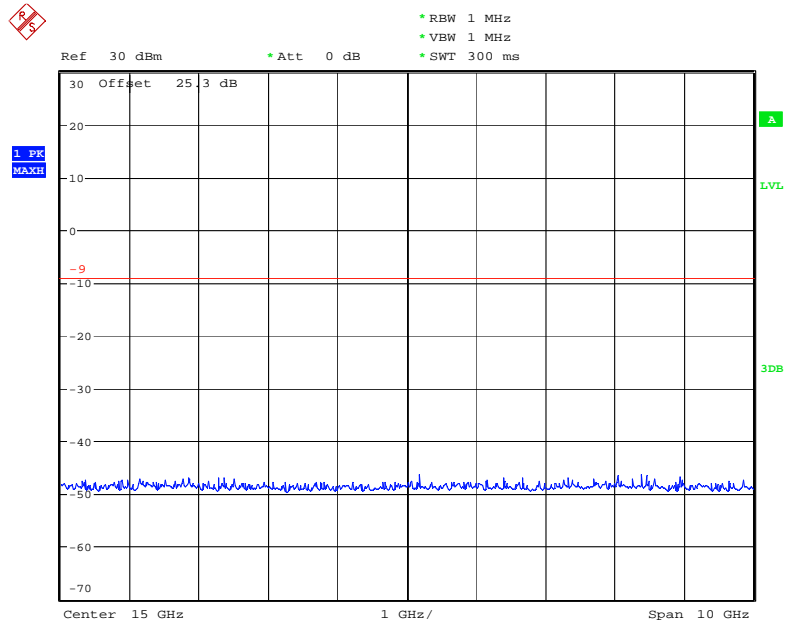


Date: 21.DEC.2010 12:54:05

Conducted Spurious Emissions 10-20GHz (Mid Channel)

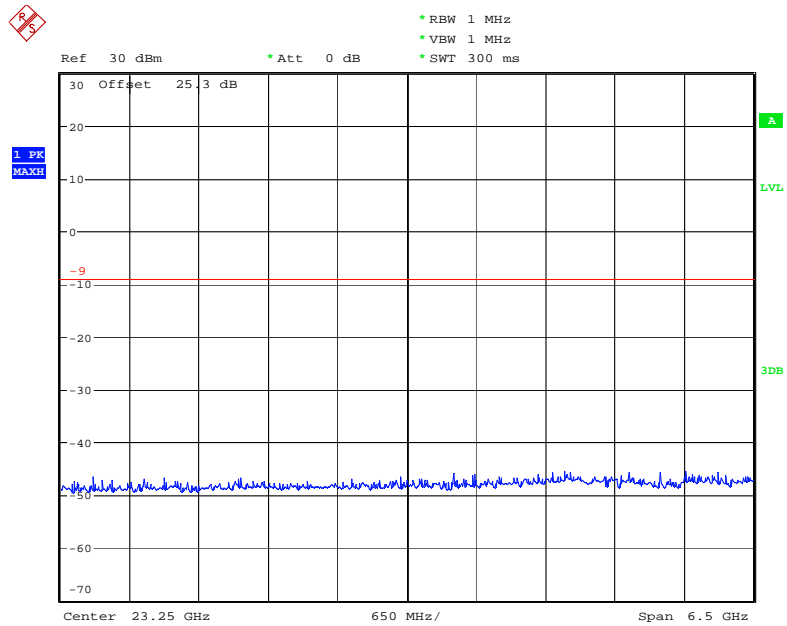


Date: 21.DEC.2010 12:54:32

Conducted Spurious Emissions 20-26.5GHz (Mid Channel)

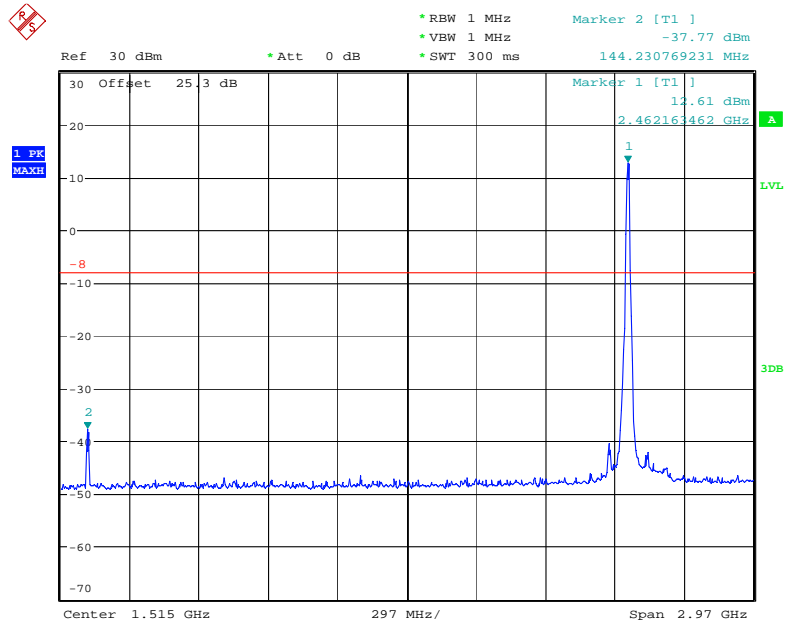


Date: 21.DEC.2010 12:55:45

Conducted Spurious Emissions 30-3000MHz (High Channel)

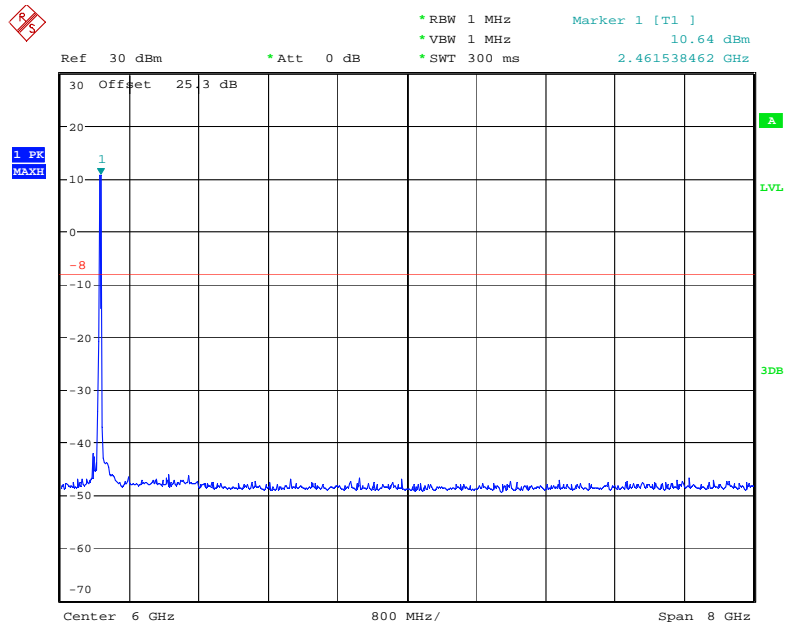


Date: 21.DEC.2010 12:56:25

Conducted Spurious Emissions 2-10GHz (High Channel)

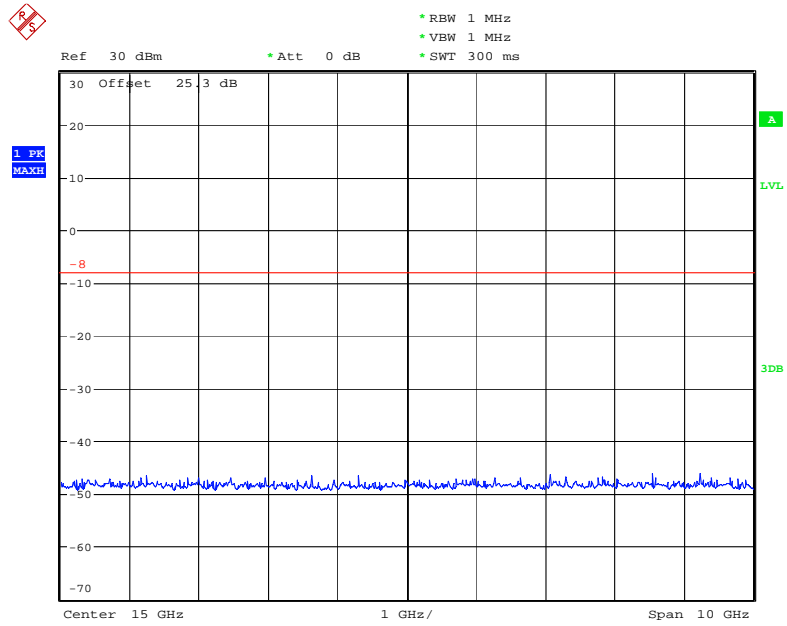

Date: 21.DEC.2010 12:56:46


Conducted Spurious Emissions 10-20GHz (High Channel)

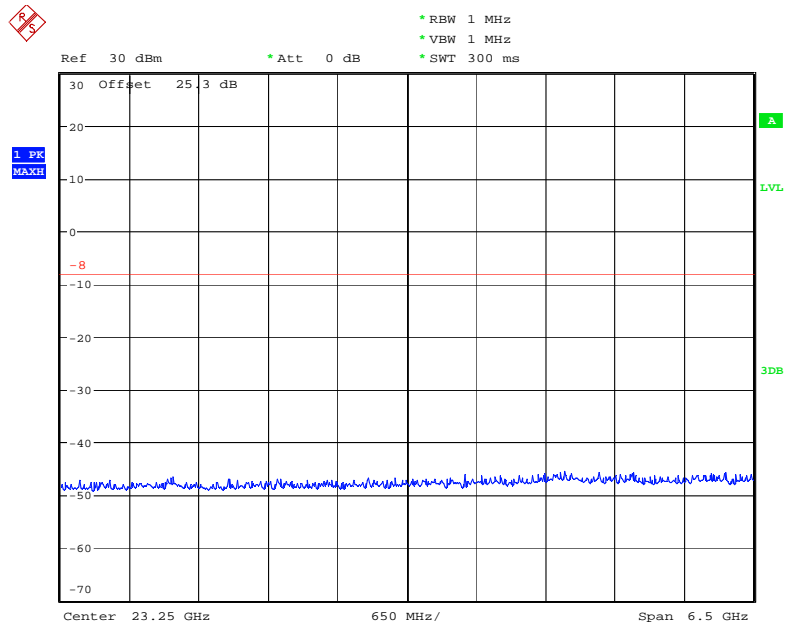

Date: 21.DEC.2010 12:57:06


Conducted Spurious Emissions 20-26.5GHz (High Channel)

802.11b Mode Band edge

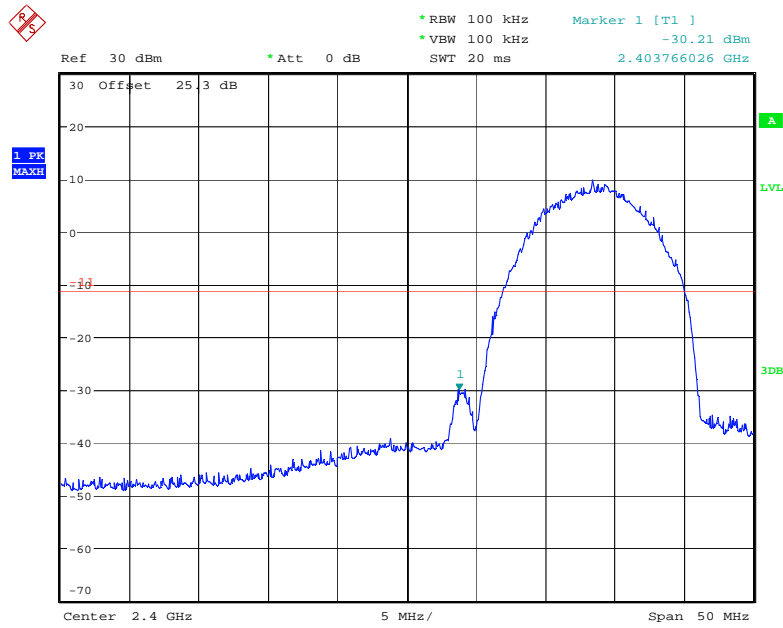

Date: 21.DEC.2010 10:47:20


Channel 1 @ 11 Mbps – Lower Band Edge

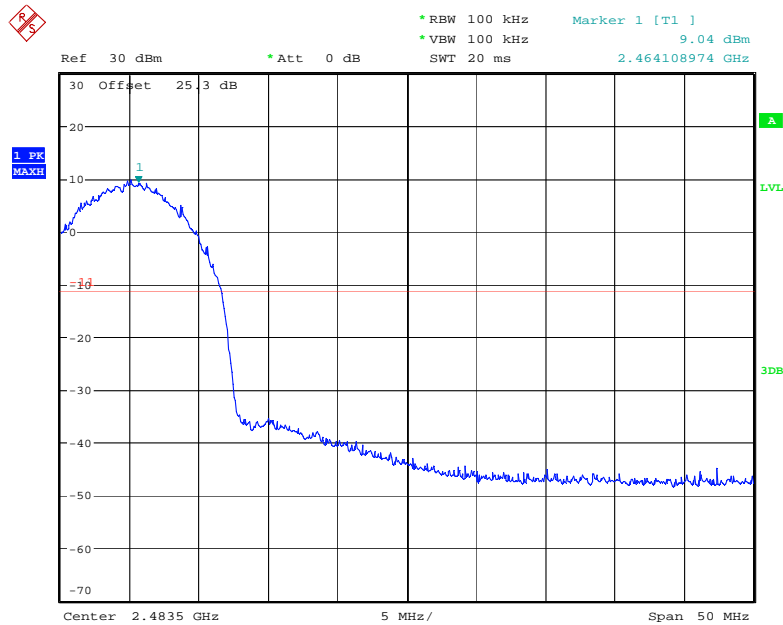

Date: 21.DEC.2010 10:46:09


Channel 11 @ 11 Mbps – Upper Band Edge

802.11g Mode Band Edge

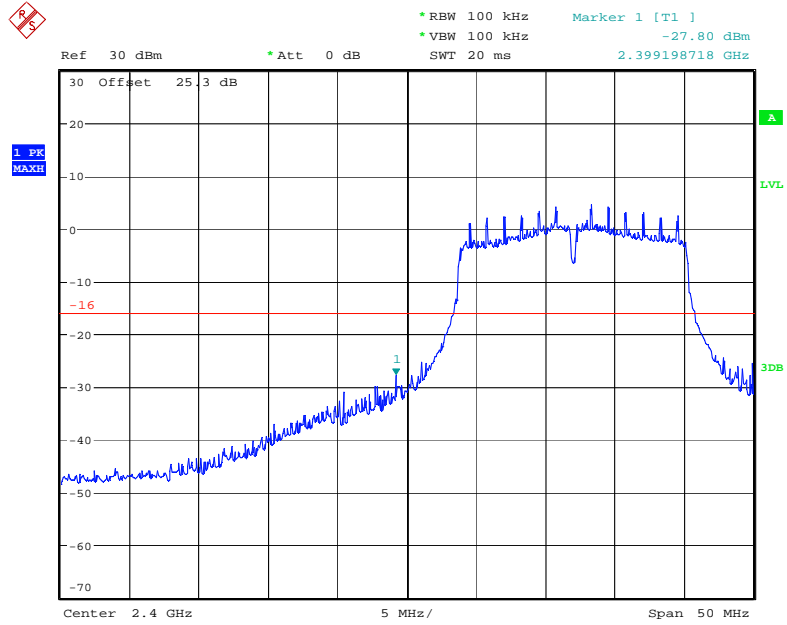

Date: 21.DEC.2010 11:08:27


Channel 1 @ 6 Mbps – Lower Band Edge

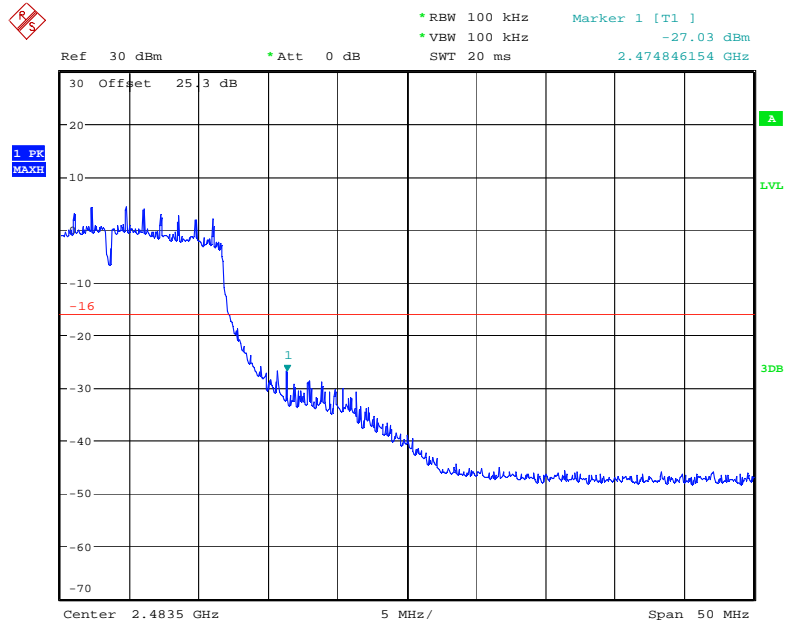

Date: 21.DEC.2010 11:11:21


Channel 11 @ 6 Mbps – Upper Band Edge

802.11n 800ns GI Mode Band edge

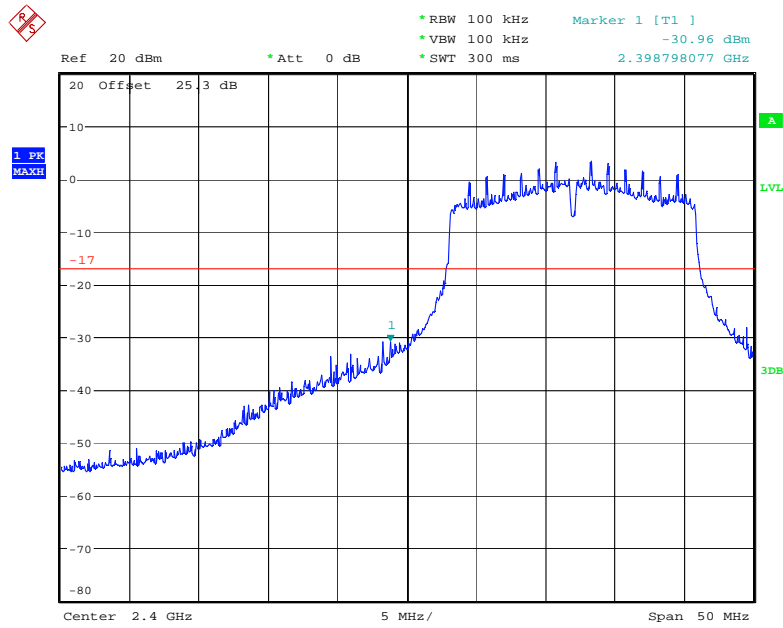

Date: 21.DEC.2010 13:55:04

Channel 1 @ 13 Mbps – Lower Band Edge

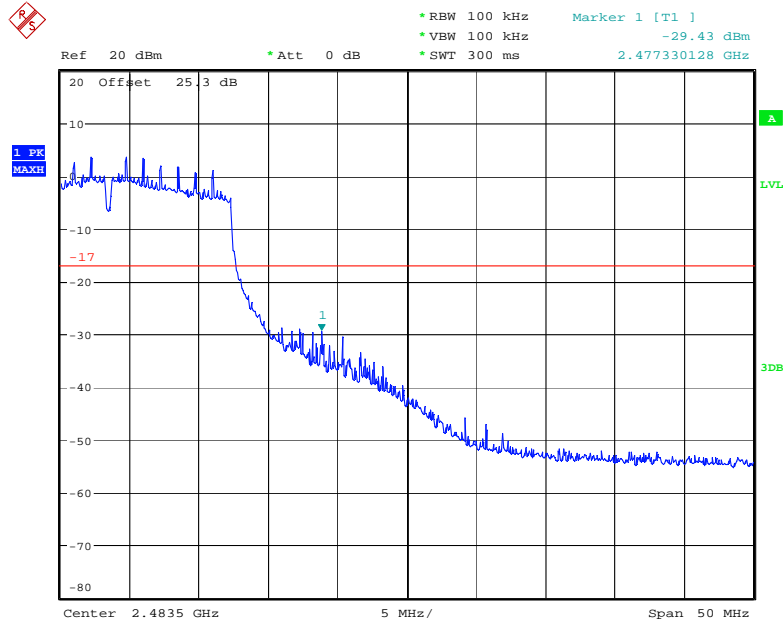

Date: 21.DEC.2010 13:54:12

Channel 11 @ 13 Mbps – Upper Band Edge

AC LINE CONDUCTED EMISSIONS

CFR 47 Part 15.207

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Detectors – Peak and Average Detector


Measurement Results

See attached:


802.11b Mode @ 11Mbps

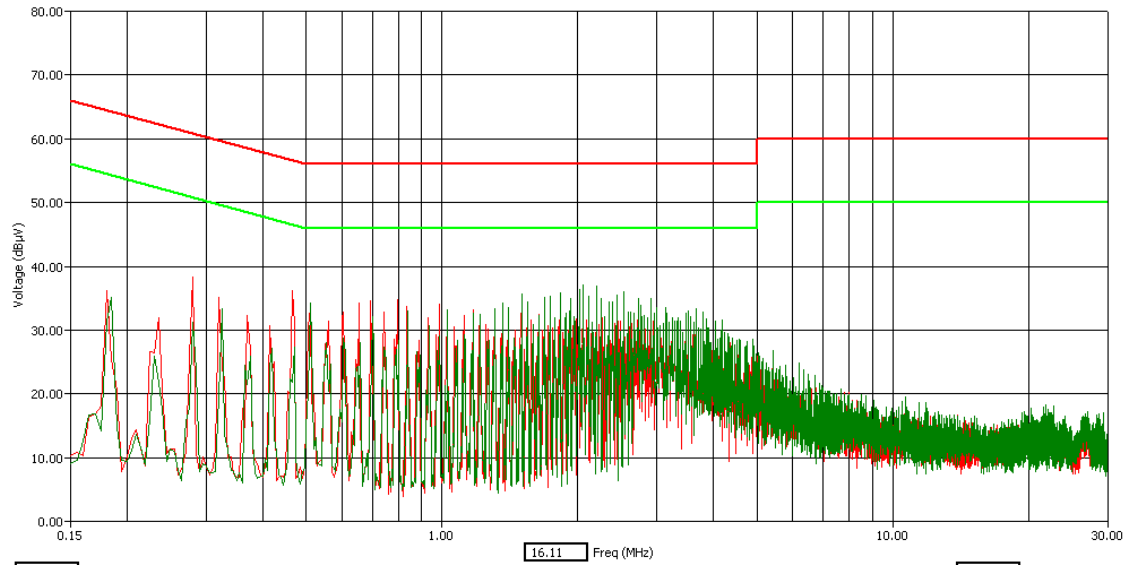


WLAN Channel 1 - Tx Mode - AVG Detector

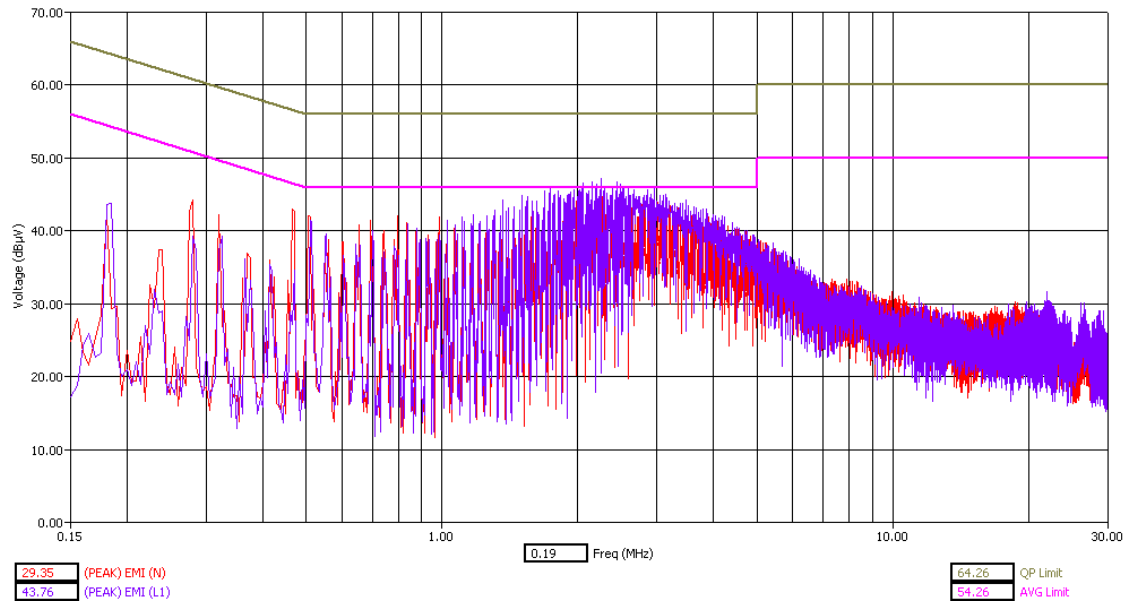


WLAN Channel 1 - Tx Mode - Peak Detector

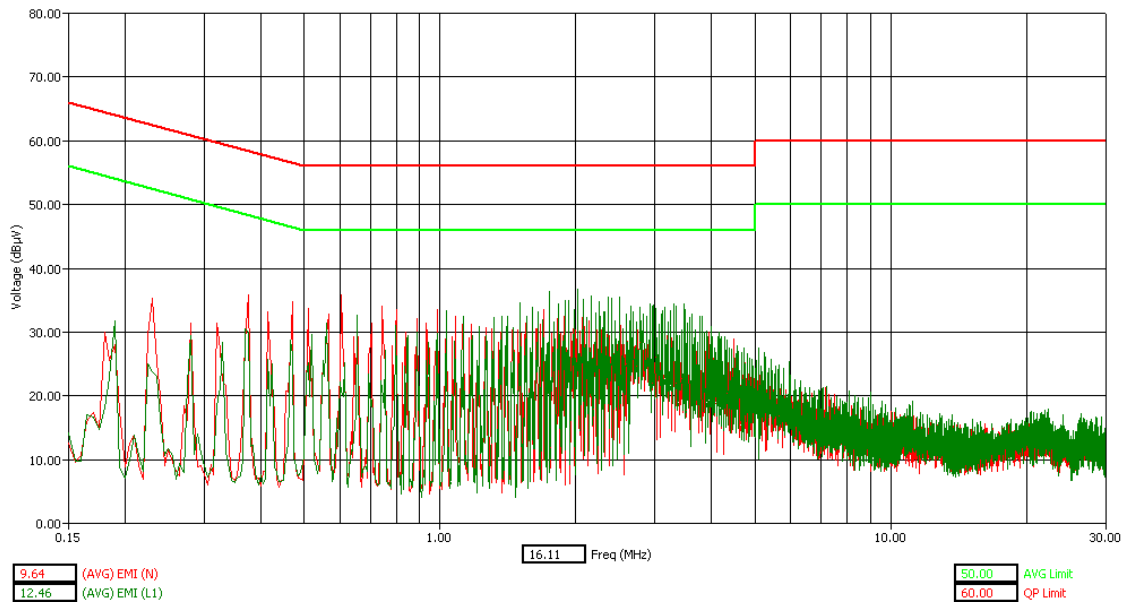


WLAN Channel 6 - Tx Mode - AVG Detector

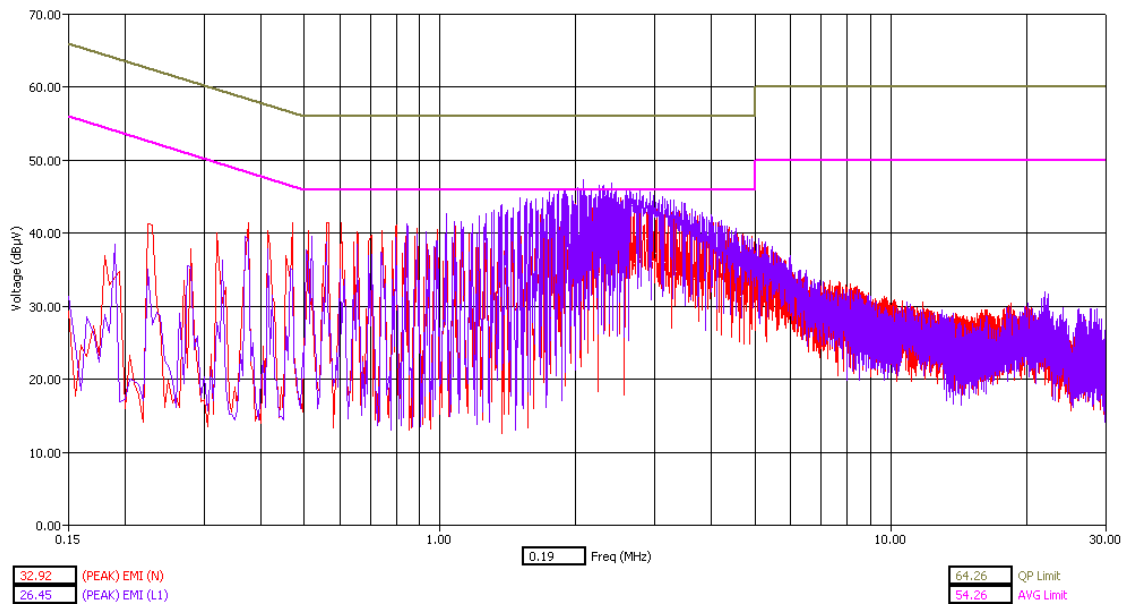

WLAN Channel 6 - Tx Mode - Peak Detector

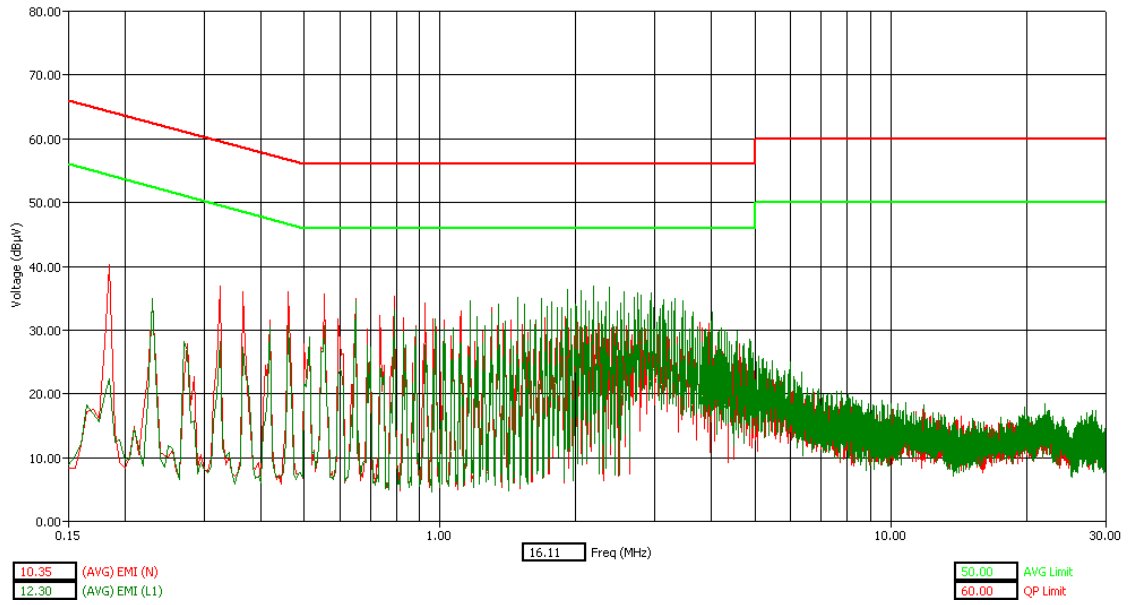


WLAN Channel 11 - Tx Mode - AVG Detector

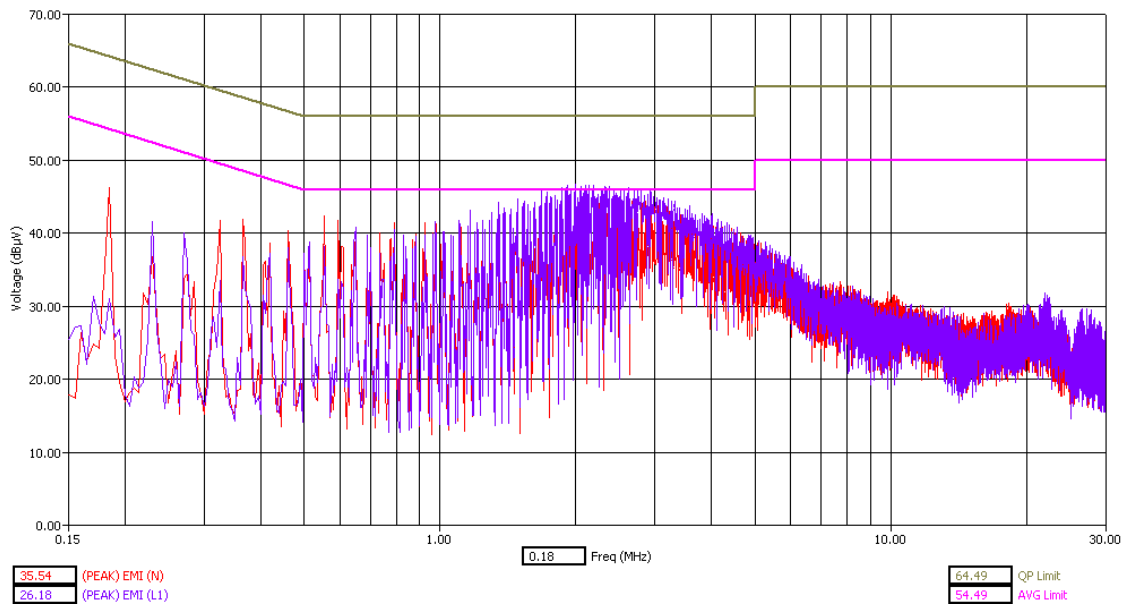


WLAN Channel 11 - Tx Mode - Peak Detector


802.11g Mode @ 6Mbps

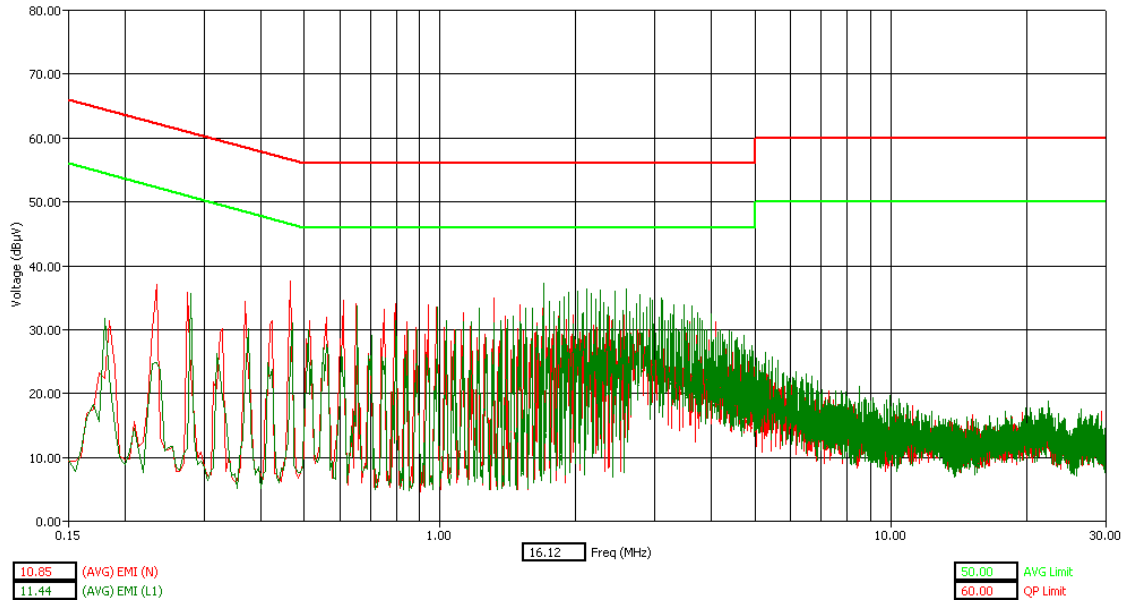


WLAN Channel 1 - Tx Mode - AVG Detector

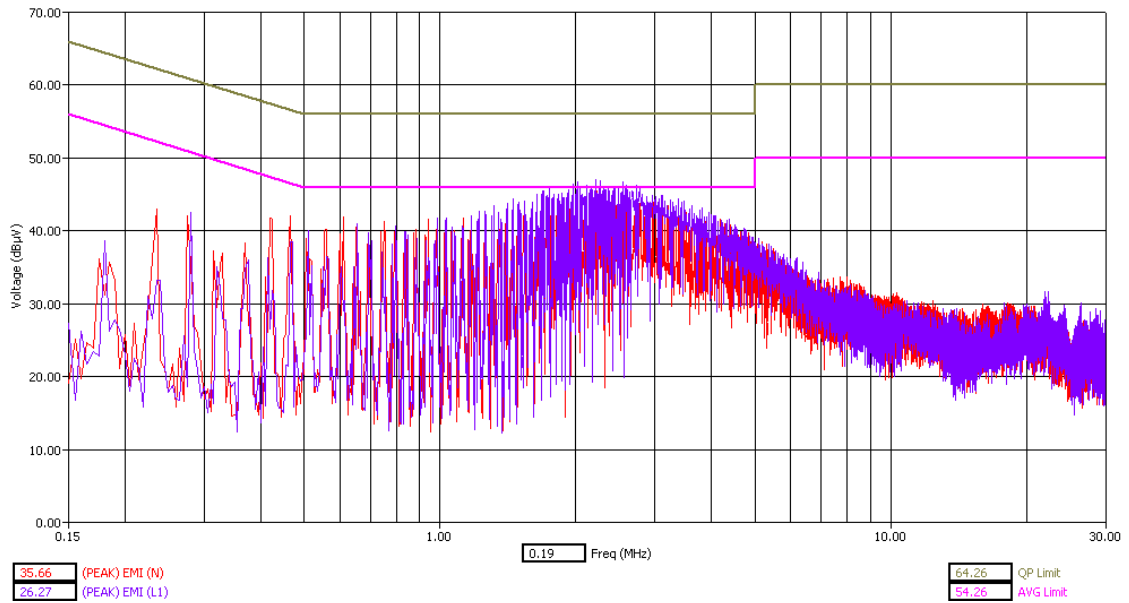


WLAN Channel 1 - Tx Mode - Peak Detector

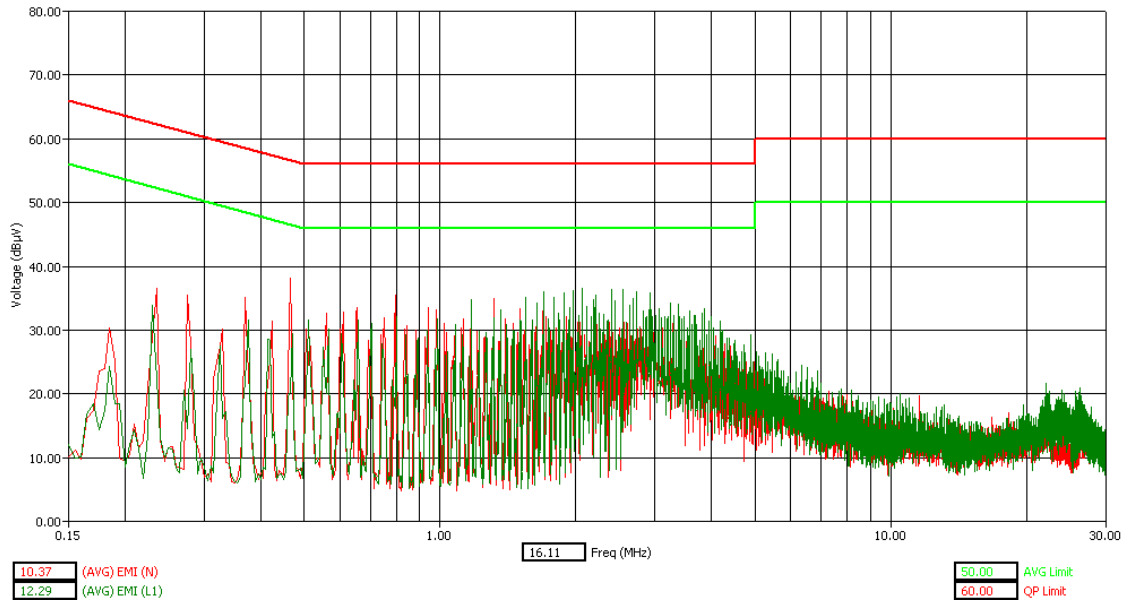


WLAN Channel 6 - Tx Mode - AVG Detector

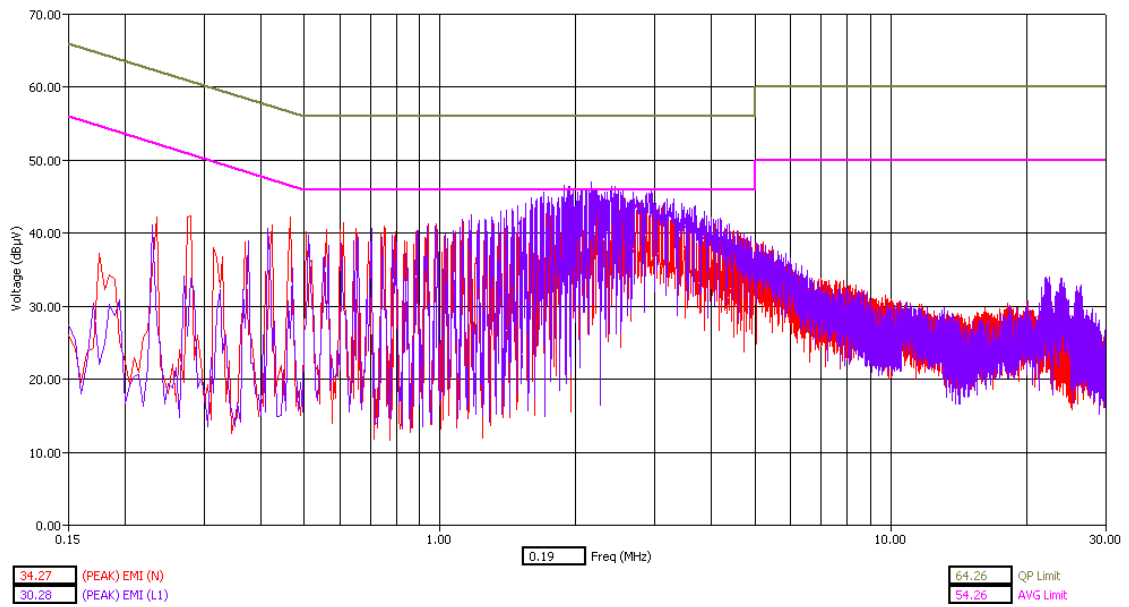

WLAN Channel 6 - Tx Mode - Peak Detector

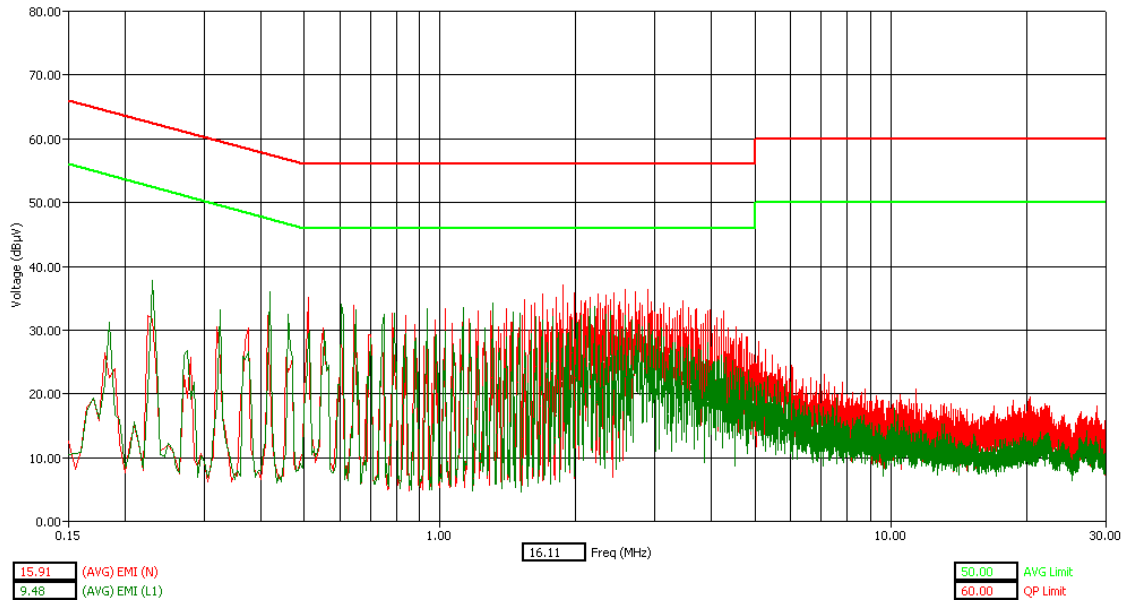

WLAN Channel 11 - Tx Mode - AVG Detector

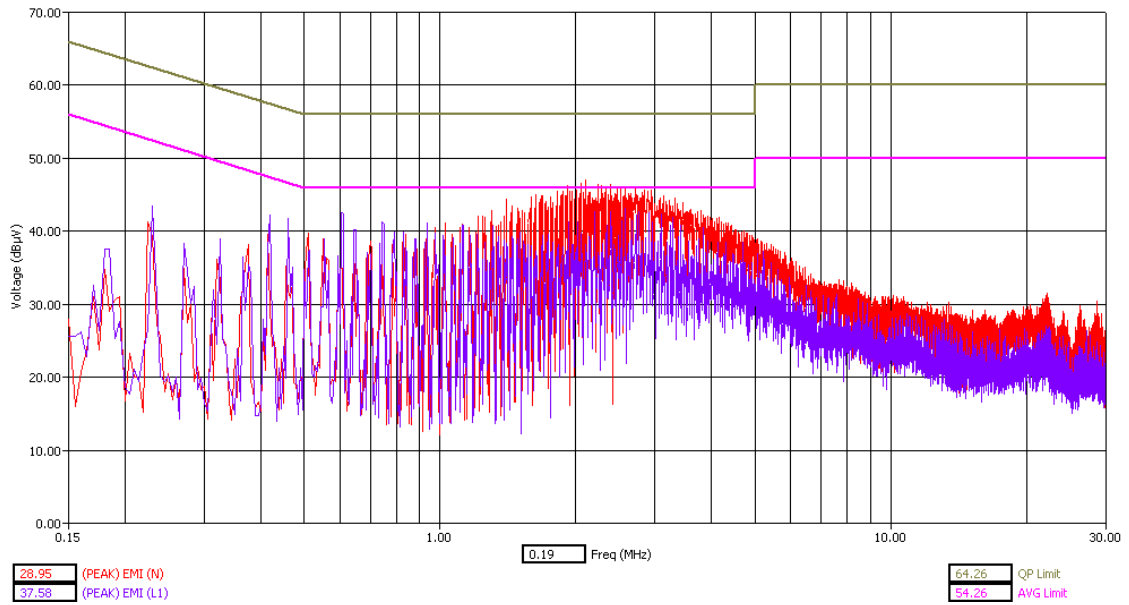

WLAN Channel 11 - Tx Mode - Peak Detector

End of Test Report