



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 90 Band Class 10 CDMA

Applicant:
Motorola Mobility, Inc.
8000 West Sunrise Blvd.
Plantation, FL 33322
United States

Date of Testing:
May 17 - June 24, 2011
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1105170873-R1.IHD

FCC ID:	IHDT56MP1
APPLICANT:	MOTOROLA MOBILITY, INC.

Applicant Type: Certification
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: §90.691
EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN
Tx Frequency Range: 817.9 - 823.1 MHz (CDMA)
Max. RF Output Power: 0.152 W ERP CDMA (21.81 dBm)
Emission Designator(s): 1M27F9W (CDMA)
Test Device MEID: *identical prototype* [S/N: 268435459416567017]


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

*This revised Test Report (S/ N: 0Y1105170873-R1.IHD) supersedes and replaces the previously issued test report on the same subject EUT for the same type of testing as indicated. Please discard and destroy the previously issued test report (S/N: 0Y1105170873.IHD) and dispose of it accordingly.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 90.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.




Randy Ortanez
President




FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 1 of 21

T A B L E O F C O N T E N T S


FCC PART 90 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.2 OCCUPIED BANDWIDTH		6
3.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		6
3.4 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		7
3.5 FREQUENCY STABILITY / TEMPERATURE VARIATION		7
4.0 TEST EQUIPMENT CALIBRATION DATA		8
5.0 SAMPLE CALCULATIONS		9
6.0 TEST RESULTS.....		10
6.1 SUMMARY.....		10
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA		11
6.3 BC10 CDMA RADIATED MEASUREMENTS		12
6.4 BC10 CDMA FREQUENCY STABILITY MEASUREMENTS		14
7.0 PLOT(S) OF EMISSIONS		16
8.0 CONCLUSION.....		21

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 2 of 21



MEASUREMENT REPORT

BC10 CDMA




§2.1033 General Information



APPLICANT: Motorola Mobility, Inc.
APPLICANT ADDRESS: 8000 West Sunrise Blvd.
 Plantation, FL 33322, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
EMISSION DESIGNATOR(S): 1M27F9W (CDMA)
MODE: CDMA / EvDO
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device MEID: 268435459416567017 Production Pre-Production Engineering
DATE(S) OF TEST: May 17 - June 24, 2011
TEST REPORT S/N: 0Y1105170873-R1.IHD

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Reviewed by: Quality Manager Page 3 of 21

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

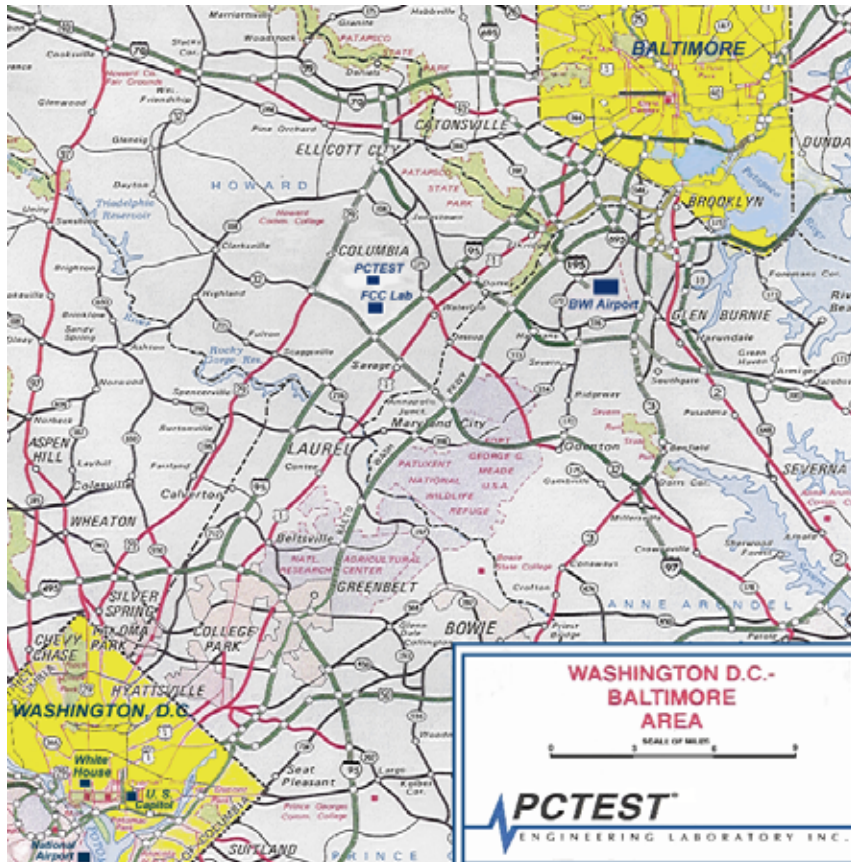




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 4 of 21

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Cellular/PCS CDMA/EvDO Phone with BT and WLAN FCC ID: IHDT56MP1**. The EUT consisted of the following component(s):

Trade Name	FCC ID	Description
Motorola	IHDT56MP1	Cellular/PCS CDMA/EvDO Phone with BT and WLAN



Table 2-1. EUT Equipment Description

Note: All data contained in this report is applicable for the device operation in BC10 (817 – 824 MHz). Test data shown supports the devices compliance with §90.691 of the FCC Rules and Regulation.

This unit was tested with its standard battery (SNN5894A).

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 5 of 21	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (See Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

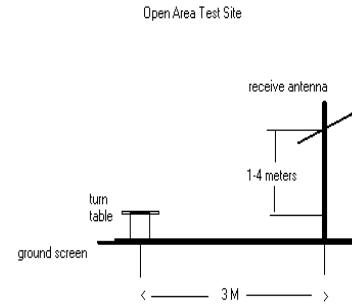


Figure 3-1. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None

3.2 Occupied Bandwidth

§2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

3.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §90.691

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 6 of 21

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.4 Radiated Power and Radiated Spurious Emissions §2.1053, §90.635, §90.691

Radiated power and radiated spurious emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This level is then measured with a broadband average power meter. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive average power meter reading. This spurious level is recorded with the power meter. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.

3.5 Frequency Stability / Temperature Variation §2.1055, 90.213



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.



FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 7 of 21	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	263-10dB	(DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/8/2011	Annual	2/8/2012	3008A00985
Agilent	E4407B	ESA Spectrum Analyzer	4/5/2011	Annual	4/5/2012	US39210313
Agilent	E4432B	ESG-D Series Signal Generator	9/10/2009	Annual	9/10/2010	US40053896
Agilent	E5515C	Wireless Communications Test Set	10/11/2010	Annual	10/11/2011	GB46110872
Agilent	N9020A	MXA Signal Analyzer	9/8/2010	Annual	9/8/2011	US46470561
Agilent	E5515C	Wireless Communications Test Set	2/8/2011	Annual	2/8/2012	GB45360985
Anritsu	ML2495A	Power Meter	10/13/2010	Annual	10/13/2011	941001
Anritsu	MA2411B	Pulse Sensor	N/A	Annual		1027293
Emco	3115	Horn Antenna (1-18GHz)	10/14/2009	Biennial	10/14/2011	9704-5182
Emco	3115	Horn Antenna (1-18GHz)	4/8/2010	Biennial	4/8/2012	9205-3874
Espec	ESX-2CA	Environmental Chamber	4/21/2011	Annual	4/21/2012	17620
MiniCircuits	VHF-1300+	High Pass Filter	N/A		N/A	30716
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Pasternack	PE2208-6	Bidirectional Coupler	N/A		N/A	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	N/A	Annual	N/A	836536/0005
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Rx	7/17/2009	Biennial	7/17/2011	9105-2404
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Tx	7/17/2009	Biennial	7/17/2011	9105-2403
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	6/14/2009	Biennial	7/14/2011	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/17/2009	Biennial	7/17/2011	A051107

Table 4-1. Test Equipment

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 8 of 21

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation



9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission – Cellular Band

Example: Channel 476 CDMA BC10 Mode 2nd Harmonic (2453.70MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: IHDT56MP1	 BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 9 of 21



6.0 TEST RESULTS

6.1 Summary

Company Name: Motorola Mobility, Inc.
 FCC ID: IHDT56MP1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO
 Band: Band Class 10

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§2.1051, §90.691	Band Edge / Conducted Spurious Emissions	$< 50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	CONDUCTED	PASS	Section 7.0
§2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
§2.1055, §90.213	Frequency Stability	$< 2.5\text{ppm}$		PASS	Section 6.4
§90.635	Effective Radiated Power	< 100 Watts max. ERP	RADIATED	PASS	Section 6.2
§2.1053, §90.691	Undesirable Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Sections 6.3

Table 6-1. Summary of Test Results

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN			Page 10 of 21

6.2 Effective Radiated Power Output Data

§90.635

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
817.90	BC10	-14.350	21.81	0.00	H	21.81	0.152	Standard
823.10	BC10	-14.480	21.68	0.00	H	21.68	0.147	Standard
817.90	BC10	-14.560	21.60	0.00	H	21.60	0.145	Slim



Table 6-2. Effective Radiated Power Output Data

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal polarization. The data reported in the table above was measured in this test setup.

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 11 of 21	

6.3 BC10 CDMA Radiated Measurements §2.1053, §90.691

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 MEASURED OUTPUT POWER: 21.810 dBm = 0.152 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.81 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1635.80	-56.97	6.41	-50.56	H	72.4
2453.70	-54.07	6.73	-47.34	H	69.1
3271.60	-56.80	7.55	-49.25	H	71.1
4089.50	-90.82	7.43	-83.39	H	105.2
4907.40	-90.70	9.05	-81.65	H	103.5



Table 6-3. Radiated Spurious Data (CDMA Mode – BC10 Ch. 476)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal polarization. The data reported in the table above was measured in this test setup.

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 12 of 21	

BC10 CDMA Radiated Measurements (Cont'd)
§2.1053, §90.691

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 823.10 MHz
 CHANNEL: 684
 MEASURED OUTPUT POWER: 21.810 dBm = 0.152 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.81 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1646.20	-54.41	6.43	-47.98	H	69.8
2469.30	-53.52	6.77	-46.76	H	68.6
3292.40	-53.19	7.55	-45.64	H	67.5
4115.50	-87.87	7.81	-80.06	H	101.9
4938.60	-85.79	9.02	-76.76	H	98.6



Table 6-4. Radiated Spurious Data (CDMA Mode – BC10 Ch. 684)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal polarization. The data reported in the table above was measured in this test setup.

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 13 of 21	



6.4 BC10 CDMA Frequency Stability Measurements

§2.1055, §90.213

OPERATING FREQUENCY: 823,100,000 Hz
 CHANNEL: 684
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	823,099,988	-12	-0.000001
100 %		- 30	823,099,981	-19	-0.000002
100 %		- 20	823,099,982	-18	-0.000002
100 %		- 10	823,099,987	-13	-0.000002
100 %		0	823,099,992	-8	-0.000001
100 %		+ 10	823,100,009	9	0.000001
100 %		+ 20	823,100,007	7	0.000001
100 %		+ 30	823,100,006	6	0.000001
100 %		+ 40	823,100,004	4	0.000000
100 %		+ 50	823,100,010	10	0.000001
115 %		4.26	+ 20	823,100,008	8
BATT. ENDPOINT	3.41	+ 20	823,099,999	-1	0.000000

Table 6-5. Frequency Stability Data (Cellular CDMA Mode – Ch. 684)

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 14 of 21	

BC10 CDMA Frequency Stability Measurements (Cont'd)
§2.1055, §90.213

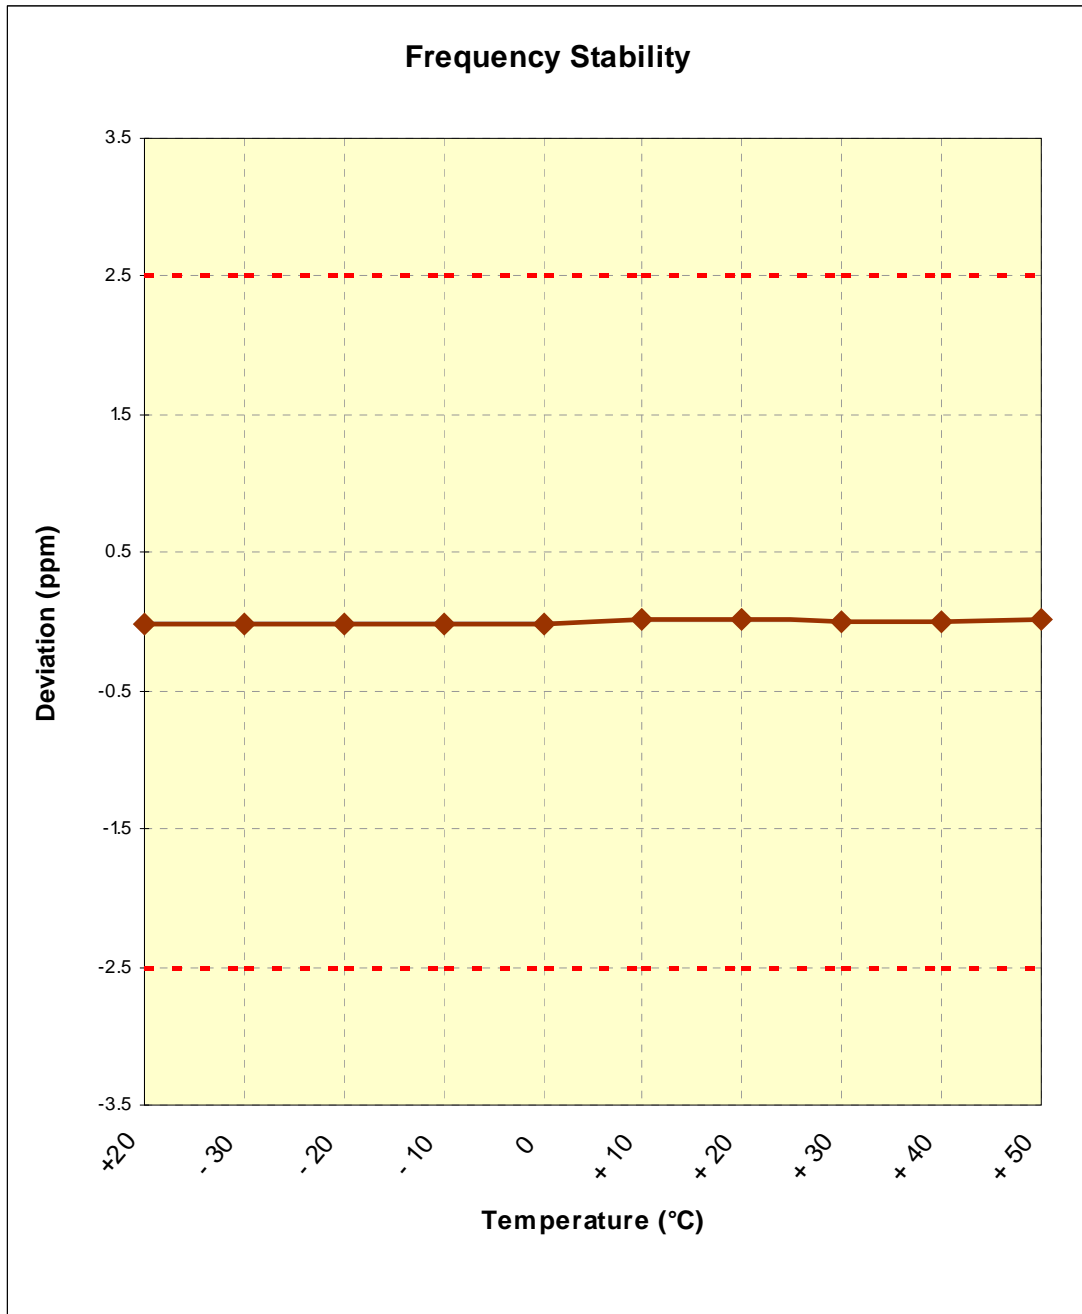


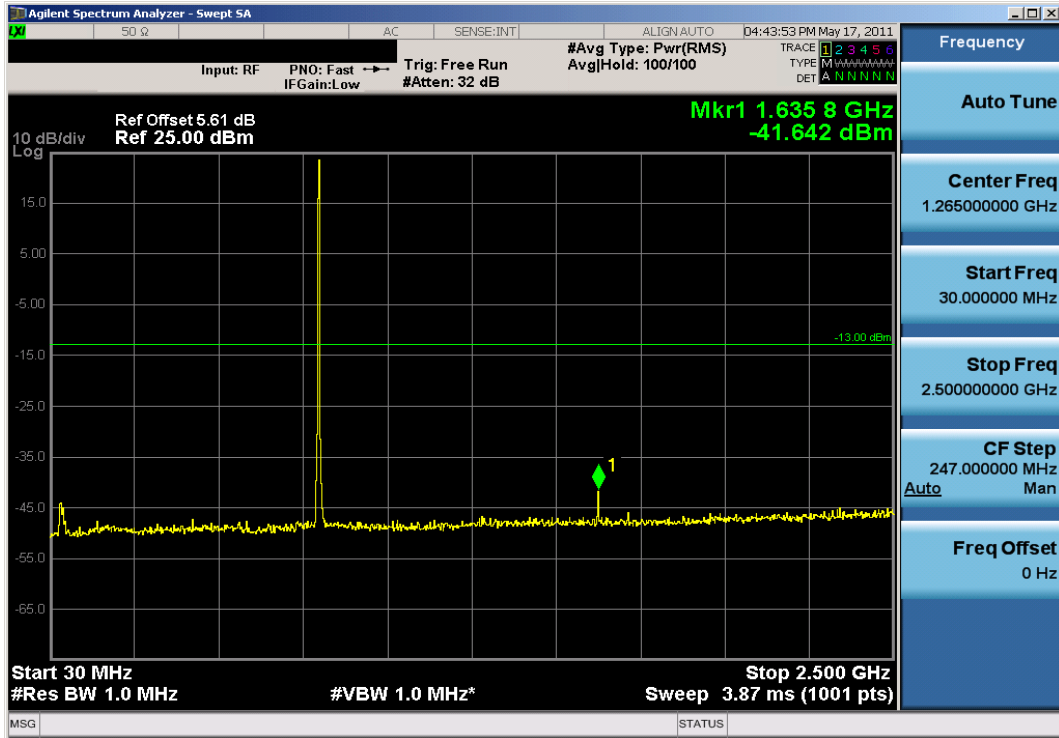


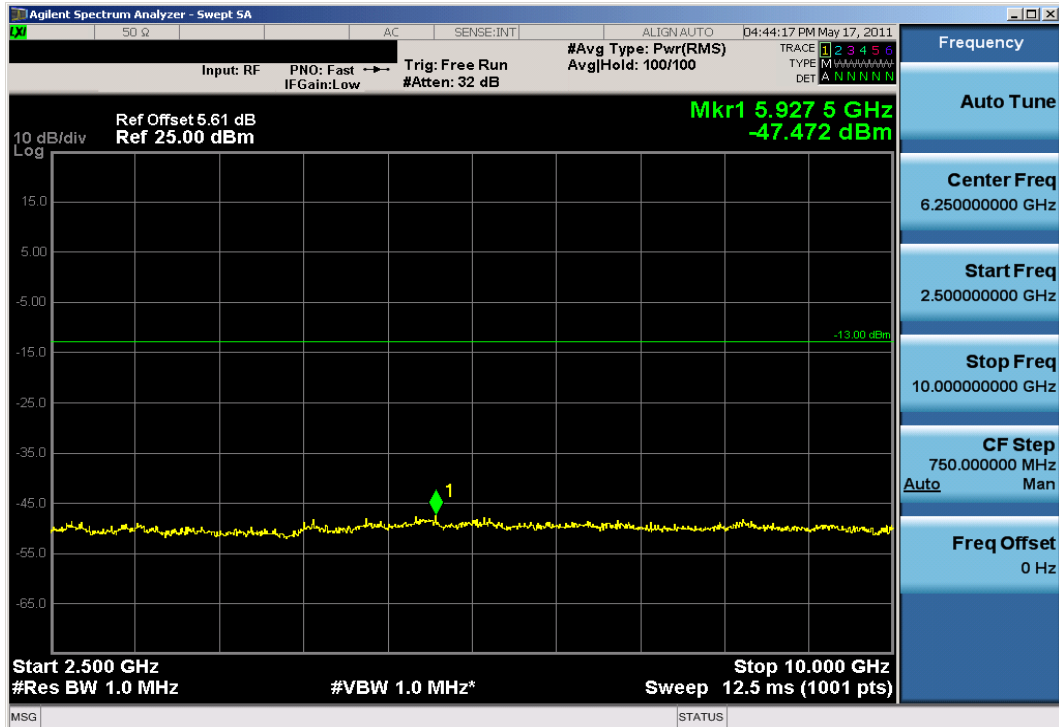
Figure 6-1. Frequency Stability Graph (Cellular CDMA Mode – Ch. 684)

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 15 of 21

7.0 PLOT(S) OF EMISSIONS

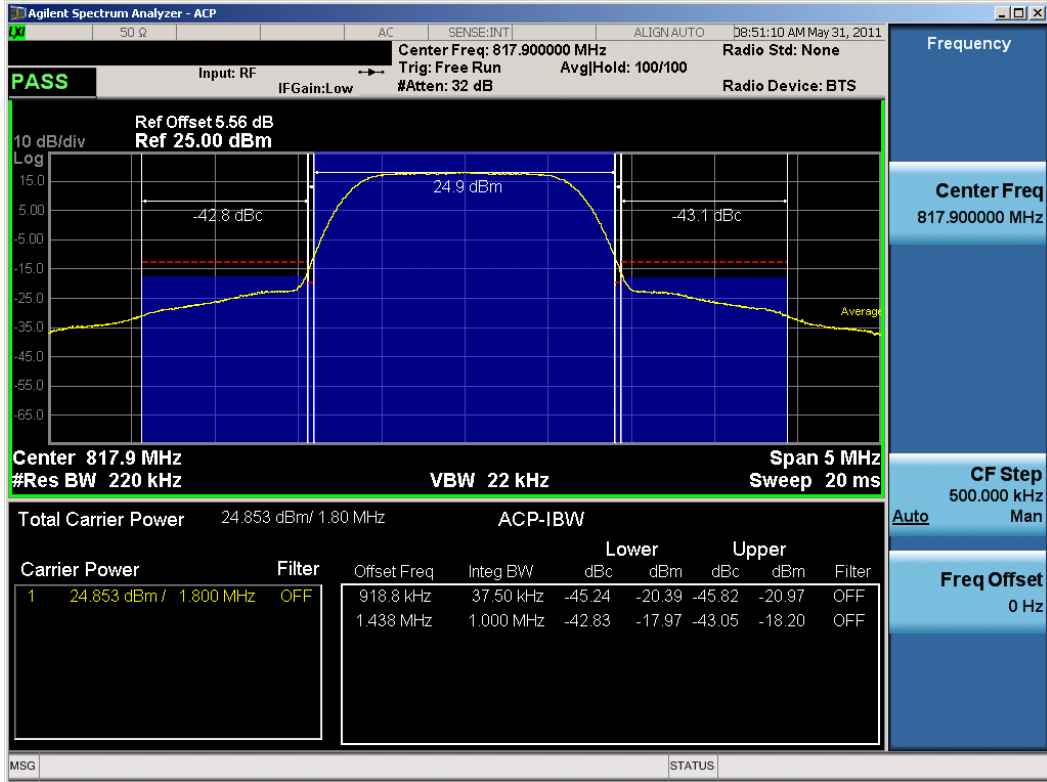


Plot 7-1. Conducted Spurious Plot (BC10 CDMA Ch. 476)



Plot 7-2. Conducted Spurious Plot (BC10 CDMA Ch. 476)

FCC ID: IHDT56MP1	PCTEST ENGINEERING LABORATORY, INC.	BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN	Page 16 of 21	

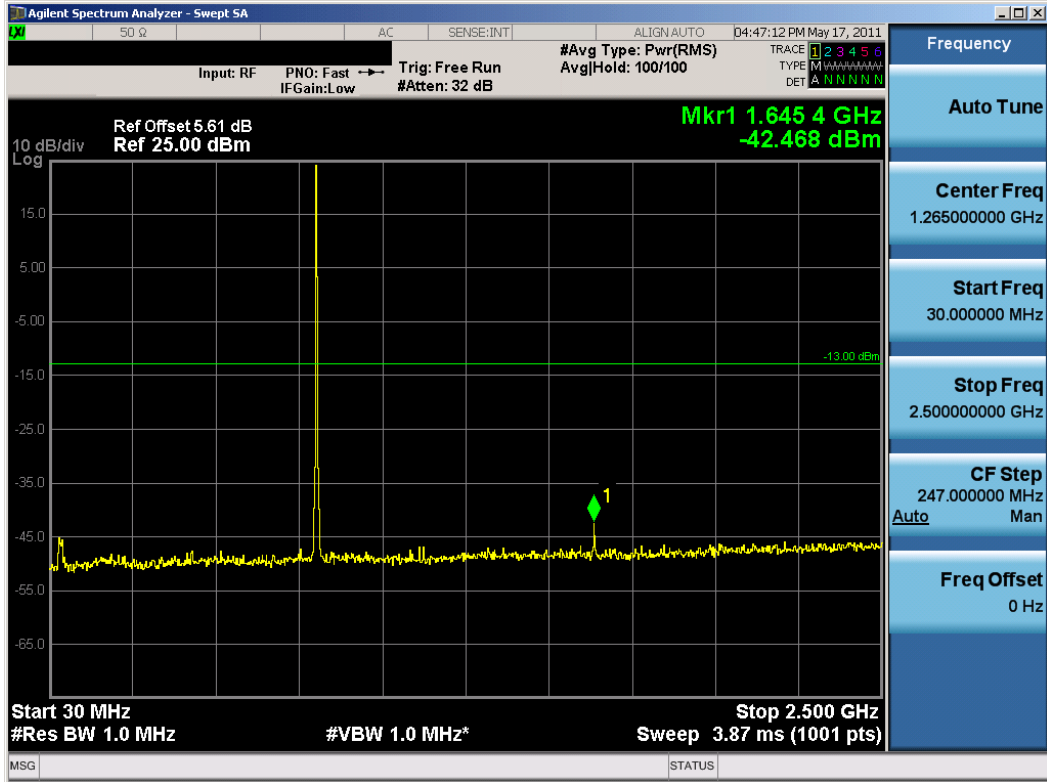


Plot 7-3. Channel Edge Plot (BC10 CDMA Ch. 476) - \$90.691

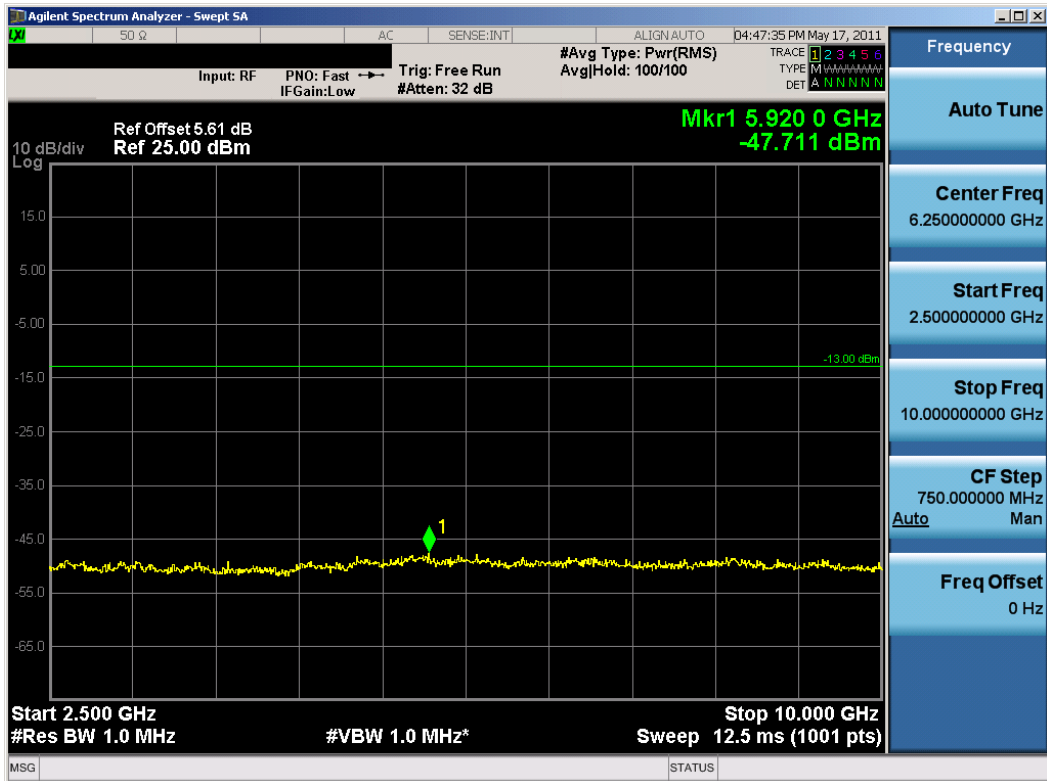


Plot 7-4. 4MHz Span Plot (BC10 CDMA Ch. 476)

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 17 of 21

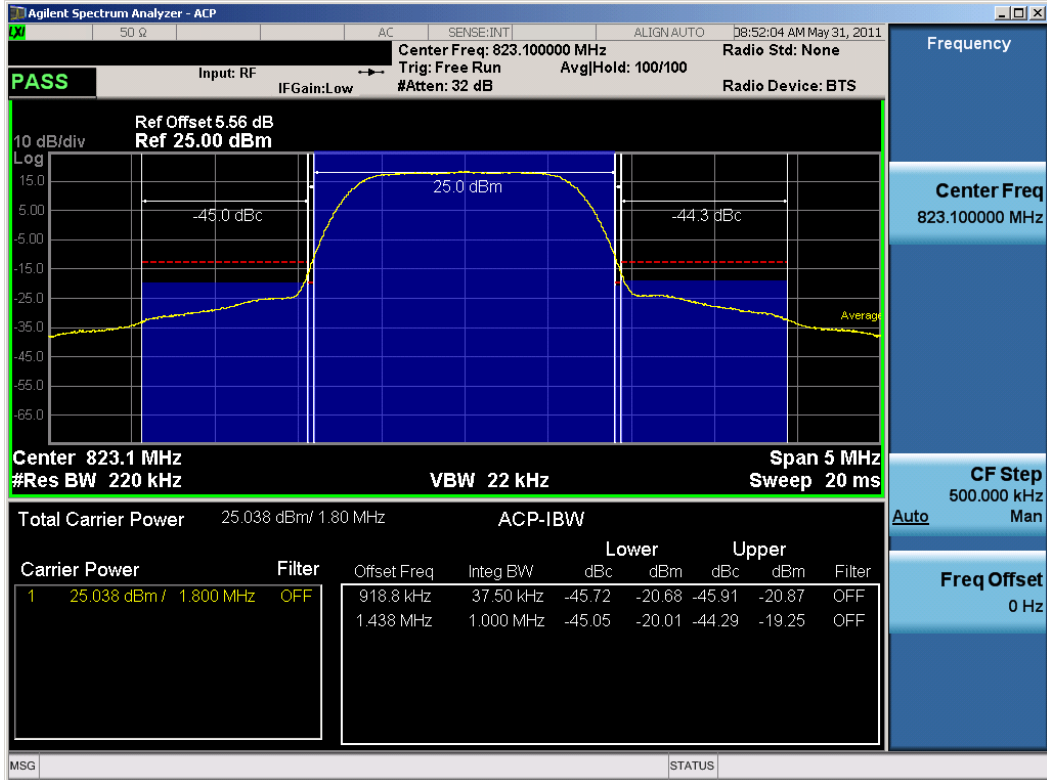


Plot 7-5. Conducted Spurious Plot (BC10 CDMA Ch. 684)



Plot 7-6. Conducted Spurious Plot (BC10 CDMA Ch. 684)

FCC ID: IHDT56MP1	PCTEST ENGINEERING LABORATORY, INC.	BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 18 of 21

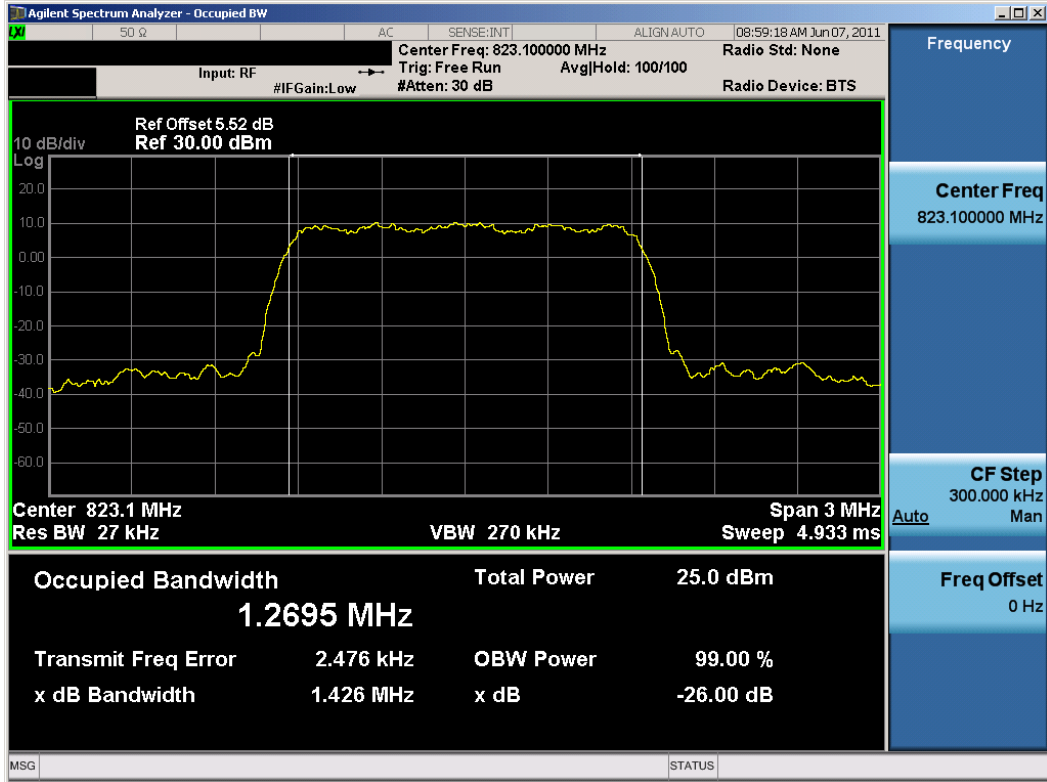


Plot 7-7. Channel Edge Plot (BC10 CDMA Ch. 684) - \$90.691



Plot 7-8. 4MHz Span Plot (BC10 CDMA Ch. 684)

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 19 of 21





Plot 7-9. Occupied Bandwidth Plot (BC10 CDMA Ch. 684)

FCC ID: IHDT56MP1	PCTEST ENGINEERING LABORATORY, INC.	BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 20 of 21

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Motorola Cellular/PCS CDMA/EvDO Phone with BT and WLAN FCC ID: IHDT56MP1** complies with all the requirements of Parts 90 of the FCC rules.

FCC ID: IHDT56MP1		BC10 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1105170873-R1.IHD	Test Dates: May 17 - June 24, 2011	EUT Type: Cellular/PCS CDMA/EvDO Phone with BT and WLAN		Page 21 of 21