

FCC RF Test Report

APPLICANT : Motorola Mobility, Inc.
EQUIPMENT : CDMA/GSM Dual-mode digital mobile phone
with BT/ Wi-Fi
BRAND NAME : Motorola
MODEL NAME : XT553
MARKETING NAME : MOTOSMART MIX
TYPE NAME : M0D27
GPPD NUMBER : 3367
FCC ID : IHDT56NM6
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
Tx/Rx FREQUENCY RANGE : GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
CDMA2000 BC0 : 824.70 ~ 848.31 MHz /
869.70 ~ 893.31 MHz
MAX. ERP/EIRP POWER : GSM1900 (GPRS 8) : 1.8578 W
CDMA2000 BC0 : 0.1365 W

The product was received on Apr. 17, 2012 and completely tested on May 11, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	6
1.4 Emission Designator and Maximum ERP/EIRP Power	6
1.5 Testing Site	7
1.6 Applied Standards	7
1.7 Ancillary Equipment List.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	10
3 TEST RESULT.....	11
3.1 Conducted Output Power Measurement.....	11
3.2 Peak-to-Average Ratio	13
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	19
3.4 Occupied Bandwidth Measurement	22
3.5 Band Edge Measurement.....	29
3.6 Conducted Emission Measurement	34
3.7 Field Strength of Spurious Radiation Measurement	40
3.8 Frequency Stability Measurement.....	47
4 LIST OF MEASURING EQUIPMENT	50
5 UNCERTAINTY OF EVALUATION	51

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG241746	Rev. 01	Initial issue of report	May 28, 2012
FG241746	Rev. 02	Update report for equipment name	May 30, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-133(6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 31.28 dB at 3760.000 MHz
3.8	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Motorola Mobility, Inc.

No. 1, Wang Jing East Road, Chao Yang District, Beijing, 100102, P. R. China

1.2 Manufacturer

Huizhou BYD Electronic Co., Ltd.

Xiangshui River, Economic Development Zone, Daya Bay, Huizhou, Guangdong

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA/GSM Dual-mode digital mobile phone with BT/ Wi-Fi
Brand Name	Motorola
Model Name	XT553
Marketing Name	MOTOSMART MIX
Type Name	MOD27
FCC ID	IHDT56NM6
Tx Frequency	GSM1900 : 1850 MHz ~ 1910 MHz CDMA2000 BC0 : 824 MHz ~ 849 MHz
Rx Frequency	GSM1900 : 1930 MHz ~ 1990 MHz CDMA2000 BC0 : 869 MHz ~ 894 MHz
Maximum Output Power to Antenna	GSM1900 : 28.89 dBm CDMA2000 BC0 : 24.57 dBm
Antenna Type	PIFA Antenna
HW Version	2000
SW Version	AGSPIN_B_02.01.27IDD
Type of Modulation	GSM: GMSK GPRS: GMSK CDMA2000 : QPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Emission Designator and Maximum ERP/EIRP Power

FCC Rule	System	Type of Modulation	Emission Designator	Maximum ERP/EIRP
Part 22	CDMA2000 BC0 1xRTT	QPSK	1M28F9W	0.1365 W
Part 24	GSM1900 GPRS 8	GMSK	244KGXW	1.8578 W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	03CH01-KS	149928/4086E-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v01
- IC RSS-132 Issue 2
- IC RSS-133 Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for CDMA2000 BC0.
2. 30 MHz to 19000 MHz for GSM1900.

Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	■ 1xRTT Link	■ 1xRTT Link
GSM 1900	■ GPRS 8 Link	■ GPRS 8 Link

Note:


1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link and 1xRTT RC1 + SO55 mode for CDMA2000 BC0, only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, WLAN, and Bluetooth, the co-location test modes are not required.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)			
Band	CDMA2000 BC0		
Channel	1013	384	777
Frequency	824.7	836.52	848.31
1xRTT RC1+SO55	24.57	24.48	24.55
1xRTT RC3+SO55	24.43	24.34	24.47
1xRTT RC3+SO32(+ F-SCH)	24.44	24.35	24.47
1xRTT RC3+SO32(+SCH)	24.42	24.35	24.40
1xEVDO RTAP 153.6	24.34	24.31	24.35
1xEVDO RETAP 4096	24.38	24.45	24.38

Conducted Power (*Unit: dBm)			
Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM (1 Uplink)	28.77	28.84	28.88
GPRS 8 (1 Uplink)	28.78	28.85	28.89
GPRS 10 (2 Uplink)	27.40	27.54	27.63
GPRS 12 (4 Uplink)	24.56	24.72	24.82

2.2 Connection Diagram of Test System

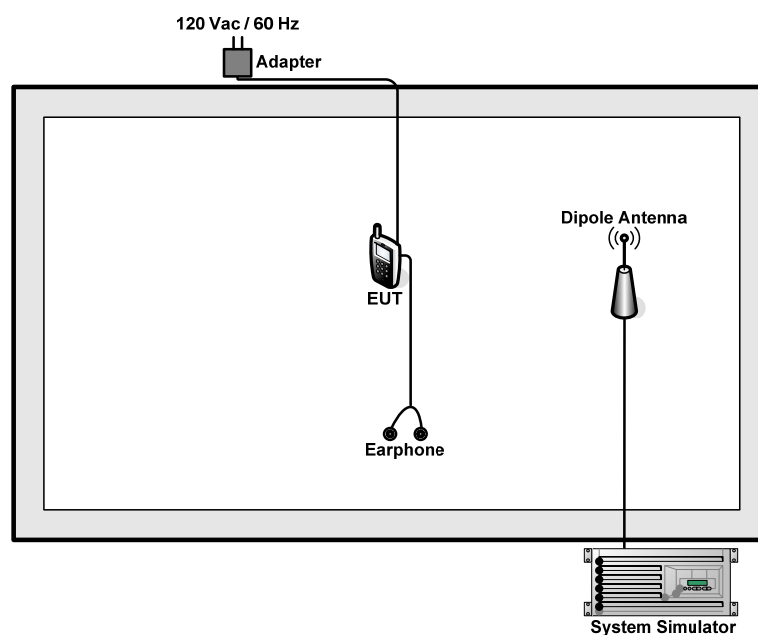

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

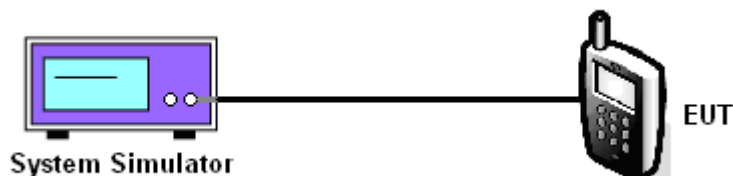

3.1.5 Test Result of Conducted Output Power

CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	24.57	24.48	24.55
Conducted Power (Watts)	0.29	0.28	0.29

PCS Band			
Modes	GSM1900 (GPRS 8)		
Channel	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8
Conducted Power (dBm)	28.78	28.85	28.89
Conducted Power (Watts)	0.76	0.77	0.77

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. The following guidelines are offered for performing a CCDF measurement.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The CCDF (Complementary Cumulative Distribution Function) of the middle channel for the highest RF powers were measured.

3.2.4 Test Setup

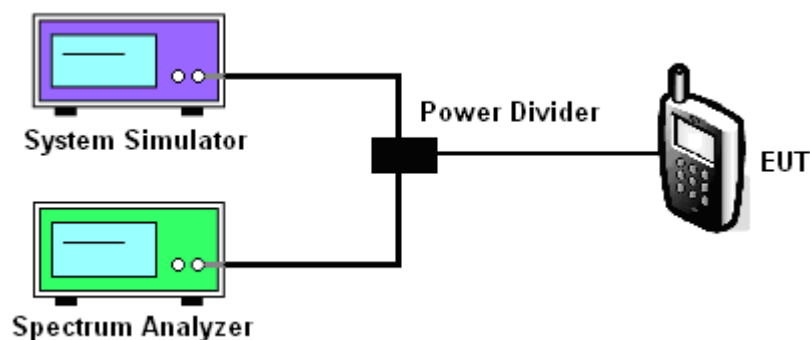


3.2.5 Test Result of Peak-to-Average Ratio

CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Peak-to-Average Ratio (dB)	3.94	4.17	3.90

PCS Band			
Test Mode	GSM1900 (GPRS 8)		
Channel	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.04	0.05	0.06


Band :	CDMA BC0	Test Mode :	1xRTT_RC1+SO55 Link
--------	----------	-------------	---------------------

Peak-to-Average Ratio on Channel 1013

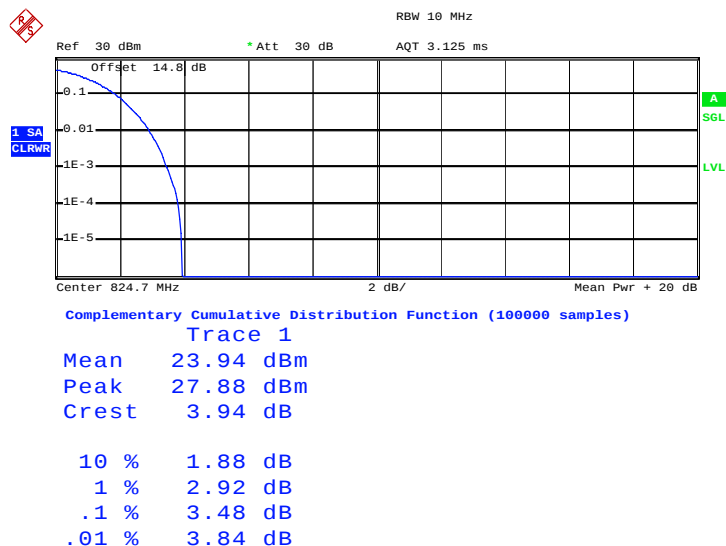


Date: 11.MAY.2012 16:18:21

Peak-to-Average Ratio on Channel 384

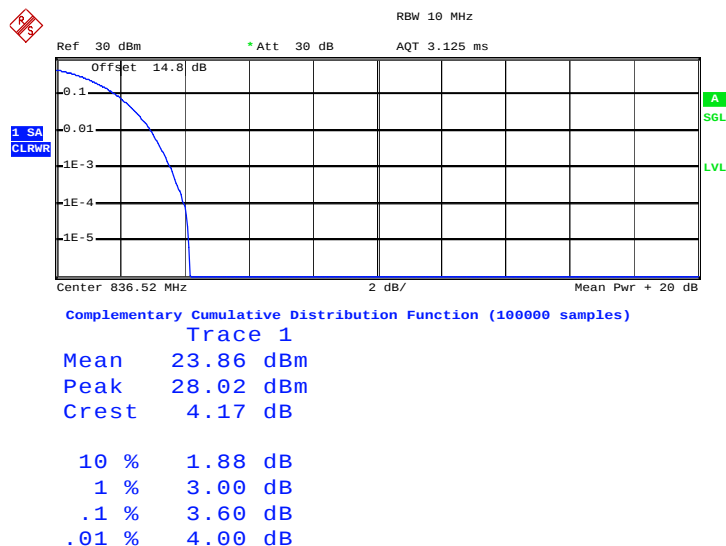

Date: 11.MAY.2012 16:17:01

Peak-to-Average Ratio on Channel 777

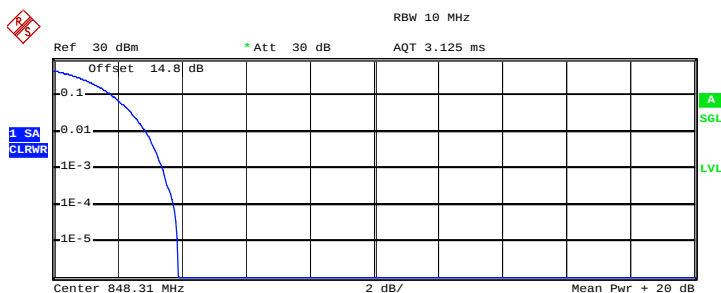

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean 24.13 dBm
Peak 28.02 dBm
Crest 3.90 dB

10 % 1.84 dB
1 % 2.92 dB
.1 % 3.44 dB
.01 % 3.76 dB

Date: 11.MAY.2012 16:17:43


Band :	GSM 1900	Test Mode :	GPRS 8 Link
--------	----------	-------------	-------------

Peak-to-Average Ratio on Channel 512

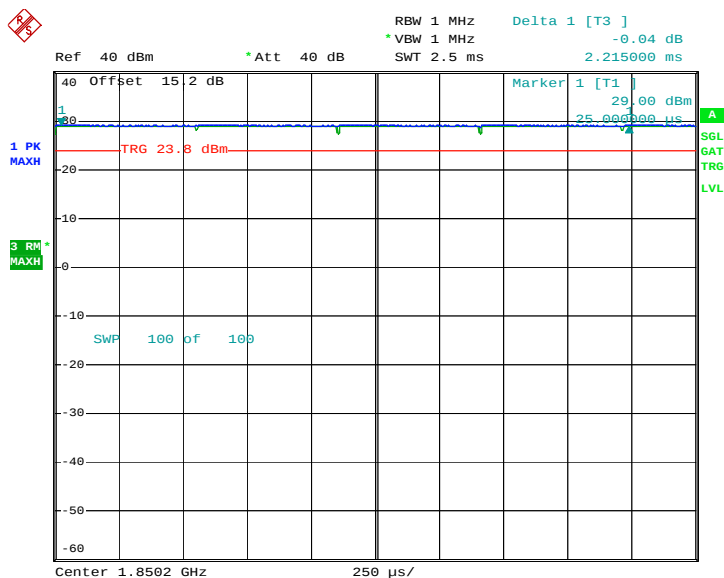

Date: 11.MAY.2012 12:32:06


Peak-to-Average Ratio on Channel 661

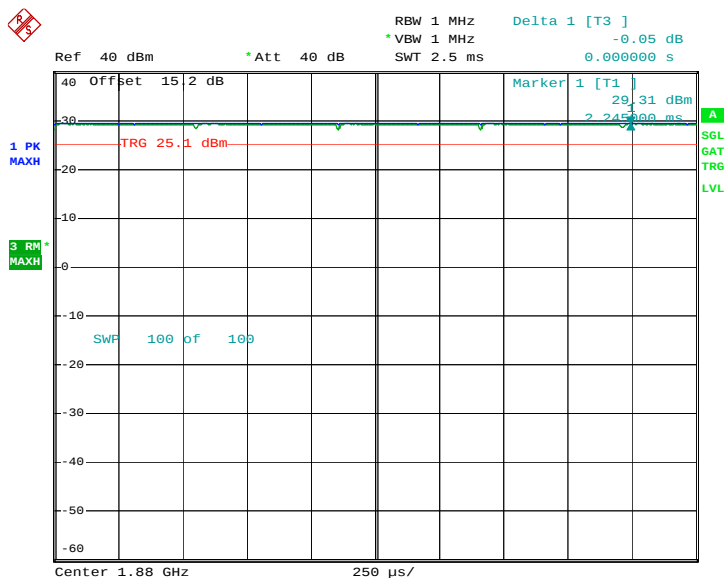

Date: 11.MAY.2012 12:29:16



Peak-to-Average Ratio on Channel 810

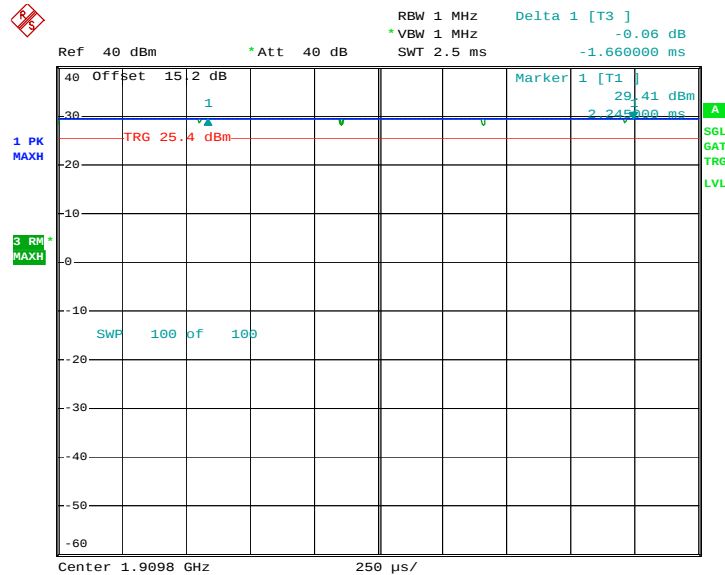

Date: 11.MAY.2012 12:26:07

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

3.3.4 Test Setup

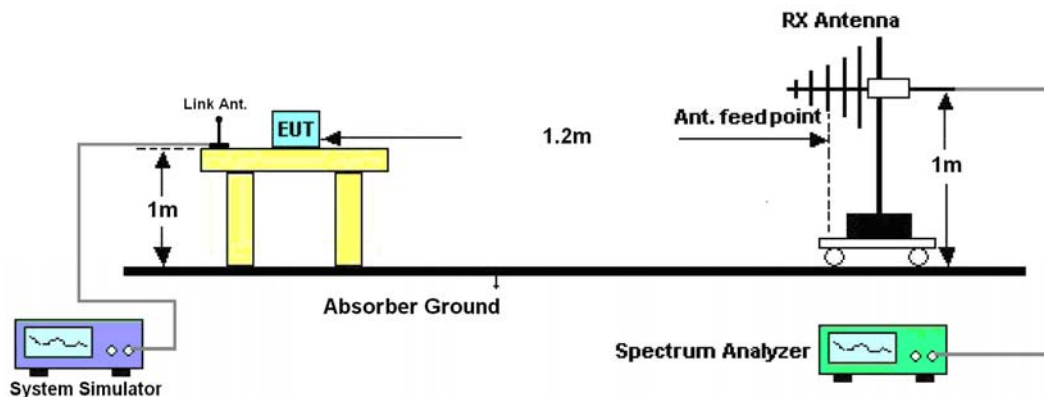

3.3.5 Test Result of ERP

CDMA2000 BC0 1xRTT_RC1+SO55 Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-26.45	-48.12	0.00	-1.08	20.59	0.1146
836.52	-27.39	-48.28	0.00	-0.93	19.96	0.0991
848.31	-26.24	-48.35	0.00	-0.76	21.35	0.1365
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-38.17	-47.97	0.00	-1.08	8.72	0.0074
836.52	-38.78	-48.01	0.00	-0.93	8.30	0.0068
848.31	-37.52	-48.05	0.00	-0.76	9.77	0.0095

3.3.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.23	-51.88	0.00	1.96	31.61	1.4488
1880.00	-22.39	-52.99	0.00	2.00	32.60	1.8197
1909.80	-23.57	-54.28	0.00	1.98	32.69	1.8578
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.76	-52.13	0.00	1.96	31.33	1.3583
1880.00	-23.06	-53.17	0.00	2.00	32.11	1.6255
1909.80	-23.94	-54.13	0.00	1.98	32.17	1.6482

3.4 Occupied Bandwidth Measurement

3.4.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.


3.4.4 Test Setup

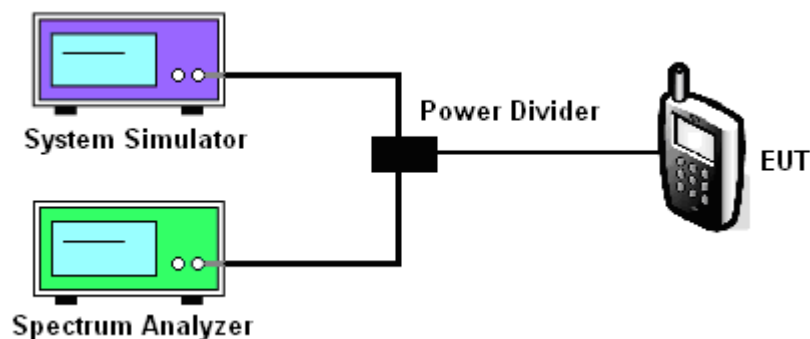

3.4.5 Test Result (Plots) of Occupied Bandwidth


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55 Link		

99% Occupied Bandwidth Plot on Channel 1013

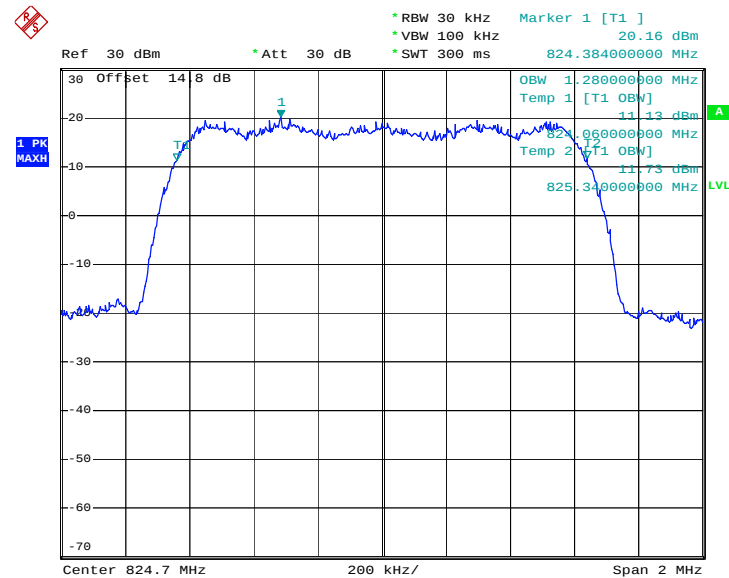


Date: 11.MAY.2012 16:18:56

26dB Bandwidth Plot on Channel 1013

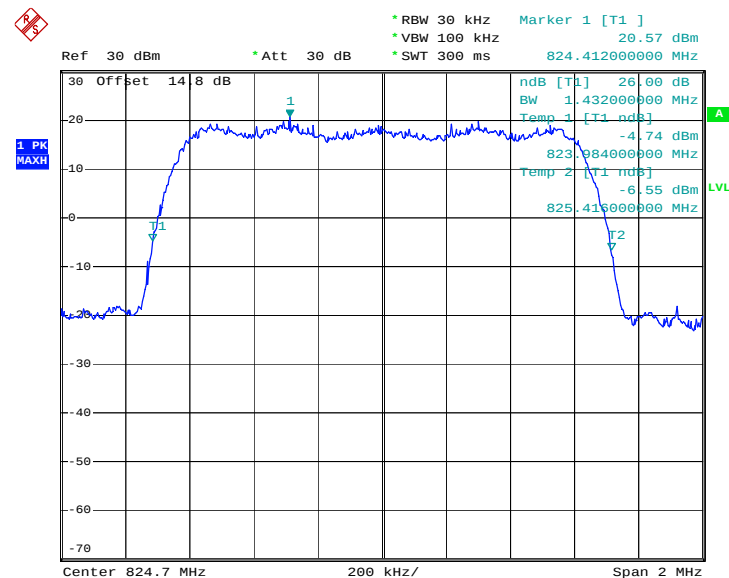


Date: 11.MAY.2012 16:14:58

99% Occupied Bandwidth Plot on Channel 384

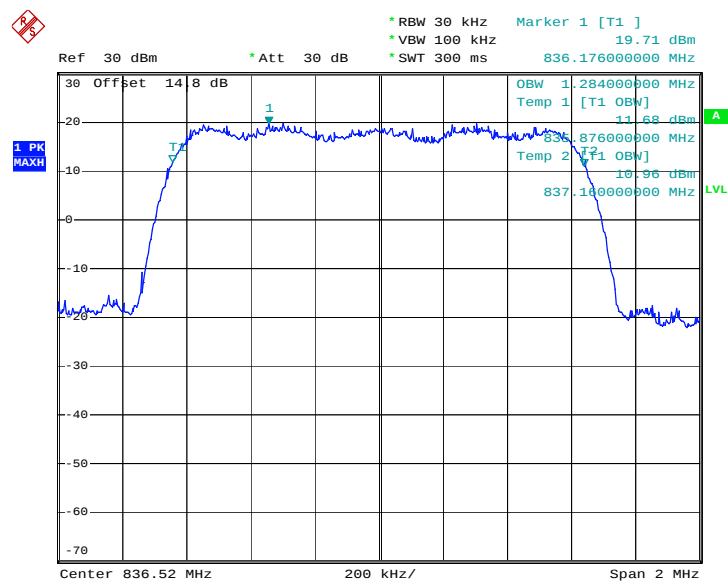


Date: 11.MAY.2012 16:22:50

26dB Bandwidth Plot on Channel 384

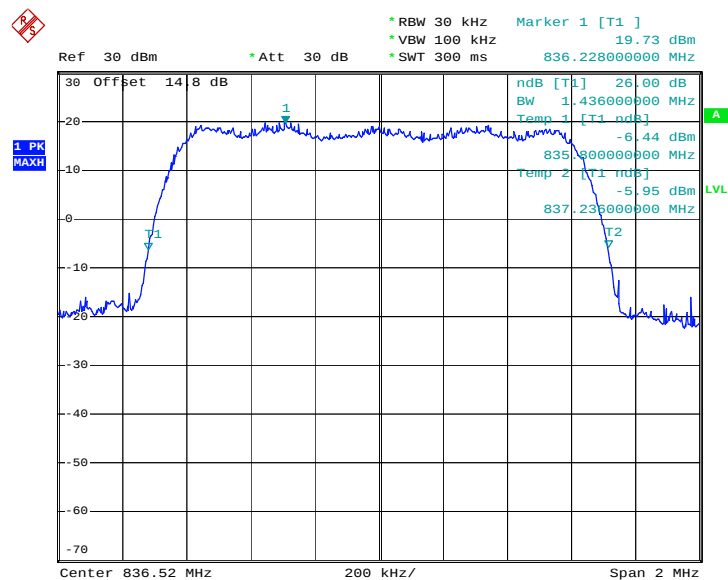


Date: 11.MAY.2012 16:16:35

99% Occupied Bandwidth Plot on Channel 777

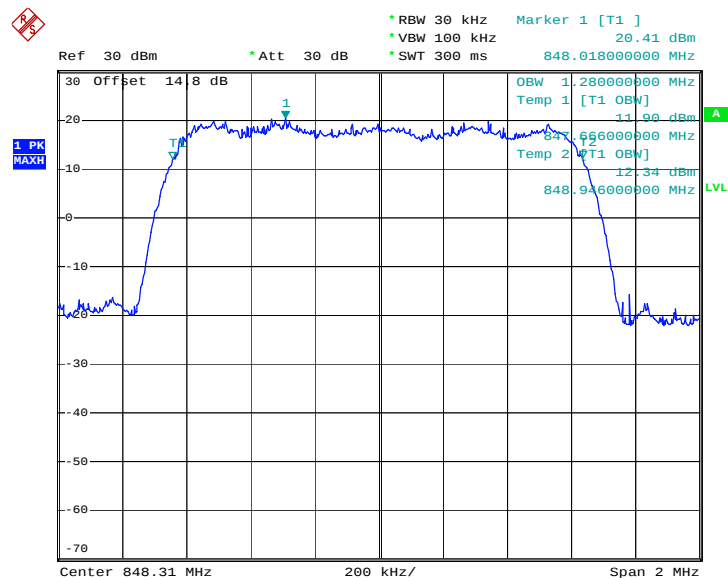


Date: 11.MAY.2012 16:21:48

26dB Bandwidth Plot on Channel 777

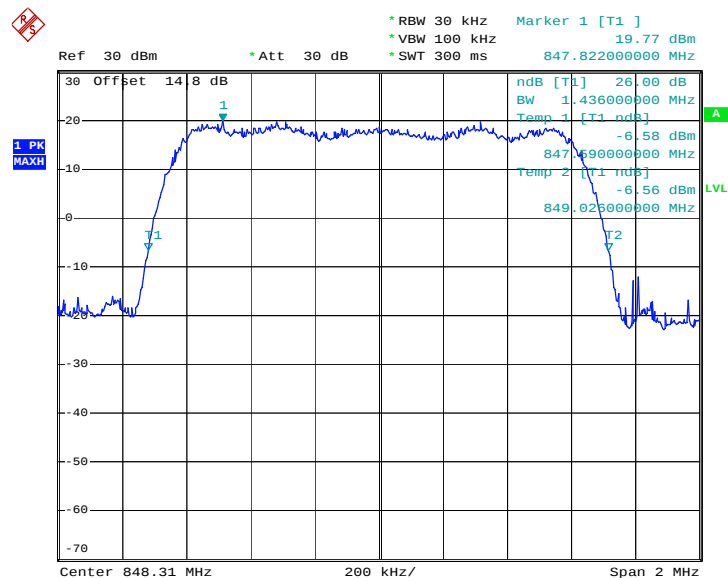


Date: 11.MAY.2012 16:15:42

Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

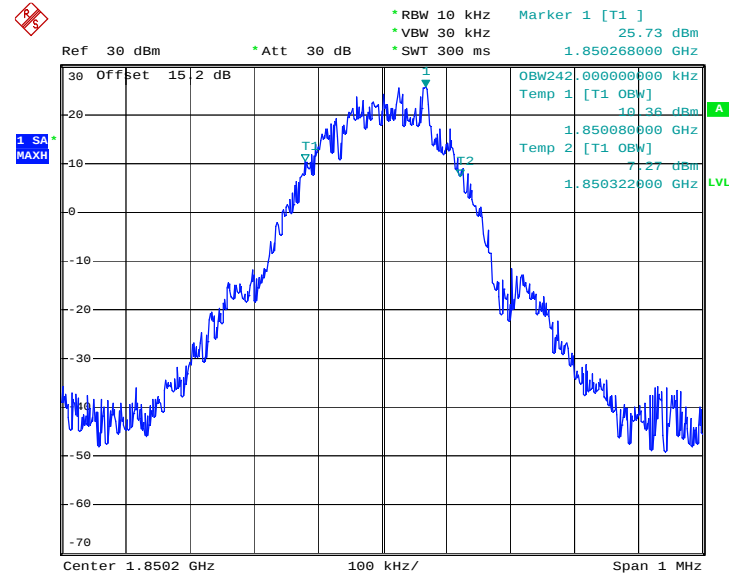
99% Occupied Bandwidth Plot on Channel 512


Date: 11.MAY.2012 12:19:36

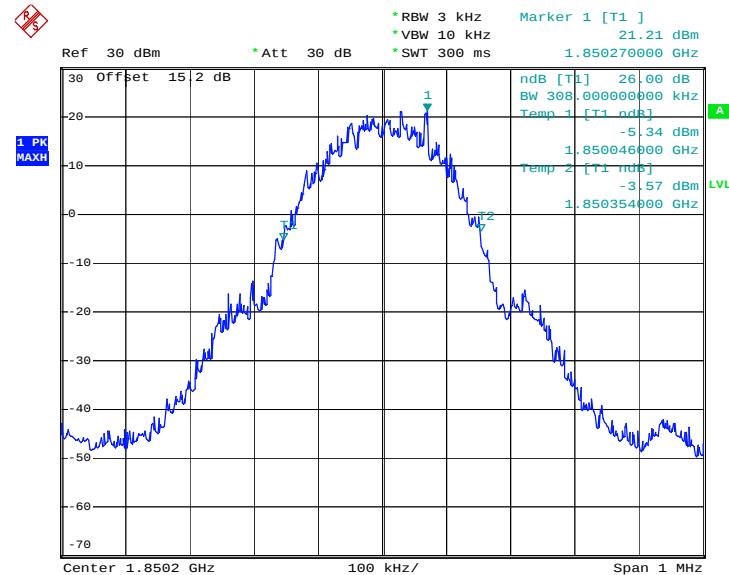26dB Bandwidth Plot on Channel 512


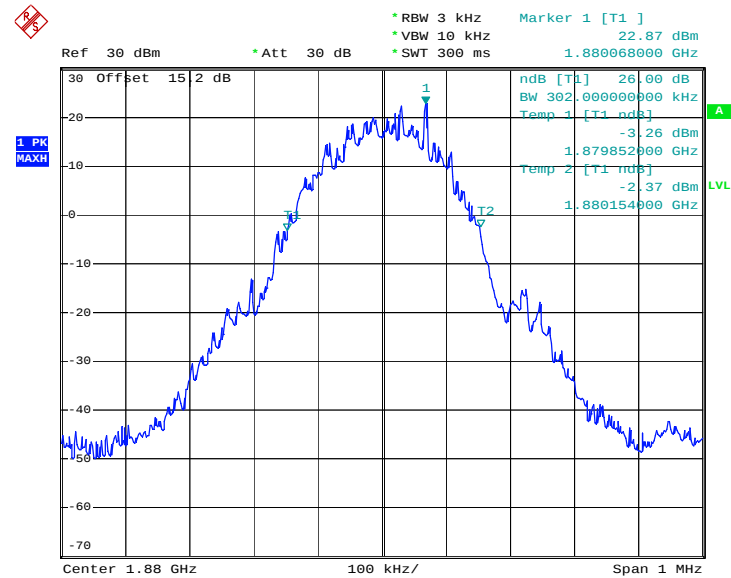
Date: 11.MAY.2012 12:18:18

99% Occupied Bandwidth Plot on Channel 661

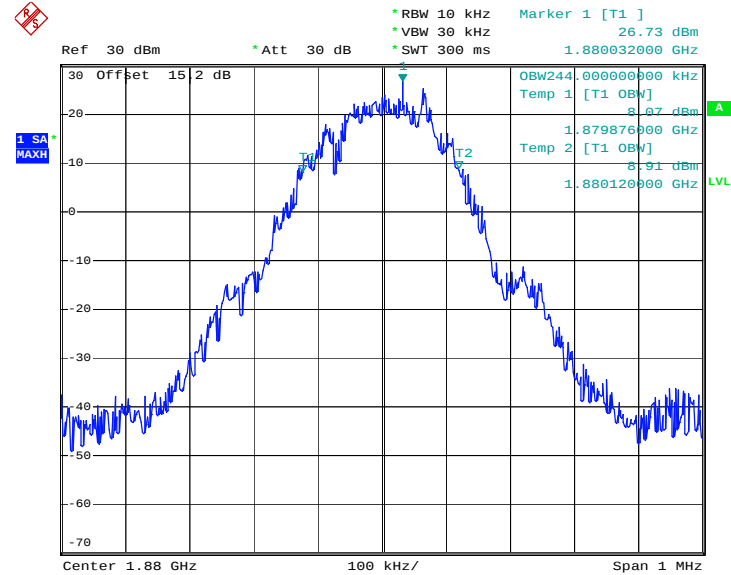


Date: 11.MAY.2012 12:20:02

26dB Bandwidth Plot on Channel 661




Date: 11.MAY.2012 12:18:44

99% Occupied Bandwidth Plot on Channel 810

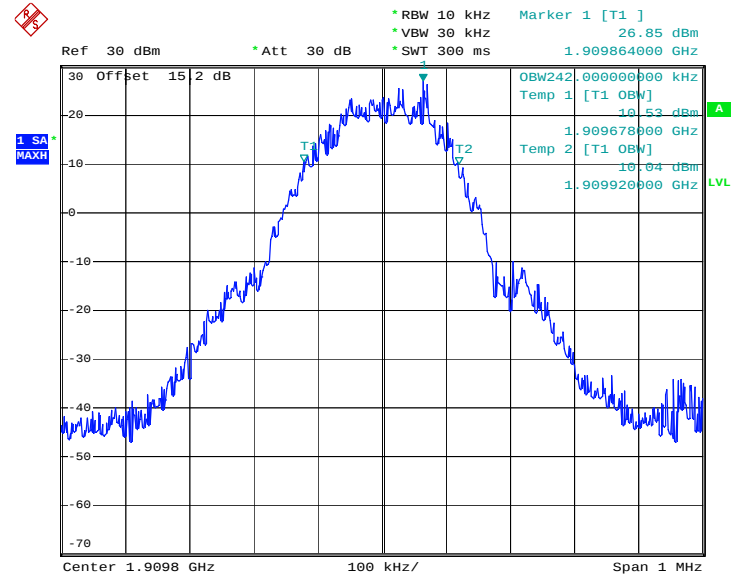

Date: 11.MAY.2012 12:20:28

26dB Bandwidth Plot on Channel 810

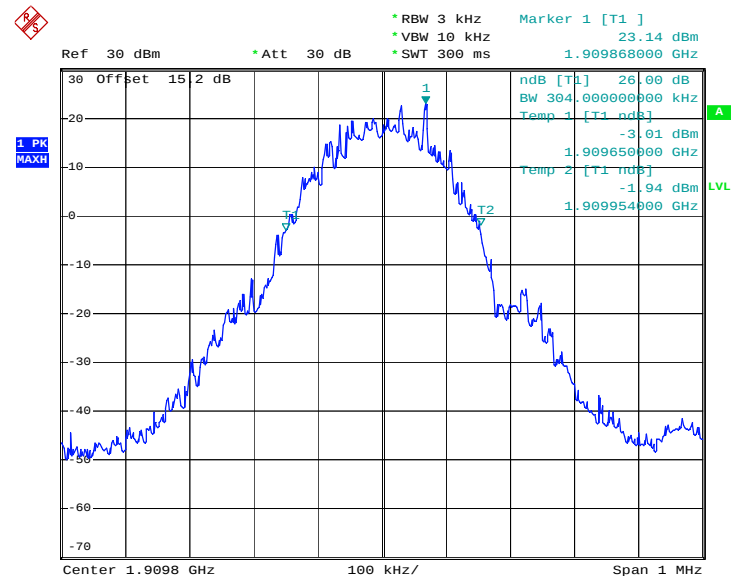

Date: 11.MAY.2012 12:19:10

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. The RBW was replaced by 10 kHz, slightly smaller than the value in (2), due to the spectrum analyzer limitation to set the exact value. A worst case correction factor of $10 \cdot \log (1\% \text{ emission-BW/measurement RBW})$ was compensated.


3.5.4 Test Setup

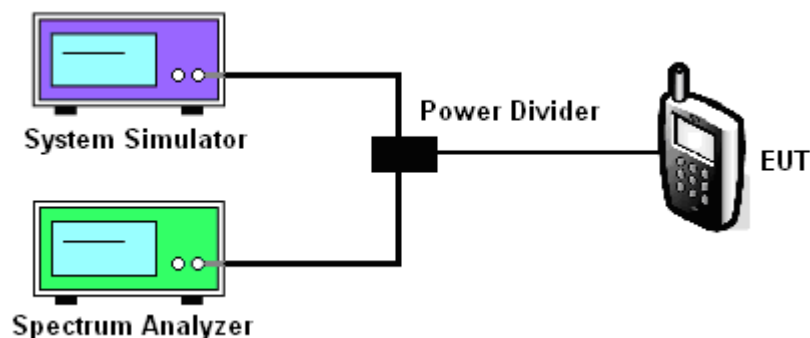

3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55 Link	Maximum 26dB Bandwidth:	1.436MHz
Correction Factor:	1.57dB	Measurement Value:	-17.02dBm
Band Edge:	-15.45dBm		


Lower Band Edge Plot on Channel 1013

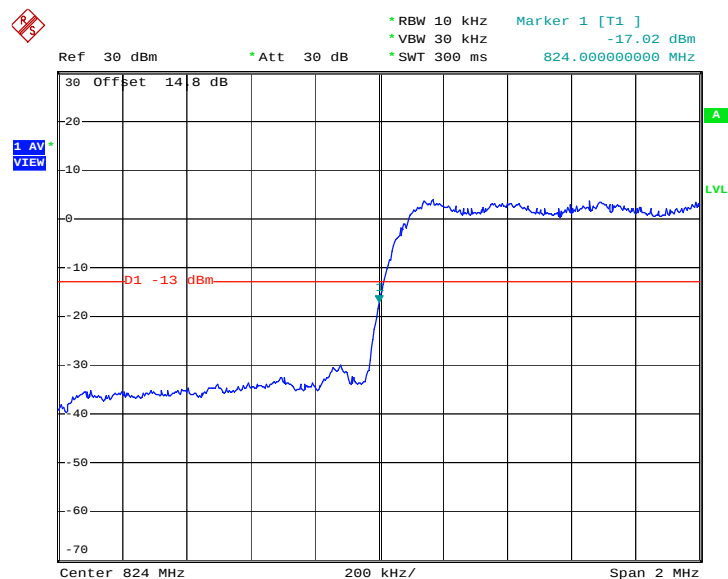

Date: 11.MAY.2012 16:06:18

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55 Link	Maximum 26dB Bandwidth:	1.436MHz
Correction Factor:	1.57dB	Measurement Value:	-14.75dBm
Band Edge:	-13.18dBm		

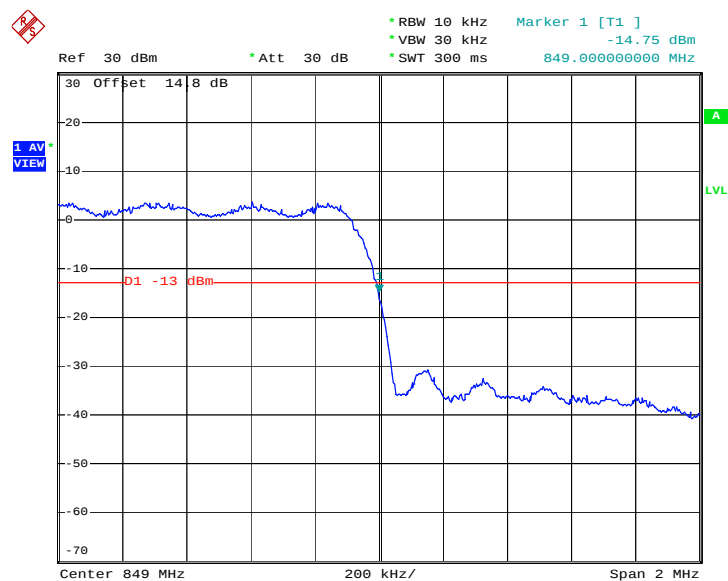Higher Band Edge Plot on Channel 777


Date: 11.MAY.2012 16:10:18

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link	Maximum 26dB Bandwidth :	0.308MHz
Correction Factor :	0.11dB	Measurement Value :	-16.68dBm
Band Edge :	-16.57dBm		

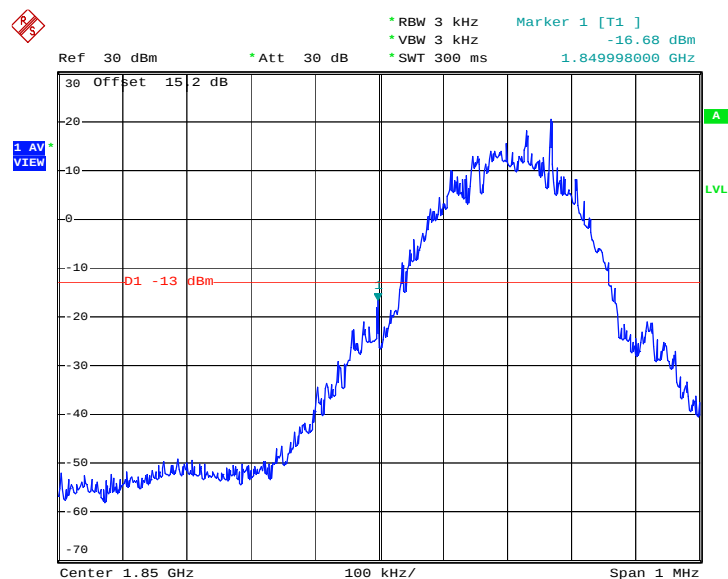
Lower Band Edge Plot on Channel 512


Date: 11.MAY.2012 12:21:52

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link	Maximum 26dB Bandwidth :	0.308MHz
Correction Factor :	0.11dB	Measurement Value :	-19.95dBm
Band Edge :	-19.84dBm		

Higher Band Edge Plot on Channel 810

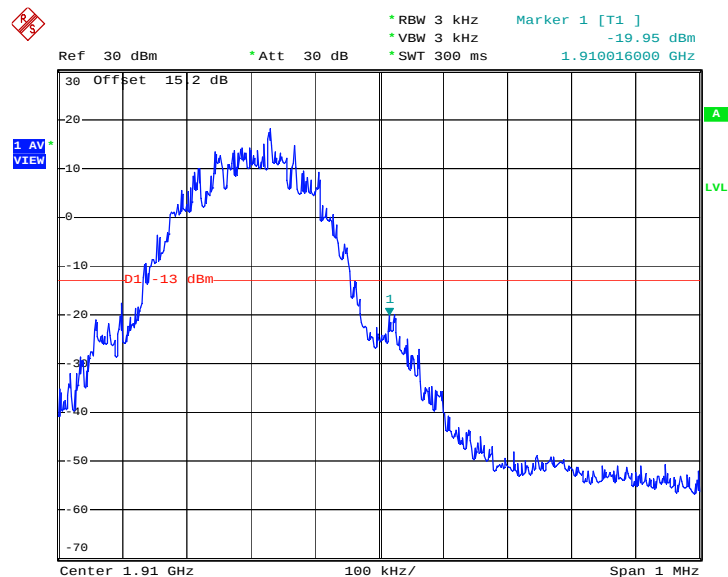

Date: 11.MAY.2012 12:22:18

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

3.6 Conducted Emission Measurement

3.6.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

3.6.4 Test Setup

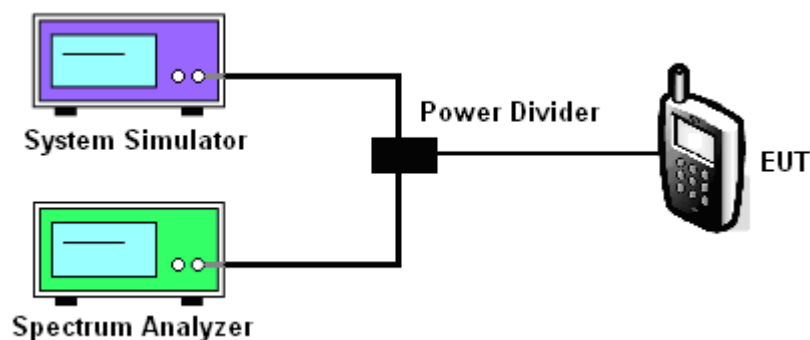


3.6.5 Test Result (Plots) of Conducted Emission

Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55 Link		

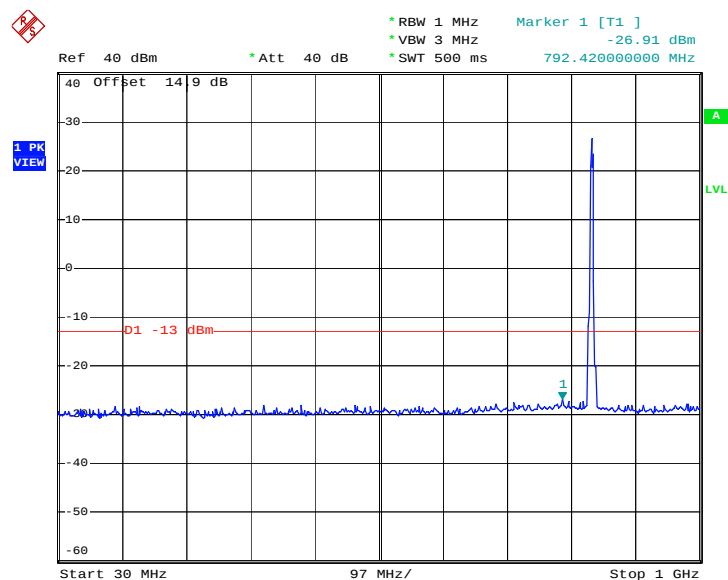
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 11.MAY.2012 16:27:43

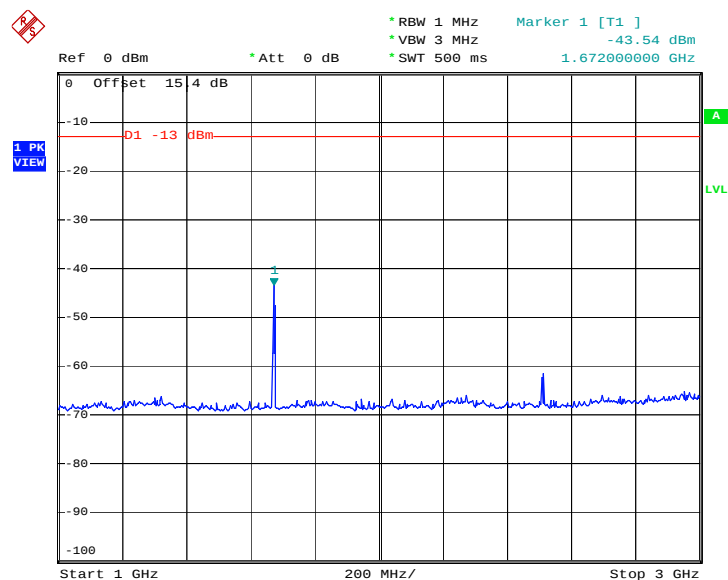Conducted Emission Plot between 1GHz ~ 3GHz


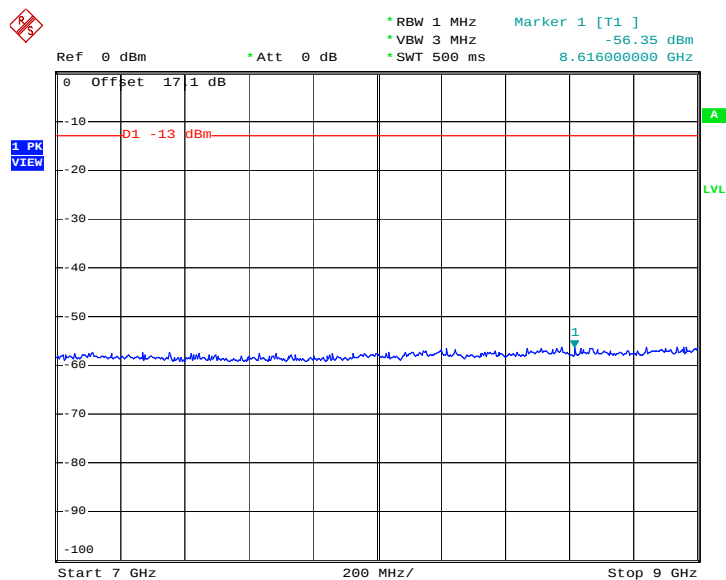
Date: 11.MAY.2012 16:29:29

Conducted Emission Plot between 3GHz ~ 7GHz

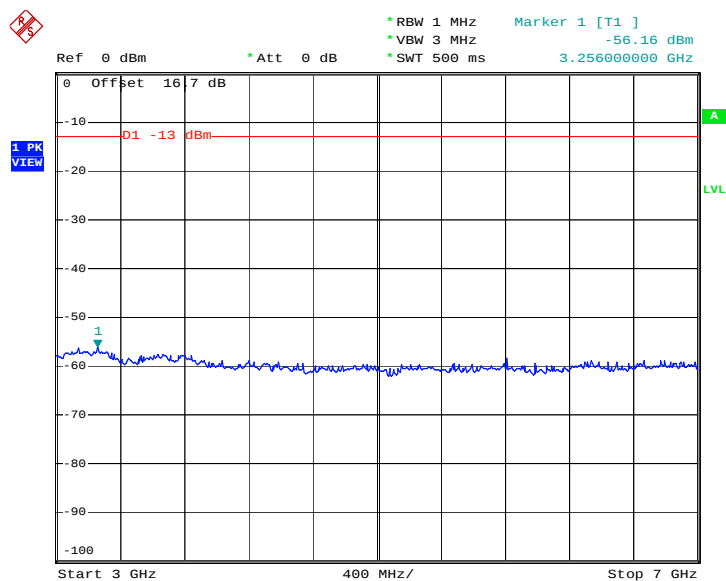


Date: 11.MAY.2012 16:30:26

Conducted Emission Plot between 7GHz ~ 9GHz




Date: 11.MAY.2012 16:50:35

Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

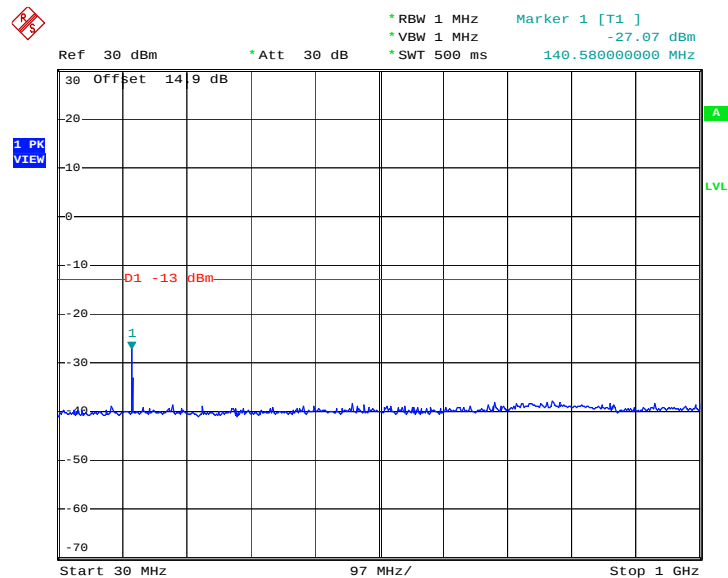
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 11.MAY.2012 12:34:24

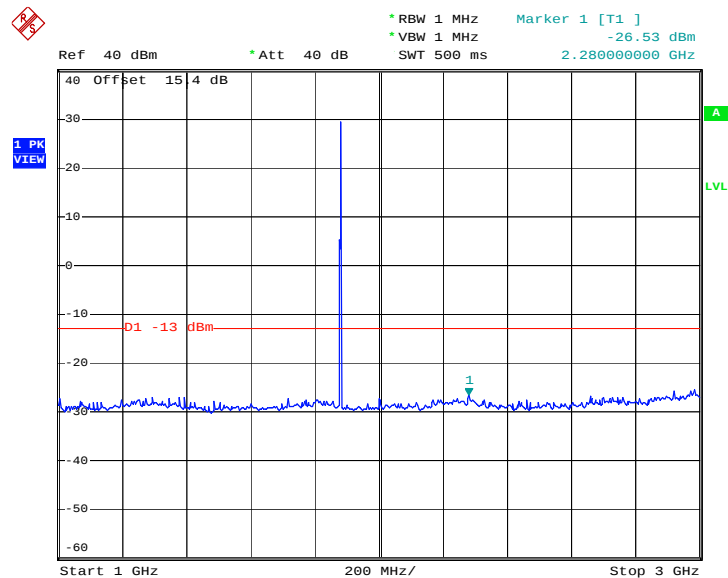Conducted Emission Plot between 1GHz ~ 3GHz


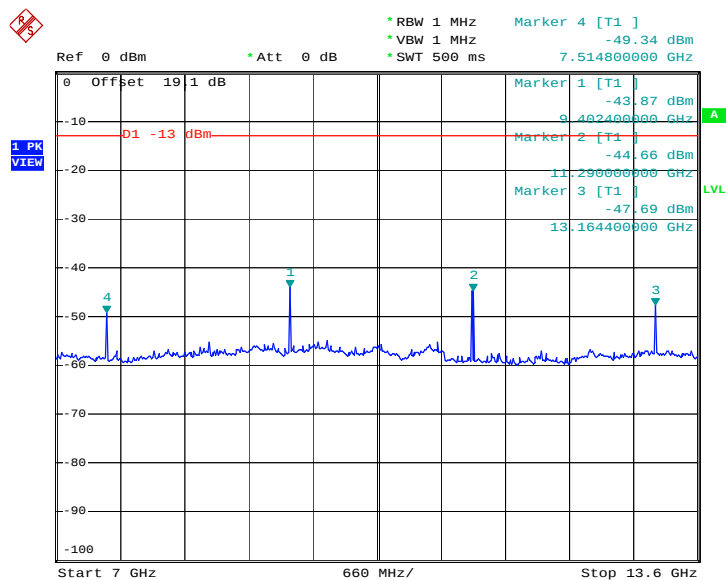
Date: 11.MAY.2012 12:49:20

Conducted Emission Plot between 3GHz ~ 7GHz

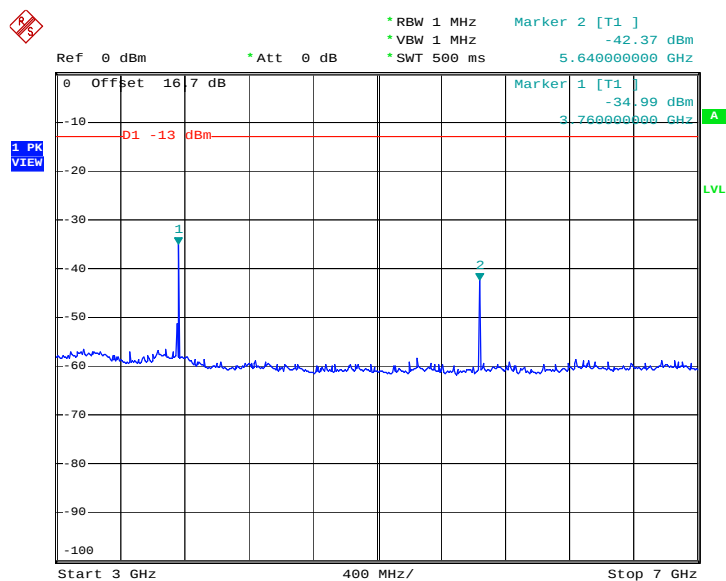


Date: 11.MAY.2012 12:44:09

Conducted Emission Plot between 7GHz ~ 13.6GHz



Date: 11.MAY.2012 12:45:56

Conducted Emission Plot between 13.6GHz ~ 19.1GHz

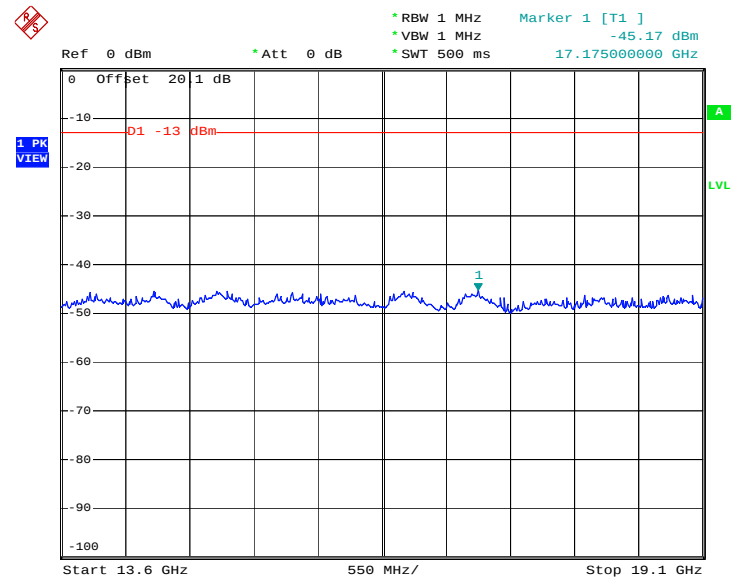

Date: 11.MAY.2012 12:46:49

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$

3.7.4 Test Setup


For radiated emissions below 30MHz

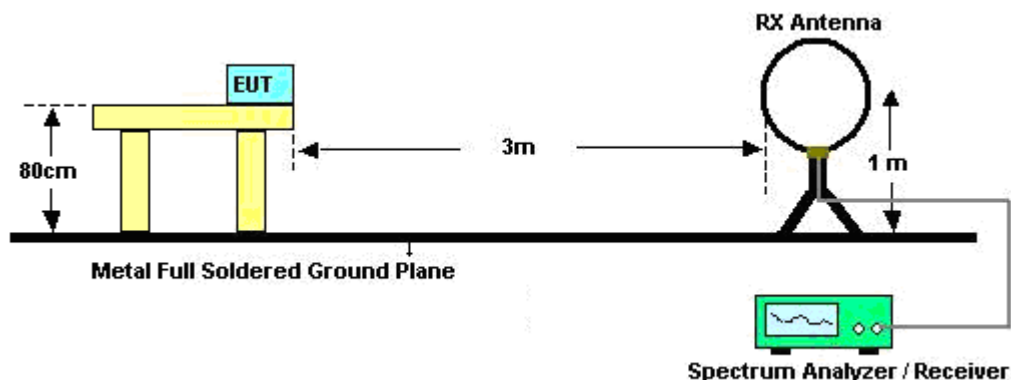

For radiated emissions from 30MHz to 1GHz

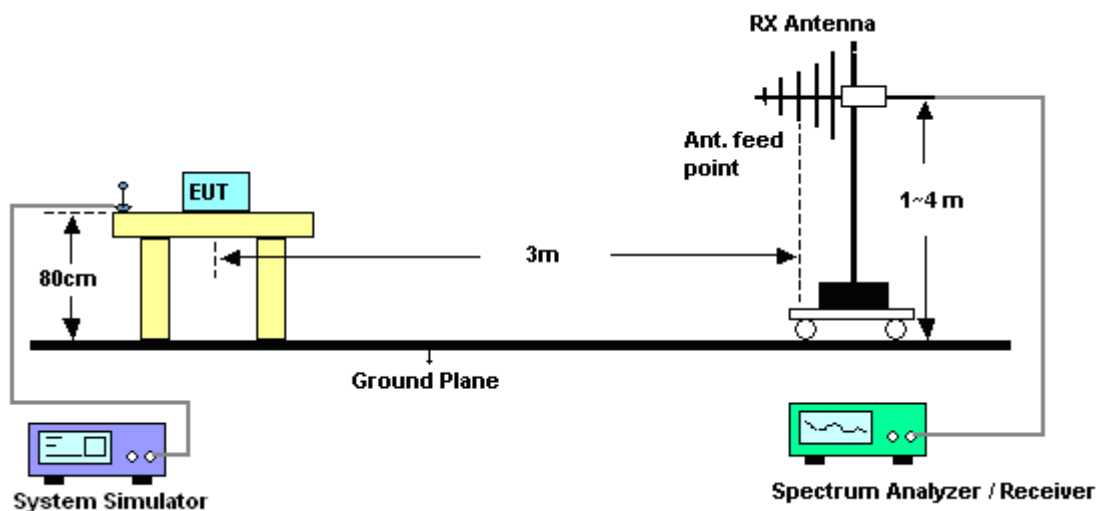

For radiated emissions above 1GHz

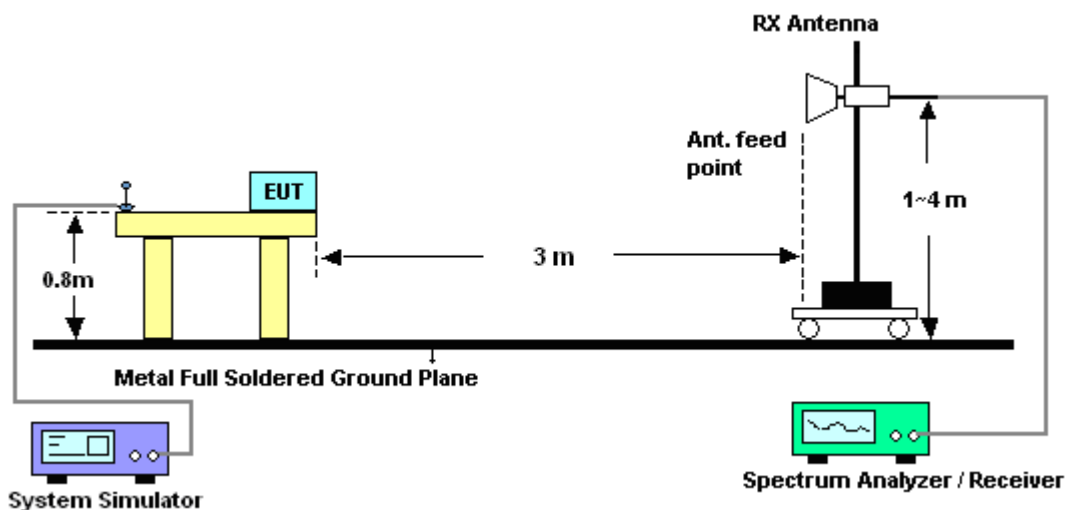


3.7.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.7.6 Test Result of Field Strength of Spurious Radiated


Band :	CDMA2000 BC0	Temperature :	23~24°C
Test Mode :	1xRTT_RC1+SO55 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

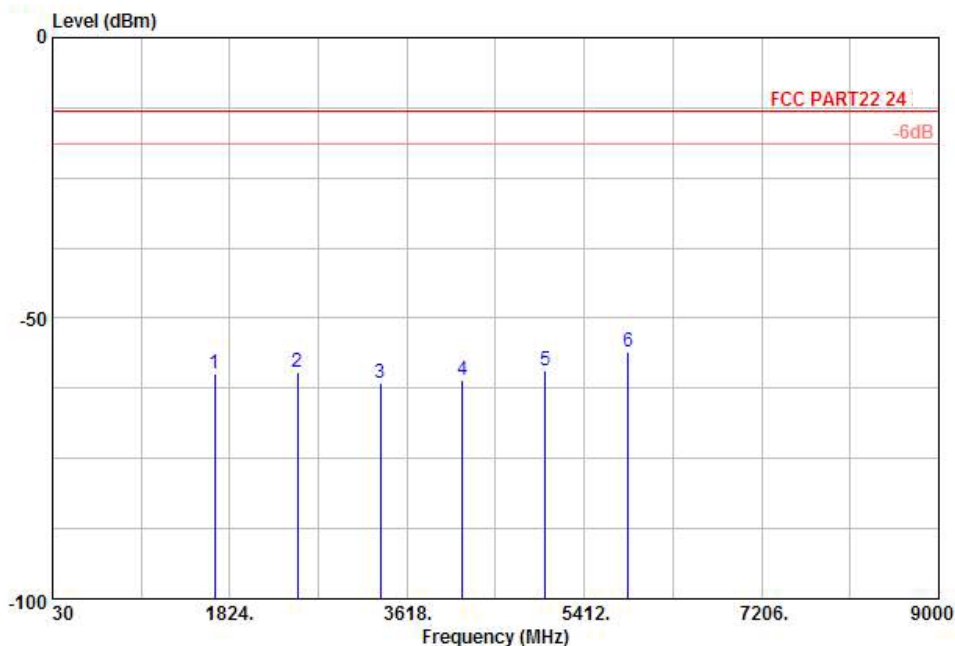

Site : 03CH01-KS
Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL
EUI : (FG) 241746
Plan : H

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.00	-13	-47.00	-55.78	-60.65	0.57	3.37	H	Pass
2509	-59.53	-13	-46.53	-61.78	-61.76	0.78	5.16	H	Pass
3345	-61.51	-13	-48.51	-63.45	-65.15	0.87	6.66	H	Pass
4182	-61.04	-13	-48.04	-63.78	-65.63	0.97	7.71	H	Pass
5018	-59.20	-13	-46.20	-65.40	-64.87	1.09	8.91	H	Pass
5854	-55.97	-13	-42.97	-64.68	-62.41	1.22	9.81	H	Pass


Band :	CDMA2000 BC0	Temperature :	23~24°C
Test Mode :	1xRTT_RC1+SO55 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

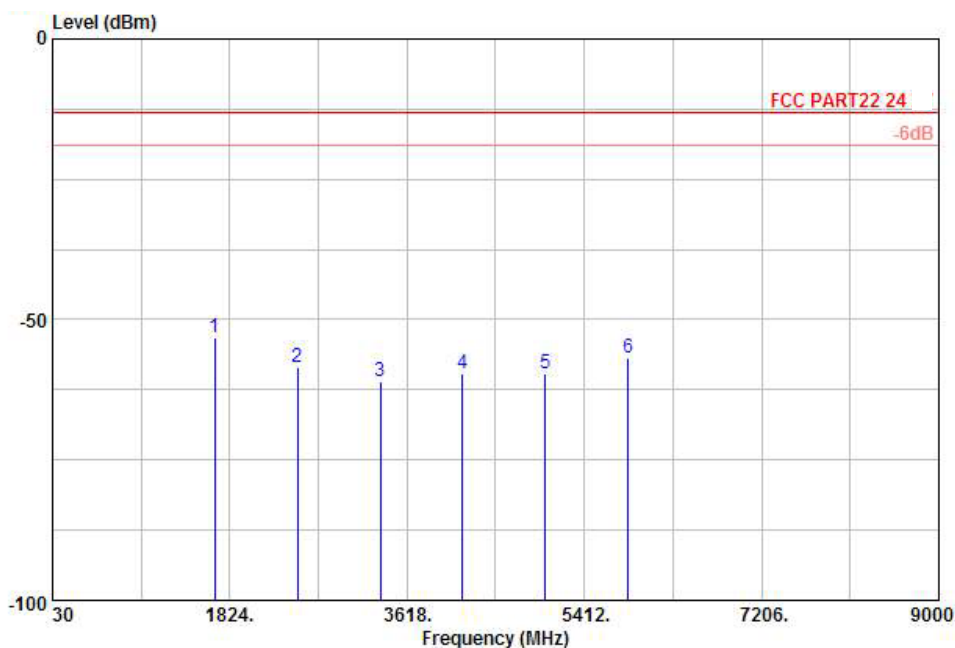

Site : 03CH01-KS
Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL
EUT : (FG) 241746
Plan : H

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-53.18	-13	-40.18	-53.33	-53.83	0.57	3.37	V	Pass
2509	-58.44	-13	-45.44	-61.55	-60.67	0.78	5.16	V	Pass
3345	-60.91	-13	-47.91	-62.89	-64.55	0.87	6.66	V	Pass
4182	-59.73	-13	-46.73	-63.57	-64.32	0.97	7.71	V	Pass
5018	-59.63	-13	-46.63	-64.57	-65.30	1.09	8.91	V	Pass
5854	-56.86	-13	-43.86	-64.85	-63.30	1.22	9.81	V	Pass


Band :	GSM1900	Temperature :	23~24°C
Test Mode :	GPRS 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

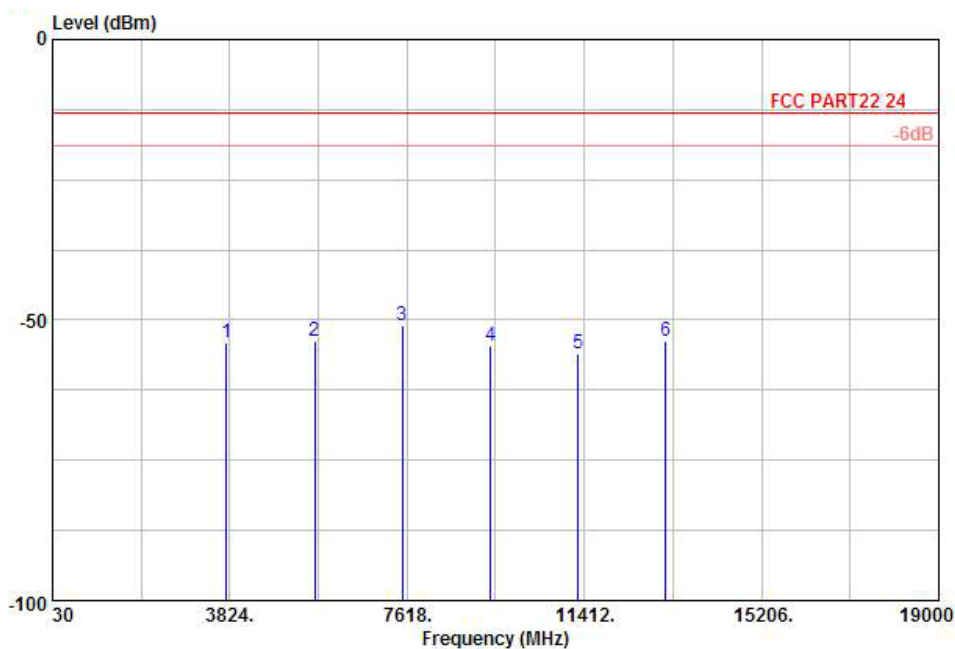

Site : 03CH01-KS
Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL
EUT : (FG) 241746
Plan : H

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-53.90	-13	-40.90	-54.92	-60.28	0.78	7.16	H	Pass
5640	-53.86	-13	-40.86	-58.13	-62.40	1.04	9.58	H	Pass
7520	-50.97	-13	-37.97	-58.16	-61.08	1.35	11.46	H	Pass
9399	-54.68	-13	-41.68	-57.94	-65.74	1.75	12.81	H	Pass
11280	-55.98	-13	-42.98	-67.47	-67.07	2	13.09	H	Pass
13160	-53.77	-13	-40.77	-65.07	-65.48	2.04	13.75	H	Pass

Band :	GSM1900	Temperature :	23~24°C
Test Mode :	GPRS 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

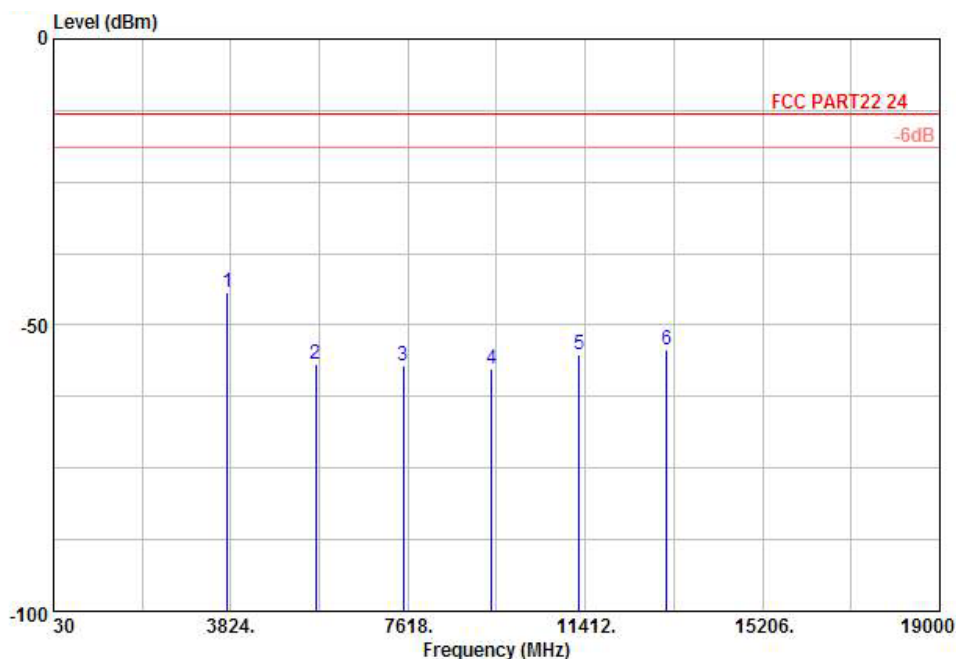

Site : 03CH01-KS
Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL
Mode : mode 1
Plan : H

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-44.28	-13	-31.28	-51.68	-50.66	0.78	7.16	V	Pass
5640	-56.71	-13	-43.71	-59.93	-65.25	1.04	9.58	V	Pass
7520	-57.09	-13	-44.09	-61.58	-67.20	1.35	11.46	V	Pass
9399	-57.61	-13	-44.61	-58.83	-68.67	1.75	12.81	V	Pass
11280	-55.23	-13	-42.23	-66.47	-66.32	2	13.09	V	Pass
13160	-54.30	-13	-41.30	-65.49	-66.01	2.04	13.75	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

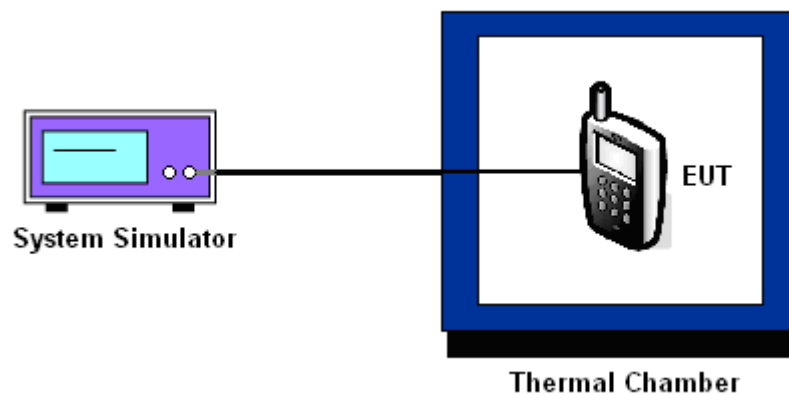

3.8.6 Test Result of Temperature Variation

Band :	CDMA2000 BC0	Channel :	384
Limit (ppm) :	2.5		

Temperature (°C)	1xRTT_RC1+SO55		
	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	-19	-0.02	
0	-21	-0.02	
10	-16	-0.02	
20	-11	-0.01	
30	-9	-0.01	
40	-16	-0.02	
50	-18	-0.02	
60	-17	-0.02	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~60°C.

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	-71	-0.04	
0	-69	-0.04	
10	-89	-0.05	
20	-93	-0.05	
30	-81	-0.04	
40	-91	-0.05	
50	-73	-0.04	
60	-69	-0.04	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~60°C.

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
CDMA2000 BC0 CH384	1xRTT_RC1 +SO55	3.8	-15	-0.02	2.5	PASS
		BEP	-8	-0.01		
		4.35	-16	-0.02		
GSM 1900 CH661	GPRS 8	3.8	-96	-0.05		
		BEP	-91	-0.05		
		4.35	-88	-0.05		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.5 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	May 11, 2012	Dec. 29, 2012	Conducted (TH01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	May 11, 2012	Dec. 29, 2012	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 23, 2011	May 11, 2012	Aug. 22, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	May 11, 2012	Dec. 29, 2012	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	May 08, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	May 08, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	May 08, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	May 08, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060007	30MHz~2GHz	Dec. 30, 2011	May 08, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	May 08, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
SHE-EHF Horn	Schwarzbeck	BBHA9170	BBHA170249	15GHz~40GHz	Oct. 11, 2011	May 08, 2012	Oct. 10, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00	9kHz~30 MHz	Jul. 28, 2011	May 08, 2012	Jul. 27, 2012	Radiation (03CH01-KS)
System Simulator	R&S	CMU200	116456	Full-Band	Sep. 20, 2011	May 08, 2012	Sep. 19, 2012	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				