



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 27 LTE

Applicant Name:
Motorola Mobility LLC
8000 West Sunrise Blvd.
Plantation, FL 33322
United States

Date of Testing:
07/09/12 - 7/10/12
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1207130931.IHD

FCC ID:	IHDT56NS1
APPLICANT:	MOTOROLA MOBILITY LLC

Application Type: Certification
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §27
EUT Type: Portable Handset
Tx Frequency Range: 782MHz (LTE - Band 13)
Max. RF Output Power: 0.254W ERP (24.04 dBm) (QPSK)
0.204W ERP (23.09 dBm) (16-QAM)
Emission Designator(s): 8M91G7D (QPSK) / 8M88W7D (16-QAM)
Test Device Serial No.: *identical prototype* [S/N: Unit 2]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 27.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez
President



FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 1 of 25

T A B L E O F C O N T E N T S

FCC PART 27 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES.....	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.4 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS	6
3.1 EVALUATION PROCEDURE	6
3.2 BLOCK C FREQUENCY RANGE	6
3.3 OCCUPIED BANDWIDTH EMISSION LIMITS	6
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	6
3.5 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	7
3.6 FREQUENCY STABILITY / TEMPERATURE VARIATION	8
4.0 TEST EQUIPMENT CALIBRATION DATA	9
5.0 SAMPLE CALCULATIONS	10
6.0 TEST RESULTS.....	11
6.1 SUMMARY.....	11
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA	12
6.3 LTE RADIATED MEASUREMENTS	13
6.4 LTE RADIATED MEASUREMENTS IN 1559 – 1610MHZ BAND	14
6.5 LTE FREQUENCY STABILITY MEASUREMENTS.....	15
7.0 PLOT(S) OF EMISSIONS	17
8.0 CONCLUSION.....	25

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 2 of 25	



MEASUREMENT REPORT

FCC Part 27



§2.1033 General Information



APPLICANT: Motorola Mobility LLC
APPLICANT ADDRESS: 8000 West Sunrise Blvd.
 Plantation, FL 33322
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §27
FCC ID: IHDT56NS1
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
EMISSION DESIGNATOR(S): 8M91G7D (QPSK) / 8M88W7D (16-QAM)
MODULATIONS: QPSK, 16-QAM (Uplink)
FREQUENCY TOLERANCE: Emission must remain in band
Test Device Serial No.: Unit 2 Production Pre-Production Engineering
DATE(S) OF TEST: 07/09/12 - 7/10/12
TEST REPORT S/N: 0Y1207130931.IHD

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: IHDT56NS1	 ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 3 of 25

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

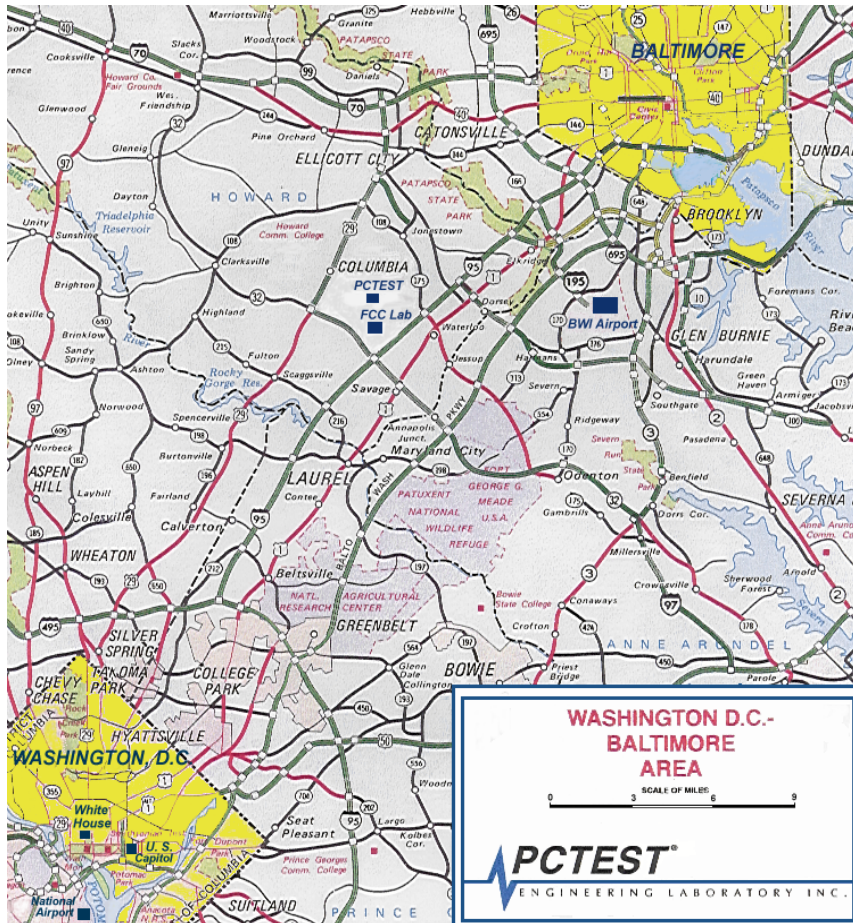




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 4 of 25

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Portable Handset FCC ID: IHDT56NS1**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Motorola / Model:	IHDT56NS1	Portable Handset

Table 2-1. EUT Equipment Description

A CMW500 call box was used to set the EUT to transmit at full power. Each available modulation type (i.e. QPSK, 16-QAM) and RB size/RB offset combination was tested to determine the configuration producing the highest power and the worst case emissions.

2.2 Device Capabilities

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), Band 13 LTE, 802.11a/b/g/n WLAN (DTS/NIJ), Bluetooth (1x,EDR, LE), NFC

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 5 of 25	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) was used in the measurement of the measurement of the **Motorola Portable Handset FCC ID: IHDT56NS1**.

Deviation from Measurement Procedure.....None

3.2 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.3 Occupied Bandwidth Emission Limits



§2.1049, §27.53(l)(6)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The occupied bandwidth was measured using the signal analyzers’ “Occupied Bandwidth” measurement function.

3.4 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §27.53(c)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 6 of 25	

3.5 Radiated Power and Radiated Spurious Emissions

§2.1053, §27.53(c)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on the table at a distance of 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna is mounted to a bore-sight mechanism on a mast that is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized. The level of the maximized radiated spurious emissions is recorded with the spectrum analyzer using a peak detector with RBW = 1MHz, VBW = 3MHz for emissions greater than 1GHz. For emissions below 1GHz, the spectrum analyzer is set to RBW = 100kHz and VBW = 300kHz.



Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ specified in 27.53.

For fundamental radiated power measurements, the guidance of KDB 971168 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-C-2004.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 7 of 25	

3.6 Frequency Stability / Temperature Variation

§2.1055, §27.54



Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.



FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 8 of 25	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	E8267C	Vector Signal Generator	10/10/2011	Biennial	10/10/2013	US42340152
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Pulse Sensor	10/13/2011	Annual	10/13/2012	1027293
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Annual	7/22/2012	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	10/1/2010	Biennial	10/1/2012	128337
Mini-Circuits	VHF-1200+	High Pass Filter	1/15/2012	Annual	1/15/2013	30923
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	3/5/2012	Annual	3/5/2013	102060
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 9 of 25	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 10 of 25	

6.0 TEST RESULTS

6.1 Summary



Company Name: Motorola Mobility LLC
 FCC ID: IHDT56NS1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (Tx)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 27.53(c)(2), 27.53(c)(4)	Band Edge / Conducted Spurious Emissions (*)	< 43 + 10log ₁₀ (P[Watts]) < 65 + 10log ₁₀ (P[Watts]) in a 6.25kHz bandwidth for emissions in the 763 – 775MHz and 793 – 805MHz bands		PASS	Section 7.0
2.1055, 27.54	Frequency Stability	Fundamental emissions must stay within the allotted band		PASS	Section 6.5
27.50(b)(10)	Effective Radiated Power	< 3 Watts max. ERP	RADIATED	PASS	Section 6.2
2.1053, 27.53(c)(2) 27.53(c)(4)	Undesirable Out-of-Band Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.3
2.1053, 27.53(f)	Undesirable Emissions in the 1559 – 1610MHz band	< -40dBm/MHz EIRP (wideband) < -50dBm EIRP (narrowband)		PASS	Section 6.4

Table 6-1. Summary of Test Results

Notes:

* - For out of band conducted spurious emissions (including those at the band edges), the emissions of both QPSK and 16-QAM modulations were investigated. The worst case transmitter emissions are shown in Section 7.0.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 11 of 25	

6.2 Effective Radiated Power Output Data

§27.50(b)(10)

Frequency [MHz]	Modulation	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Power Source
782.00	QPSK	-15.760	24.04	0.00	H	24.04	0.254	Battery
782.00	16-QAM	-16.710	23.09	0.00	H	23.09	0.204	Battery



Table 6-2. Effective Radiated Power Output Data

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the worst case radiated power is reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 12 of 25	

6.3 LTE Radiated Measurements §2.1053, §27.53(c)(2)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 24.040 dBm = 0.254 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.04 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2346.00	-59.13	3.57	-55.56	H	79.6
3128.00	-54.04	3.64	-50.40	H	74.4
3910.00	-90.47	5.20	-85.27	H	109.3
4692.00	-90.00	6.61	-83.40	H	107.4



Table 6-3. Radiated Spurious Data (QPSK Modulation)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the worst case radiated spurious emissions are reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 13 of 25

6.4 LTE Radiated Measurements in 1559 – 1610MHz Band §2.1053, §27.53(f)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY:	<u>782.00</u>	MHz		
MEASURED OUTPUT POWER:	<u>24.040</u>	dBm	=	<u>0.254</u> W
MODULATION SIGNAL:	<u>QPSK</u>			
DISTANCE:	<u>3</u>	meters		
NARROWBAND EMISSION LIMIT:	<u>-50</u>	dBm		
WIDEBAND EMISSION LIMIT:	<u>-40</u>	dBm/MHz		

FREQUENCY (MHz)	EMISSION TYPE	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	MARGIN (dB)
1562.70	WIDEBAND	-66.45	8.53	-57.92	H	-17.92



Table 6-4. Radiated Spurious Data

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the worst case radiated spurious emissions are reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 14 of 25

6.5 LTE Frequency Stability Measurements



§2.1055, §27.54

OPERATING FREQUENCY: 782,000,000 Hz

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	781,999,993	-7	-0.00000084
100 %		- 30	781,999,988	-12	-0.00000147
100 %		- 20	781,999,995	-5	-0.00000060
100 %		- 10	781,999,997	-3	-0.00000035
100 %		0	781,999,997	-3	-0.00000036
100 %		+ 10	781,999,997	-3	-0.00000042
100 %		+ 20	781,999,982	-18	-0.00000227
100 %		+ 30	781,999,993	-7	-0.00000088
100 %		+ 40	781,999,991	-9	-0.00000111
100 %		+ 50	781,999,995	-5	-0.00000060
115 %	4.26	+ 20	781,999,995	-5	-0.00000068
BATT. ENDPOINT	3.40	+ 20	781,999,983	-17	-0.00000221

Table 6-5. Frequency Stability Data

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset	Page 15 of 25	

LTE Frequency Stability Measurements (Cont'd)
§2.1055, §27.54

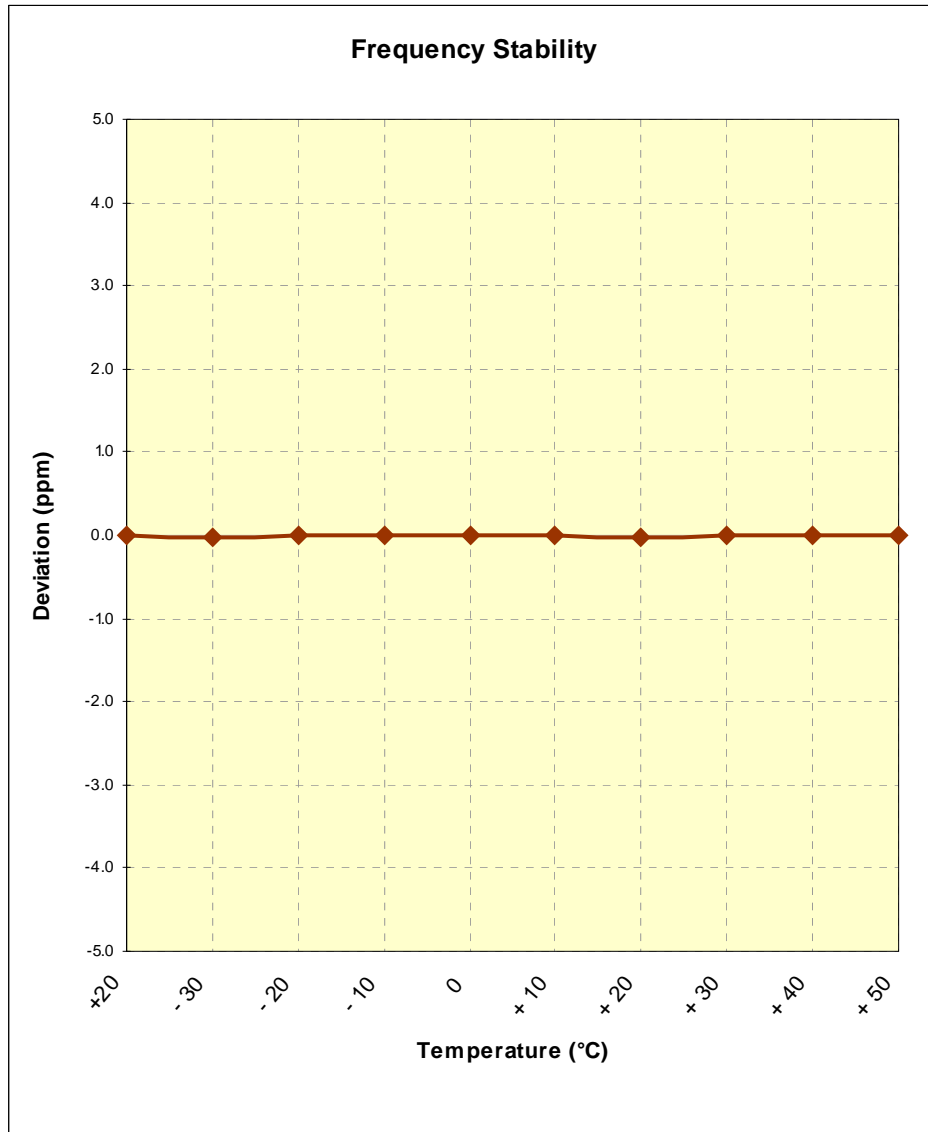


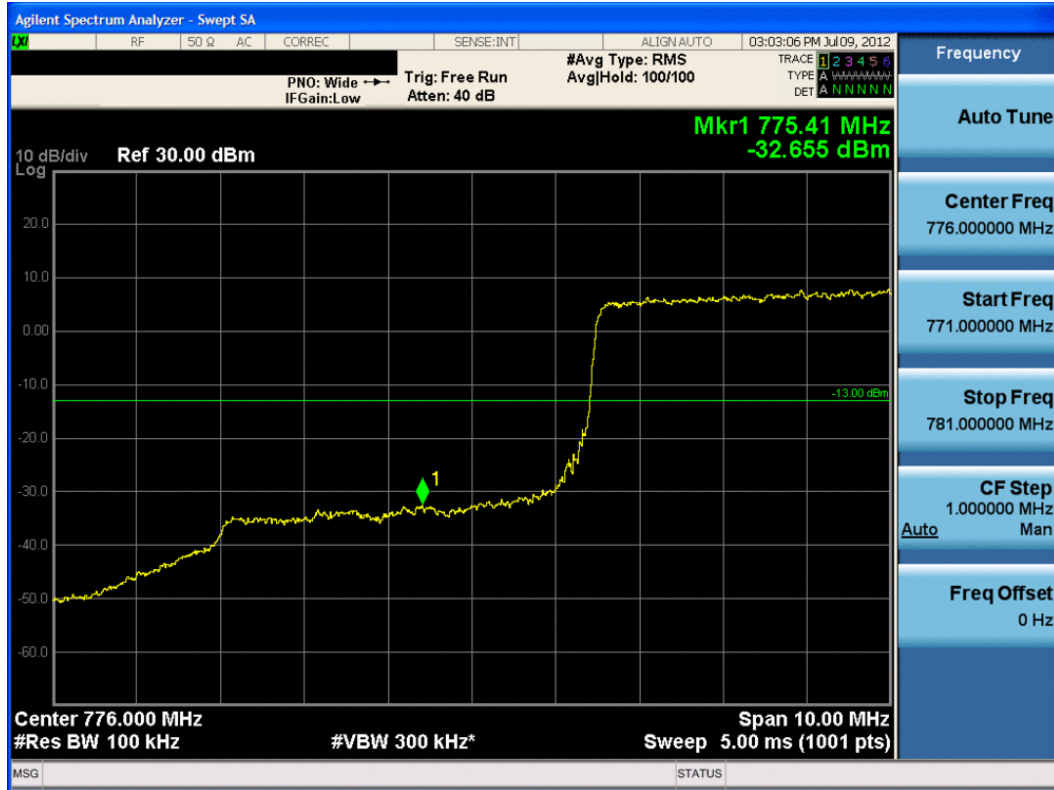


Figure 6-1. Frequency Stability Graph

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 16 of 25


7.0 PLOT(S) OF EMISSIONS

For all plots in Section 7.0 showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit is $65 + 10\log_{10}(P_{[Watts]}) = -35\text{dBm}$ in a 6.25kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25kHz with the available equipment, a bandwidth of 10kHz was used instead to show compliance. By using a 10kHz bandwidth on the spectrum analyzer, the limit was adjusted by $10\log_{10}(10\text{kHz}/6.25\text{kHz}) = 2.04\text{dB}$. Thus, the limit shown in all plots in the 763 – 775MHz and 793 – 805MHz bands for all available modulation types was $-35\text{dBm} + 2.04\text{dB} = -32.96\text{dBm}$.




Plot 7-1. Lower Band Edge Plot (QPSK – RB Size 50)

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 17 of 25

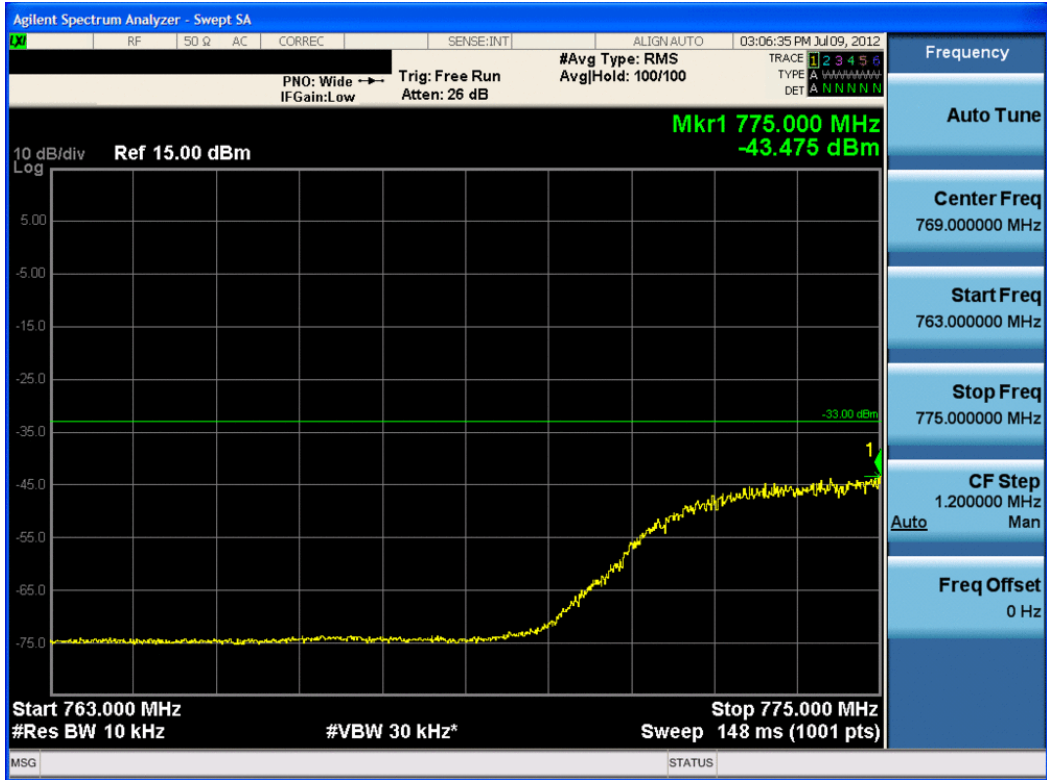

Plot 7-4. Lower Emission Mask (763 – 775MHz) Plot (16-QAM – RB Size 50)

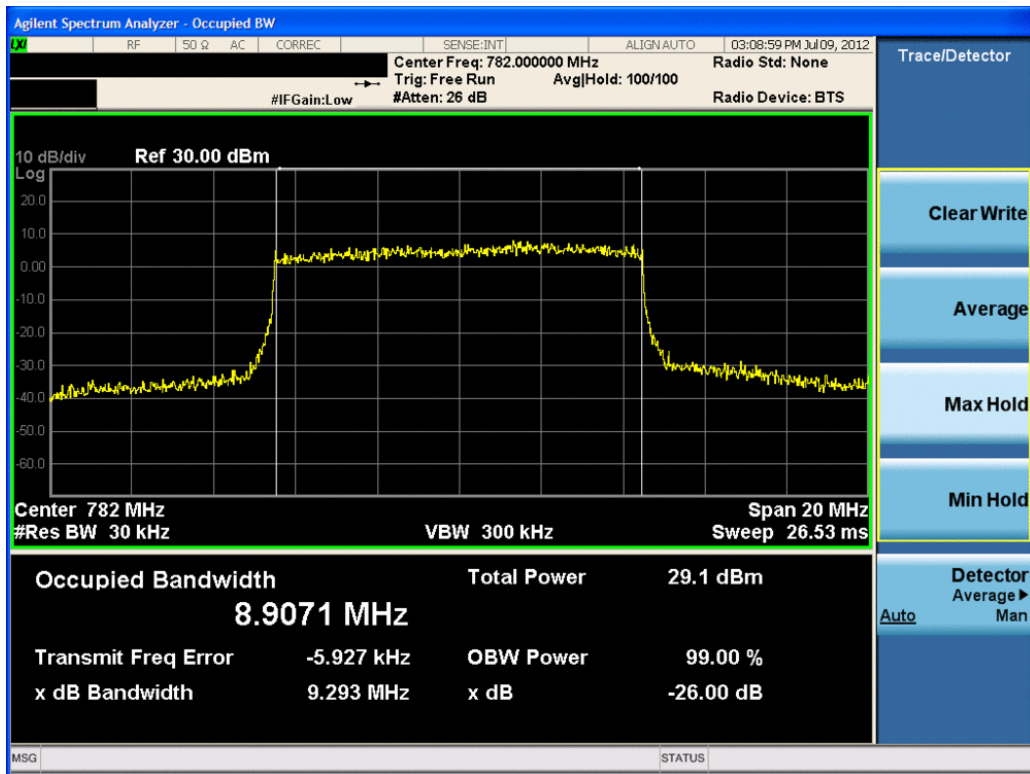

Plot 7-5. Occupied Bandwidth Plot (QPSK – RB Size 50)

FCC ID: IHDT56NS1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 19 of 25



Plot 7-12. Upper Band Edge Plot (16-QAM – RB Size 50)





Plot 7-13. Upper Emission Mask (793 – 805MHz) Plot (QPSK – RB Size 50)

FCC ID: IHDT56NS1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 23 of 25

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Motorola Portable Handset FCC ID: IHDT56NS1** complies with all the requirements of Parts 2 and 27 of the FCC rules.

FCC ID: IHDT56NS1		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207130931.IHD	Test Dates: 07/09/12 - 7/10/12	EUT Type: Portable Handset		Page 25 of 25