



FCC RF Test Report

APPLICANT : Motorola Mobility, Inc.
EQUIPMENT : CDMA/GSM Dual-SIM Dual-Standby Dual-Active digital mobile phone with BT/ Wi-Fi
BRAND NAME : Motorola
MODEL NAME : XT788
MARKETING NAME : MOTOLUXE XT XT788
TYPE NAME : M0D71
GPPD NUMBER : 3441
FCC ID : IHDT56NY1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Jul. 03, 2012 and completely tested on Sep. 13, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 RF Output Power 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 RF Utility 9

3 TEST RESULT 10

 3.1 Number of Channel Measurement 10

 3.2 20dB Bandwidth Measurement 12

 3.3 Hopping Channel Separation Measurement 19

 3.4 Dwell Time Measurement..... 22

 3.5 Peak Output Power Measurement 24

 3.6 Band Edges Measurement 27

 3.7 Spurious Emission Measurement..... 33

 3.8 AC Conducted Emission Measurement..... 37

 3.9 Radiated Emission Measurement..... 41

 3.10 Antenna Requirements 51

4 LIST OF MEASURING EQUIPMENT..... 52

5 UNCERTAINTY OF EVALUATION..... 53



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.61 dB at 2.110 MHz for Quasi-Peak
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.88 dB at 2483.500 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Motorola Mobility, Inc.

9F., No. 9, Songgao Rd. Taipei 110, Taiwan, R.O.C.

1.2 Manufacturer

Huizhou BYD Electronic Co., Ltd.

Xiangshui River, Economic Development Zone, Daya Bay, Huizhou, Guangdong

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA/GSM Dual-SIM Dual-Standby Dual-Active digital mobile phone with BT/ Wi-Fi
Brand Name	Motorola
Model Name	XT788
Marketing Name	MOTOLUXE XT XT788
Type Name	M0D71
FCC ID	IHDT56NY1
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 8.48 dBm (0.0070 W) Bluetooth EDR (2Mbps) : 9.08 dBm (0.0081 W) Bluetooth EDR (3Mbps) : 9.38 dBm (0.0087 W)
Antenna Type	PIFA Antenna with gain -1.5 dBi
HW Version	B2
SW Version	IRPMCT_B_02.41.00RDD
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth 3.0 EDR (1Mbps) : GFSK, $\pi/4$ -DQPSK, 8-DPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	03CH01-KS	CO01-KS	149928/4086E-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
3.	Router	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A
6.	DC Power Supply	GW	GPS-60300	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.39 dBm	7.99 dBm	8.28 dBm
Ch39	2441MHz	8.19 dBm	8.77 dBm	9.05 dBm
Ch78	2480MHz	8.48 dBm	9.08 dBm	9.38 dBm

Remark:

1. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations, laptop / tablet modes.

The following tables are showing the test modes as the worst cases (Z plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz
AC Conducted Emission	Mode 1 :CDMA2000 BC0 + Bluetooth Link + WLAN Link + Earphone + Camera + USB Cable (Charging from Adapter 1) Mode 2 :GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + MPEG4 + USB Cable (Charging from Adapter 1)		
Remark: <ol style="list-style-type: none"> For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported. The worst case of conducted emission is mode 2; only the test data of it was reported. All test items were performance with Adapter 1. 			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

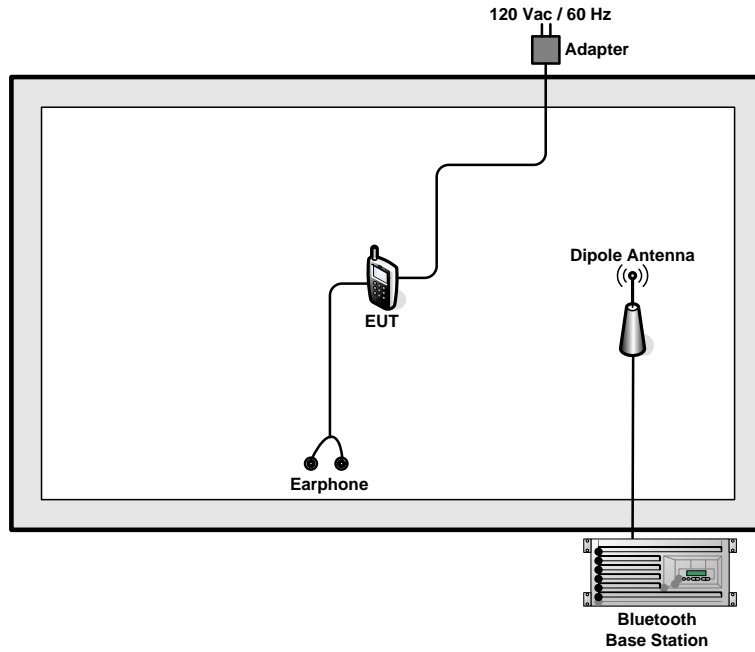

<AC Conducted Emission Mode>

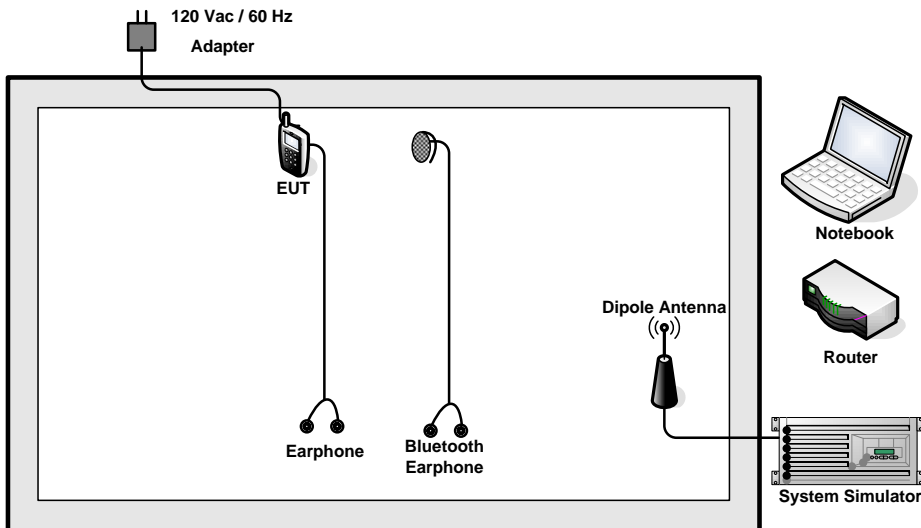

2.4 RF Utility

For Bluetooth function, key in "ADB" on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

3.1.4 Test Setup

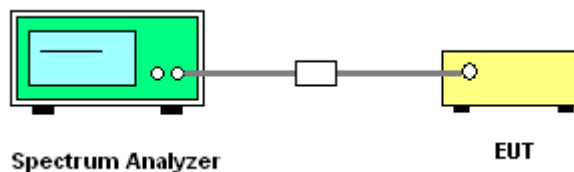


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 1~3	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass




720510

Number of Hopping Channel Plot on Channel 00 - 78

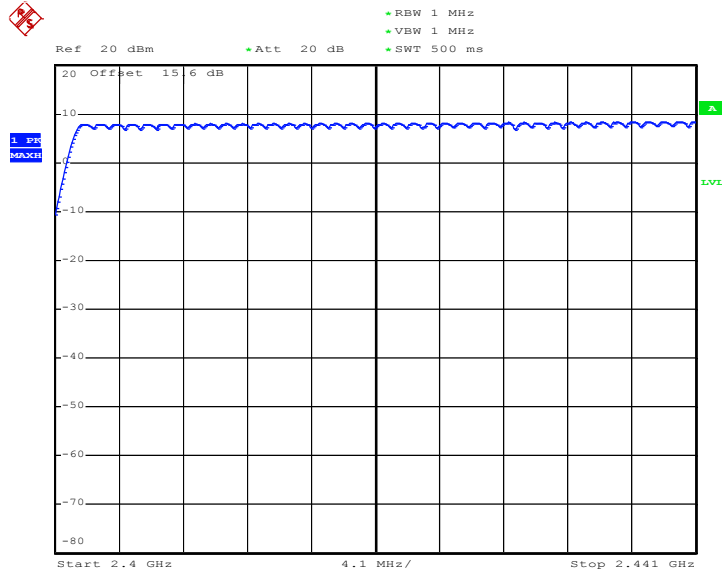

Date: 10.SEP.2012 10:24:08

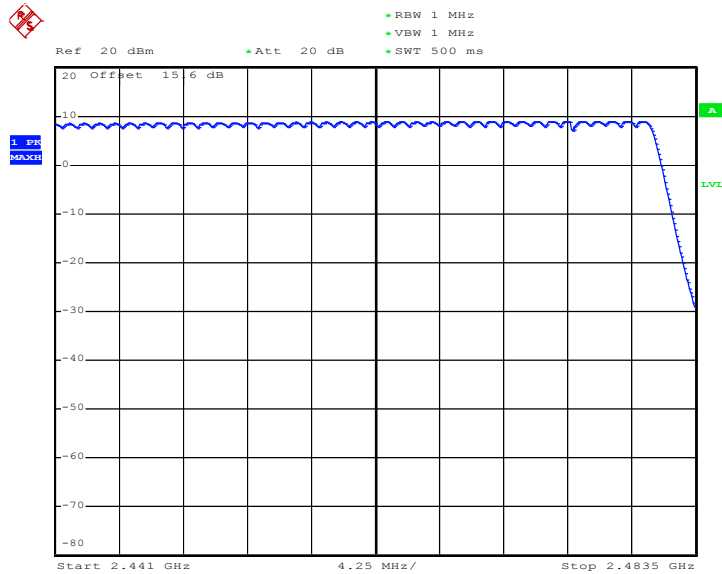

Date: 10.SEP.2012 10:28:43

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

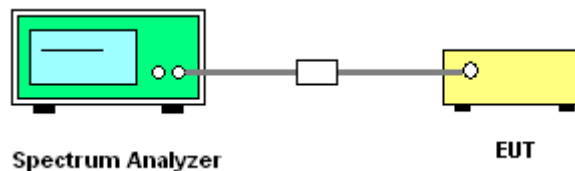




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.932
39	2441	0.936
78	2480	0.936


20 dB Bandwidth Plot on Channel 00

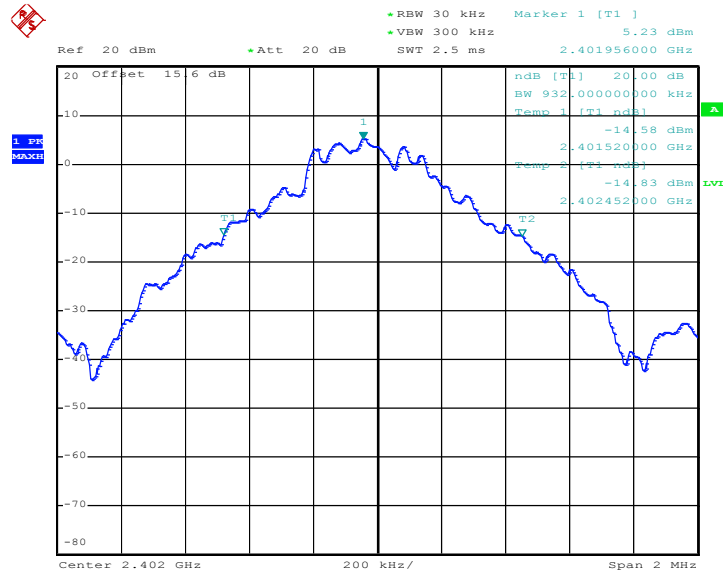

Date: 10.SEP.2012 10:02:05




20 dB Bandwidth Plot on Channel 39

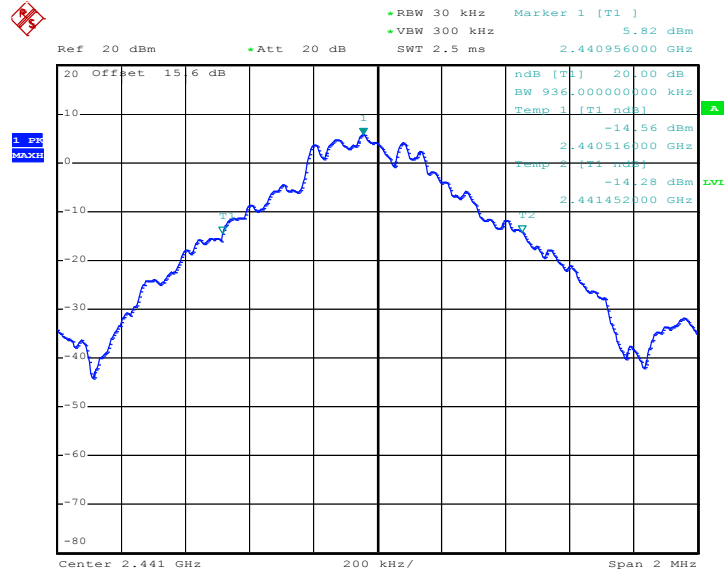

Date: 10.SEP.2012 10:02:35

20 dB Bandwidth Plot on Channel 78

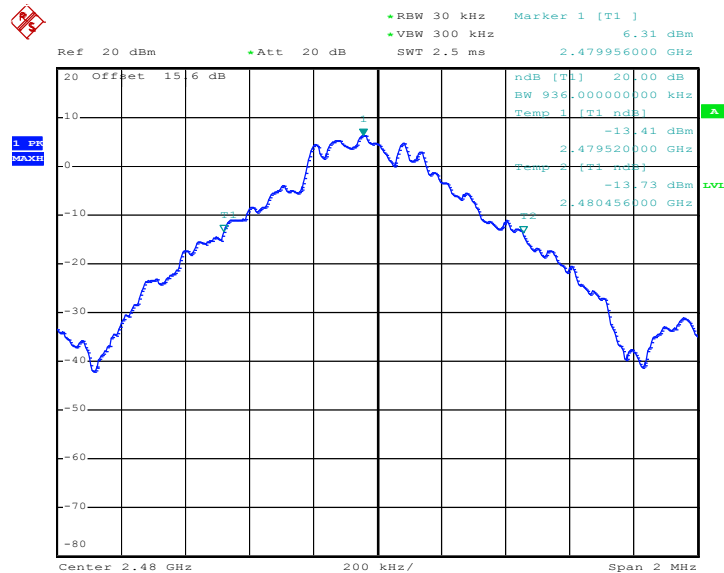


Date: 10.SEP.2012 10:03:33



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.296
39	2441	1.302
78	2480	1.320


20 dB Bandwidth Plot on Channel 00

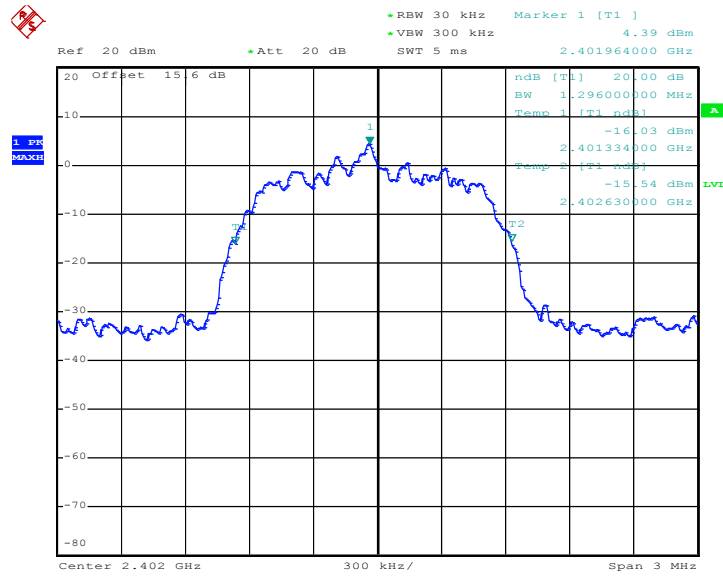

Date: 10.SEP.2012 10:04:28




20 dB Bandwidth Plot on Channel 39

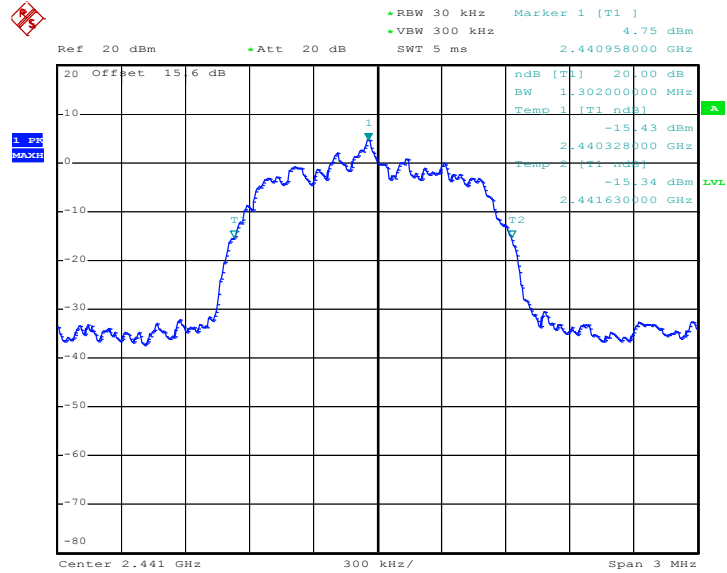

Date: 10.SEP.2012 10:04:41

20 dB Bandwidth Plot on Channel 78

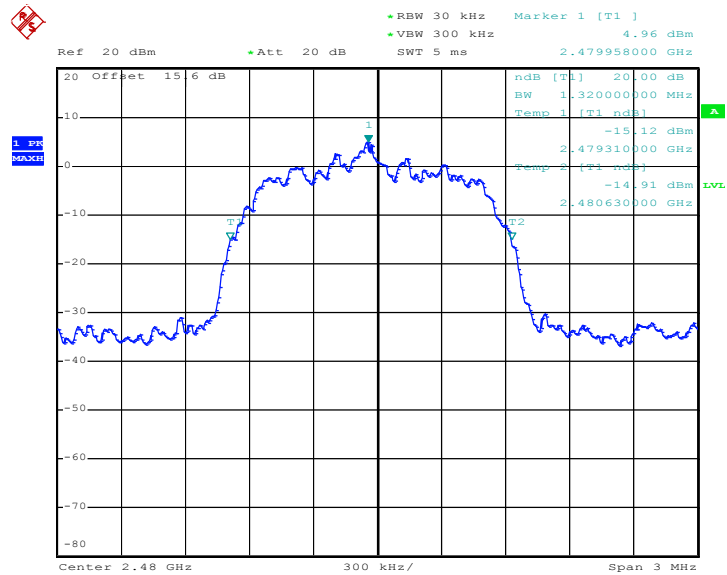


Date: 10.SEP.2012 10:04:55



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.308
39	2441	1.308
78	2480	1.302


20 dB Bandwidth Plot on Channel 00

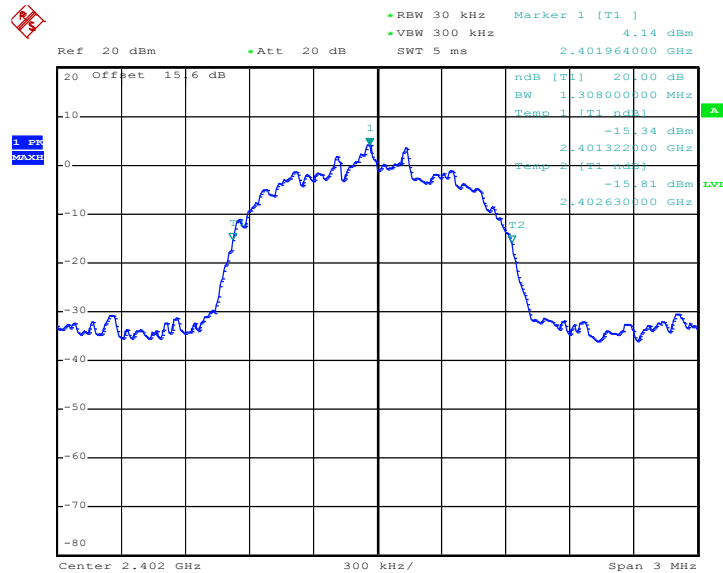

Date: 10.SEP.2012 10:05:10




20 dB Bandwidth Plot on Channel 39

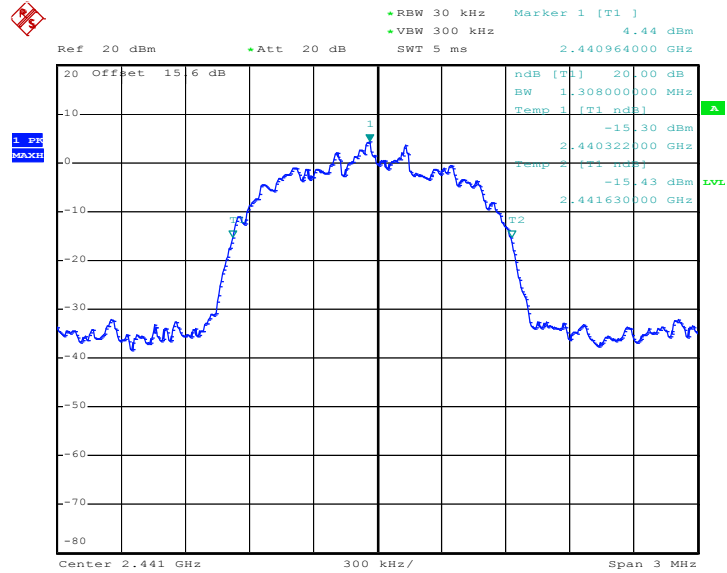

Date: 10.SEP.2012 10:05:17

20 dB Bandwidth Plot on Channel 78

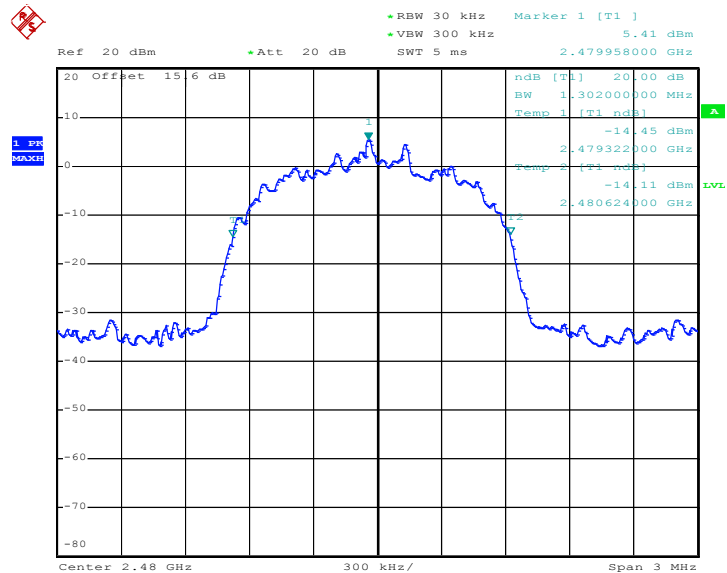

Date: 10.SEP.2012 10:05:29

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

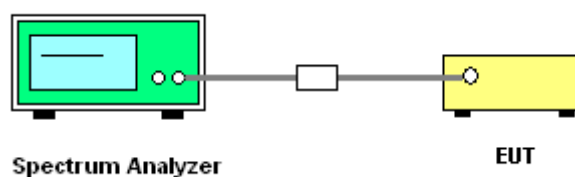




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8720	Pass
39	2441	1.002	0.8720	Pass
78	2480	1.002	0.8680	Pass


Channel Separation Plot on Channel 00 - 01

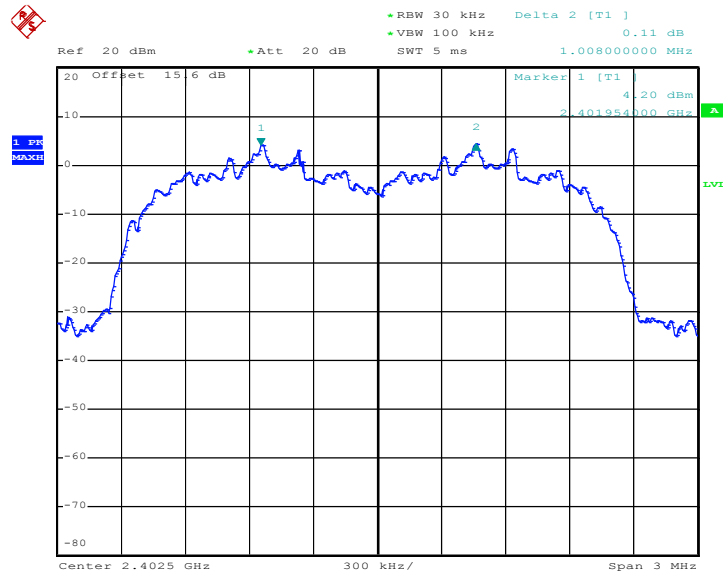

Date: 10.SEP.2012 09:58:02




Channel Separation Plot on Channel 39 - 40

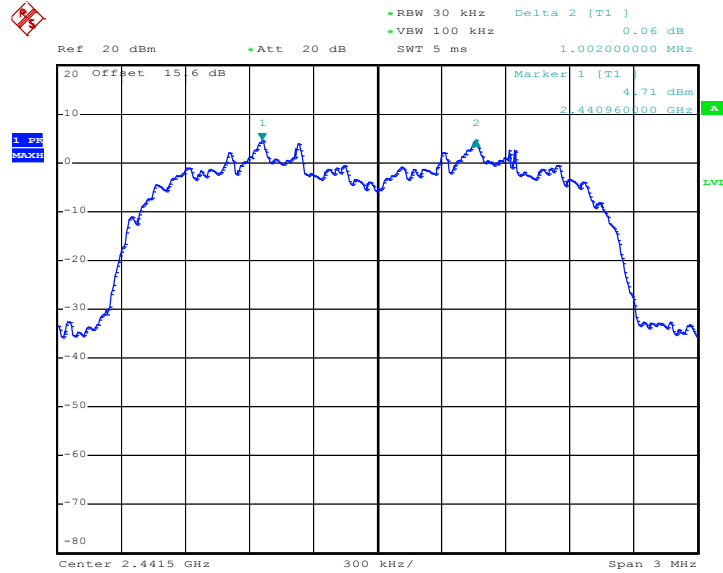

Date: 10.SEP.2012 09:58:42

Channel Separation Plot on Channel 77 - 78

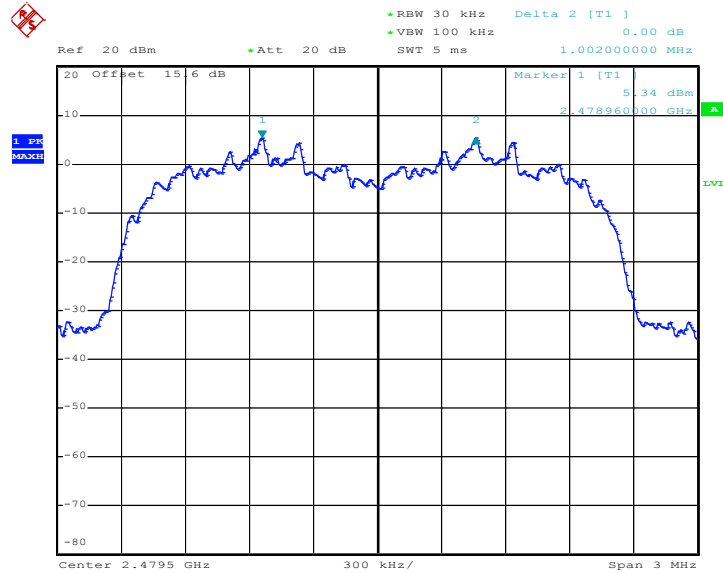

Date: 10.SEP.2012 09:59:22

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

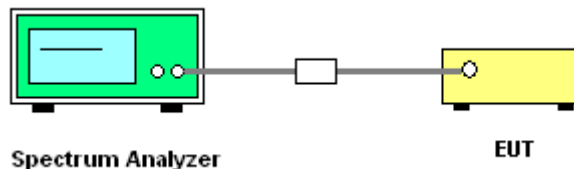

3.4.5 Test Result of Dwell Time


Test Mode :	Mode 8	Temperature :	24~26°C		
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%		
Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	3.30	2956.00	0.31	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




3DH5 Dwell Time (One Pulse) Plot on Channel 39

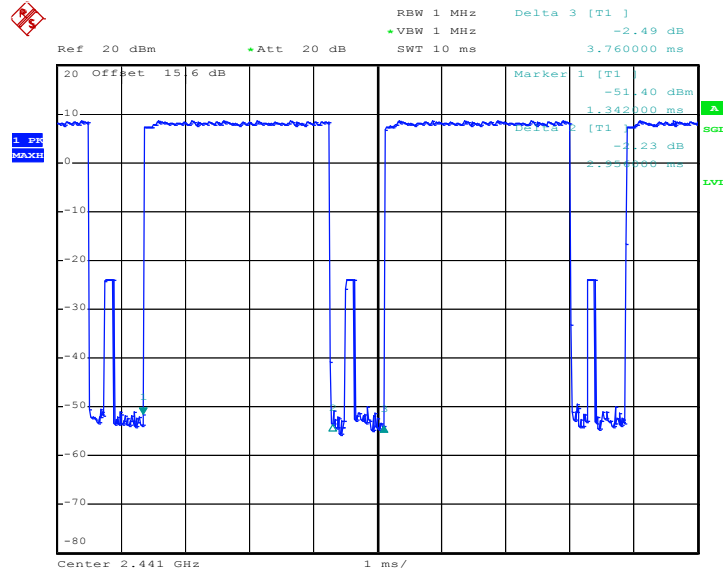

Date: 4.SEP.2012 20:20:26

3DH5 Dwell Time (Count Pulses) Plot on Channel 39

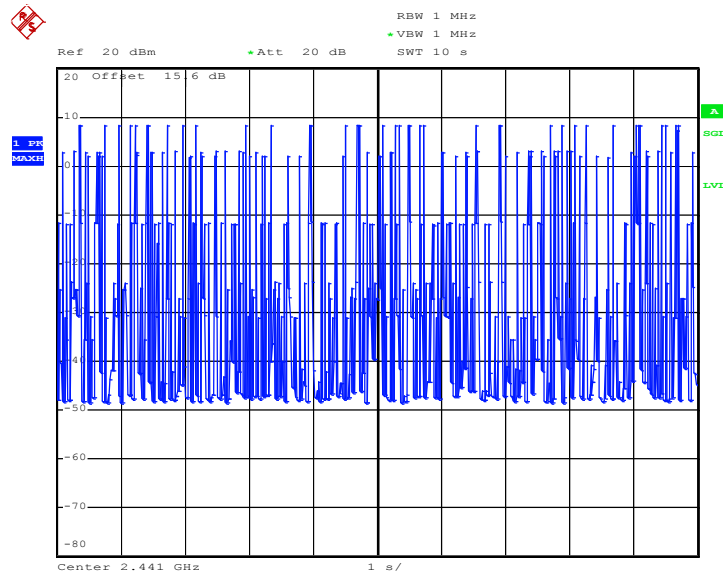

Date: 10.SEP.2012 10:01:36

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

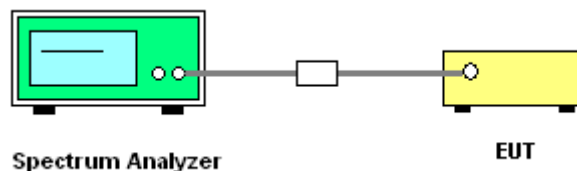


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	8.28	20.97	Pass
39	2441	9.05	20.97	Pass
78	2480	9.38	20.97	Pass




Peak Output Power Plot on Channel 00

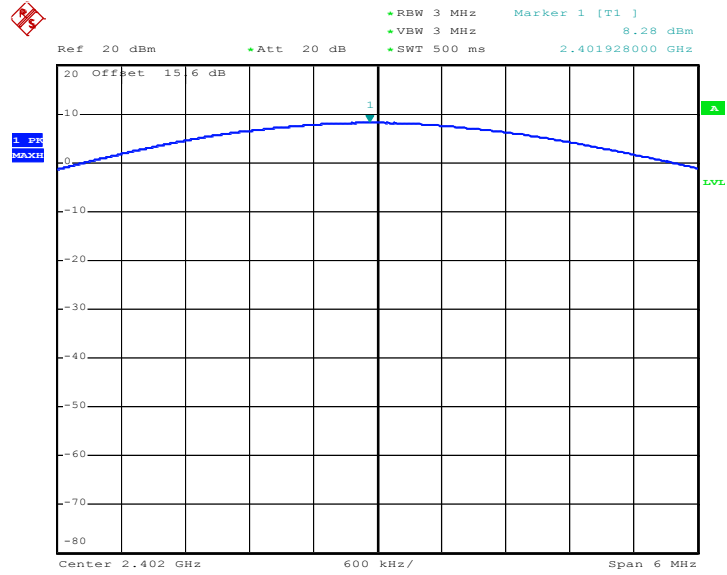

Date: 4.SEP.2012 20:11:37


Peak Output Power Plot on Channel 39

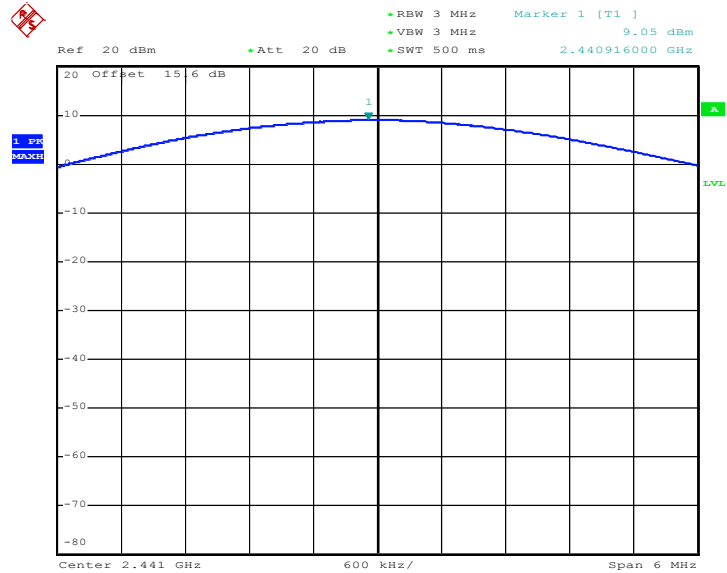

Date: 4.SEP.2012 20:12:53



Peak Output Power Plot on Channel 78

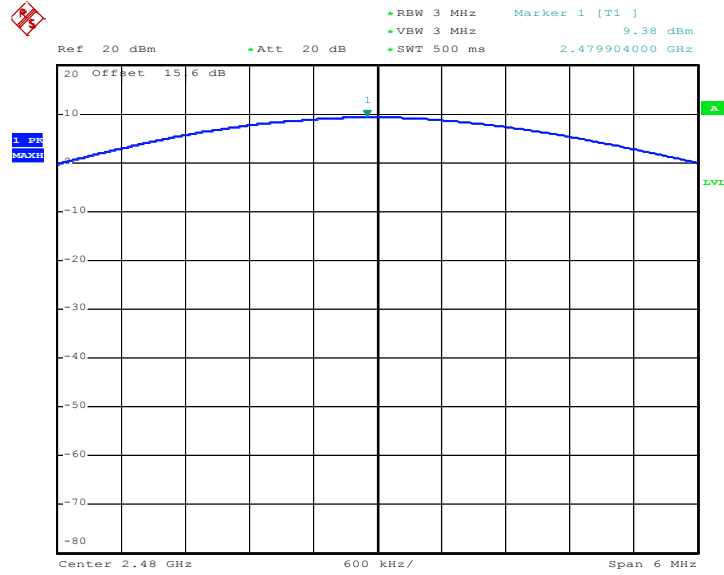

Date: 4.SEP.2012 20:14:08



3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300KHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

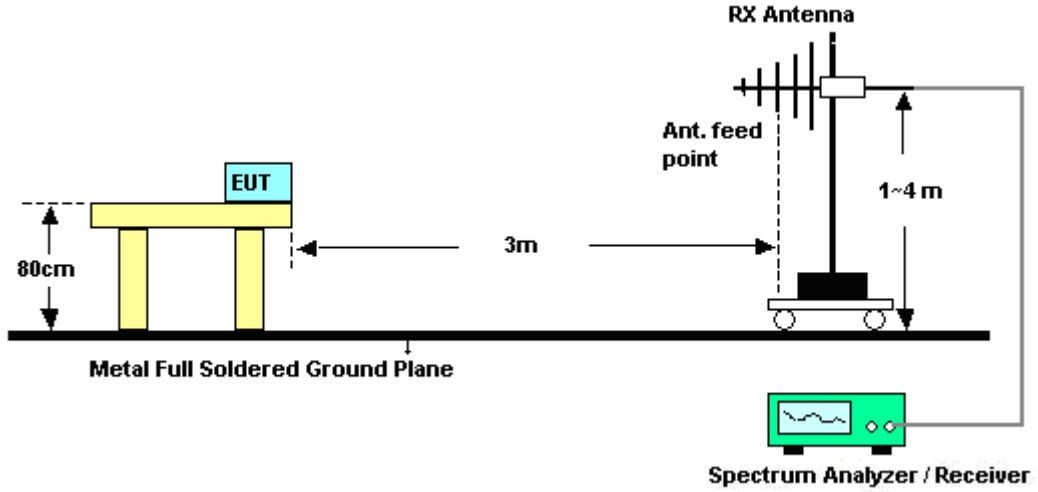


<Conducted Band Edges>

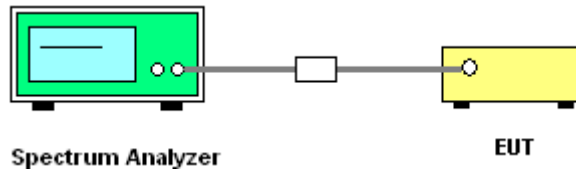


3.6.5 Duty cycle correction factor for average measurement

3DH5 on time/100ms (One Pulse) Plot on Channel 39

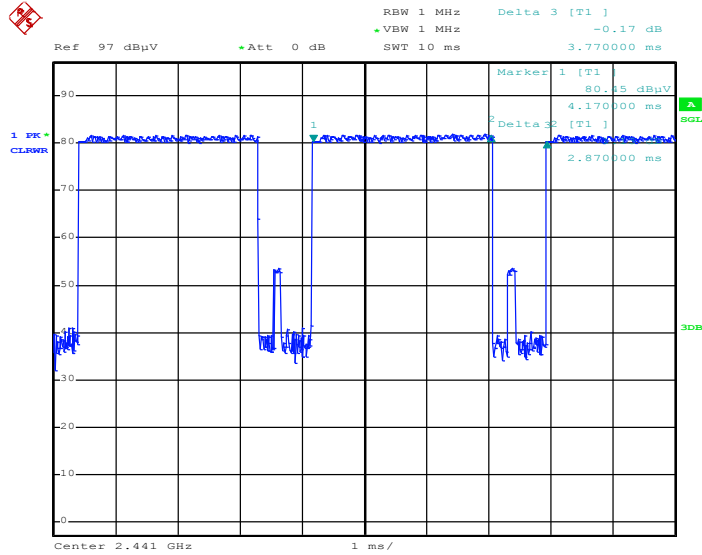

Date: 5.SEP.2012 21:35:46

3DH5 on time/100ms (Count Pulses) Plot on Channel 39

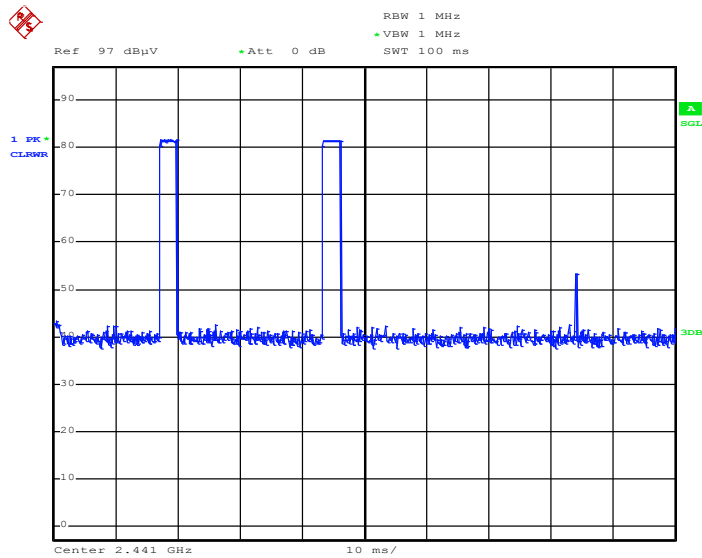

Date: 5.SEP.2012 21:41:46

Note:

1. Duty cycle = on time/100 milliseconds = $2 * 2.87 / 100 = 5.74 \%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
3. 3DH5 has the highest duty cycle and is reported.

3.6.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	54~56%
		Test Engineer :	Jacky Jia

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2337.9	57.32	-16.68	74	49.51	32.78	4.2	29.17	100	250	Peak
2337.9	32.5	-21.5	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2337.9	53.94	-20.06	74	46.13	32.78	4.2	29.17	100	120	Peak
2337.9	29.12	-24.88	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.82dB) derived from 20log (dwell time/100ms).

For example: Average level = 57.32dBuV/m – 24.82 (dB) = 32.5dBuV/m.

Test Mode :	Mode 3	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	54~56%
		Test Engineer :	Jacky Jia

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	67.12	-6.88	74	58.82	33.01	4.29	29	100	241	Peak
2483.5	42.3	-11.7	54	-	-	-	-	-	-	Average

※ 工作頻率範圍外之不必要發射落於限制頻帶 2483.5MHz 至 2500MHz 之輻射電場強度(垂直):
CH78


Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	60.59	-13.41	74	52.29	33.01	4.29	29	120	360	Peak
2483.5	35.77	-18.23	54	-	-	-	-	-	-	Average



3.6.7 Test Result of Conducted Band Edges


Test Mode :	Mode 7 and 9	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Cloud Peng

Low Band Edge Plot on Channel 00

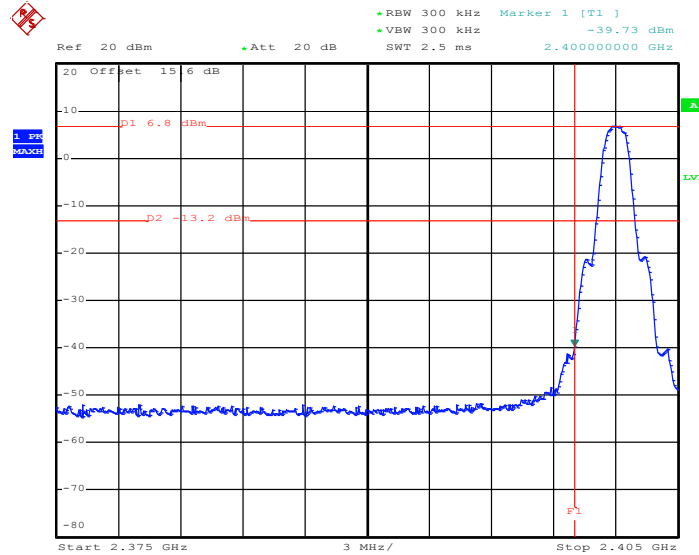

Date: 10.SEP.2012 10:10:12

High Band Edge Plot on Channel 78

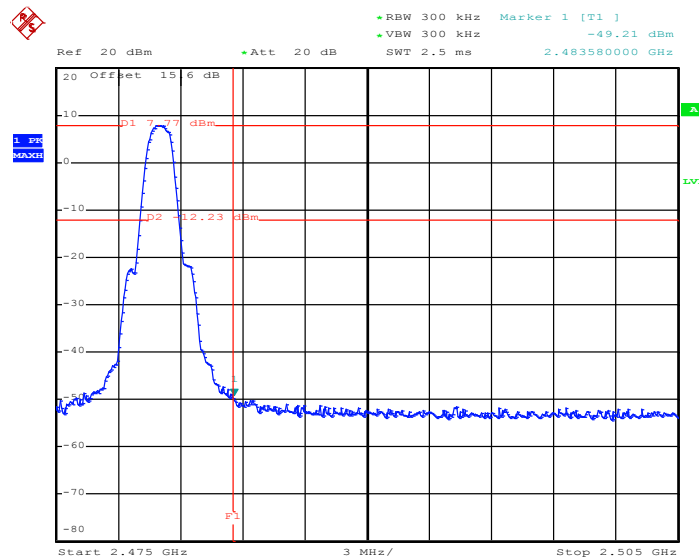


Date: 10.SEP.2012 10:11:15

3.6.8 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	Mode 7 and 9	Temperature :	24~26°C
Test Engineer :	Cloud Peng	Relative Humidity :	50~53%

Hopping Mode Low Band Edge Plot

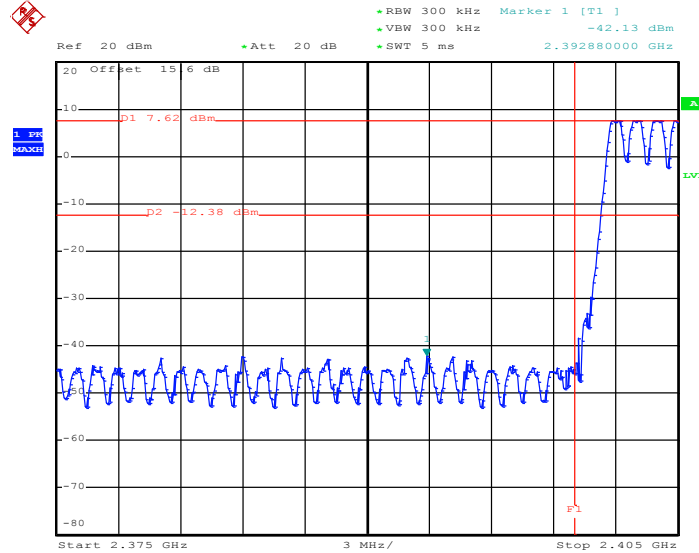

Date: 10.SEP.2012 11:15:03

Hopping Mode High Band Edge Plot

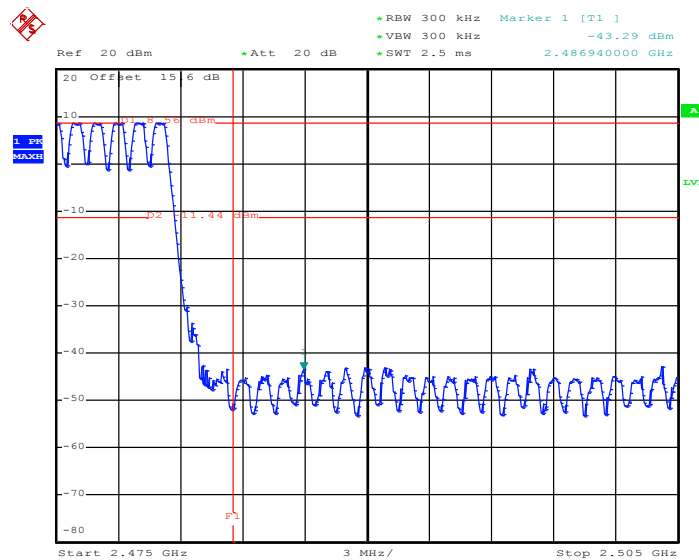

Date: 10.SEP.2012 11:13:01

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 KHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.

3.7.4 Test Setup

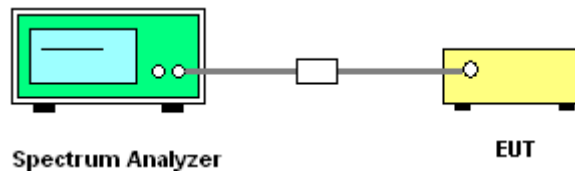




3.7.5 Test Result


Test Mode :	Mode 7	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

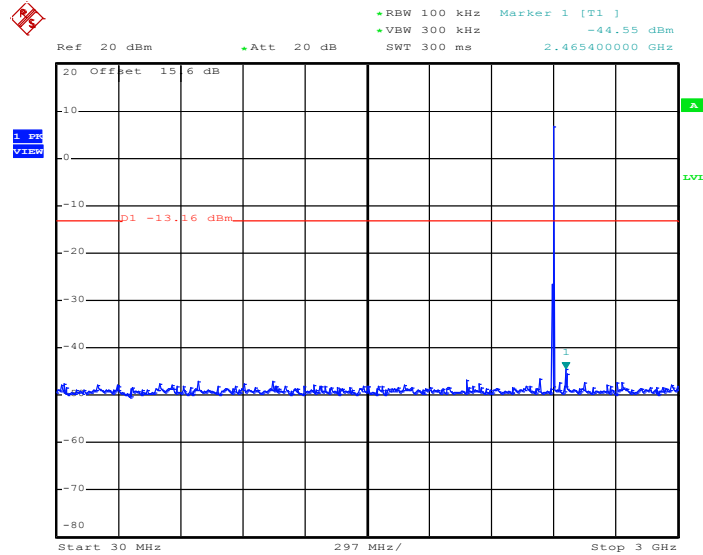

Date: 10.SEP.2012 10:17:35

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

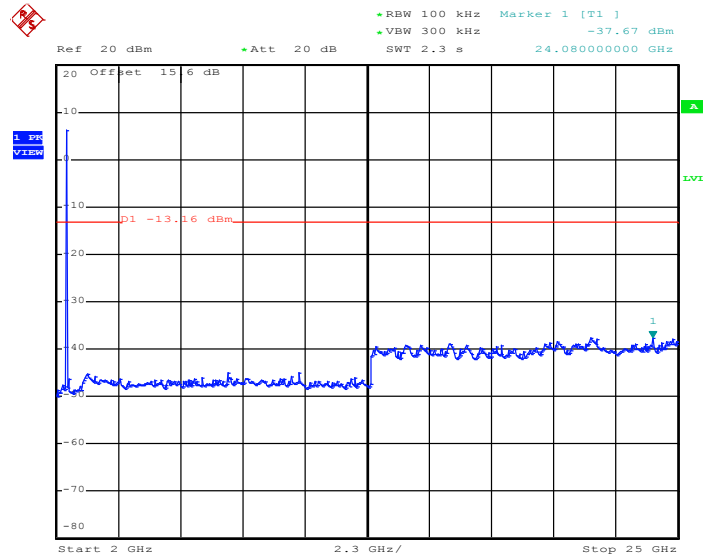


Date: 10.SEP.2012 10:36:32




Test Mode :	Mode 8	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

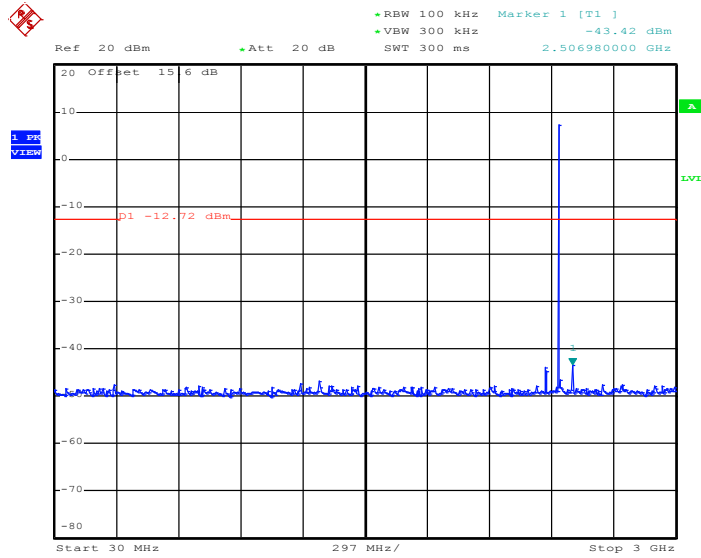

Date: 10.SEP.2012 10:18:39

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

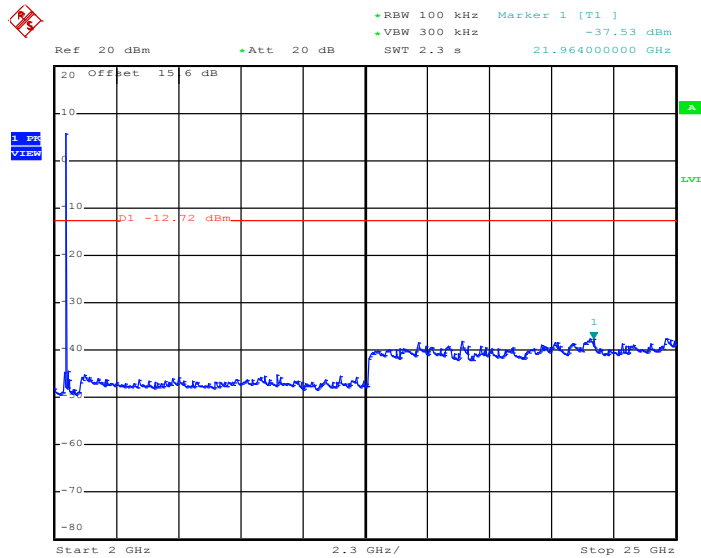


Date: 10.SEP.2012 10:38:51




Test Mode :	Mode 9	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

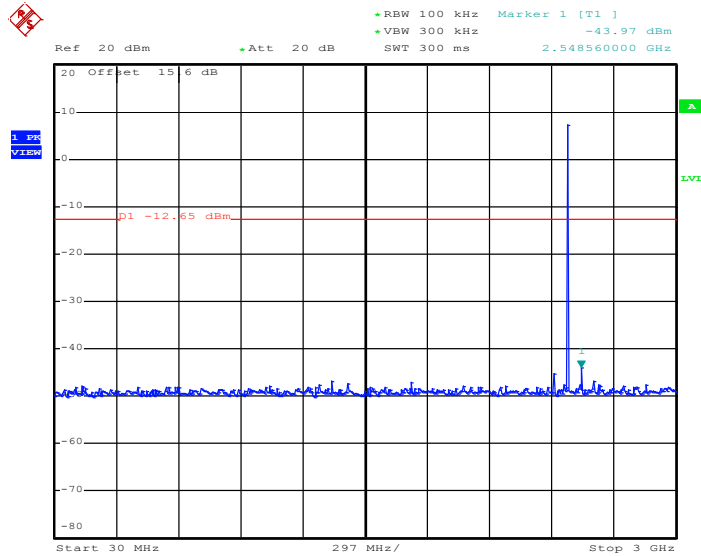

Date: 10.SEP.2012 10:19:43

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

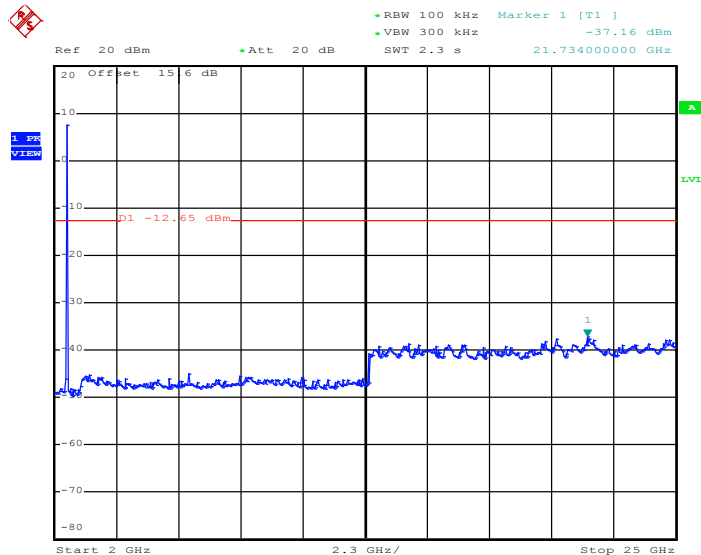

Date: 10.SEP.2012 10:41:48

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures

1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.8.4 Test Setup

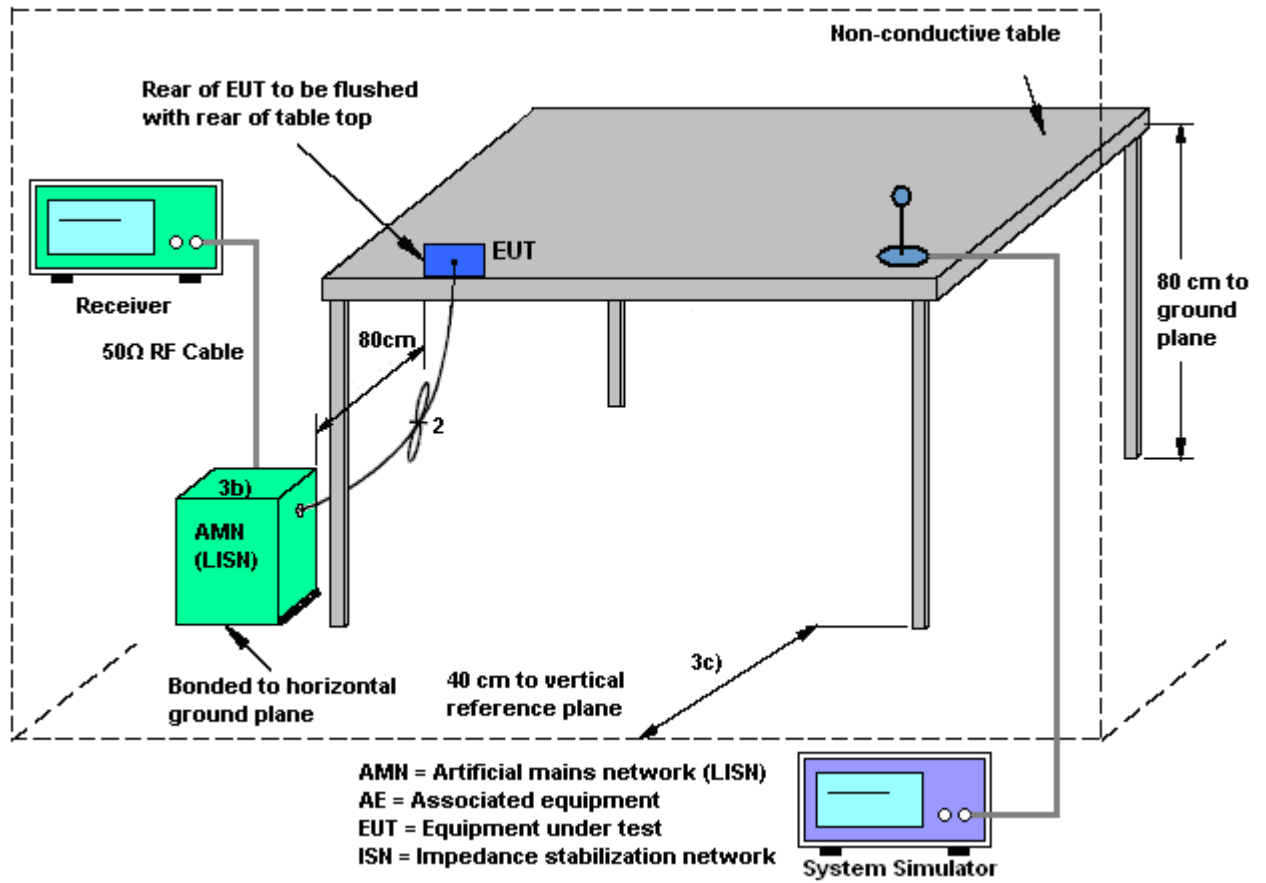



3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + MPEG4 + USB Cable (Charging from Adapter 1)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

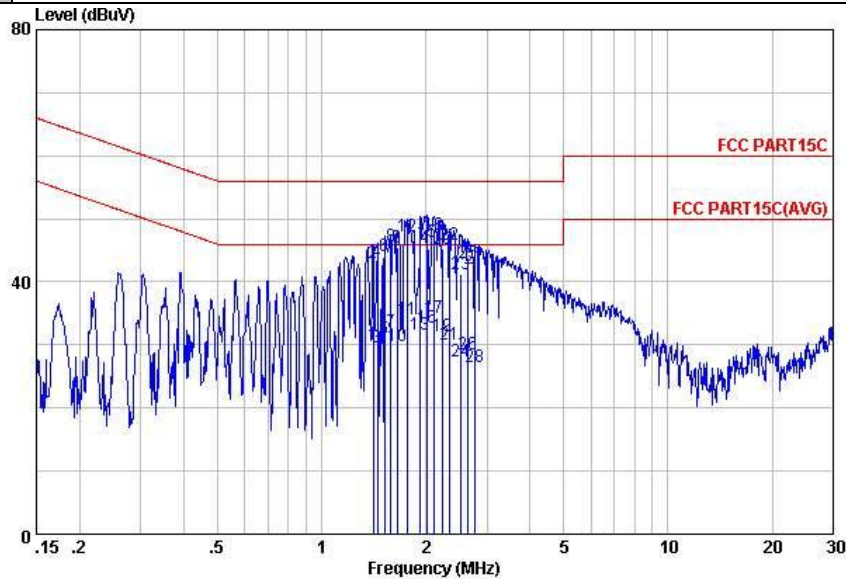


Site : C001-KS
 Condition: FCC PART15C LISN-111230 LINE
 Project : (FR) 270338
 mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	1.41	30.17	-15.83	46.00	19.60	-0.10	10.67	Average
2	1.41	43.07	-12.93	56.00	32.50	-0.10	10.67	QP
3	1.45	29.57	-16.43	46.00	19.00	-0.11	10.68	Average
4	1.45	43.17	-12.83	56.00	32.60	-0.11	10.68	QP
5	1.52	30.88	-15.12	46.00	20.31	-0.11	10.68	Average
6	1.52	44.08	-11.92	56.00	33.51	-0.11	10.68	QP
7	1.59	32.08	-13.92	46.00	21.50	-0.11	10.69	Average
8	1.59	45.68	-10.32	56.00	35.10	-0.11	10.69	QP
9	1.65	45.38	-10.62	56.00	34.80	-0.11	10.69	QP
10	1.65	29.88	-16.12	46.00	19.30	-0.11	10.69	Average
11	1.76	33.99	-12.01	46.00	23.41	-0.11	10.69	Average
12	1.76	47.29	-8.71	56.00	36.71	-0.11	10.69	QP
13	1.93	31.69	-14.31	46.00	21.10	-0.11	10.70	Average
14	1.93	45.49	-10.51	56.00	34.90	-0.11	10.70	QP
15	2.01	46.39	-9.61	56.00	35.80	-0.11	10.70	QP
16	2.01	32.79	-13.21	46.00	22.20	-0.11	10.70	Average
17	2.11	34.29	-11.71	46.00	23.69	-0.11	10.71	Average
18	2.11	47.39	-8.61	56.00	36.79	-0.11	10.71	QP
19	2.24	31.50	-14.50	46.00	20.90	-0.11	10.71	Average
20	2.24	45.20	-10.80	56.00	34.60	-0.11	10.71	QP
21	2.33	30.01	-15.99	46.00	19.40	-0.11	10.72	Average
22	2.33	45.81	-10.19	56.00	35.20	-0.11	10.72	QP
23	2.51	41.22	-14.78	56.00	30.60	-0.11	10.73	QP
24	2.51	27.42	-18.58	46.00	16.80	-0.11	10.73	Average
25	2.64	43.03	-12.97	56.00	32.40	-0.11	10.74	QP
26	2.64	28.63	-17.37	46.00	18.00	-0.11	10.74	Average
27	2.78	42.04	-13.96	56.00	31.40	-0.12	10.76	QP
28	2.78	26.44	-19.56	46.00	15.80	-0.12	10.76	Average



Test Mode :	Mode 2	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + MPEG4 + USB Cable (Charging from Adapter 1)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

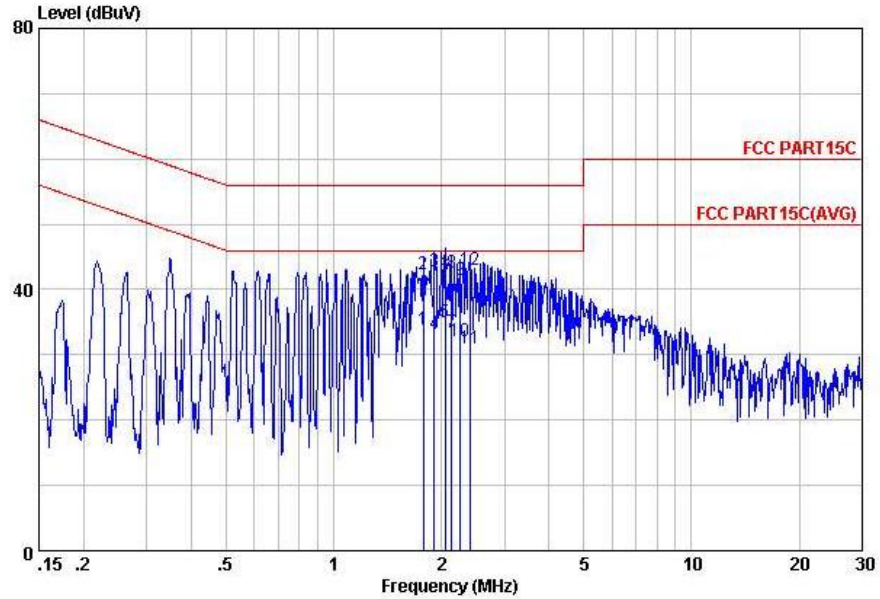

Site : C001-KS
 Condition: FCC PART15C LISN-111230 NEUTRAL
 Project : (FR) 270338
 mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	1.78	33.79	-12.21	46.00	23.21	-0.11	10.69	Average
2	1.78	42.29	-13.71	56.00	31.71	-0.11	10.69	QP
3	1.91	42.79	-13.21	56.00	32.20	-0.11	10.70	QP
4	1.91	33.19	-12.81	46.00	22.60	-0.11	10.70	Average
5	2.04	35.09	-10.91	46.00	24.50	-0.11	10.70	Average
6	2.04	42.19	-13.81	56.00	31.60	-0.11	10.70	QP
7	2.13	33.50	-12.50	46.00	22.90	-0.11	10.71	Average
8	2.13	42.50	-13.50	56.00	31.90	-0.11	10.71	QP
9	2.26	41.40	-14.60	56.00	30.80	-0.11	10.71	QP
10	2.26	32.10	-13.90	46.00	21.50	-0.11	10.71	Average
11	2.40	30.91	-15.09	46.00	20.30	-0.11	10.72	Average
12	2.40	43.11	-12.89	56.00	32.50	-0.11	10.72	QP

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 KHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m

3.9.4 Test Setup


For radiated emissions below 30MHz

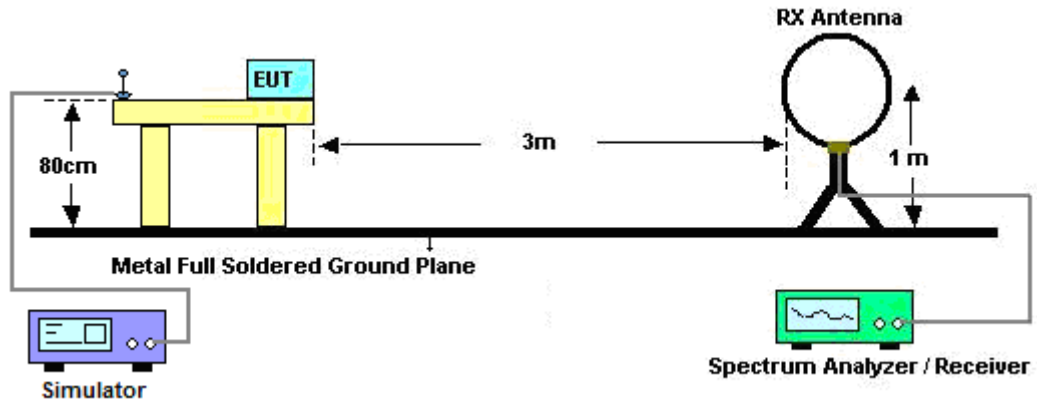

For radiated emissions from 30MHz to 1GHz

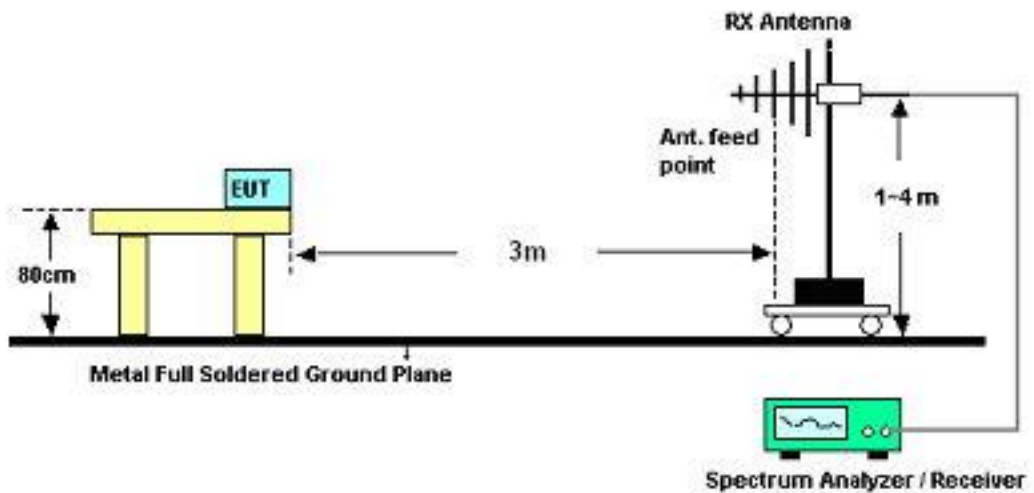

For radiated emissions above 1GHz

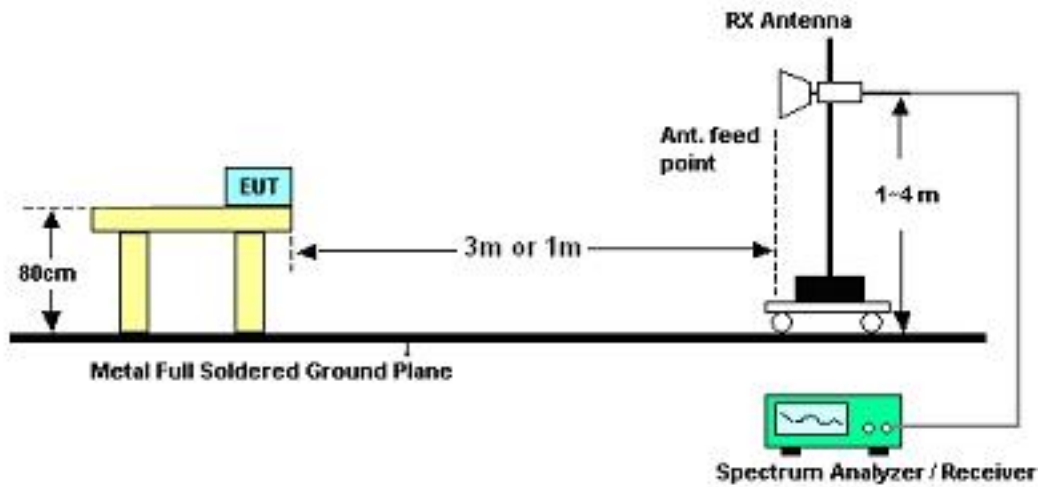


3.9.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.9.6 Duty cycle correction factor for average measurement

3DH5 on time/100ms (One Pulse) Plot on Channel 39

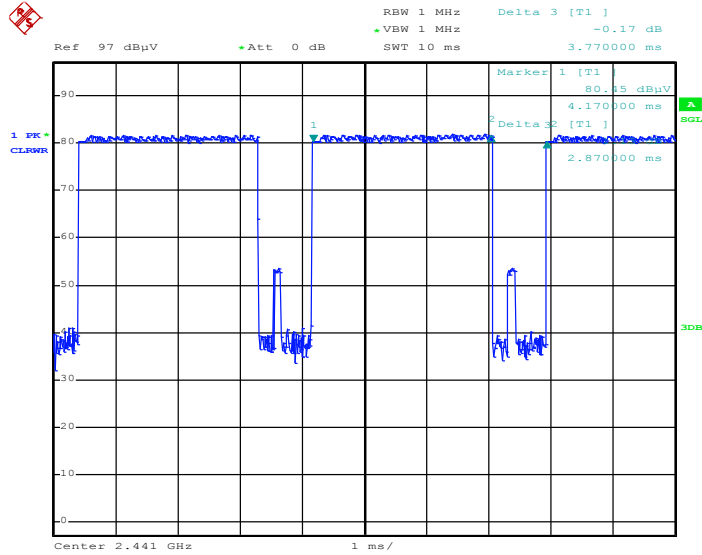

Date: 5.SEP.2012 21:35:46

3DH5 on time/100ms (Count Pulses) Plot on Channel 39

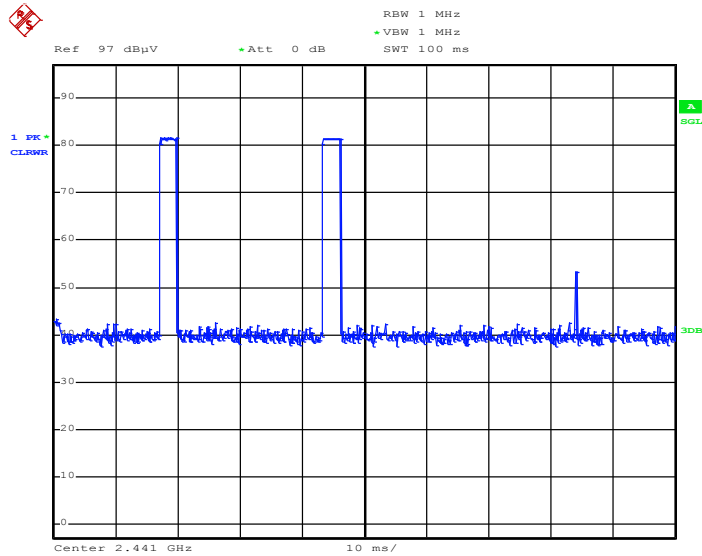

Date: 5.SEP.2012 21:41:46

Note:

4. Duty cycle = on time/100 milliseconds = $2 * 2.87 / 100 = 5.74 \%$
5. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
6. 3DH5 has the highest duty cycle and is reported.



3.9.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	54~56%
Test Engineer :	Jacky Jia	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
64.208	23.3	-16.7	40	47.88	5.22	0.32	30.12	-	-	Peak
202.1	23.1	-20.4	43.5	43.44	9.08	0.59	30.01	-	-	Peak
227.691	23.05	-22.95	46	41.58	10.75	0.64	29.92	-	-	Peak
312.179	21.77	-24.23	46	37.68	13.3	0.74	29.95	-	-	Peak
821.71	28.61	-17.39	46	36.86	20.11	1.26	29.62	-	-	Peak
942.131	31.84	-14.16	46	39.34	20.7	1.33	29.53	100	263	Peak
2402	110.26	-	-	77.4	32.86	0	0	117	51	Peak
2402	85.44	-	-	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.82dB) derived from 20log (dwell time/100ms).

For example: Average level = 102.56dBuV/m – 24.82 (dB) = 5.74dBuV/m.



Test Mode :	Mode 1	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	54~56%
Test Engineer :	Jacky Jia	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
39.437	28.63	-11.37	40	46.1	12.3	0.25	30.02	-	-	Peak
64.208	29.23	-10.77	40	53.81	5.22	0.32	30.12	100	95	Peak
88.652	20.13	-23.37	43.5	41.45	8.3	0.38	30	-	-	Peak
101.289	24.49	-19.01	43.5	43.42	10.62	0.41	29.96	-	-	Peak
135.032	22.29	-21.21	43.5	40.5	11.3	0.48	29.99	-	-	Peak
903.309	32.22	-13.78	46	39.94	20.46	1.3	29.48	-	-	Peak
2402	103.41	-	-	70.55	32.86	0	0	105	62	Peak
2402	78.59	-	-	-	-	-	-	-	-	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	54~56%
Test Engineer :	Jacky Jia	Polarization :	Horizontal
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
63.759	23.52	-16.48	40	48.1	5.22	0.32	30.12	-	-	Peak
109.796	18.4	-25.1	43.5	36.14	11.8	0.43	29.97	-	-	Peak
202.1	22.81	-20.69	43.5	43.15	9.08	0.59	30.01	-	-	Peak
227.691	23.67	-22.33	46	42.2	10.75	0.64	29.92	-	-	Peak
316.589	21.64	-24.36	46	37.42	13.42	0.75	29.95	-	-	Peak
903.309	32.31	-13.69	46	40.03	20.46	1.3	29.48	100	56	Peak
2441	111.56	-	-	78.61	32.95	0	0	110	263	Peak
2441	86.74	-	-	-	-	-	-	-	-	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	54~56%
Test Engineer :	Jacky Jia	Polarization :	Vertical
Remark :	1. 2441 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.071	20.71	-19.29	40	33.25	17.29	0.25	30.08			Peak
36.637	20.01	-19.99	40	35.65	14.19	0.24	30.07			Peak
66.266	29.18	-10.82	40	53.73	5.22	0.33	30.1	100	281	Peak
102.36	22.59	-20.91	43.5	41.26	10.87	0.42	29.96			Peak
209.313	18.21	-25.29	43.5	38.17	9.44	0.6	30			Peak
945.44	30.9	-15.1	46	38.4	20.71	1.33	29.54			Peak
2441	104.38	-	-	96.21	32.95	4.25	29.03	105	301	Peak
2441	79.56	-	-	-	-	-	-	-	-	Average



Test Mode :	Mode 3	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	54~56%
Test Engineer :	Jacky Jia	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.562	19.37	-20.63	40	33.67	15.56	0.23	30.09	-	-	Peak
63.536	23.29	-16.71	40	47.87	5.22	0.32	30.12	-	-	Peak
109.029	19.43	-24.07	43.5	37.28	11.68	0.43	29.96	-	-	Peak
227.691	24.53	-21.47	46	43.06	10.75	0.64	29.92	-	-	Peak
307.831	21.77	-24.23	46	37.82	13.17	0.73	29.95	-	-	Peak
942.131	31.27	-14.73	46	38.77	20.7	1.33	29.53	100	21	Peak
2480	109.84	-	-	102.02	33.01	4.9	30.09	116	242	Peak
2480	85.02	-	-	-	-	-	-	-	-	Average



Test Mode :	Mode 3	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	54~56%
Test Engineer :	Jacky Jia	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.766	20.69	-19.31	40	36.33	14.19	0.24	30.07	-	-	Peak
65.573	29.16	-10.84	40	53.71	5.22	0.33	30.1	10	151	Peak
88.964	21.72	-21.78	43.5	42.71	8.61	0.39	29.99	-	-	Peak
105.642	21.84	-21.66	43.5	40.09	11.29	0.42	29.96	-	-	Peak
821.71	27.29	-18.71	46	35.54	20.11	1.26	29.62	-	-	Peak
942.131	31.13	-14.87	46	38.63	20.7	1.33	29.53	-	-	Peak
2480	103.7	-	-	95.88	33.01	4.9	30.09	112	123	Peak
2480	78.88	-	-	-	-	-	-	-	-	Average



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Sep. 04, 2012 ~ Sep. 10, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Sep. 04, 2012 ~ Sep. 10, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Sep. 04, 2012 ~ Sep. 10, 2012	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GW INSTRON	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Sep. 04, 2012 ~ Sep. 10, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Sep. 04, 2012 ~ Sep. 10, 2012	Aug. 16, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESC17	100768	9kHz~7GHz	Jun. 01, 2012	Sep. 10, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 30, 2011	Sep. 10, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 30, 2011	Sep. 10, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	N/A	Nov. 16, 2011	Sep. 10, 2012	Nov. 15, 2012	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	GSM/GPRS850/900/1800/1900,	Dec. 30, 2011	Sep. 10, 2012	Dec. 29, 2012	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Sep. 13, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Sep. 13, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Sep. 13, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Sep. 13, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060029	9KHz~2GHz	Jan. 06, 2012	Sep. 13, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	Sep. 13, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Sep. 13, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 07, 2011	Sep. 13, 2012	Nov. 06, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15-40GHz	Oct. 11, 2011	Sep. 13, 2012	Oct. 10, 2012	Radiation (03CH01-KS)
Bluetooth Base Station	R&S	CBT	100783	N/A	Aug. 17, 2012	Sep. 13, 2012	Aug. 16, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Sep. 13, 2012	Jul. 02, 2014	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		



Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				