



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC PART 15.407 (UNII)

Applicant Name:
Motorola Mobility LLC
8000 West Sunrise Blvd.
Plantation, FL 33322
United States

Date of Testing:
03/22 - 03/26/2013
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1304240712.IHD

FCC ID:	IHDT56PB2
APPLICANT:	Motorola Mobility LLC

Application Type: Certification
EUT Type: Portable Handset
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
Test Procedure(s): KDB 789033 v01r03

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power	
				Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	35.98	15.56
802.11n	1	20	5180 - 5240	36.31	15.60
802.11n	1	40	5190 - 5230	26.30	14.20
802.11ac	1	80	5210	27.10	14.33

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 1 of 44

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST		6
3.1 EVALUATION PROCEDURE.....		6
3.2 AC LINE CONDUCTED EMISSIONS.....		6
3.3 RADIATED EMISSIONS		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS		10
6.1 SUMMARY.....		10
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC.....		11
6.3 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC		17
6.4 PEAK POWER SPECTRAL DENSITY – 802.11A/N/AC.....		20
6.5 PEAK EXCURSION RATIO – 802.11A/N/AC.....		26
6.6 FREQUENCY STABILITY.....		30
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		31
6.8 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW).....		36
6.9 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW).....		38
6.10 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW).....		40
6.11 LINE-CONDUCTED TEST DATA.....		42
7.0 CONCLUSION		44

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 2 of 44



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Motorola Mobility LLC

APPLICANT ADDRESS: 8000 West Sunrise Blvd.
Plantation, FL 33322, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

FCC ID: IHDT56PB2

Test Device Serial No.: LXAA1W0004 Production Pre-Production Engineering

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)


DATE(S) OF TEST: 03/22 - 03/26/2013



TEST REPORT S/N: 0Y1304240712.IHD

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 3 of 44	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.



1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.



Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 4 of 44

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Portable Handset FCC ID: IHDT56PB2**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

The test data shown in this report is re-used from a previously certified device (FCC ID: IHDT56PB1) whose circuitry is electrically identical.

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A (BC10, BC0, BC1), 850/1900 GSM/GPRS, 850/1900 WCDMA/HSPA, Band 25 LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), NFC

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11a/n 20MHz Bandwidth – 99.54%
- 802.11n 40MHz Bandwidth – 99.45%
- 802.11ac 80MHz Bandwidth – 98.05%

2.3 Test Configuration

The Motorola Portable Handset FCC ID: IHDT56PB2 was tested per the guidance of KDB 789033. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.



2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 5 of 44

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 were used in the measurement of **Motorola Portable Handset FCC ID: IHDT56PB2**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 6 of 44	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 7 of 44	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Motorola Portable Handset FCC ID: IHDT56PB2** unit complies with the requirement of §15.203.

Band 1

Ch.	Frequency (MHz)
36	5180
40	5200
44	5220
48	5240

Table 4-1. 802.11a / 802.11n (20MHz BW) Frequency / Channel Operations

Band 1



Ch.	Frequency (MHz)
38	5190
46	5230

Table 4-2. 802.11n (40MHz BW) Frequency / Channel Operations

Band 1

Ch.	Frequency (MHz)
42	5210

Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations



FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 8 of 44

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	4/13/2012	Annual	4/13/2013	N/A
-	WL40-1	Conducted Cable Set (40GHz)	1/29/2013	Annual	1/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	5/10/2012	Annual	5/10/2013	121034
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	3/1/2013	Annual	3/1/2014	251425001
K & L	6000/T18000	High Pass Filter	3/4/2013	Annual	3/4/2014	1
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	6/6/2012	Annual	6/6/2013	100037
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 9 of 44	

6.0 TEST RESULTS

6.1 Summary



Company Name: Motorola Mobility LLC
 FCC ID: IHDT56PB2
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
29.3/32.5Mbps, 58.5/65Mbps, 87.8/97.5Mbps, 117/130Mbps, 175.5/195Mbps,
234/260Mbps, 263.3/292.5Mbps, 292.5/325Mbps, 351/390Mbps, 390/433.3Mbps
(ac – 80MHz BW)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
N/A	RSS-210 [A9.2]	26dB Bandwidth [FCC] Occupied Bandwidth [IC]	N/A	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2]	Maximum Conducted Output Power	< 4 + 10log ₁₀ (BW) dBm (5150-5250MHz) [FCC]		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) [FCC] < 10dBm/MHz (5150-5250) [IC]		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(g)	N/A	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	RSS-210 [A9.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b)(1), (2),(3)	RSS-210 [A9.2]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz)	RADIATED	PASS	Section 6.7
15.205, 15.407(b)(1), (5), (6)	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Sections 6.8, 6.9, 6.10
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 6.11

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 2.0.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 10 of 44	

6.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 v01r03 – Section D

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



Figure 6-1. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 11 of 44	


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	21.78
	5200	40	a	6	22.32
	5240	48	a	6	22.22
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	22.76
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	22.11
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	22.15
	5190	38	n (40MHz)	13.5/15 (MCS0)	43.44
	5230	46	n (40MHz)	13.5/15 (MCS0)	43.51
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	85.65

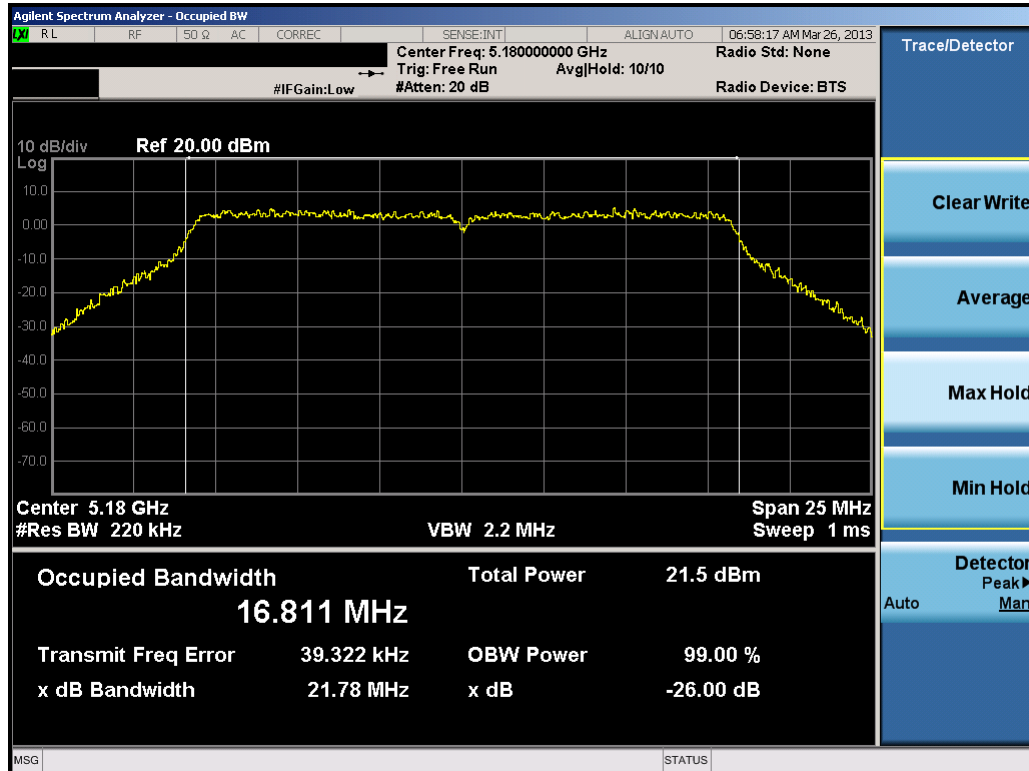Table 6-2. Conducted Bandwidth Measurements




Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 12 of 44

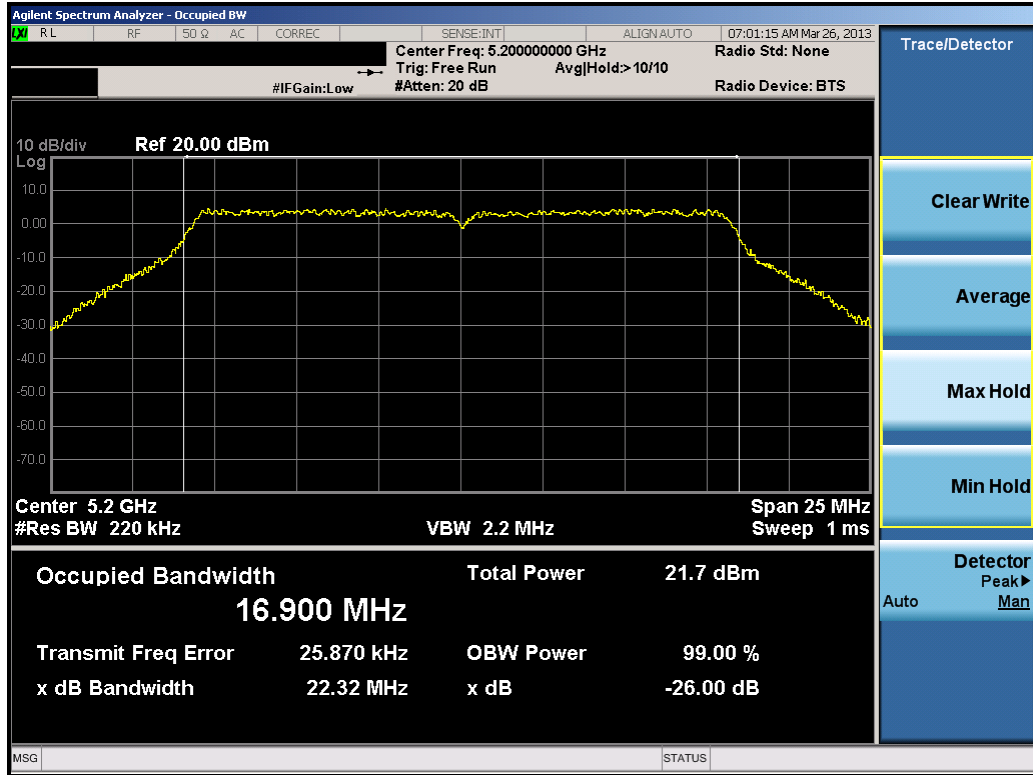


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

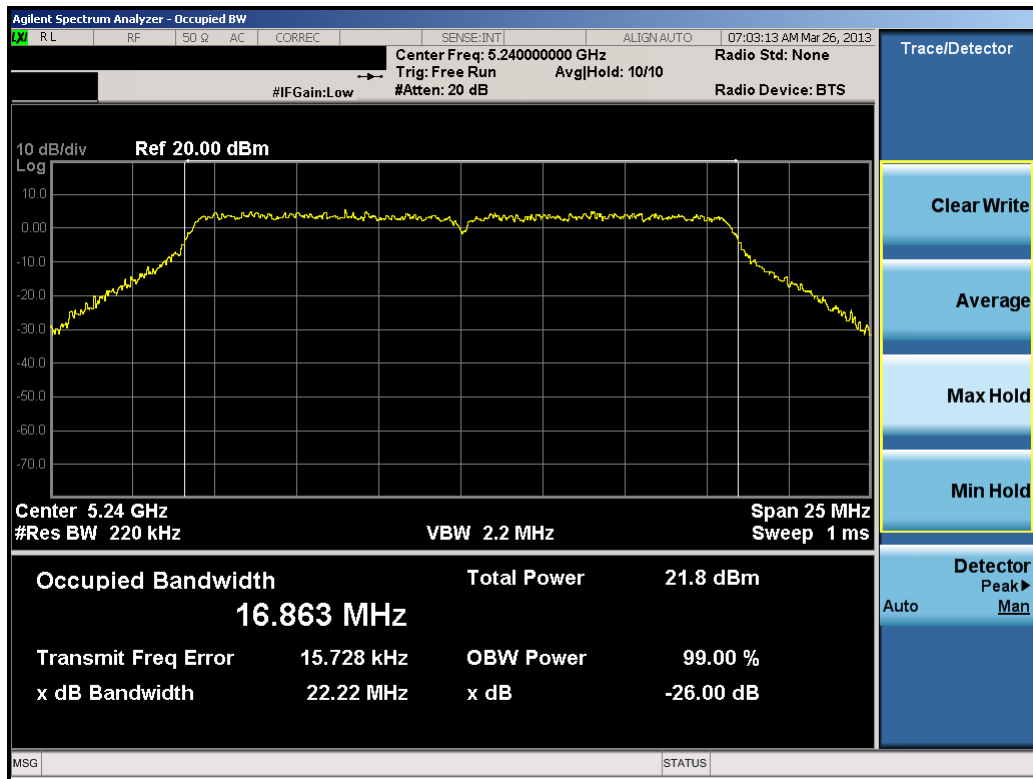


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 13 of 44

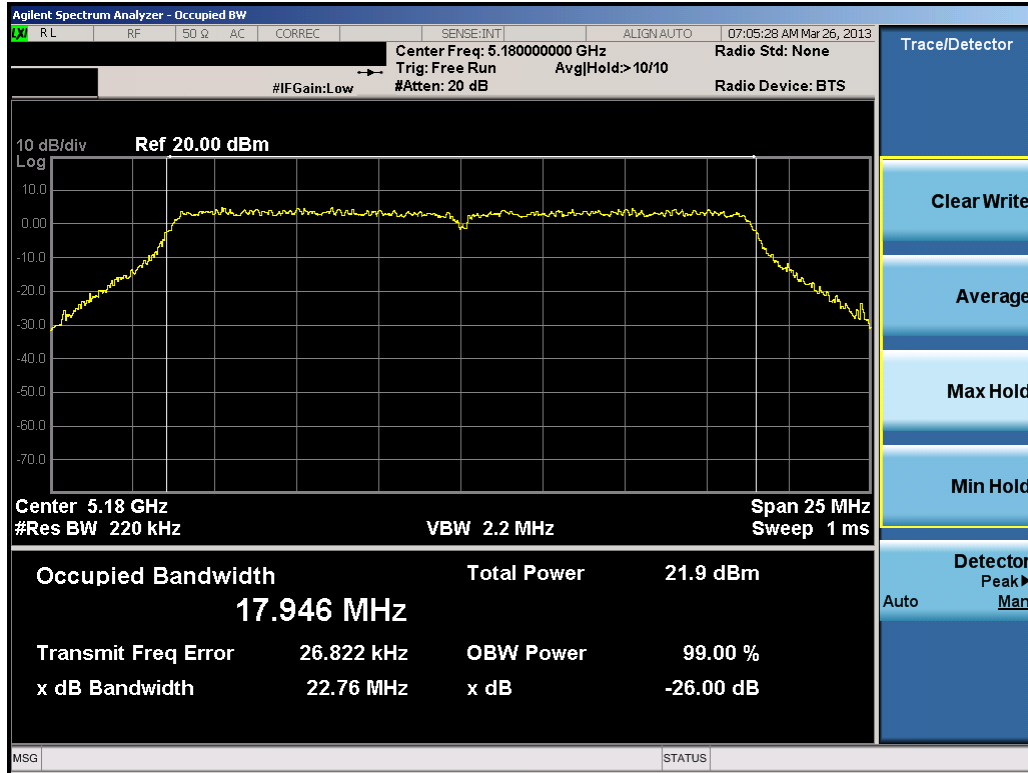


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

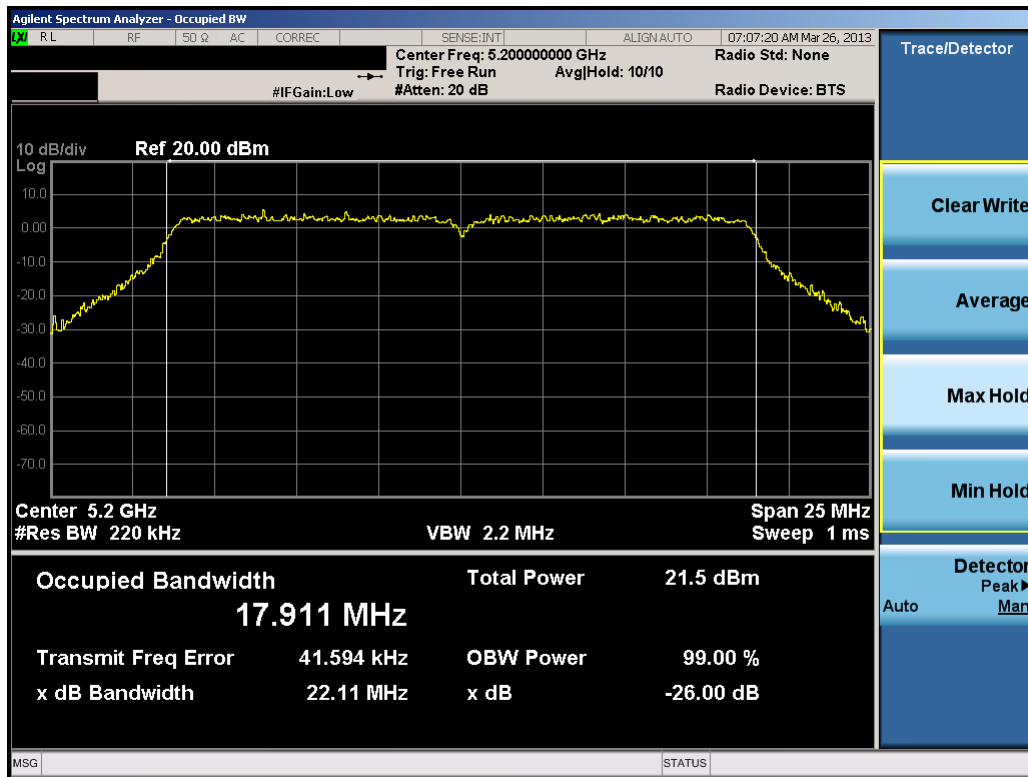


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 14 of 44

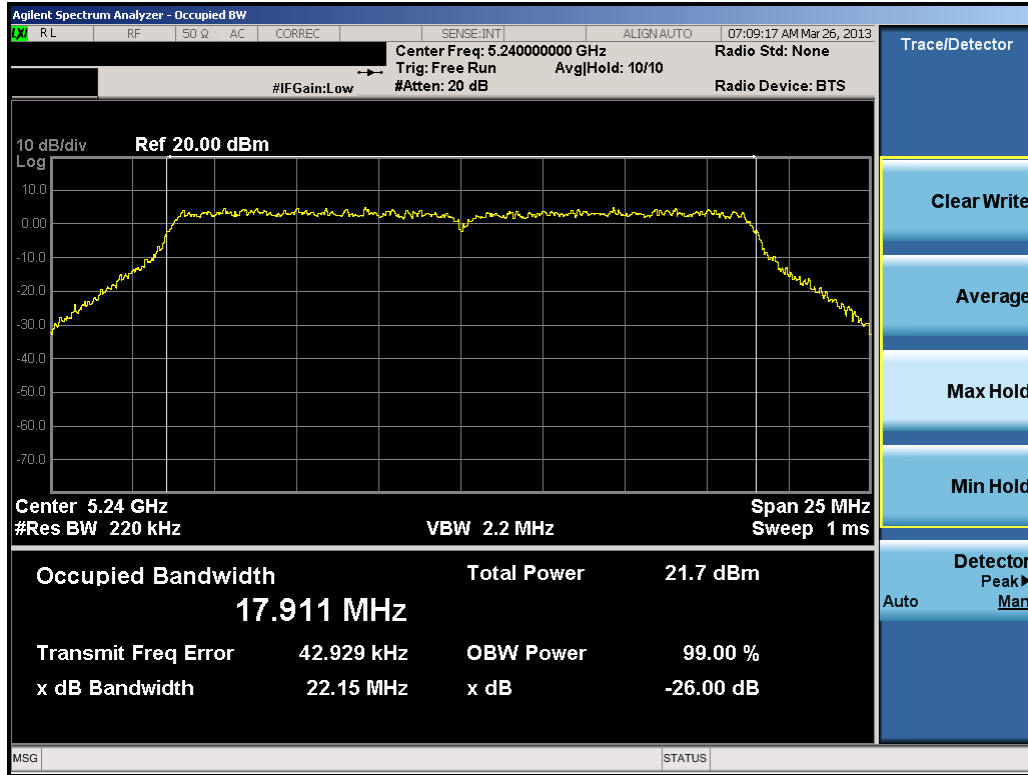


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

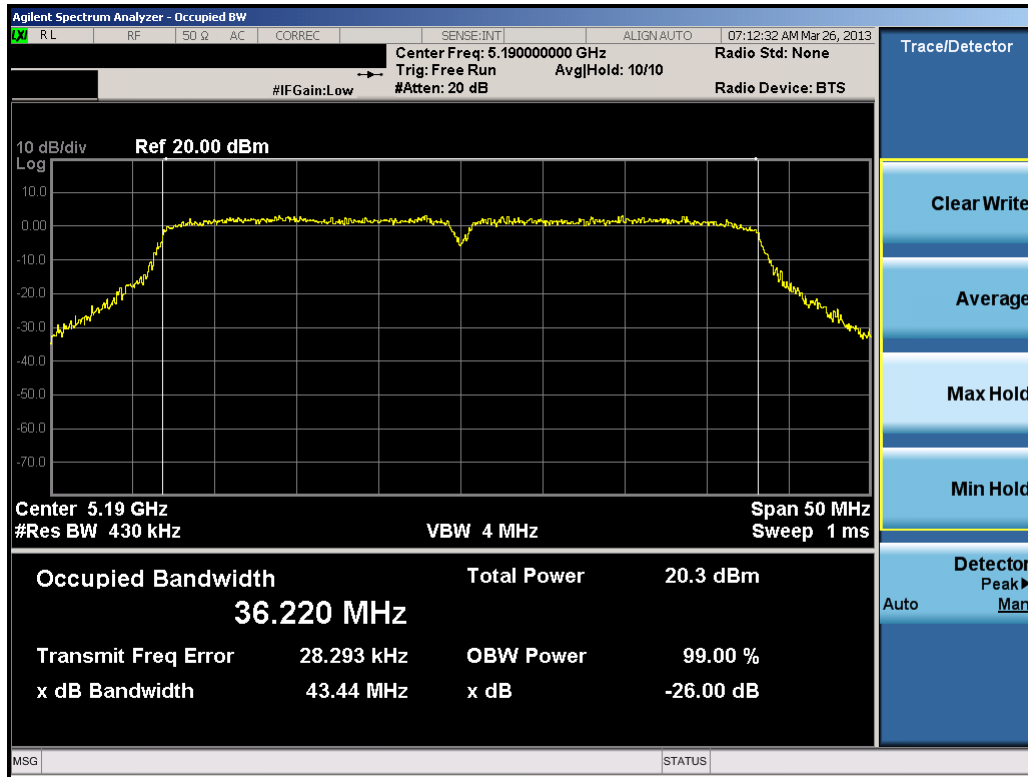


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 15 of 44

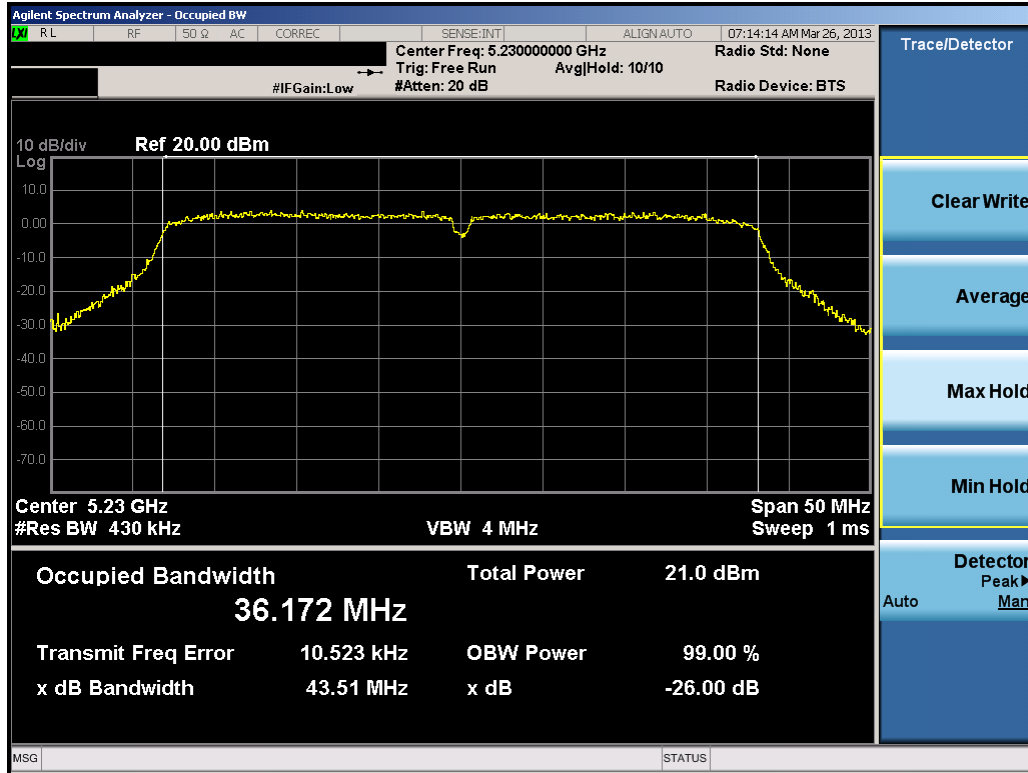

Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

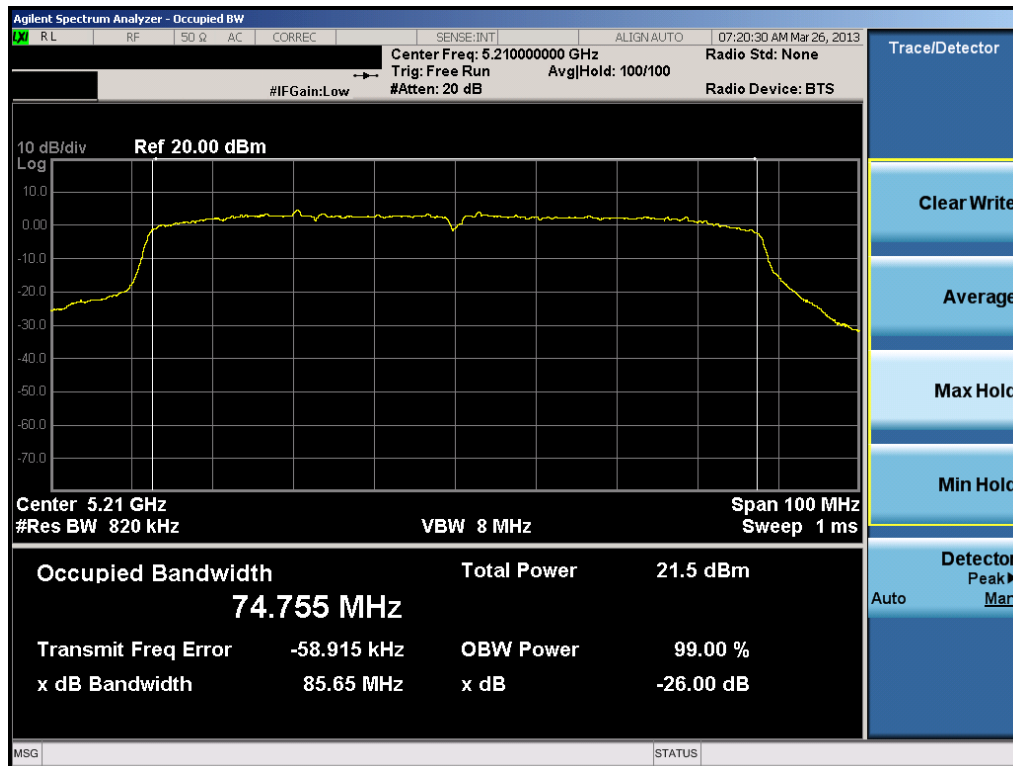

Plot 6-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 16 of 44

6.3 UNII Output Power Measurement – 802.11a/n/ac §15.407 (a)(1); RSS-210 [A9.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and $4\text{ dBm} + 10\log_{10}(26\text{dB BW}) = 4\text{ dBm} + 10\log_{10}(21.78) = 17.38\text{dBm}$.

Test Procedure Used

KDB 789033 v01r03 – Section E)3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

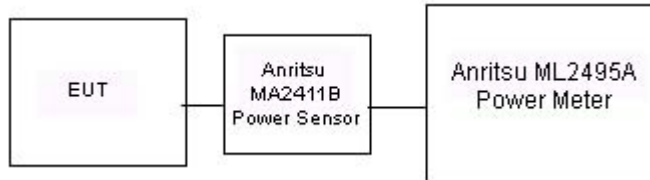




Figure 6-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 17 of 44	

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5180	36	AVG	15.56	15.55	15.54	15.52	15.50	15.51	15.49	15.47
802.11a	5200	40	AVG	15.35	15.33	15.34	15.31	15.31	15.32	15.30	15.31
802.11a	5220	44	AVG	15.48	15.47	15.45	15.49	15.46	15.45	15.43	15.47
802.11a	5240	48	AVG	15.52	15.48	15.47	15.50	15.49	15.45	15.41	15.43

Table 6-3. 802.11a (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				7.2	14.4	21.7	28.9	43.3	57.8	65.0	72.2
802.11n	5180	36	AVG	15.59	15.56	15.55	15.60	15.59	15.58	15.55	15.57
802.11n	5200	40	AVG	15.31	15.28	15.35	15.35	15.30	15.30	15.31	15.26
802.11n	5220	44	AVG	15.43	15.44	15.40	15.49	15.44	15.48	15.44	15.47
802.11n	5240	48	AVG	15.49	15.50	15.47	15.46	15.53	15.43	15.41	15.40

Table 6-4. 20MHz BW 802.11n (UNII - 400ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0
802.11n	5180	36	AVG	15.57	15.52	15.51	15.52	15.53	15.56	15.46	15.52
802.11n	5200	40	AVG	15.32	15.29	15.37	15.32	15.27	15.32	15.31	15.28
802.11n	5220	44	AVG	15.52	15.44	15.49	15.47	15.50	15.44	15.42	15.48
802.11n	5240	48	AVG	15.55	15.46	15.45	15.46	15.48	15.46	15.43	15.38

Table 6-5. 20MHz BW 802.11n (UNII - 800ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				7.2	14.4	21.7	28.9	43.3	57.8	65.0	72.2	MCS8
802.11ac	5180	36	AVG	15.41	15.43	15.40	15.42	15.46	15.45	15.41	15.42	15.40
802.11ac	5200	40	AVG	15.46	15.40	15.48	15.49	15.50	15.52	15.44	15.42	15.43
802.11ac	5220	44	AVG	15.48	15.44	15.48	15.48	15.55	15.50	15.41	15.49	15.46
802.11ac	5240	48	AVG	15.41	15.41	15.37	15.42	15.53	15.46	15.45	15.46	15.46



Table 6-6. 20MHz BW 802.11ac (UNII - 400ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0	MCS8
802.11ac	5180	36	AVG	15.59	15.58	15.69	15.65	15.61	15.74	15.44	15.59	14.58
802.11ac	5200	40	AVG	15.29	15.41	15.48	15.46	15.42	15.48	15.32	15.32	14.26
802.11ac	5220	44	AVG	15.37	15.43	15.54	15.55	15.52	15.63	15.38	15.49	14.51
802.11ac	5240	48	AVG	15.54	15.57	15.65	15.59	15.57	15.72	15.42	15.47	14.49

Table 6-7. 20MHz BW 802.11ac (UNII - 800ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0
802.11n	5190	38	AVG	14.18	14.16	14.14	14.15	14.16	14.16	14.15	14.17
802.11n	5230	46	AVG	14.17	14.14	14.15	14.17	14.15	14.18	14.13	14.16

Table 6-8. 40MHz BW 802.11n (UNII - 400ns GI) Maximum Conducted Output Power

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 18 of 44

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0	
802.11n	5190	38	AVG	14.15	14.20	14.16	14.19	14.19	14.16	14.15	14.16	
802.11n	5230	46	AVG	14.20	14.14	14.14	14.13	14.19	14.16	14.17	14.12	

Table 6-9. 40MHz BW 802.11n (UNII – 800ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0	MCS8	MCS9
802.11ac	5190	38	AVG	14.01	13.94	13.91	13.92	13.82	13.85	13.90	13.89	13.02	12.01
802.11ac	5230	46	AVG	13.99	13.97	13.94	13.93	13.90	13.89	13.89	13.87	13.05	11.99

Table 6-10. 40MHz BW 802.11ac (UNII – 400ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0	MCS8	MCS9
802.11ac	5190	38	AVG	14.11	14.17	14.06	14.03	13.93	14.05	13.91	13.99	13.19	12.17
802.11ac	5230	46	AVG	13.99	14.08	14.03	14.01	13.98	14.04	13.97	13.95	13.23	12.21



Table 6-11. 40MHz BW 802.11ac (UNII – 800ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				32.5	65	97.5	130	195	260	292.5	325	390	433.3
802.11ac	5210	42	AVG	14.25	14.28	14.27	14.31	14.30	14.26	14.28	14.29	14.25	12.28

Table 6-12. 80MHz BW 802.11ac (UNII – 400ns GI) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5210	42	AVG	14.33	14.29	14.32	14.30	14.28	14.31	14.30	14.28	14.29	12.47

Table 6-13. 80MHz BW 802.11ac (UNII – 800ns GI) Maximum Conducted Output Power

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 19 of 44	

6.4 Peak Power Spectral Density – 802.11a/n/ac §15.407 (a)(1),(5) / RSS-210 [A9.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033, was used to measure the power spectral density.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

KDB 789033 v01r03 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run since the EUT was operating at a duty cycle $\geq 98\%$
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-3. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 20 of 44	


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	3.763	4.0	-0.24
	5200	40	a	6	3.286	4.0	-0.71
	5240	48	a	6	3.658	4.0	-0.34
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	3.289	4.0	-0.71
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.968	4.0	-1.03
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	3.334	4.0	-0.67
	5190	38	n (40MHz)	13.5/15 (MCS0)	-0.720	4.0	-4.72
	5230	46	n (40MHz)	13.5/15 (MCS0)	-0.414	4.0	-4.41
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.005	4.0	-7.01

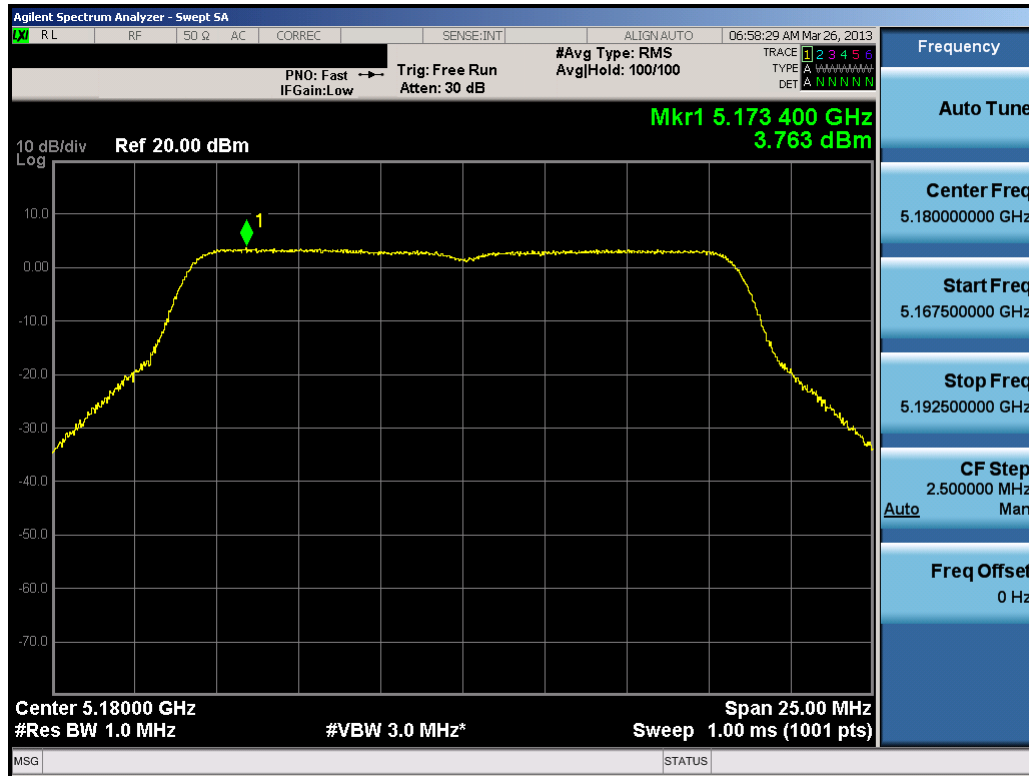Table 6-14. Conducted Power Spectral Density Measurements




Plot 6-10. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 21 of 44

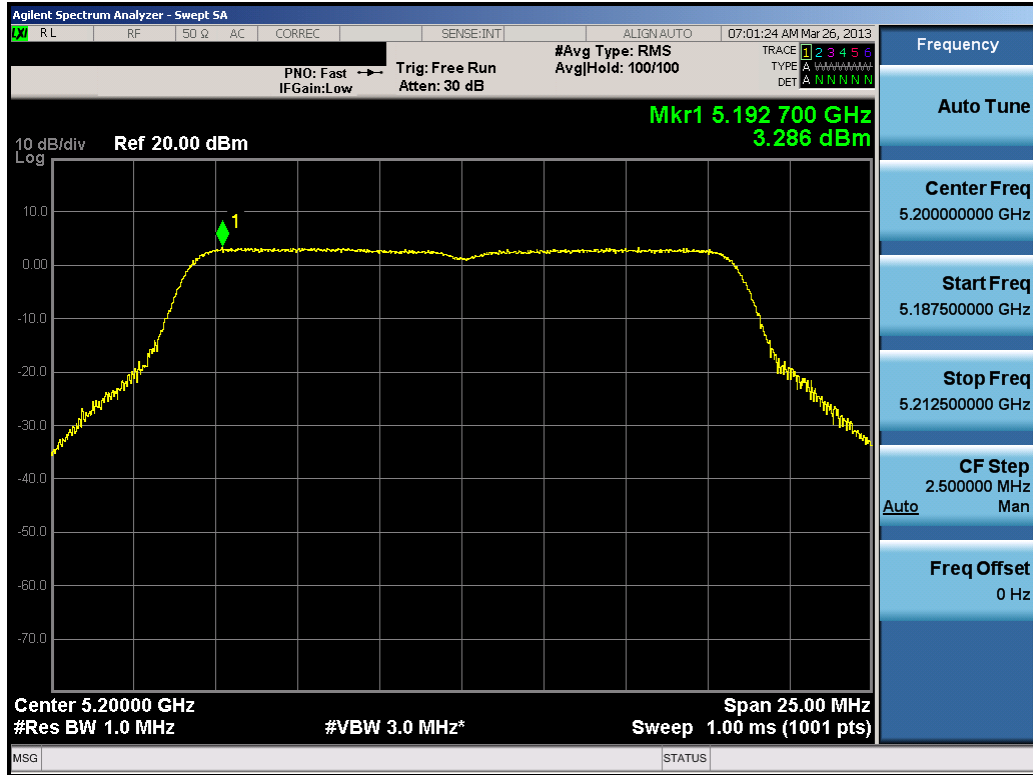


Plot 6-11. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

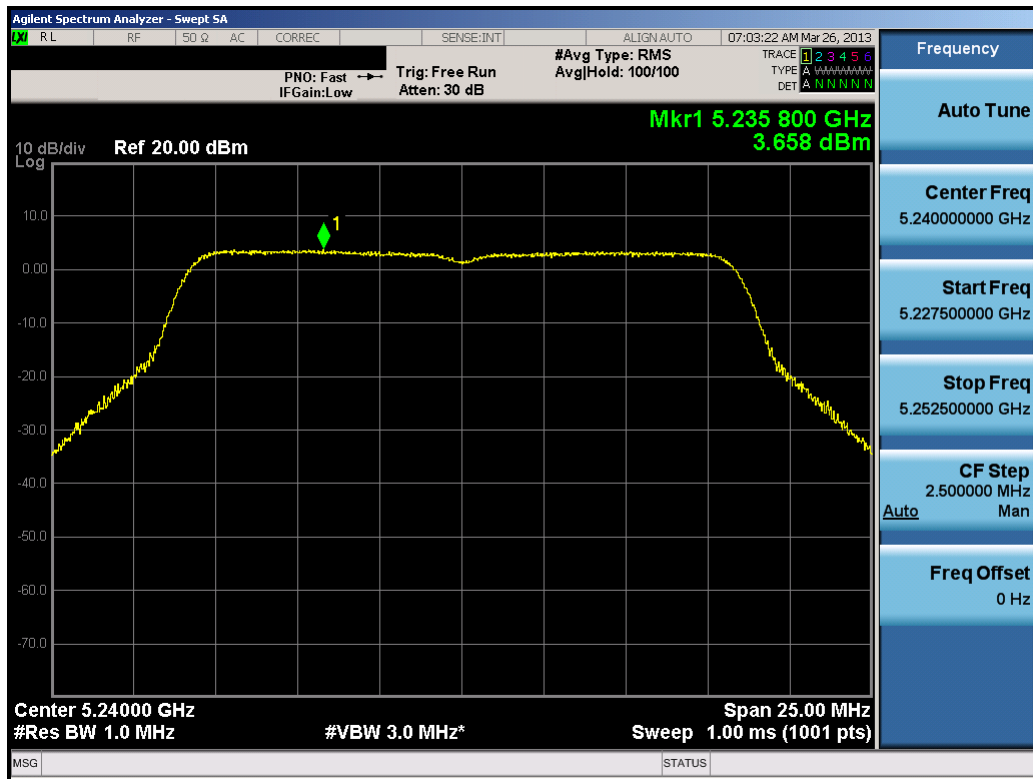


Plot 6-12. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 22 of 44

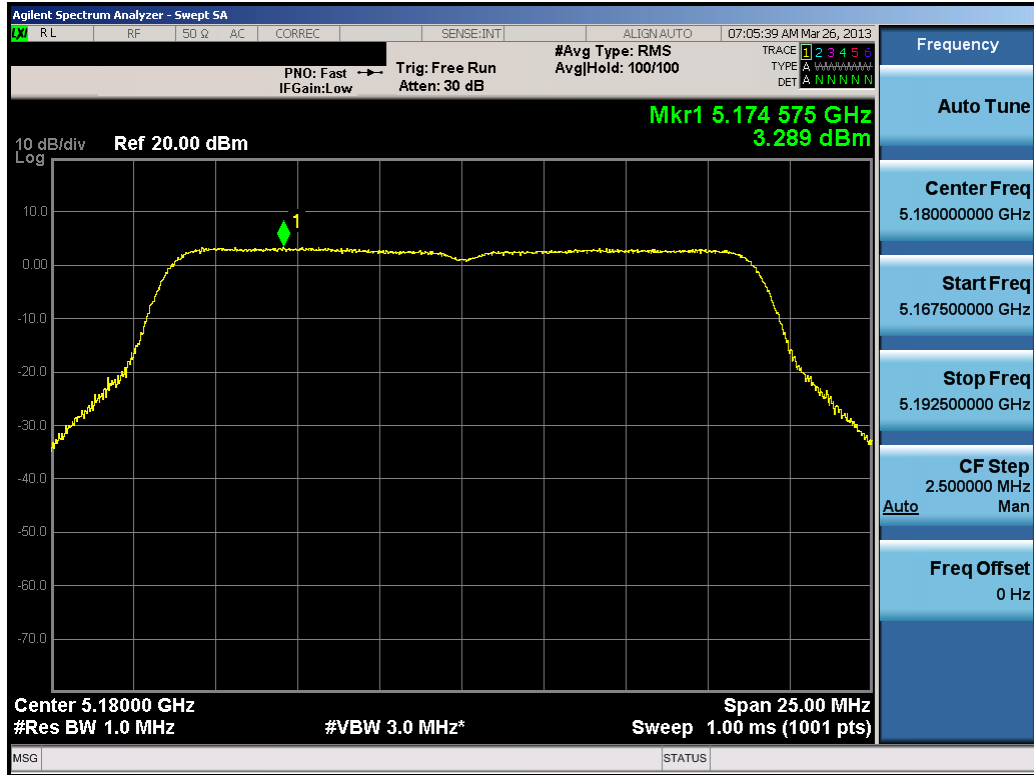


Plot 6-13. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

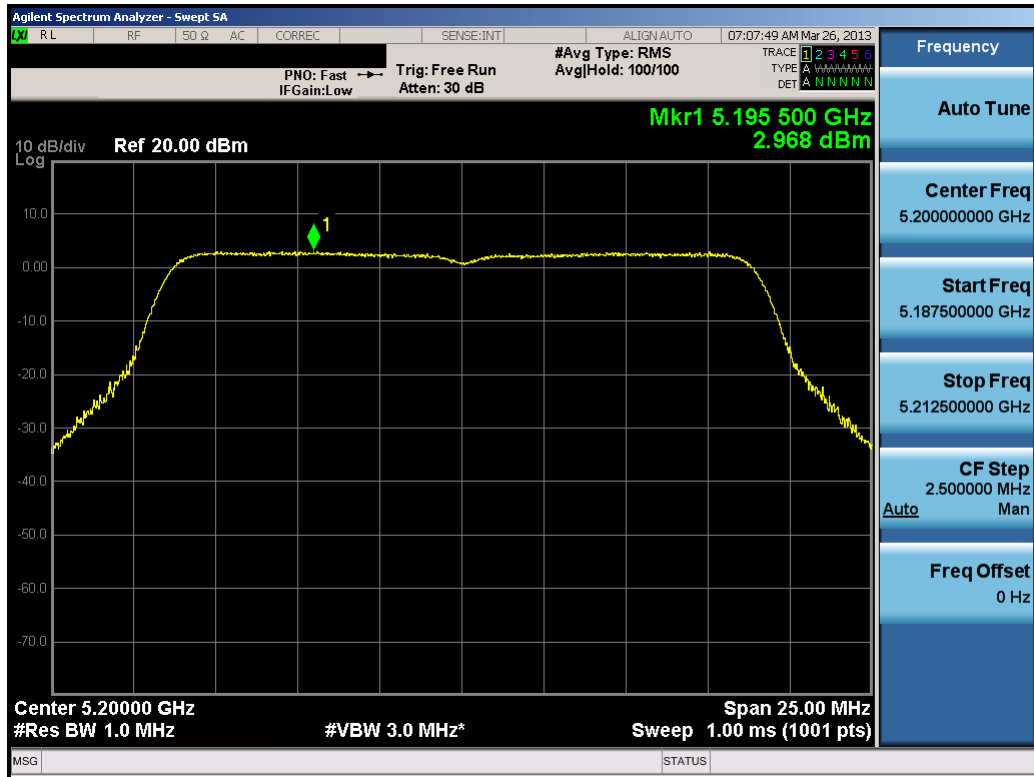


Plot 6-14. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 23 of 44

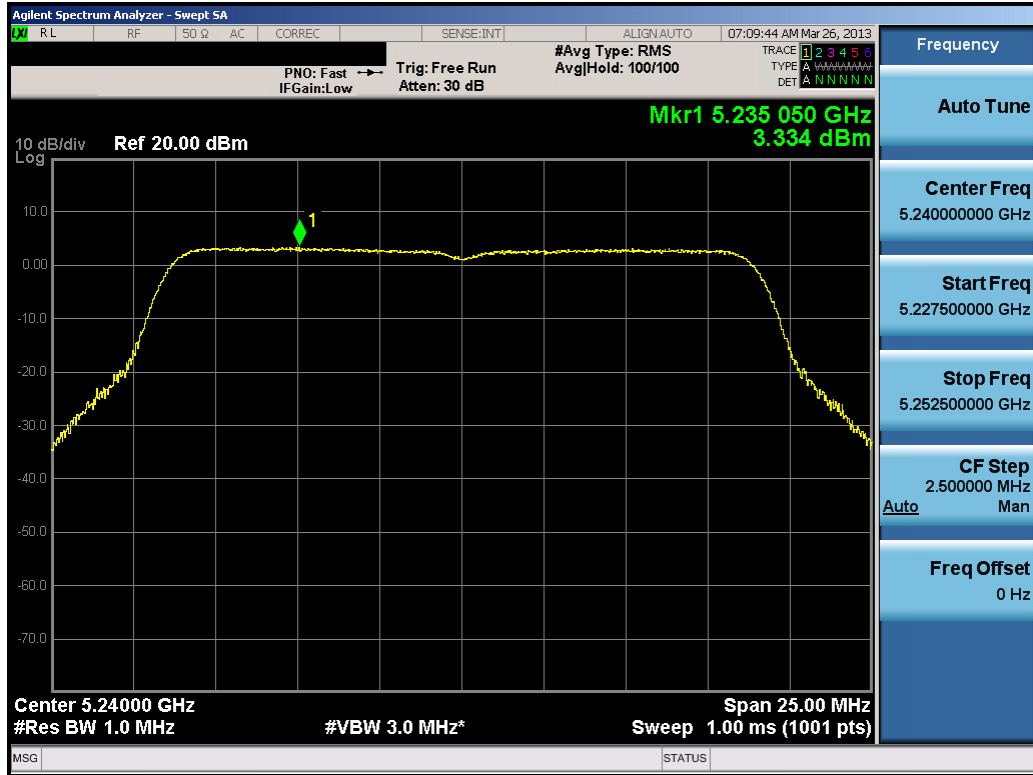


Plot 6-15. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

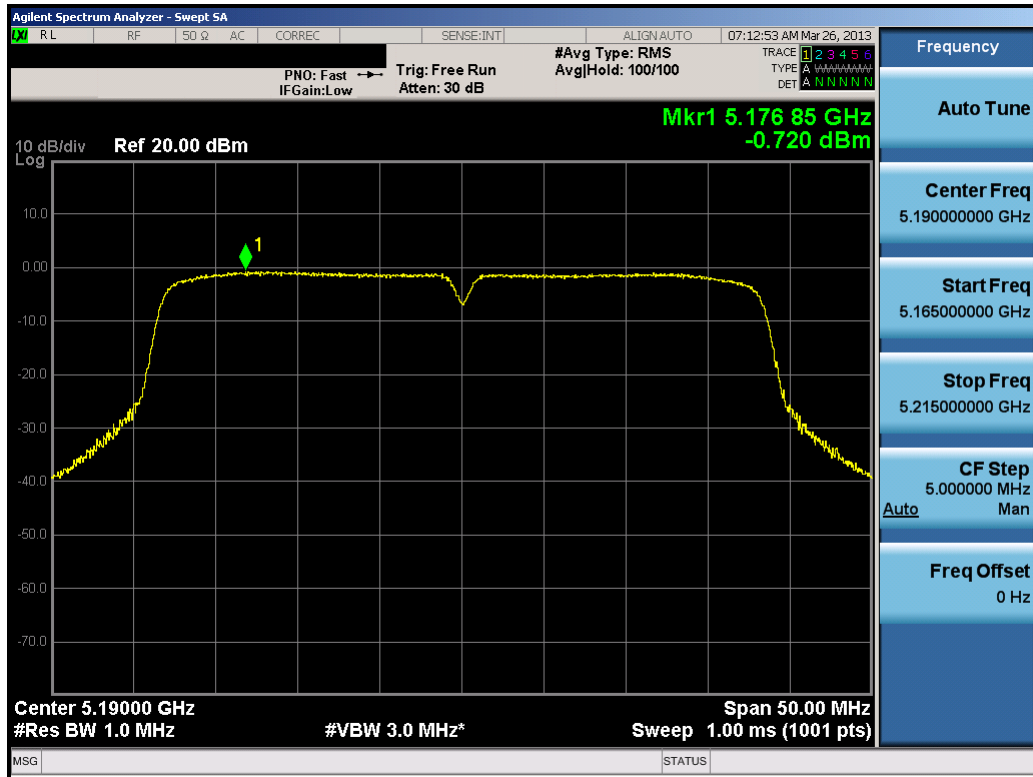


Plot 6-16. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 24 of 44

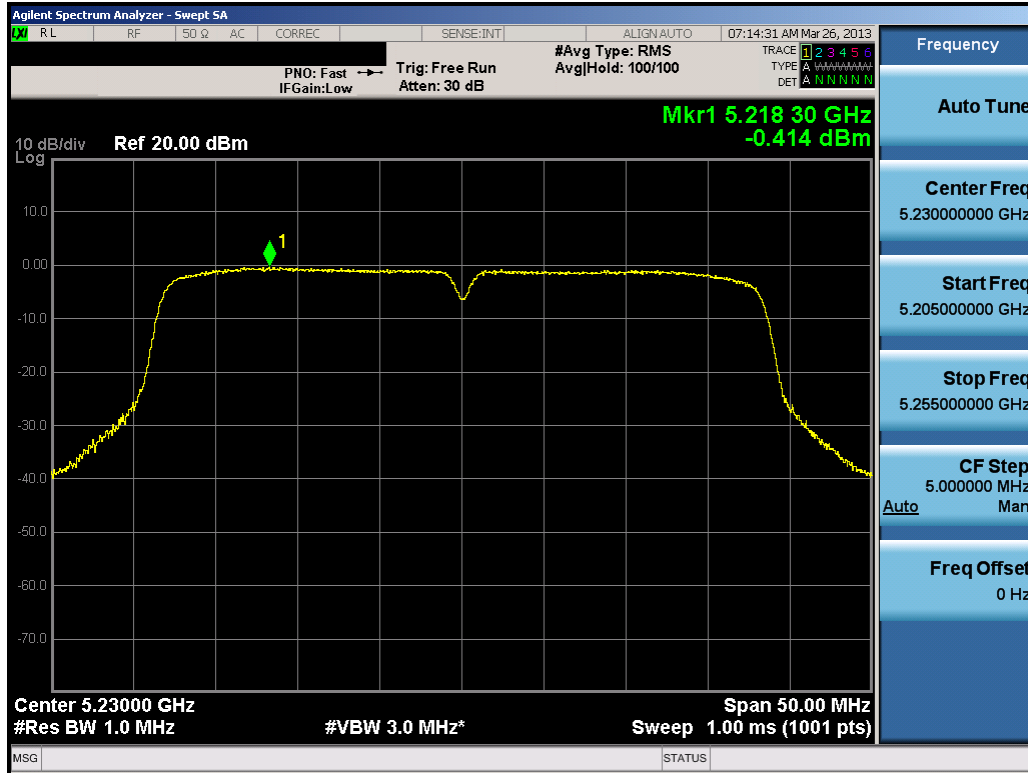

Plot 6-17. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

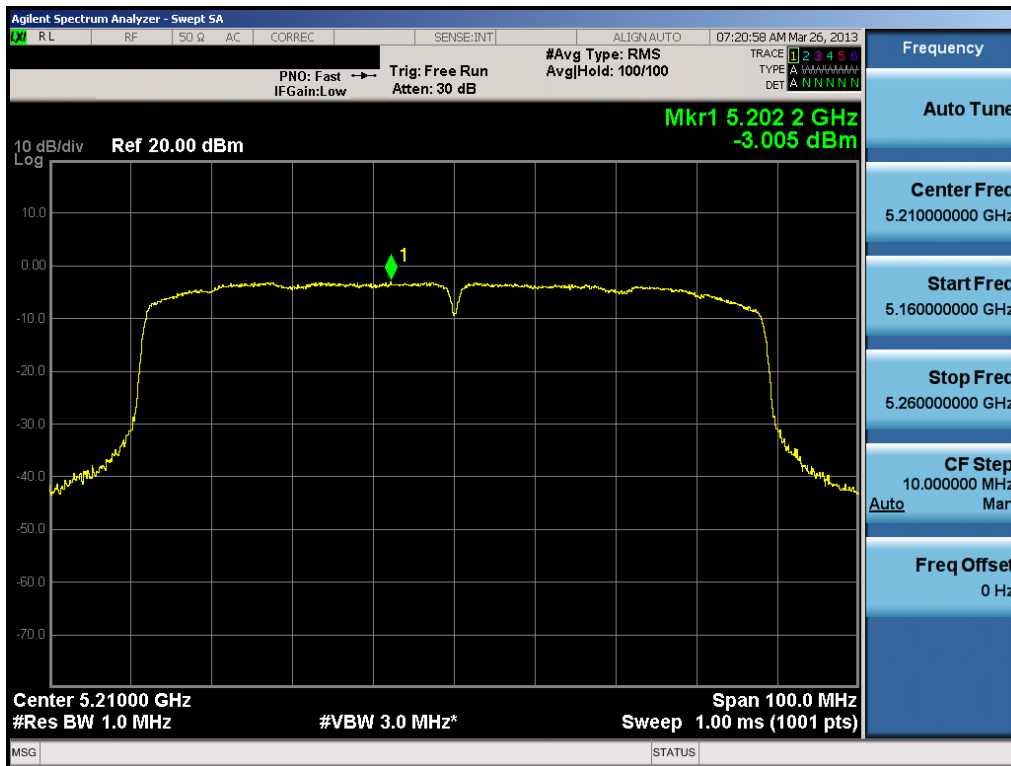

Plot 6-18. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 25 of 44

6.5 Peak Excursion Ratio – 802.11a/n/ac §15.407(a)(6)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033, was used to capture the average trace used to make the peak excursion measurement.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum power spectral density is 13 dBm/MHz.

Test Procedure Used

KDB 789033 v01r03 – Section G

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum. This level was compared to the peak power density level found from the previous section to determine the peak excursion.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




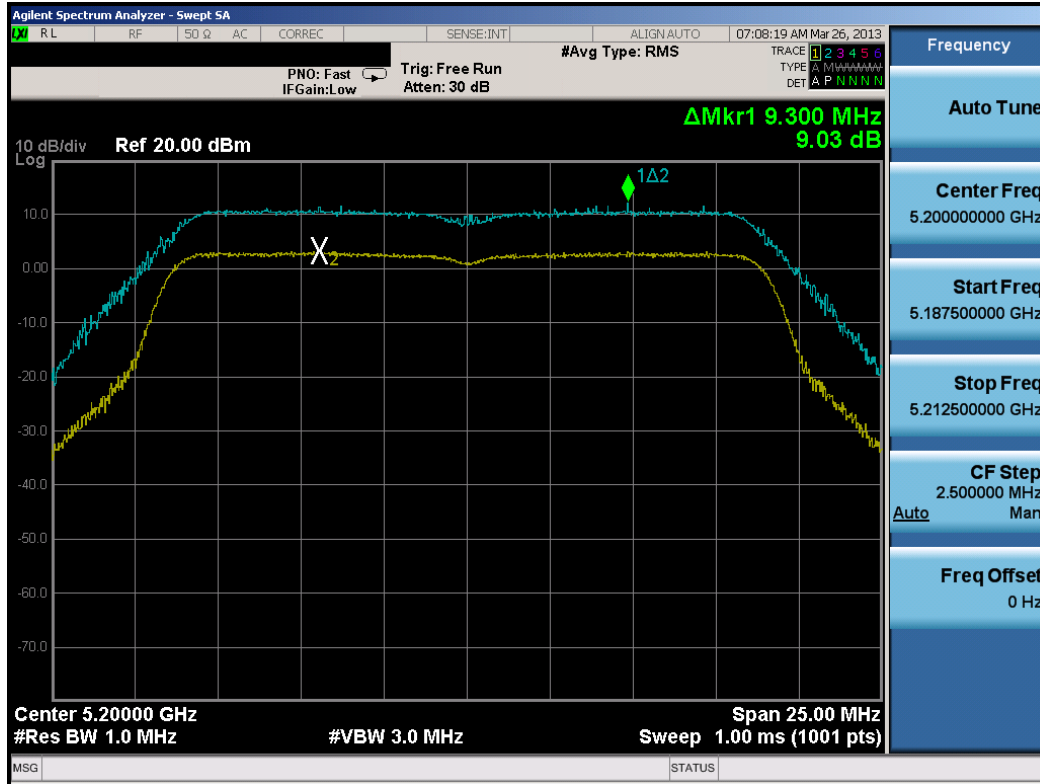


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

The peak excursion was investigated for all signal types, modulation types, channel bandwidths, and variations in signal parameters and the worst case data is shown below. Only the worst case modulation mode on a single channel among all bands is reported since that is sufficient to demonstrate compliance to the peak excursion requirement per KDB 789033 v01r03.



FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 26 of 44	

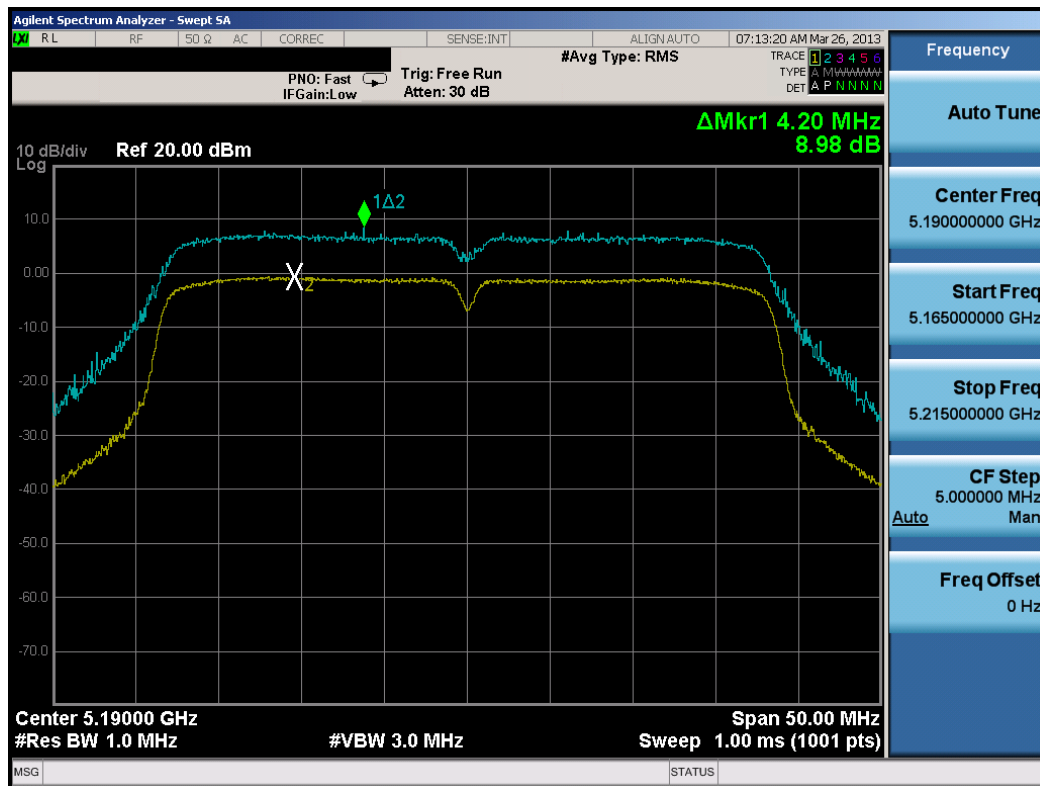


Plot 6-20. Peak Excursion Ratio Plot (20MHz BW 802.11n)





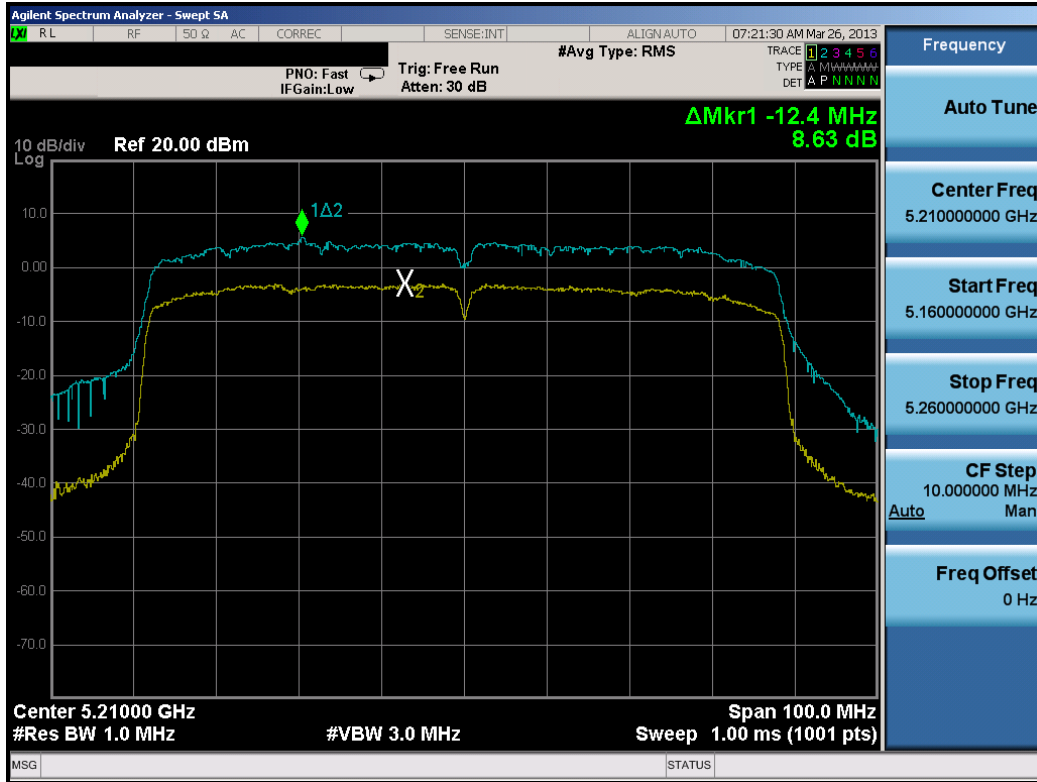Plot 6-21. Peak Excursion Ratio Plot (40MHz BW 802.11n)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 28 of 44



Plot 6-22. Peak Excursion Ratio Plot (80MHz BW 802.11ac)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 29 of 44	

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.



OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,985	-15	-0.00000029
100 %		- 30	5,179,999,989	-11	-0.00000021
100 %		- 20	5,180,000,013	13	0.00000025
100 %		- 10	5,179,999,984	-16	-0.00000031
100 %		0	5,180,000,020	20	0.00000039
100 %		+ 10	5,179,999,989	-11	-0.00000021
100 %		+ 20	5,179,999,976	-24	-0.00000046
100 %		+ 30	5,179,999,990	-10	-0.00000019
100 %		+ 40	5,180,000,013	13	0.00000025
100 %		+ 50	5,180,000,021	21	0.00000041
115 %	4.37	+ 20	5,180,000,012	12	0.00000023
BATT. ENDPOINT	3.46	+ 20	5,179,999,987	-13	-0.00000025

Table 6-16. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 30 of 44	

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-17 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-17. Radiated Limits



Test Procedures Used

KDB 789033 v01r03 – Section H

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 31 of 44	

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

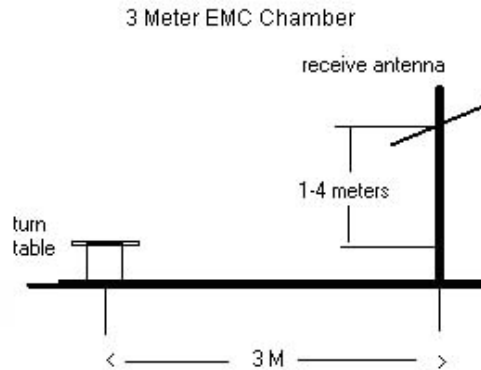




Figure 6-5. Test Instrument & Measurement Setup

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 32 of 44

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 v01r03 Section H.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
8. Radiated band edge emissions were investigated at 5350MHz however, since this device only operates in UNII Band 1, it was determined that the band edge emissions at 5350MHz were not significant. This was confirmed during testing.

Sample Calculations



Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 33 of 44	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10360.00	-105.07	Peak	H	46.05	0.00	47.99	68.20	-20.21
* 15540.00	-120.74	Average	H	53.29	0.00	39.55	53.98	-14.43
* 15540.00	-106.75	Peak	H	53.29	0.00	53.54	73.98	-20.44
* 20720.00	-111.02	Average	H	44.04	-9.54	30.48	53.98	-23.50
* 20720.00	-102.57	Peak	H	44.04	-9.54	38.93	73.98	-35.05
25900.00	-104.58	Peak	H	44.84	-9.54	37.72	68.20	-30.48

Table 6-18. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10400.00	-104.99	Peak	H	46.14	0.00	48.15	68.20	-20.05
* 15600.00	-120.86	Average	H	53.47	0.00	39.61	53.98	-14.37
* 15600.00	-106.52	Peak	H	53.47	0.00	53.95	73.98	-20.03
* 20800.00	-111.53	Average	H	44.03	-9.54	29.96	53.98	-24.02
* 20800.00	-102.71	Peak	H	44.03	-9.54	38.78	73.98	-35.20
26000.00	-104.14	Peak	H	44.96	-9.54	38.27	68.20	-29.93

Table 6-19. Radiated Measurements



FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 34 of 44

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 10480.00	-104.34	Peak	H	46.31	0.00	48.97	68.20	-19.23
* 15720.00	-121.60	Average	H	53.83	0.00	39.23	53.98	-14.75
* 15720.00	-106.86	Peak	H	53.83	0.00	53.97	73.98	-20.01
* 20960.00	-110.62	Average	H	44.00	-9.54	30.83	53.98	-23.15
20960.00	-102.51	Peak	H	44.00	-9.54	38.94	73.98	-35.04
26200.00	-104.03	Peak	H	44.75	-9.54	38.18	68.20	-30.02


Table 6-20. Radiated Measurements

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 35 of 44	

6.8 Radiated Band Edge Measurements (20MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting. Only the worst case band edge plots are shown.

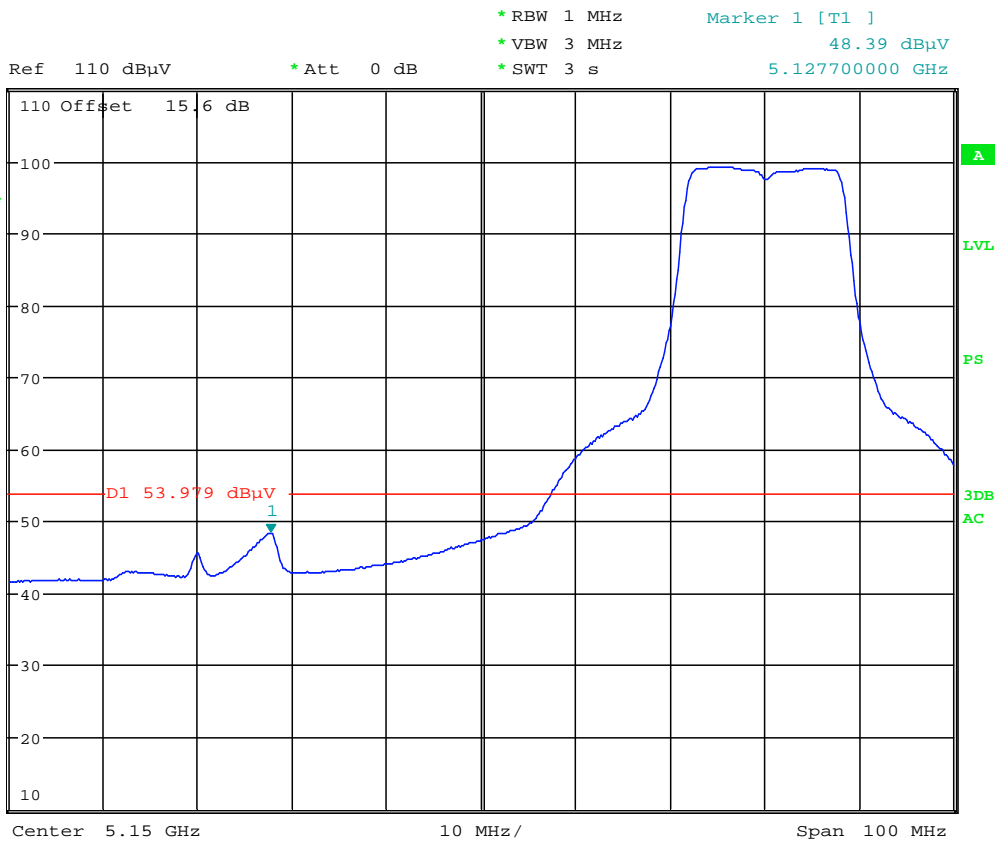Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36




Date: 22.MAR.2013 15:19:13

Plot 6-23. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 36 of 44	

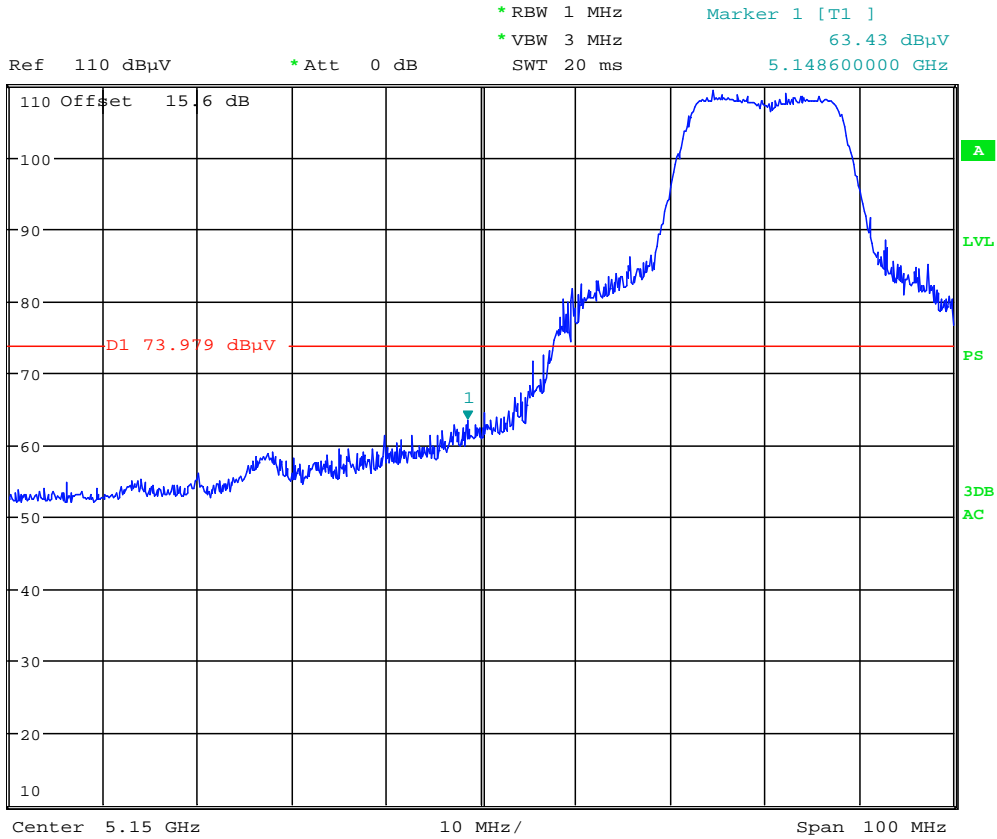Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]




Date: 22.MAR.2013 15:27:08

Plot 6-24. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 37 of 44	

6.9 Radiated Band Edge Measurements (40MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

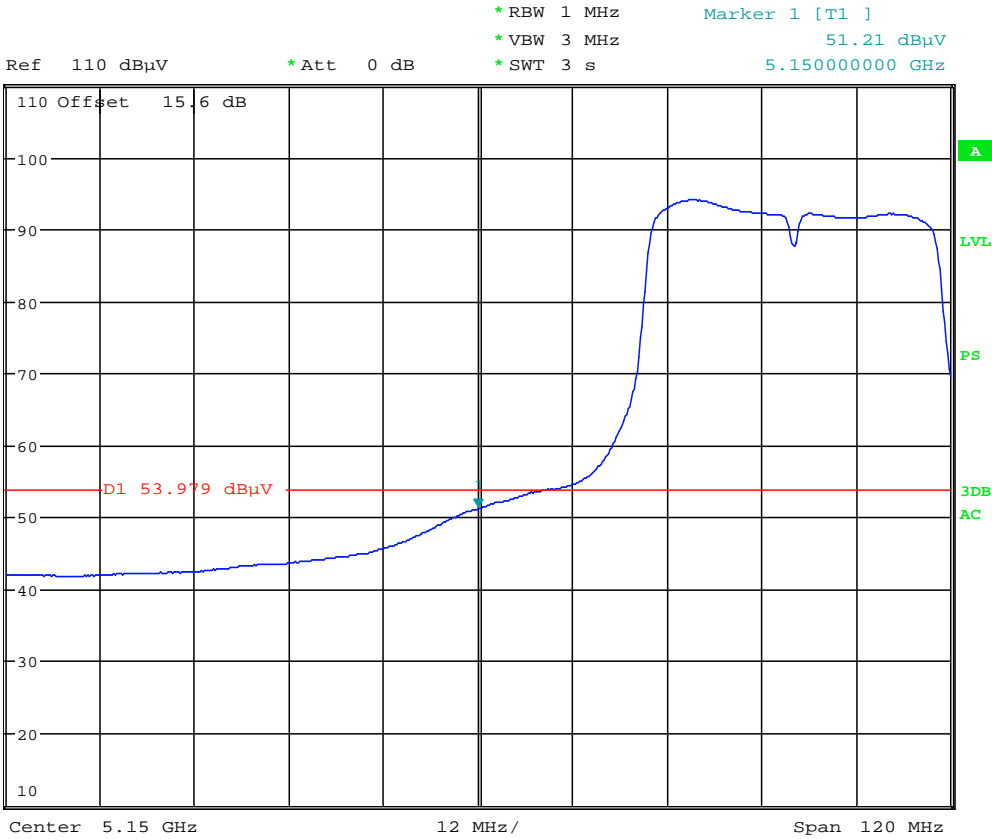Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38




Date: 22.MAR.2013 15:57:28

Plot 6-25. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 38 of 44	

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

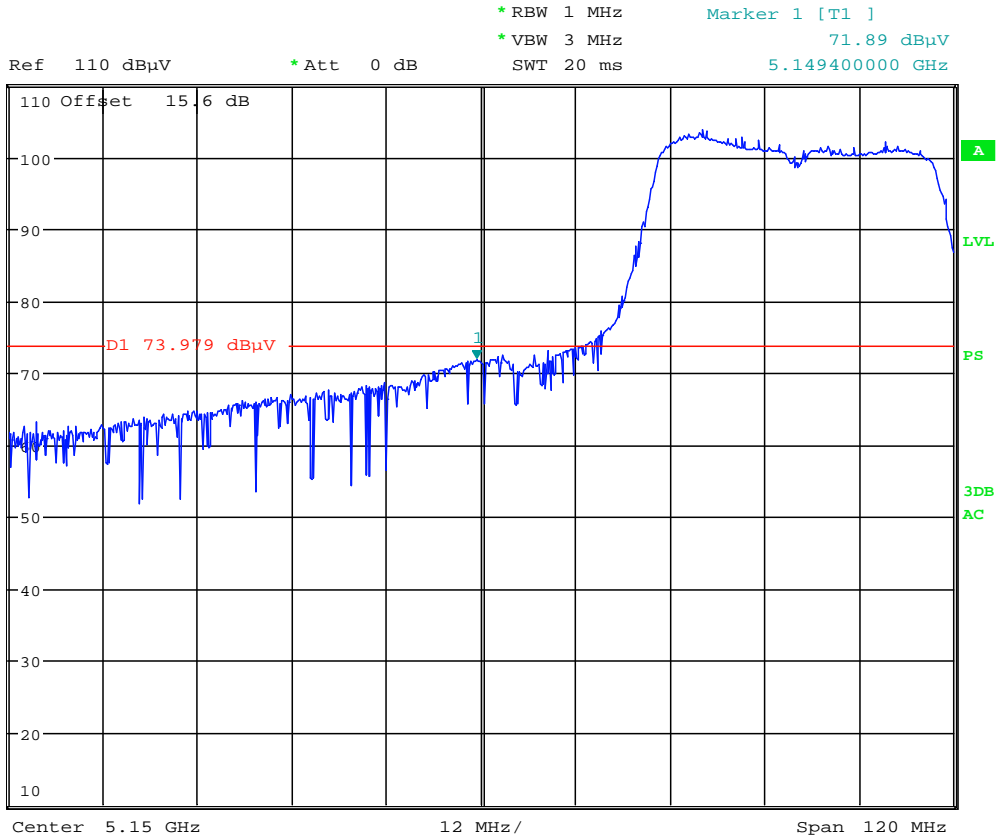§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]




Date: 22.MAR.2013 15:59:08

Plot 6-26. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 39 of 44

6.10 Radiated Band Edge Measurements (80MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

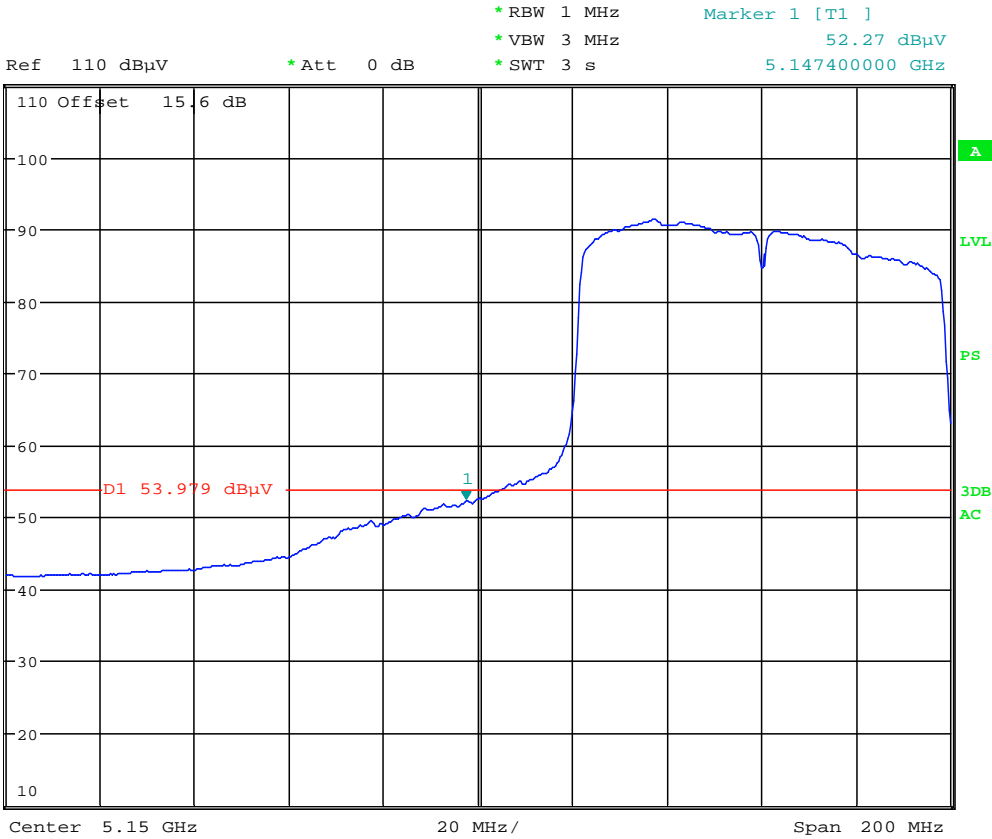Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42




Date: 22.MAR.2013 16:21:30

Plot 6-27. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 40 of 44	

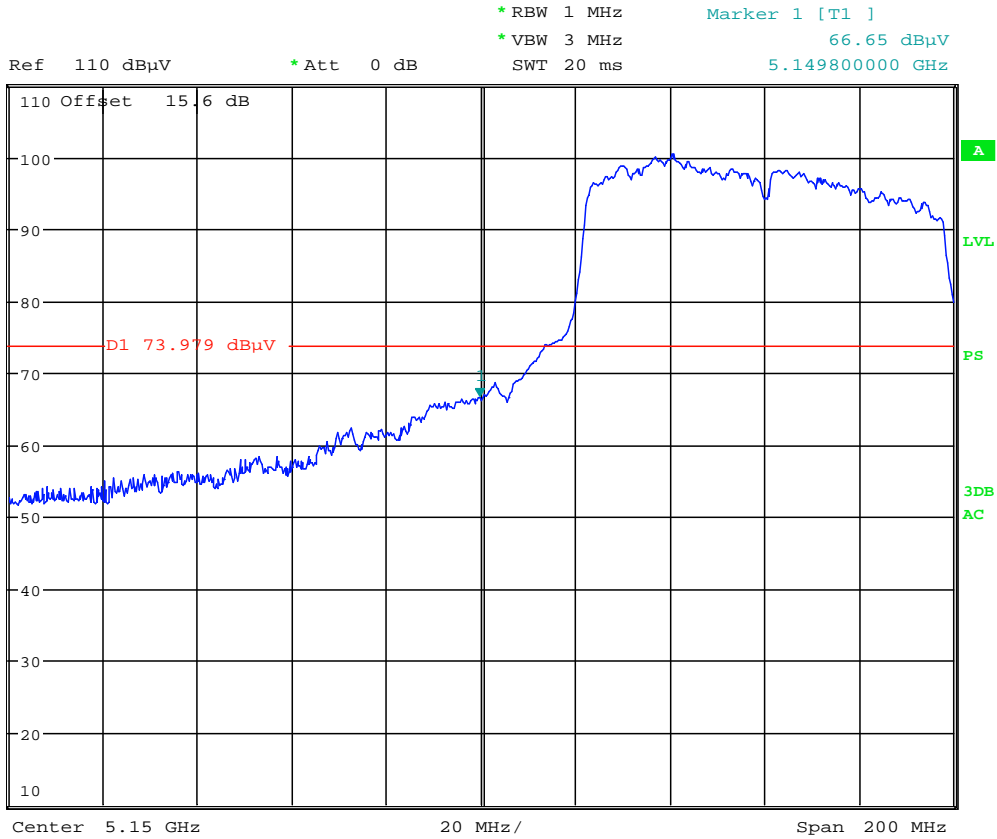Radiated Band Edge Measurements (80MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]




Date: 22.MAR.2013 16:23:10

Plot 6-28. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: IHDT56PB2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 41 of 44	

6.11 Line-Conducted Test Data

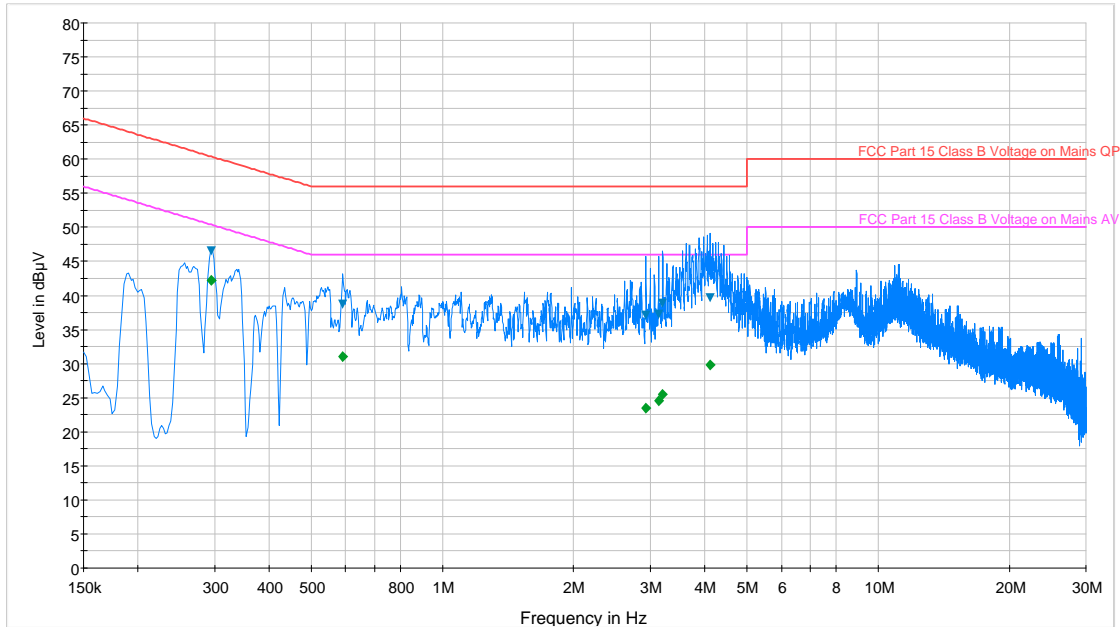§15.207; RSS-Gen [7.2.2]



— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▼ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 6-29. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	L1	0.1	46.60	60.40	13.80	42.20	50.40	8.20
0.591	L1	0.1	38.80	56.00	17.20	31.00	46.00	15.00
2.931	L1	0.2	37.10	56.00	18.90	23.50	46.00	22.50
3.136	L1	0.2	37.30	56.00	18.70	24.60	46.00	21.40
3.203	L1	0.2	38.90	56.00	17.10	25.50	46.00	20.50
4.117	L1	0.2	39.60	56.00	16.40	29.80	46.00	16.20

Table 6-21. Line Conducted Data with 802.11a UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 42 of 44

Line-Conducted Test Data (Cont'd)

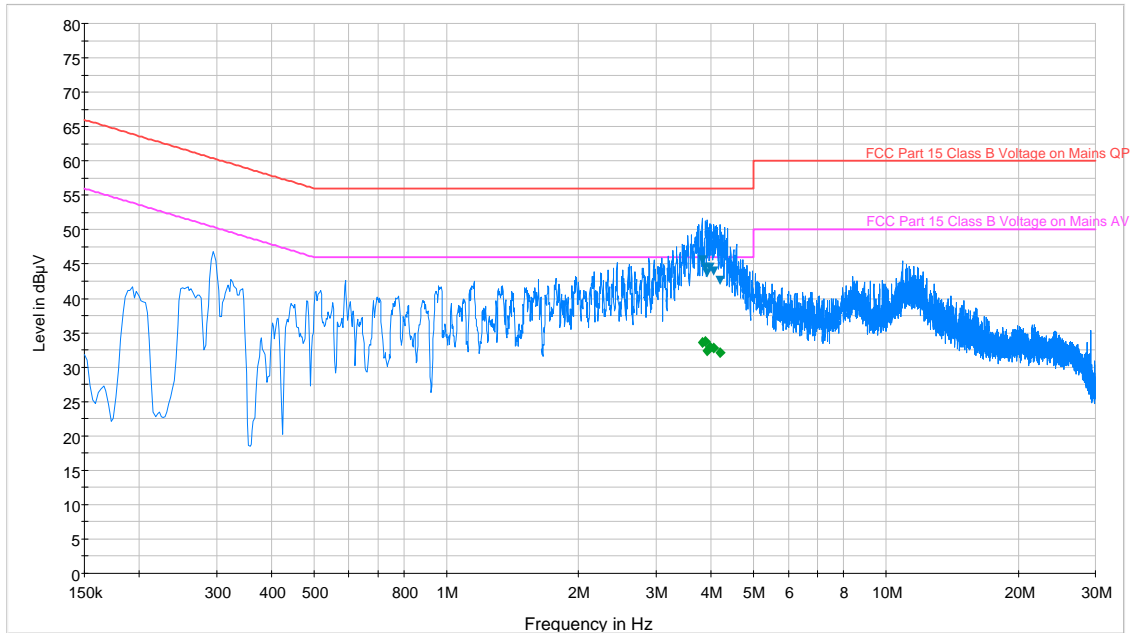§15.207; RSS-Gen [7.2.2]



— FCC Part 15 Class B Voltage on Mains QP.LimitLine
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine
 — Preview Result 1-PK+
▼ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 6-30. Line Conducted Plot with 802.11a UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
3.820	N	0.2	45.50	56.00	10.50	33.60	46.00	12.40
3.890	N	0.2	44.50	56.00	11.50	33.70	46.00	12.30
3.923	N	0.2	43.70	56.00	12.30	32.30	46.00	13.70
3.980	N	0.2	44.50	56.00	11.50	33.00	46.00	13.00
4.052	N	0.2	44.00	56.00	12.00	32.80	46.00	13.20
4.198	N	0.2	42.60	56.00	13.40	32.10	46.00	13.90

Table 6-22. Line Conducted Data with 802.11a UNII Band 1 (N)



Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset		Page 43 of 44

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Motorola Portable Handset FCC ID: IHDT56PB2** is in compliance with Part 15E of the FCC Rules.

FCC ID: IHDT56PB2		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1304240712.IHD	Test Dates: 03/22 - 03/26/2013	EUT Type: Portable Handset	Page 44 of 44	