



# FCC RF Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 4027  
FCC ID : IHDT56QB2  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 16, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

REVISION HISTORY ..... 3

1 GENERAL DESCRIPTION ..... 4

    1.1 Applicant ..... 4

    1.2 Manufacturer ..... 4

    1.3 Product Feature of Equipment Under Test ..... 4

    1.4 Product Specification subjective to this standard ..... 4

    1.5 Modification of EUT ..... 4

APPENDIX A. ORIGINAL REPORT





# 1 General Description

## 1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	4027
FCC ID	IHDT56QB2
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11b/g/n HT20 Bluetooth v2.1 EDR Bluetooth v4.0 EDR/LE
HW Version	P2
SW Version	KXB21.34.27
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Antenna Type	PIFA Antenna type with gain 1.80 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## **Appendix A. Original Report**

Please refer to Sporton report number FR442326C as below.



# FCC RF Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 4023  
FCC ID : IHDT56QB1  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 23, 2014 and testing was completed on Jun. 20, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION.....5**

1.1 Applicant.....5

1.2 Manufacturer.....5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification subjective to this standard .....6

1.5 Modification of EUT .....6

1.6 Testing Location .....7

1.7 Applicable Standards.....7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8**

2.1 Carrier Frequency Channel .....8

2.2 Pre-Scanned RF Power.....9

2.3 Test Mode..... 11

2.4 Connection Diagram of Test System..... 12

2.5 Support Unit used in test configuration and system ..... 13

2.6 EUT Operation Test Setup ..... 13

2.7 Measurement Results Explanation Example..... 13

**3 TEST RESULT..... 14**

3.1 6dB Bandwidth Measurement ..... 14

3.2 Output Power Measurement..... 16

3.3 Power Spectral Density Measurement ..... 19

3.4 Conducted Band Edges and Spurious Emission Measurement .....21

3.5 Radiated Band Edges and Spurious Emission Measurement .....31

3.6 AC Conducted Emission Measurement.....50

3.7 Antenna Requirements.....54

**4 LIST OF MEASURING EQUIPMENT.....55**

**5 UNCERTAINTY OF EVALUATION.....56**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.44 dB at 2484.460 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 19.80 dB at 4.342 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.2 Manufacturer

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	4023
FCC ID	IHDT56QB1
IIMEI	359286050063637
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11b/g/n HT20 Bluetooth v2.1 EDR Bluetooth v4.0 - LE
HW Version	P2
SW Version	KXB21.32.18
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx/Rx Channel Frequency Range</b>	802.11b/g/n : 2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to Antenna</b>	802.11b : 20.65 dBm (0.1161 W) 802.11g : 23.02 dBm (0.2004 W) 802.11n HT20 : 23.02 dBm (0.2004 W)
<b>Antenna Type</b>	802.11b/g/n : PIFA Antenna type with gain 1.80 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>IC Registration No.</b>
	TH02-HY	CO05-HY	03CH06-HY	4086B-1

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm) (800ns)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412MHz	20.47	20.45	20.41	20.40
CH 06	2437MHz	20.65	20.62	20.64	20.62
CH 11	2462MHz	20.62	20.60	20.49	20.48

Channel	Frequency	2.4GHz 802.11b Average Power (dBm) (800ns)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412MHz	17.86	17.83	17.80	17.85
CH 06	2437MHz	17.96	17.94	17.94	17.93
CH 11	2462MHz	18.00	17.99	17.96	17.98

Channel	Frequency	2.4GHz 802.11g RF Power (dBm) (800ns)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412MHz	21.08	20.87	20.92	21.04	20.96	20.76	20.84	20.63
CH 06	2437MHz	23.02	22.97	22.85	22.75	22.98	22.61	22.69	21.23
CH 11	2462MHz	20.15	20.04	20.03	20.02	20.01	19.82	19.95	20.02

Channel	Frequency	2.4GHz 802.11g Average Power (dBm) (800ns)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412MHz	11.93	11.91	11.90	11.88	11.55	11.79	11.68	11.72
CH 06	2437MHz	15.95	15.91	15.90	15.38	14.77	14.48	14.48	12.44
CH 11	2462MHz	11.05	11.01	10.98	11.00	10.60	10.92	10.80	10.92



Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm) (800ns)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412MHz	20.31	20.02	20.21	19.97	19.94	20.10	20.20	19.19
CH 06	2437MHz	23.02	22.96	22.93	22.62	22.42	22.16	21.72	19.40
CH 11	2462MHz	20.01	19.99	19.92	19.97	19.71	19.61	19.73	19.15

Channel	Frequency	2.4GHz 802.11n HT20 Average Power (dBm) (800ns)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412MHz	10.83	10.76	10.82	10.60	10.66	10.67	10.65	9.74
CH 06	2437MHz	15.94	15.90	15.89	14.86	13.89	12.92	12.42	9.98
CH 11	2462MHz	10.57	10.48	10.55	10.28	10.34	10.37	10.17	9.84




## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
Conducted Spurious Emission	802.11b	1 Mbps	1/6/11	
	802.11g	6 Mbps	1/6/11	
	802.11n HT20	MCS0	1/6/11	
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + MP3			

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

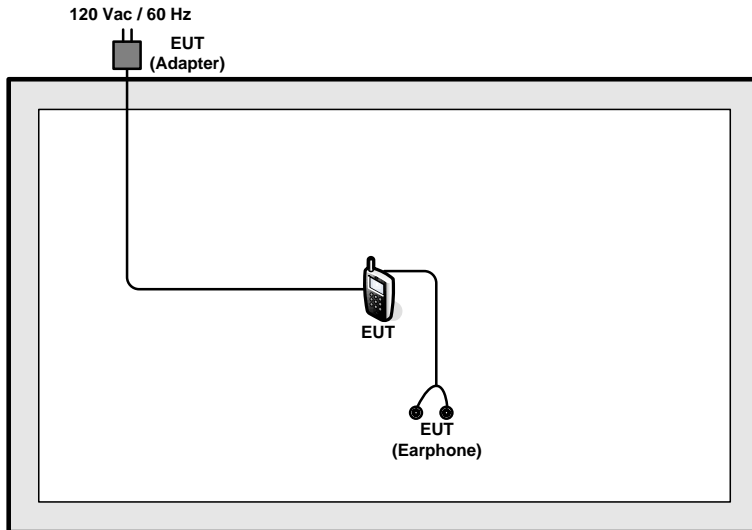

### <AC Conducted Emission Mode>

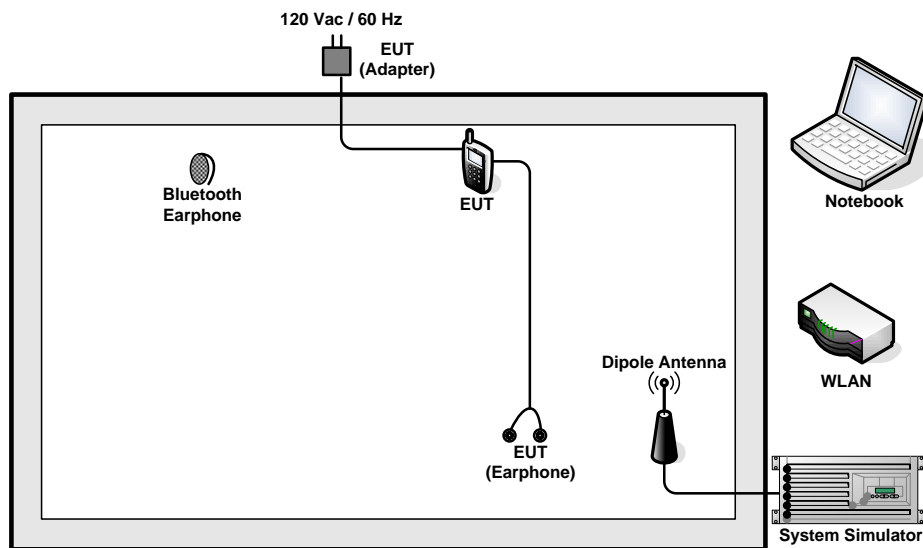



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

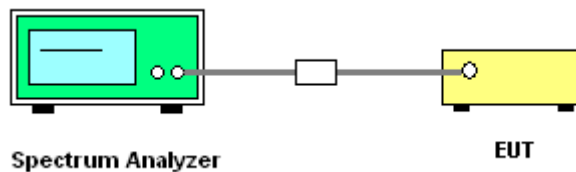




3.1.5 Test Result of 6dB Bandwidth

Test Band :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	45~49%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	7.08	0.5	Pass
11b	1Mbps	1	6	2437	7.12	0.5	Pass
11b	1Mbps	1	11	2462	7.04	0.5	Pass
11g	6Mbps	1	1	2412	16.32	0.5	Pass
11g	6Mbps	1	6	2437	16.36	0.5	Pass
11g	6Mbps	1	11	2462	16.32	0.5	Pass
HT20	MCS0	1	1	2412	17.58	0.5	Pass
HT20	MCS0	1	6	2437	17.58	0.5	Pass
HT20	MCS0	1	11	2462	17.56	0.5	Pass

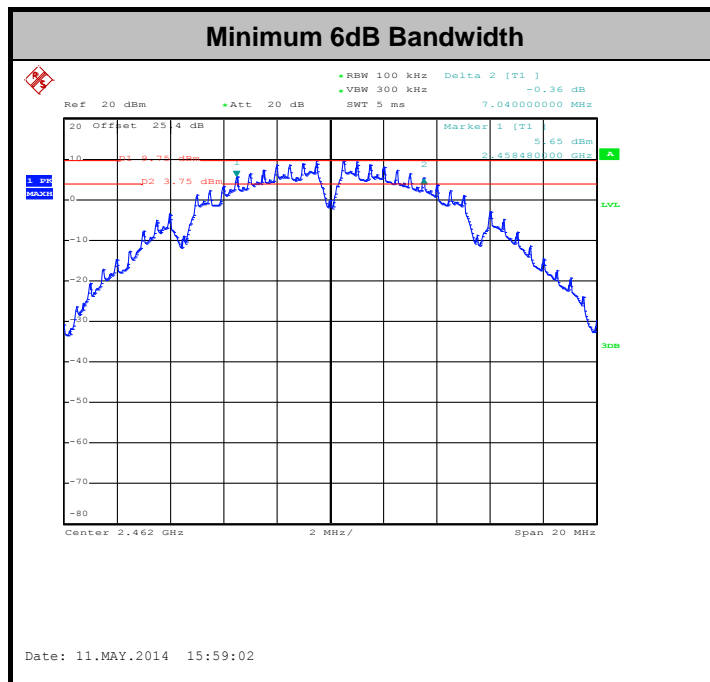

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

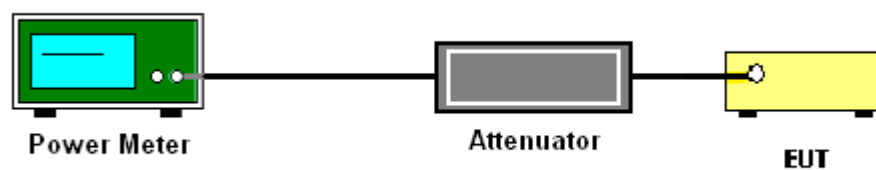



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	45~49%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	20.47	30	1.80	Pass
11b	1Mbps	1	6	2437	20.65	30	1.80	Pass
11b	1Mbps	1	11	2462	20.62	30	1.80	Pass
11g	6Mbps	1	1	2412	21.08	30	1.80	Pass
11g	6Mbps	1	6	2437	23.02	30	1.80	Pass
11g	6Mbps	1	11	2462	20.15	30	1.80	Pass
HT20	MCS0	1	1	2412	20.31	30	1.80	Pass
HT20	MCS0	1	6	2437	23.02	30	1.80	Pass
HT20	MCS0	1	11	2462	20.01	30	1.80	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	45~49%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.10	17.86	30	1.80	Pass
11b	1Mbps	1	6	2437	0.10	17.96	30	1.80	Pass
11b	1Mbps	1	11	2462	0.10	18.00	30	1.80	Pass
11g	6Mbps	1	1	2412	0.59	11.93	30	1.80	Pass
11g	6Mbps	1	6	2437	0.59	15.95	30	1.80	Pass
11g	6Mbps	1	11	2462	0.59	11.05	30	1.80	Pass
HT20	MCS0	1	1	2412	0.63	10.83	30	1.80	Pass
HT20	MCS0	1	6	2437	0.63	15.94	30	1.80	Pass
HT20	MCS0	1	11	2462	0.63	10.57	30	1.80	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

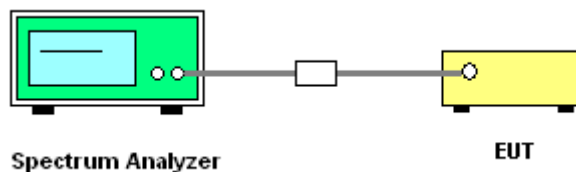




### 3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	45~49%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-3.18	8	1.80	Pass
11b	1Mbps	1	6	2437	-4.91	8	1.80	Pass
11b	1Mbps	1	11	2462	-4.56	8	1.80	Pass
11g	6Mbps	1	1	2412	-13.34	8	1.80	Pass
11g	6Mbps	1	6	2437	-10.24	8	1.80	Pass
11g	6Mbps	1	11	2462	-14.14	8	1.80	Pass
HT20	MCS0	1	1	2412	-14.13	8	1.80	Pass
HT20	MCS0	1	6	2437	-9.27	8	1.80	Pass
HT20	MCS0	1	11	2462	-15.00	8	1.80	Pass

**Note:** Measured power density (dBm) has offset with cable loss.

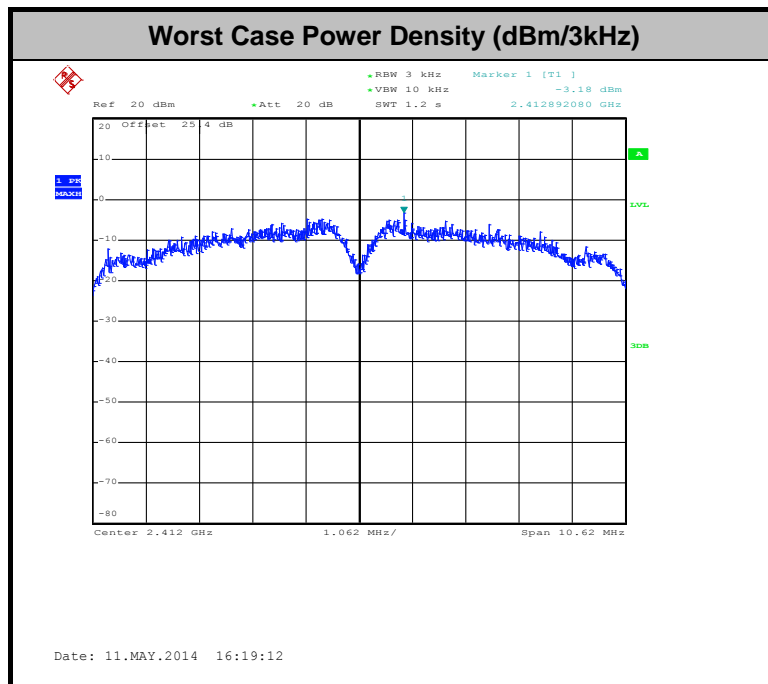

### **3.4 Conducted Band Edges and Spurious Emission Measurement**

#### **3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement**

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


#### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.4.3 Test Procedures**

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### **3.4.4 Test Setup**


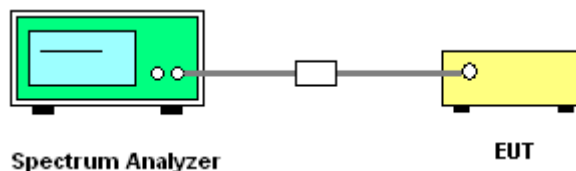




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	01	Test Engineer :	Alex Lee

#### WLAN 802.11b Channel 01

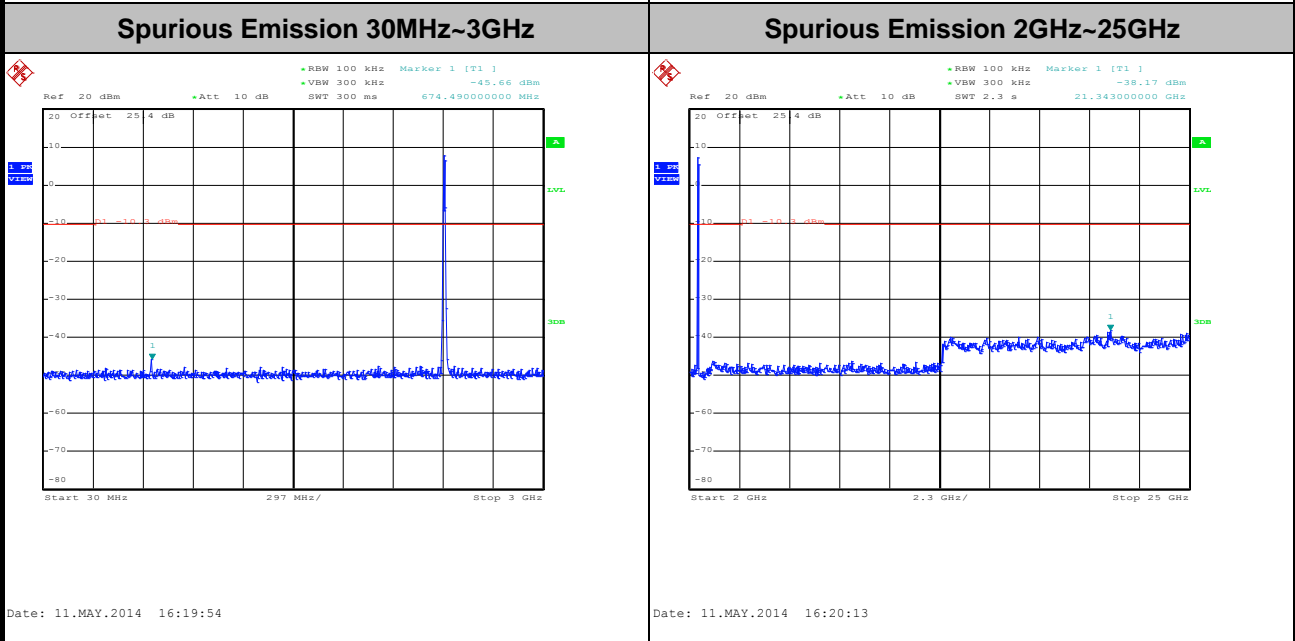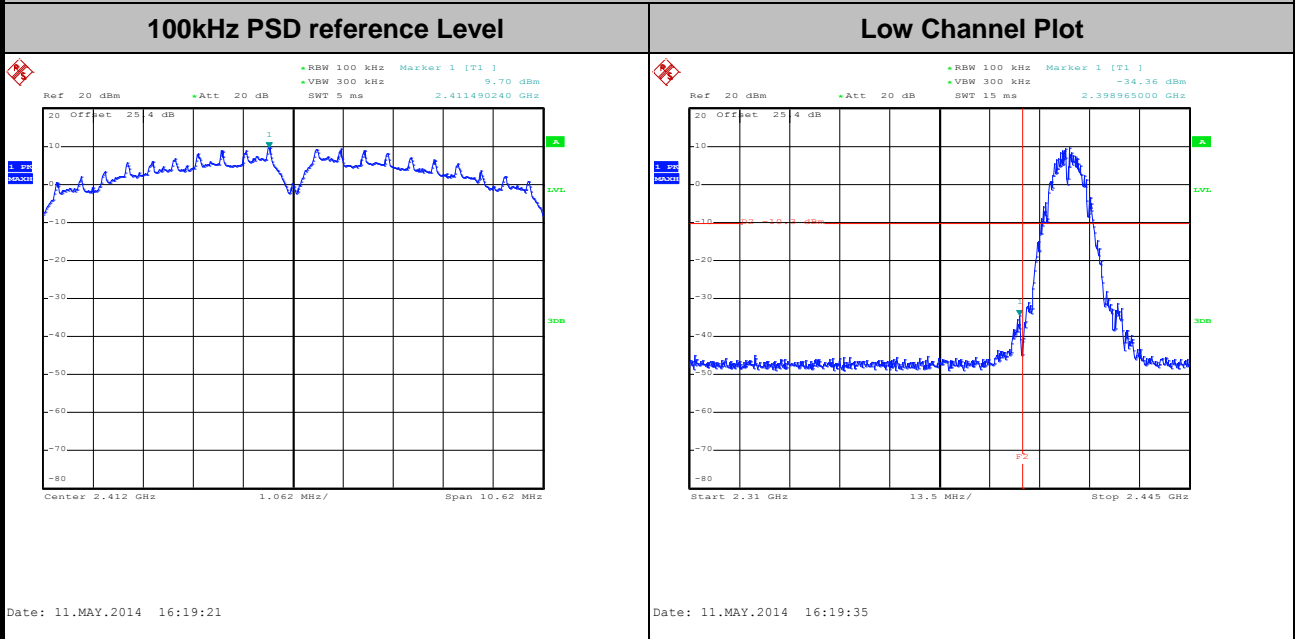




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11b Channel 06

100kHz PSD reference Level

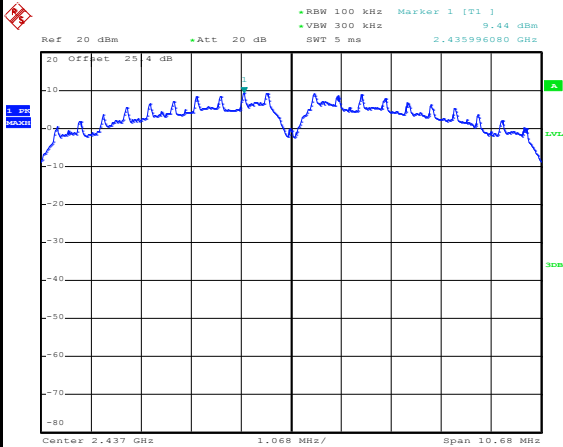


Date: 11.MAY.2014 15:57:21

Spurious Emission 30MHz~3GHz

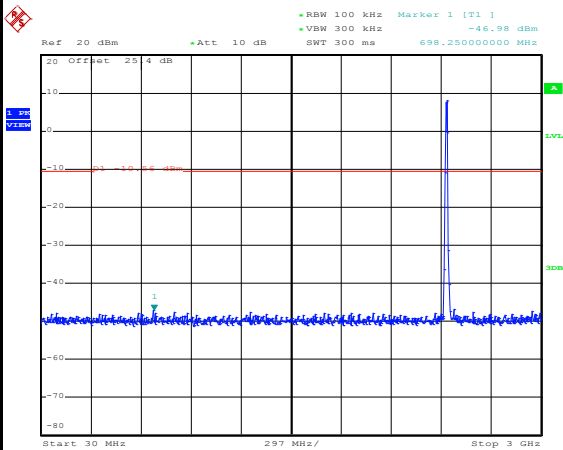

Date: 11.MAY.2014 15:57:40

Spurious Emission 2GHz~25GHz

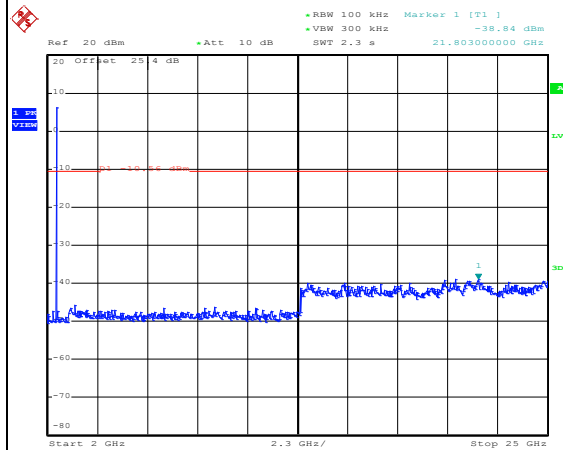


Date: 11.MAY.2014 15:57:59



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11b Channel 11

100kHz PSD reference Level

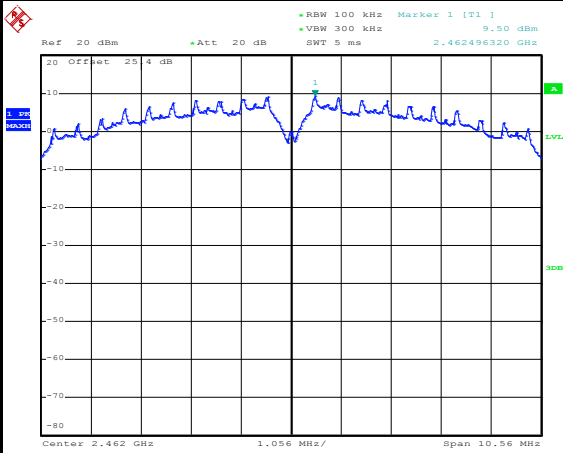


Date: 11.MAY.2014 15:59:31

High Channel Plot

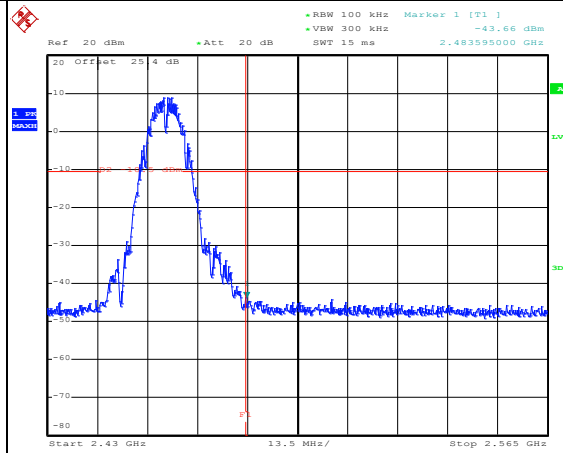


Date: 11.MAY.2014 15:59:45

Spurious Emission 30MHz~3GHz

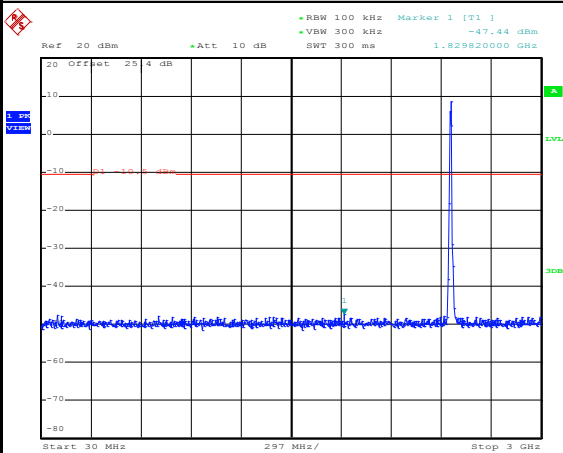

Date: 11.MAY.2014 16:00:04

Spurious Emission 2GHz~25GHz

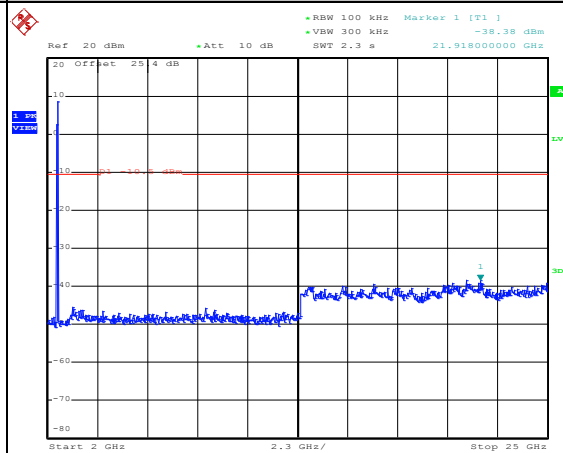


Date: 11.MAY.2014 16:00:23




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	01	Test Engineer :	Alex Lee

WLAN 802.11g Channel 01


100kHz PSD reference Level

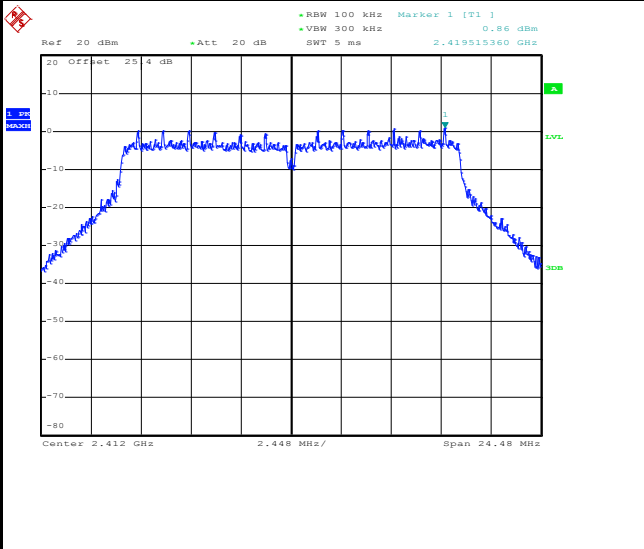


Low Channel Plot

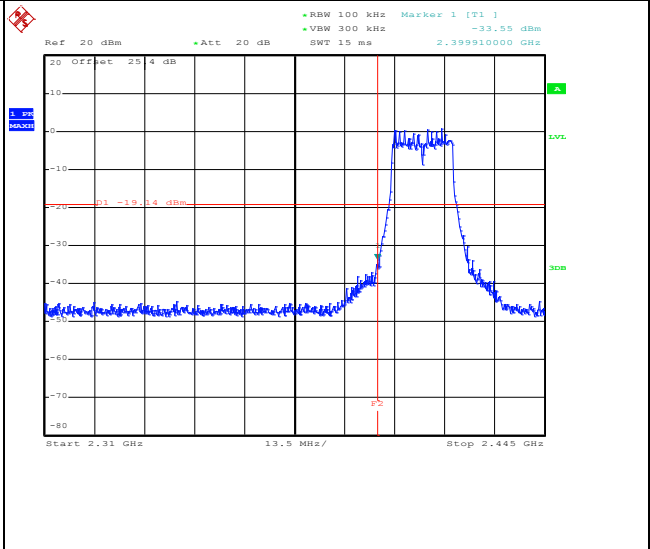

Spurious Emission 30MHz~3GHz

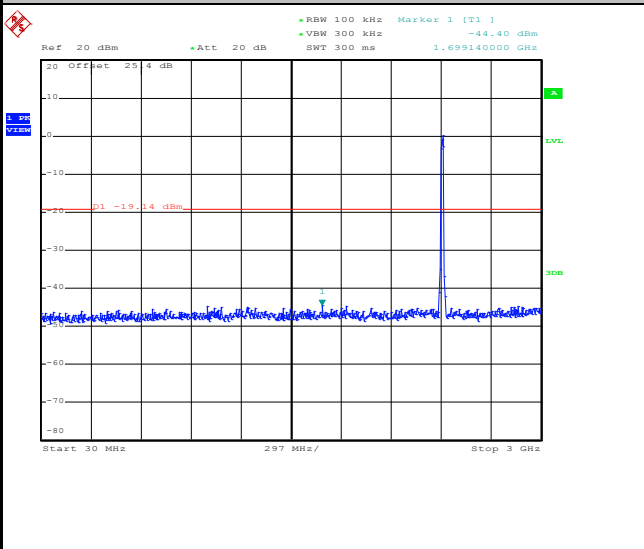

Spurious Emission 2GHz~25GHz

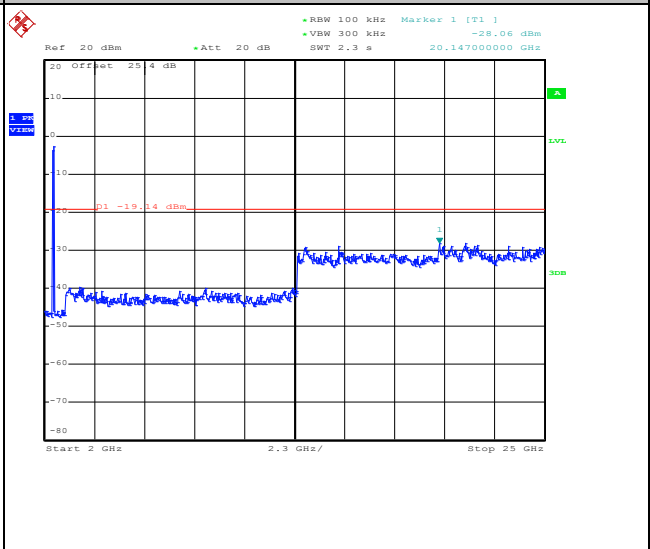




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11g Channel 06

100kHz PSD reference Level

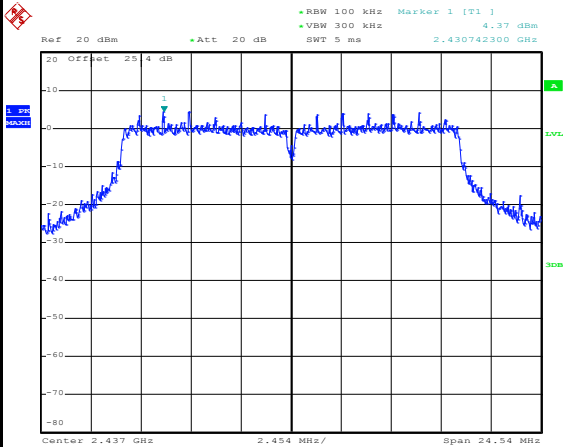


Date: 11.MAY.2014 16:04:43

Spurious Emission 30MHz~3GHz

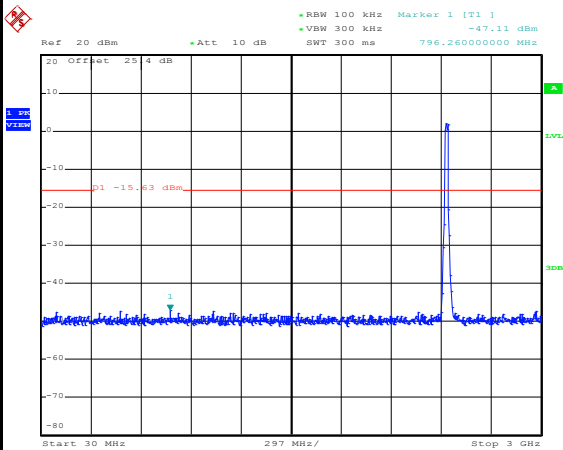

Date: 11.MAY.2014 16:05:03

Spurious Emission 2GHz~25GHz

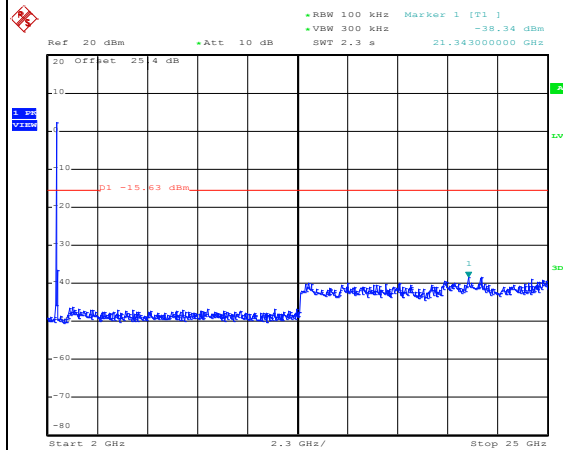


Date: 11.MAY.2014 16:05:22



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11g Channel 11

100kHz PSD reference Level

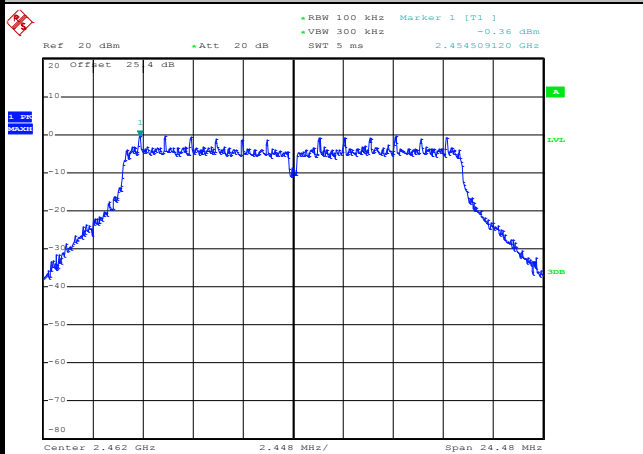


Date: 20.JUN.2014 13:58:16

High Channel Plot

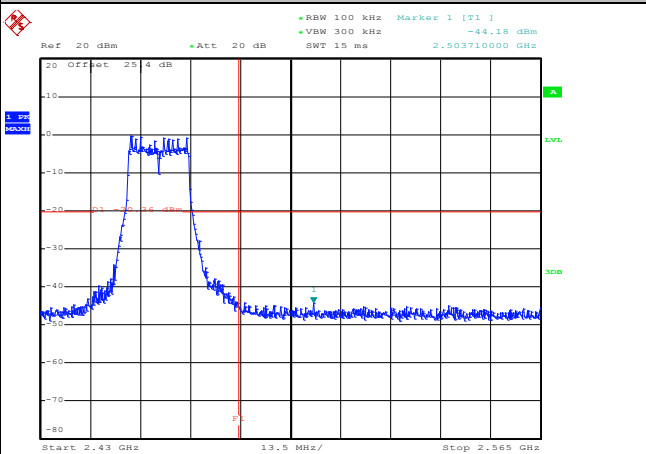


Date: 20.JUN.2014 15:08:05

Spurious Emission 30MHz~3GHz

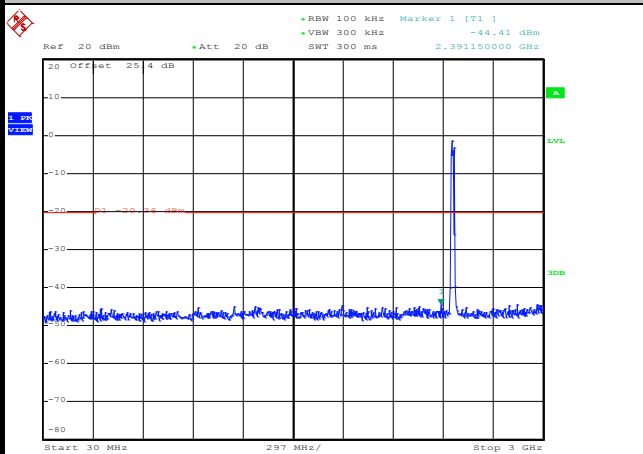

Date: 20.JUN.2014 14:06:41

Spurious Emission 2GHz~25GHz

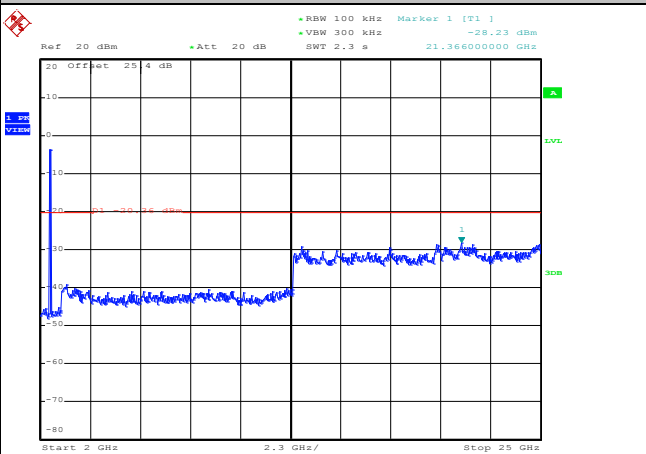


Date: 20.JUN.2014 14:06:59



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	01	Test Engineer :	Alex Lee


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

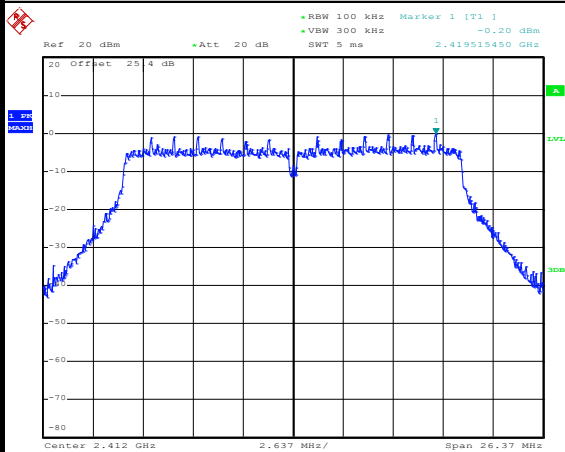


Date: 20.JUN.2014 14:56:34

Low Channel Plot

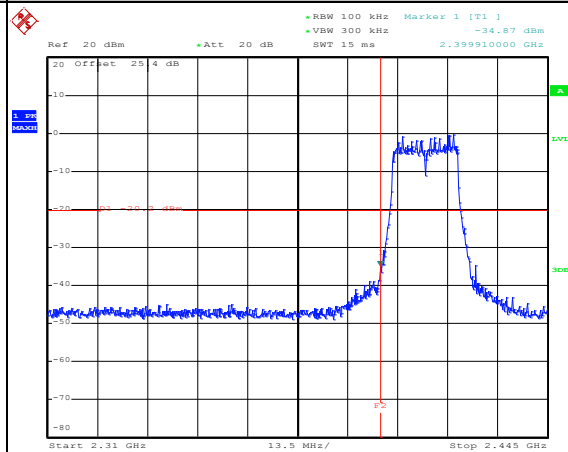


Date: 20.JUN.2014 14:56:54

Spurious Emission 30MHz~3GHz

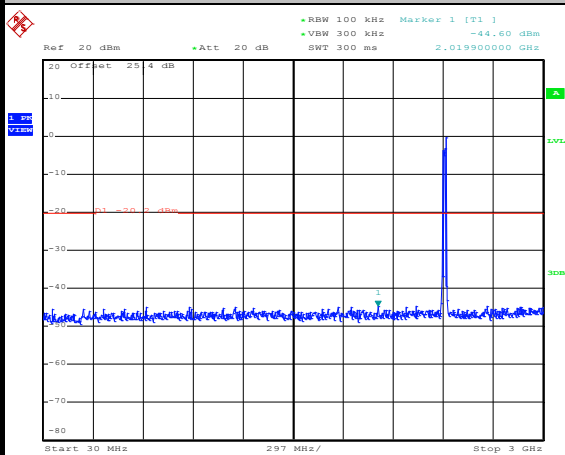

Date: 20.JUN.2014 14:57:16

Spurious Emission 2GHz~25GHz

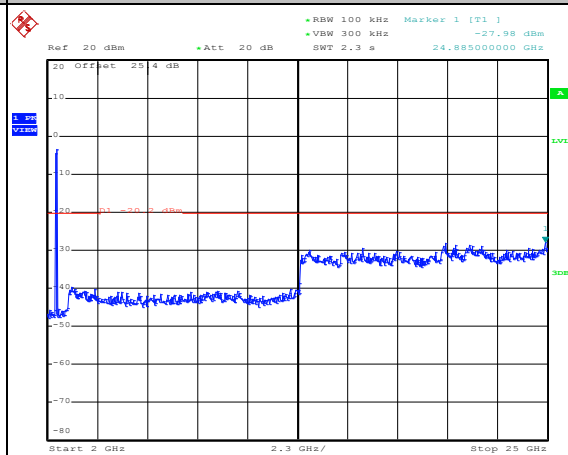


Date: 20.JUN.2014 14:57:34



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

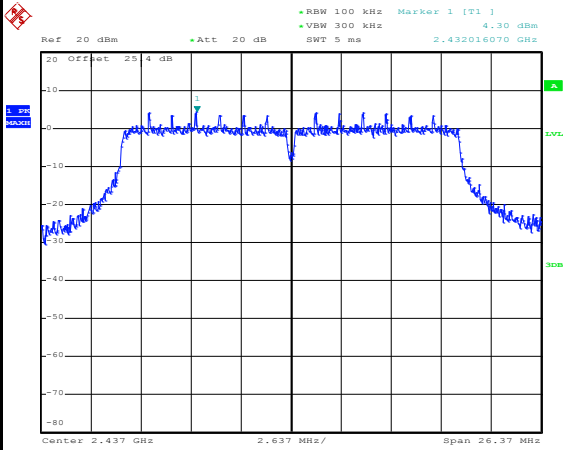


Date: 11.MAY.2014 16:13:07

Spurious Emission 30MHz~3GHz

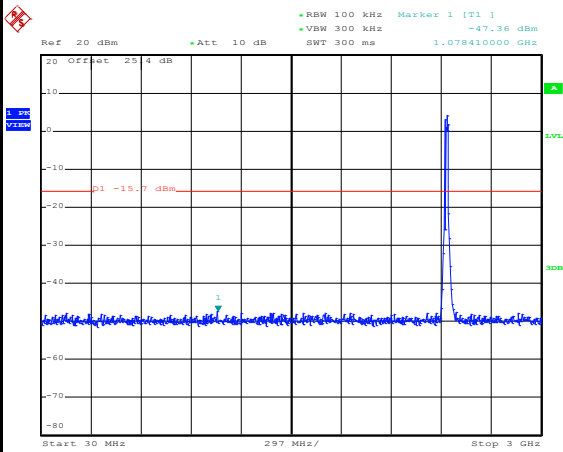

Date: 11.MAY.2014 16:13:27

Spurious Emission 2GHz~25GHz

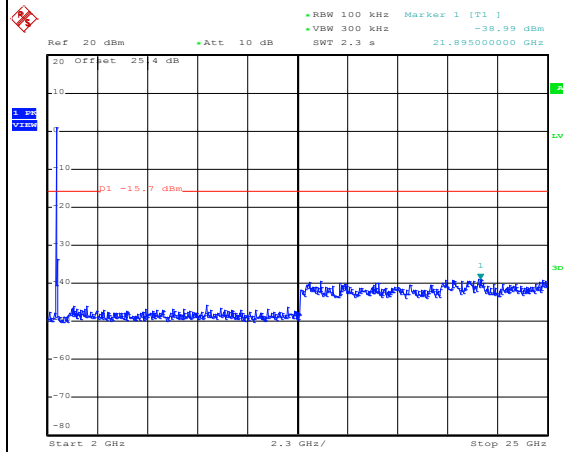


Date: 11.MAY.2014 16:13:45



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

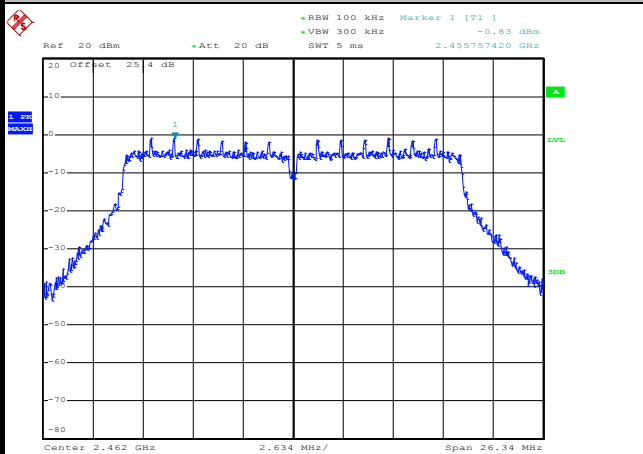


Date: 20.JUN.2014 14:26:00

High Channel Plot

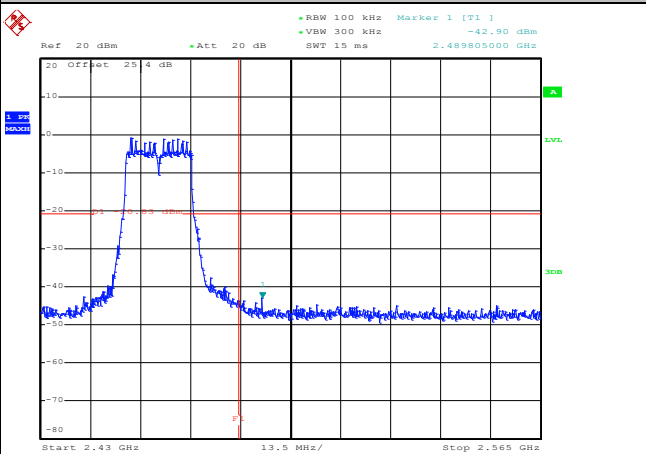


Date: 20.JUN.2014 14:34:09

Spurious Emission 30MHz~3GHz

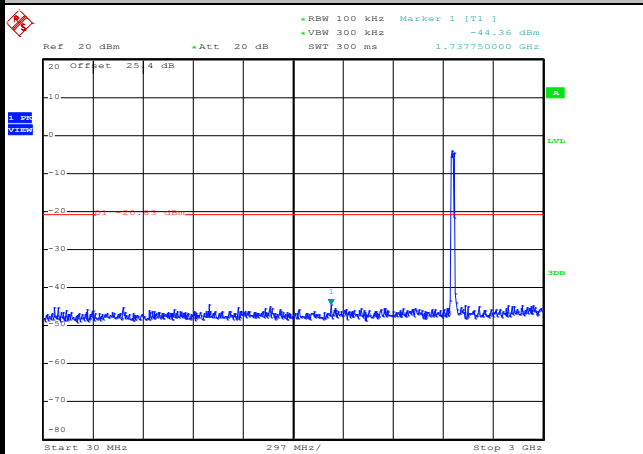

Date: 20.JUN.2014 14:30:37

Spurious Emission 2GHz~25GHz

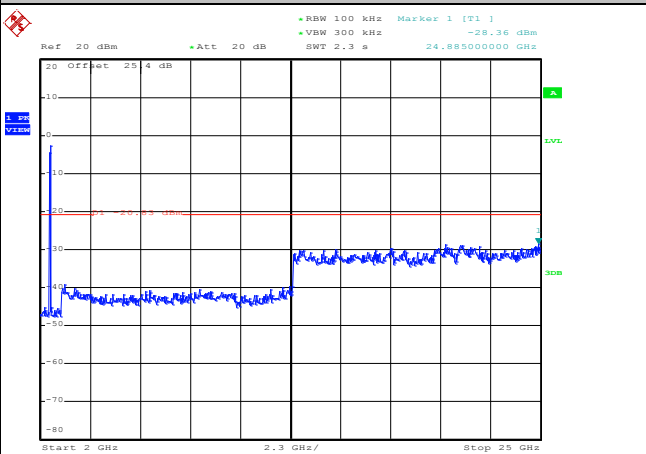

Date: 20.JUN.2014 14:30:55



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T( $\mu$ s)	1/T(kHz)	VBW Setting
802.11b	97.63	8240	0.12	300Hz
802.11g	87.34	1380	0.72	1kHz
802.11n HT20	86.49	1280	0.78	1kHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

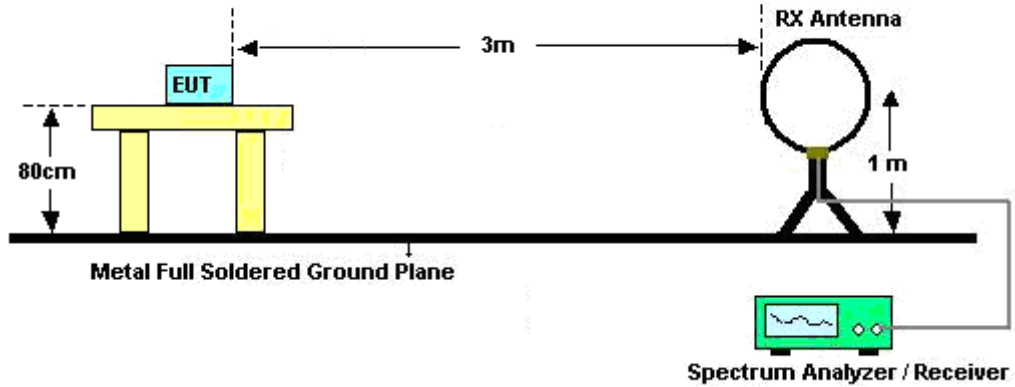

For radiated emissions from 30MHz to 1GHz

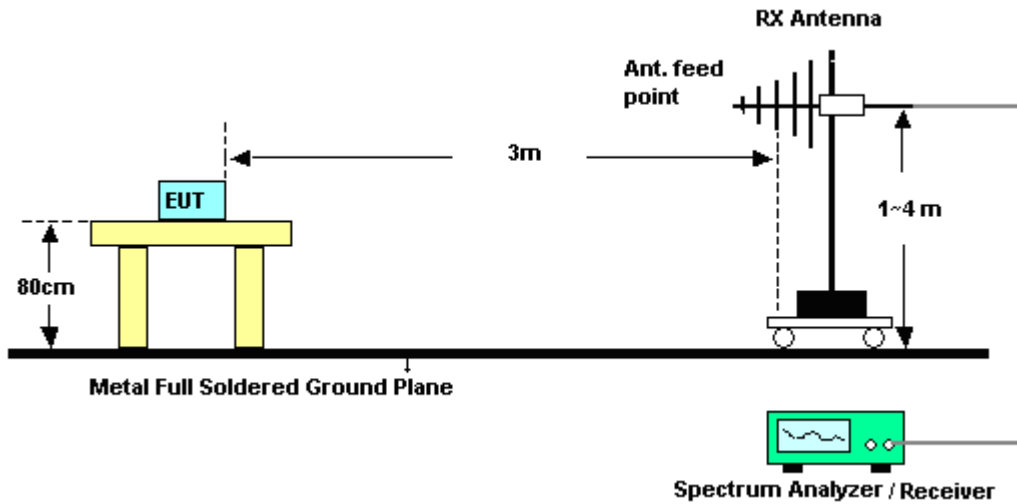

For radiated emissions above 1GHz

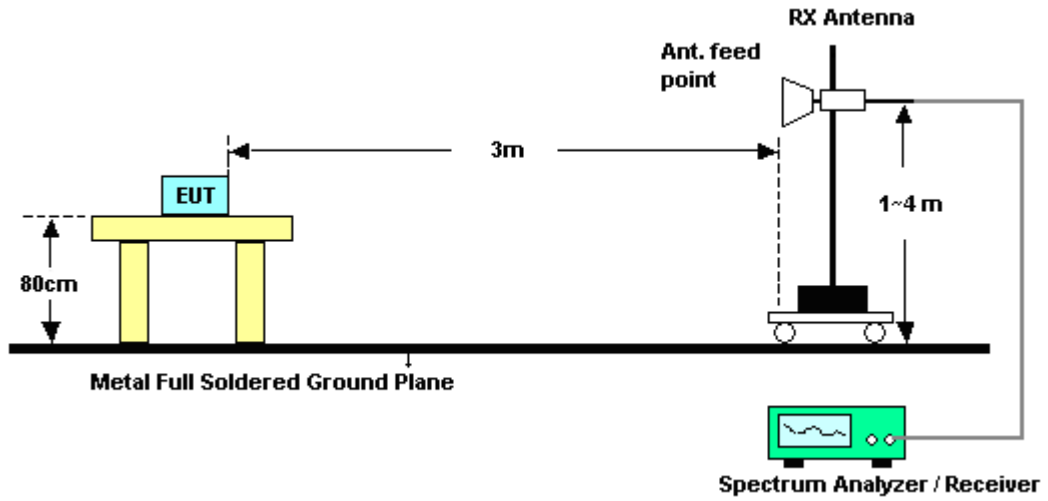

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	46~47%
Test Channel :	01	Test Engineer :	Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.29	50.28	-23.72	74	46.56	31.92	6.45	34.65	146	347	Peak
2390	38.95	-15.05	54	35.22	31.92	6.45	34.64	146	347	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.74	50.89	-23.11	74	47.17	31.92	6.45	34.65	100	307	Peak
2389.83	39.63	-14.37	54	35.9	31.92	6.45	34.64	100	307	Average

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	46~47%
Test Channel :	11	Test Engineer :	Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.83	54.01	-19.99	74	50.06	31.99	6.59	34.63	142	142	Peak
2486.71	43.73	-10.27	54	39.78	31.99	6.59	34.63	142	142	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2486.68	53.15	-20.85	74	49.2	31.99	6.59	34.63	100	347	Peak
2486.89	42.61	-11.39	54	38.66	31.99	6.59	34.63	100	347	Average



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	46~47%
Test Channel :	01	Test Engineer :	Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.56	70.25	-3.75	74	66.53	31.92	6.45	34.65	146	140	Peak
2390	47.56	-6.44	54	43.83	31.92	6.45	34.64	146	140	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	72.57	-1.43	74	68.84	31.92	6.45	34.64	100	312	Peak
2390	50.28	-3.72	54	46.55	31.92	6.45	34.64	100	312	Average

Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	46~47%
Test Channel :	11	Test Engineer :	Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.04	69.09	-4.91	74	65.14	31.99	6.59	34.63	115	140	Peak
2483.5	48.91	-5.09	54	44.96	31.99	6.59	34.63	115	140	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	72.99	-1.01	74	69.04	31.99	6.59	34.63	120	285	Peak
2483.5	50.64	-3.36	54	46.69	31.99	6.59	34.63	120	285	Average



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	46~47%
Test Channel :	01	Test Engineer :	Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.660	63.83	-10.17	74.00	60.11	31.92	6.45	34.65	152	314	Peak
2390.000	43.12	-10.88	54.00	39.39	31.92	6.45	34.64	152	314	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.200	71.93	-2.07	74.00	68.21	31.92	6.45	34.65	100	120	Peak
2390.000	48.66	-5.34	54.00	44.93	31.92	6.45	34.64	100	120	Average

Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	46~47%
Test Channel :	11	Test Engineer :	Abi Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.4	70.93	-3.07	74	66.98	31.99	6.59	34.63	109	203	Peak
2483.5	49.3	-4.7	54	45.35	31.99	6.59	34.63	109	203	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.46	73.56	-0.44	74	69.61	31.99	6.59	34.63	100	121	Peak
2483.5	51.6	-2.4	54	47.65	31.99	6.59	34.63	100	121	Average



### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	102.41	-	-	98.63	31.93	6.49	34.64	146	347	Average
2414	106.6	-	-	102.82	31.93	6.49	34.64	146	347	Peak
4824	44.82	-29.18	74	61.06	34.4	10.17	60.81	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	101.48	-	-	97.7	31.93	6.49	34.64	100	307	Average
2414	105.99	-	-	102.21	31.93	6.49	34.64	100	307	Peak
4824	41.86	-32.14	74	58.1	34.4	10.17	60.81	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2436 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2436	99.28	-	-	95.46	31.94	6.52	34.64	159	226	Average
2436	103.93	-	-	100.11	31.94	6.52	34.64	159	226	Peak
4875	46.96	-27.04	74	63.1	34.37	10.18	60.69	100	0	Peak
7311	44.44	-29.56	74	58.41	35.61	10.94	60.52	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2438 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2438	103.27	-	-	99.43	31.96	6.52	34.64	102	349	Average
2438	107.39	-	-	103.55	31.96	6.52	34.64	102	349	Peak
4875	47.19	-26.81	74	63.33	34.37	10.18	60.69	100	0	Peak
7311	43.34	-30.66	74	57.31	35.61	10.94	60.52	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
73.2	9.61	-30.39	40	33.92	6.5	0.96	31.77	-	-	Peak
170.4	13.45	-30.05	43.5	33.83	9.76	1.61	31.75	-	-	Peak
236.28	13	-33	46	32.02	11.04	1.68	31.74	-	-	Peak
430.9	18.55	-27.45	46	31.33	16.8	2.27	31.85	-	-	Peak
610.1	21.89	-24.11	46	31.67	19.5	2.78	32.06	-	-	Peak
914.6	23.49	-22.51	46	30.47	21.05	3.36	31.39	100	126	Peak
2462	103.16	-	-	99.27	31.97	6.56	34.64	142	142	Average
2462	107.68	-	-	103.79	31.97	6.56	34.64	142	142	Peak
4923	43.19	-30.81	74	59.22	34.34	10.2	60.57	100	0	Peak
7386	43.46	-30.54	74	57.54	35.56	10.92	60.56	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2464 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
113.43	21.27	-22.23	43.5	39.77	12.07	1.18	31.75	-	-	Peak
157.71	17.98	-25.52	43.5	38.15	10.14	1.44	31.75	-	-	Peak
193.89	14.42	-29.08	43.5	35.57	9.1	1.5	31.75	-	-	Peak
365.8	18.14	-27.86	46	32.97	14.85	2.11	31.79	-	-	Peak
614.3	22.54	-23.46	46	32.27	19.54	2.78	32.05	-	-	Peak
820.1	25.56	-20.44	46	33.88	20.42	3.13	31.87	100	166	Peak
2464	103.46	-	-	99.57	31.97	6.56	34.64	100	347	Average
2464	107.48	-	-	103.59	31.97	6.56	34.64	100	347	Peak
4923	42.31	-31.69	74	58.34	34.34	10.2	60.57	100	0	Peak
7386	43.56	-30.44	74	57.64	35.56	10.92	60.56	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2410 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2410	95	-	-	91.22	31.93	6.49	34.64	146	140	Average
2410	105.08	-	-	101.3	31.93	6.49	34.64	146	140	Peak
4824	40.96	-33.04	74	57.2	34.4	10.17	60.81	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	96.16	-	-	92.38	31.93	6.49	34.64	100	312	Average
2414	107.36	-	-	103.58	31.93	6.49	34.64	100	312	Peak
4824	40.97	-33.03	74	57.21	34.4	10.17	60.81	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2439 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2439	98.64	-	-	94.8	31.96	6.52	34.64	141	142	Average
2439	108.94	-	-	105.1	31.96	6.52	34.64	141	142	Peak
4874	42.1	-31.9	74	58.24	34.37	10.18	60.69	100	0	Peak
7311	43.51	-30.49	74	57.48	35.61	10.94	60.52	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2439 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2439	97.26	-	-	93.42	31.96	6.52	34.64	100	171	Average
2439	107.89	-	-	104.05	31.96	6.52	34.64	100	171	Peak
4875	40.93	-33.07	74	57.07	34.37	10.18	60.69	100	0	Peak
7311	42.75	-31.25	74	56.72	35.61	10.94	60.52	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2464 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
38.64	11.91	-28.09	40	29.55	13.42	0.73	31.79	-	-	Peak
113.7	20.44	-23.06	43.5	38.94	12.07	1.18	31.75	100	215	Peak
265.71	16.77	-29.23	46	33.34	13.36	1.8	31.73	-	-	Peak
365.1	18.06	-27.94	46	32.88	14.85	2.11	31.78	-	-	Peak
668.9	22.14	-23.86	46	31.85	19.49	2.83	32.03	-	-	Peak
834.8	23.79	-22.21	46	31.76	20.65	3.18	31.8	-	-	Peak
2464	94.76	-	-	90.87	31.97	6.56	34.64	115	140	Average
2464	104.81	-	-	100.92	31.97	6.56	34.64	115	140	Peak
4924	40.57	-33.43	74	56.59	34.34	10.21	60.57	100	0	Peak
7386	42.41	-31.59	74	56.49	35.56	10.92	60.56	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2460 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
103.71	15.19	-28.31	43.5	34.38	11.44	1.12	31.75	-	-	Peak
222.51	14.62	-31.38	46	35.33	9.4	1.63	31.74	-	-	Peak
292.17	14.88	-31.12	46	31.69	13.04	1.87	31.72	-	-	Peak
411.3	18.68	-27.32	46	31.94	16.35	2.22	31.83	-	-	Peak
671	20.62	-25.38	46	30.32	19.49	2.84	32.03	-	-	Peak
865.6	23.1	-22.9	46	30.65	20.85	3.27	31.67	100	256	Peak
2460	97.39	-	-	93.5	31.97	6.56	34.64	120	285	Average
2460	107.67	-	-	103.78	31.97	6.56	34.64	120	285	Peak
4923	40.51	-33.49	74	56.54	34.34	10.2	60.57	100	0	Peak
7386	41.51	-32.49	74	55.59	35.56	10.92	60.56	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2410 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2410	92.76	-	-	88.98	31.93	6.49	34.64	152	314	Average
2410	103.09	-	-	99.31	31.93	6.49	34.64	152	314	Peak
4824	39.96	-34.04	74	56.2	34.4	10.17	60.81	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2410 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2410	95.52	-	-	91.74	31.93	6.49	34.64	100	120	Average
2410	105.42	-	-	101.64	31.93	6.49	34.64	100	120	Peak
4824	40.66	-33.34	74	56.9	34.4	10.17	60.81	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2439 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2439	100.98	-	-	97.14	31.96	6.52	34.64	200	58	Average
2439	111.17	-	-	107.33	31.96	6.52	34.64	200	58	Peak
4875	42.25	-31.75	74	58.39	34.37	10.18	60.69	100	0	Peak
7311	44.43	-29.57	74	58.4	35.61	10.94	60.52	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2439 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2439	99.77	-	-	95.93	31.96	6.52	34.64	100	119	Average
2439	109.92	-	-	106.08	31.96	6.52	34.64	100	119	Peak
4875	41.56	-32.44	74	57.7	34.37	10.18	60.69	100	0	Peak
7311	44.23	-29.77	74	58.2	35.61	10.94	60.52	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2464 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
88.32	11.61	-31.89	43.5	34.05	8.28	1.04	31.76	-	-	Peak
149.34	18.75	-24.75	43.5	38.48	10.68	1.34	31.75	-	-	Peak
187.41	12.51	-30.99	43.5	33.75	9.04	1.47	31.75	-	-	Peak
414.1	21.04	-24.96	46	34.15	16.5	2.23	31.84	-	-	Peak
700.4	26.33	-19.67	46	36.06	19.4	2.89	32.02	100	244	Peak
908.3	23.82	-22.18	46	30.89	21.02	3.37	31.46	-	-	Peak
2464	94.12	-	-	90.23	31.97	6.56	34.64	109	203	Average
2464	104.58	-	-	100.69	31.97	6.56	34.64	109	203	Peak
4923	40.66	-33.34	74	56.69	34.34	10.2	60.57	100	0	Peak
7386	42.55	-31.45	74	56.63	35.56	10.92	60.56	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	24~25°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	46~47%
<b>Test Engineer :</b>	Abi Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2464 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
120.18	25.11	-18.39	43.5	43.44	12.2	1.22	31.75	100	269	Peak
187.68	12.6	-30.9	43.5	33.82	9.06	1.47	31.75	-	-	Peak
251.13	15.34	-30.66	46	32.78	12.55	1.74	31.73	-	-	Peak
400.8	18	-28	46	31.78	15.85	2.19	31.82	-	-	Peak
665.4	24.7	-21.3	46	34.45	19.45	2.83	32.03	-	-	Peak
876.1	24.73	-21.27	46	32.16	20.9	3.3	31.63	-	-	Peak
2464	97.54	-	-	93.65	31.97	6.56	34.64	100	121	Average
2464	108.24	-	-	104.35	31.97	6.56	34.64	100	121	Peak
4923	42.3	-31.7	74	58.33	34.34	10.2	60.57	100	0	Peak
7386	42.84	-31.16	74	56.92	35.56	10.92	60.56	100	0	Peak



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.6.4 Test Setup

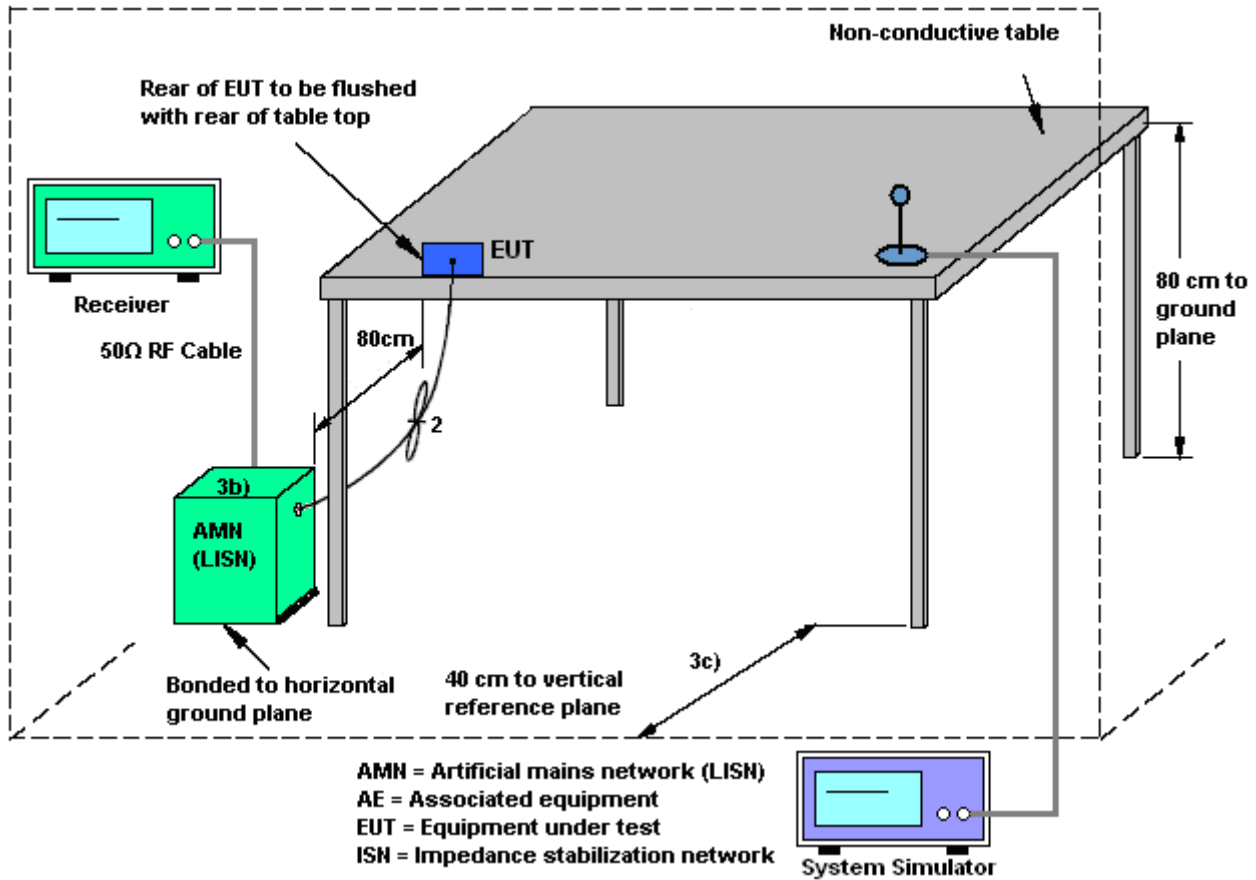



### 3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + MP3		

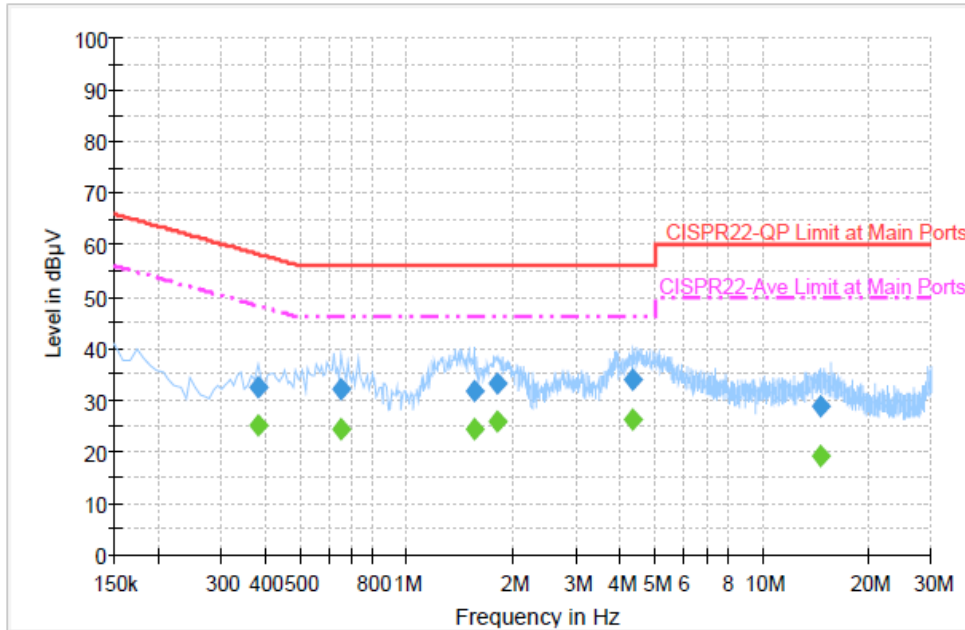

#### Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.382000	32.4	Off	L1	19.3	25.8	58.2
0.654000	32.2	Off	L1	19.4	23.8	56.0
1.550000	31.6	Off	L1	19.4	24.4	56.0
1.790000	33.2	Off	L1	19.5	22.8	56.0
4.342000	33.8	Off	L1	19.6	22.2	56.0
14.694000	29.0	Off	L1	19.9	31.0	60.0

#### Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.382000	25.1	Off	L1	19.3	23.1	48.2
0.654000	24.2	Off	L1	19.4	21.8	46.0
1.550000	24.4	Off	L1	19.4	21.6	46.0
1.790000	25.8	Off	L1	19.5	20.2	46.0
4.342000	26.2	Off	L1	19.6	19.8	46.0
14.694000	19.2	Off	L1	19.9	30.8	50.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + MP3		

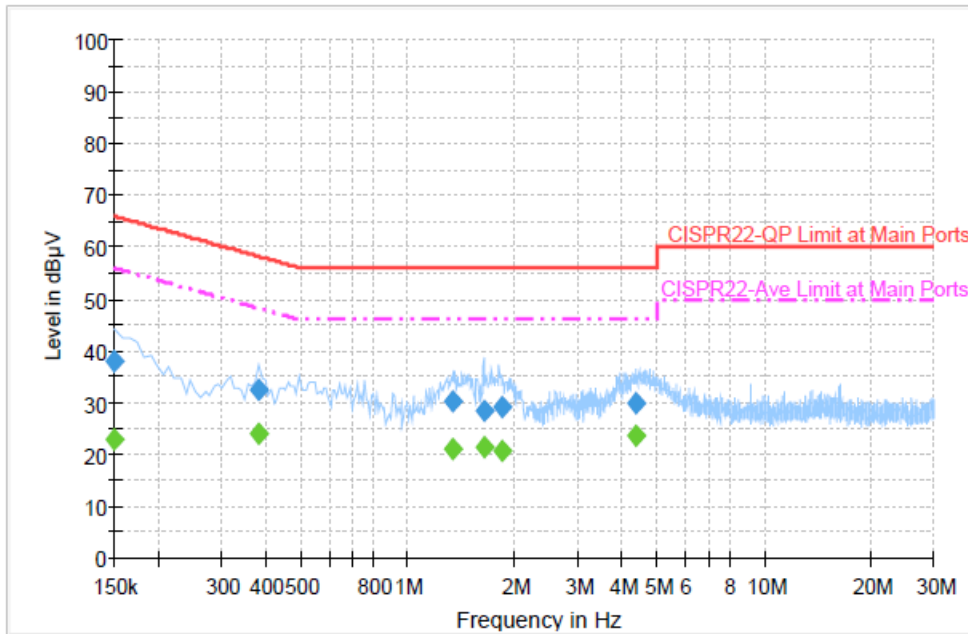

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	38.0	Off	N	19.4	28.0	66.0
0.382000	32.4	Off	N	19.3	25.8	58.2
1.334000	30.2	Off	N	19.5	25.8	56.0
1.638000	28.3	Off	N	19.5	27.7	56.0
1.830000	29.2	Off	N	19.6	26.8	56.0
4.366000	29.8	Off	N	19.6	26.2	56.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	22.8	Off	N	19.4	33.2	56.0
0.382000	24.0	Off	N	19.3	24.2	48.2
1.334000	21.2	Off	N	19.5	24.8	46.0
1.638000	21.5	Off	N	19.5	24.5	46.0
1.830000	20.6	Off	N	19.6	25.4	46.0
4.366000	23.5	Off	N	19.6	22.5	46.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz~40GHz	Oct. 23, 2013	May 02, 2014~ Jun. 20, 2014	Oct. 22, 2014	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 17, 2013	May 02, 2014~ Jun. 20, 2014	Aug. 16, 2014	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 17, 2013	May 02, 2014~ Jun. 20, 2014	Aug. 16, 2014	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101067	9kHz ~ 30GHz	Nov. 20, 2013	Jun. 17, 2014~ Jun. 20, 2014	Nov. 19, 2014	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY442110 30	9kHz ~ 26.5GHz	Dec. 02, 2013	Jun. 17, 2014~ Jun. 20, 2014	Dec. 01, 2014	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/00 03	20MHz ~ 1000MHz	May 06, 2014	Jun. 17, 2014~ Jun. 20, 2014	May 05, 2015	Radiation (03CH06-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9kHz ~ 30MHz	Jul. 03, 2012	Jun. 17, 2014~ Jun. 20, 2014	Jul. 02, 2014	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL6112B	2885	30MHz ~ 2GHz	Oct. 10, 2013	Jun. 17, 2014~ Jun. 20, 2014	Oct. 09, 2014	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 02, 2013	Jun. 17, 2014~ Jun. 20, 2014	Aug. 01, 2014	Radiation (03CH06-HY)
Amplifier	SONOMA	310N	186713	9kHz ~ 1GHz	Apr. 16, 2014	Jun. 17, 2014~ Jun. 20, 2014	Apr. 15, 2015	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 18, 2013	Jun. 17, 2014~ Jun. 20, 2014	Jul. 17, 2014	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917 0251	15GHz ~ 40GHz	Oct. 03, 2013	Jun. 17, 2014~ Jun. 20, 2014	Oct. 02, 2014	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A019 17	1GHz ~ 26.5GHz	Apr. 10, 2014	Jun. 17, 2014~ Jun. 20, 2014	Apr. 09, 2015	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/0 0	0 ~ 360 degree	N/A	Jun. 17, 2014~ Jun. 20, 2014	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208 212	1 m ~ 4 m	N/A	Jun. 17, 2014~ Jun. 20, 2014	N/A	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	May 29, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	May 29, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	May 29, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 29, 2014	N/A	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------