



# FCC RF Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 5137  
FCC ID : IHDT56UC2  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Apr. 15, 2015 and testing was completed on May 17, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56UC2

Page Number : 1 of 64

Report Issued Date : Jun. 18, 2015

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 1.0



# TABLE OF CONTENTS

**REVISION HISTORY** ..... 3

**SUMMARY OF TEST RESULT** ..... 4

**1 GENERAL DESCRIPTION** ..... 5

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 7

    1.7 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST** ..... 8

    2.1 Descriptions of Test Mode ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example ..... 13

**3 TEST RESULT** ..... 14

    3.1 Number of Channel Measurement ..... 14

    3.2 Hopping Channel Separation Measurement ..... 16

    3.3 Dwell Time Measurement ..... 23

    3.4 20dB Bandwidth Measurement ..... 26

    3.5 Peak Output Power Measurement ..... 33

    3.6 Conducted Band Edges Measurement ..... 35

    3.7 Conducted Spurious Emission Measurement ..... 42

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 52

    3.9 AC Conducted Emission Measurement ..... 58

    3.10 Antenna Requirements ..... 62

**4 LIST OF MEASURING EQUIPMENT** ..... 63

**5 UNCERTAINTY OF EVALUATION** ..... 64

**APPENDIX A. RADIATED SPURIOUS EMISSION**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.82 dB at 81.840 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.50 dB at 2.046 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.2 Manufacturer

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	5137
FCC ID	IHDT56UC2
IMEI Code	355486060017664 (Radiation) 355486060017805 (Conduction)
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC 2.4GHz WLAN 11b/g/n HT20 WLAN 11ac VHT20 5GHz WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v3.0 EDR Bluetooth v4.1 - LE
HW Version	P2
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



Accessory List	
AC Adapter 1	Brand Name : Motorola
	Model Name : SPN5791A
AC Adapter 2	Brand Name : Motorola
	Model Name : SPN5864A
AC Adapter 3	Brand Name : Motorola
	Model Name : SPN5886A
Earphone	Brand Name : Motorola
	Model Name : SJYN1305A
Battery	Brand Name : Motorola
	Model Name : FX30
USB cable	Brand Name : Motorola
	Model Name : SKN6461A

### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 10.36 dBm (0.0109 W) Bluetooth EDR (2Mbps) : 9.36 dBm (0.0086 W) Bluetooth EDR (3Mbps) : 9.78 dBm (0.0095 W)
Antenna Type	IFA Antenna type with gain -1.00 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH02-HY	CO05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	8.67 dBm	7.69 dBm	8.08 dBm
Ch39	2441MHz	10.36 dBm	9.36 dBm	9.78 dBm
Ch78	2480MHz	8.07 dBm	6.96 dBm	7.45 dBm

Channel	Frequency	Bluetooth Average Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	8.36 dBm	5.25 dBm	5.26 dBm
Ch39	2441MHz	10.11 dBm	7.00 dBm	7.02 dBm
Ch78	2480MHz	7.72 dBm	4.54 dBm	4.54 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
  2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.



## 2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
<b>Conducted Test Cases</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated Test Cases</b>	<b>Bluetooth BR 1Mbps GFSK</b> Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
<b>AC Conducted Emission</b>	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link + MP3 + Earphone + USB Cable (Charging from Adapter 1) Mode 2 GSM850 Idle + Bluetooth Link + WLAN Link + MP3 + Earphone + USB Cable (Charging from Adapter 2) Mode 3 GSM850 Idle + Bluetooth Link + WLAN Link + MP3 + Earphone + USB Cable (Charging from Adapter 3)		
<b>Remark:</b> 1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission. 2. The worst case of conducted emission is mode 3; only the test data of it was reported.			


## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>


<for Adapter 1>

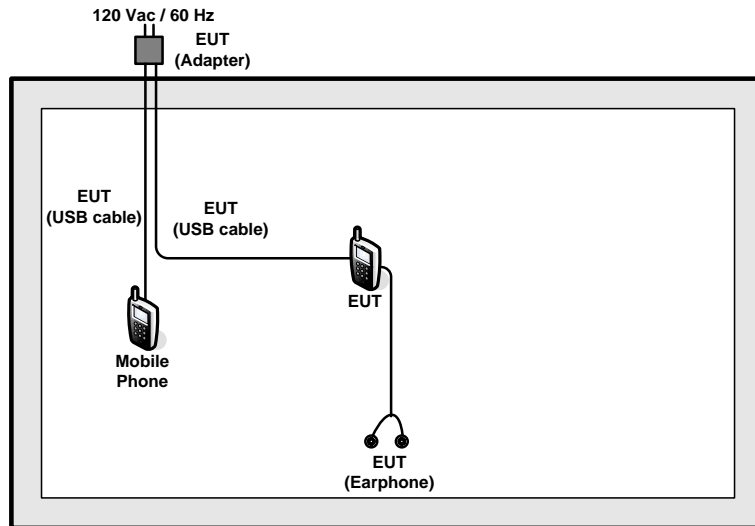

<for Adapter 2>

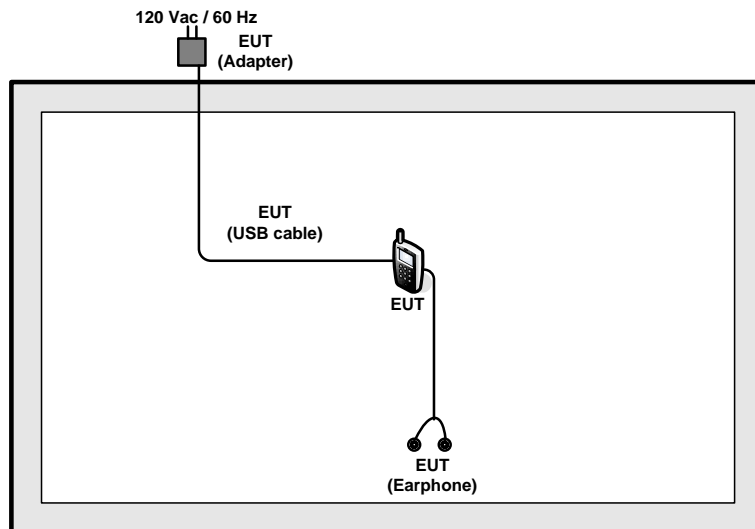


<for Adapter 3>

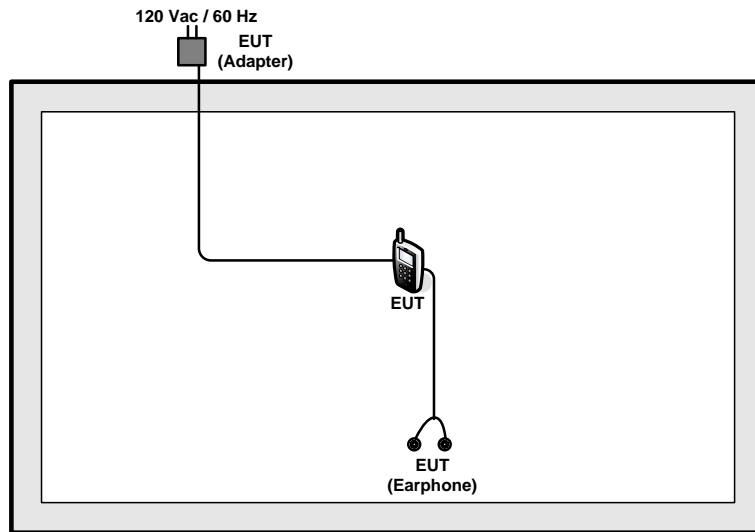


<AC Conducted Emission Mode>


<for Adapter 1>

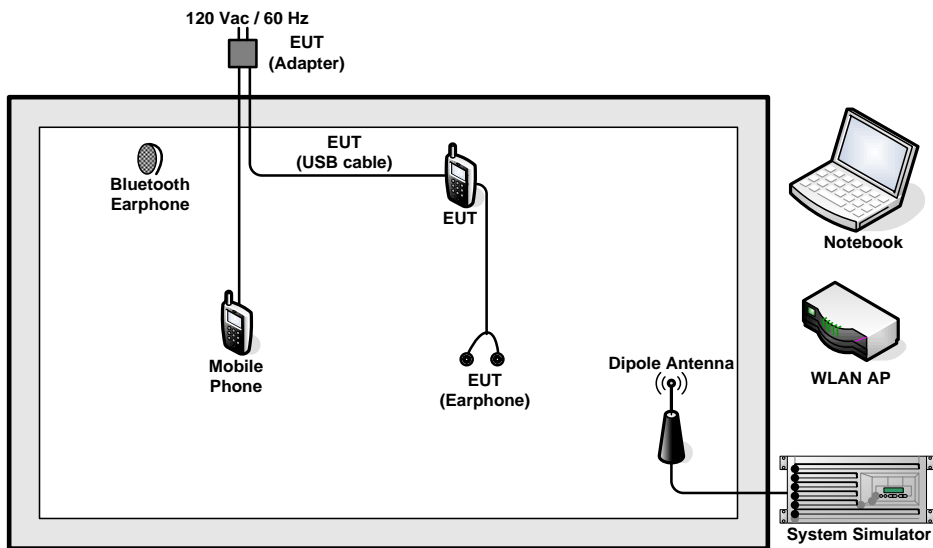

<for Adapter 2>

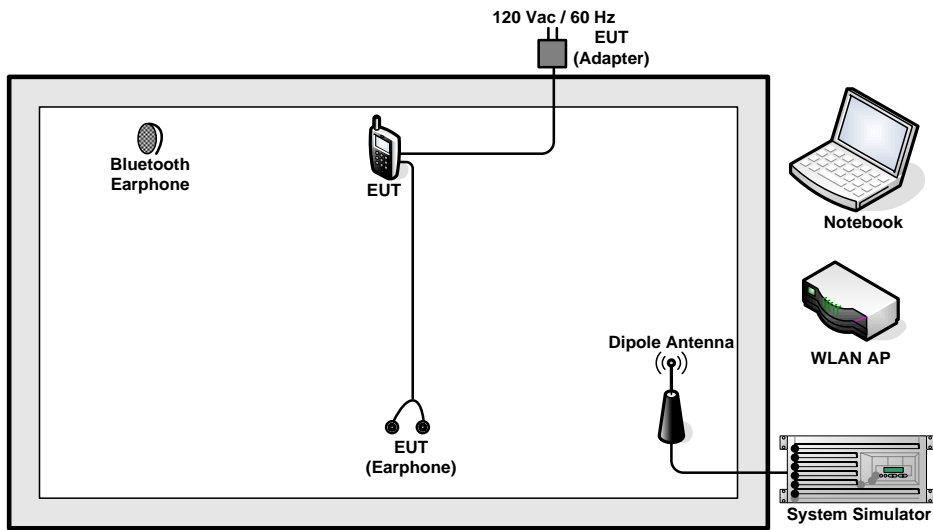

<for Adapter 3>

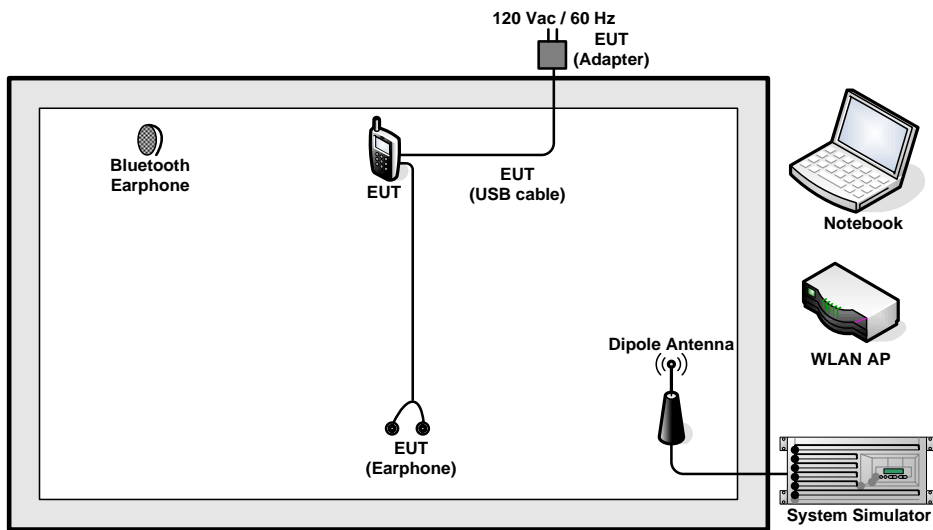



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Mobile Cellular Phone	Motorola Mobility, LLC	5137	IHDT56UC2	N/A	N/A
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, “QRCT” installed in the EUT make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

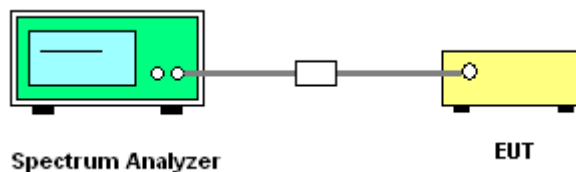


##### 3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

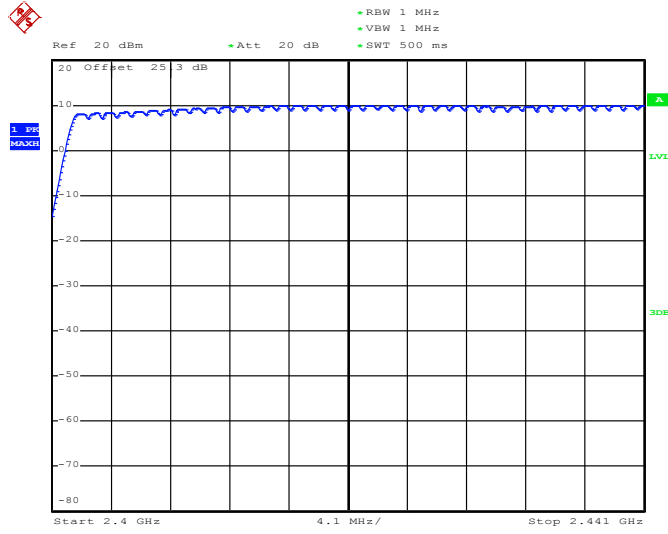

Date: 28.APR.2015 09:44:48

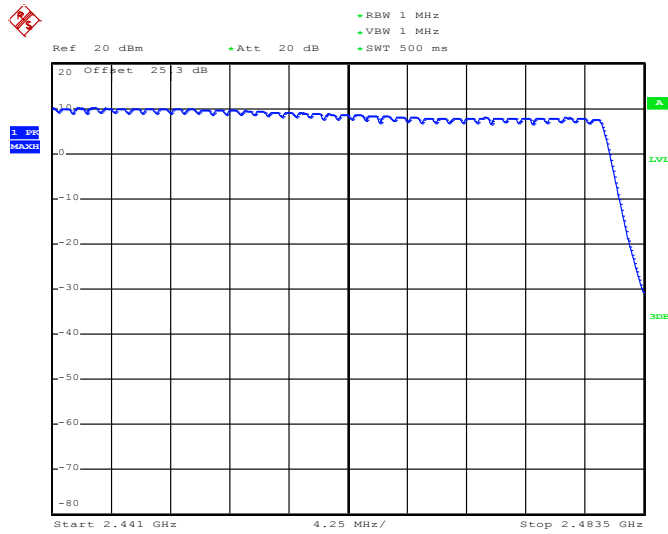

Date: 28.APR.2015 09:47:56

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

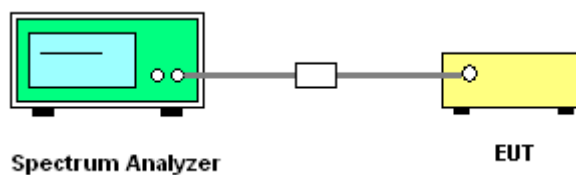




### 3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.5867	Pass
39	2441	1.008	0.5867	Pass
78	2480	1.008	0.5867	Pass


Channel Separation Plot on Channel 00 - 01

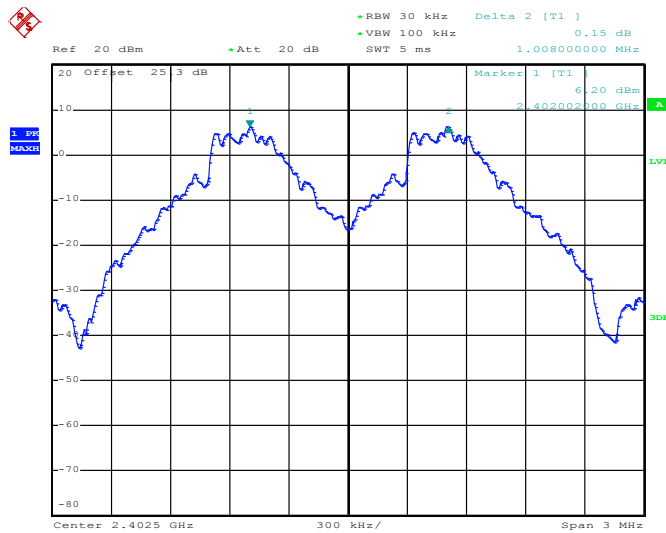

Date: 28.APR.2015 09:32:43




Channel Separation Plot on Channel 39 - 40

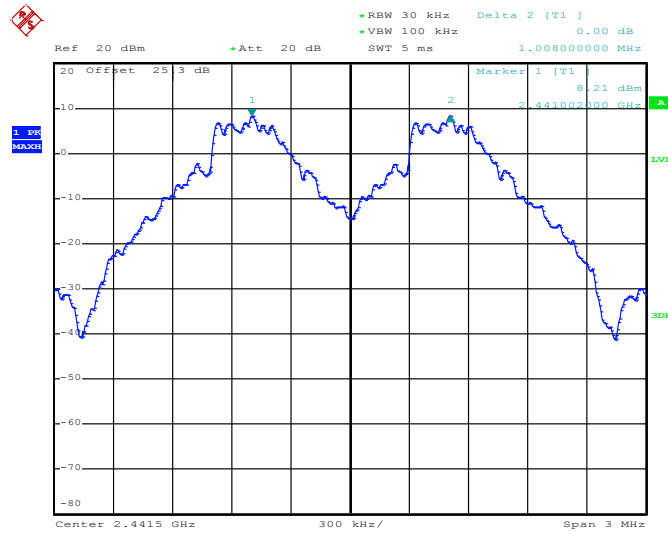

Date: 28.APR.2015 09:56:26

Channel Separation Plot on Channel 77 - 78

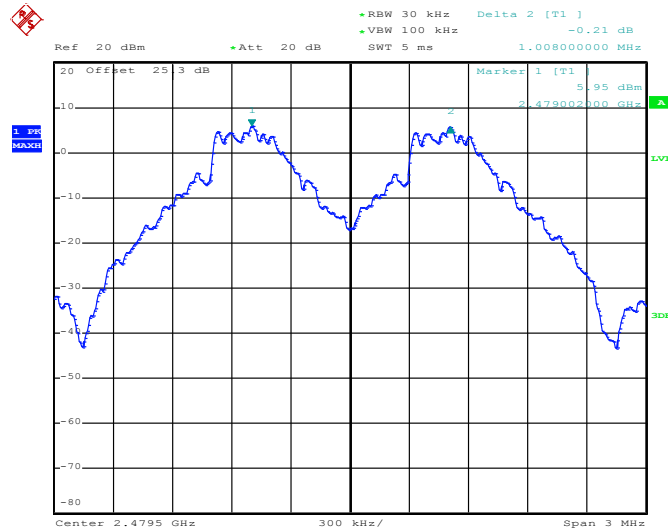


Date: 28.APR.2015 10:08:45



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8440	Pass
39	2441	1.002	0.8440	Pass
78	2480	1.002	0.8480	Pass


Channel Separation Plot on Channel 00 - 01

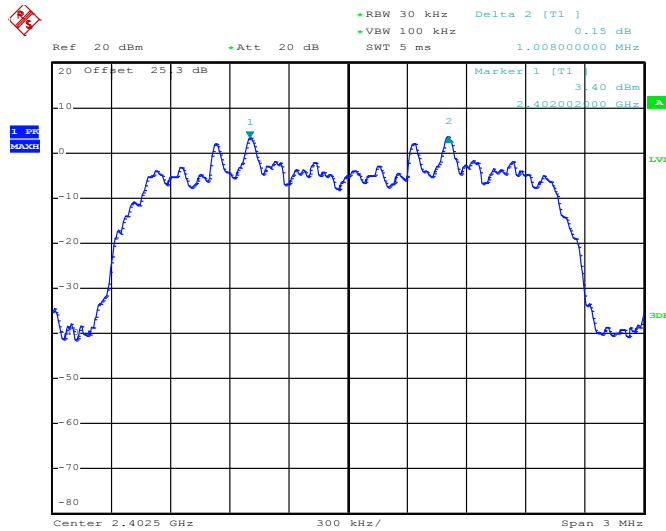

Date: 28.APR.2015 10:24:52




### Channel Separation Plot on Channel 39 - 40

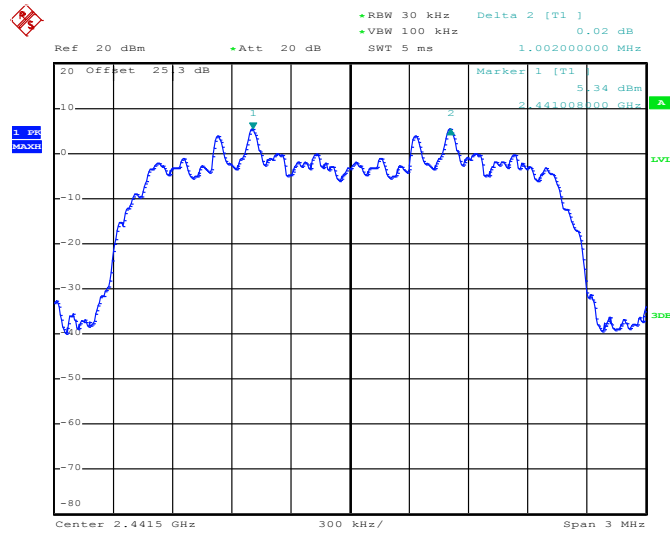

Date: 28.APR.2015 10:44:20

### Channel Separation Plot on Channel 77 - 78

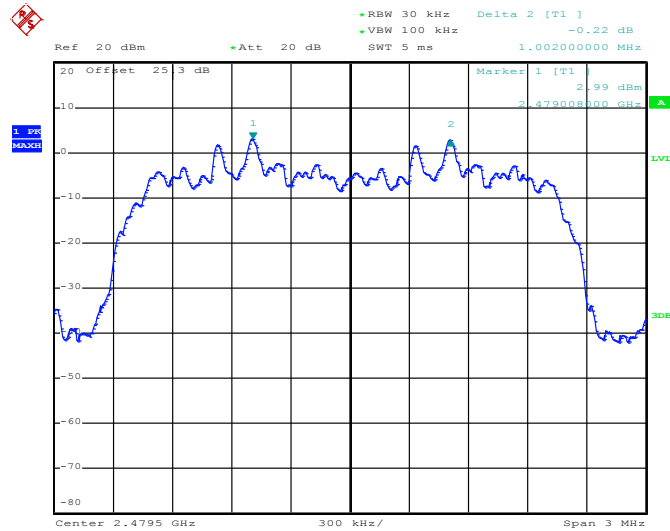


Date: 28.APR.2015 10:50:45



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8240	Pass
39	2441	1.002	0.8240	Pass
78	2480	1.002	0.8240	Pass


Channel Separation Plot on Channel 00 - 01

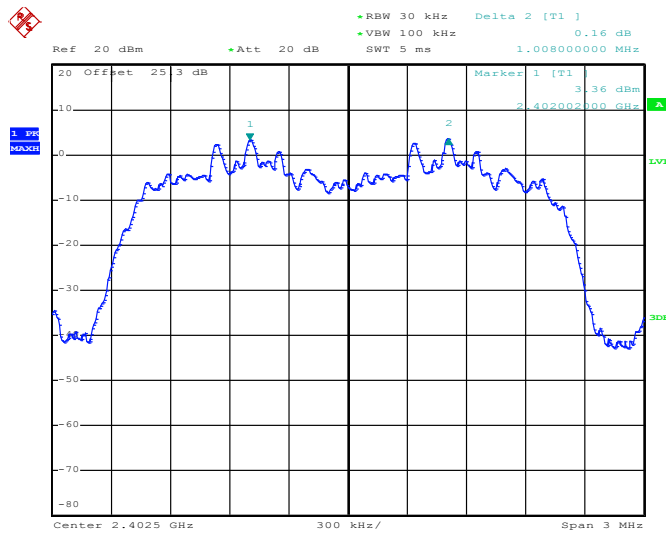

Date: 28.APR.2015 12:00:37




### Channel Separation Plot on Channel 39 - 40

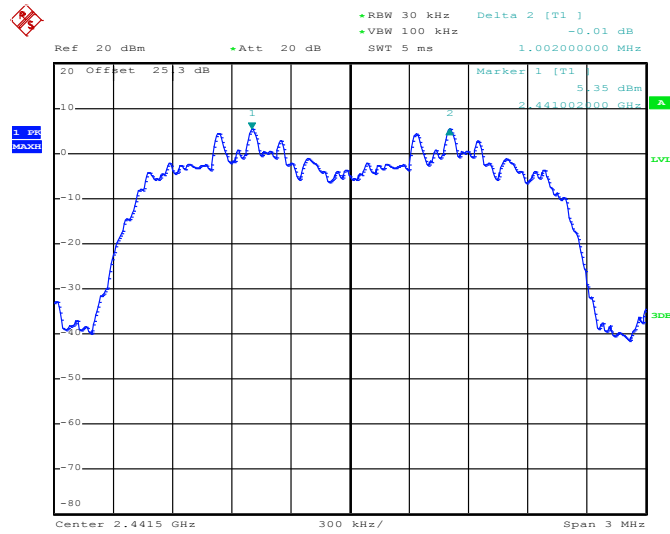

Date: 28.APR.2015 11:19:24

### Channel Separation Plot on Channel 77 - 78

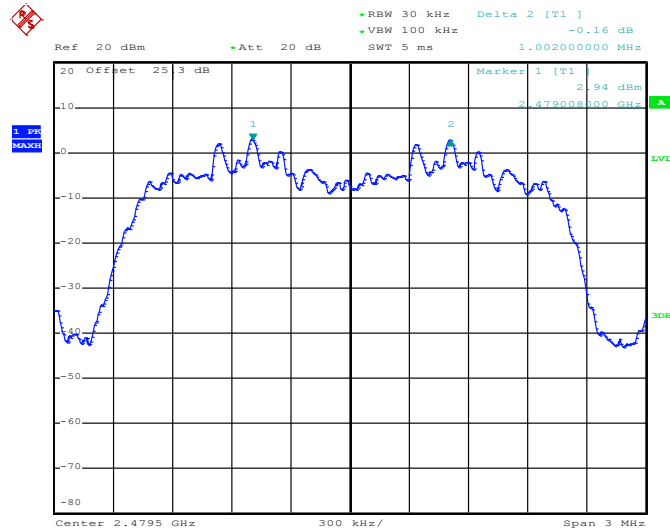

Date: 28.APR.2015 11:46:02

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

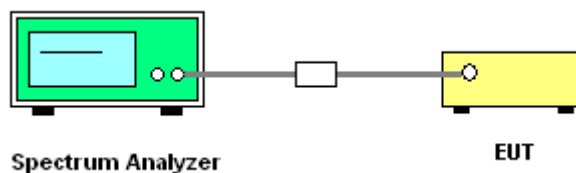



3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.34	2.90	0.15	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.  
 With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
 Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
 With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
 Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

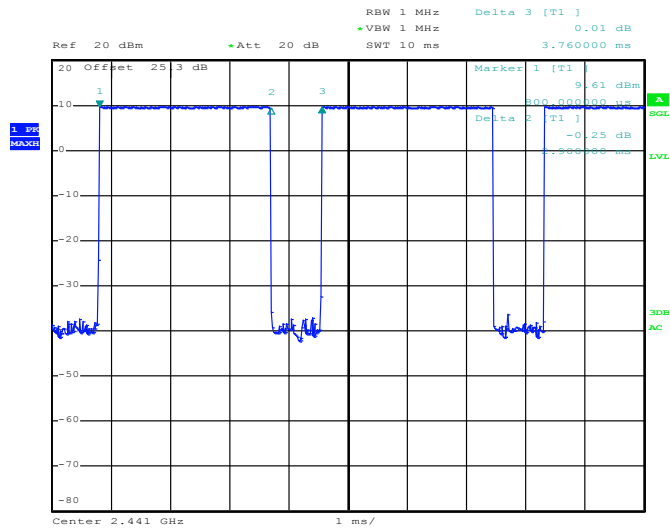

Date: 21.APR.2015 22:09:23

### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

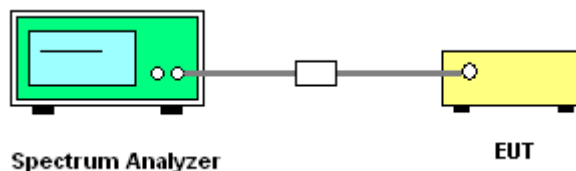




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.880
39	2441	0.880
78	2480	0.880


20 dB Bandwidth Plot on Channel 00

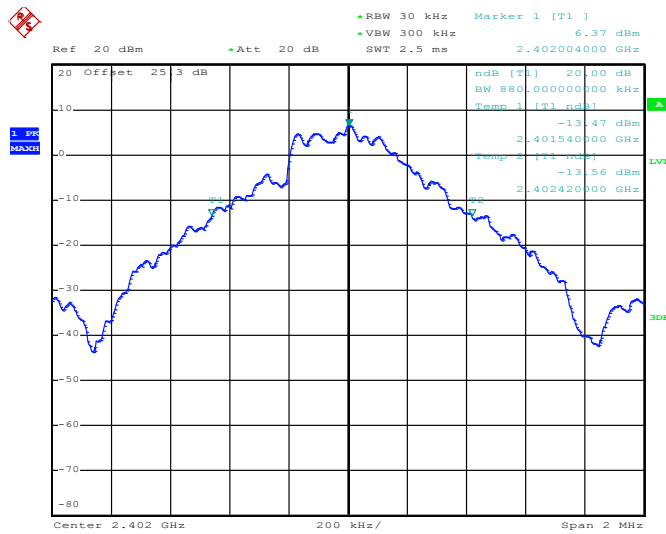

Date: 28.APR.2015 09:35:16




20 dB Bandwidth Plot on Channel 39

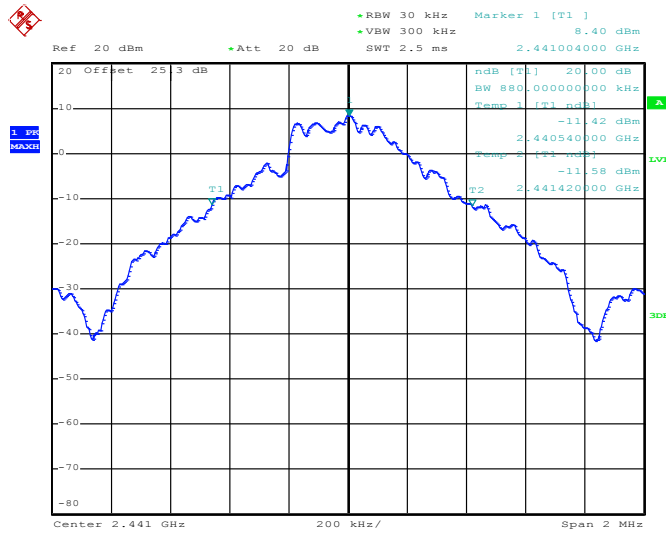

Date: 28.APR.2015 09:58:30

20 dB Bandwidth Plot on Channel 78

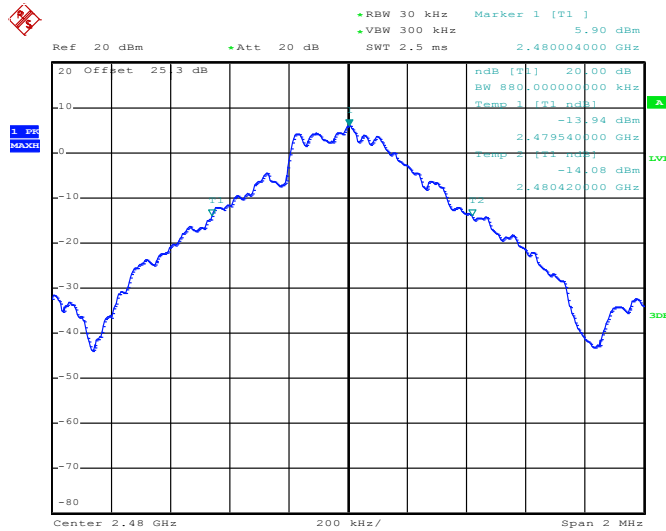


Date: 28.APR.2015 10:11:14



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.266
39	2441	1.266
78	2480	1.272


20 dB Bandwidth Plot on Channel 00

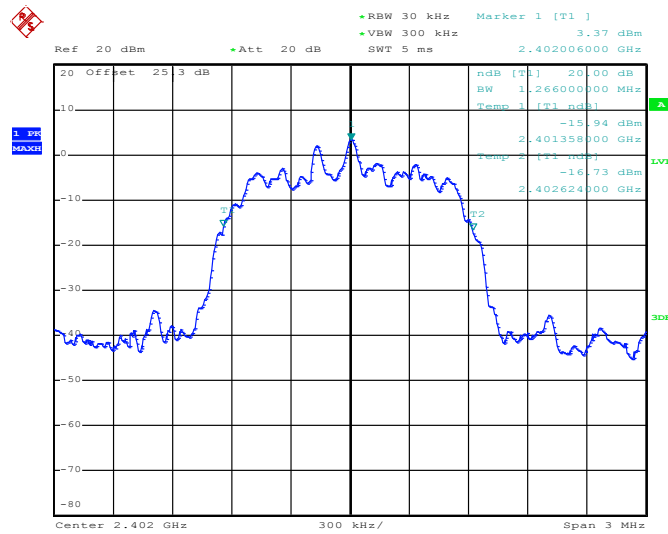

Date: 28.APR.2015 10:25:46




20 dB Bandwidth Plot on Channel 39

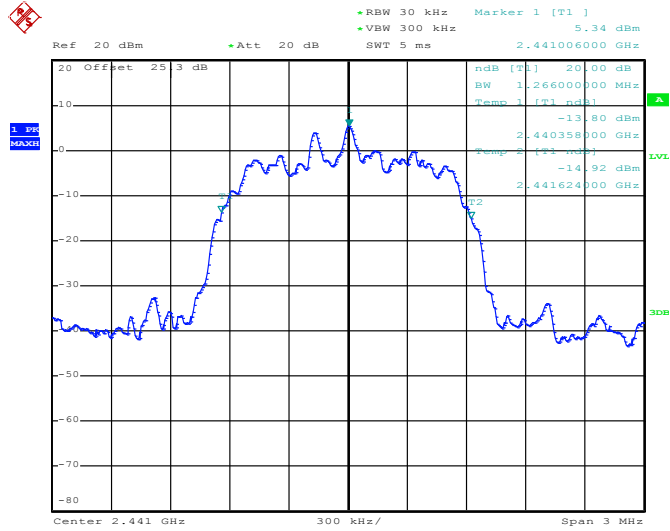

Date: 28.APR.2015 10:45:30

20 dB Bandwidth Plot on Channel 78

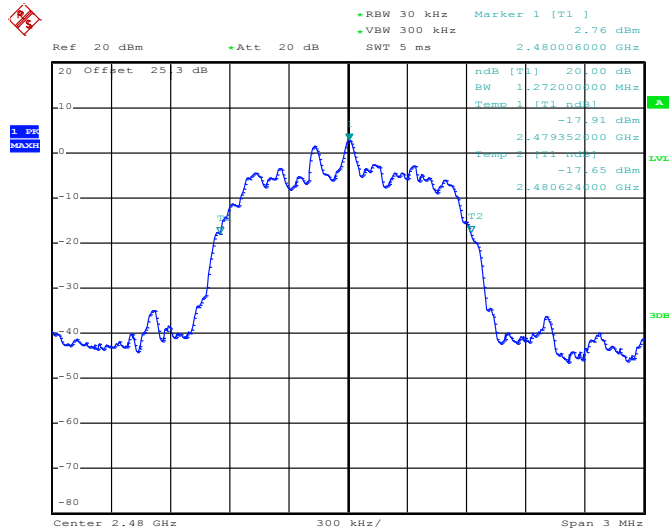


Date: 28.APR.2015 10:52:20



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.236
39	2441	1.236
78	2480	1.236


20 dB Bandwidth Plot on Channel 00

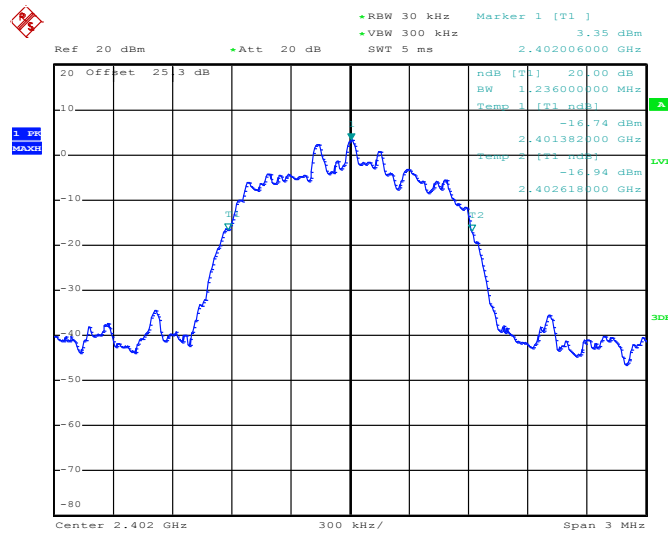

Date: 28.APR.2015 11:00:13




20 dB Bandwidth Plot on Channel 39

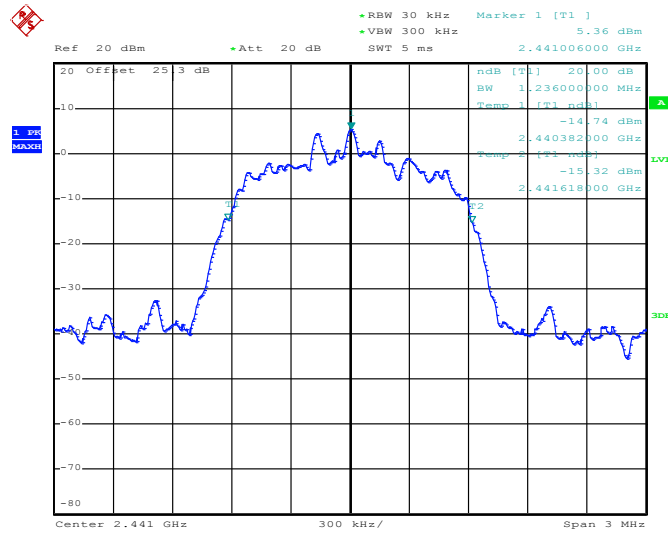

Date: 28.APR.2015 11:32:58

20 dB Bandwidth Plot on Channel 78

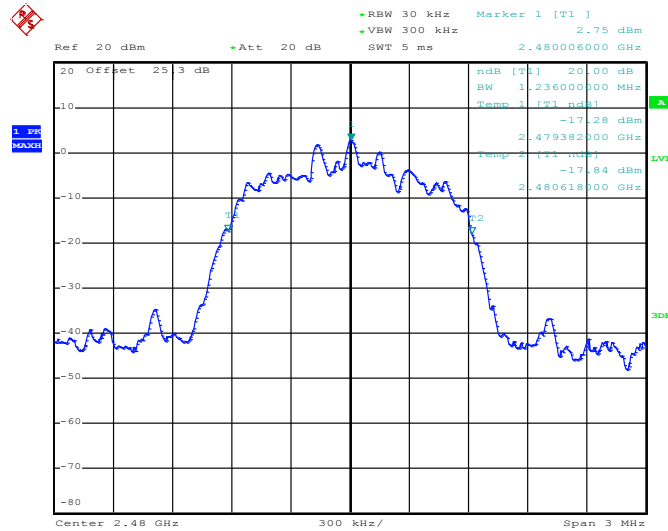

Date: 28.APR.2015 11:46:50

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### 3.5.4 Test Setup

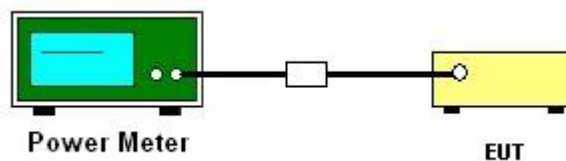



3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	8.67	20.97	Pass
39	2441	10.36	20.97	Pass
78	2480	8.07	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	7.69	20.97	Pass
39	2441	9.36	20.97	Pass
78	2480	6.96	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	8.08	20.97	Pass
39	2441	9.78	20.97	Pass
78	2480	7.45	20.97	Pass

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ( $\geq 1\%$  span=10MHz ), VBW = 300kHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

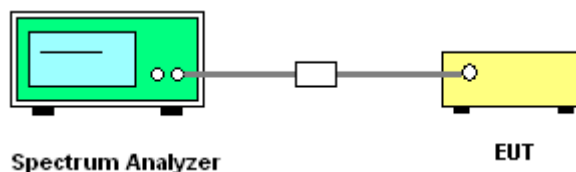




### 3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

Low Band Edge Plot on Channel 00

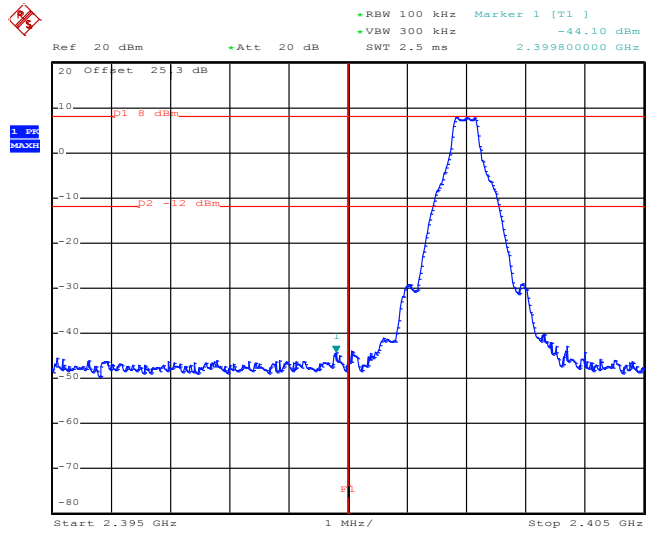

Date: 28.APR.2015 10:18:39

High Band Edge Plot on Channel 78

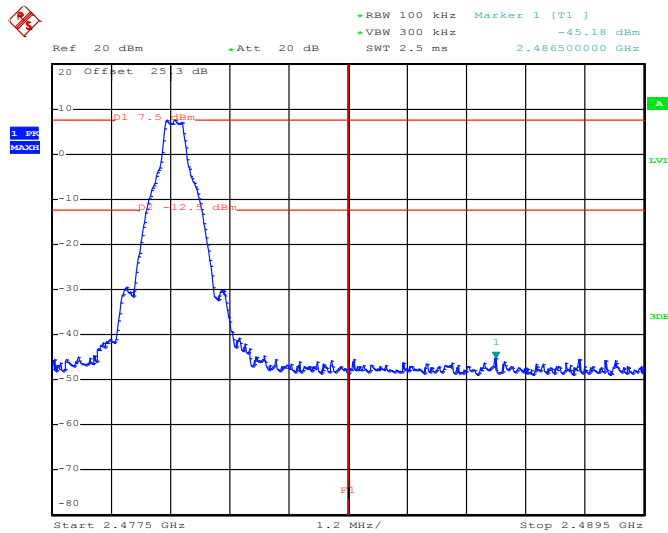


Date: 28.APR.2015 10:16:41




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

Low Band Edge Plot on Channel 00

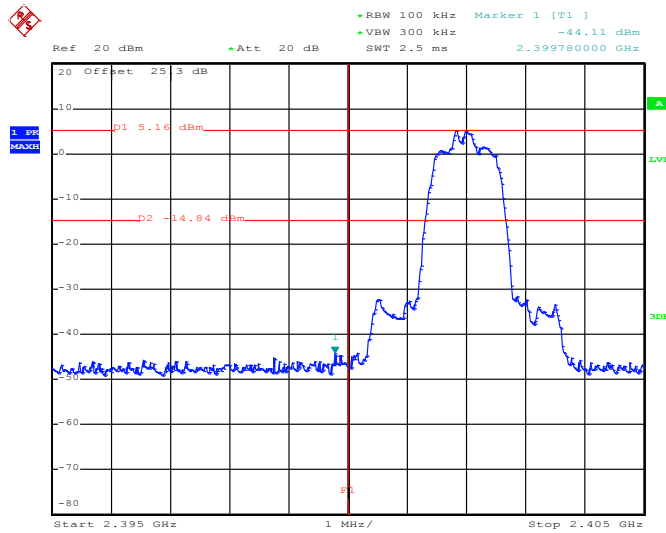

Date: 28.APR.2015 10:55:48

High Band Edge Plot on Channel 78

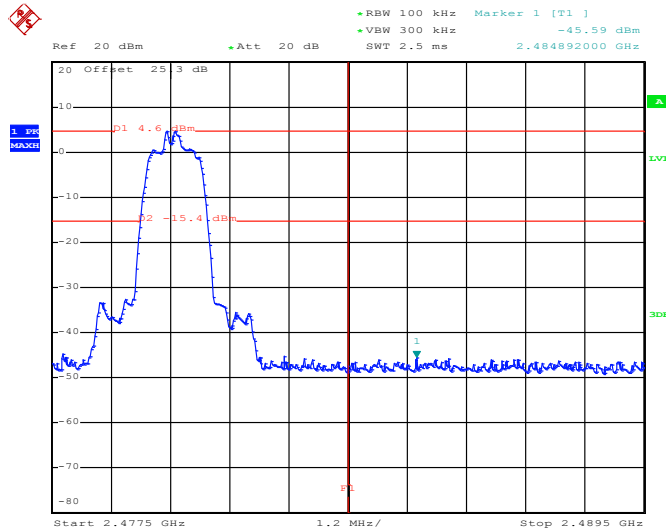


Date: 28.APR.2015 10:54:39




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

Low Band Edge Plot on Channel 00

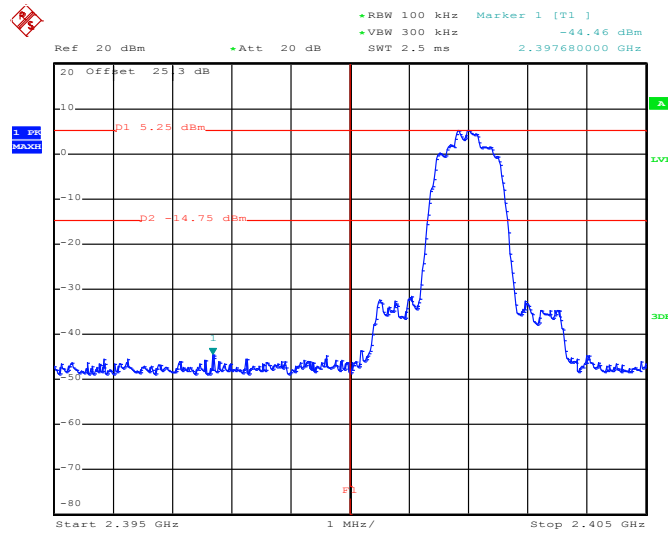

Date: 28.APR.2015 13:41:27

High Band Edge Plot on Channel 78

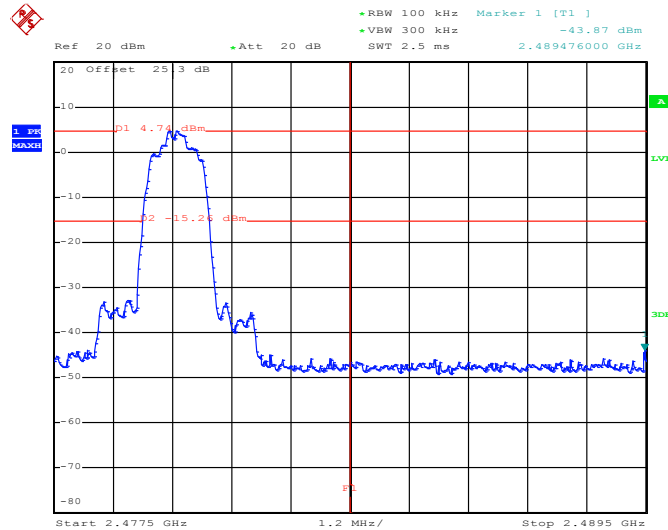


Date: 28.APR.2015 13:42:22



### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

#### 1Mbps Hopping Mode Low Band Edge Plot

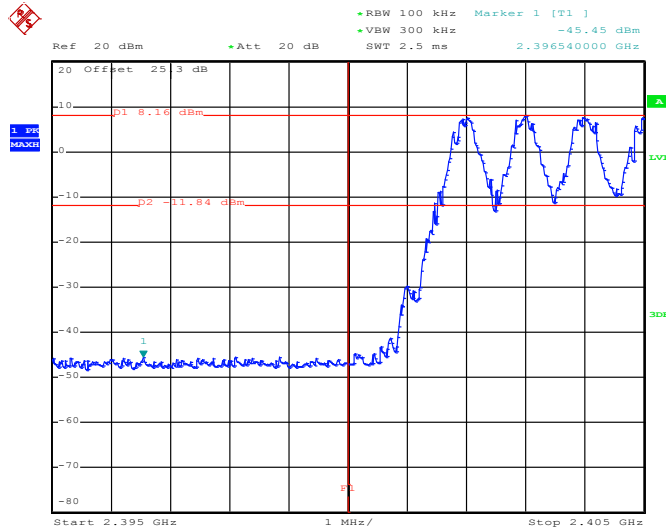

Date: 28.APR.2015 09:49:41

#### 1Mbps Hopping Mode High Band Edge Plot

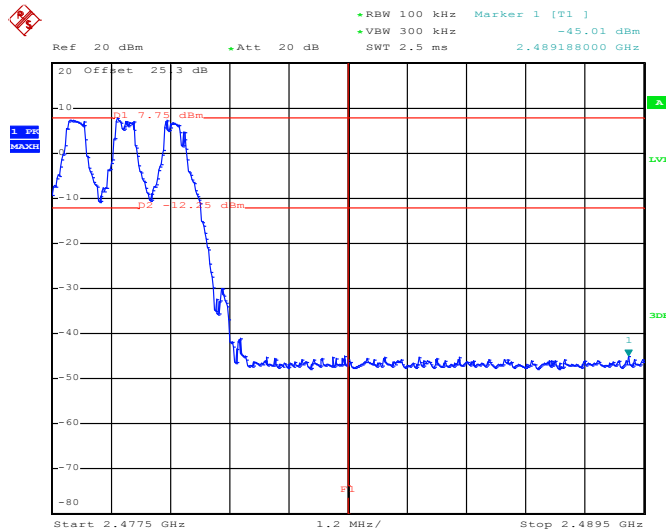


Date: 28.APR.2015 09:51:38




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

2Mbps Hopping Mode Low Band Edge Plot

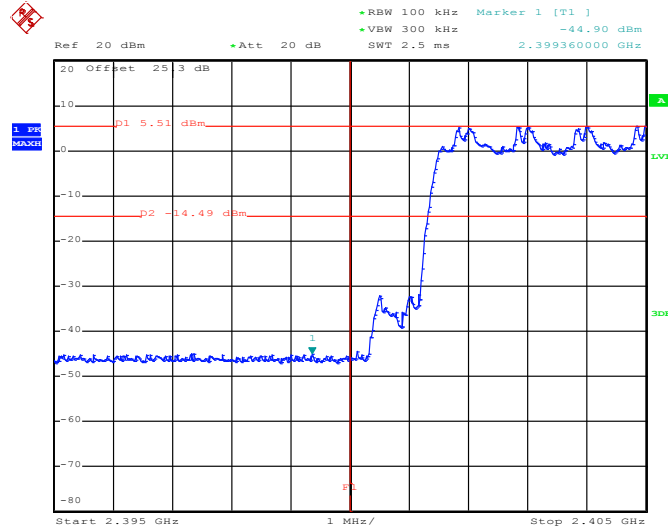

Date: 28.APR.2015 10:38:43

2Mbps Hopping Mode High Band Edge Plot

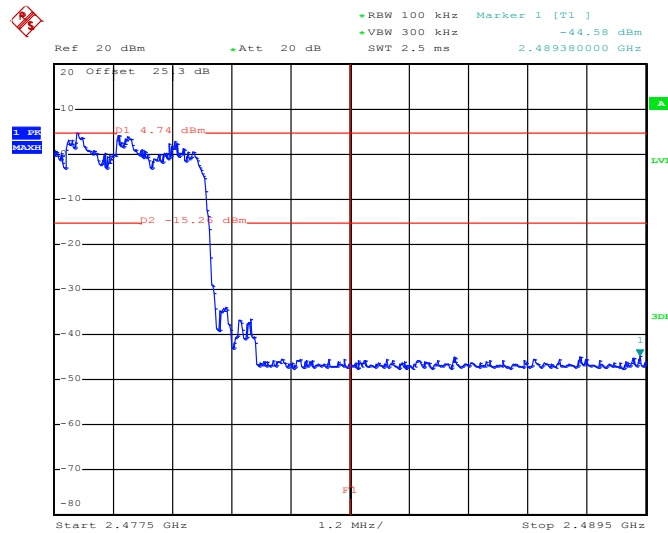


Date: 28.APR.2015 10:41:24




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Derek Hsu and Tommy Lee	Relative Humidity :	48~53%

3Mbps Hopping Mode Low Band Edge Plot

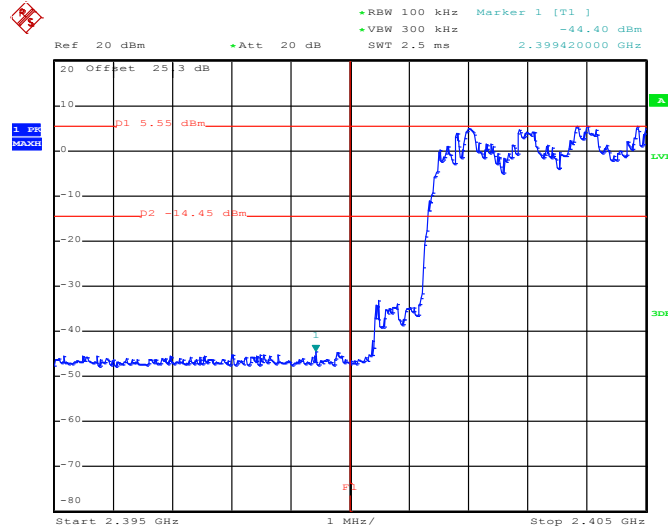

Date: 28.APR.2015 13:34:51

3Mbps Hopping Mode High Band Edge Plot

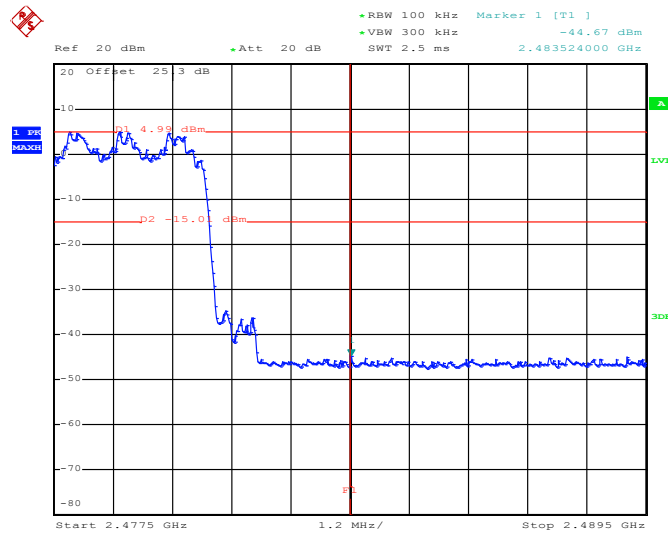

Date: 28.APR.2015 13:38:52

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

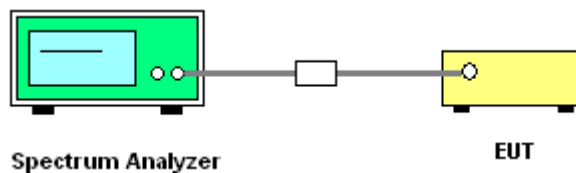




### 3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

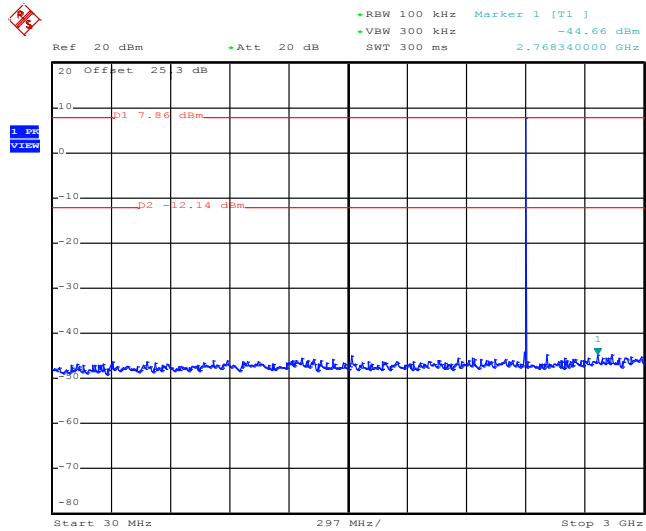

Date: 28.APR.2015 10:02:28

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

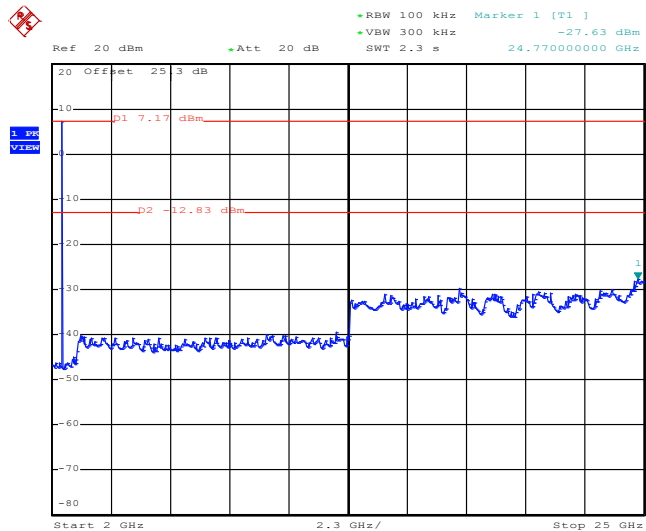


Date: 28.APR.2015 10:02:50




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

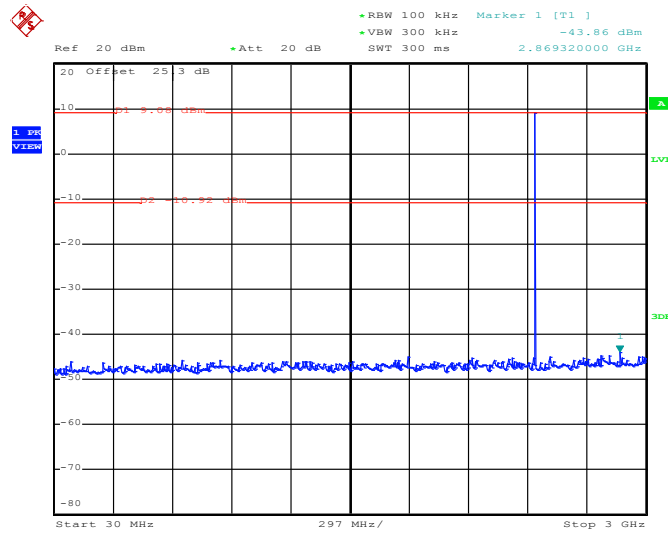

Date: 28.APR.2015 10:00:48

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

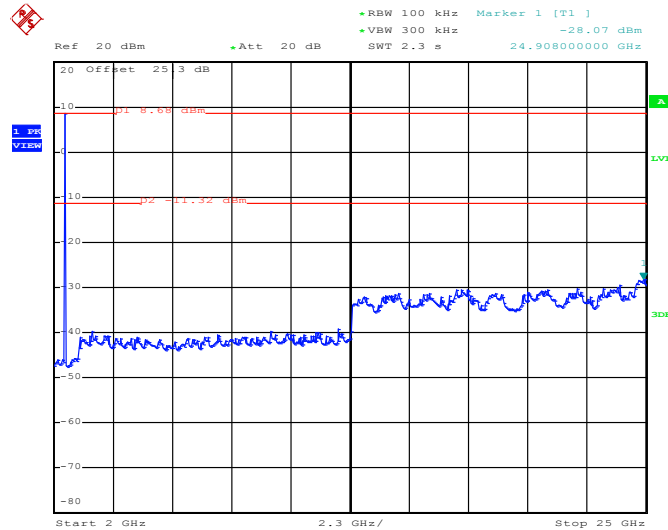


Date: 28.APR.2015 10:01:10




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

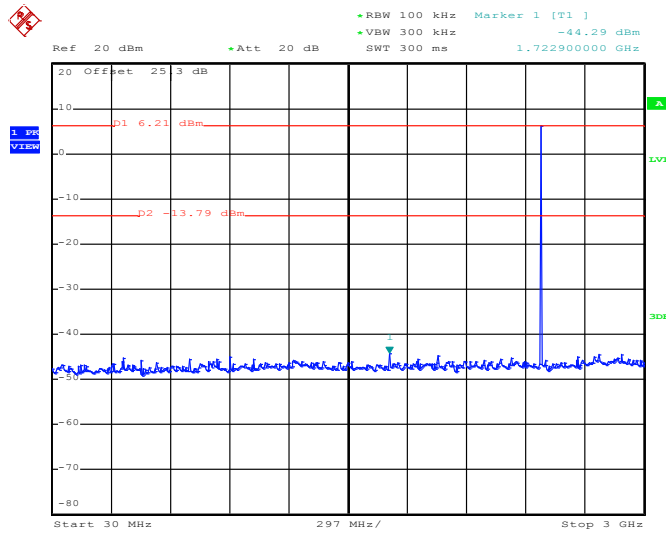

Date: 28.APR.2015 10:12:25

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

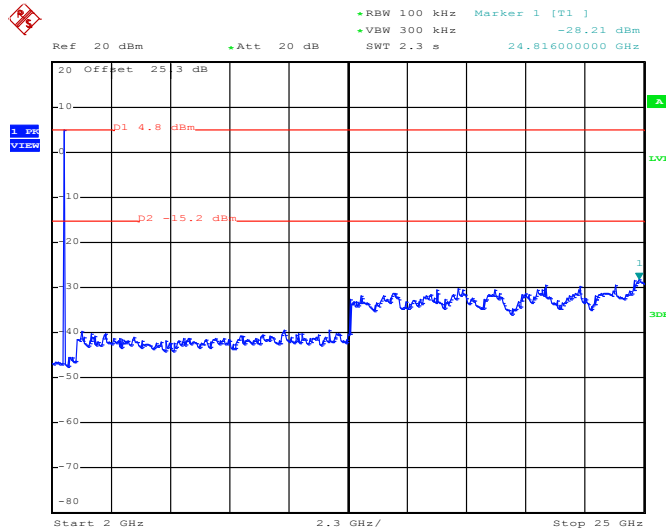


Date: 28.APR.2015 10:12:47




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

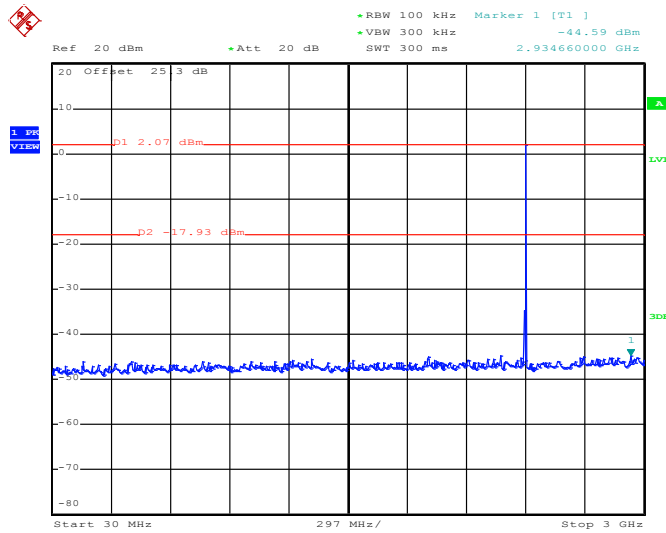

Date: 28.APR.2015 10:29:10

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

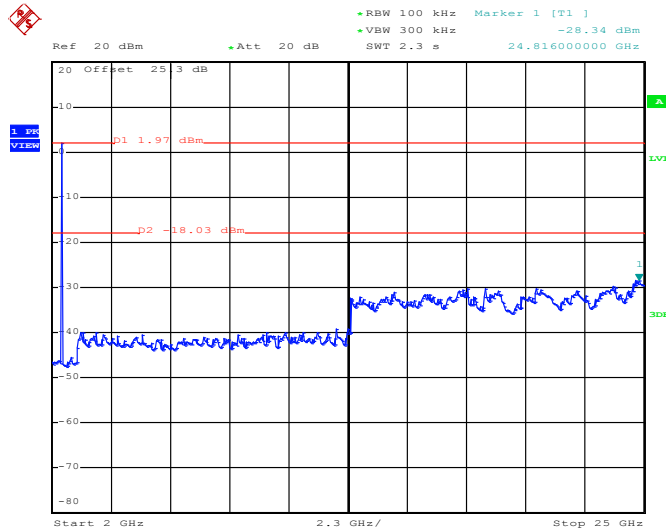


Date: 28.APR.2015 10:29:31




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

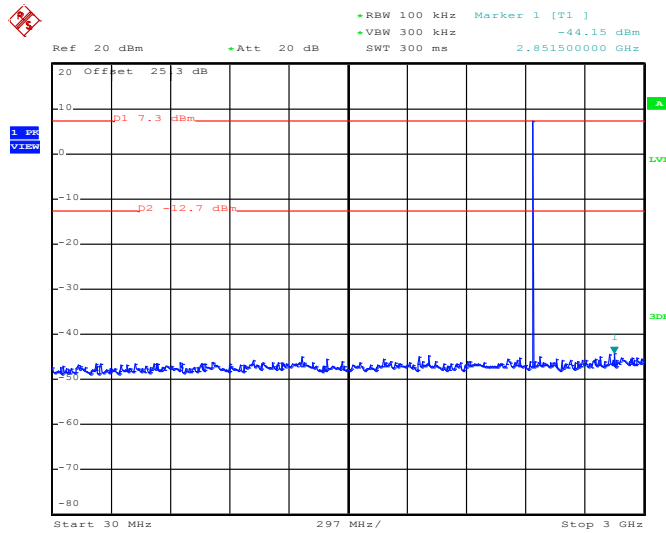

Date: 28.APR.2015 10:46:36

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

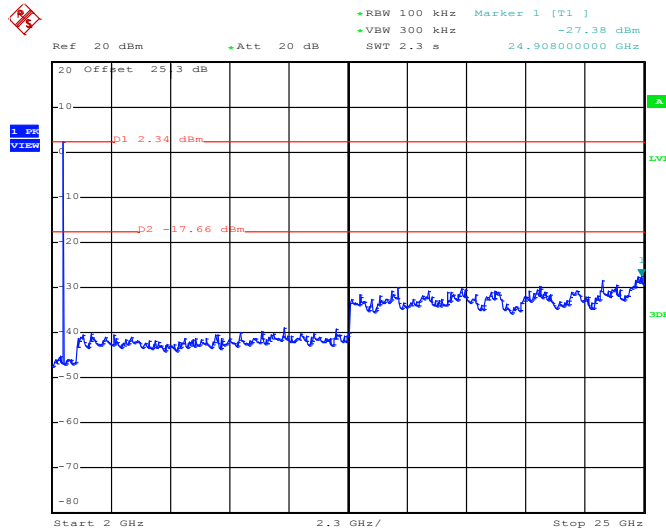


Date: 28.APR.2015 10:46:57




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

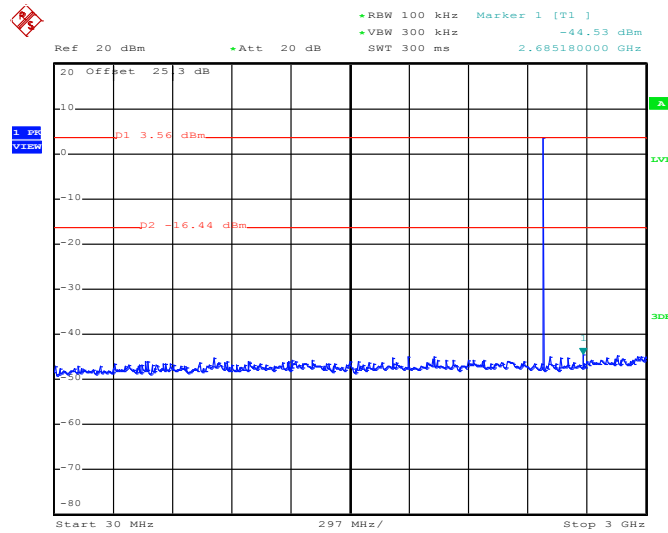

Date: 28.APR.2015 10:53:34

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

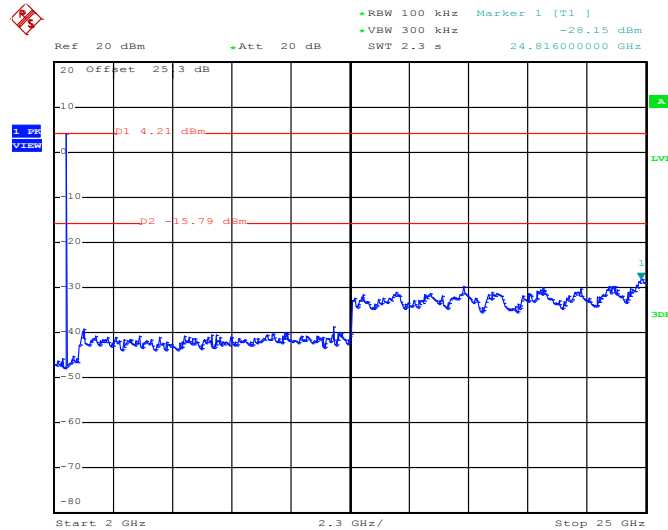


Date: 28.APR.2015 10:53:55




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

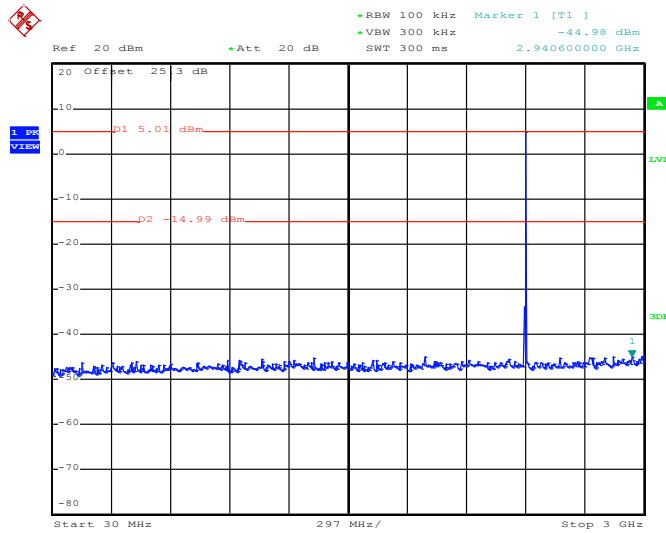

Date: 28.APR.2015 11:03:20

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

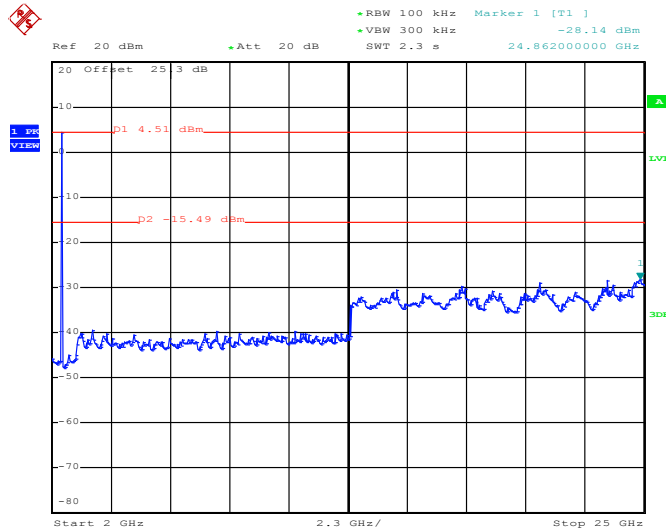


Date: 28.APR.2015 11:03:42




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

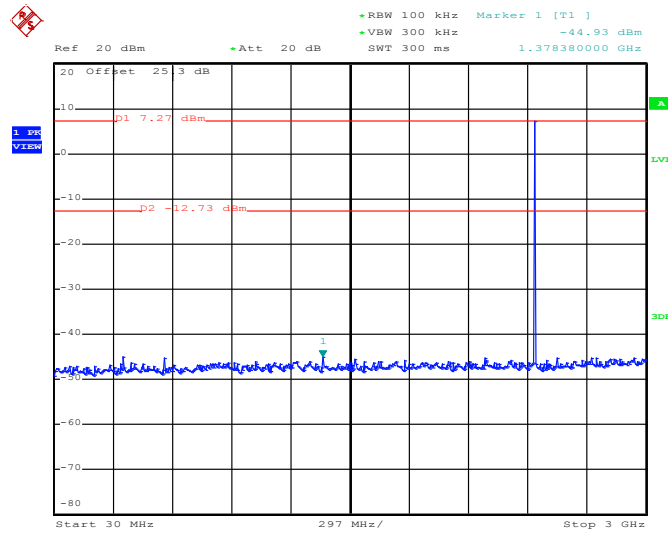

Date: 28.APR.2015 11:22:08

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

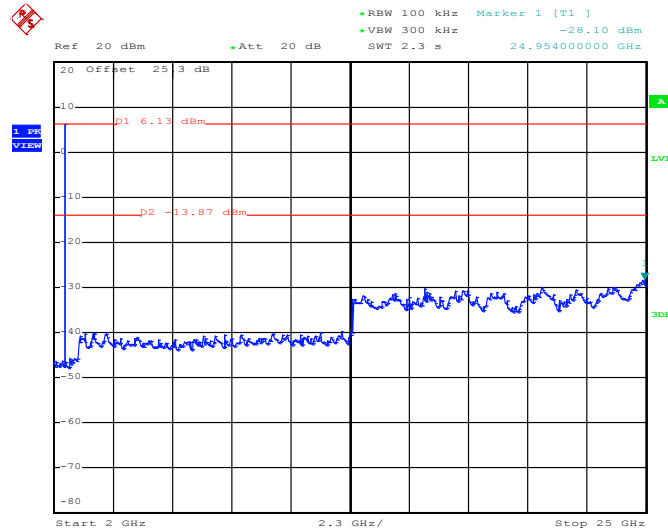


Date: 28.APR.2015 11:22:30




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~53%
		Test Engineer :	Derek Hsu and Tommy Lee

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

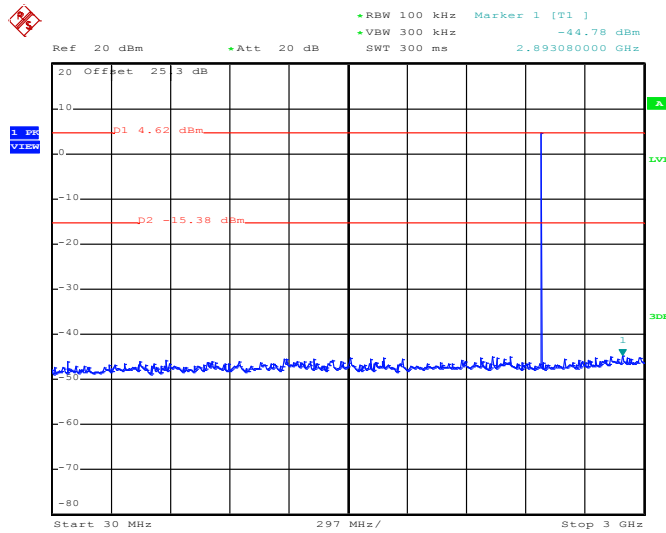

Date: 28.APR.2015 11:48:20

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

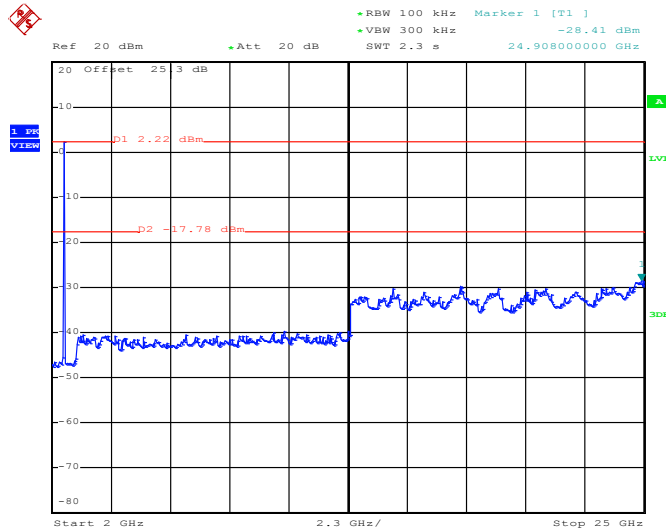

Date: 28.APR.2015 11:48:42



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (30.78dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

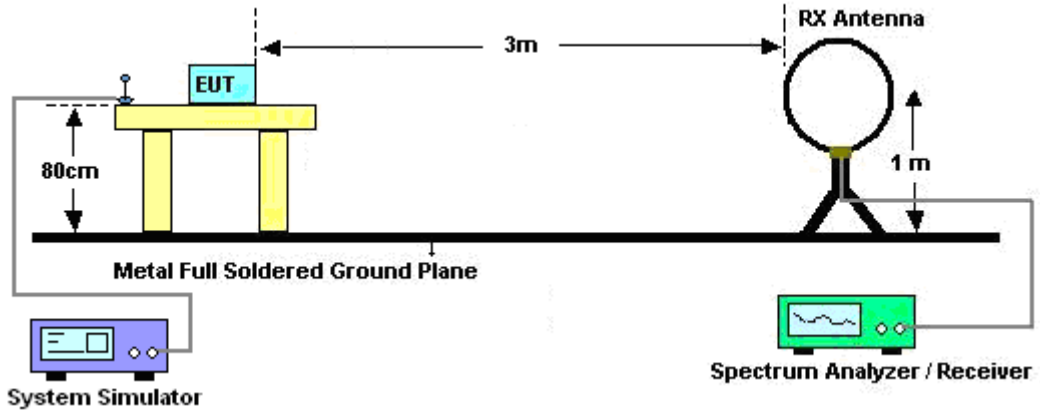

For radiated emissions from 30MHz to 1GHz

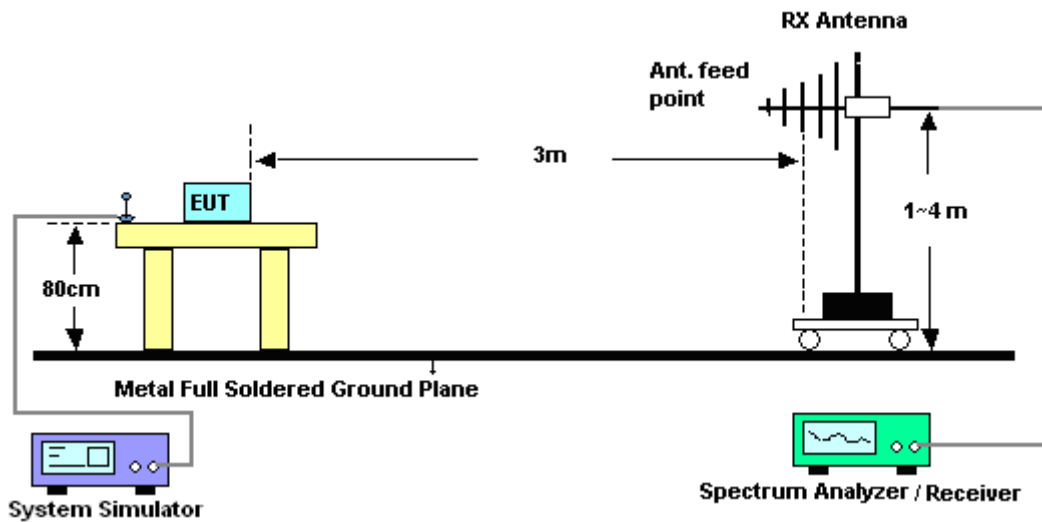

For radiated emissions above 1GHz

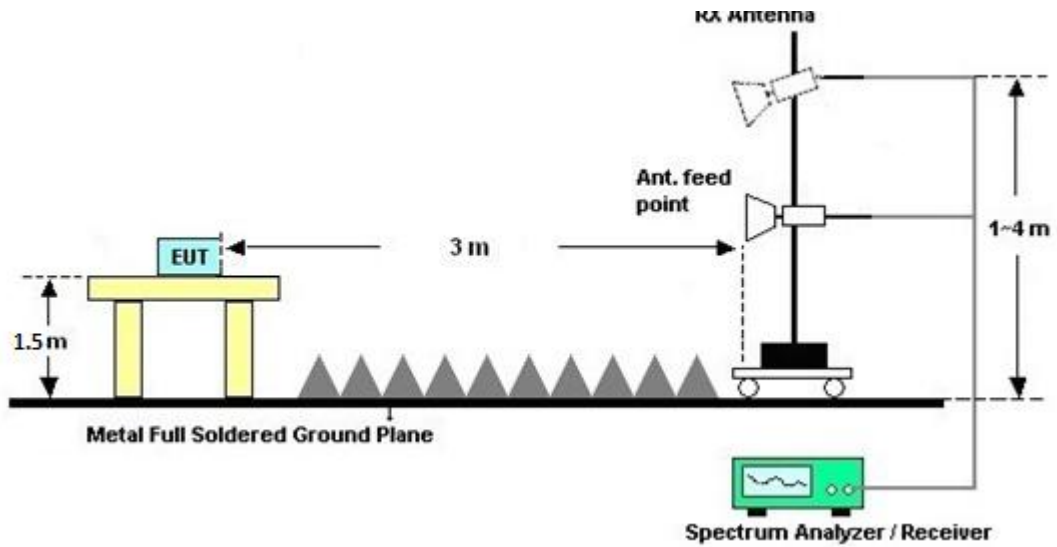


### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.




### 3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

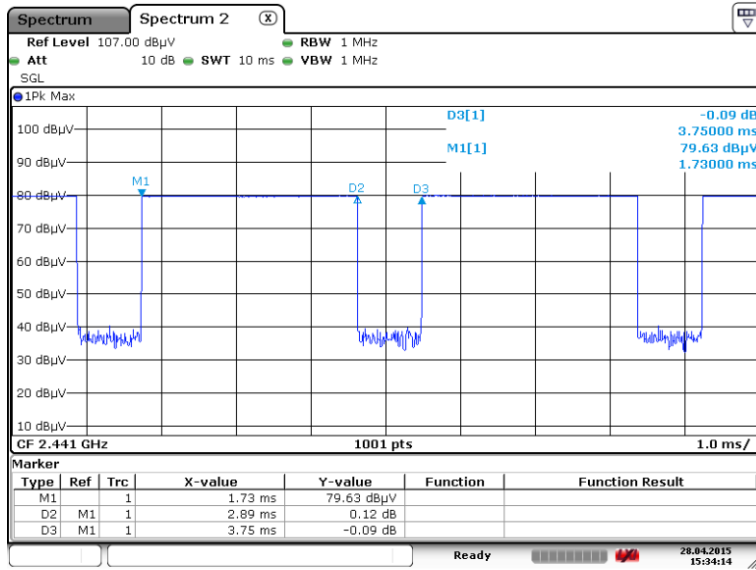

Date: 28.APR.2015 15:34:14

DH5 on time (Count Pulses) Plot on Channel 39

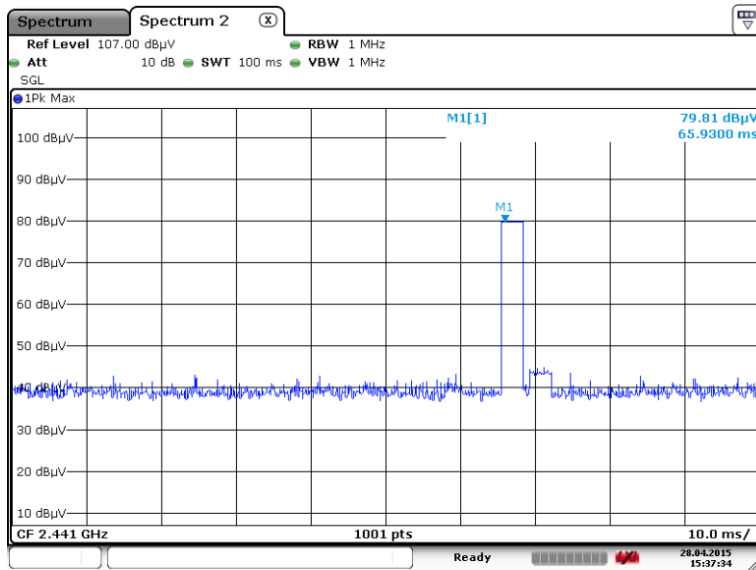

Date: 28.APR.2015 15:37:34

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 1 \* 2.89 / 100 = 2.89 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -30.78 dB
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 28.9 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.3\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 2.89 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(2.89 \text{ ms}/100\text{ms}) = -30.78 \text{ dB}$$

**3.8.7 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A.

**3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix A.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.9.4 Test Setup

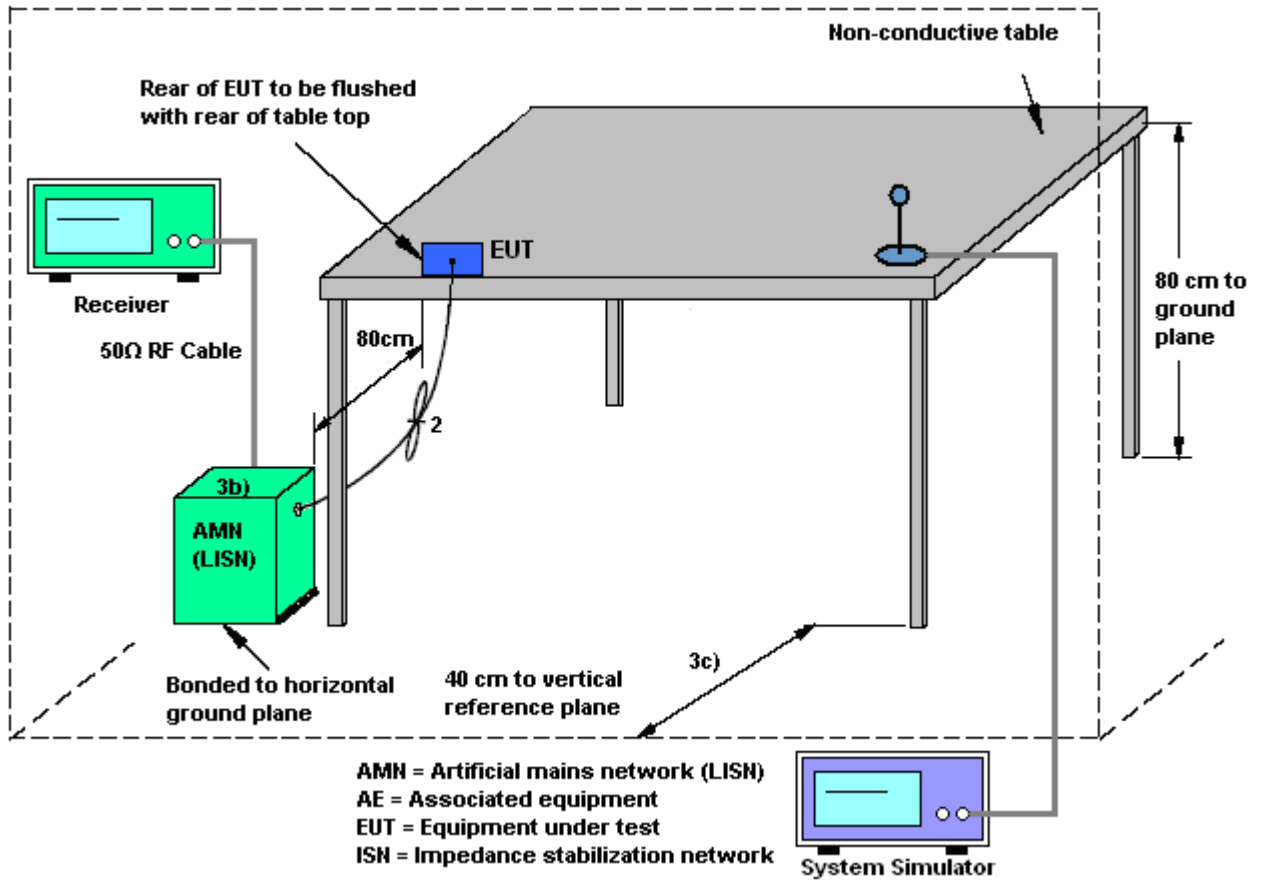



3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 3	Temperature :	22~24°C
Test Engineer :	Eric Jeng	Relative Humidity :	49~51%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MP3 + Earphone + USB Cable (Charging from Adapter 3)		

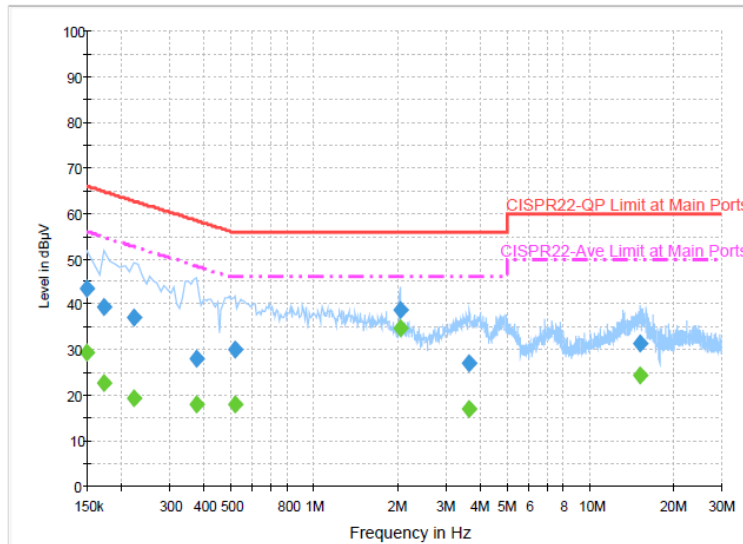

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.5	Off	L1	19.5	22.5	66.0
0.174000	39.4	Off	L1	19.4	25.4	64.8
0.222000	37.2	Off	L1	19.4	25.5	62.7
0.374000	28.2	Off	L1	19.5	30.2	58.4
0.518000	30.1	Off	L1	19.5	25.9	56.0
2.054000	38.7	Off	L1	19.7	17.3	56.0
3.662000	26.9	Off	L1	19.7	29.1	56.0
15.230000	31.5	Off	L1	20.0	28.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	29.3	Off	L1	19.5	26.7	56.0
0.174000	22.7	Off	L1	19.4	32.1	54.8
0.222000	19.5	Off	L1	19.4	33.2	52.7
0.374000	17.9	Off	L1	19.5	30.5	48.4
0.518000	18.0	Off	L1	19.5	28.0	46.0
2.054000	34.8	Off	L1	19.7	11.2	46.0
3.662000	16.9	Off	L1	19.7	29.1	46.0
15.230000	24.5	Off	L1	20.0	25.5	50.0



Test Mode :	Mode 3	Temperature :	22~24°C
Test Engineer :	Eric Jeng	Relative Humidity :	49~51%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MP3 + Earphone + USB Cable (Charging from Adapter 3)		

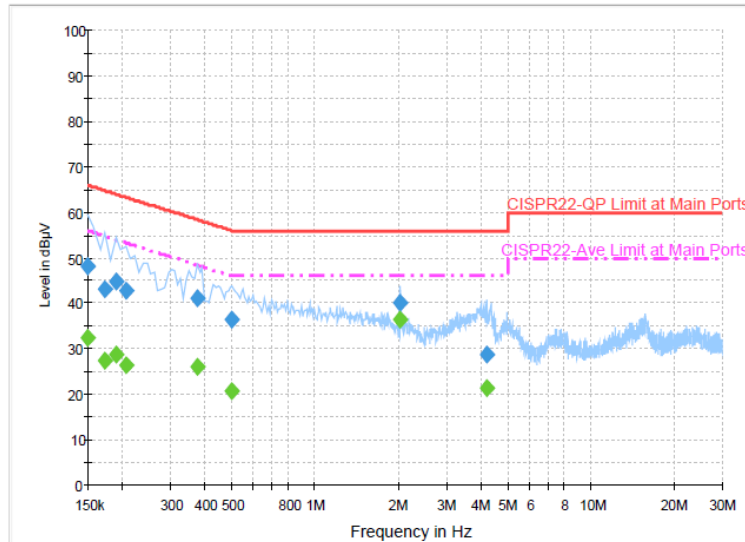

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	48.3	Off	N	19.5	17.7	66.0
0.174000	43.1	Off	N	19.4	21.7	64.8
0.190000	44.9	Off	N	19.5	19.1	64.0
0.206000	42.9	Off	N	19.4	20.5	63.4
0.374000	41.0	Off	N	19.5	17.4	58.4
0.502000	36.6	Off	N	19.5	19.4	56.0
2.046000	40.3	Off	N	19.7	15.7	56.0
4.182000	28.8	Off	N	19.7	27.2	56.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	32.5	Off	N	19.5	23.5	56.0
0.174000	27.4	Off	N	19.4	27.4	54.8
0.190000	28.6	Off	N	19.5	25.4	54.0
0.206000	26.5	Off	N	19.4	26.9	53.4
0.374000	26.1	Off	N	19.5	22.3	48.4
0.502000	20.9	Off	N	19.5	25.1	46.0
2.046000	36.5	Off	N	19.7	9.5	46.0
4.182000	21.5	Off	N	19.7	24.5	46.0



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 14, 2015	Apr. 21, 2015~ Apr. 28, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 14, 2015	Apr. 21, 2015~ Apr. 28, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Apr. 21, 2015~ Apr. 28, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2014	Apr. 27, 2015~ May 15, 2015	Aug. 18, 2015	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2014	Apr. 27, 2015~ May 15, 2015	Aug. 29, 2015	Radiation (03CH07-HY)
Horn Antenna	SCHWARZB ECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 03, 2014	Apr. 27, 2015~ May 15, 2015	Nov. 02, 2015	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Apr. 27, 2015~ May 15, 2015	Jul. 27, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Apr. 27, 2015~ May 15, 2015	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 12, 2015	Apr. 27, 2015~ May 15, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 21, 2014	Apr. 27, 2015~ May 15, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Mar. 10, 2015	Apr. 27, 2015~ May 15, 2015	Mar. 09, 2016	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Apr. 27, 2015~ May 15, 2015	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Apr. 27, 2015~ May 15, 2015	N/A	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 09, 2014	Apr. 27, 2015~ May 15, 2015	Jun. 08, 2015	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Sep. 17, 2014	Apr. 27, 2015~ May 15, 2015	Sep. 16, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Apr. 27, 2015~ May 15, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Dec. 01, 2014	Apr. 21, 2015 ~ May 17, 2015	Nov. 30, 2015	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	Apr. 21, 2015 ~ May 17, 2015	Dec. 01, 2015	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 08, 2014	Apr. 21, 2015 ~ May 17, 2015	Dec. 07, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 21, 2015 ~ May 17, 2015	N/A	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------



## Appendix A. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)(with adapter1)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2326.25	49.03	-24.97	74	43.56	32.09	7.6	34.22	146	13	P	H	
		2326.25	18.25	-35.75	54	-	-	-	-	-	-	A	H	
	*	2402.04	102.53	-	-	96.9	32.18	7.75	34.3	146	13	P	H	
	*	2402.04	71.75	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2342.76	48.72	-25.28	74	43.18	32.11	7.68	34.25	220	51	P	V
			2342.76	17.94	-36.06	54	-	-	-	-	-	-	A	V
	*		2402.04	96.31	-	-	90.68	32.18	7.75	34.3	220	51	P	V
	*		2402.04	65.53	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2359.59	48.9	-25.1	74	43.34	32.13	7.68	34.25	161	16	P	H	
		2359.59	18.12	-35.88	54	-	-	-	-	-	-	A	H	
	*	2441.1	102.73	-	-	97.05	32.24	7.83	34.39	161	16	P	H	
	*	2441.1	71.95	-	-	-	-	-	-	-	-	A	H	
			2490.88	48.05	-25.95	74	42.27	32.3	7.91	34.43	161	16	P	H
			2490.88	17.27	-36.73	54	-	-	-	-	-	-	A	H
			2355.98	48.81	-25.19	74	43.25	32.13	7.68	34.25	278	119	P	V
			2355.98	18.03	-35.97	54	-	-	-	-	-	-	A	V
	*		2441.1	98.2	-	-	92.52	32.24	7.83	34.39	278	119	P	V
	*		2441.1	67.42	-	-	-	-	-	-	-	-	A	V
			2496.39	48.15	-25.85	74	42.42	32.3	7.91	34.48	278	119	P	V
			2496.39	17.37	-36.63	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480.05	100.38	-	-	94.62	32.28	7.91	34.43	103	157	P	H	
	*	2480.05	69.6	-	-	-	-	-	-	-	-	A	H	
		2496.01	48.51	-25.49	74	42.78	32.3	7.91	34.48	103	157	P	H	
		2496.01	17.73	-36.27	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480.05	97.59	-	-	91.83	32.28	7.91	34.43	233	101	P	V	
	*	2480.05	66.81	-	-	-	-	-	-	-	-	-	A	V
		2486.42	48.44	-25.56	74	42.68	32.28	7.91	34.43	233	101	P	V	
		2486.42	17.66	-36.34	54	-	-	-	-	-	-	A	V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m) (with adapter1)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4806	41.4	-32.6	74	55.71	34.25	11.11	59.67	100	0	P	H	
		4806	10.62	-43.38	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4806	41.07	-32.93	74	55.38	34.25	11.11	59.67	100	0	P	V	
		4806	10.29	-43.71	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4884	41.19	-32.81	74	55.25	34.3	11.21	59.57	100	0	P	H	
		4884	10.41	-43.59	54	-	-	-	-	-	-	A	H	
		7320	43.98	-30.02	74	51.79	35.6	15.08	58.49	100	0	P	H	
		7320	13.2	-40.8	54	-	-	-	-	-	-	A	H	
		4884	42.02	-31.98	74	56.08	34.3	11.21	59.57	100	0	P	V	
		4884	11.24	-42.76	54	-	-	-	-	-	-	A	V	
		7320	43.9	-30.1	74	51.71	35.6	15.08	58.49	100	0	P	V	
		7320	13.12	-40.88	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4962	42.21	-31.79	74	55.97	34.37	11.32	59.45	100	0	P	H	
		4962	11.43	-42.57	54	-	-	-	-	-	-	A	H	
		7440	43.62	-30.38	74	51.53	35.6	15.13	58.64	100	0	P	H	
		7440	12.84	-41.16	54	-	-	-	-	-	-	A	H	
		4962	42.09	-31.91	74	55.85	34.37	11.32	59.45	100	0	P	V	
		4962	11.31	-42.69	54	-	-	-	-	-	-	A	V	
		7440	43.27	-30.73	74	51.18	35.6	15.13	58.64	100	0	P	V	
		7440	12.49	-41.51	54	-	-	-	-	-	-	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF) (with adapter1)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		90.21	21.33	-22.17	43.5	41.67	8.7	2.06	31.1			P	H	
		152.31	25.54	-17.96	43.5	43.3	10.76	2.61	31.13	108	104	P	H	
		257.34	26.22	-19.78	46	40.74	13.52	2.96	31			P	H	
		405	19.02	-26.98	46	30.32	16.06	3.52	30.88			P	H	
		551.3	22.27	-23.73	46	29.23	19.82	4.01	30.79			P	H	
		805.4	26.17	-19.83	46	29.76	22.1	4.62	30.31			P	H	
														H
														H
														H
														H
														H
														H
			78.87	34.1	-5.9	40	56.31	6.93	2.06	31.2	119	56	P	V
			150.69	16.26	-27.24	43.5	33.96	10.8	2.61	31.11			P	V
			237.09	19.74	-26.26	46	36.84	10.94	2.96	31			P	V
			548.5	21.93	-24.07	46	29.04	19.68	4.01	30.8			P	V
			660.5	24.56	-21.44	46	30.38	20.31	4.35	30.48			P	V
			850.2	27.73	-18.27	46	30.14	23.29	4.7	30.4			P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m) (with adapter2)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2331.32	48.86	-25.14	74	43.39	32.09	7.6	34.22	141	16	P	H	
		2331.32	18.08	-35.92	54	-	-	-	-	-	-	A	H	
	*	2402.04	100.25	-	-	94.62	32.18	7.75	34.3	141	16	P	H	
	*	2402.04	69.47	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2320.01	48.08	-25.92	74	42.61	32.09	7.6	34.22	290	73	P	V
			2320.01	17.3	-36.7	54	-	-	-	-	-	-	A	V
	*		2402.04	94.89	-	-	89.26	32.18	7.75	34.3	290	73	P	V
	*		2402.04	64.11	-	-	-	-	-	-	-	-	A	V
														V
														V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m) (with adapter2)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4803	41.68	-32.32	74	55.28	34.25	11.11	58.96	100	0	P	H	
		4803	10.9	-43.1	54	-	-	-	-	-	-	A	H	
													H	
													H	
			4803	41.7	-32.3	74	55.3	34.25	11.11	58.96	100	0	P	V
			4803	10.92	-43.08	54	-	-	-	-	-	-	P	V
														V
														V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF) (with adapter2)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		78.6	30.83	-9.17	40	53.04	6.93	2.06	31.2	100	264	P	H	
		176.34	30.98	-12.52	43.5	50.18	9.17	2.61	30.98			P	H	
		240.87	30.78	-15.22	46	47.42	11.4	2.96	31			P	H	
		465.9	33.92	-12.08	46	43.5	17.45	3.77	30.8			P	H	
		718.6	26.47	-19.53	46	31.1	21.36	4.41	30.4			P	H	
		892.2	27.45	-18.55	46	30.15	22.96	4.66	30.32			P	H	
														H
														H
														H
														H
														H
														H
			81.03	29.96	-10.04	40	51.86	7.22	2.06	31.18	103	298	P	V
			149.88	27.32	-16.18	43.5	45.01	10.8	2.61	31.1			P	V
			238.17	32.06	-13.94	46	48.92	11.18	2.96	31			P	V
			431.6	33.04	-12.96	46	43.23	16.92	3.63	30.74			P	V
			727	25.99	-20.01	46	30.14	21.84	4.41	30.4			P	V
			930	28.62	-17.38	46	29.88	24.3	4.8	30.36			P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	3. No other spurious found. 4. All results are PASS against limit line.													



2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m) (with adapter3)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2349.78	48.26	-25.74	74	42.72	32.11	7.68	34.25	278	11	P	H	
		2349.78	17.48	-36.52	54	-	-	-	-	-	-	A	H	
	*	2402.04	99.84	-	-	94.21	32.18	7.75	34.3	278	11	P	H	
	*	2402.04	69.06	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2377.99	48.53	-25.47	74	42.96	32.16	7.68	34.27	317	114	P	V
			2377.99	17.75	-36.25	54	-	-	-	-	-	-	A	V
	*		2402.04	95.26	-	-	89.63	32.18	7.75	34.3	317	114	P	V
	*		2402.04	64.48	-	-	-	-	-	-	-	-	A	V
														V
														V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>													



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m) (with adapter3)

BT	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4806	41.84	-32.16	74	56.15	34.25	11.11	59.67	100	0	P	H	
													H	
													H	
													H	
			4806	42.04	-31.96	74	56.35	34.25	11.11	59.67	100	0	P	V
														V
														V
														V
Remark	1.No other spurious found. 2.All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF) (with adapter3)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		81.84	37.18	-2.82	40	59.07	7.22	2.06	31.17	101	219	P	H	
		149.07	31.22	-12.28	43.5	48.77	10.94	2.61	31.1			P	H	
		233.85	26.74	-19.26	46	44.2	10.58	2.96	31			P	H	
		339.9	30.6	-15.4	46	44.25	14.07	3.28	31			P	H	
		533.8	32.3	-13.7	46	40.74	18.41	3.89	30.74			P	H	
		852.3	27.89	-18.11	46	30.31	23.27	4.7	30.39			P	H	
														H
														H
														H
														H
														H
														H
														H
			81.84	36.15	-3.85	40	58.04	7.22	2.06	31.17	100	276	P	V
			149.88	26.69	-16.81	43.5	44.38	10.8	2.61	31.1			P	V
			239.25	31.93	-14.07	46	48.67	11.3	2.96	31			P	V
			528.2	32.36	-13.64	46	40.9	18.28	3.89	30.71			P	V
			708.8	27.29	-18.71	46	32.32	20.96	4.41	30.4			P	V
			873.3	27.53	-18.47	46	30.25	22.97	4.66	30.35			P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1.No other spurious found. 2.All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**