



# FCC RF Test Report

**APPLICANT** : Motorola Mobility, LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 7524  
**FCC ID** : IHDT56VC2  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 28, 2016 and testing was completed on Jul. 30, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

---

Reviewed by: Joseph Lin / Supervisor

---

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**



## TABLE OF CONTENTS

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>REVISION HISTORY.....</b>                               | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                        | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                         | <b>5</b>  |
| 1.1 Applicant.....                                         | 5         |
| 1.2 Manufacturer .....                                     | 5         |
| 1.3 Product Feature of Equipment Under Test .....          | 5         |
| 1.4 Product Specification of Equipment Under Test .....    | 6         |
| 1.5 Modification of EUT .....                              | 6         |
| 1.6 Testing Location .....                                 | 7         |
| 1.7 Applicable Standards .....                             | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>  | <b>8</b>  |
| 2.1 Test Mode.....                                         | 8         |
| 2.2 Connection Diagram of Test System .....                | 9         |
| 2.3 Support Unit used in test configuration .....          | 10        |
| <b>3 RADIATED TEST ITEMS .....</b>                         | <b>11</b> |
| 3.1 Measuring Instruments.....                             | 11        |
| 3.2 Test Setup .....                                       | 11        |
| 3.3 Test Result of Radiated Test.....                      | 11        |
| 3.4 Field Strength of Spurious Radiation Measurement ..... | 12        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                 | <b>13</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                   | <b>14</b> |
| <b>APPENDIX A. TEST RESULTS OF RADIATED TEST</b>           |           |
| <b>APPENDIX B. ORIGINAL REPORT</b>                         |           |



## REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION                                                                                                                                                                                                               | ISSUED DATE   |
|--------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| FG651612-16A | Rev. 01 | This is a variant report. All the test cases were performed base on the worst RSE test cases determined in the original report. Please refer to Sporton Report Number FG651612-02A in appendix B for the original report. | Aug. 04, 2016 |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |
|              |         |                                                                                                                                                                                                                           |               |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | Description                             | Limit                                  | Result | Remark                                     |
|----------------|-----------------------|-----------------------------------------|----------------------------------------|--------|--------------------------------------------|
| 3.4            | §2.1053<br>§22.917(a) | Field Strength of<br>Spurious Radiation | $< 43 + 10 \log_{10}(P[\text{Watts}])$ | PASS   | Under limit<br>25.65 dB at<br>5639.000 MHz |



# 1 General Description

## 1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Equipment                       | Mobile Cellular Phone                                                                                                |
| Brand Name                      | Motorola                                                                                                             |
| Model Name                      | 7524                                                                                                                 |
| FCC ID                          | IHDT56VC2                                                                                                            |
| IMEI Code                       | IMEI 1: 354131070010793<br>IMEI 2: 354131070010801                                                                   |
| EUT supports Radios application | GSM/EGPRS/WCDMA/HSPA/LTE/NFC<br>WLAN 11b/g/n HT20<br>WLAN 11a/n HT20/HT40<br>Bluetooth v3.0 EDR<br>Bluetooth v4.0 LE |
| HW Version                      | DVT2                                                                                                                 |
| EUT Stage                       | Identical Prototype                                                                                                  |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

| Accessory List |                          |
|----------------|--------------------------|
| WPC Cover      | Brand Name : INCIPIO     |
|                | Model Name : MT-043-CASE |

## 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                                                            |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                     | <b>GSM/GPRS/EDGE:</b><br>850: 824.2 MHz ~ 848.8 MHz<br>1900: 1850.2 MHz ~ 1909.8MHz<br><b>WCDMA:</b><br>Band V: 826.4 MHz ~ 846.6 MHz<br>Band II: 1852.4 MHz ~ 1907.6 MHz  |
| <b>Rx Frequency</b>                     | <b>GSM/GPRS/EDGE:</b><br>850: 869.2 MHz ~ 893.8 MHz<br>1900: 1930.2 MHz ~ 1989.8 MHz<br><b>WCDMA:</b><br>Band V: 871.4 MHz ~ 891.6 MHz<br>Band II: 1932.4 MHz ~ 1987.6 MHz |
| <b>Antenna Type</b>                     | Coupling type (LDS) Antenna                                                                                                                                                |
| <b>Type of Modulation</b>               | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA: QPSK (Uplink)<br>HSDPA: QPSK (Uplink)<br>HSUPA: QPSK (Uplink)                                                       |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                       |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| Test Site No.      | Sporton Site No.                                                                                                                                                 |
|                    | 03CH11-HY                                                                                                                                                        |

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ KDB 648474 D03 Handset Wireless Chargers Battery Covers v01r04

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850.

All modes and data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

| Test Modes |                                       |
|------------|---------------------------------------|
| Band       | Radiated TCs                          |
| GSM 850    | ■ GPRS class 8 Link with WPC Charging |
|            | ■ GPRS class 8 Link with PMA Charging |




## 2.2 Connection Diagram of Test System

### <WPC Charging Mode>

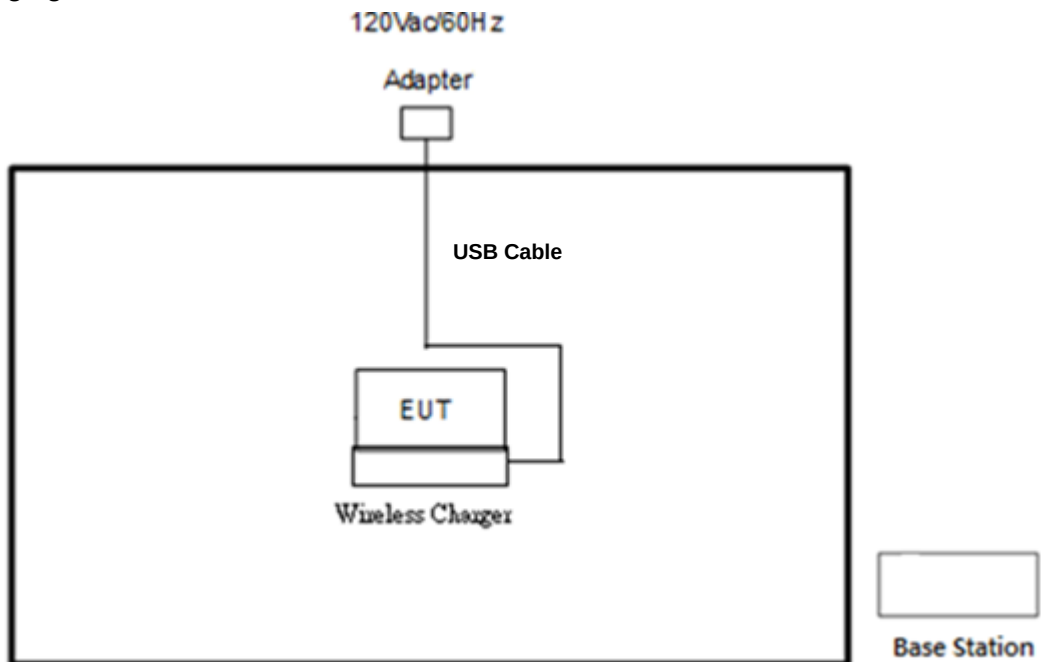

### <PMA Charging Mode>

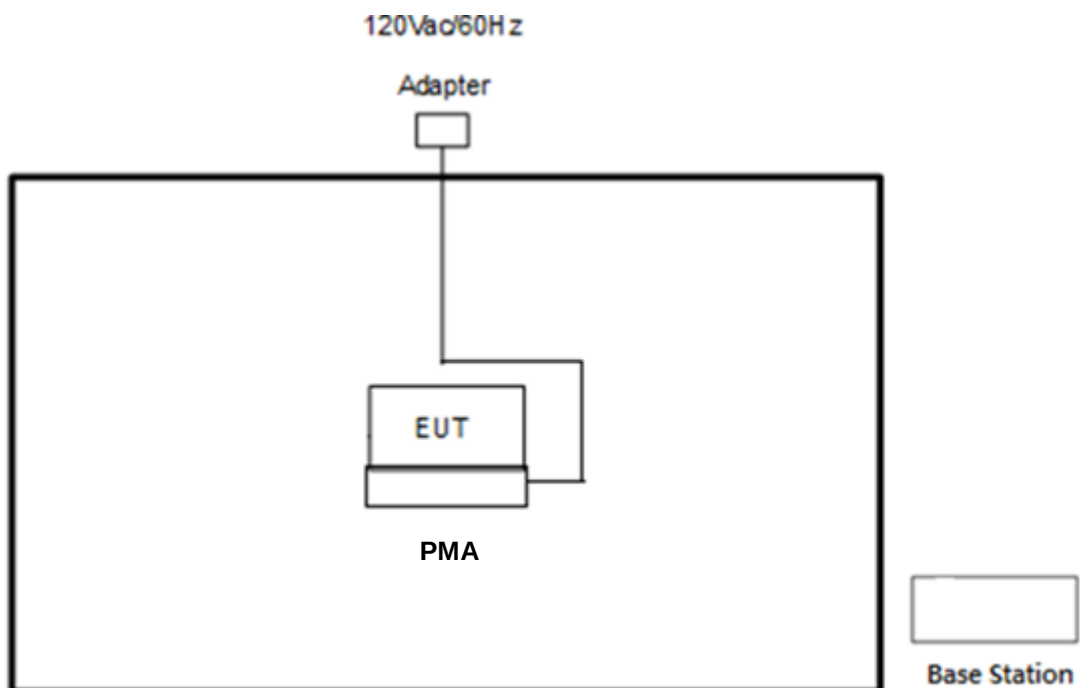



## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No.   | FCC ID  | Data Cable        | Power Cord        |
|------|------------------|------------|-------------|---------|-------------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200     | N/A     | N/A               | Unshielded, 1.8 m |
| 2.   | Wireless Charger | LG         | WCD-100     | FCC DoC | N/A               | N/A               |
| 3.   | PMA              | DURACELL   | M-018B-518A | FCC DoC | N/A               | N/A               |
| 4.   | USB Cable        | Motorola   | SKN6473A    | N/A     | Unshielded, 1.0 m | N/A               |
| 5.   | Adapter          | Motorola   | SKN5917A    | N/A     | N/A               | N/A               |


### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup

##### 3.2.1 For radiated test from 30MHz to 1GHz

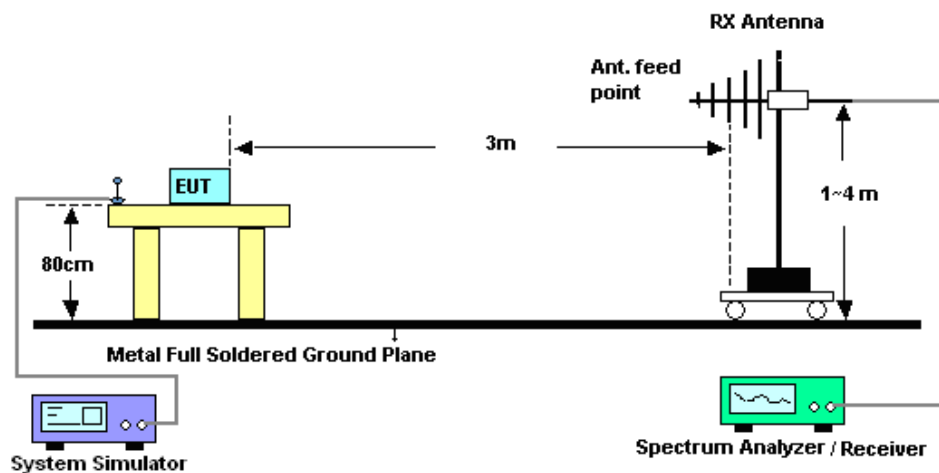

##### 3.2.2 For radiated test above 1GHz

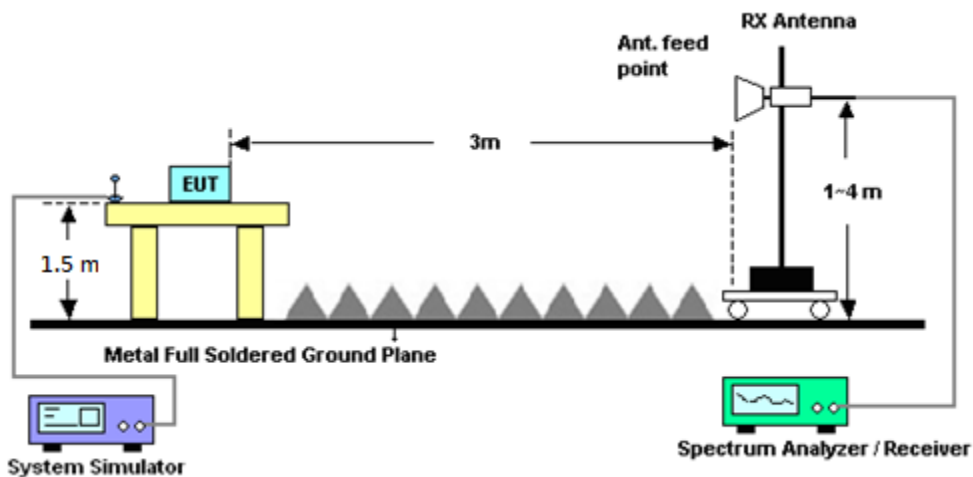

#### 3.3 Test Result of Radiated Test

Please refer to Appendix A.



### **3.4 Field Strength of Spurious Radiation Measurement**

#### **3.4.1 Description of Field Strength of Spurious Radiated Measurement**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### **3.4.2 Test Procedures**

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
     $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
     $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
     $= -13\text{dBm}.$



## 4 List of Measuring Equipment

| Instrument           | Manufacturer    | Model No.        | Serial No.      | Characteristics | Calibration Date | Test Date                        | Due Date      | Remark                   |
|----------------------|-----------------|------------------|-----------------|-----------------|------------------|----------------------------------|---------------|--------------------------|
| Amplifier            | SONOMA          | 310N             | 187312          | 9kHz~1GHz       | Nov. 20, 2015    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Nov. 19, 2016 | Radiation<br>(03CH11-HY) |
| Bilog Antenna        | TESEQ           | CBL 6111D        | 35414           | 30MHz~1GHz      | Nov. 17, 2015    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Nov. 16, 2016 | Radiation<br>(03CH11-HY) |
| Horn Antenna         | SCHWARZBECK     | BBHA 9120<br>D   | 9120D-1326      | 1GHz ~ 18GHz    | Oct. 08, 2015    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Oct. 07, 2016 | Radiation<br>(03CH11-HY) |
| Spectrum Analyzer    | Keysight        | N9010A           | MY54200486      | 10Hz ~ 44GHz    | Sep. 24, 2015    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Sep. 23, 2016 | Radiation<br>(03CH11-HY) |
| Antenna Mast         | EMEC            | AM-BS-450<br>0-B | N/A             | 1~4m            | N/A              | Jul. 28, 2016 ~<br>Jul. 30, 2016 | N/A           | Radiation<br>(03CH11-HY) |
| Turn Table           | EMEC            | TT 2000          | N/A             | 0~360 Degree    | N/A              | Jul. 28, 2016 ~<br>Jul. 30, 2016 | N/A           | Radiation<br>(03CH11-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK     | BBHA 9170        | BBHA917057<br>6 | 18GHz ~ 40GHz   | Apr. 15, 2016    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Apr. 14, 2017 | Radiation<br>(03CH11-HY) |
| Bilog Antenna        | TESEQ           | CBL 6111D        | 40103           | 30MHz to 1GHz   | Jan. 13, 2016    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Jan. 12, 2017 | Radiation<br>(03CH11-HY) |
| Horn Antenna         | SCHWARZBECK     | BBHA 9120<br>D   | 9120D-1522      | 1G~18GHz        | Mar. 31, 2016    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Mar. 30, 2017 | Radiation<br>(03CH11-HY) |
| Preamplifier         | MITEQ           | TTA0204          | 1872107         | 2GHz~40GHz      | Feb. 15, 2016    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Feb. 14, 2017 | Radiation<br>(03CH11-HY) |
| Signal Generator     | Rohde & Schwarz | SMF100A          | 101107          | 100kHz~40GHz    | May 19, 2016     | Jul. 28, 2016 ~<br>Jul. 30, 2016 | May 18, 2017  | Radiation<br>(03CH11-HY) |
| Loop Antenna         | Rohde & Schwarz | HFH2-Z2          | 100315          | 9 kHz~30 MHz    | Sep. 02, 2015    | Jul. 28, 2016 ~<br>Jul. 30, 2016 | Sep. 01, 2016 | Radiation<br>(03CH11-HY) |



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 3.37 |
|--------------------------------------------------------------------------|------|



## Appendix A. Test Results of Radiated Test

### Radiated Spurious Emission

#### <WPC Charging Mode>

| GSM850 (GPRS class 8) |                   |             |               |                   |                   |                    |                      |                       |                    |
|-----------------------|-------------------|-------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel               | Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading (dBm) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest                | 3763              | -54.87      | -13           | -41.87            | -69.06            | -61.5              | 1.69                 | 8.32                  | H                  |
|                       | 5639              | -38.65      | -13           | -25.65            | -58.16            | -45.7              | 2.71                 | 9.76                  | H                  |
|                       | 7522              | -54.61      | -13           | -41.61            | -79.06            | -64                | 2.42                 | 11.81                 | H                  |
|                       |                   |             |               |                   |                   |                    |                      |                       | H                  |
|                       | 3763              | -57.47      | -13           | -44.47            | -71.5             | -64.1              | 1.69                 | 8.32                  | V                  |
|                       | 5639              | -40.55      | -13           | -27.55            | -58.89            | -47.6              | 2.71                 | 9.76                  | V                  |
|                       | 7522              | -55.11      | -13           | -42.11            | -79               | -64.5              | 2.42                 | 11.81                 | V                  |
|                       |                   |             |               |                   |                   |                    |                      |                       | V                  |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

#### <PMA Charging Mode>

| GSM850 (GPRS class 8) |                   |             |               |                   |                   |                    |                      |                       |                    |
|-----------------------|-------------------|-------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel               | Frequency ( MHz ) | ERP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading (dBm) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest                | 3763              | -49.97      | -13           | -36.97            | -64.27            | -56.6              | 1.69                 | 8.32                  | H                  |
|                       | 5639              | -48.75      | -13           | -35.75            | -68.26            | -55.8              | 2.71                 | 9.76                  | H                  |
|                       | 7522              | -54.21      | -13           | -41.21            | -79.14            | -63.6              | 2.42                 | 11.81                 | H                  |
|                       |                   |             |               |                   |                   |                    |                      |                       | H                  |
|                       | 3763              | -51.47      | -13           | -38.47            | -65.42            | -58.1              | 1.69                 | 8.32                  | V                  |
|                       | 5639              | -42.05      | -13           | -29.05            | -59.66            | -49.1              | 2.71                 | 9.76                  | V                  |
|                       | 7522              | -55.41      | -13           | -42.41            | -79.12            | -64.8              | 2.42                 | 11.81                 | V                  |
|                       |                   |             |               |                   |                   |                    |                      |                       | V                  |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



## **Appendix B. Original Report**

Please refer to Sporton report number FG651612-02 A as below.





# FCC RF Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 7524  
FCC ID : IHDT56VC2  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 16, 2016 and testing was completed on Jul. 03, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56VC2

Page Number : 1 of 23

Report Issued Date : Jul. 11, 2016

Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1



## TABLE OF CONTENTS

|                                                                                       |           |
|---------------------------------------------------------------------------------------|-----------|
| <b>REVISION HISTORY.....</b>                                                          | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                                                   | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                                                    | <b>5</b>  |
| 1.1 Applicant.....                                                                    | 5         |
| 1.2 Manufacturer .....                                                                | 5         |
| 1.3 Product Feature of Equipment Under Test .....                                     | 5         |
| 1.4 Re-use of Measured Data .....                                                     | 6         |
| 1.5 Modification of EUT .....                                                         | 6         |
| 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....        | 7         |
| 1.7 Testing Location .....                                                            | 8         |
| 1.8 Applicable Standards .....                                                        | 8         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>                             | <b>9</b>  |
| 2.1 Test Mode.....                                                                    | 9         |
| 2.2 Connection Diagram of Test System .....                                           | 10        |
| 2.3 Support Unit used in test configuration .....                                     | 10        |
| 2.4 Measurement Results Explanation Example .....                                     | 10        |
| <b>3 CONDUCTED TEST RESULT.....</b>                                                   | <b>11</b> |
| 3.1 Measuring Instruments.....                                                        | 11        |
| 3.2 Test Setup .....                                                                  | 11        |
| 3.3 Test Result of Conducted Test.....                                                | 11        |
| 3.4 Conducted Output Power .....                                                      | 12        |
| 3.5 Peak-to-Average Ratio .....                                                       | 13        |
| 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....                        | 14        |
| 3.7 Conducted Band Edge .....                                                         | 15        |
| 3.8 Conducted Spurious Emission .....                                                 | 16        |
| 3.9 Frequency Stability .....                                                         | 17        |
| <b>4 RADIATED TEST ITEMS .....</b>                                                    | <b>18</b> |
| 4.1 Measuring Instruments.....                                                        | 18        |
| 4.2 Test Setup .....                                                                  | 18        |
| 4.3 Test Result of Radiated Test.....                                                 | 18        |
| 4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... | 19        |
| 4.5 Field Strength of Spurious Radiation Measurement .....                            | 21        |
| <b>5 LIST OF MEASURING EQUIPMENT .....</b>                                            | <b>22</b> |
| <b>6 UNCERTAINTY OF EVALUATION .....</b>                                              | <b>23</b> |
| <b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>                                     |           |
| <b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>                                      |           |



## REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION             | ISSUED DATE   |
|--------------|---------|-------------------------|---------------|
| FG651612-02A | Rev. 01 | Initial issue of report | Jul. 11, 2016 |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                                         | Description                                   | Limit                  | Result | Remark                                     |
|----------------|--------------------------------------------------|-----------------------------------------------|------------------------|--------|--------------------------------------------|
| 3.4            | §2.1046                                          | Conducted Output Power                        | Reporting Only         | PASS   | -                                          |
| 3.5            | §24.232(d)                                       | Peak-to-Average Ratio                         | < 13 dB                | PASS   | -                                          |
| 3.6            | §2.1049<br>§22.917(b)<br>§24.238(b)<br>§27.53(g) | Occupied Bandwidth                            | Reporting Only         | PASS   | -                                          |
| 3.7            | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(h) | Band Edge Measurement                         | < 43+10log10(P[Watts]) | PASS   | -                                          |
| 3.8            | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(h) | Conducted Emission                            | < 43+10log10(P[Watts]) | PASS   | -                                          |
| 3.9            | §2.1055<br>§22.355                               | Frequency Stability for Temperature & Voltage | < 2.5 ppm for Part 22  | PASS   | -                                          |
|                | §2.1055<br>§24.235<br>§27.54                     |                                               | Within Authorized Band |        |                                            |
| 4.4            | §22.913(a)(2)                                    | Effective Radiated Power                      | < 7 Watts              | PASS   | -                                          |
|                | §24.232(c)                                       | Equivalent Isotropic Radiated Power           | < 2 Watts              | PASS   | -                                          |
|                | §27.50(d)(4)                                     | Equivalent Isotropic Radiated Power           | < 1 Watts              | PASS   | -                                          |
| 4.5            | §2.1053<br>§22.917(a)<br>§24.238(a)<br>§27.53(h) | Field Strength of Spurious Radiation          | < 43+10log10(P[Watts]) | PASS   | Under limit<br>37.30 dB at<br>3812.000 MHz |



# 1 General Description

## 1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Equipment                       | Mobile Cellular Phone                                                                                                |
| Brand Name                      | Motorola                                                                                                             |
| Model Name                      | 7524                                                                                                                 |
| FCC ID                          | IHDT56VC2                                                                                                            |
| EUT supports Radios application | GSM/EGPRS/WCDMA/HSPA/LTE/NFC<br>WLAN 11b/g/n HT20<br>WLAN 11a/n HT20/HT40<br>Bluetooth v3.0 EDR<br>Bluetooth v4.0 LE |
| HW Version                      | DVT2                                                                                                                 |
| EUT Stage                       | Identical Prototype                                                                                                  |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

| Accessory List |                        |
|----------------|------------------------|
| AC Adapter 3   | Brand Name : Motorola  |
|                | Model Name : SPN5917A  |
| Earphone 1     | Brand Name : Motorola  |
|                | Model Name : SJYN1181B |
| Battery 1      | Brand Name : Motorola  |
|                | Model Name : SNN5974A  |
| USB Cable      | Brand Name : Motorola  |
|                | Model Name : SKN6473A  |



## **1.4 Re-use of Measured Data**

### **1.4.1 Introduction Section**

Portions of the design of (FCC ID: IHDT56VC2, model: 7524) and (FCC ID: IHDT56VC1, model 5892) are electrically identical. Thus, for some bands, the certification data collected on (FCC ID: IHDT56VC1, model 5892) can be taken to be representative of (FCC ID: IHDT56VC2, model: 7524). (FCC ID: IHDT56VC2, model: 7524) will reuse the part 22.24 test results from (FCC ID: IHDT56VC1, model 5892)

The applicant takes full responsibility that the test data as referenced in this section represent compliance for this FCC ID.

### **1.4.2 Difference Section**

(FCC ID: IHDT56VC2, model: 7524) is a variant model of (FCC ID: IHDT56VC1, model 5892) with some additional transmission bands enabled and some disabled because of market segmentation. The available bands of these two models are controlled by software designed for each target market and won't impact the performance of WWAN. All the divergent bands have been properly tested to ensure compliance. The detailed comparison of (FCC ID: IHDT56VC2, model: 7524) and (FCC ID: IHDT56VC1, model 5892) is included in the Operational Description.

### **1.4.3 Spot Check Verification Data Section**

In order to confirm hardware similarity of the subject device with the reference device, Spot check has been performed on (FCC ID: IHDT56VC2, model 7524) for certain parameters, including radiated spurious emission and ERP/EIRP; the test results are significantly consistent with its parent model (FCC ID: IHDT56VC1, model 5892).

### **1.4.4 Reference detail Section:**

| Equipment Class | Reference FCC ID | Folder Test/RF Exposure | Report Title/Section    |
|-----------------|------------------|-------------------------|-------------------------|
| PCE             | IHDT56VC1        | Part22H.24E(FG651612A)  | All sections applicable |

## **1.5 Modification of EUT**

No modifications are made to the EUT during all test items.



## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System                     | Type of Modulation | Maximum ERP/EIRP (W) | Frequency Tolerance (ppm) | Emission Designator |
|----------|----------------------------|--------------------|----------------------|---------------------------|---------------------|
| Part 24  | WCDMA Band II RMC 12.2Kbps | QPSK               | 0.1786               | 0.0016 ppm                | 4M12F9W             |
| Part 27  | WCDMA Band IV RMC 12.2Kbps | QPSK               | 0.1786               | 0.0063 ppm                | 4M12F9W             |

## 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                       |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| Test Site No.      | Sporton Site No.                                                                                                                                                 |
|                    | TH03-HY                                                                                                                                                          |

|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                             |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,<br>Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-0868<br>FAX: +886-3-327-0855 |
| Test Site No.      | Sporton Site No.                                                                                                                       |
|                    | 03CH12-HY                                                                                                                              |

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 18000 MHz for WCDMA Band IV.
2. 30 MHz to 19000 MHz for WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes    |                     |                     |
|---------------|---------------------|---------------------|
| Band          | Radiated TCs        | Conducted TCs       |
| WCDMA Band II | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band IV | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |

## 2.2 Connection Diagram of Test System

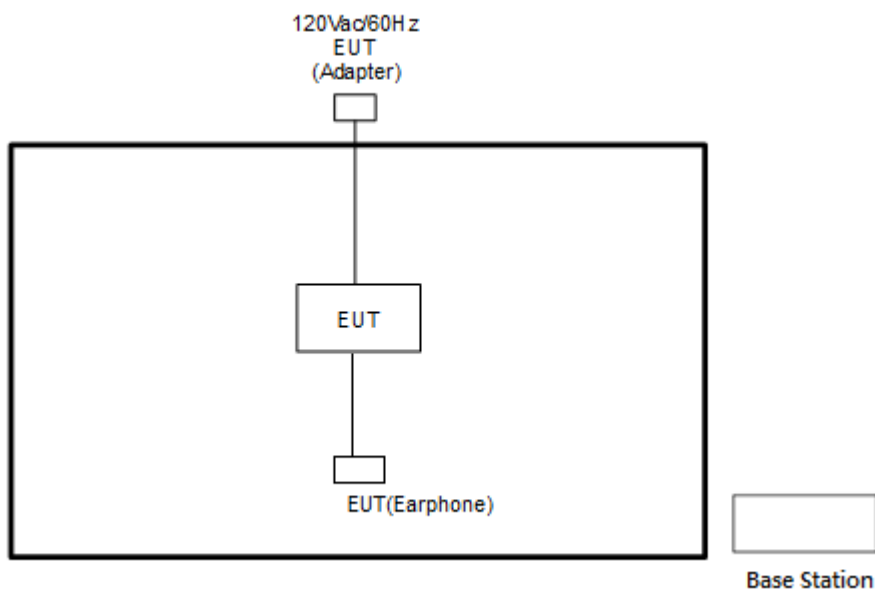

## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$


### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

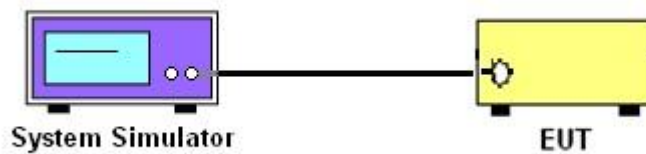

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

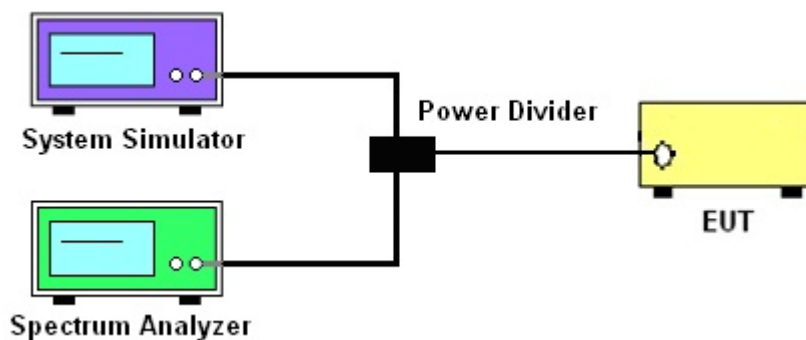

##### 3.2.3 Frequency Stability

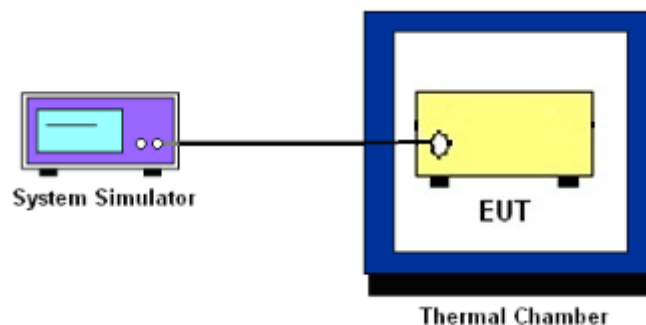

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.4 Conducted Output Power**

### **3.4.1 Description of the Conducted Output Power**

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.  
Record the maximum PAPR level associated with a probability of 0.1%.

## 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

### 3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## **3.7 Conducted Band Edge**

### **3.7.1 Description of Conducted Band Edge Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **3.7.2 Test Procedures**

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.



### 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

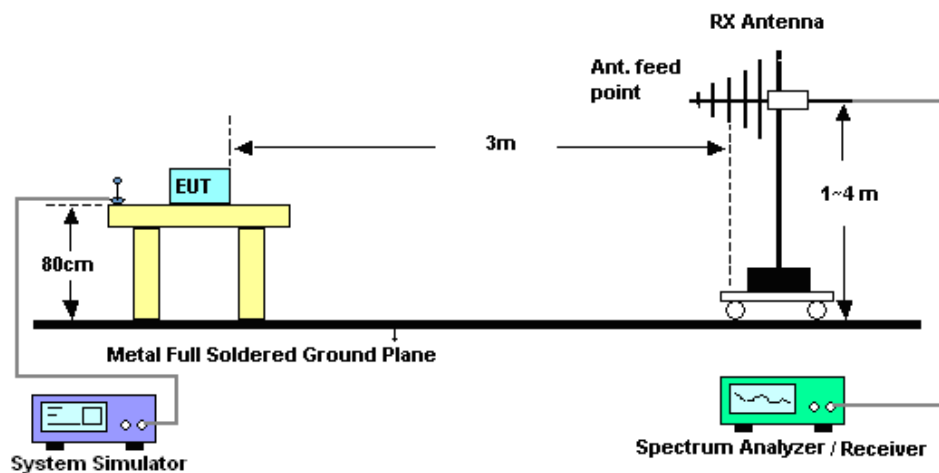

#### 4.2.2 For radiated test above 1GHz

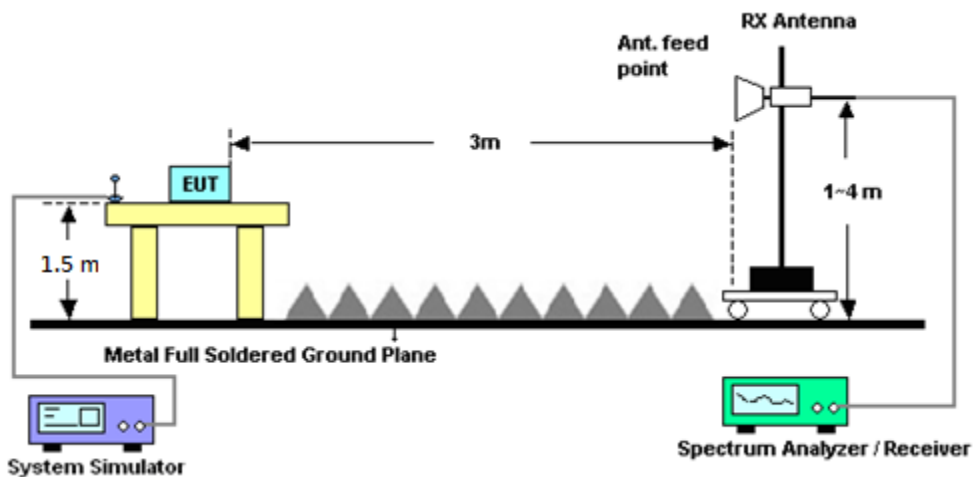

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## **4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement**

### **4.4.1 Description of the ERP/EIRP Measurement**

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

### **4.4.2 Test Procedures**

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ . Take the record of the output power at substitution antenna.



|              | GSM/GPRS/EDGE | WCDMA/HSPA |
|--------------|---------------|------------|
| SPAN         | 500kHz        | 10MHz      |
| RBW          | 10kHz         | 100kHz     |
| VBW          | 30kHz         | 300kHz     |
| Detector     | RMS           | RMS        |
| Trace        | Average       | Average    |
| Average Type | Power         | Power      |
| Sweep Count  | 100           | 100        |



## **4.5 Field Strength of Spurious Radiation Measurement**

### **4.5.1 Description of Field Strength of Spurious Radiated Measurement**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **4.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$



## 5 List of Measuring Equipment

| Instrument                | Manufacturer    | Model No.                | Serial No.                 | Characteristics            | Calibration Date | Test Date                        | Due Date      | Remark                |
|---------------------------|-----------------|--------------------------|----------------------------|----------------------------|------------------|----------------------------------|---------------|-----------------------|
| Temperature Chamber       | ESPEC           | SU-641                   | 92013721                   | -30℃ ~70℃                  | Nov. 20, 2015    | Jun. 22, 2016 ~<br>Jun. 24, 2016 | Nov. 19, 2016 | Conducted (TH03-HY)   |
| Programmable Power Supply | GW Instek       | PSS-2005                 | EL883644                   | Voltage:0~20V;Current:0~5A | Nov. 26, 2015    | Jun. 22, 2016 ~<br>Jun. 24, 2016 | Nov. 25, 2016 | Conducted (TH03-HY)   |
| Base Station (Measure)    | Rohde & Schwarz | CMU200                   | 117995                     | GSM / GPRS / WCDMA / CDMA  | Jul. 26, 2015    | Jun. 22, 2016 ~<br>Jun. 24, 2016 | Jul. 25, 2016 | Conducted (TH03-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz | FSP40                    | 100057                     | 9kHz~40GHz                 | Nov. 23, 2015    | Jun. 22, 2016 ~<br>Jun. 24, 2016 | Nov. 22, 2016 | Conducted (TH03-HY)   |
| Amplifier                 | SONOMA          | 310N                     | 187312                     | 9kHz~1GHz                  | Nov. 20, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Nov. 19, 2016 | Radiation (03CH12-HY) |
| Bilog Antenna             | TESEQ           | CBL 6111D                | 35414                      | 30MHz~1GHz                 | Nov. 17, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Nov. 16, 2016 | Radiation (03CH12-HY) |
| Horn Antenna              | SCHWARZBECK     | BBHA 9120 D              | 9120D-1326                 | 1GHz ~ 18GHz               | Oct. 08, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Oct. 07, 2016 | Radiation (03CH12-HY) |
| Spectrum Analyzer         | Keysight        | N9010A                   | MY54200486                 | 10Hz ~ 44GHZ               | Sep. 24, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Sep. 23, 2016 | Radiation (03CH12-HY) |
| Bilog Antenna             | TESEQ           | CBL 6111D                | 37059                      | 30MHz~1GHz                 | Dec. 29, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Dec. 28, 2016 | Radiation (03CH12-HY) |
| EMI Test Receiver         | Rohde & Schwarz | ESU26                    | 100390                     | 20Hz~26.5GHz               | Dec. 21, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Dec. 20, 2016 | Radiation (03CH12-HY) |
| Horn Antenna              | SCHWARZBECK     | BBHA 9120D               | 9120D-1328                 | 1GHz ~ 18GHz               | Nov. 02, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Nov. 01, 2016 | Radiation (03CH12-HY) |
| Preamplifier              | MITEQ           | AMF-7D-00<br>101800-30-1 | 1815698                    | 1GHz~18GHz                 | Dec. 14, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Dec. 13, 2016 | Radiation (03CH12-HY) |
| RF Cable                  | HUBER + SUHNER  | SUCOFLEX 104             | MY24958/4,M<br>Y28653/4,MY | 26GHz~40GHz                | Jan. 12, 2016    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Jan. 11, 2017 | Radiation (03CH12-HY) |
| RF Cable                  | HUBER + SUHNER  | SUCOFLEX 104             | MY24958/4,M<br>Y28653/4,MY | 1GHz~26GHz                 | Jan. 12, 2016    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Jan. 11, 2017 | Radiation (03CH12-HY) |
| RF Cable                  | HUBER + SUHNER  | SUCOFLEX 104             | MY24958/4,M<br>Y28653/4,MY | 30MHz~1GHz                 | Jan. 12, 2016    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Jan. 11, 2017 | Radiation (03CH12-HY) |
| RF Cable                  | HUBER + SUHNER  | SUCOFLEX 104             | MY24958/4,M<br>Y28653/4,MY | 9K~30MHz                   | Jan. 12, 2016    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Jan. 11, 2017 | Radiation (03CH12-HY) |
| Antenna Mast              | EMEC            | AM-BS-450<br>0-B         | N/A                        | 1m~4m                      | N/A              | Jun. 28, 2016 ~<br>Jul. 03, 2016 | N/A           | Radiation (03CH12-HY) |
| Turn Table                | EMEC            | TT2000                   | N/A                        | 0~360 Degree               | N/A              | Jun. 28, 2016 ~<br>Jul. 03, 2016 | N/A           | Radiation (03CH12-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK     | BBHA 9170                | BBHA917057<br>6            | 18GHz ~ 40GHz              | Apr. 15, 2016    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Apr. 14, 2017 | Radiation (03CH12-HY) |
| Preamplifier              | MITEQ           | TTA0204                  | 1872107                    | 2GHz~40GHz                 | Feb. 15, 2016    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Feb. 14, 2017 | Radiation (03CH12-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK     | BBHA 9170                | BBHA917058<br>4            | 18GHz- 40GHz               | Nov. 02, 2015    | Jun. 28, 2016 ~<br>Jul. 03, 2016 | Nov. 01, 2016 | Radiation (03CH12-HY) |
| Signal Generator          | Rohde & Schwarz | SMF100A                  | 101107                     | 100kHz~40GHz               | May 19, 2016     | Jun. 28, 2016 ~<br>Jul. 03, 2016 | May 18, 2017  | Radiation (03CH12-HY) |



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 5.40 |
|-------------------------------------------------------------------------|------|

## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

| Conducted Power (*Unit: dBm) |               |       |        |               |        |        |
|------------------------------|---------------|-------|--------|---------------|--------|--------|
| Band                         | WCDMA Band II |       |        | WCDMA Band IV |        |        |
| Channel                      | 9262          | 9400  | 9538   | 1312          | 1413   | 1513   |
| Frequency                    | 1852.4        | 1880  | 1907.6 | 1712.4        | 1732.6 | 1752.6 |
| RMC 12.2K                    | 22.60         | 22.71 | 22.64  | 22.89         | 22.79  | 22.76  |
| HSDPA Subtest-1              | 21.46         | 21.62 | 21.46  | 21.84         | 21.83  | 21.62  |
| HSDPA Subtest-2              | 21.63         | 21.60 | 21.68  | 21.89         | 21.86  | 21.73  |
| HSDPA Subtest-3              | 21.09         | 21.07 | 21.13  | 21.26         | 21.24  | 21.20  |
| HSDPA Subtest-4              | 21.01         | 21.06 | 21.12  | 21.23         | 21.16  | 21.04  |
| HSUPA Subtest-1              | 21.43         | 21.65 | 21.65  | 21.73         | 21.70  | 21.47  |
| HSUPA Subtest-2              | 19.36         | 19.52 | 19.53  | 19.58         | 19.64  | 19.41  |
| HSUPA Subtest-3              | 20.65         | 20.71 | 20.68  | 20.47         | 20.55  | 20.47  |
| HSUPA Subtest-4              | 19.51         | 19.61 | 19.65  | 19.52         | 19.58  | 19.33  |
| HSUPA Subtest-5              | 21.14         | 21.35 | 21.36  | 21.31         | 21.51  | 21.37  |











## A1. WCDMA

### Peak-to-Average Ratio

| Mode       | WCDMA Band II | WCDMA Band IV | Limit: 13dB |
|------------|---------------|---------------|-------------|
| Mod.       | RMC 12.2Kbps  | RMC 12.2Kbps  | Result      |
| Lowest CH  | 3.40          | 3.20          | PASS        |
| Middle CH  | 3.36          | 3.24          |             |
| Highest CH | 3.44          | 3.24          |             |
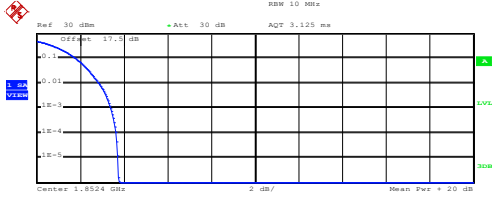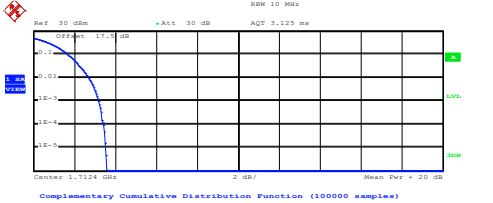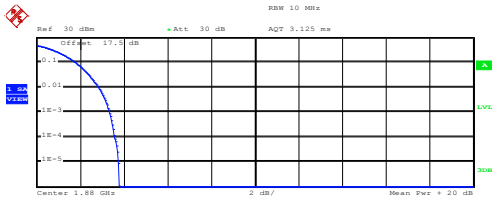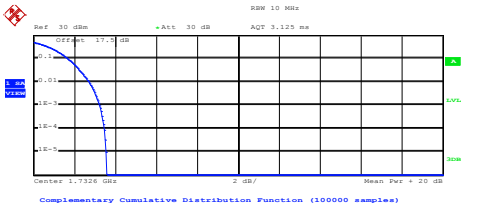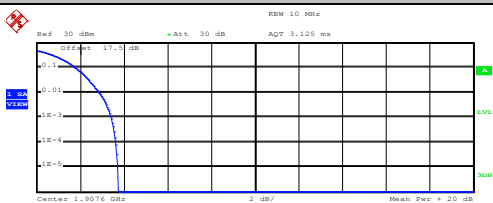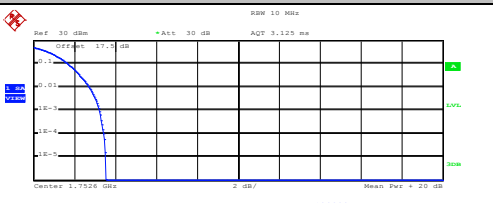
| WCDMA Band II (RMC 12.2Kbps)                                                                                                                                                                                                                                                                                                                | WCDMA Band IV (RMC 12.2Kbps)                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lowest Channel                                                                                                                                                                                                                                                                                                                              | Lowest Channel                                                                                                                                                                                                                                                                                                                               |
|  <p>Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, RBW: 10 MHz</p> <p>Center: 1.8524 GHz, 2 dB/</p> <p>Mean: 19.51 dBm, Peak: 23.27 dBm, Crest: 3.76 dB</p> <p>10 %: 1.80 dB, 1 %: 2.84 dB, .1 %: 3.40 dB, .01 %: 3.64 dB</p> <p>Date: 22.JUN.2016 21:51:58</p>   |  <p>Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, RBW: 10 MHz</p> <p>Center: 1.7124 GHz, 2 dB/</p> <p>Mean: 20.15 dBm, Peak: 23.72 dBm, Crest: 3.57 dB</p> <p>10 %: 1.68 dB, 1 %: 2.72 dB, .1 %: 3.20 dB, .01 %: 3.44 dB</p> <p>Date: 24.JUN.2016 10:08:18</p>   |
| Middle Channel                                                                                                                                                                                                                                                                                                                              | Middle Channel                                                                                                                                                                                                                                                                                                                               |
|  <p>Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, RBW: 10 MHz</p> <p>Center: 1.85 GHz, 2 dB/</p> <p>Mean: 19.42 dBm, Peak: 23.20 dBm, Crest: 3.78 dB</p> <p>10 %: 1.80 dB, 1 %: 2.84 dB, .1 %: 3.36 dB, .01 %: 3.60 dB</p> <p>Date: 22.JUN.2016 21:52:08</p>    |  <p>Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, RBW: 10 MHz</p> <p>Center: 1.7526 GHz, 2 dB/</p> <p>Mean: 19.51 dBm, Peak: 23.08 dBm, Crest: 3.57 dB</p> <p>10 %: 1.68 dB, 1 %: 2.72 dB, .1 %: 3.24 dB, .01 %: 3.48 dB</p> <p>Date: 24.JUN.2016 10:08:27</p>  |
| Highest Channel                                                                                                                                                                                                                                                                                                                             | Highest Channel                                                                                                                                                                                                                                                                                                                              |
|  <p>Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, RBW: 10 MHz</p> <p>Center: 1.9076 GHz, 2 dB/</p> <p>Mean: 19.16 dBm, Peak: 22.91 dBm, Crest: 3.76 dB</p> <p>10 %: 1.80 dB, 1 %: 2.88 dB, .1 %: 3.44 dB, .01 %: 3.64 dB</p> <p>Date: 22.JUN.2016 21:52:18</p> |  <p>Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, RBW: 10 MHz</p> <p>Center: 1.7526 GHz, 2 dB/</p> <p>Mean: 19.98 dBm, Peak: 23.51 dBm, Crest: 3.53 dB</p> <p>10 %: 1.68 dB, 1 %: 2.72 dB, .1 %: 3.24 dB, .01 %: 3.44 dB</p> <p>Date: 24.JUN.2016 10:08:35</p> |




**26dB Bandwidth**

| Mode       | WCDMA Band II | WCDMA Band IV |
|------------|---------------|---------------|
| Mod.       | RMC 12.2Kbps  | RMC 12.2Kbps  |
| Lowest CH  | 4.68          | 4.71          |
| Middle CH  | 4.69          | 4.68          |
| Highest CH | 4.69          | 4.68          |



## WCDMA Band II (RMC 12.2Kbps)


## Lowest Channel

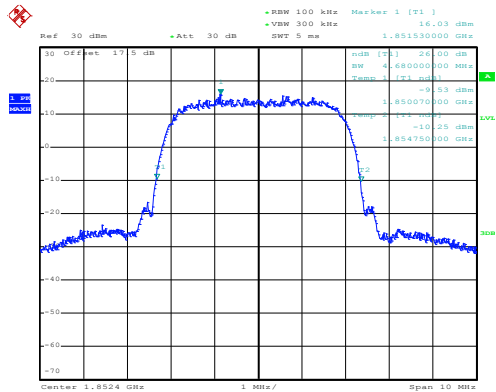

Date: 22.JUN.2016 21:24:07


## WCDMA Band IV (RMC 12.2Kbps)

## Lowest Channel

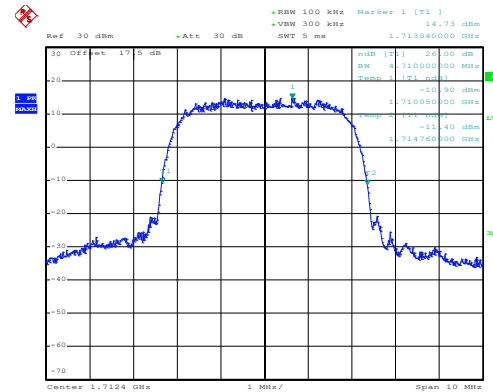


Date: 24.JUN.2016 09:55:54

## Middle Channel

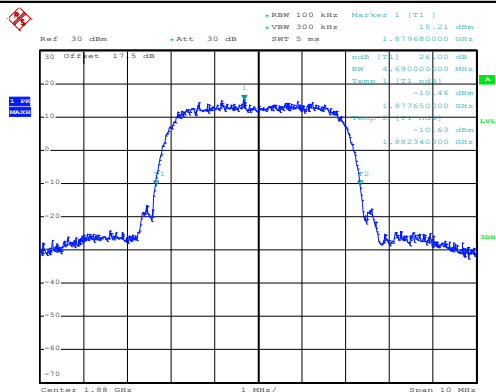


Date: 22.JUN.2016 21:24:35

## Middle Channel

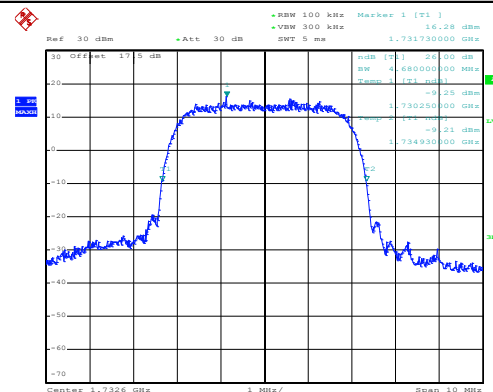


Date: 24.JUN.2016 09:56:22

## Highest Channel

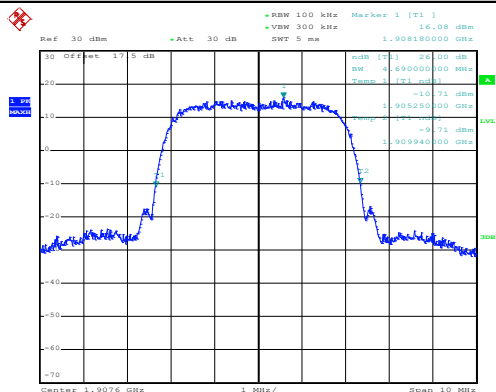

Date: 22.JUN.2016 21:25:03

## Highest Channel

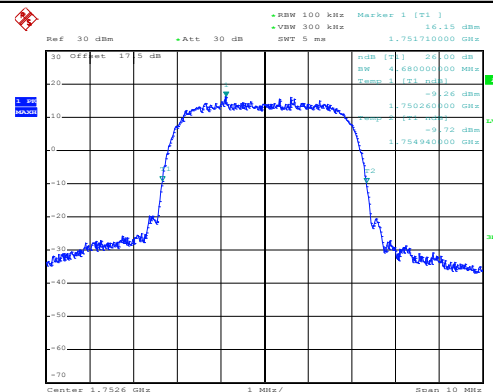


Date: 24.JUN.2016 09:56:50



## Occupied Bandwidth

| Mode       | WCDMA Band II | WCDMA Band IV |
|------------|---------------|---------------|
| Mod.       | RMC 12.2Kbps  | RMC 12.2Kbps  |
| Lowest CH  | 4.11          | 4.12          |
| Middle CH  | 4.12          | 4.11          |
| Highest CH | 4.12          | 4.12          |

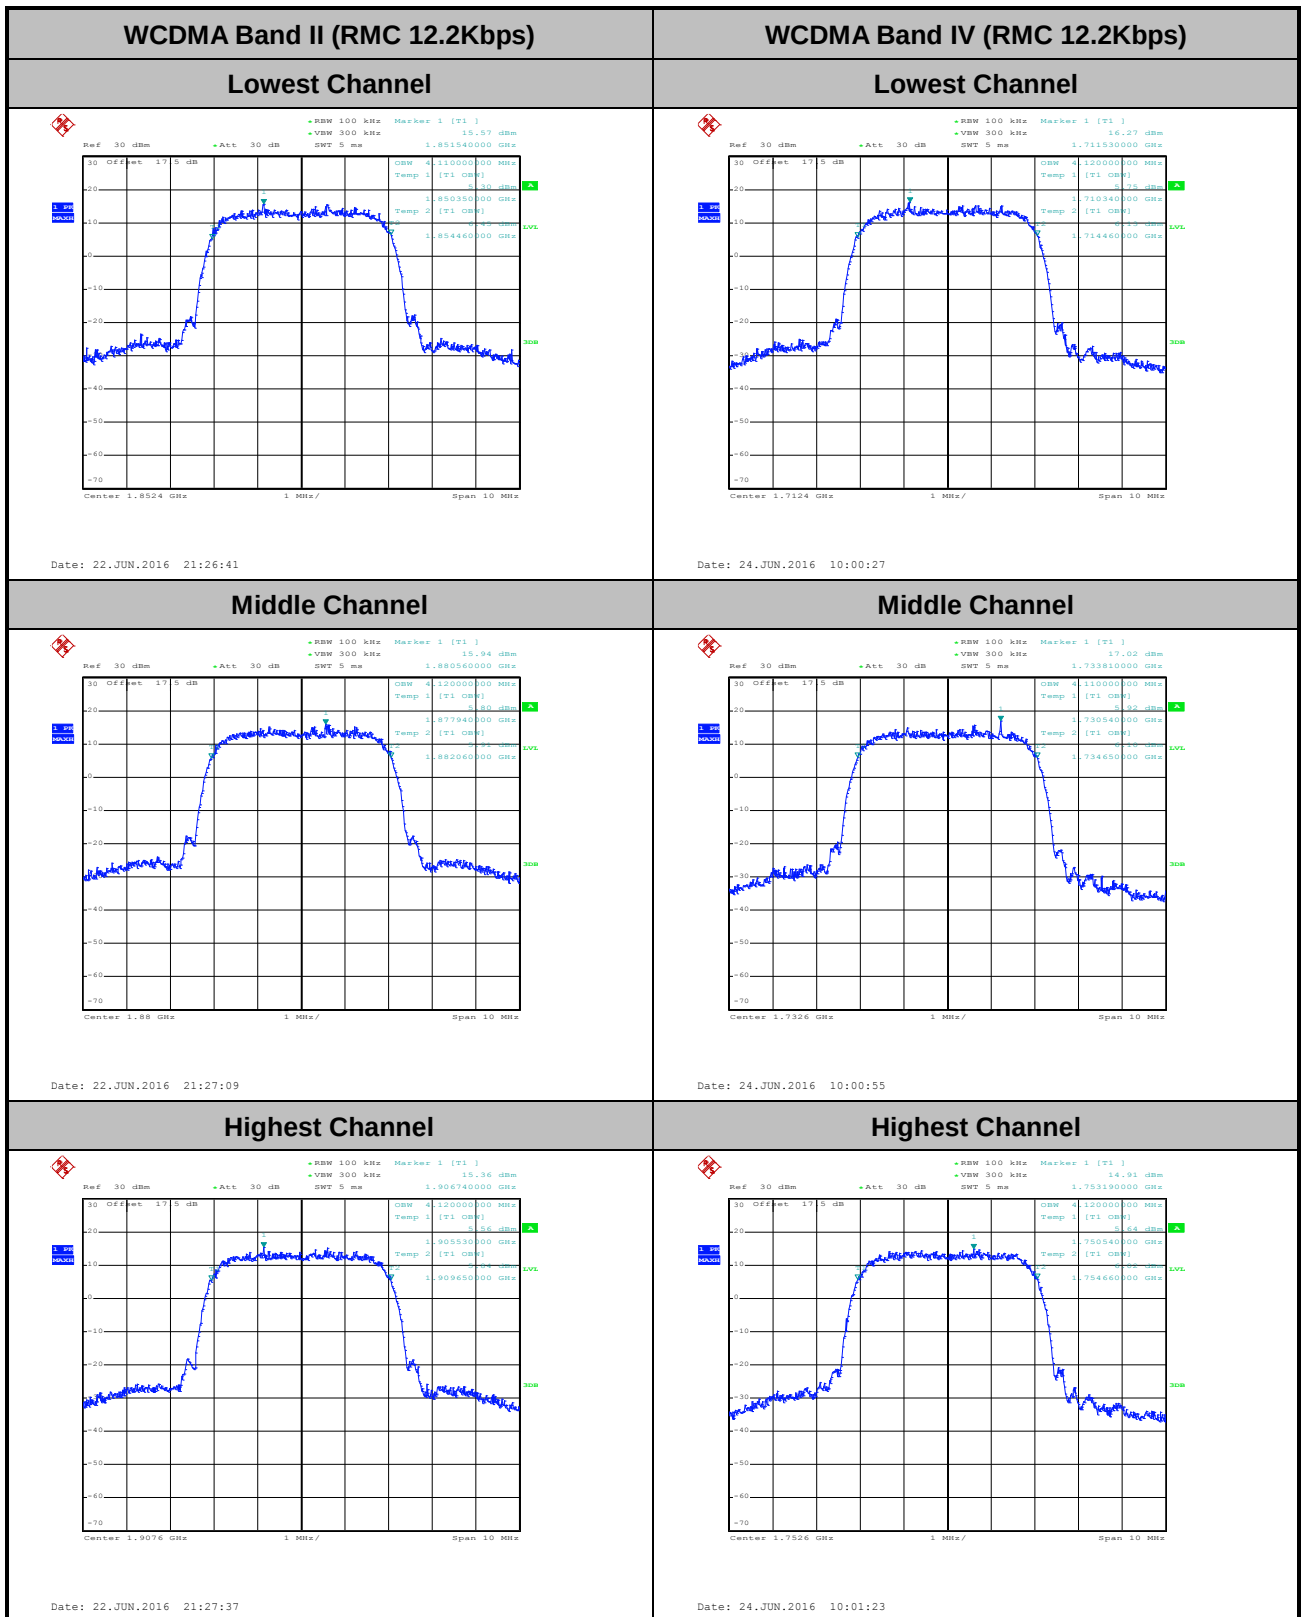




## **Conducted Band Edge**




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

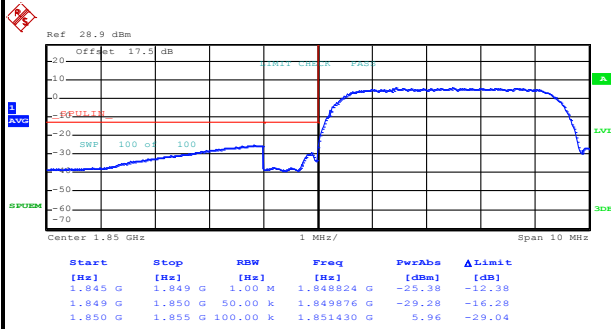

Date: 22.JUN.2016 21:38:48

Highest Band Edge

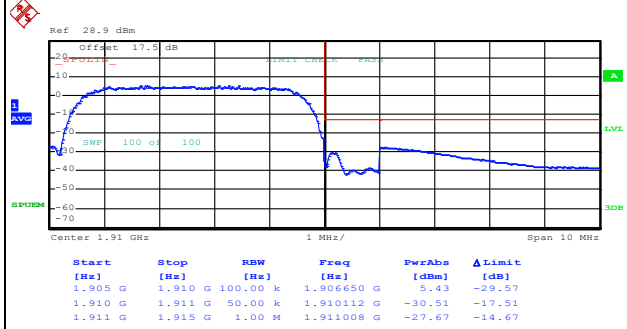


Date: 22.JUN.2016 21:41:31






WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

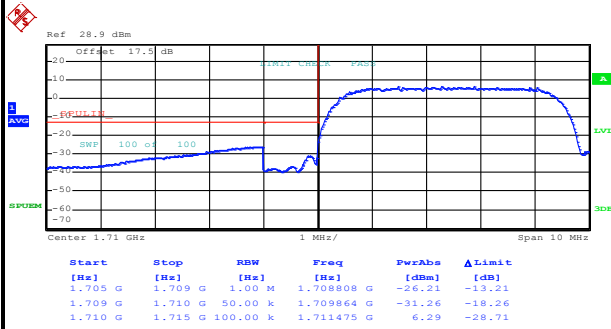

Date: 24.JUN.2016 10:11:53

Highest Band Edge

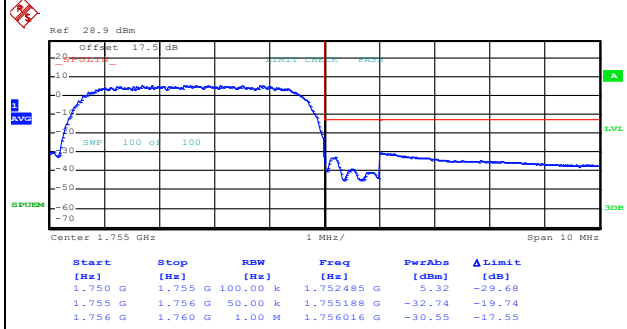


Date: 24.JUN.2016 10:14:36



## **Conducted Spurious Emission**

## WCDMA Band II (RMC 12.2Kbps)


## Lowest Channel

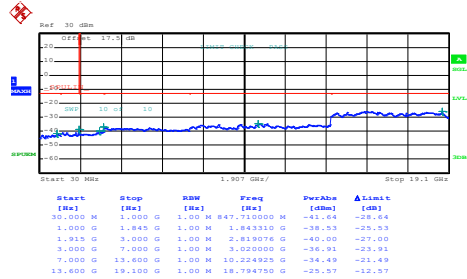

Date: 22.JUN.2016 21:31:09


## WCDMA Band IV (RMC 12.2Kbps)

## Lowest Channel

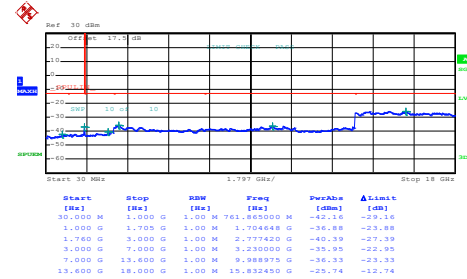


Date: 24.JUN.2016 10:03:24

## Middle Channel

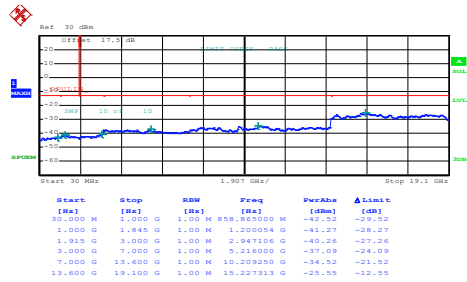


Date: 22.JUN.2016 21:31:55

## Middle Channel

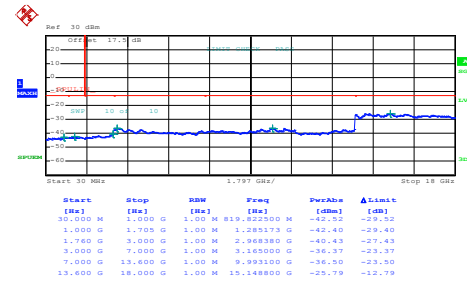


Date: 24.JUN.2016 10:04:10

## Highest Channel

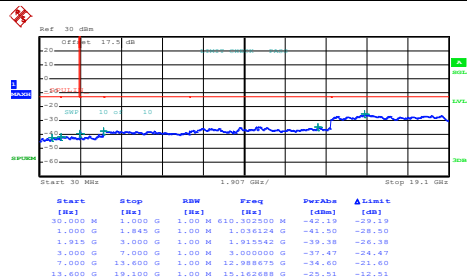

Date: 22.JUN.2016 21:32:41

## Highest Channel

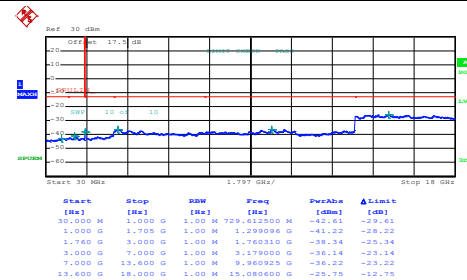

Date: 24.JUN.2016 10:04:56

## Frequency Stability

| Test Conditions  | Middle Channel    | WCDMA Band II<br>(RMC 12.2Kbps) | Limit             |
|------------------|-------------------|---------------------------------|-------------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm)                 | Note 2.<br>Result |
| 50               | Normal Voltage    | 0.0016                          | PASS              |
| 40               | Normal Voltage    | 0.0005                          |                   |
| 30               | Normal Voltage    | 0.0011                          |                   |
| 20(Ref.)         | Normal Voltage    | 0.0000                          |                   |
| 10               | Normal Voltage    | 0.0005                          |                   |
| 0                | Normal Voltage    | 0.0005                          |                   |
| -10              | Normal Voltage    | 0.0016                          |                   |
| -20              | Normal Voltage    | 0.0005                          |                   |
| -30              | Normal Voltage    | 0.0011                          |                   |
| 20               | Maximum Voltage   | 0.0016                          |                   |
| 20               | Normal Voltage    | 0.0005                          |                   |
| 20               | Battery End Point | 0.0000                          |                   |

**Note:**

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



| Test Conditions  | Middle Channel    | WCDMA Band IV<br>(RMC 12.2Kbps) | Limit             |
|------------------|-------------------|---------------------------------|-------------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm)                 | Note 2.<br>Result |
| 50               | Normal Voltage    | 0.0012                          | PASS              |
| 40               | Normal Voltage    | 0.0000                          |                   |
| 30               | Normal Voltage    | 0.0006                          |                   |
| 20(Ref.)         | Normal Voltage    | 0.0000                          |                   |
| 10               | Normal Voltage    | 0.0012                          |                   |
| 0                | Normal Voltage    | 0.0006                          |                   |
| -10              | Normal Voltage    | 0.0006                          |                   |
| -20              | Normal Voltage    | 0.0012                          |                   |
| -30              | Normal Voltage    | 0.0017                          |                   |
| 20               | Maximum Voltage   | 0.0006                          |                   |
| 20               | Normal Voltage    | 0.0000                          |                   |
| 20               | Battery End Point | 0.0063                          |                   |

**Note:**

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

| WCDMA Band II (RMC 12.2Kbps) |                      |                 |                  |                         |                         |                          |                            |                             |                       |
|------------------------------|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel                      | Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Lowest                       | 3707                 | -54.18          | -13              | -41.18                  | -47.99                  | -60.76                   | 1.67                       | 8.25                        | H                     |
|                              | 5555                 | -62.75          | -13              | -49.75                  | -63.32                  | -69.82                   | 2.66                       | 9.72                        | H                     |
|                              | 7410                 | -58.57          | -13              | -45.57                  | -64.55                  | -67.73                   | 2.46                       | 11.62                       | H                     |
|                              | 3707                 | -53.38          | -13              | -40.38                  | -46.94                  | -59.96                   | 1.67                       | 8.25                        | V                     |
|                              | 5555                 | -62.05          | -13              | -49.05                  | -62.58                  | -69.12                   | 2.66                       | 9.72                        | V                     |
|                              | 7410                 | -58.14          | -13              | -45.14                  | -64.42                  | -67.30                   | 2.46                       | 11.62                       | V                     |
| Middle                       | 3763                 | -54.76          | -13              | -41.76                  | -48.66                  | -61.39                   | 1.69                       | 8.32                        | H                     |
|                              | 5639                 | -62.64          | -13              | -49.64                  | -63.45                  | -69.69                   | 2.71                       | 9.76                        | H                     |
|                              | 7522                 | -58.79          | -13              | -45.79                  | -65.05                  | -68.18                   | 2.42                       | 11.81                       | H                     |
|                              | 3763                 | -52.28          | -13              | -39.28                  | -45.96                  | -58.91                   | 1.69                       | 8.32                        | V                     |
|                              | 5639                 | -61.37          | -13              | -48.37                  | -62.12                  | -68.42                   | 2.71                       | 9.76                        | V                     |
|                              | 7522                 | -58.40          | -13              | -45.40                  | -64.94                  | -67.79                   | 2.42                       | 11.81                       | V                     |
| Highest                      | 3812                 | -53.08          | -13              | -40.08                  | -47.02                  | -59.75                   | 1.70                       | 8.37                        | H                     |
|                              | 5723                 | -61.03          | -13              | -48.03                  | -62.07                  | -68.07                   | 2.75                       | 9.79                        | H                     |
|                              | 7627                 | -58.60          | -13              | -45.60                  | -65.03                  | -68.09                   | 2.39                       | 11.88                       | H                     |
|                              | 3812                 | -50.30          | -13              | -37.30                  | -44.03                  | -56.97                   | 1.70                       | 8.37                        | V                     |
|                              | 5723                 | -60.22          | -13              | -47.22                  | -61.19                  | -67.26                   | 2.75                       | 9.79                        | V                     |
|                              | 7627                 | -58.42          | -13              | -45.42                  | -65.09                  | -67.91                   | 2.39                       | 11.88                       | V                     |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



| WCDMA Band IV (RMC 12.2Kbps) |                      |                 |                  |                         |                         |                          |                            |                             |                       |
|------------------------------|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel                      | Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Lowest                       | 3427                 | -61.19          | -13              | -48.19                  | -54.61                  | -67.29                   | 1.58                       | 7.68                        | H                     |
|                              | 5135                 | -64.01          | -13              | -51.01                  | -63.53                  | -71.30                   | 2.41                       | 9.70                        | H                     |
|                              | 6850                 | -60.40          | -13              | -47.40                  | -64.72                  | -68.38                   | 2.64                       | 10.62                       | H                     |
|                              | 3427                 | -58.07          | -13              | -45.07                  | -51.21                  | -64.17                   | 1.58                       | 7.68                        | V                     |
|                              | 5135                 | -64.29          | -13              | -51.29                  | -63.63                  | -71.58                   | 2.41                       | 9.70                        | V                     |
|                              | 6850                 | -59.98          | -13              | -46.98                  | -64.56                  | -67.96                   | 2.64                       | 10.62                       | V                     |
| Middle                       | 3462                 | -60.33          | -13              | -47.33                  | -53.82                  | -66.57                   | 1.59                       | 7.83                        | H                     |
|                              | 5198                 | -63.51          | -13              | -50.51                  | -63.19                  | -70.76                   | 2.45                       | 9.70                        | H                     |
|                              | 6927                 | -59.84          | -13              | -46.84                  | -64.5                   | -67.94                   | 2.61                       | 10.71                       | H                     |
|                              | 3462                 | -58.58          | -13              | -45.58                  | -51.78                  | -64.82                   | 1.59                       | 7.83                        | V                     |
|                              | 5198                 | -63.98          | -13              | -50.98                  | -63.51                  | -71.23                   | 2.45                       | 9.70                        | V                     |
|                              | 6927                 | -59.37          | -13              | -46.37                  | -61.31                  | -67.47                   | 2.61                       | 10.71                       | V                     |
| Highest                      | 3504                 | -62.05          | -13              | -49.05                  | -55.61                  | -68.45                   | 1.61                       | 8.00                        | H                     |
|                              | 5254                 | -64.19          | -13              | -51.19                  | -63.99                  | -71.41                   | 2.48                       | 9.70                        | H                     |
|                              | 7011                 | -60.07          | -13              | -47.07                  | -65.02                  | -68.31                   | 2.59                       | 10.82                       | H                     |
|                              | 3504                 | -61.30          | -13              | -48.30                  | -54.55                  | -67.70                   | 1.61                       | 8.00                        | V                     |
|                              | 5254                 | -64.42          | -13              | -51.42                  | -64.1                   | -71.64                   | 2.48                       | 9.70                        | V                     |
|                              | 7011                 | -59.67          | -13              | -46.67                  | -64.92                  | -67.91                   | 2.59                       | 10.82                       | V                     |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**ERP/ERIP**

| Channel | Mode          | Horizontal |         | Vertical  |         |
|---------|---------------|------------|---------|-----------|---------|
|         |               | EIRP(dBm)  | EIRP(W) | EIRP(dBm) | EIRP(W) |
| Lowest  | WCDMA Band II | 22.51      | 0.1782  | 21.98     | 0.1578  |
| Middle  | RMC 12.2Kbps  | 22.52      | 0.1786  | 21.80     | 0.1514  |
| Highest |               | 22.32      | 0.1706  | 22.12     | 0.1629  |
| Limit   | EIRP < 2W     | Result     |         | PASS      |         |

| Channel | Mode          | Horizontal |         | Vertical  |         |
|---------|---------------|------------|---------|-----------|---------|
|         |               | EIRP(dBm)  | EIRP(W) | EIRP(dBm) | EIRP(W) |
| Lowest  | WCDMA Band IV | 22.52      | 0.1786  | 22.17     | 0.1648  |
| Middle  | RMC 12.2Kbps  | 21.75      | 0.1496  | 21.59     | 0.1442  |
| Highest |               | 22.17      | 0.1648  | 21.84     | 0.1528  |
| Limit   | EIRP < 1W     | Result     |         | PASS      |         |





## **Appendix C. Original Report**

Please refer to Sporton report number FG651612A.