



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 10744  
**FCC ID** : IHDT56WH3  
**STANDARD** : 47 CFR Part 2, 22(H), 27(M)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Mar. 17, 2017 and completely tested on Apr. 21, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**Sporton International (KunShan) INC.**

**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 6
1.5 Modification of EUT ..... 6
1.6 Specification of Accessory ..... 6
1.7 Re-use of Measured Data ..... 7
1.8 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 8
1.9 Testing Location ..... 9
1.10 Applicable Standards..... 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10
2.1 Test Mode ..... 10
2.2 Connection Diagram of Test System ..... 11
2.3 Support Unit used in test configuration and system ..... 12
2.4 Measurement Results Explanation Example ..... 12
2.5 Frequency List of Low/Middle/High Channels ..... 13
3 CONDUCTED TEST ITEMS ..... 14
3.1 Measuring Instruments ..... 14
3.2 Test Setup ..... 14
3.3 Test Result of Conducted Test ..... 14
3.4 Conducted Output Power and EIRP ..... 15
3.5 Peak-to-Average Ratio ..... 16
3.6 Occupied Bandwidth ..... 17
3.7 Conducted Band Edge ..... 18
3.8 Conducted Spurious Emission ..... 19
3.9 Frequency Stability ..... 20
4 RADIATED TEST ITEMS ..... 21
4.1 Measuring Instruments ..... 21
4.2 Test Setup ..... 21
4.3 Test Result of Radiated Test ..... 21
4.4 Radiated Spurious Emission ..... 22
5 LIST OF MEASURING EQUIPMENT ..... 23
6 UNCERTAINTY OF EVALUATION ..... 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS
APPENDIX D. REFERENCE REPORT





SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)	EIRP < 2Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])	PASS	Under limit 31.29 dB at 10131.000 MHz



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10744
FCC ID	IHDT56WH3
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.1 LE
IMEI Code	Conducted: 355664080006715/355664080006723 Radiation: 355664080005717/ 355664080005725
HW Version	DVT2
SW Version	sanders_n-userdebug 7.1.1 NPS26.85 1826 intcfg.test-keys
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The test results of LTE Band 5 were consistent with FCC ID: IHDT56WH2, please refer to section 1.7 for the details of data-reuse method. Only LTE Band 7 is full test according to the difference.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz
<b>Rx Frequency</b>	LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz
<b>Bandwidth</b>	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 7 : 23.75 dBm
<b>Antenna Gain</b>	LTE Band 7 : -0.83 dBi
<b>Type of Modulation</b>	QPSK / 16QAM

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Specification of Accessory

Specification of Accessory				
<b>AC Adapter</b>	<b>Brand Name</b>	Motorola(Salom)	<b>Model Name</b>	SC-22
	<b>Power Rating</b>	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA		
<b>Battery</b>	<b>Brand Name</b>	Motorola (ATL)	<b>Model Name</b>	HG30
	<b>Power Rating</b>	3.8Vdc,3000mAh	<b>Type</b>	Li-ion, ATL404296
<b>Earphone</b>	<b>Brand Name</b>	Motorola(JuWei)	<b>Model Name</b>	JWEP0998-W09R
	<b>Signal Line Type</b>	1.23 meter, non-shielded cable, without ferrite core		
<b>USB Cable</b>	<b>Brand Name</b>	Motorola(hetong)	<b>Model Name</b>	HT-SJX-17030102
	<b>Signal Line Type</b>	1.02 meter, shielded cable, without core		



## 1.7 Re-use of Measured Data

### 1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 10744, FCC ID: IHDT56WH3) is electrically identical to the reference device (Model: 10742, 10741, FCC ID: IHDT56WH2) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

### 1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., some difference of population/depopulation to enable support of different cellular bands, please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG731705-01B for the reference device Model: 10742, 10741, FCC ID: IHDT56WH2):

### 1.7.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, Conducted Band-edge and Conducted spurious emission, the test results of LTE Band 5 were consistent with FCC ID: IHDT56WH2, LTE Band 7 perform full test according to the difference.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

### 1.7.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE (LTE)	IHDT56WH2	Part22H.24E.27L.27M.27H (FG731705-01B)	All sections applicable For LTE Band 5



### 1.8 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M51G7D	-	0.1941	4M49W7D	-	0.1641
10	2505.0 ~ 2565.0	9M03G7D	0.0015	0.1884	9M01W7D	-	0.1556
15	2507.5 ~ 2562.5	13M4G7D	-	0.1919	13M4W7D	-	0.1648
20	2510.0 ~ 2560.0	18M3G7D	-	0.1959	18M3W7D	-	0.1622



### 1.9 Testing Location

<b>Test Site</b>	Sporton International (KunShan) INC.		
<b>Test Site Location</b>	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	CO01-KS	03CH03-KS	306251

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Peak-to-Average Ratio	7	-	-				Y	Y	Y	Y		Y	Y	Y	Y
26dB and 99% Bandwidth	7	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
Conducted Band Edge	7	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
Conducted Spurious Emission	7	-	-	Y	Y	Y	Y	Y	Y	Y			Y	Y	Y
Frequency Stability	7	-	-		Y			Y				Y		Y	
E.I.R.P.	7	-	-	Y	Y	Y	Y	Y	Y	Y			Y	Y	Y
Radiated Spurious Emission	7	-	-	Y	Y	Y	Y	Y		Y				Y	
Note	<ol style="list-style-type: none"> <li>The mark "Y" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>														

## 2.2 Connection Diagram of Test System

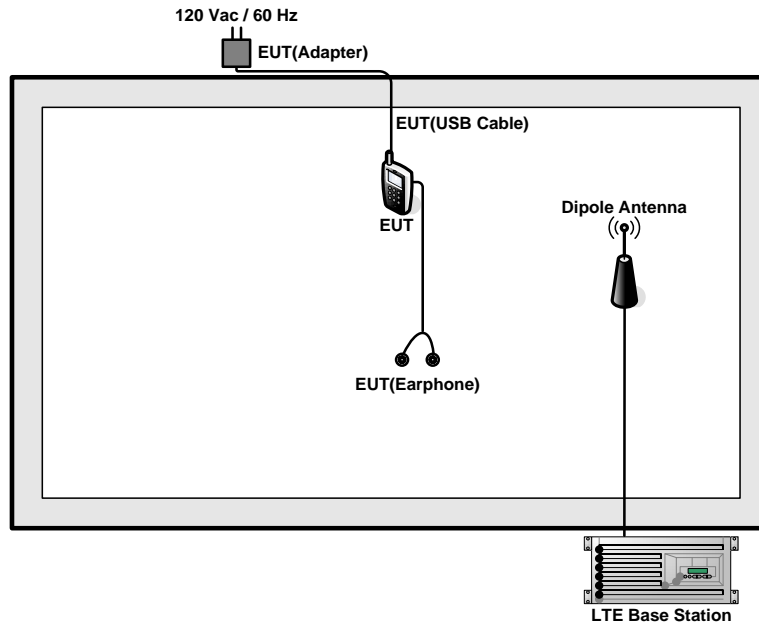



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

### 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 5.7 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.7 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

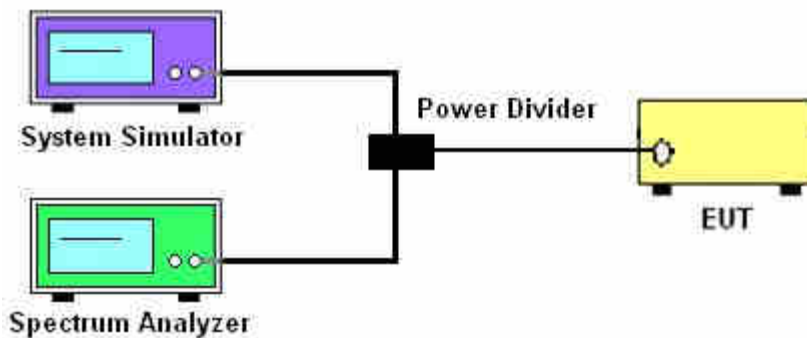

##### 3.2.3 Frequency Stability

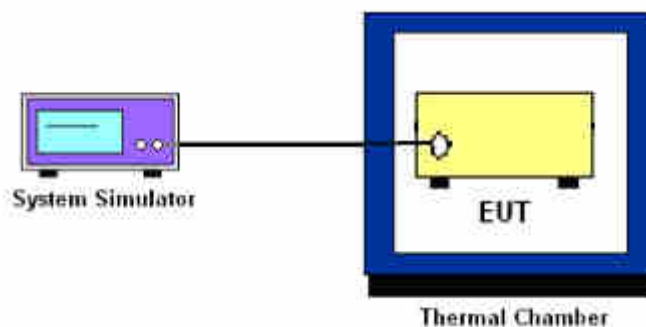

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 7.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



### 3.6 Occupied Bandwidth

#### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.1 and 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.



## 3.8 Conducted Spurious Emission

### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$ dBm.
11. For Band 7  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [55 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
 $= -25$ dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

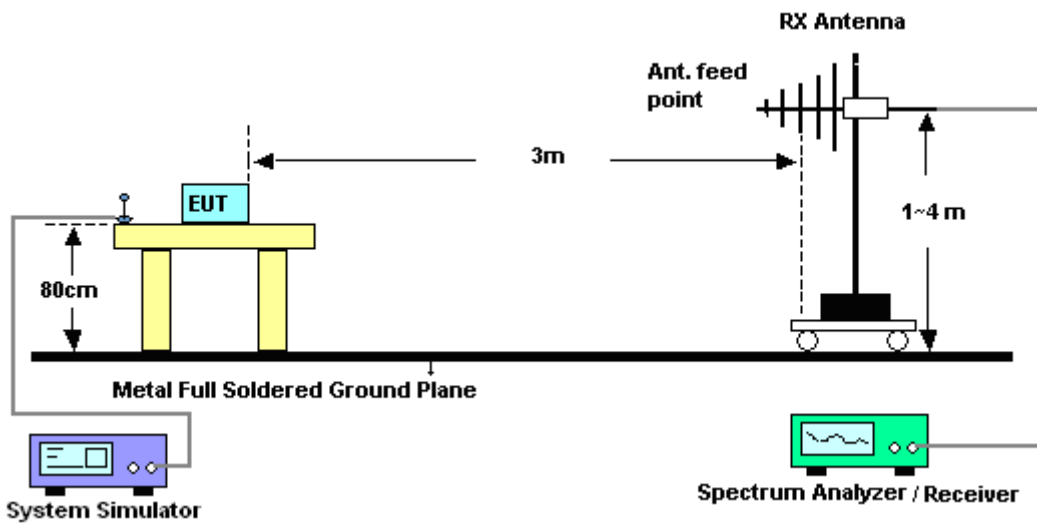

#### 4.2.2 For radiated test above 1GHz

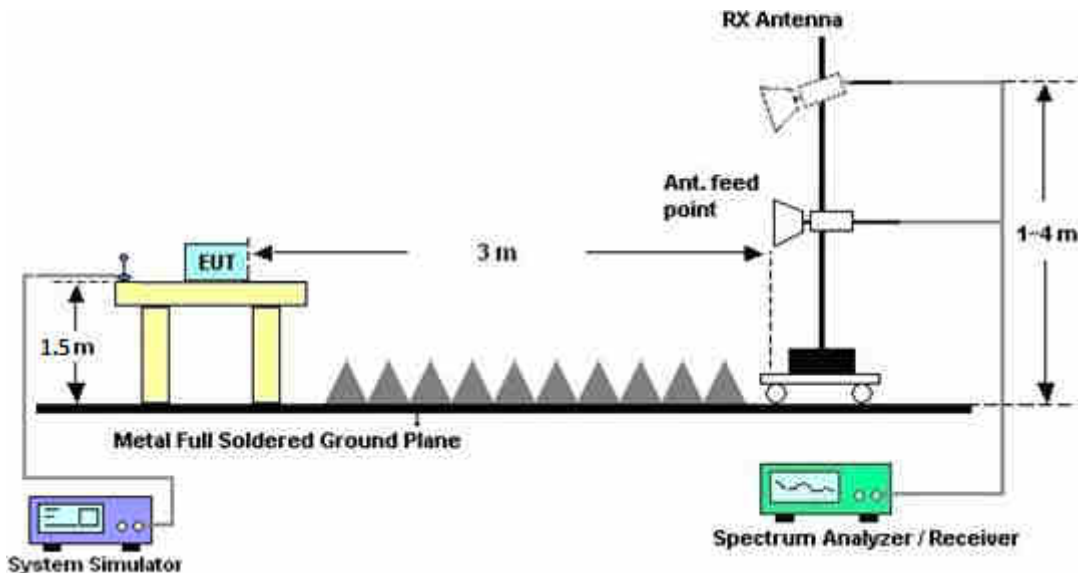

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

13. For Band 7:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$   
 $ERP \text{ (dBm)} = EIRP - 2.15$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Apr. 21, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct.13, 2016	Apr. 21, 2017	Oct.13, 2017	Conducted (TH01-KS)
Radio communication analyzer	Anritsu	MT8820C	6201300652	2G/3G/LTE Band	Aug. 08, 2016	Apr. 21, 2017	Aug. 07, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Apr. 18, 2017	Apr. 20, 2017	Apr.17, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz-2GHz	Apr. 22, 2016	Apr. 20, 2017	Apr 21, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2016	Apr. 20, 2017	Apr 21, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz ~40GHz	Oct. 19, 2016	Apr. 20, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr 18, 2017	Apr. 20, 2017	Apr 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 13, 2016	Apr. 20, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Apr. 18, 2017	Apr. 20, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Apr. 20, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 20, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 20, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 20, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.3dB
---	-------



### Appendix A. Test Results of Conducted Test

#### Conducted Output Power(Average power)

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.37	23.69	23.57
20	1	49		23.30	23.69	23.40
20	1	99		23.70	23.75	23.74
20	50	0		22.46	22.73	22.95
20	50	24		22.43	22.86	22.89
20	50	50		22.66	22.82	22.93
20	100	0		22.55	22.77	22.89
20	1	0	16-QAM	22.09	22.45	22.03
20	1	49		22.36	22.82	22.80
20	1	99		22.15	22.93	22.36
20	50	0		21.40	21.74	21.81
20	50	24		21.43	21.87	21.94
20	50	50		21.68	21.72	21.86
20	100	0		21.53	21.82	21.83
15	1	0	QPSK	22.78	23.57	23.18
15	1	37		23.03	23.66	23.30
15	1	74		23.27	23.66	23.47
15	36	0		22.44	23.04	22.84
15	36	20		22.38	22.92	22.88
15	36	39		22.57	23.12	22.91
15	75	0		22.49	22.80	22.89
15	1	0	16-QAM	22.26	22.92	22.90
15	1	37		22.41	22.90	22.75
15	1	74		22.53	22.91	23.00
15	36	0		21.38	21.77	21.91
15	36	20		21.34	21.82	21.96
15	36	39		21.55	21.86	21.86
15	75	0		21.52	22.17	22.07



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.92	23.29	23.35
10	1	25		23.03	23.58	23.34
10	1	49		22.66	23.11	23.15
10	25	0		22.37	22.77	22.80
10	25	12		22.52	22.88	22.87
10	25	25		22.39	22.83	22.88
10	50	0		22.33	22.77	22.92
10	1	0	16-QAM	22.28	22.68	22.74
10	1	25		22.28	22.70	22.52
10	1	49		22.28	22.61	22.75
10	25	0		21.31	21.82	22.02
10	25	12		21.58	22.37	22.12
10	25	25		21.55	21.91	22.01
10	50	0		21.34	21.77	21.92
5	1	0	QPSK	22.77	22.88	22.90
5	1	12		22.75	23.54	23.71
5	1	24		22.32	23.03	23.05
5	12	0		22.30	22.77	22.92
5	12	7		22.39	22.86	22.80
5	12	13		22.34	22.84	22.79
5	25	0		22.30	22.80	22.77
5	1	0	16-QAM	22.23	22.61	22.97
5	1	12		22.23	22.97	22.98
5	1	24		22.39	22.92	22.69
5	12	0		21.59	21.69	21.91
5	12	7		21.09	21.99	22.11
5	12	13		21.30	21.88	21.81
5	25	0		21.17	21.91	22.03



**EIRP**

LTE Band 7 (G <sub>T</sub> - L <sub>C</sub> = -0.83 dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
(MHz)									
Conducted Power (dBm)	22.75	23.54	23.71	23.03	23.58	23.34	23.27	23.66	23.47
Conducted Power (Watts)	0.1884	0.2259	0.2350	0.2009	0.2280	0.2158	0.2123	0.2323	0.2223
EIRP(dBm)	21.92	22.71	22.88	22.20	22.75	22.51	22.44	22.83	22.64
EIRP(Watts)	0.1556	0.1866	0.1941	0.1660	0.1884	0.1782	0.1754	0.1919	0.1837

LTE Band 7 (G <sub>T</sub> - L <sub>C</sub> = -0.83 dB) QPSK			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency	2510	2535	2560
(MHz)			
Conducted Power (dBm)	23.70	23.75	23.74
Conducted Power (Watts)	0.2344	0.2371	0.2366
EIRP(dBm)	22.87	22.92	22.91
EIRP(Watts)	0.1936	0.1959	0.1954



LTE Band 7 ( $G_T - L_C = -0.83$ dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
(MHz)									
Conducted Power (dBm)	22.23	22.97	22.98	22.28	22.61	22.75	22.53	22.91	23.00
Conducted Power (Watts)	0.1671	0.1982	0.1986	0.1690	0.1824	0.1884	0.1791	0.1954	0.1995
EIRP(dBm)	21.40	22.14	22.15	21.45	21.78	21.92	21.70	22.08	22.17
EIRP(Watts)	0.1380	0.1637	0.1641	0.1396	0.1507	0.1556	0.1479	0.1614	0.1648

LTE Band 7 ( $G_T - L_C = -0.83$ dB) 16QAM			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency	2510	2535	2560
(MHz)			
Conducted Power (dBm)	22.15	22.93	22.93
Conducted Power (Watts)	0.1641	0.1963	0.1963
EIRP(dBm)	21.32	22.10	21.53
EIRP(Watts)	0.1355	0.1622	0.1422



### Peak-to-Average Ratio

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	2.87	4.35	3.74	5.33	<b>PASS</b>
Middle CH	3.16	4.29	4.20	5.33	
Highest CH	3.04	4.38	4.20	5.30	



LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB



Date: 21 APR 2017 18:43:50

Lowest Channel / Full RB



Date: 21 APR 2017 18:44:02

Middle Channel / 1RB




Date: 21 APR 2017 18:44:52

Middle Channel / Full RB




Date: 21 APR 2017 18:44:42

Highest Channel / 1RB

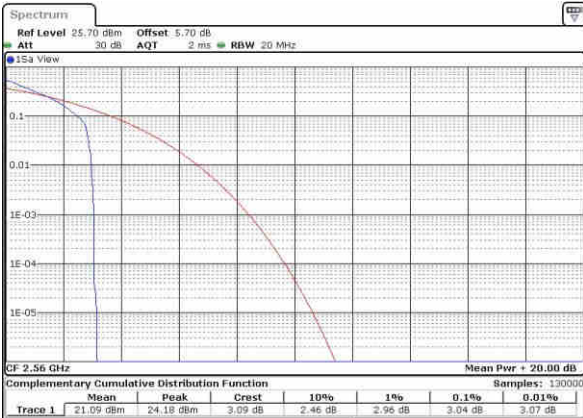

Date: 21 APR 2017 18:45:30

Highest Channel / Full RB

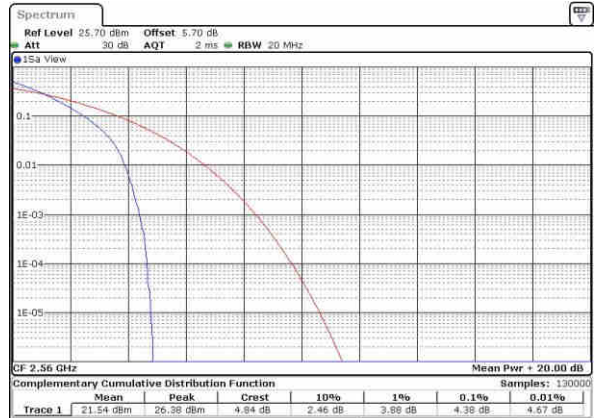

Date: 21 APR 2017 18:45:40




LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 21 APR 2017 18:43:39

Lowest Channel / Full RB

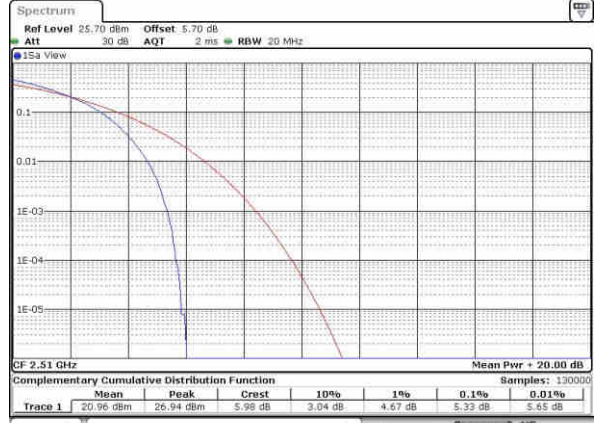


Date: 21 APR 2017 18:44:21

Middle Channel / 1RB



Date: 21 APR 2017 18:45:08

Middle Channel / Full RB

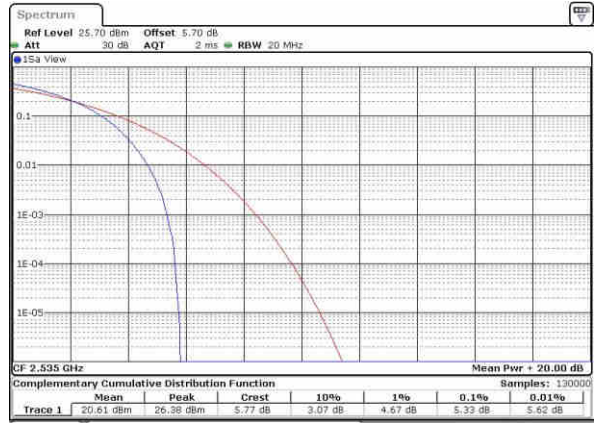

Date: 21 APR 2017 18:44:52

Highest Channel / 1RB



Date: 21 APR 2017 18:45:20

Highest Channel / Full RB



Date: 21 APR 2017 18:45:52




26dB Bandwidth

Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.91	4.89	9.67	9.91	14.33	14.27	20.18	20.06
Middle CH	-	-	-	-	4.89	4.78	9.77	9.87	14.36	14.39	20.14	20.06
Highest CH	-	-	-	-	4.84	4.91	9.95	9.79	14.21	14.36	20.14	20.18




LTE Band 7

Lowest Channel / 5MHz / QPSK

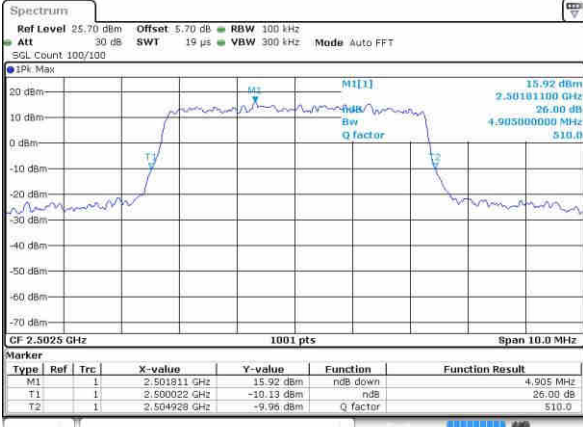


Date: 21 APR 2017 17:22:16

Lowest Channel / 5MHz / 16QAM

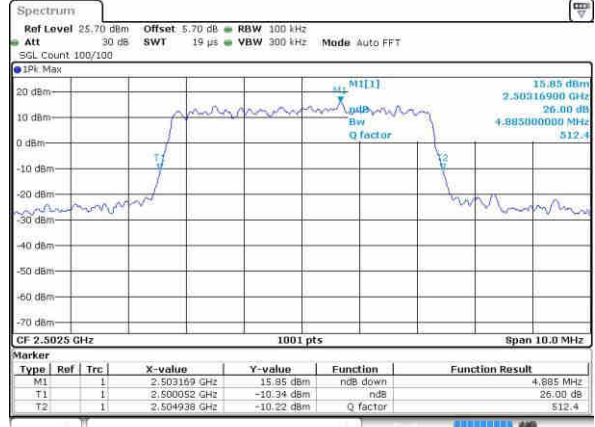


Date: 21 APR 2017 17:22:37

Middle Channel / 5MHz / QPSK

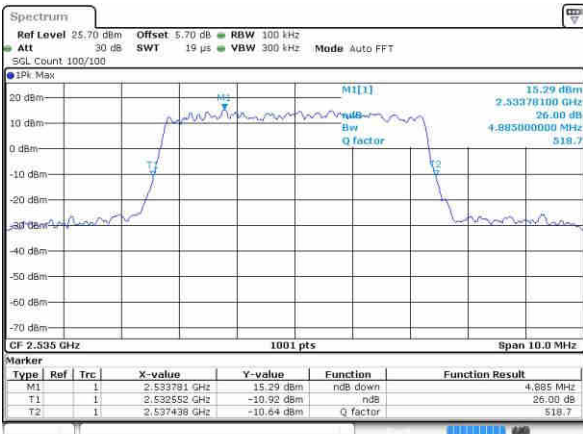


Date: 21 APR 2017 17:23:19

Middle Channel / 5MHz / 16QAM

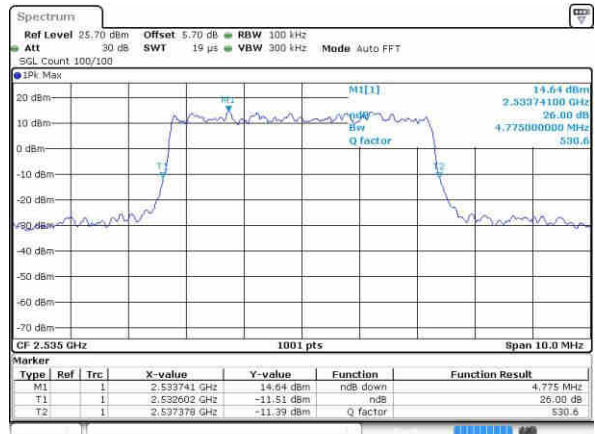


Date: 21 APR 2017 17:22:58

Highest Channel / 5MHz / QPSK

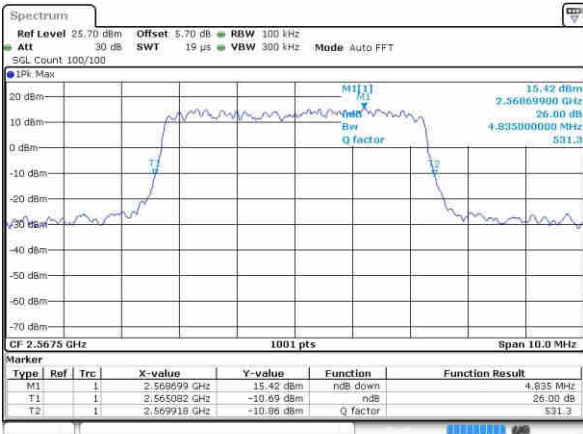

Date: 21 APR 2017 17:23:40

Highest Channel / 5MHz / 16QAM

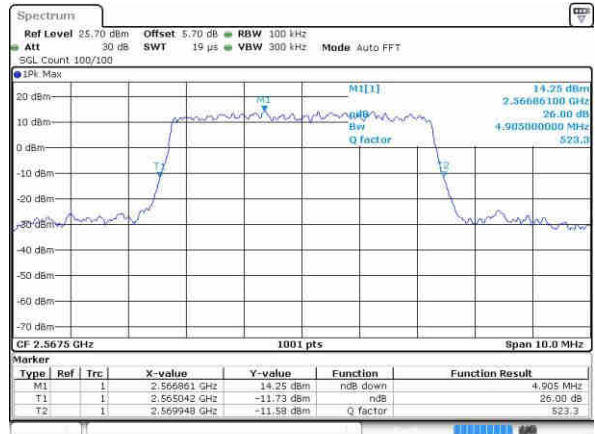


Date: 21 APR 2017 17:24:01




LTE Band 7

Lowest Channel / 10MHz / QPSK

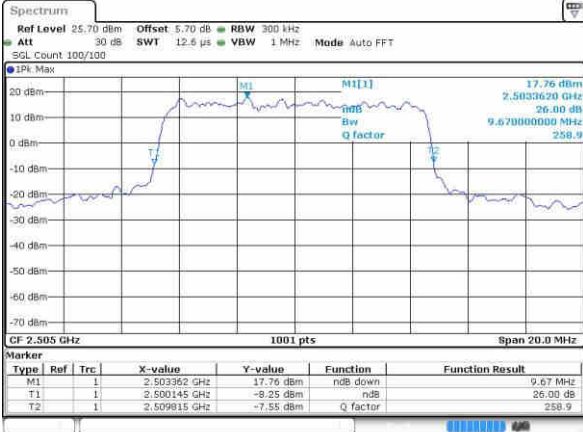

Date: 21 APR 2017 17:39:00

Lowest Channel / 10MHz / 16QAM

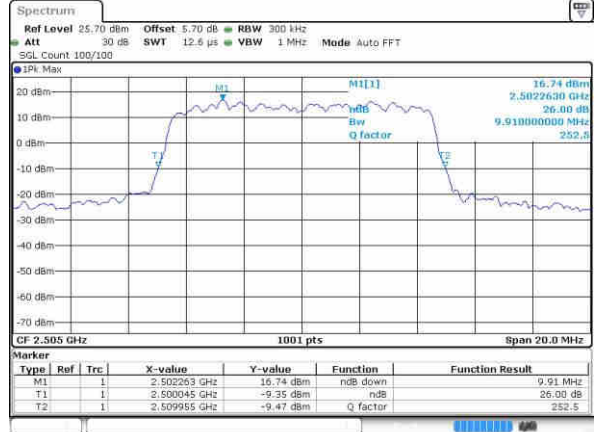


Date: 21 APR 2017 17:39:22

Middle Channel / 10MHz / QPSK




Date: 21 APR 2017 17:40:04

Middle Channel / 10MHz / 16QAM

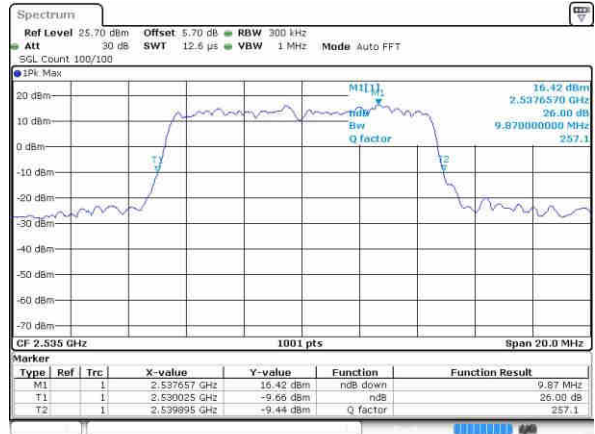


Date: 21 APR 2017 17:39:43

Highest Channel / 10MHz / QPSK

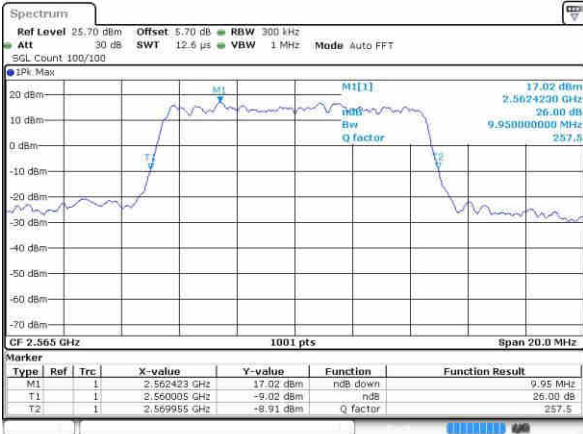

Date: 21 APR 2017 17:40:25

Highest Channel / 10MHz / 16QAM

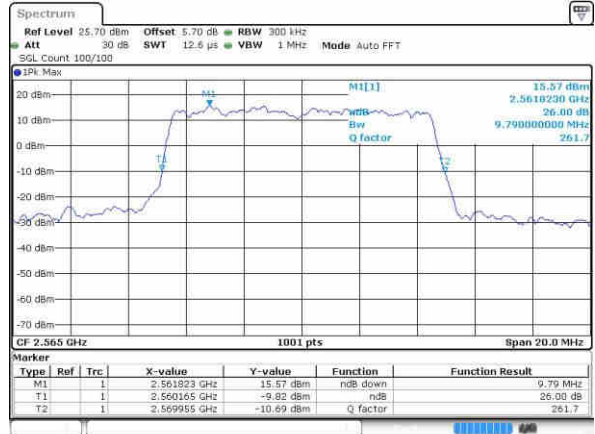


Date: 21 APR 2017 17:40:46




LTE Band 7

Lowest Channel / 15MHz / QPSK

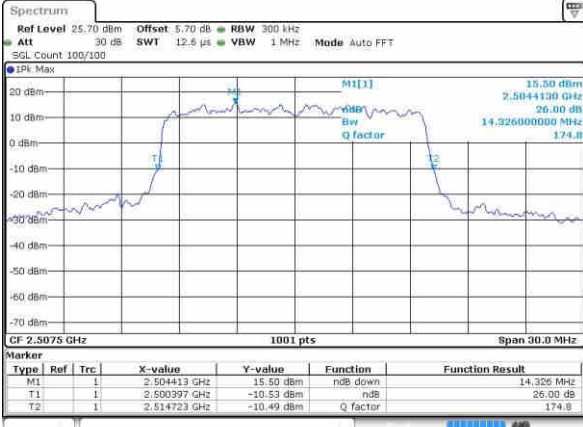


Date: 21 APR 2017 17:56:06

Lowest Channel / 15MHz / 16QAM

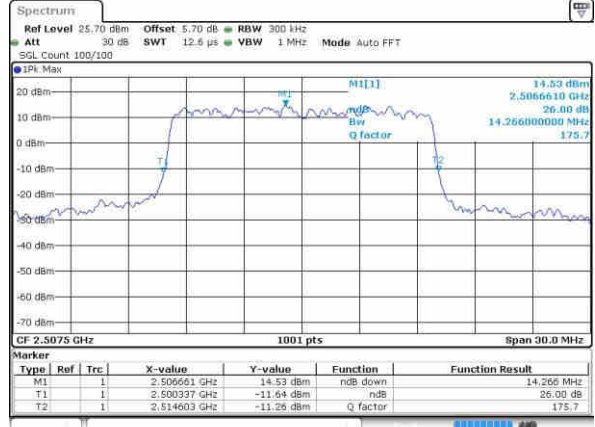


Date: 21 APR 2017 17:55:44

Middle Channel / 15MHz / QPSK

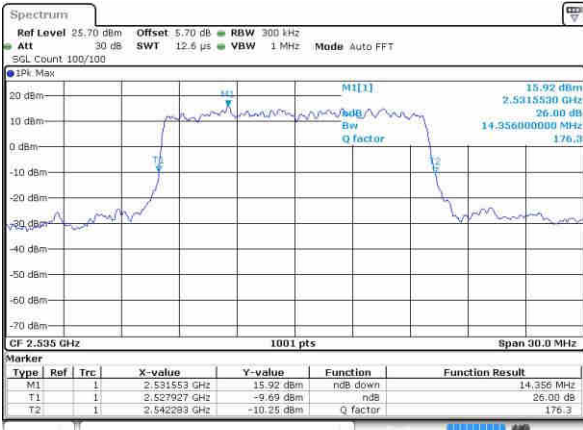


Date: 21 APR 2017 17:56:27

Middle Channel / 15MHz / 16QAM

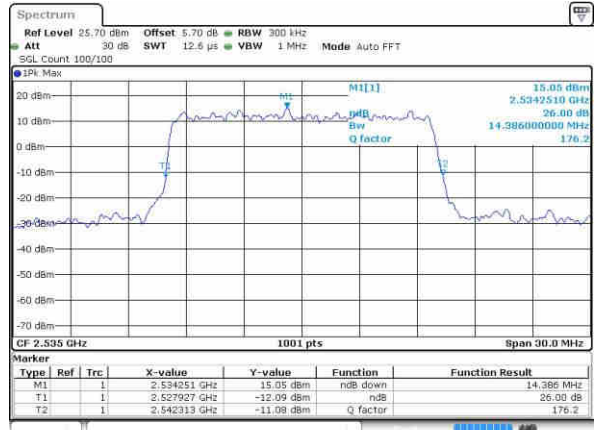


Date: 21 APR 2017 17:56:48

Highest Channel / 15MHz / QPSK

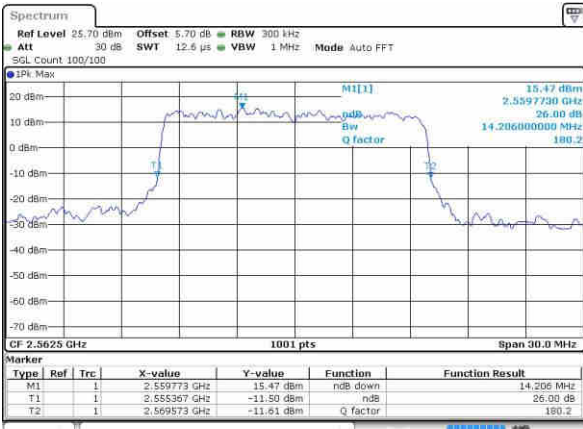

Date: 21 APR 2017 17:57:30

Highest Channel / 15MHz / 16QAM

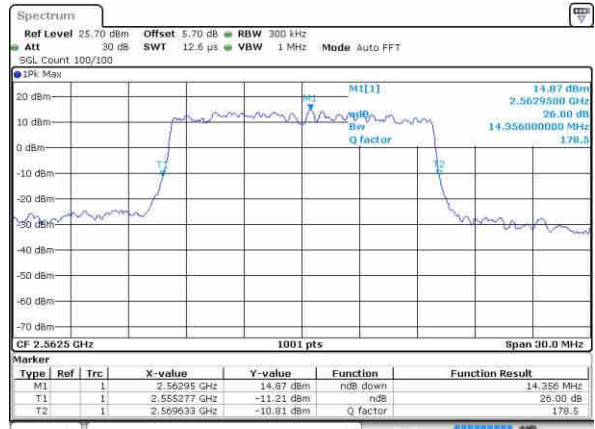


Date: 21 APR 2017 17:57:09




LTE Band 7

Lowest Channel / 20MHz / QPSK

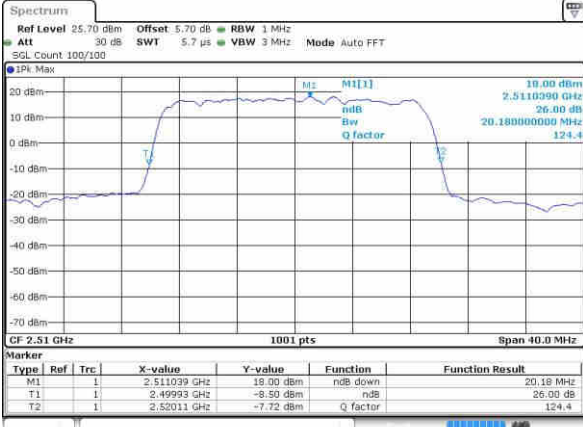


Date: 21 APR 2017 18:12:50

Lowest Channel / 20MHz / 16QAM

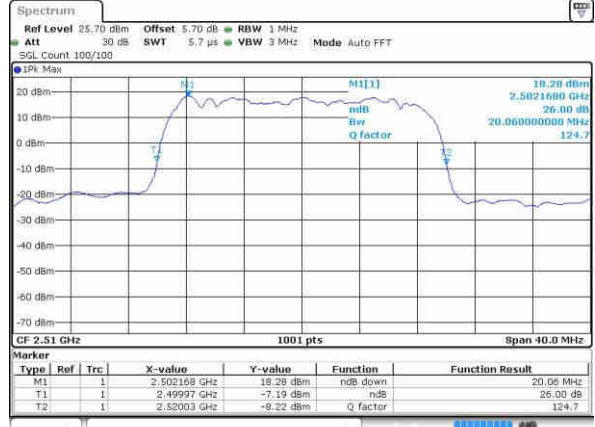


Date: 21 APR 2017 18:12:29

Middle Channel / 20MHz / QPSK

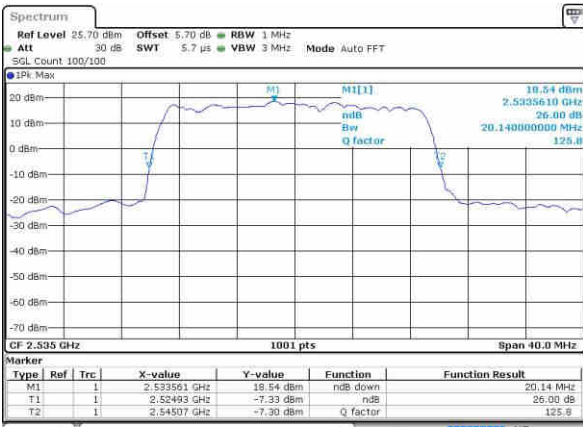


Date: 21 APR 2017 18:13:11

Middle Channel / 20MHz / 16QAM

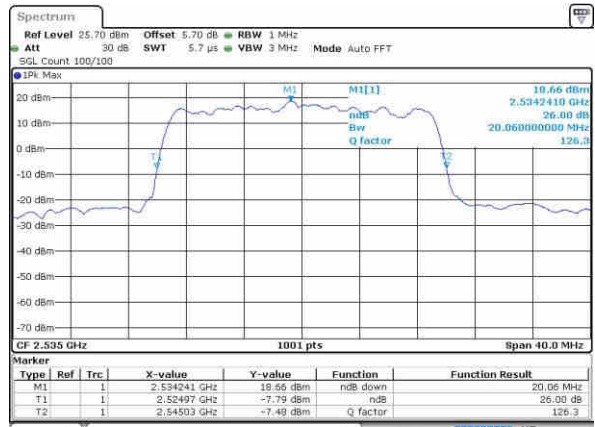


Date: 21 APR 2017 18:13:32

Highest Channel / 20MHz / QPSK

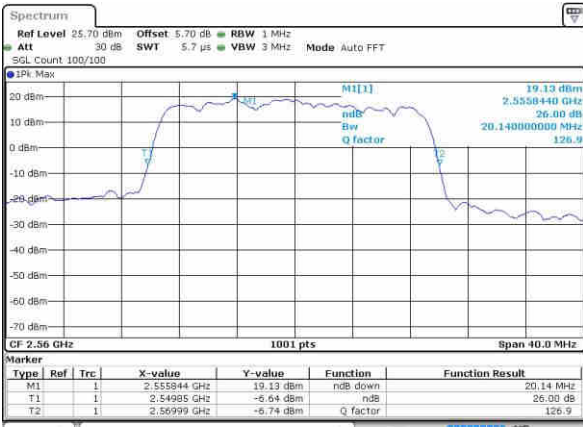

Date: 21 APR 2017 18:14:14

Highest Channel / 20MHz / 16QAM

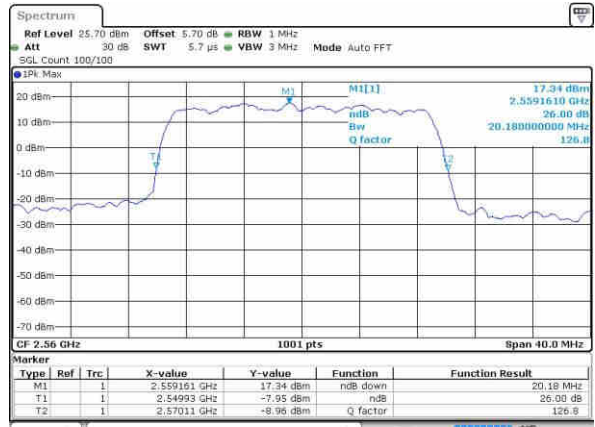

Date: 21 APR 2017 18:13:53




### Occupied Bandwidth

Mode	LTE Band 7 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.51	4.47	8.95	8.97	13.40	13.37	18.26	18.22
Middle CH	-	-	-	-	4.47	4.49	9.01	8.99	13.37	13.40	18.30	18.30
Highest CH	-	-	-	-	4.49	4.49	9.03	9.01	13.37	13.43	18.30	18.10




LTE Band 7

Lowest Channel / 5MHz / QPSK

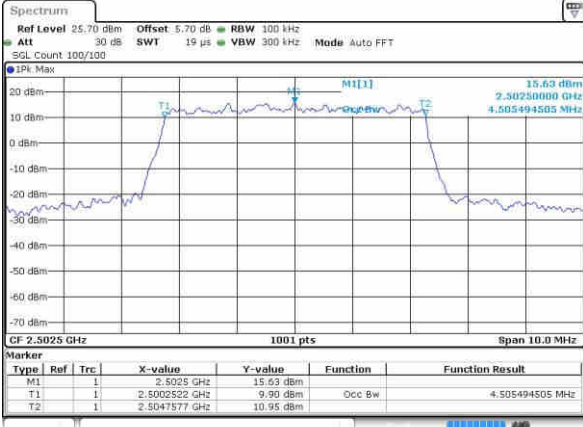


Date: 21 APR 2017 17:22:05

Lowest Channel / 5MHz / 16QAM

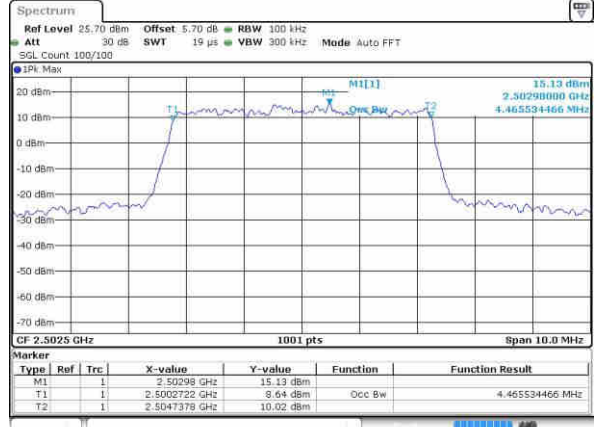


Date: 21 APR 2017 17:22:26

Middle Channel / 5MHz / QPSK

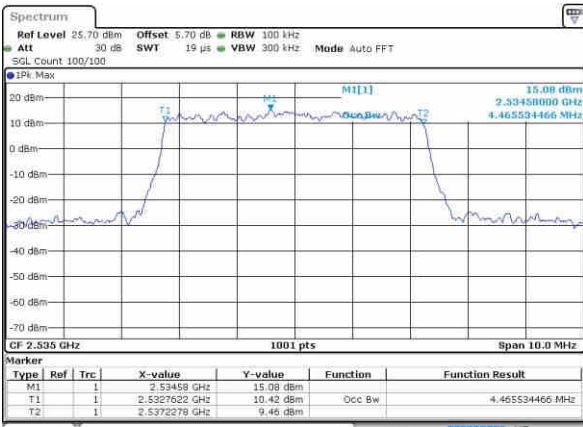


Date: 21 APR 2017 17:23:08

Middle Channel / 5MHz / 16QAM

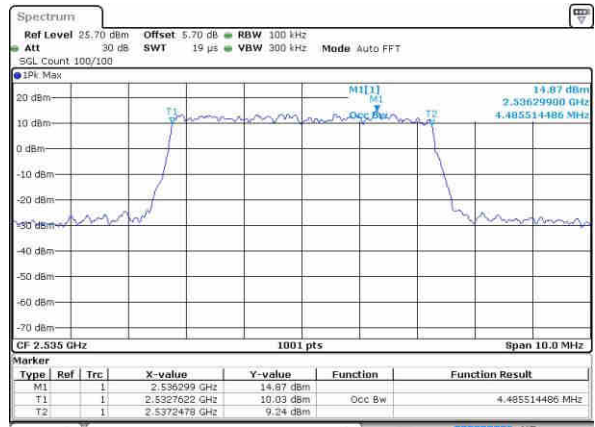


Date: 21 APR 2017 17:23:47

Highest Channel / 5MHz / QPSK

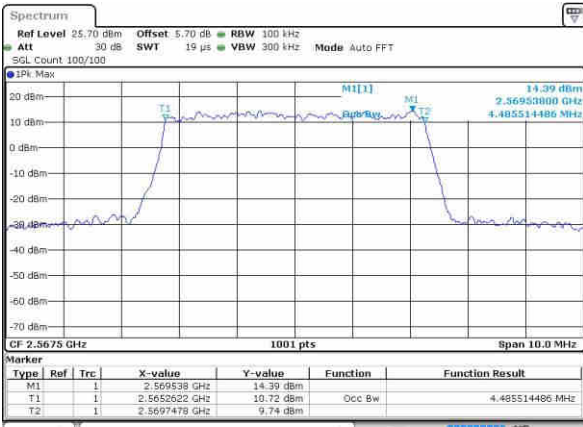

Date: 21 APR 2017 17:23:29

Highest Channel / 5MHz / 16QAM

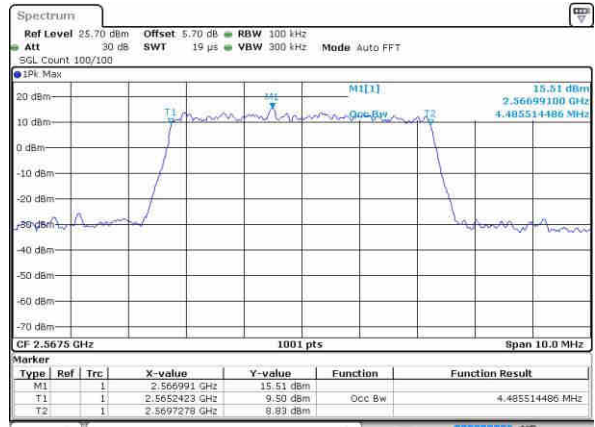


Date: 21 APR 2017 17:23:50




LTE Band 7

Lowest Channel / 10MHz / QPSK

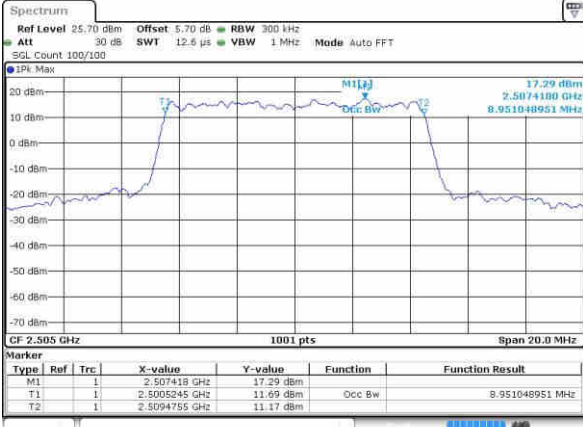


Date: 21 APR 2017 17:38:50

Lowest Channel / 10MHz / 16QAM

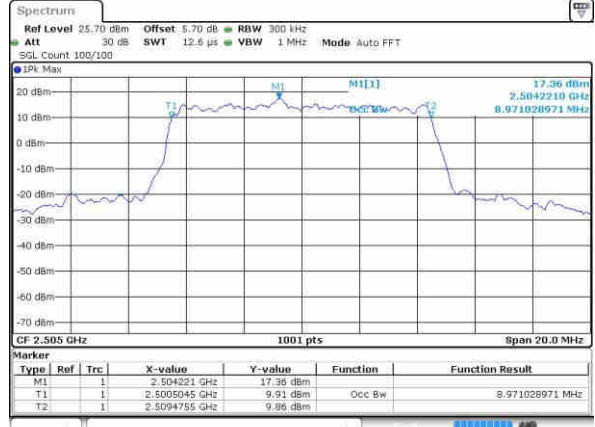


Date: 21 APR 2017 17:38:11

Middle Channel / 10MHz / QPSK

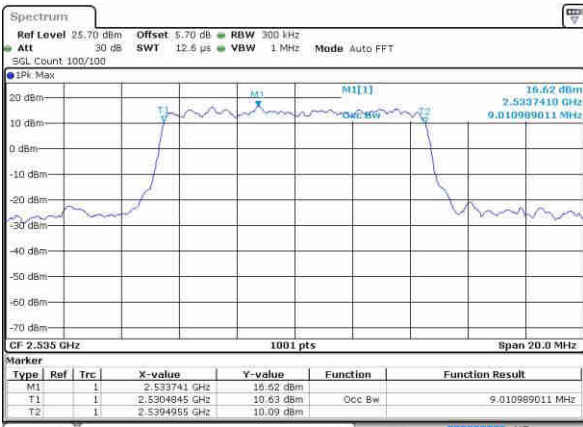


Date: 21 APR 2017 17:38:53

Middle Channel / 10MHz / 16QAM

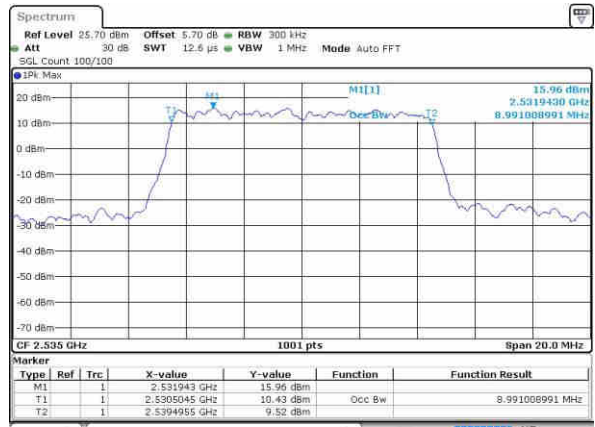


Date: 21 APR 2017 17:38:32

Highest Channel / 10MHz / QPSK

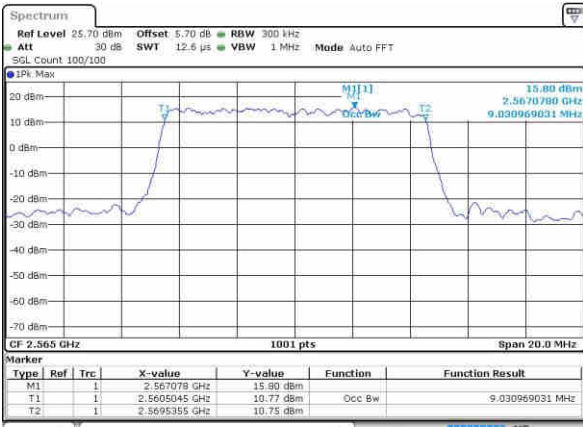

Date: 21 APR 2017 17:40:14

Highest Channel / 10MHz / 16QAM

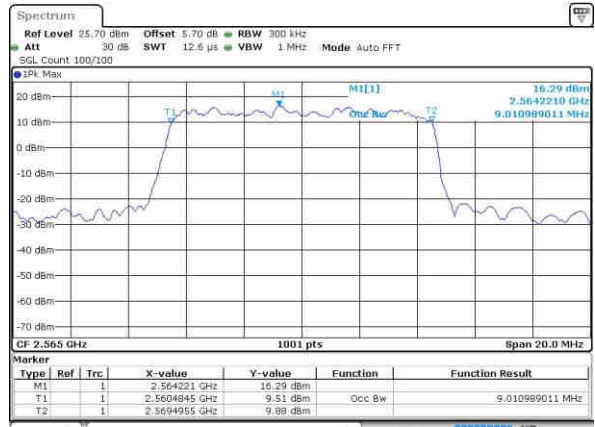


Date: 21 APR 2017 17:40:35




LTE Band 7

Lowest Channel / 15MHz / QPSK

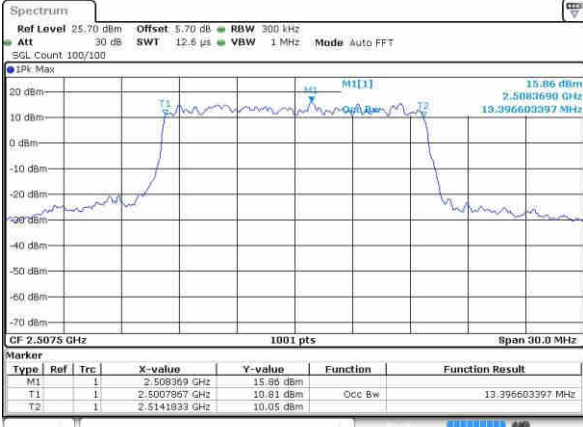


Date: 21 APR 2017 17:55:55

Lowest Channel / 15MHz / 16QAM

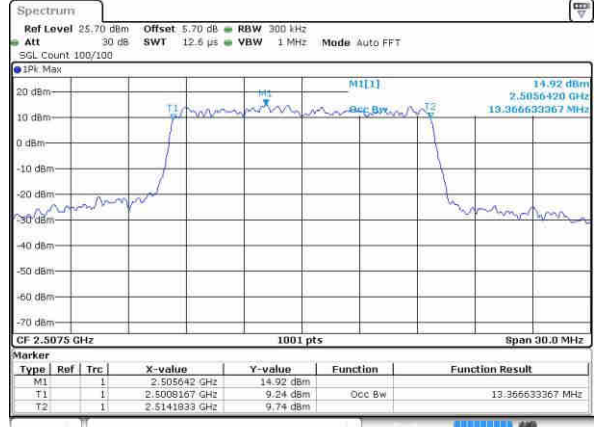


Date: 21 APR 2017 17:55:34

Middle Channel / 15MHz / QPSK

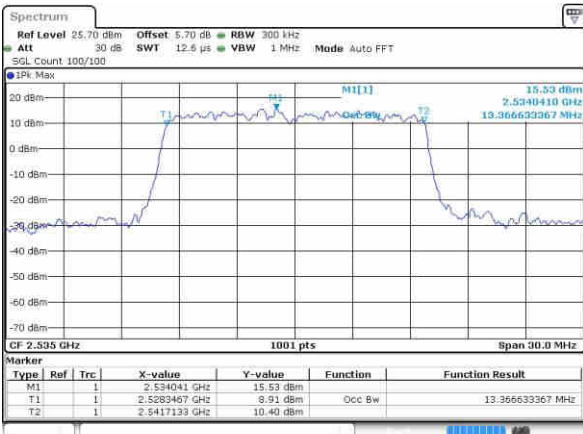


Date: 21 APR 2017 17:56:16

Middle Channel / 15MHz / 16QAM

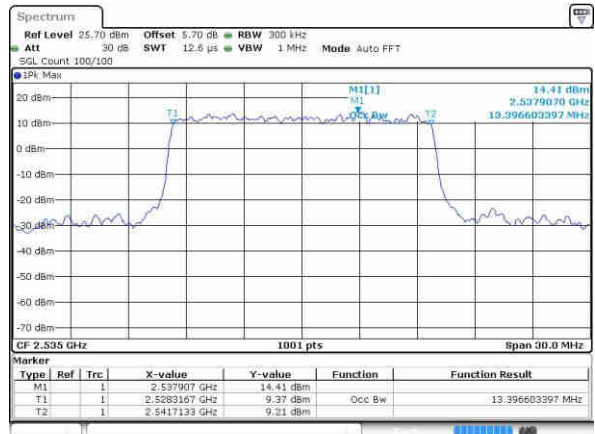


Date: 21 APR 2017 17:56:37

Highest Channel / 15MHz / QPSK

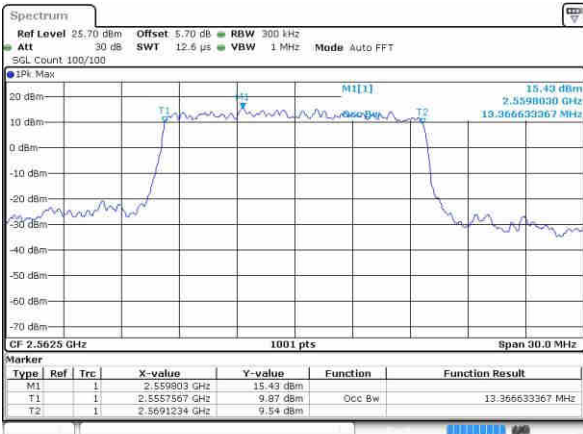

Date: 21 APR 2017 17:57:19

Highest Channel / 15MHz / 16QAM

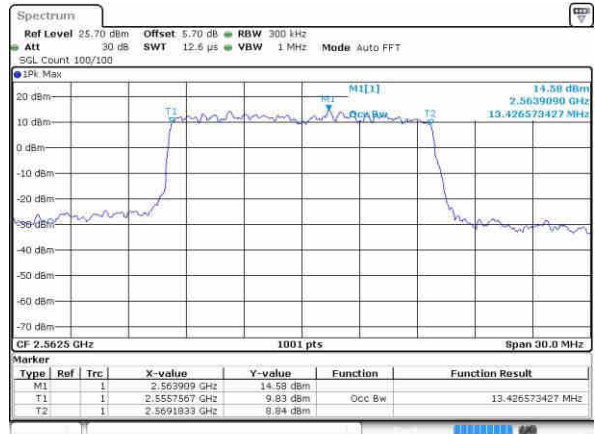


Date: 21 APR 2017 17:56:58




LTE Band 7

Lowest Channel / 20MHz / QPSK

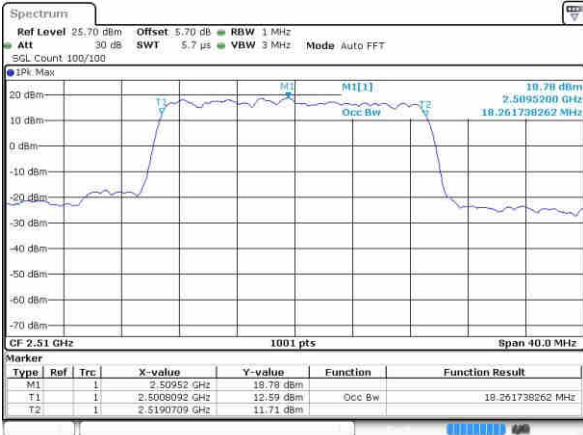


Date: 21 APR 2017 18:12:39

Lowest Channel / 20MHz / 16QAM

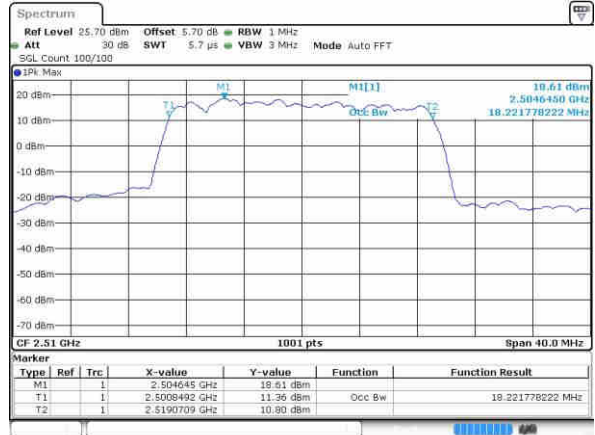


Date: 21 APR 2017 18:12:16

Middle Channel / 20MHz / QPSK

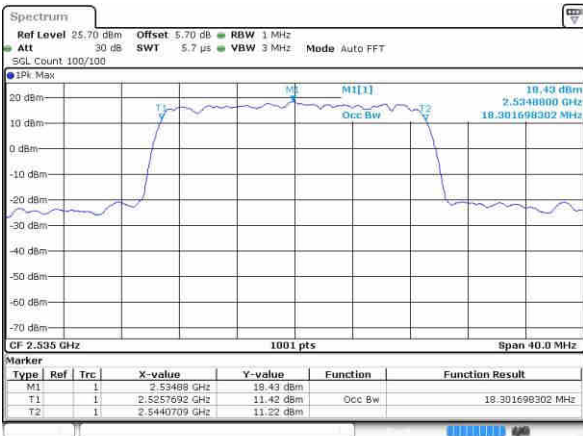


Date: 21 APR 2017 18:13:00

Middle Channel / 20MHz / 16QAM

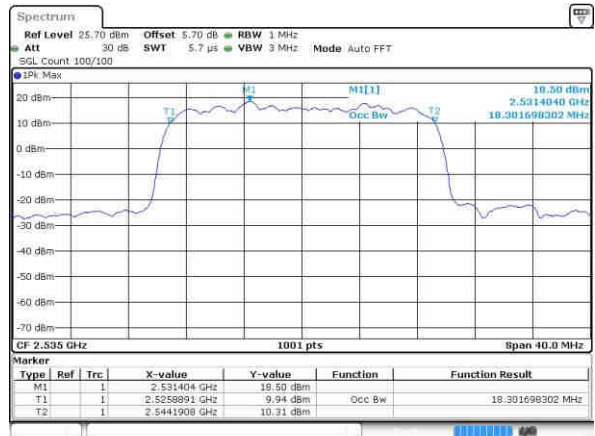


Date: 21 APR 2017 18:12:21

Highest Channel / 20MHz / QPSK

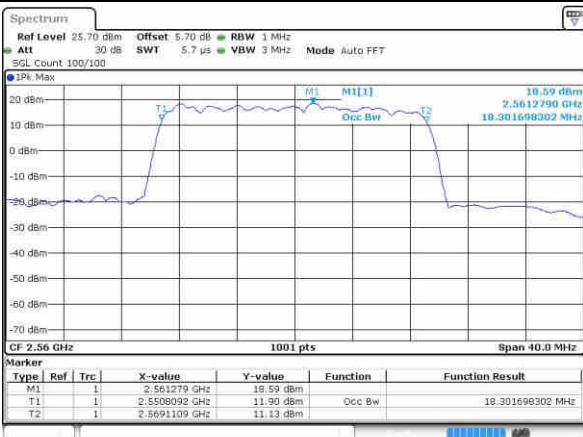

Date: 21 APR 2017 18:14:03


Highest Channel / 20MHz / 16QAM

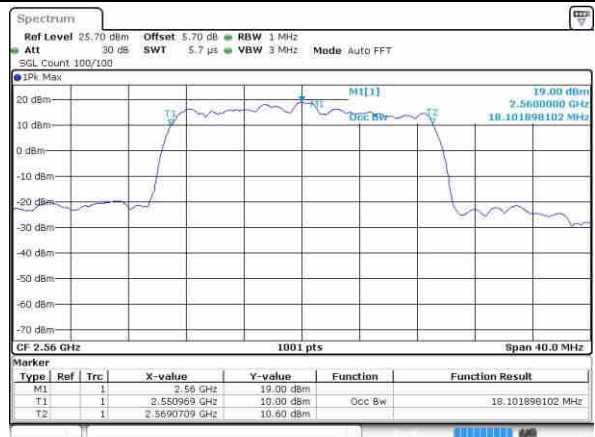

Date: 21 APR 2017 18:13:42




# Conducted Band Edge

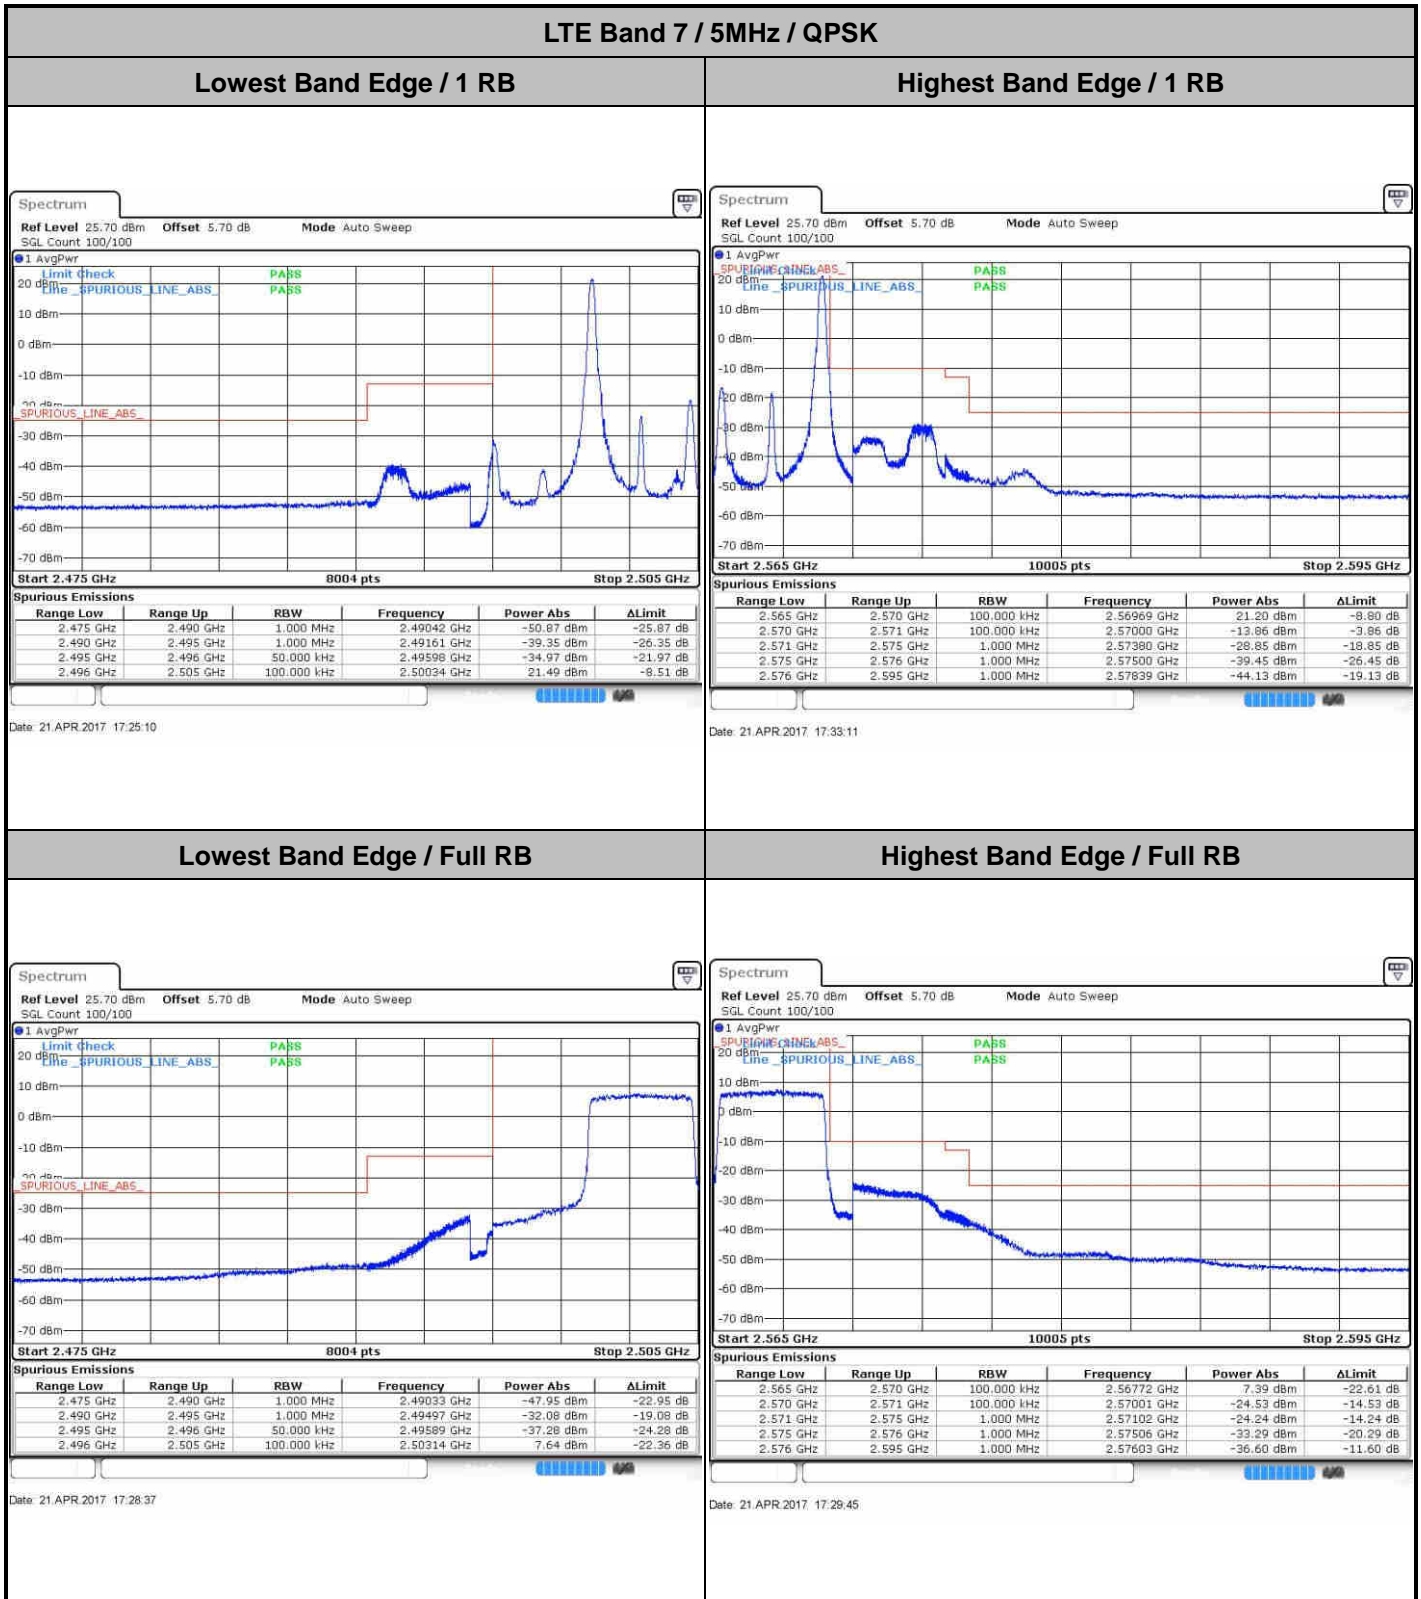




**LTE Band 7 / 5MHz / 16QAM**

**Lowest Band Edge / 1 RB**

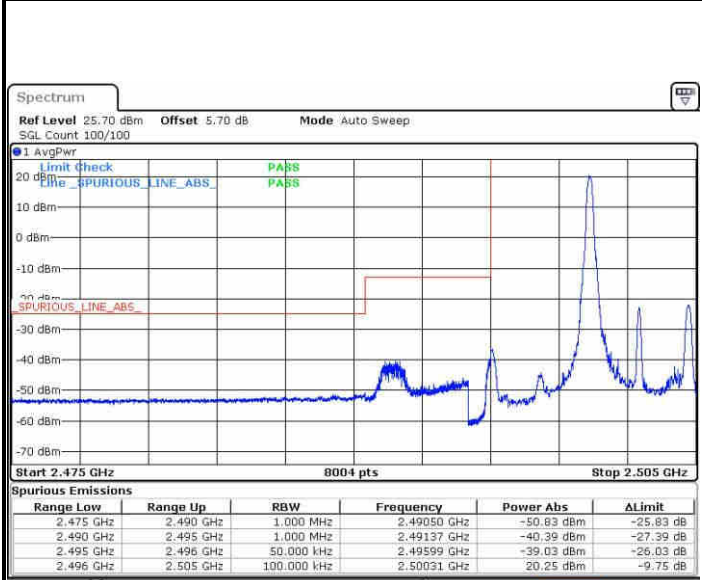


Date: 21 APR 2017 17:26:19

**Highest Band Edge / 1 RB**

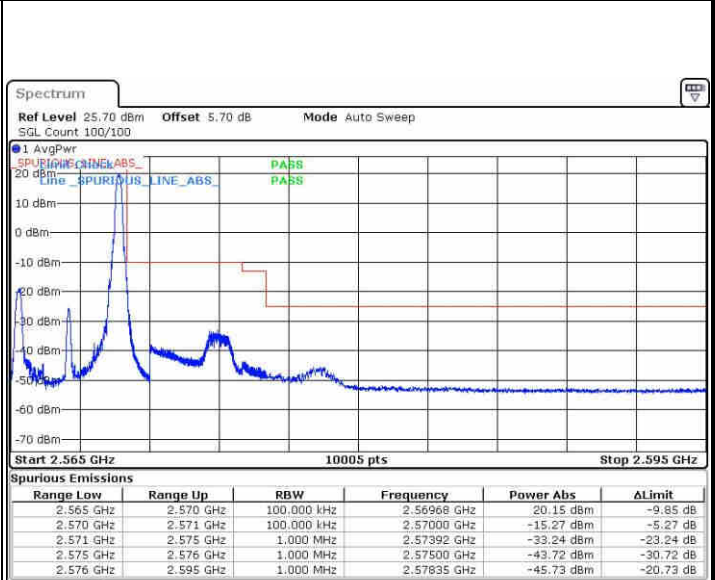


Date: 21 APR 2017 17:32:03

**Lowest Band Edge / Full RB**

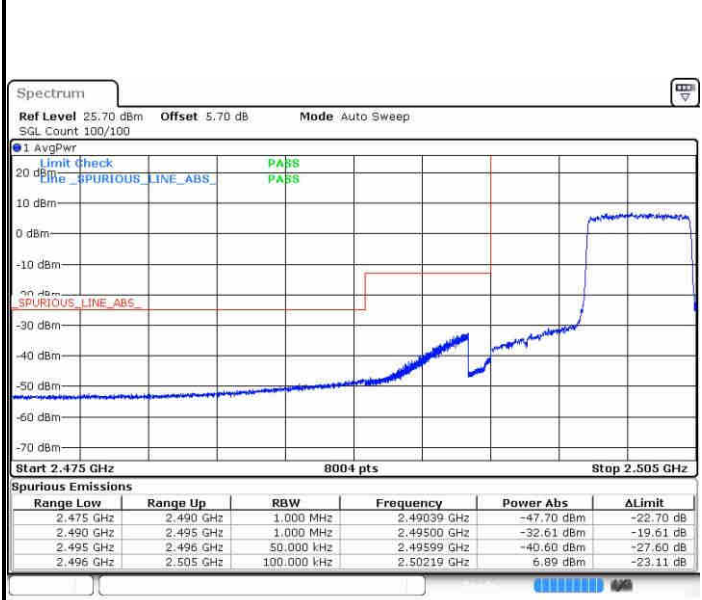

Date: 21 APR 2017 17:27:28

**Highest Band Edge / Full RB**

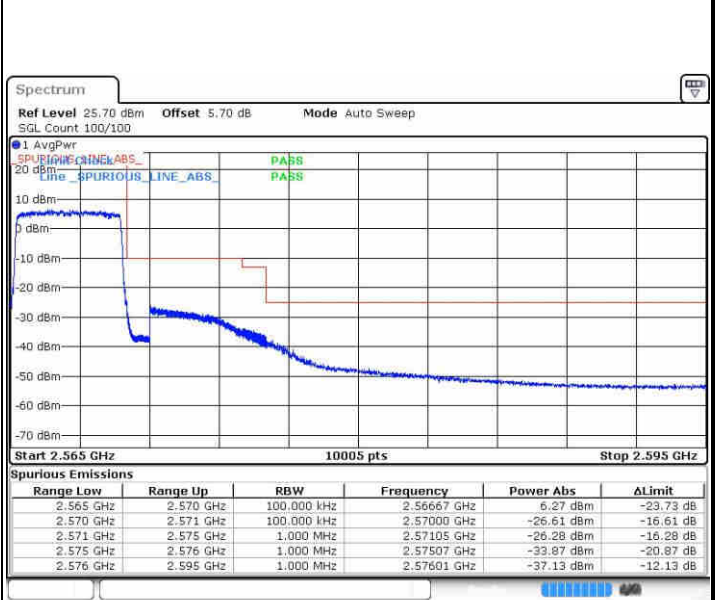


Date: 21 APR 2017 17:30:54




LTE Band 7 / 10MHz / QPSK

Lowest Band Edge / 1 RB

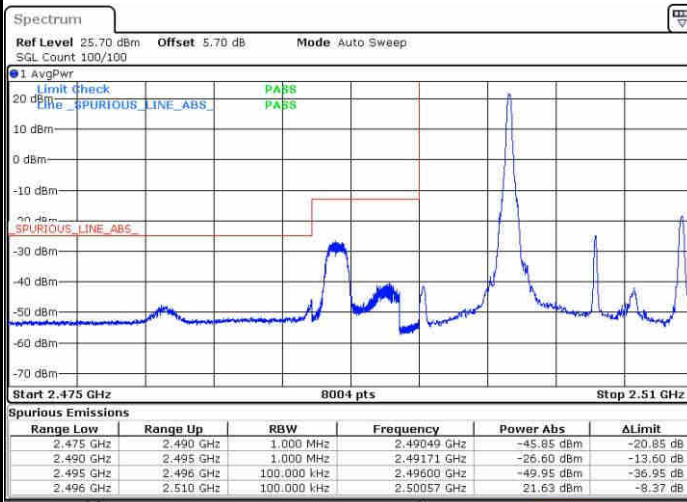


Date: 21 APR 2017 17:41:55

Highest Band Edge / 1 RB

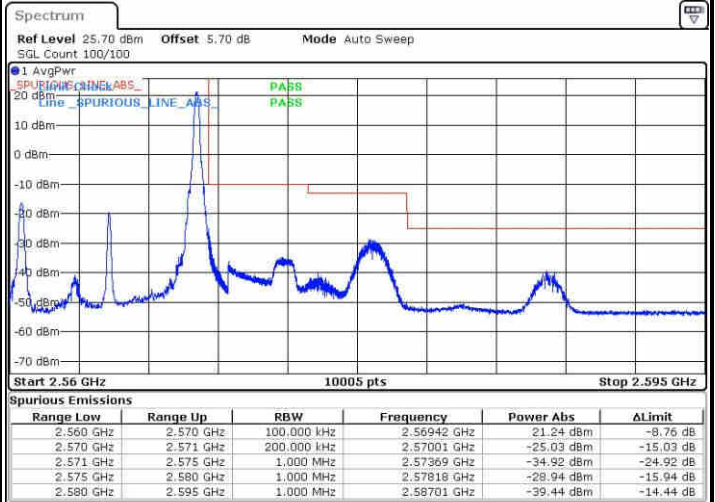

Date: 21 APR 2017 17:49:56

Lowest Band Edge / Full RB

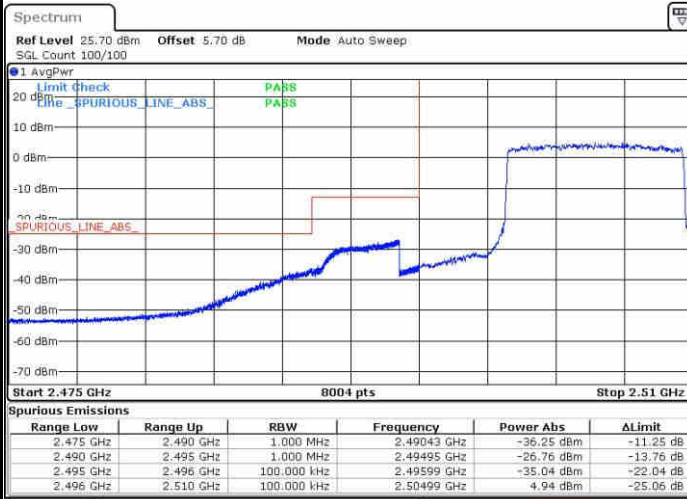

Date: 21 APR 2017 17:45:21

Highest Band Edge / Full RB




Date: 21 APR 2017 17:46:28




LTE Band 7 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

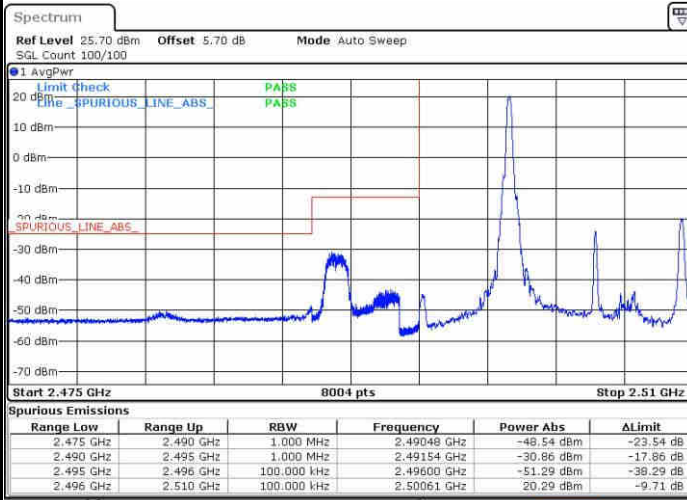


Date: 21 APR 2017 17:43:03

Highest Band Edge / 1 RB

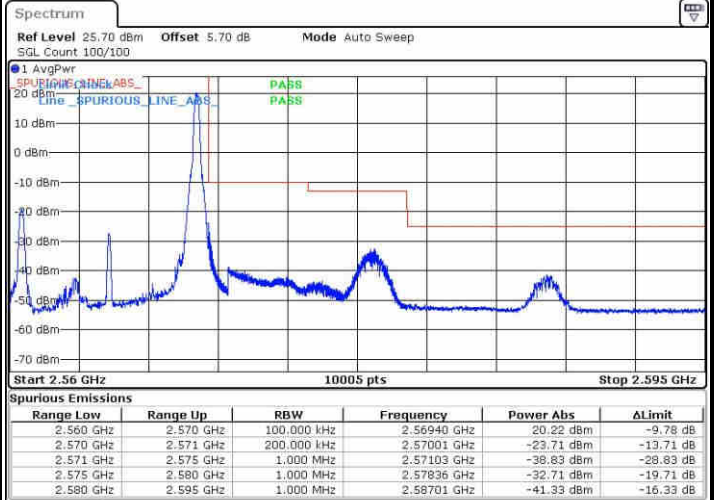

Date: 21 APR 2017 17:48:47

Lowest Band Edge / Full RB

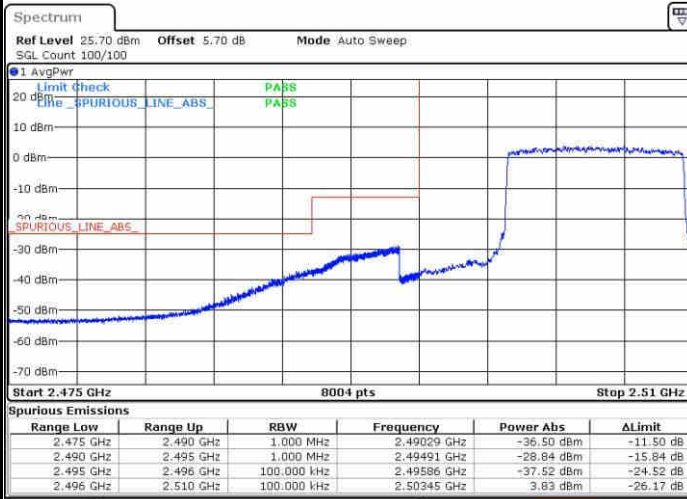

Date: 21 APR 2017 17:44:12

Highest Band Edge / Full RB




Date: 21 APR 2017 17:47:38




LTE Band 7 / 15MHz / QPSK

Lowest Band Edge / 1 RB

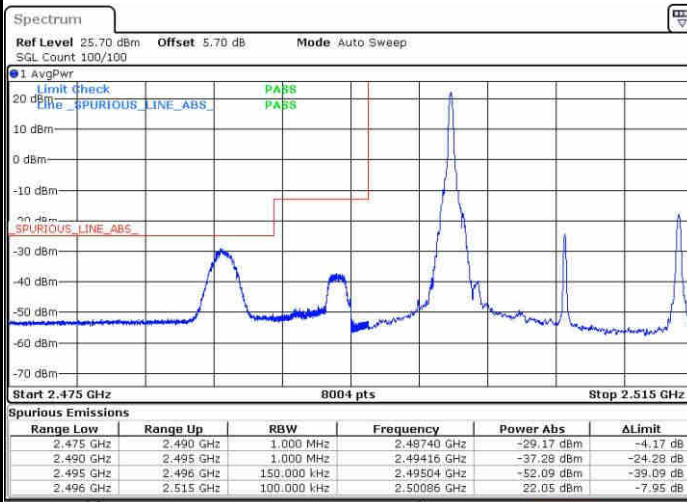


Date: 21 APR 2017 17:58:39

Highest Band Edge / 1 RB

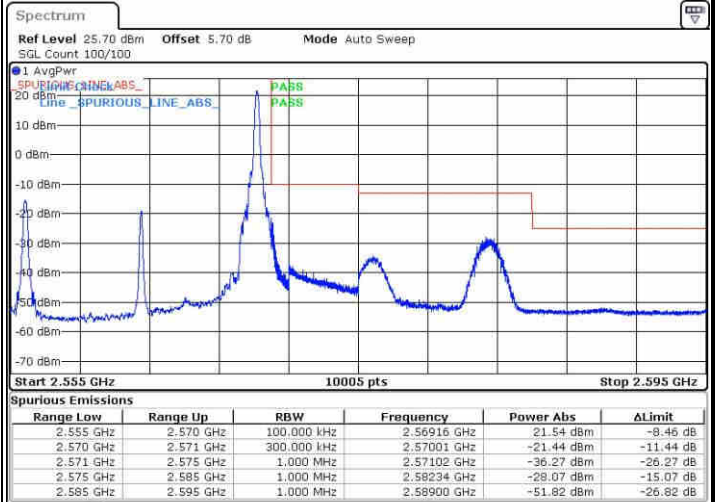


Date: 21 APR 2017 18:06:39

Lowest Band Edge / Full RB

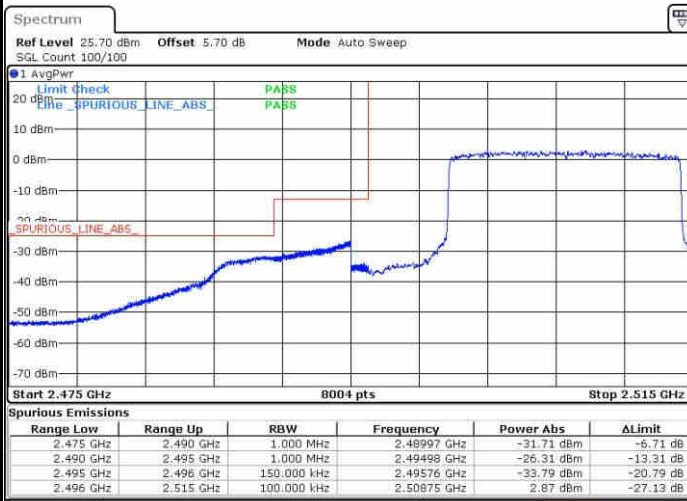

Date: 21 APR 2017 18:02:05

Highest Band Edge / Full RB

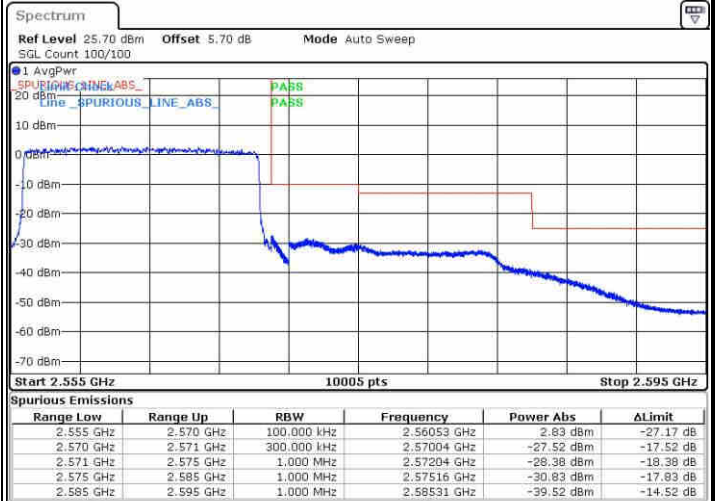


Date: 21 APR 2017 18:03:13




LTE Band 7 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

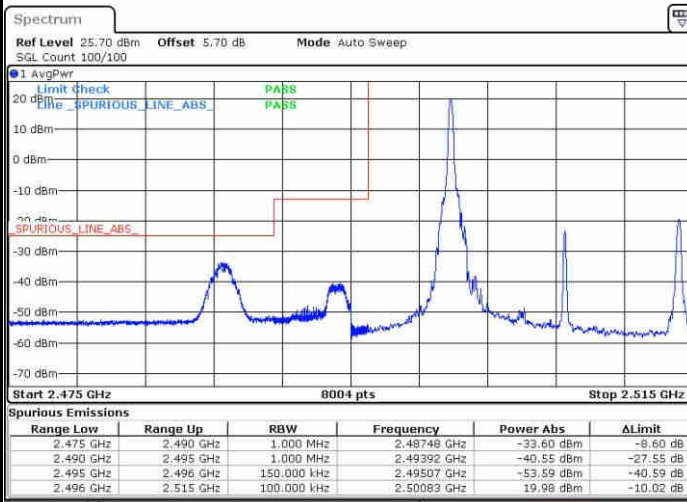


Date: 21 APR 2017 17:59:47

Highest Band Edge / 1 RB

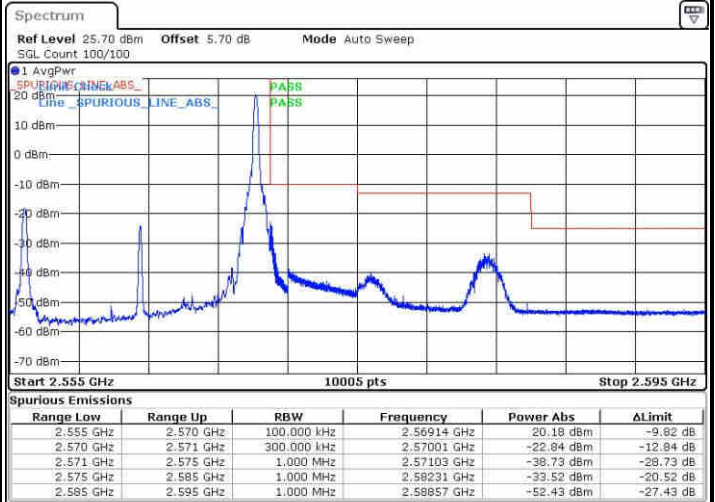

Date: 21 APR 2017 18:05:31

Lowest Band Edge / Full RB

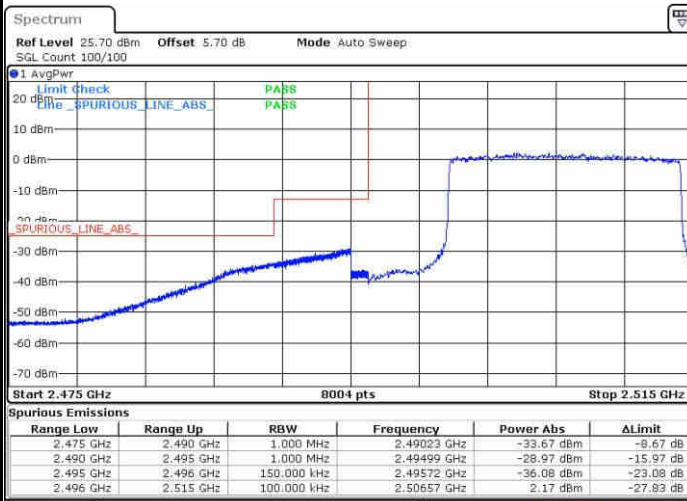

Date: 21 APR 2017 18:00:56

Highest Band Edge / Full RB




Date: 21 APR 2017 18:04:22




LTE Band 7 / 20MHz / QPSK

Lowest Band Edge / 1 RB

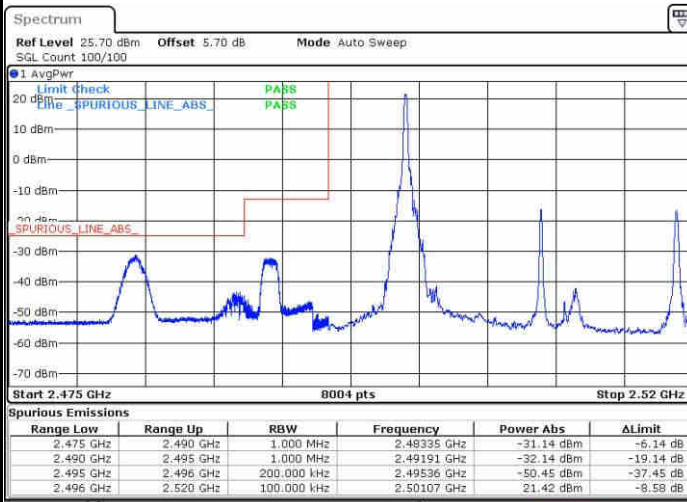


Date: 21 APR 2017 18:15:23

Highest Band Edge / 1 RB

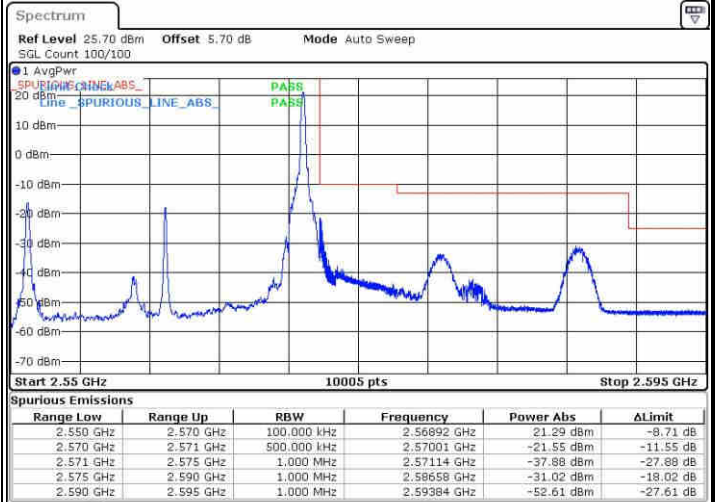


Date: 21 APR 2017 18:23:24

Lowest Band Edge / Full RB

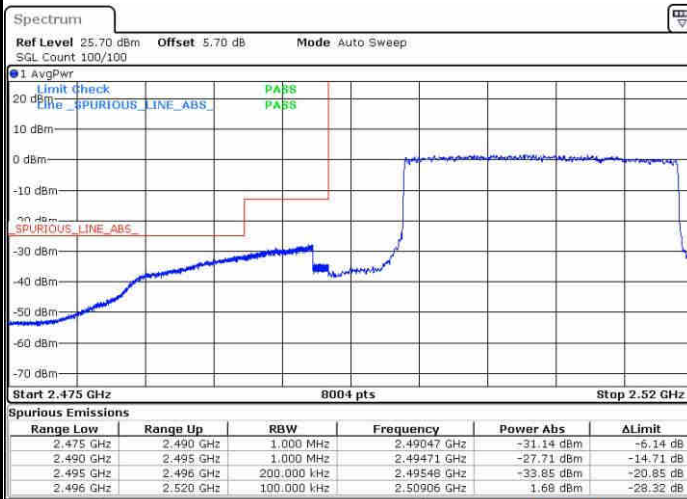

Date: 21 APR 2017 18:18:49

Highest Band Edge / Full RB

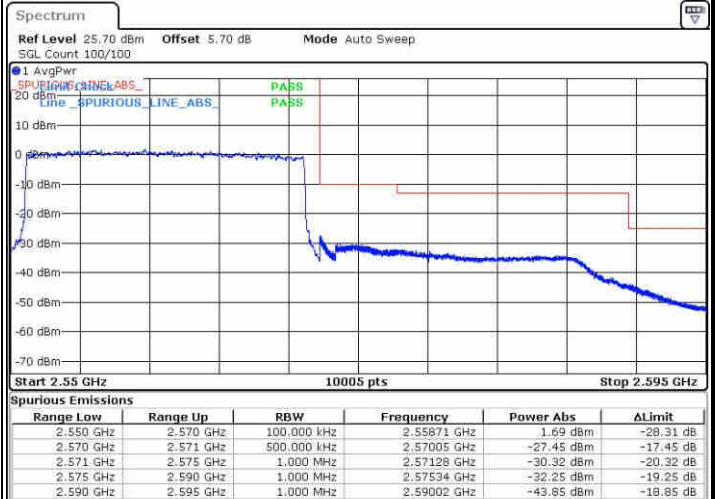


Date: 21 APR 2017 18:19:58




LTE Band 7 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

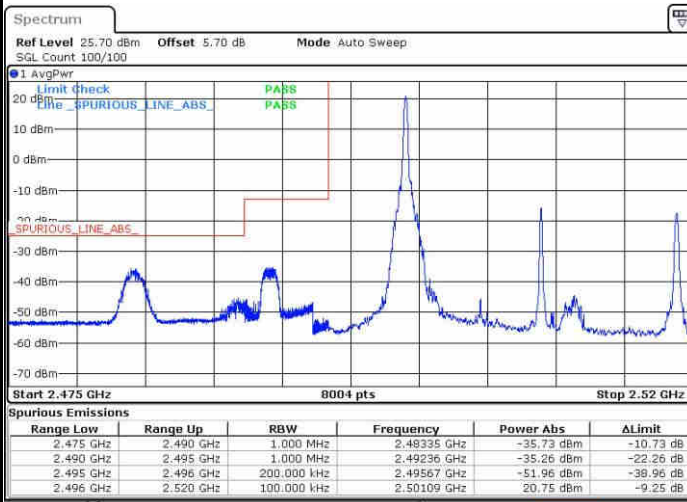


Date: 21 APR 2017 18:16:32

Highest Band Edge / 1RB

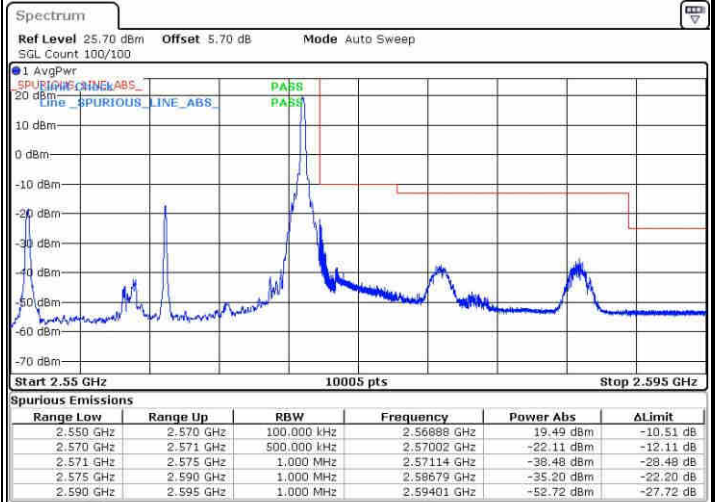


Date: 21 APR 2017 18:22:15

Lowest Band Edge / Full RB

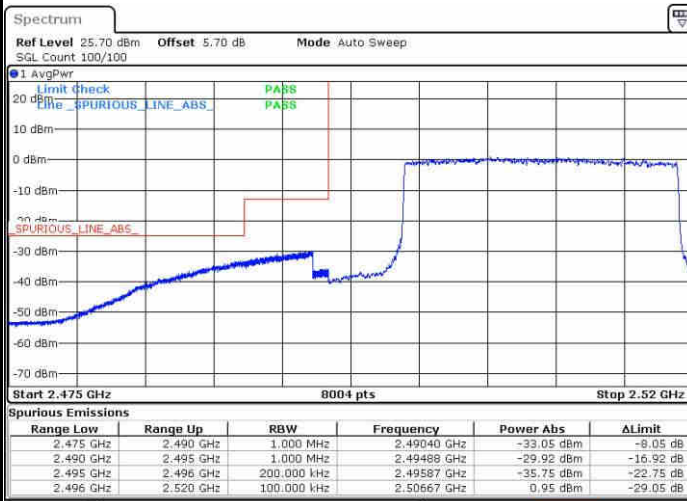

Date: 21 APR 2017 18:17:41


Highest Band Edge / Full RB

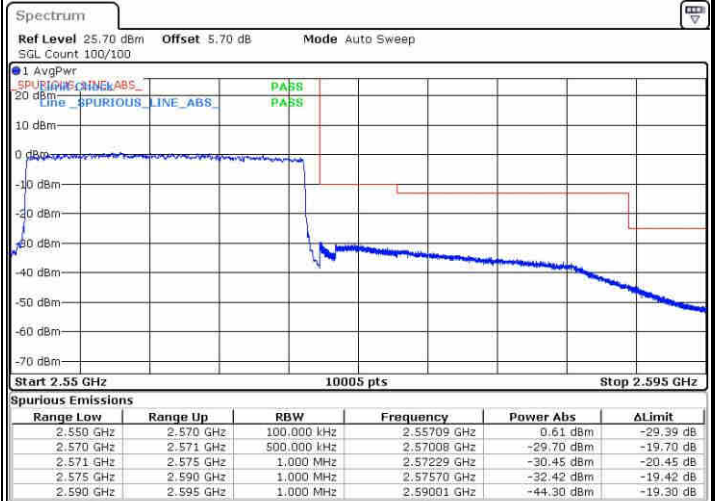

Date: 21 APR 2017 18:21:06




# Conducted Spurious Emission

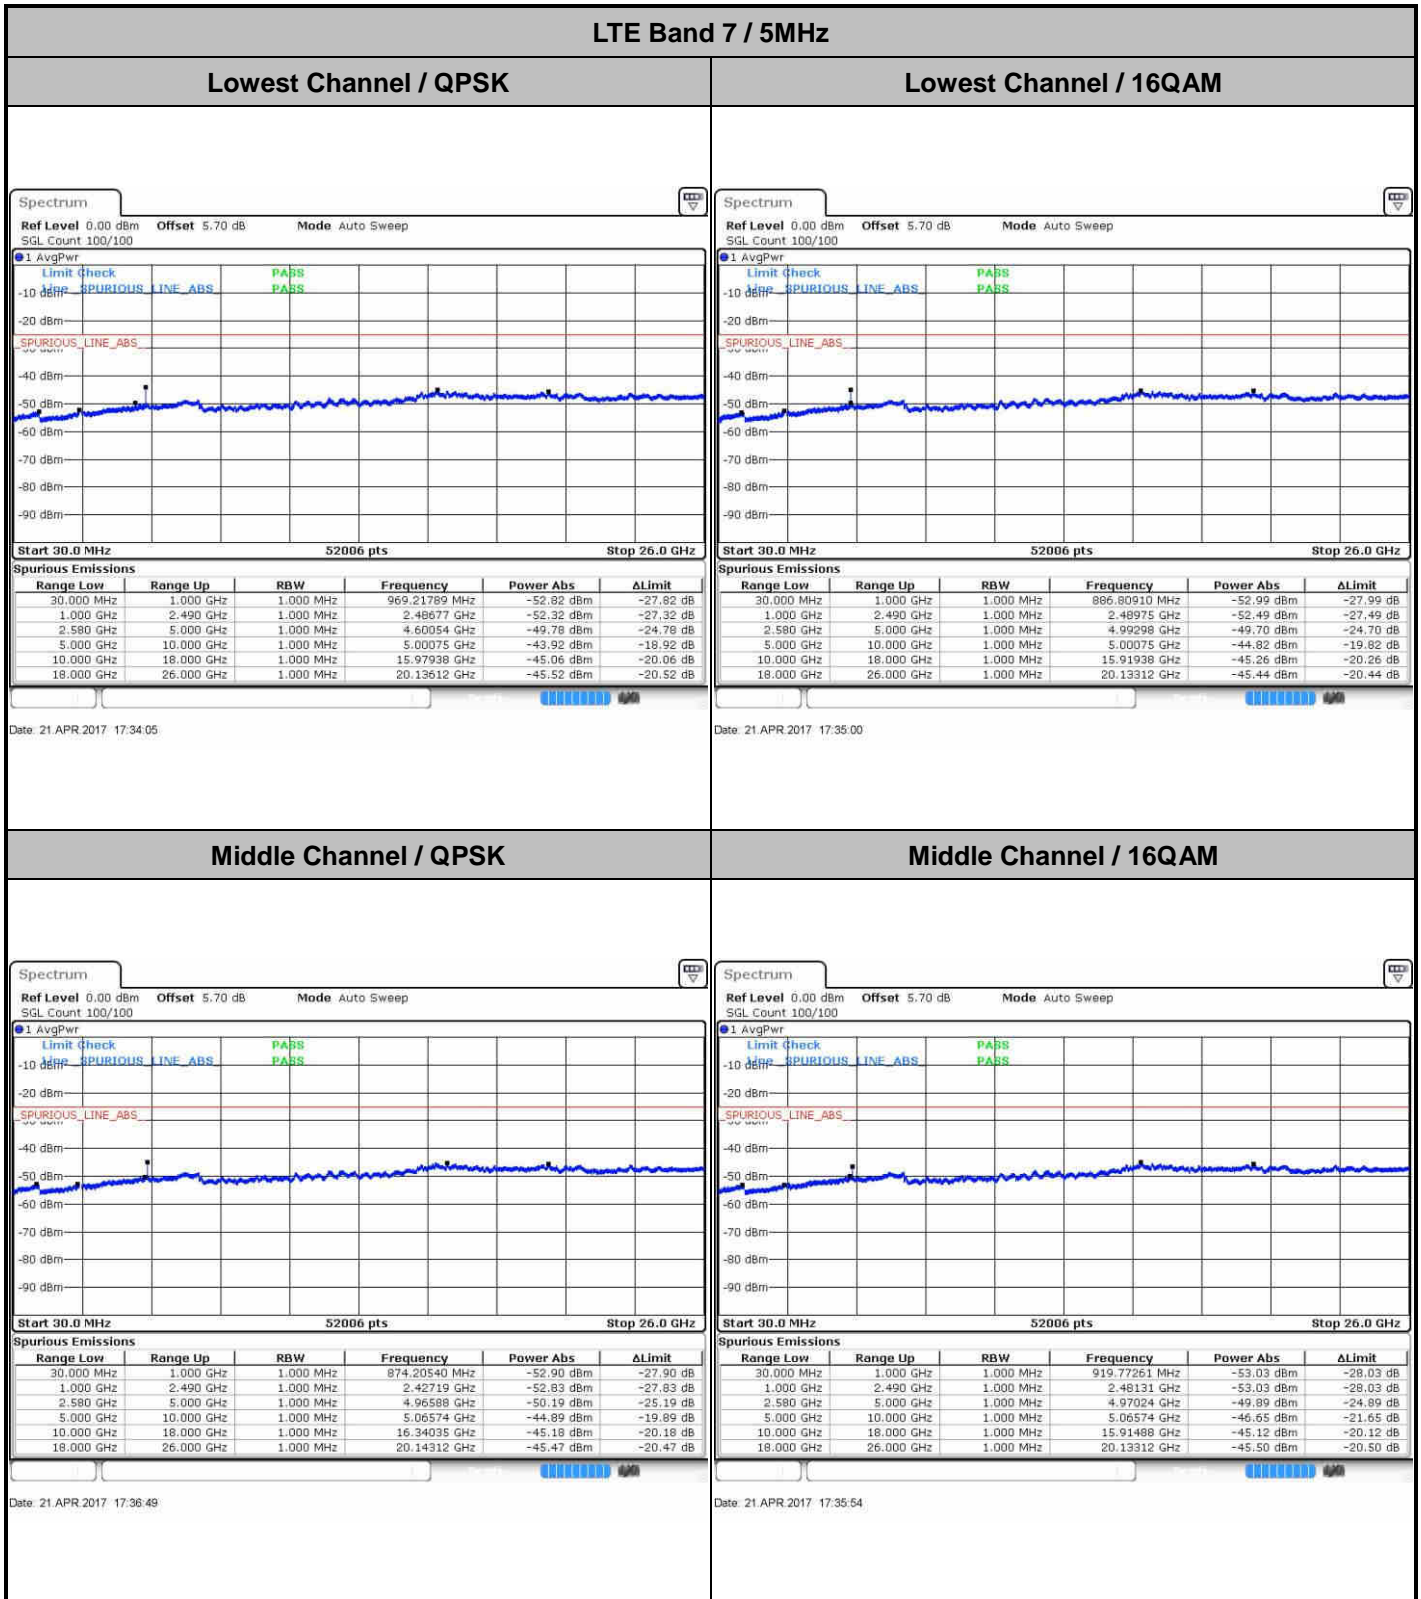




LTE Band 7 / 5MHz

Highest Channel / QPSK

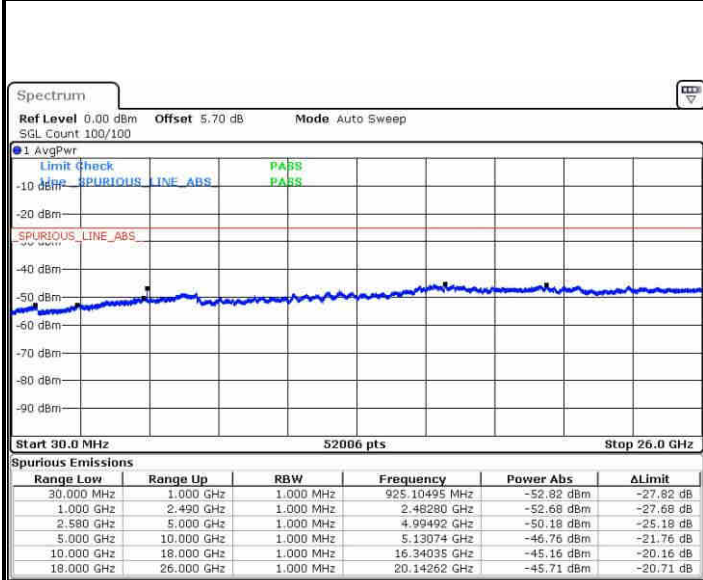

Date: 21 APR 2017 17:37:44


Highest Channel / 16QAM

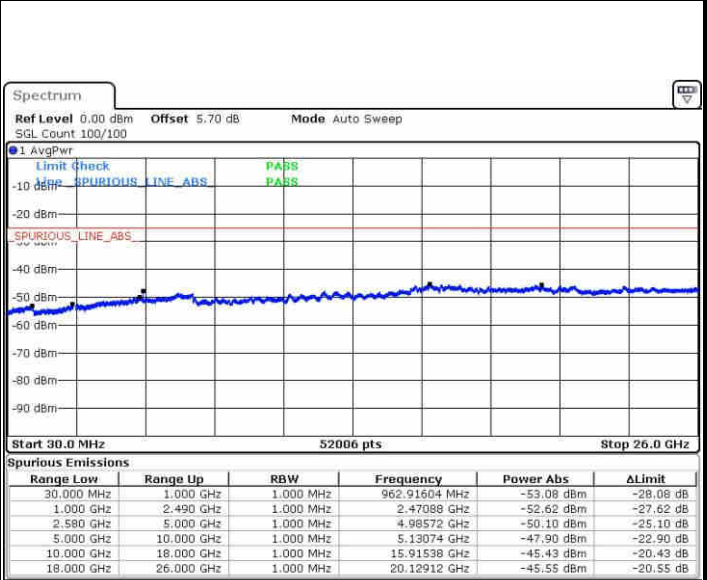

Date: 21 APR 2017 17:38:38


LTE Band 7 / 10MHz

Lowest Channel / QPSK

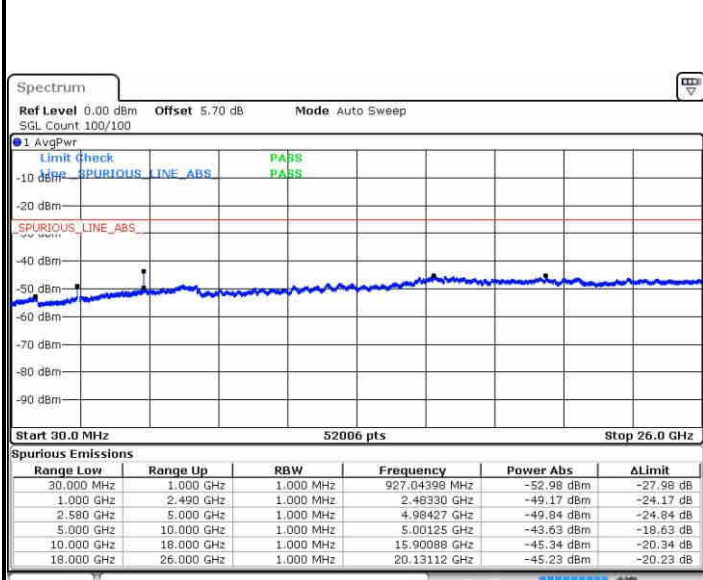

Date: 21 APR 2017 17:50:49

Lowest Channel / 16QAM

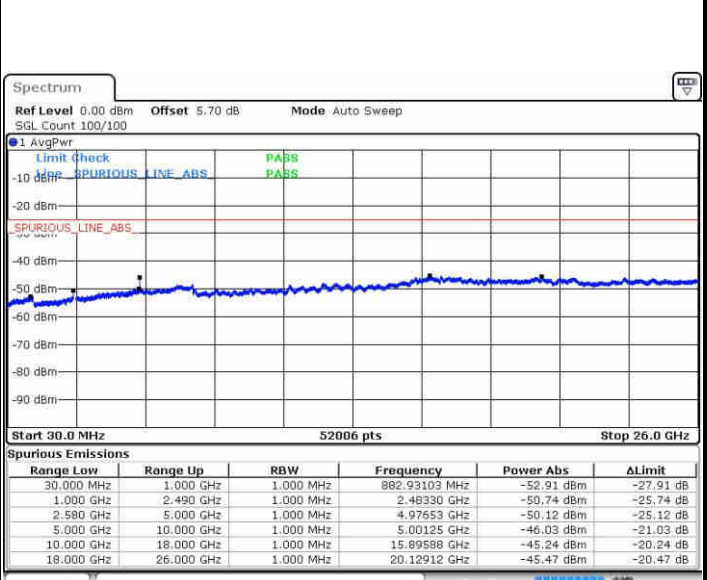



Date: 21 APR 2017 17:51:44



LTE Band 7 / 10MHz

Middle Channel / QPSK

Middle Channel / 16QAM

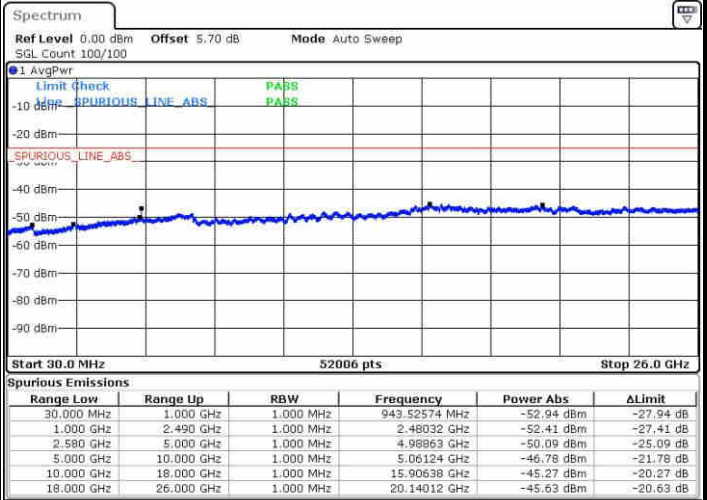
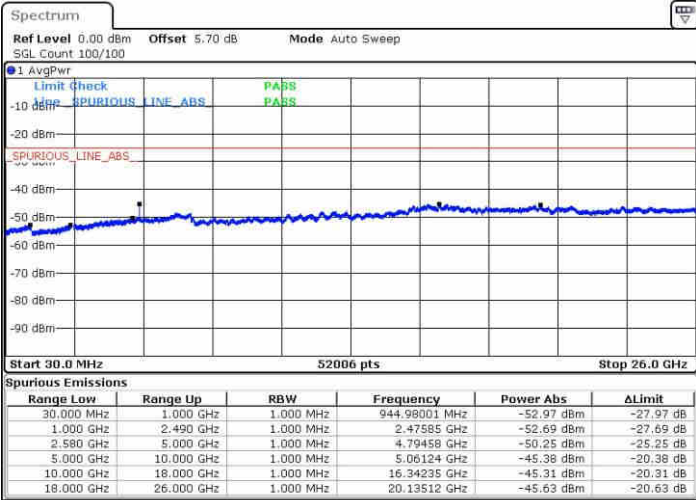


Date: 21 APR 2017 17:53:33

Date: 21 APR 2017 17:52:38

Highest Channel / QPSK

Highest Channel / 16QAM

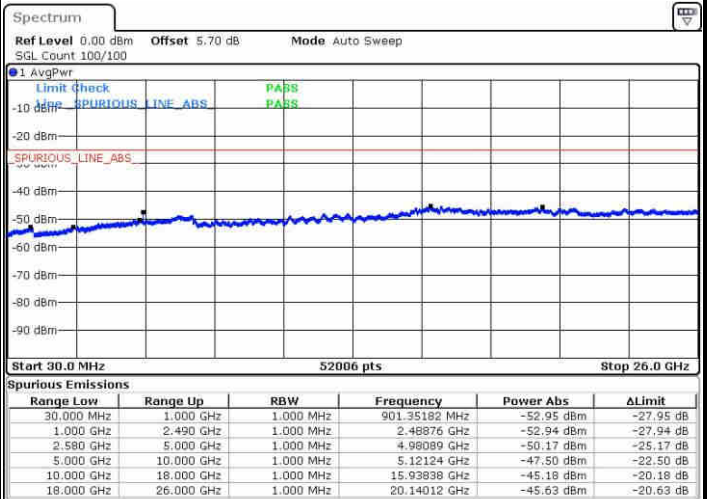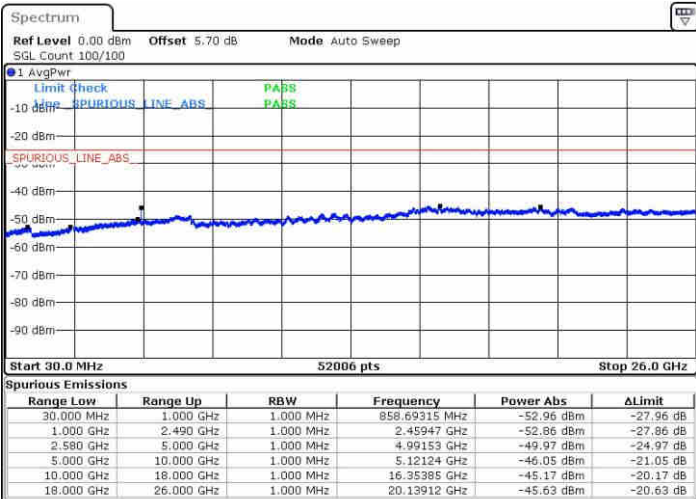

Date: 21 APR 2017 17:54:28


Date: 21 APR 2017 17:55:22




LTE Band 7 / 15MHz

Lowest Channel / QPSK

Lowest Channel / 16QAM

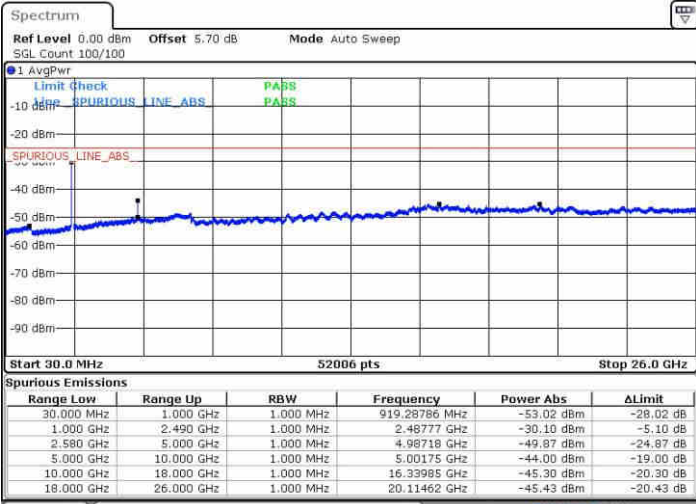


Date: 21 APR 2017 18:07:33

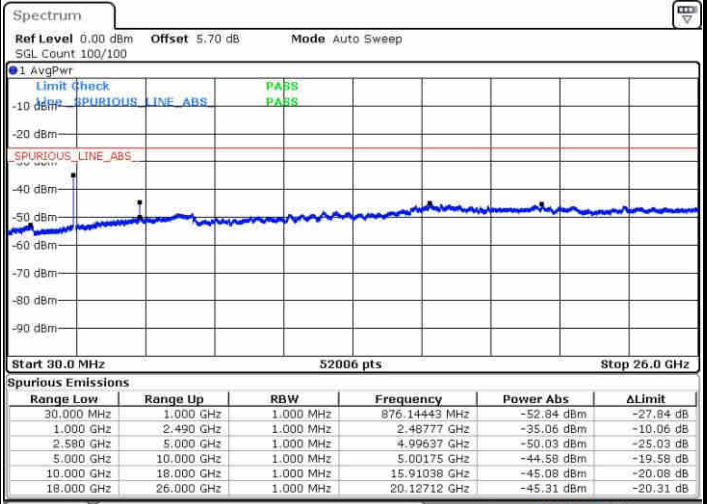


Date: 21 APR 2017 18:08:28

Middle Channel / QPSK

Middle Channel / 16QAM

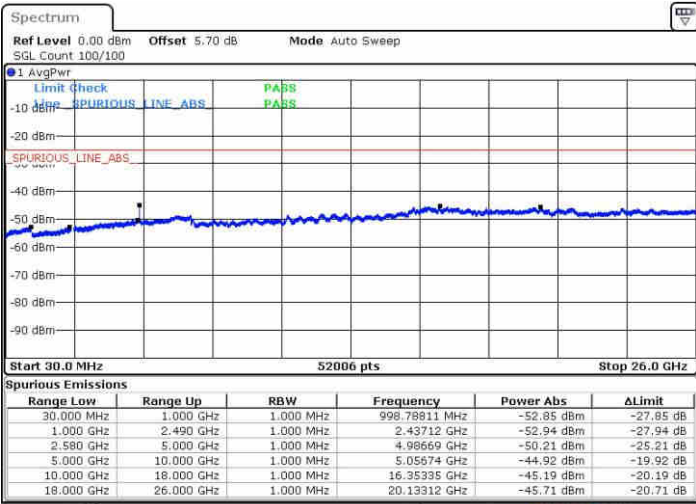

Date: 21 APR 2017 18:10:17

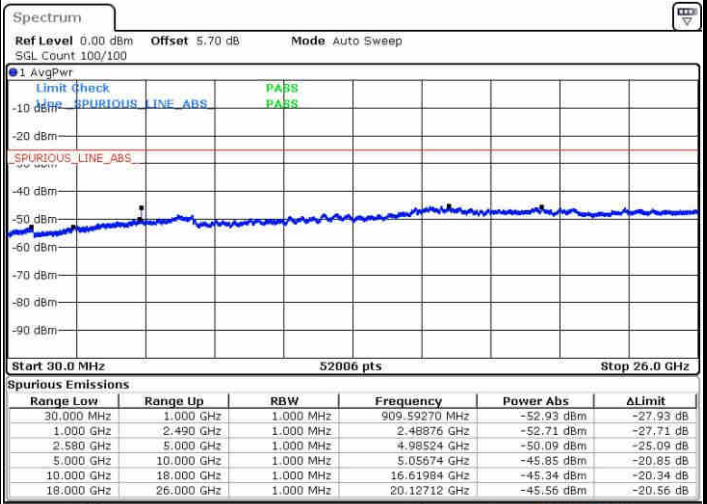


Date: 21 APR 2017 18:09:22




LTE Band 7 / 15MHz

Highest Channel / QPSK

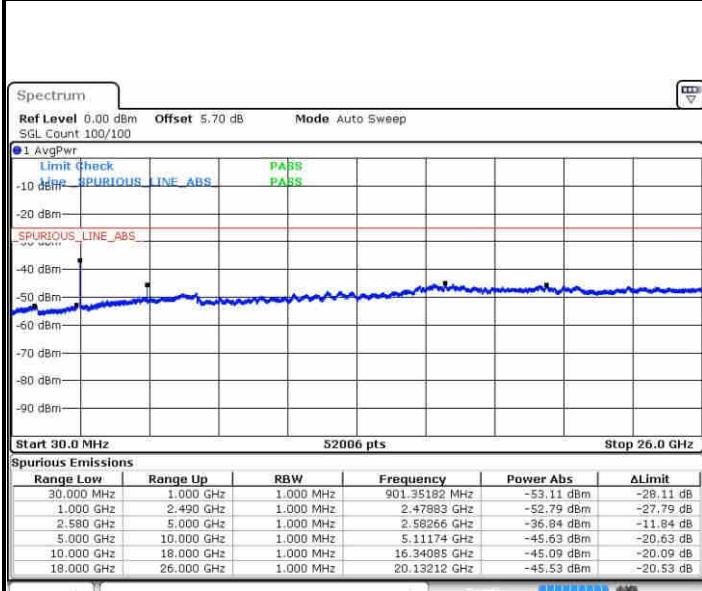

Date: 21 APR 2017 18:11:12


Highest Channel / 16QAM

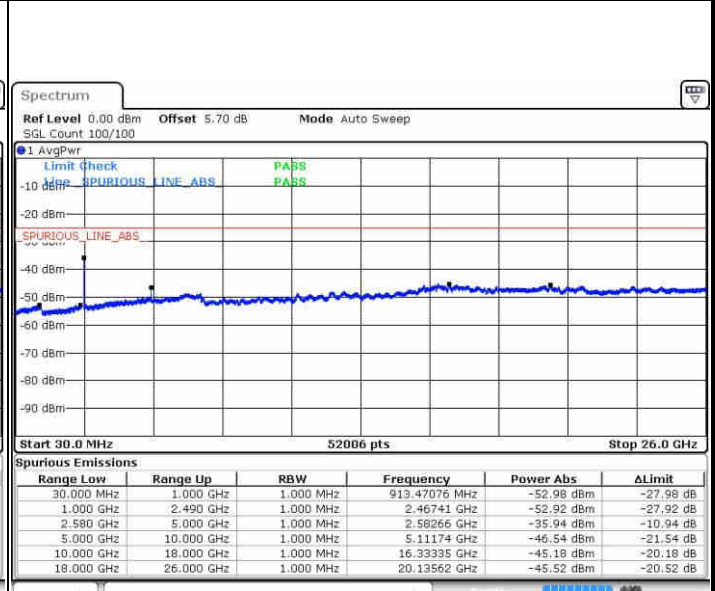

Date: 21 APR 2017 18:12:06


LTE Band 7 / 20MHz

Lowest Channel / QPSK

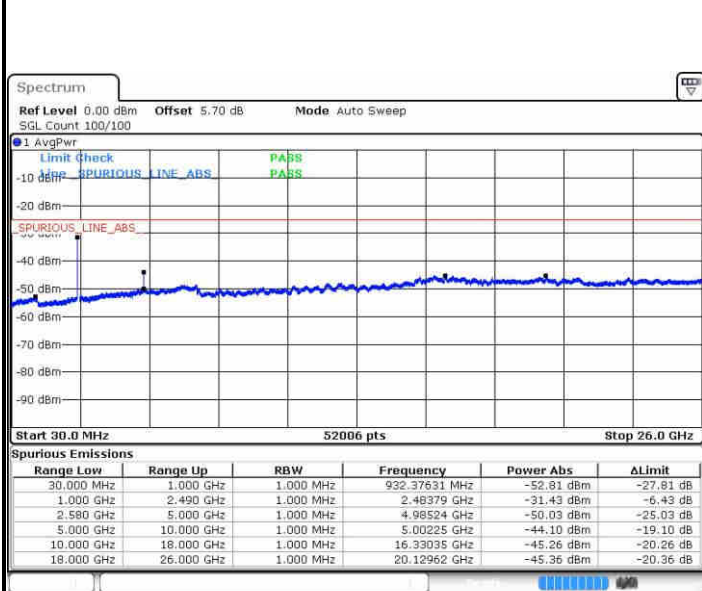

Date: 21 APR 2017 18:24:17

Lowest Channel / 16QAM

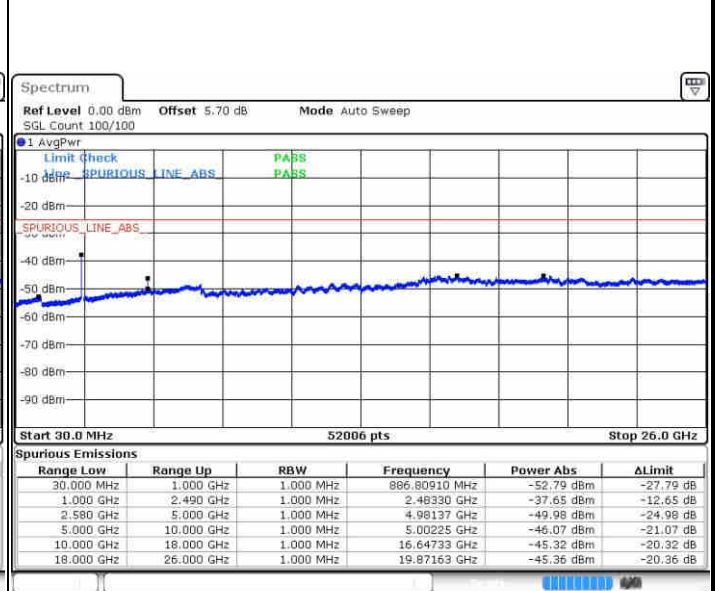



Date: 21 APR 2017 18:25:12



LTE Band 7 / 20MHz

Middle Channel / QPSK

Middle Channel / 16QAM

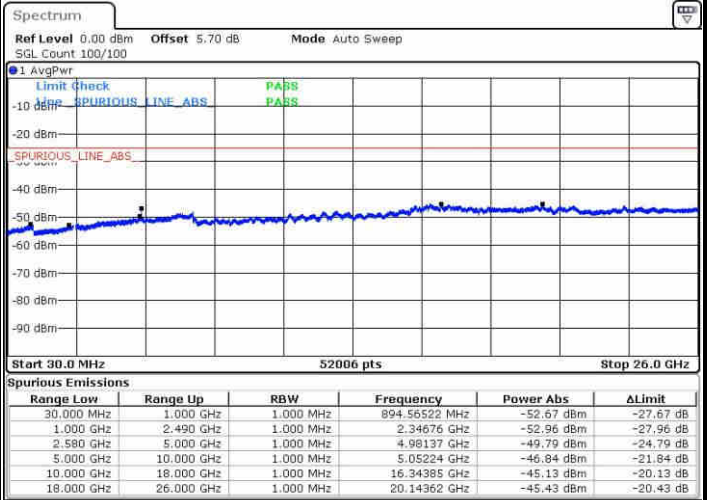
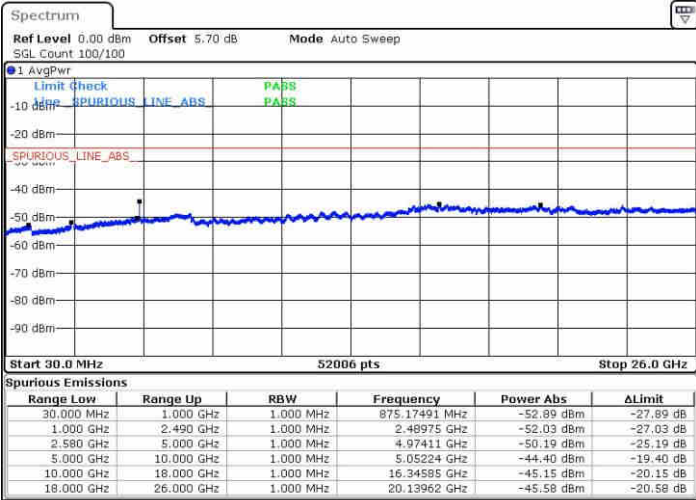


Date: 21 APR 2017 18:27:02

Date: 21 APR 2017 18:28:07

Highest Channel / QPSK

Highest Channel / 16QAM

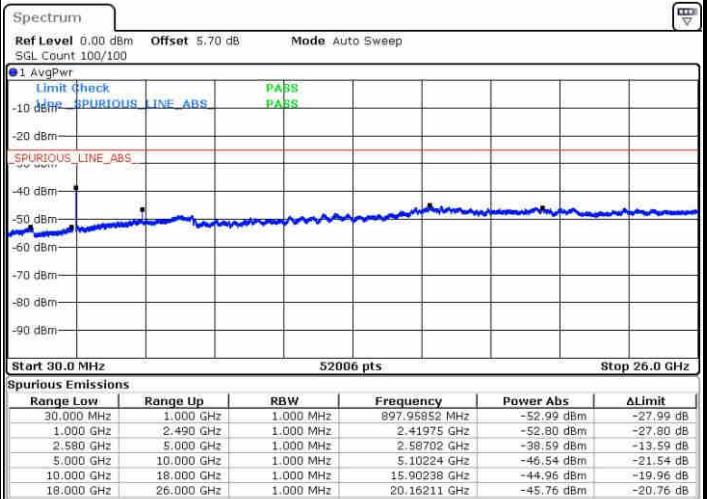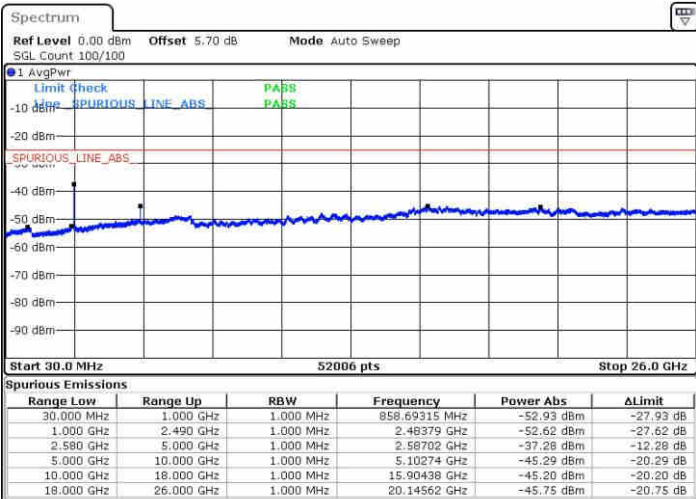

Date: 21 APR 2017 18:27:56

Date: 21 APR 2017 18:28:51



Frequency Stability

Test Conditions		LTE Band 7 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0010	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0015	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0002	
0	Normal Voltage	0.0012	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0004	
-30	Normal Voltage	0.0001	
20	Maximum Voltage	0.0008	
20	Normal Voltage	0.0006	
20	Battery End Point	0.0001	

Note:

1. Normal Voltage =3.8 V. ; Battery End Point (BEP) =3.6 V. ; Maximum Voltage =4.4 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



### Appendix B. Test Results of Radiated Test

#### Radiated Spurious Emission

LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5064	-65.27	-25	-40.27	-74.49	-71.83	2.41	8.97	H
	7600	-61.35	-25	-36.35	-75.05	-70.35	2.86	11.86	H
	10131	-58.41	-25	-33.41	-76.76	-67.31	3.21	12.11	H
	5064	-65.74	-25	-40.74	-74.45	-72.30	2.41	8.97	V
	7600	-60.32	-25	-35.32	-74.95	-69.32	2.86	11.86	V
	10131	-56.29	-25	-31.29	-75.69	-65.19	3.21	12.11	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5060	-65.16	-25	-40.16	-74.38	-71.72	2.41	8.97	H
	7592	-61.60	-25	-36.60	-75.30	-70.60	2.86	11.86	H
	10122	-57.68	-25	-32.68	-76.03	-66.58	3.21	12.11	H
	5060	-65.83	-25	-40.83	-74.54	-72.39	2.41	8.97	V
	7592	-60.18	-25	-35.18	-74.81	-69.18	2.86	11.86	V
	10122	-56.65	-25	-31.65	-76.05	-65.55	3.21	12.11	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5056	-65.31	-25	-40.31	-74.53	-71.87	2.41	8.97	H
	7584	-62.39	-25	-37.39	-76.09	-71.39	2.86	11.86	H
	10113	-59.09	-25	-34.09	-77.44	-67.99	3.21	12.11	H
	5056	-65.88	-25	-40.88	-74.59	-72.44	2.41	8.97	V
	7584	-61.33	-25	-36.33	-75.96	-70.33	2.86	11.86	V
	10113	-57.86	-25	-32.86	-77.26	-66.76	3.21	12.11	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5052	-65.37	-25	-40.37	-74.59	-71.93	2.41	8.97	H
	7580	-61.18	-25	-36.18	-74.88	-70.18	2.86	11.86	H
	10104	-57.80	-25	-32.80	-76.15	-66.70	3.21	12.11	H
	5052	-64.95	-25	-39.95	-73.66	-71.51	2.41	8.97	V
	7580	-60.66	-25	-35.66	-75.29	-69.66	2.86	11.86	V
	10104	-56.65	-25	-31.65	-76.05	-65.55	3.21	12.11	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



## **Appendix D. Reference Report**

Please refer to Sporton report number FG731705-01B which is issued separately.