



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10646, 10811
FCC ID : IHDT56WJ5
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Mar. 08, 2017 and testing was completed on Apr. 20, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Component List 7

 1.6. Specification of Accessory 8

 1.7. Modification of EUT 8

 1.8. Test Location 9

 1.9. Applicable Standards 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 21

5. UNCERTAINTY OF EVALUATION 22

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 11.05 dB at 0.481 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.84 dB at 42.960 MHz



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10646, 10811
FCC ID	IHDT56WJ5
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+ (16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conduction: 355665080000889 for Sample 2 355661080018799/355661080018807 for Sample 1 Radiation: 355665080000889 for Sample 2 355661080015498/355661080015506 for Sample 1
HW Version	DVT1
SW Version	montana_n-userdebug 7.1.1 NPP26.56 1473 intcfg,test-keys
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz Glonass: 1602 MHz + n× 0.5625MHz (n=-7,-6,-5,...0,...,6) NFC : 13.56 MHz FM : 87.5 MHz ~ 108 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GPS/Glonass: PIFA Antenna NFC : Loop Antenna FM: External headset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS/Glonass : BPSK



	NFC: ASK FM
--	----------------

1.5. Component List

Note: There are two types of EUT, the sample 1 (model name: 10646) is dual SIM slot and the sample 2(model name: 10811) is single SIM slot, the details refer the following table. According to the difference, we choose sample 1 to perform full test, sample 2 to verify worst mode.

Component	Sample 1	Sample 2
CPU	Qualcomm MSM-8937-4-727NSP-TR-00-1-AA	Qualcomm MSM-8937-4-727NSP-TR-00-1-AA
TLCM	Tianma TL052VVMP09-00/ TL052VVMP13-00	Tianma TL052VVMP09-00/ TL052VVMP13-00
Memory	Samsung KMRX1000BM-B614	Hynix H9TQ26ADFTBCUR-KUM
Front Camera	sunny D5V16C-0JG	sunny D5V16C-0JG
Back Camera	sunny AL6S05S-0JG	sunny AL6S05S-0JG
Battery	ATL SB18C15119	ATL SB18C15119



1.6. Specification of Accessory

Specification of Accessory			
AC Adapter 1	Brand Name	Motorola(Salom)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
AC Adapter 2	Brand Name	Motorola(chenyang)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
AC Adapter 3	Brand Name	Motorola(LiteOn)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
Battery	Brand Name	Motorola (ATL)	Model Name SB18C15119
	Power Rating	3.8Vdc,3000mAh	Type Li-ion
Earphone 1	Brand Name	Motorola(Lian chuang)	Model Name SJYN1181B
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
Earphone 2	Brand Name	Motorola(Lianyun)	Model Name TS500-03AMS01WHR-M
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
Earphone 3	Brand Name	Motorola(Tianzhi)	Model Name TJ101817
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
USB Cable 1	Brand Name	Motorola(Liqi)	Model Name L25W-051000100AL
	Signal Line Type	1.0 meter, shielded cable, without core	
USB Cable 2	Brand Name	Motorola(Fukangyuan)	Model Name F25W-051000100A
	Signal Line Type	1.0 meter, shielded cable, without core	

1.7. Modification of EUT

No modifications are made to the EUT during all test items.



1.8. Test Location

Test Site	Sporton International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-KS	03CH02-KS	418269

Note: The test site complies with ANSI C63.4 2014 requirement.

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. For FCC 15 Subpart B - Unintentional Radiators, device supporting USB interface or similar peripherals (defined as the Section 15.3 (r) Peripheral device) acting as a peripheral for personal computers shall be authorized as “The Class B personal computers and peripherals” per the Section 15.101 (a) Equipment authorization of unintentional radiators.
3. For other Unintentional Radiators features of this EUT, test reports are be issued separately.
Per the Note of the Section 15.101, when device supports features (USB, FM Radio, digital devices...etc) more than one category of authorization, type of authorization shall be appropriately chosen for FCC 15B compliance rule, and the Section 15.101 (b), only those receivers that operate (tune) within the frequency range of 30-960 MHz, CB receivers and radar detectors are subject to the authorizations shown in paragraph (a) of the Section 15.101. However, receivers indicated as being subject to Declaration of Conformity that are contained within a transceiver, the transmitter portion of which is subject to certification, shall be authorized under the verification procedure.



2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + USB Cable 1(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1
	Mode 2: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(5G) + Earphone 2 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1
	Mode 3: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 3 + USB Cable 1(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1
	Mode 4: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + USB Cable 1(Data Link to Notebook) + Battery + GPS Rx for Sample 2
Radiated Emissions < 1GHz	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(5G) + Earphone 1 + USB Cable 1(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1
	Mode 2: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1
	Mode 3: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 3 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1
	Mode 4: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx for Sample 2
Radiated Emissions ≥ 1GHz	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx for Sample 2
Remark:	
1. The worst case of AC is mode 1; only the test data of this mode was reported.	
2. The worst case of RE < 1G is mode 4; only the test data of this mode was reported.	

2.2. Connection Diagram of Test System

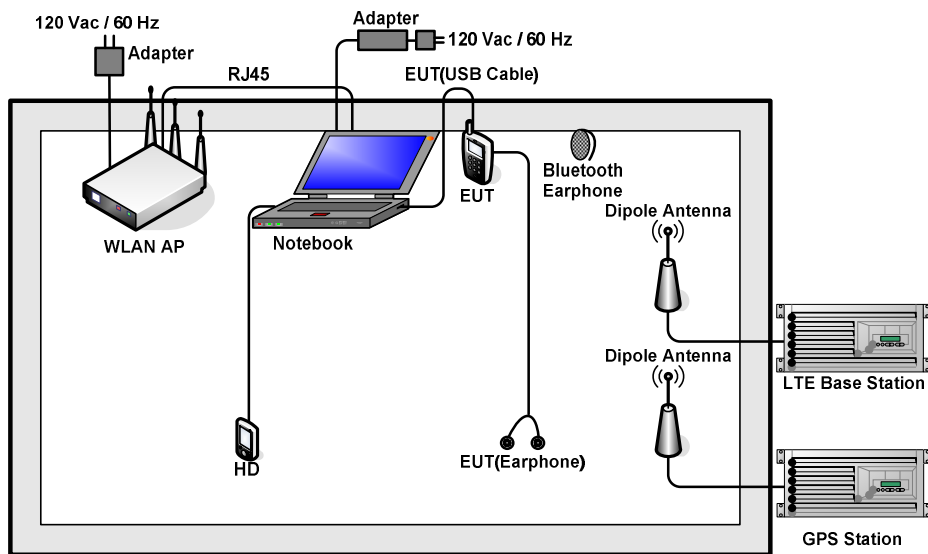

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
5.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
6.	Notebook	Lenovo	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
8.	Bluetooth Earphone	Lenovo	LBH301	QTLBH-106	N/A	N/A
9.	Hard Disk	Lenovo	F310	FCC DoC	Shielded, 0.5 m	N/A
10.	SD Card	Kingston	4GB	N/A	N/A	N/A
11.	SD Card	SanDisk	Ultra	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Morris Li	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + USB Cable 1(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1		

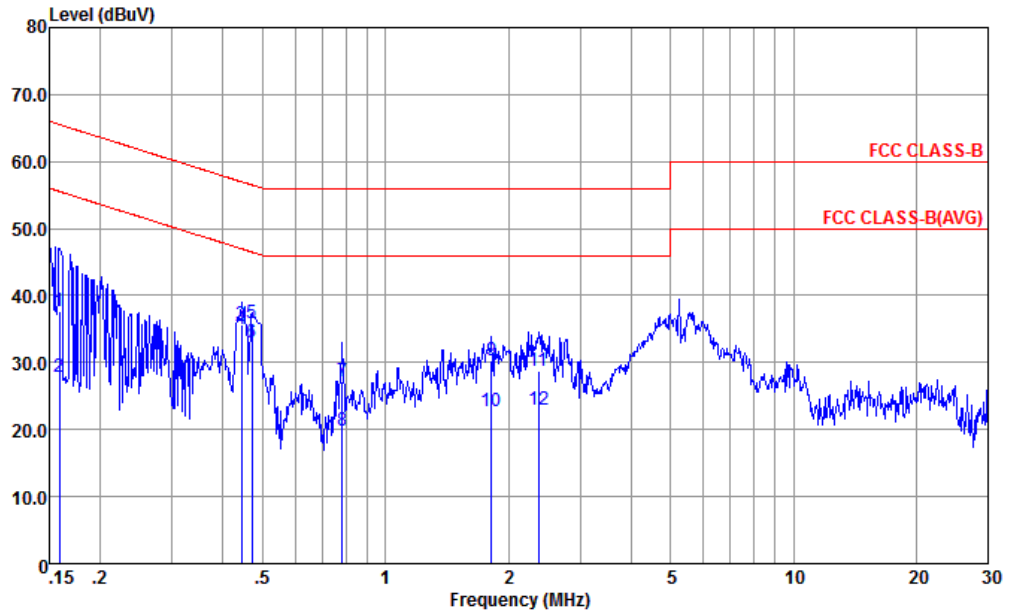


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-161017-060103 LINE
 Project : (FC) 730825
 mode : Mode 1
 IMEI : 355661080018799/355661080018807

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	
	MHz	dBuV		dB	dBuV	dB	dB	Remark
1	0.159	37.68	-27.84	65.52	26.81	0.49	10.38	QP
2	0.159	27.78	-27.74	55.52	16.91	0.49	10.38	Average
3	0.444	35.56	-21.42	56.98	25.10	0.27	10.19	QP
4 *	0.444	35.06	-11.92	46.98	24.60	0.27	10.19	Average
5	0.471	35.86	-20.63	56.49	25.40	0.27	10.19	QP
6	0.471	33.06	-13.43	46.49	22.60	0.27	10.19	Average
7	0.783	27.23	-28.77	56.00	16.81	0.25	10.17	QP
8	0.783	19.93	-26.07	46.00	9.51	0.25	10.17	Average
9	1.819	30.30	-25.70	56.00	19.89	0.22	10.19	QP
10	1.819	22.80	-23.20	46.00	12.39	0.22	10.19	Average
11	2.371	28.71	-27.29	56.00	18.30	0.21	10.20	QP
12	2.371	23.01	-22.99	46.00	12.60	0.21	10.20	Average



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Morris Li	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + USB Cable 1(Data Link to Notebook) + Battery + GPS Rx + SIM 1 for Sample 1		

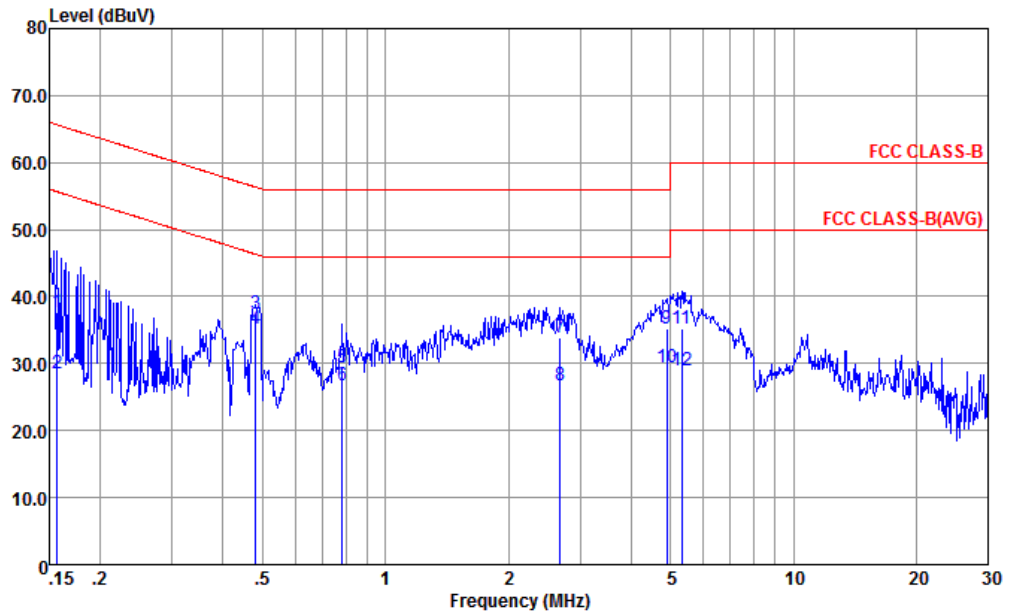

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-161017-060103 NEUTRAL
 Project : (FC) 730825
 mode : Mode 1
 IMEI : 355661080018799/355661080018807

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	37.62	-28.03	65.65	26.90	0.34	10.38	QP
2	0.156	28.42	-27.23	55.65	17.70	0.34	10.38	Average
3	0.481	37.37	-18.95	56.32	26.80	0.38	10.19	QP
4 *	0.481	35.27	-11.05	46.32	24.70	0.38	10.19	Average
5	0.783	29.46	-26.54	56.00	18.90	0.39	10.17	QP
6	0.783	26.66	-19.34	46.00	16.10	0.39	10.17	Average
7	2.678	33.81	-22.19	56.00	23.20	0.40	10.21	QP
8	2.678	26.81	-19.19	46.00	16.20	0.40	10.21	Average
9	4.900	35.12	-20.88	56.00	24.50	0.38	10.24	QP
10	4.900	29.42	-16.58	46.00	18.80	0.38	10.24	Average
11	5.333	35.22	-24.78	60.00	24.60	0.37	10.25	QP
12	5.333	28.92	-21.08	50.00	18.30	0.37	10.25	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

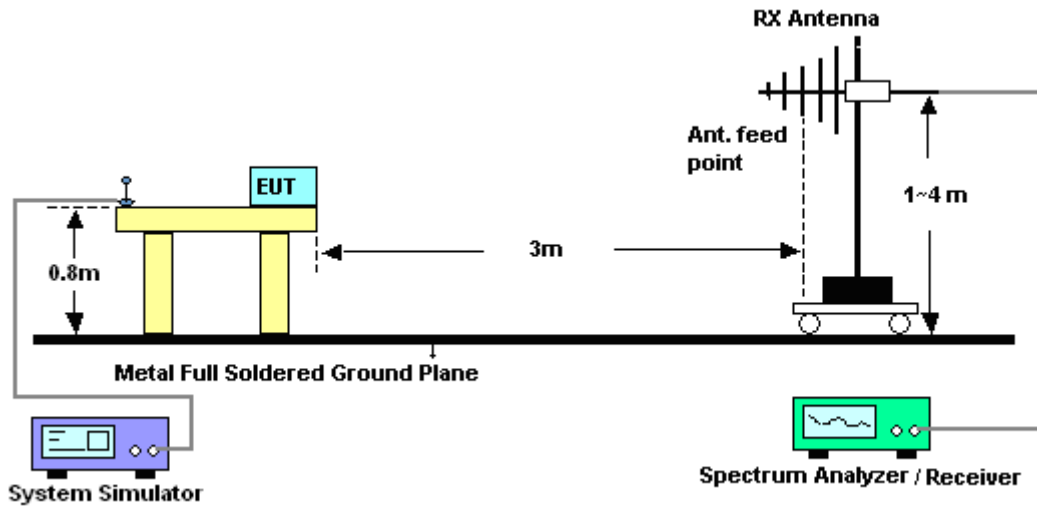


For radiated emissions above 1GHz

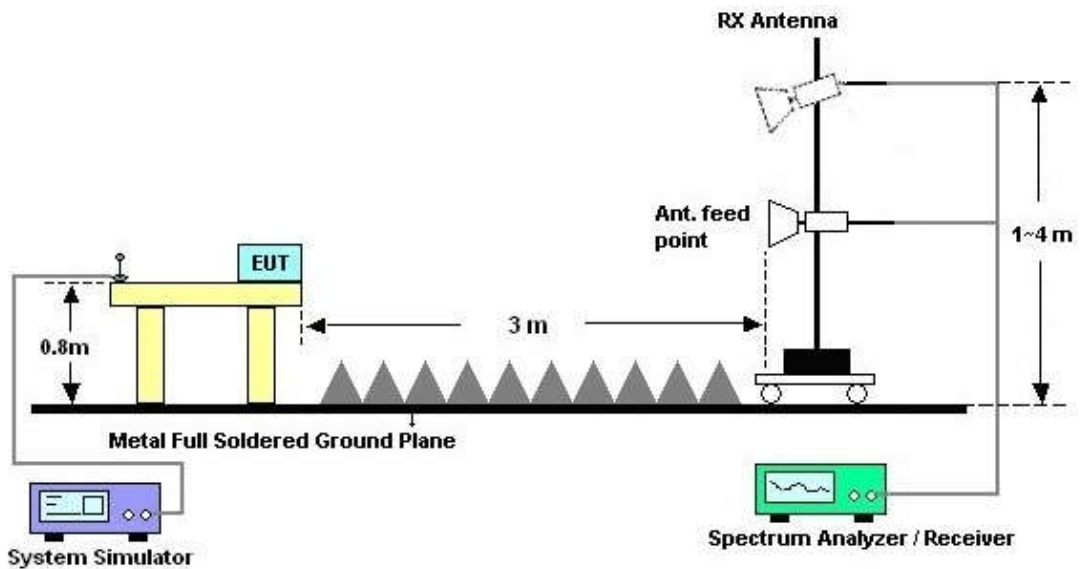



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 4	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx for Sample 2		
Remark :	#6 is system simulator signal which can be ignored.		

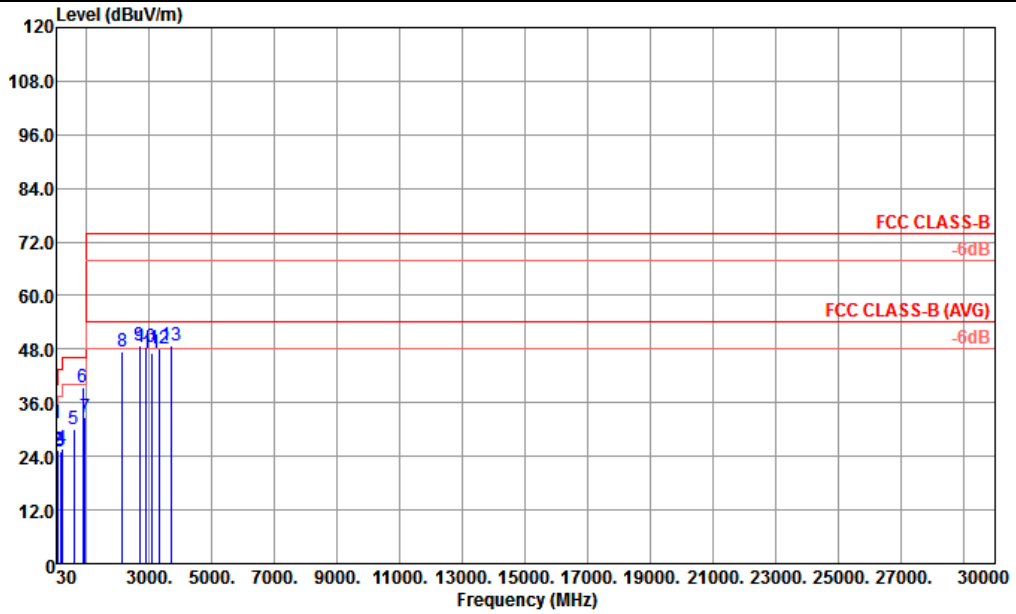


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 966-02 LF ANT HORIZONTAL
 Project : (FC) 730825
 Mode : 4
 IMEI : 355665080000889 #22

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	42.96	31.32	-8.68	40.00	42.36	20.70	0.13	31.87	100	0 Peak
2	84.00	25.25	-14.75	40.00	40.85	15.87	0.21	31.68	---	---
3	149.88	24.99	-18.51	43.50	38.64	17.56	0.32	31.53	---	---
4	200.10	25.63	-17.87	43.50	40.79	15.38	0.41	30.95	---	---
5	597.50	30.24	-15.76	46.00	33.94	24.32	0.90	28.92	---	---
6	881.70	39.39			37.38	27.45	1.59	27.03	---	---
7	951.70	32.76	-13.24	46.00	29.08	28.44	1.72	26.48	---	---
8	2140.00	47.48	-26.52	74.00	45.42	30.97	5.50	34.41	---	---
9	2682.00	48.73	-25.27	74.00	43.64	31.85	3.21	29.97	---	---
10	2902.00	48.32	-25.68	74.00	41.30	32.35	2.95	28.28	---	---
11	3060.00	47.13	-26.87	74.00	39.87	32.82	4.11	29.67	---	---
12	3330.00	48.23	-25.77	74.00	39.64	33.58	5.97	30.96	---	---
13	3720.00	48.90	-25.10	74.00	39.61	34.37	6.34	31.42	---	---



Test Mode :	Mode 4	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + USB Cable 2(Data Link to Notebook) + Battery + GPS Rx for Sample 2		
Remark :	#6 is system simulator signal which can be ignored.		

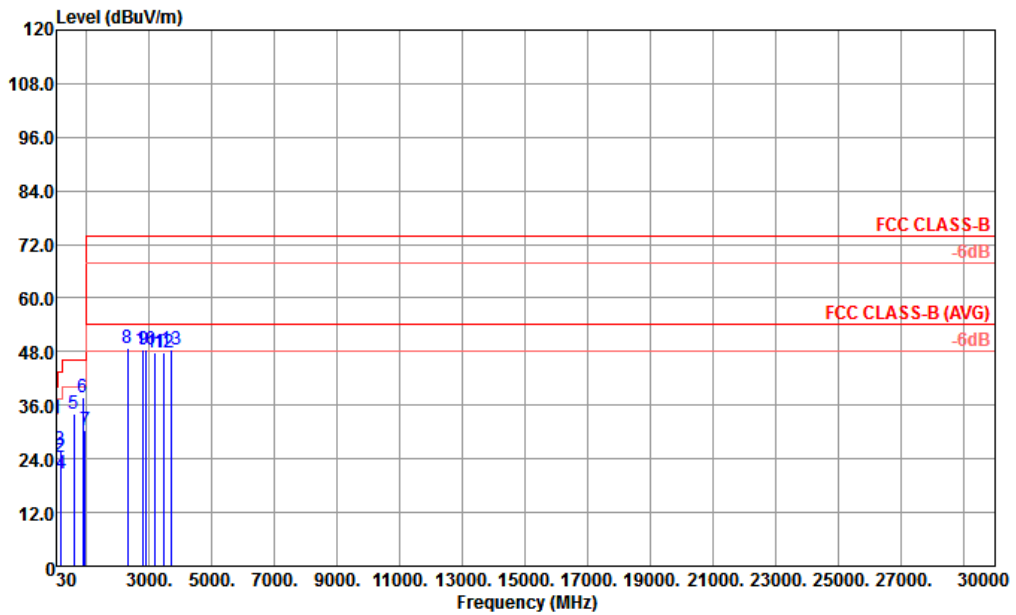

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 966-02 LF ANT VERTICAL
 Project : (FC) 730825
 Mode : 4
 IMEI : 35566508000889 #22

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	42.96	33.16	-6.84	40.00	44.20	20.70	0.13	31.87	100	0	Peak
2	149.34	24.44	-19.06	43.50	38.09	17.56	0.32	31.53	---	---	Peak
3	153.12	25.94	-17.56	43.50	39.66	17.46	0.33	31.51	---	---	Peak
4	194.43	20.78	-22.72	43.50	35.97	15.53	0.40	31.12	---	---	Peak
5	597.50	34.04	-11.96	46.00	37.74	24.32	0.90	28.92	---	---	Peak
6	879.60	37.80			35.83	27.44	1.57	27.04	---	---	Peak
7	939.10	30.35	-15.65	46.00	26.99	28.22	1.71	26.57	---	---	Peak
8	2304.00	48.69	-25.31	74.00	45.47	31.31	5.67	33.76	---	---	Peak
9	2814.00	48.49	-25.51	74.00	41.21	32.14	2.76	27.62	---	---	Peak
10	2908.00	48.44	-25.56	74.00	41.42	32.35	2.95	28.28	---	---	Peak
11	3192.00	47.93	-26.07	74.00	39.98	33.40	5.73	31.18	---	---	Peak
12	3444.00	47.74	-26.26	74.00	39.03	33.72	5.96	30.97	---	---	Peak
13	3720.00	48.51	-25.49	74.00	39.22	34.37	6.34	31.42	---	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	Apr. 29, 2016	Apr. 20, 2017	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Apr. 20, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Apr. 20, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Apr. 20, 2017	Oct. 12, 2017	Conduction (CO01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 22, 2017	Mar. 22, 2017	Apr. 21, 2018	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Mar. 22, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Mar. 22, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Mar. 22, 2017	Feb. 14, 2018	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-H G	1887435	18GHz~40GHz	Oct. 13, 2016	Mar. 22, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Mar. 22, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 13, 2016	Mar. 22, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Mar. 22, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 22, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 22, 2017	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3dB
---	-------