



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10647
FCC ID : IHDT56WK1
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Jun. 17, 2017 and testing was completed on Jul. 11, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Specification of Accessory	8
1.6. Modification of EUT	8
1.7. Test Location	9
1.8. Applicable Standards	10
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1. Test Mode	11
2.2. Connection Diagram of Test System	12
2.3. Support Unit used in test configuration and system.....	13
2.4. EUT Operation Test Setup	13
3. TEST RESULT	14
3.1. Test of AC Conducted Emission Measurement	14
3.2. Test of Radiated Emission Measurement	18
4. LIST OF MEASURING EQUIPMENT	22
5. UNCERTAINTY OF EVALUATION	23
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC761702-01	Rev. 01	Initial issue of report	Jul. 31, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 11.24 dB at 0.476 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.46 dB at 40.530 MHz



1. General Description

1.1. Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10647
FCC ID	IHDT56WK1
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+ (16QAM uplink is not supported)/LTE/NFC WLAN2.4G 802.11b/g/n HT20/HT40/ WLAN5G 802.11a/n HT20/HT40/ WLAN5G 802.11ac VHT20/VHT40/VHT80/ Bluetooth V3.0 + EDR/ Bluetooth V4.0 LE/ Bluetooth v4.1 LE / Bluetooth v4.2 LE / Bluetooth v5.0 LE
IMEI Code	Conduction: 356484080025725 Radiation: 356484080025840
HW Version	DVT2
SW Version	NPW26.75
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA2000 BC10 : 817.9 MHz ~ 823.1 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500MHz ~ 5700 MHz ; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7: 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 2110.7 MHz ~ 2199.3 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz CDMA2000 BC10 : 862.9 MHz ~ 868.1 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500MHz ~ 5700 MHz ; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz Glonass: 1602 MHz + $n \times 0.5625\text{MHz}$ ($n=-7,-6,-5,\dots,0,\dots,6$)

	FM : 88 MHz ~ 108 MHz NFC : 13.56 MHz
Antenna Type	WWAN : Fixed Internal Antenna WLAN : Loop Antenna Bluetooth : Loop Antenna GPS/Glonass : Loop Antenna NFC : Frame Loop Antenna FM: External headset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM CDMA2000 : QPSK CDMA2000 1xEV-DO : QPSK/8PSK 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS/Glonass : BPSK FM NFC: ASK

Note: WLAN operation in 5600 MHz ~ 5650 MHz is notched.

1.5. Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola (Salom)	Model Name	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
AC Adapter 2 (US)	Brand Name	Motorola (Chenyang)	Model Name	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
AC Adapter 3 (US)	Brand Name	Motorola (LiteOn)	Model Name	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
Battery	Brand Name	Motorola (Sunwoda)	Model Name	HX40
	Power Rating	3.8Vdc, 2810mAh	Type	Li-ion
Earphone	Brand Name	Motorola (Cosonic)	Model Name	SH38C16617
	Signal Line Type	1.10 meter, non-shielded cable, without ferrite core		
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Foxlink)	Model Name	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		

1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Test Location

Test Site	Sporton International (KunShan) INC.
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958
Test Site No.	Sporton Site No.
	CO01-KS

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH03-SZ	565805

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. For FCC 15 Subpart B - Unintentional Radiators, device supporting USB interface or similar peripherals (defined as the Section 15.3 (r) Peripheral device) acting as a peripheral for personal computers shall be authorized as "The Class B personal computers and peripherals" per the Section 15.101 (a) Equipment authorization of unintentional radiators.
3. For other Unintentional Radiators features of this EUT, test reports are be issued separately.
Per the Note of the Section 15.101, when device supports features (USB, FM Radio, digital devices...etc) more than one category of authorization, type of authorization shall be appropriately chosen for FCC 15B compliance rule, and the Section 15.101 (b), only those receivers that operate (tune) within the frequency range of 30-960 MHz, CB receivers and radar detectors are subject to the authorizations shown in paragraph (a) of the Section 15.101. However, receivers indicated as being subject to Declaration of Conformity that are contained within a transceiver, the transmitter portion of which is subject to certification, shall be authorized under the verification procedure.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1(Data Link with Notebook) + Battery + GPS Rx
	Mode 2: LTE Band 5 Idle + Bluetooth Idle + WLAN (5G) Idle + Earphone + USB Cable 2(Data Link with Notebook) + Battery + GPS Rx
	Mode 3: LTE Band 5 Idle + Bluetooth Idle + WLAN (5G) Idle + Earphone + USB Cable 3(Data Link with Notebook) + Battery + GPS Rx
Radiated Emissions < 1GHz	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1(Data Link with Notebook) + Battery + GPS Rx
	Mode 2: LTE Band 5 Idle + Bluetooth Idle + WLAN (5G) Idle + Earphone + USB Cable 2(Data Link with Notebook) + Battery + GPS Rx
	Mode 3: LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 3(Data Link with Notebook) + Battery + GPS Rx
Radiated Emissions $\geq$ 1GHz	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1(Data Link with Notebook) + Battery + GPS Rx
Remark: 1. The worst case of AC is mode 3; only the test data of this mode was reported. 2. The worst case of RE < 1G is mode 1; only the test data of this mode was reported.	

2.2. Connection Diagram of Test System

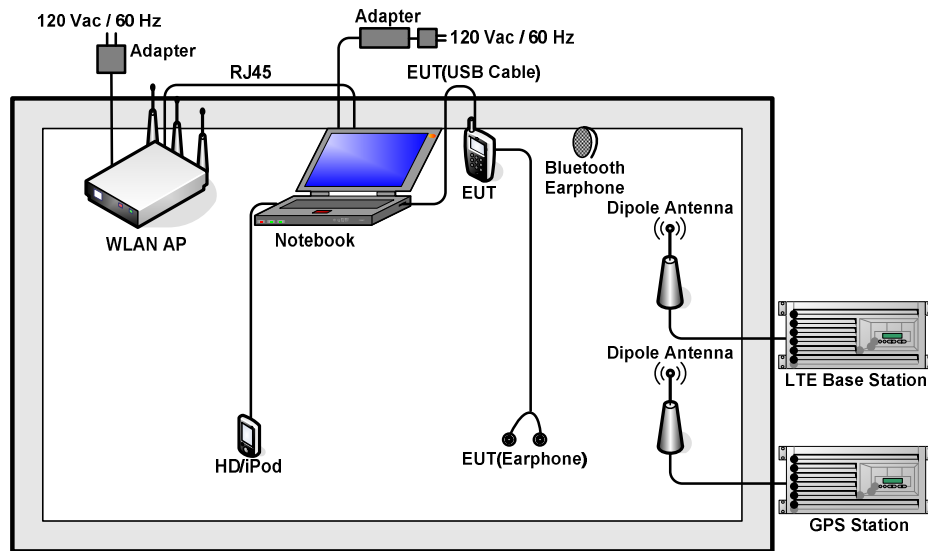

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	ADIVIE	MP9000	N/A	N/A	Unshielded, 1.8m
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
5.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
8.	Bluetooth Earphone	Lenovo	LBH308	QTLBH-106	N/A	N/A
9.	iPod	Apple	MC525 ZP/A	DoC	Shielded, 1.0m	N/A
10.	Hard Disk	Lenovo	F310	FCC DoC	Shielded, 1.2 m	N/A
11.	SD Card	Kingston	8GB	N/A	N/A	N/A
12.	SD Card	Kingston	MicroSD HC	FCC DoC	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

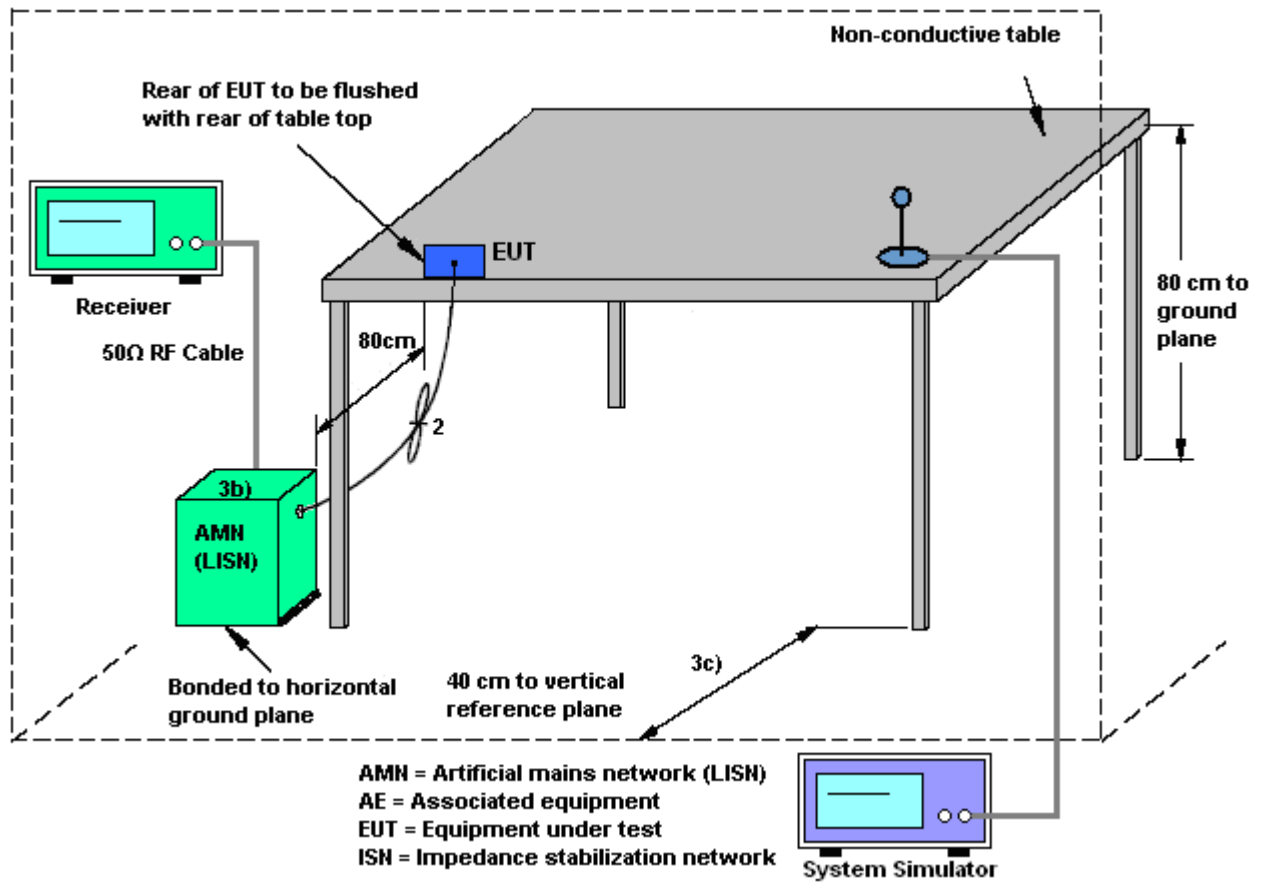



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 3	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN (5G) Idle + Earphone + USB Cable 3(Data Link with Notebook) + Battery + GPS Rx		

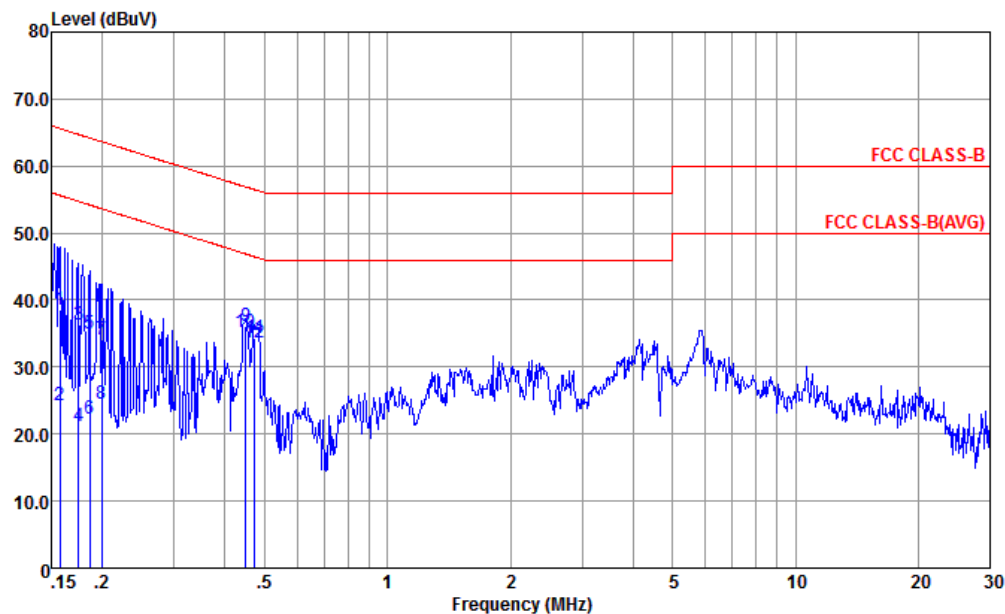


Site : CO01-KS
Condition : FCC CLASS-B LISN-L-161017-060103 LINE
Project : (FC) 761702-01
mode : Mode 3
: 356484080025725 #5

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV		dBuV	dBuV			
1	0.157	38.49	-27.11	65.60	27.61	0.50	10.38	QP
2	0.157	24.39	-31.21	55.60	13.51	0.50	10.38	Average
3	0.175	36.36	-28.36	64.72	25.60	0.40	10.36	QP
4	0.175	21.06	-33.66	54.72	10.30	0.40	10.36	Average
5	0.186	34.88	-29.32	64.20	24.20	0.33	10.35	QP
6	0.186	22.28	-31.92	54.20	11.60	0.33	10.35	Average
7	0.200	34.20	-29.42	63.62	23.60	0.27	10.33	QP
8	0.200	24.40	-29.22	53.62	13.80	0.27	10.33	Average
9	0.449	36.06	-20.83	56.89	25.60	0.27	10.19	QP
10 *	0.449	35.16	-11.73	46.89	24.70	0.27	10.19	Average
11	0.474	34.36	-22.09	56.45	23.90	0.27	10.19	QP
12	0.474	33.56	-12.89	46.45	23.10	0.27	10.19	Average



Test Mode :	Mode 3	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN (5G) Idle + Earphone + USB Cable 3(Data Link with Notebook) + Battery + GPS Rx		

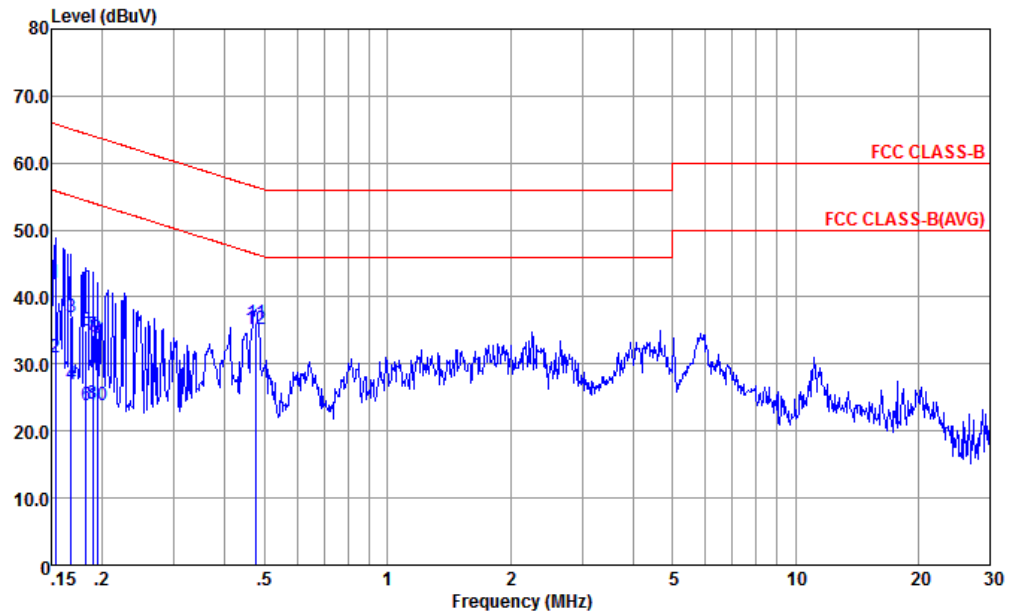

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-161017-060103 NEUTRAL
 Project : (FC) 761702-01
 mode : Mode 3
 : 356484080025725 #5

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	42.03	-23.79	65.82	31.30	0.34	10.39	QP
2	0.153	31.03	-24.79	55.82	20.30	0.34	10.39	Average
3	0.168	37.01	-28.07	65.08	26.30	0.34	10.37	QP
4	0.168	26.91	-28.17	55.08	16.20	0.34	10.37	Average
5	0.182	34.99	-29.38	64.37	24.31	0.33	10.35	QP
6	0.182	23.89	-30.48	54.37	13.21	0.33	10.35	Average
7	0.189	34.28	-29.78	64.06	23.61	0.33	10.34	QP
8	0.189	23.98	-30.08	54.06	13.31	0.33	10.34	Average
9	0.194	33.97	-29.87	63.84	23.30	0.33	10.34	QP
10	0.194	23.87	-29.97	53.84	13.20	0.33	10.34	Average
11	0.476	36.17	-20.24	56.41	25.60	0.38	10.19	QP
12 *	0.476	35.17	-11.24	46.41	24.60	0.38	10.19	Average

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

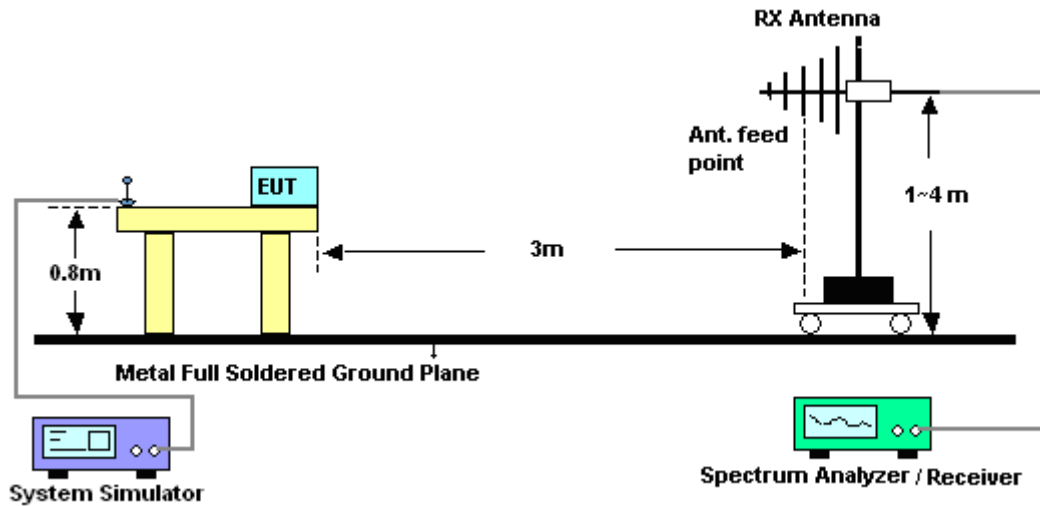


For radiated emissions above 1GHz

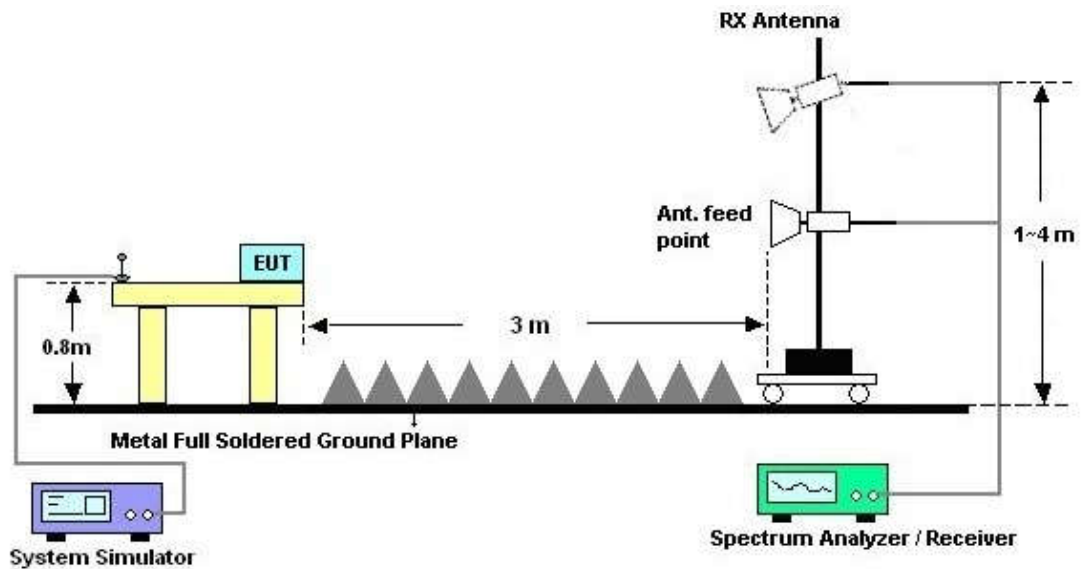



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Wenjia Gao	Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1(Data Link with Notebook) + Battery + GPS Rx		
Remark :	#7 is system simulator signal which can be ignored.		

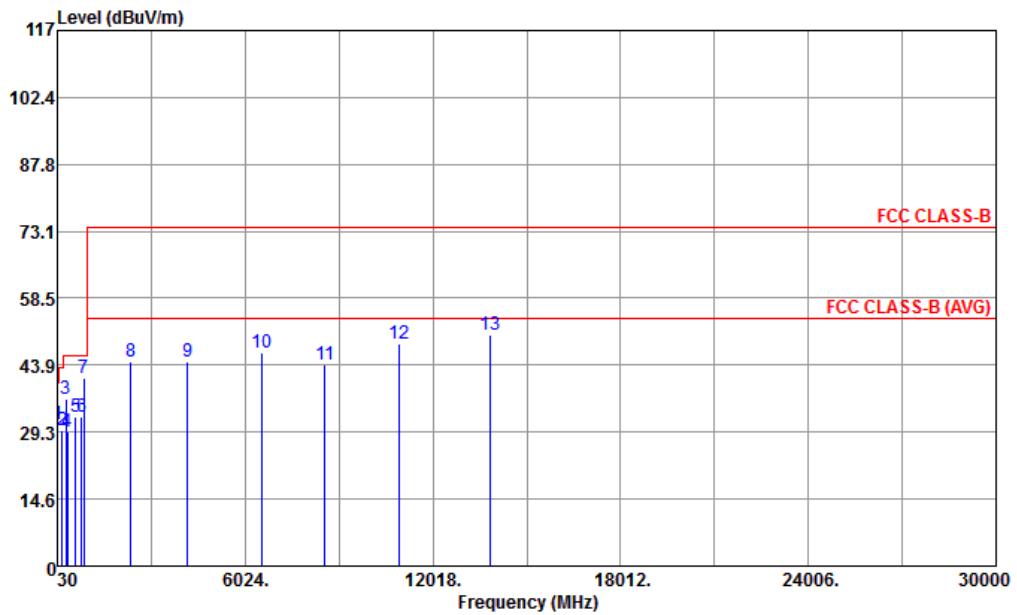

Condition : FCC CLASS-B 3m LF_ANT41909_6 HORIZONTAL


Mode : Mode 1

IMEI : 356484080025840

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor			
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	40.53	31.01	-8.99	40.00	42.92	19.64	0.42	31.97	100	150 Peak
2	173.64	29.68	-13.82	43.50	43.12	16.64	1.37	31.45	---	---
3	298.92	36.60	-9.40	46.00	46.50	19.47	1.85	31.22	---	---
4	359.50	29.44	-16.56	46.00	38.24	20.30	2.11	31.21	---	---
5	622.00	32.51	-13.49	46.00	35.97	25.04	2.75	31.25	---	---
6	797.70	32.65	-13.35	46.00	33.62	27.04	3.15	31.16	---	---
7	881.70	40.91			40.56	28.18	3.34	31.17	---	---
8	2382.00	44.78	-29.22	74.00	68.63	27.37	5.59	56.81	---	---
9	4178.00	44.73	-29.27	74.00	64.83	30.19	7.19	57.48	---	---
10	6580.00	46.66	-27.34	74.00	60.99	34.16	8.88	57.37	---	---
11	8574.00	43.83	-30.17	74.00	51.76	37.27	9.63	54.83	---	---
12	10950.00	48.52	-25.48	74.00	53.58	39.70	10.94	55.70	---	---
13	13853.00	50.48	-23.52	74.00	54.55	41.28	12.39	57.74	100	150 Peak



Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Wenjia Gao	Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1(Data Link with Notebook) + Battery + GPS Rx		
Remark :	#7 is system simulator signal which can be ignored.		

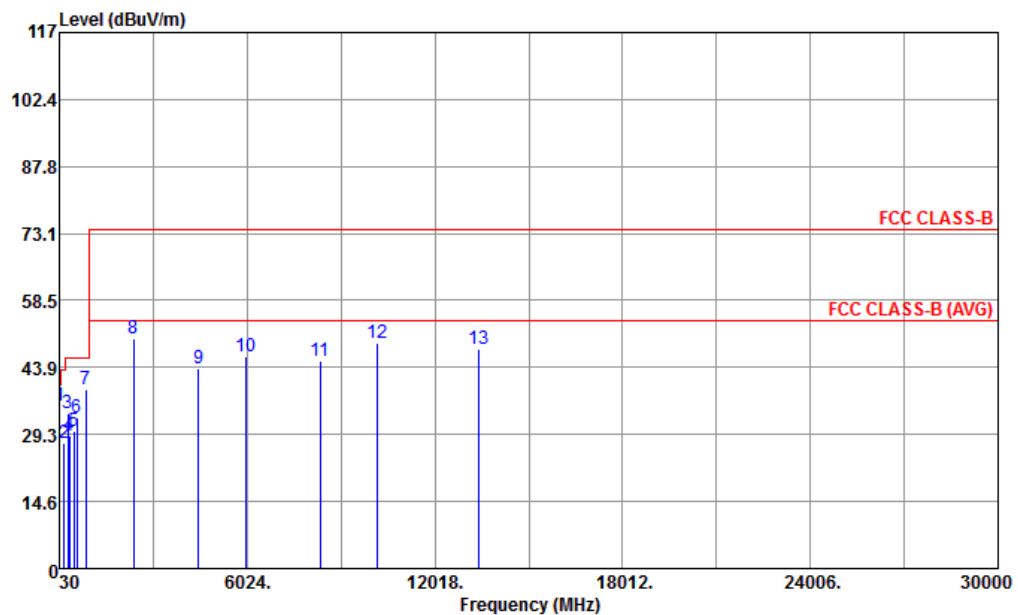

Condition : FCC CLASS-B 3m LF_ANT41909_6 VERTICAL

Mode : Mode 1
IMFI : 356484080025840

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	40.53	35.54	-4.46	40.00	47.45	19.64	0.42	31.97	100	250 Peak
2	173.37	27.44	-16.06	43.50	40.88	16.64	1.37	31.45	---	---
3	298.92	33.81	-12.19	46.00	43.71	19.47	1.85	31.22	---	---
4	359.50	28.86	-17.14	46.00	37.66	20.30	2.11	31.21	---	---
5	498.10	30.05	-15.95	46.00	35.81	23.04	2.43	31.23	---	---
6	599.60	33.06	-12.94	46.00	36.64	24.99	2.70	31.27	---	---
7	881.70	39.26			38.91	28.18	3.34	31.17	---	---
8	2396.00	50.05	-23.95	74.00	73.77	27.43	5.64	56.79	100	250 Peak
9	4476.00	43.82	-30.18	74.00	63.12	30.65	7.45	57.40	---	---
10	5988.00	46.24	-27.76	74.00	61.08	33.07	8.47	56.38	---	---
11	8348.00	45.41	-28.59	74.00	53.79	37.23	9.45	55.06	---	---
12	10160.00	49.22	-24.78	74.00	56.57	38.53	10.40	56.28	---	---
13	13415.00	47.97	-26.03	74.00	52.72	40.14	12.21	57.10	---	---



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	Jul. 06, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Jul. 06, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Jul. 06, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jul. 06, 2017	Oct. 12, 2017	Conduction (CO01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 20, 2017	Jul. 11, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 20, 2017	Jul. 11, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 14, 2017	Jul. 11, 2017	May 13, 2018	Radiation (03CH03-SZ)
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1285	1GHz~18GHz	Jan. 12, 2017	Jul. 11, 2017	Jan. 11, 2018	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 10, 2016	Jul. 11, 2017	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 11, 2016	Jul. 11, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 11, 2016	Jul. 11, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 16, 2016	Jul. 11, 2017	Jul. 15, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Jul. 11, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 11, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 11, 2017	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.3dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------