



# FCC Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2019-1  
**FCC ID** : IHDT56YG1  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Jun. 26, 2019 and testing was completed on Aug. 09, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 7

    1.7. Applicable Standards ..... 7

    1.8. Specification of Accessory ..... 8

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 12

    2.4. EUT Operation Test Setup ..... 13

**3. TEST RESULT ..... 14**

    3.1. Test of AC Conducted Emission Measurement ..... 14

    3.2. Test of Radiated Emission Measurement ..... 18

**4. LIST OF MEASURING EQUIPMENT ..... 23**

**5. UNCERTAINTY OF EVALUATION ..... 24**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.59 dB at 0.199 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 7.17 dB at 41.640 MHz



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2019-1
FCC ID	IHDT56YG1
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR/ LE FM Receiver and GNSS
IMEI Code	Conduction: 357209100010079/357209100010087 Radiation: 357209100018478/357209100018486
HW Version	DVT2
SW Version	PPI29.35
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, sample 1 is dual SIM card, sample 2 is single SIM card, all the others are the same. We choice the sample 1 to full test.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz NFC : 13.56 MHz FM : 87.5MHz ~ 108MHz
<b>Antenna Type</b>	WWAN : Fixed Internal Antenna WLAN 2.4GHz : Loop Antenna WLAN 5GHz : PIFA Antenna Bluetooth : Loop Antenna GNSS: Loop Antenna FM : External Headset Antenna NFC: FPC Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK



	WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : π/4-DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM
--	---

GNSS Rx = Galileo Rx + Glonass Rx + GPS Rx

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS	CN1257	314309

### 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



### 1.8. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Salom)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(EU)	Brand Name	Motorola (Salom)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(BR)	Brand Name	Motorola (Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(Chile)	Brand Name	Motorola (Salom)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(AR)	Brand Name	Motorola (Salom)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1 (UK)	Brand Name	Motorola (Salom)	Model Name	SC-53
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1 (AU)	Brand Name	Motorola (Salom)	Model Name	SC-55
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	SC-53
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(AU)	Brand Name	Motorola(Chenyang)	Model Name	SC-55
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3(BR)	Brand Name	Motorola(Cliptech/Tenpao)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 4(BR)	Brand Name	Motorola(Flex/Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 0.6A, 50/60Hz; O/P: 5/9/12Vdc, 3000/2000/1500mA		
Battery	Brand Name	Motorola (Sunwoda)	Model Name	KD40
	Power Rating	3.8Vdc,4000mAh	Type	Li-ion
Earphone 1	Brand Name	Motorola (Lianyun)	Model Name	SH38C37773
	Signal Line Type	1.1 meter, non-shielded cable, with w/o ferrite core		
Earphone 2	Brand Name	Motorola (Cosonic)	Model Name	SH38C44959
	Signal Line Type	1.1 meter, non-shielded cable, with w/o ferrite core		
Earphone 3	Brand Name	Motorola (NEW LEADER)	Model Name	NLD-EM303H-10SF
	Signal Line Type	1.2 meter, non-shielded cable, with w/o ferrite core		



USB Cable 1	Brand Name	Motorola (LiQi)	Model Name	L32B-053000100/ L32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (SaiBao)	Model Name	S32B-053000100/ S32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + SIM 1 for Sample 1
	Mode 2: PCS 1900 Rx + Bluetooth Idle + WLAN Idle(5G) + Earphone 2 + Camera(Front) + USB Cable 2(Charging from Adapter 2) + SIM 2 for Sample 1
	Mode 3: WCDMA Band IV Rx + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + MPEG4 + USB Cable 2(Charging from Adapter 2) + SIM 1 for Sample 1
	Mode 4: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN Idle(5G) + Earphone 2 + FM Rx(98MHz) + USB Cable 2(Charging from Adapter 2) + SIM 2 for Sample 1
	Mode 5: LTE Band 4 Rx + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + NFC On + USB Cable 2(Charging from Adapter 2) + SIM 1 for Sample 1
	Mode 6: LTE Band 7 Rx + Bluetooth Idle + WLAN Idle(5G) + Earphone 2 + GNSS Rx + USB Cable 1(Data Link with Notebook) + SIM 2 for Sample 1
	Mode 7: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 2 + GNSS Rx + USB Cable 2(Data Link with Notebook) + SIM 2 for Sample 1



Radiated Emissions	<p>Mode 1 : GSM 850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + SIM 1 for Sample 1</p> <p>Mode 2: PCS 1900 Rx + Bluetooth Idle + WLAN Idle(5G) + Earphone 2 + Camera(Front) + USB Cable 2(Charging from Adapter 2) + SIM 2 for Sample 1</p> <p>Mode 3: WCDMA Band IV Rx + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + MPEG4 + USB Cable 1(Charging from Adapter 1) + SIM 1 for Sample 1</p> <p>Mode 4: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN Idle(5G) + Earphone 1 + FM Rx(98MHz) + USB Cable 1(Charging from Adapter 1) + SIM 2 for Sample 1</p> <p>Mode 5: LTE Band 4 Rx + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + NFC On + USB Cable 1(Charging from Adapter 1) + SIM 1 for Sample 1</p> <p>Mode 6: LTE Band 7 Rx + Bluetooth Idle + WLAN Idle(5G) + Earphone 1 + GNSS Rx + USB Cable 1(Data Link with Notebook) + SIM 2 for Sample 1</p> <p>Mode 7: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + GNSS Rx + USB Cable 2(Data Link with Notebook) + SIM 1 for Sample 1</p>
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. The worst case of AC is mode 3; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 6; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook means data application transferred mode between EUT and Notebook.</li> <li>4. Pre-scanned Low/Middle/High channel for GSM850/WCDMA Band V/LTE Band 5/26, FM Rx. The worst channel was recorded in this report.</li> </ol>	

## 2.2. Connection Diagram of Test System

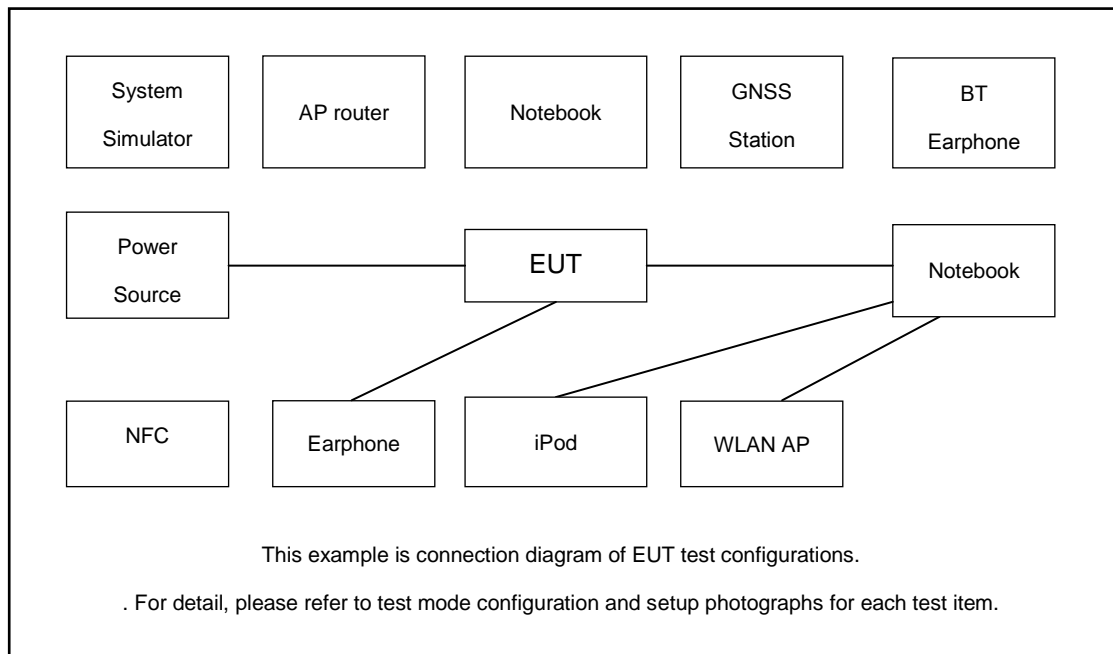

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded, 1.8m
3.	Signal generator	R&S	SMBV100A	N/A	N/A	Unshielded, 1.8m
4.	WLAN AP	ASUS	AC66U	N/A	N/A	Unshielded, 1.8m
5.	WLAN AP	D-Link	DIR-618	N/A	N/A	Unshielded, 1.8m
6.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded, 1.8m
7.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
8.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
9.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	Notebook	DELL	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
11.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Uitra	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC Function.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

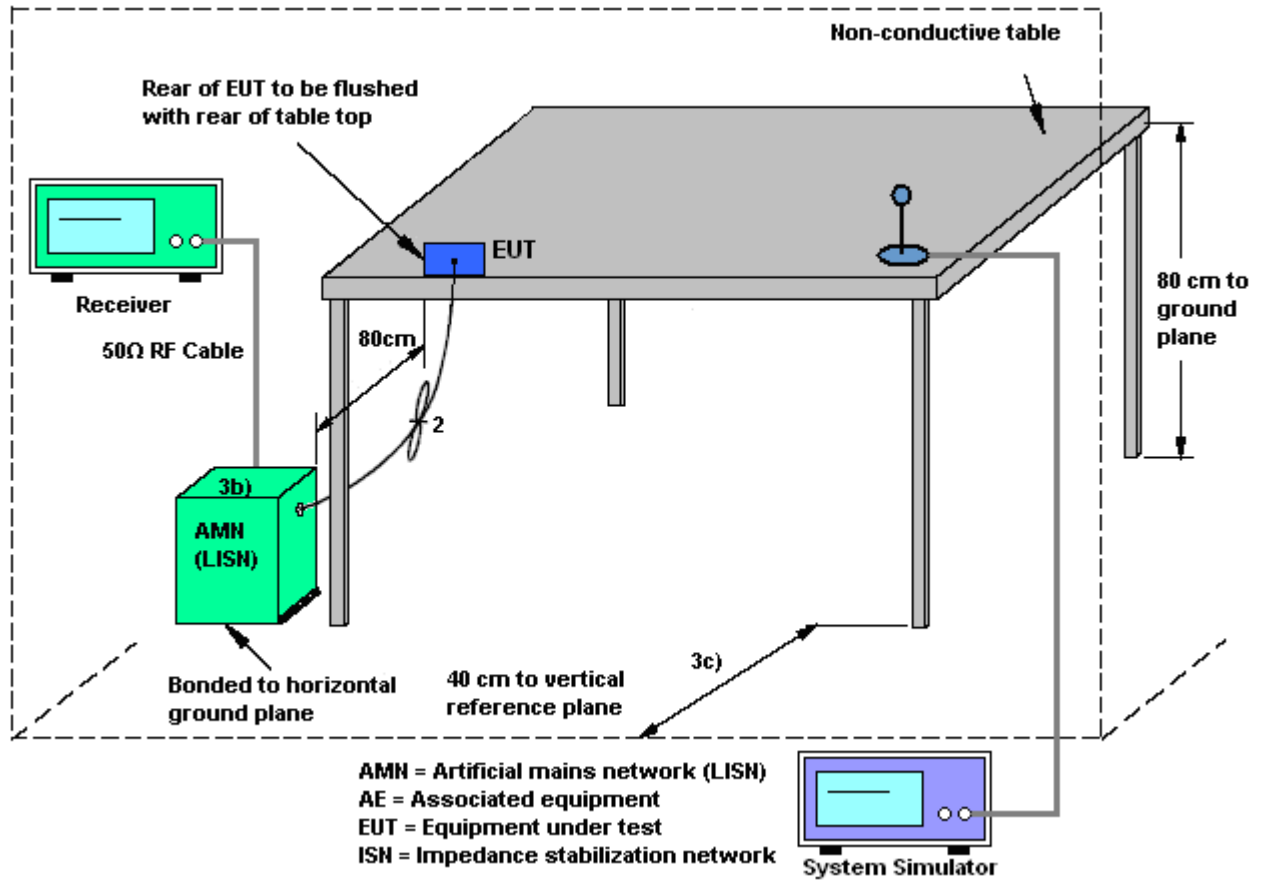




3.1.5 Test Result of AC Conducted Emission

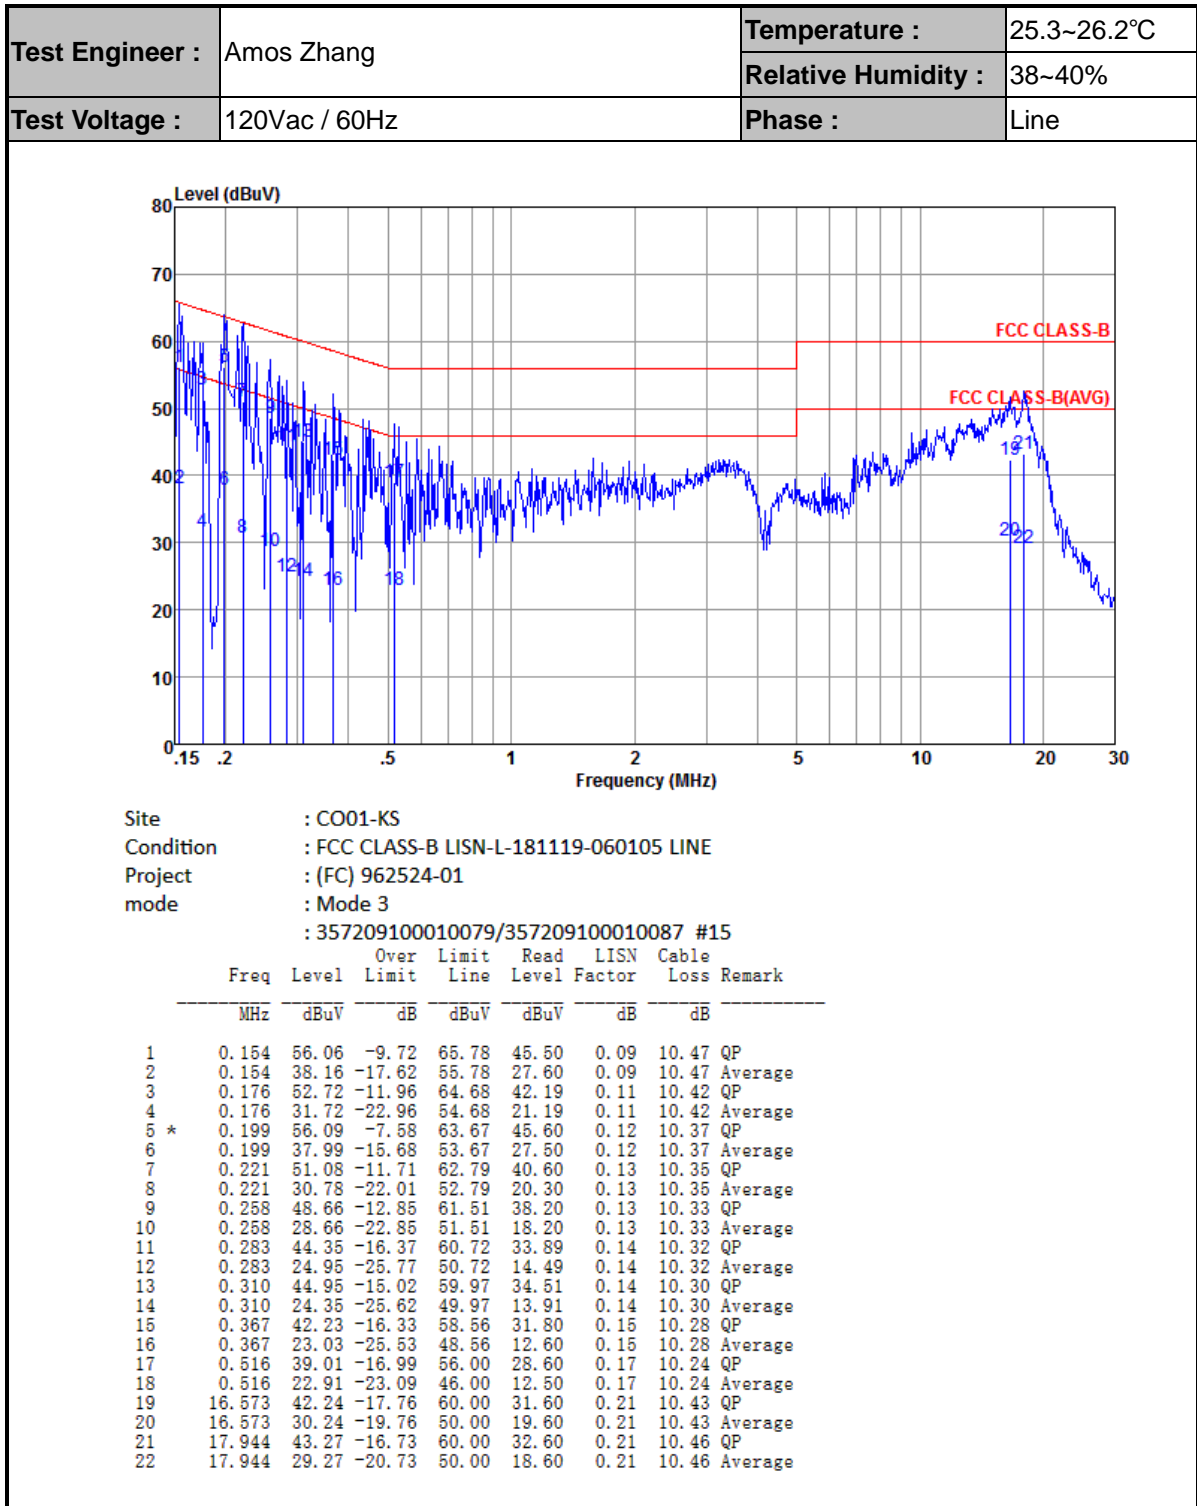



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

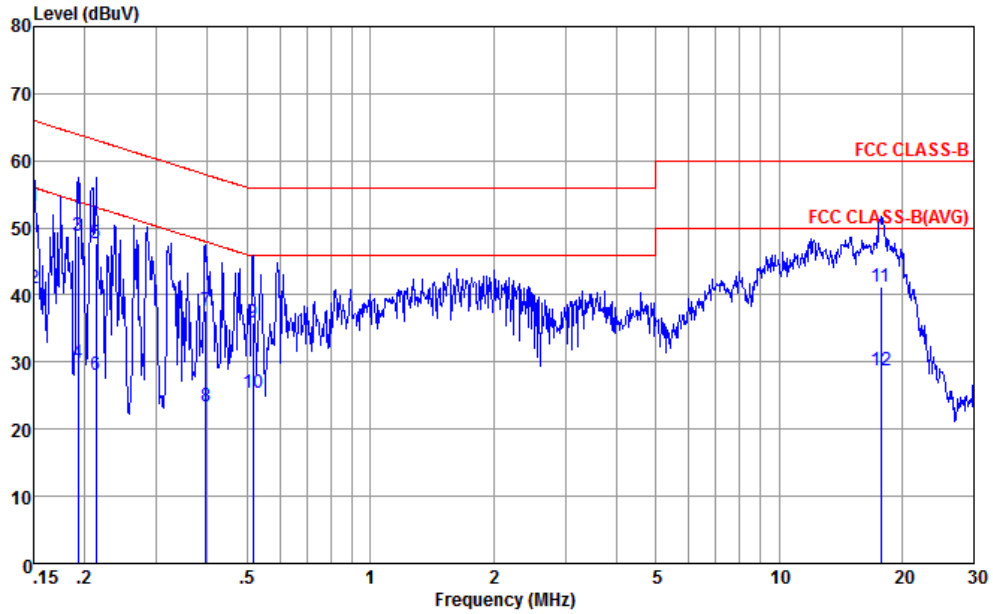

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-181119-060105 NEUTRAL  
 Project : (FC) 962524-01  
 mode : Mode 3  
 : 357209100010079/357209100010087 #15

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.150	53.16	-12.84	66.00	42.50	0.18	10.48	QP
2	0.150	40.96	-15.04	56.00	30.30	0.18	10.48	Average
3	0.192	48.75	-15.18	63.93	38.20	0.17	10.38	QP
4	0.192	29.75	-24.18	53.93	19.20	0.17	10.38	Average
5	0.213	47.73	-15.37	63.10	37.20	0.17	10.36	QP
6	0.213	28.03	-25.07	53.10	17.50	0.17	10.36	Average
7	0.396	37.62	-20.33	57.95	27.20	0.15	10.27	QP
8	0.396	23.32	-24.63	47.95	12.90	0.15	10.27	Average
9	0.516	35.98	-20.02	56.00	25.59	0.15	10.24	QP
10	0.516	25.48	-20.52	46.00	15.09	0.15	10.24	Average
11	17.755	41.17	-18.83	60.00	30.61	0.11	10.45	QP
12	17.755	28.77	-21.23	50.00	18.21	0.11	10.45	Average



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

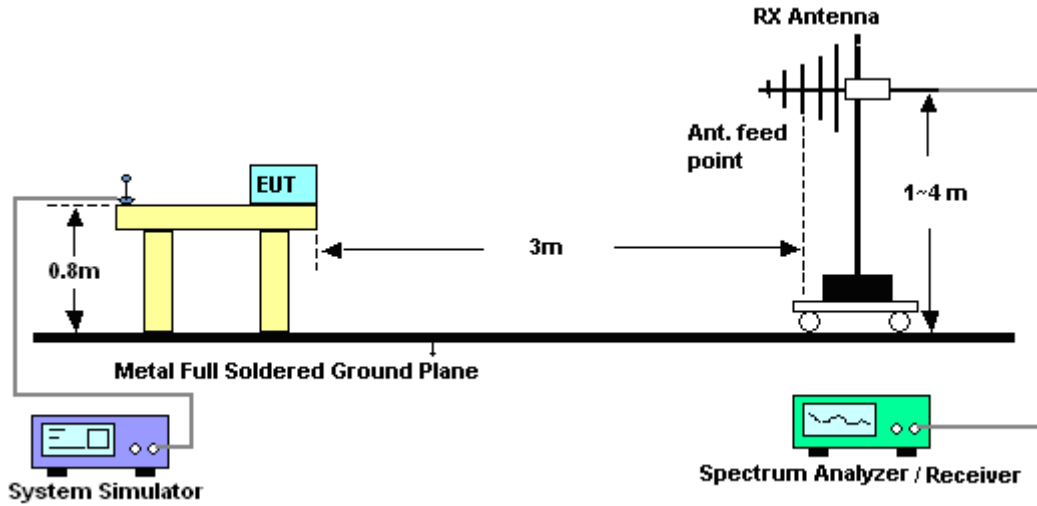


For radiated emissions above 1GHz

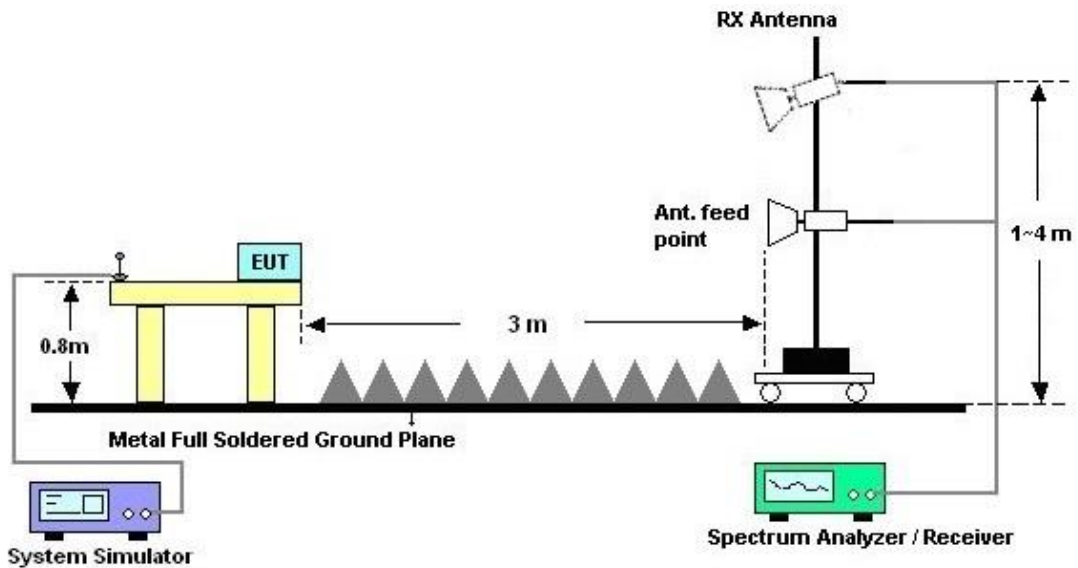



3.2.5. Test Result of Radiated Emission

Test Engineer :	Carl Ni	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

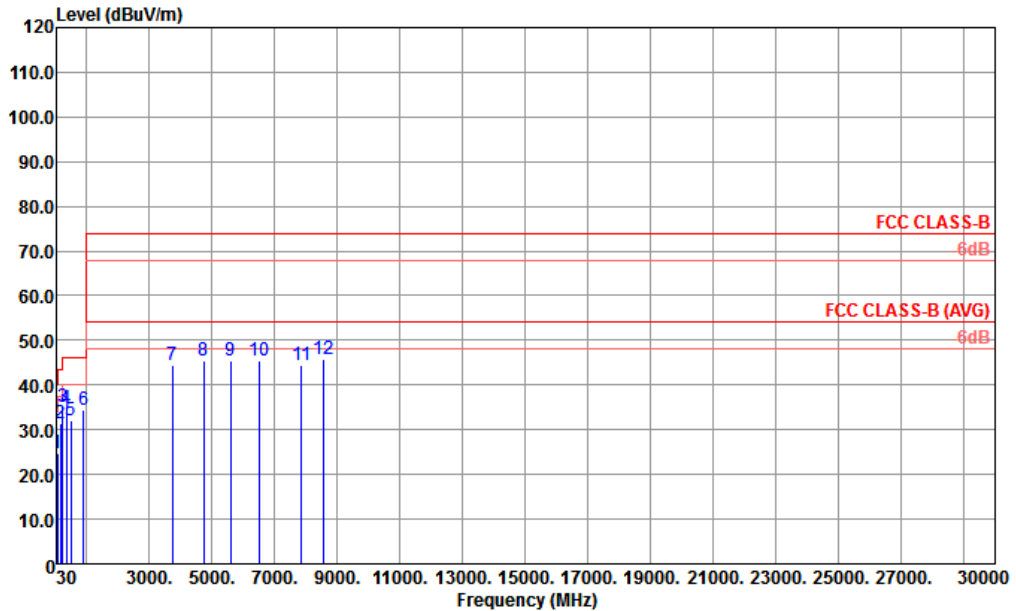


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 49922-3M HORIZONTAL  
 Project : (FC962524-01)  
 Mode : 6  
 IMEI : 357209100018478 357209100018486 #28

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	63.95	24.84	-15.16	40.00	43.60	12.22	0.95	31.93	---	---	Peak
2	157.07	31.53	-11.97	43.50	45.08	16.91	1.47	31.93	---	---	Peak
3	239.52	34.94	-11.06	46.00	47.13	17.94	1.82	31.95	100	0	Peak
4	345.25	34.68	-11.32	46.00	44.18	20.48	2.09	32.07	---	---	Peak
5	497.54	31.93	-14.07	46.00	37.60	24.04	2.55	32.26	---	---	Peak
6	895.24	34.58	-11.42	46.00	33.43	29.21	3.44	31.50	---	---	Peak
7	3744.00	44.42	-29.58	74.00	35.74	33.50	7.17	31.99	---	---	Peak
8	4744.00	45.49	-28.51	74.00	35.27	33.63	8.05	31.46	---	---	Peak
9	5584.00	45.32	-28.68	74.00	32.77	34.64	8.92	31.01	---	---	Peak
10	6520.00	45.54	-28.46	74.00	32.31	35.22	9.62	31.61	---	---	Peak
11	7864.00	44.55	-29.45	74.00	29.56	36.13	10.89	32.03	---	---	Peak
12	8560.00	45.68	-28.32	74.00	29.74	36.46	11.36	31.88	---	---	Peak



Test Engineer :	Carl Ni	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

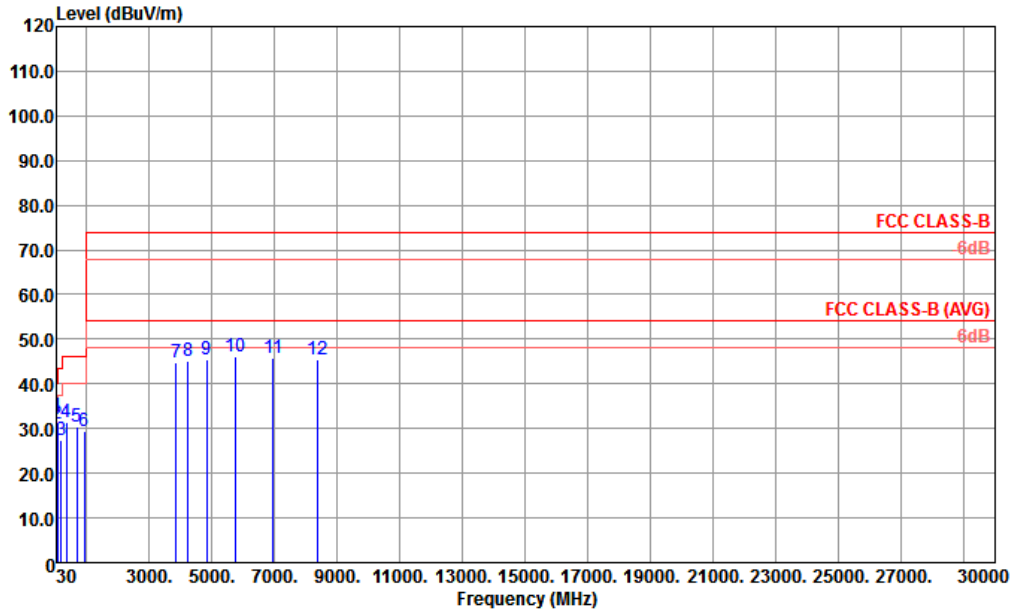

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 49922-3M VERTICAL  
 Project : (FC962524-01)  
 Mode : 6  
 IMEI : 357209100018478 357209100018486 #28

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	41.64	32.83	-7.17	40.00	45.44	18.62	0.72	31.95	100	0	Peak
2	70.74	31.02	-8.98	40.00	49.25	12.72	0.97	31.92	---	---	Peak
3	195.87	27.34	-16.16	43.50	42.36	15.26	1.62	31.90	---	---	Peak
4	345.25	31.44	-14.56	46.00	40.94	20.48	2.09	32.07	---	---	Peak
5	674.08	30.50	-15.50	46.00	33.23	26.65	2.97	32.35	---	---	Peak
6	935.01	29.47	-16.53	46.00	26.68	30.40	3.52	31.13	---	---	Peak
7	3848.00	44.76	-29.24	74.00	35.82	33.65	7.29	32.00	---	---	Peak
8	4240.00	45.21	-28.79	74.00	35.67	33.72	7.69	31.87	---	---	Peak
9	4840.00	45.62	-28.38	74.00	35.12	33.73	8.14	31.37	---	---	Peak
10	5768.00	46.17	-27.83	74.00	33.64	34.81	8.97	31.25	---	---	Peak
11	6960.00	45.89	-28.11	74.00	31.92	35.30	9.95	31.28	---	---	Peak
12	8384.00	45.51	-28.49	74.00	30.04	36.40	11.04	31.97	---	---	Peak



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Aug .06, 2019	Aug. 08, 2019	Aug. 05, 2020	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44G,MAX 30dB	Apr. 15, 2019	Aug. 08, 2019	Apr. 16, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-2GHz	Dec. 29, 2018	Aug. 08, 2019	Dec. 28, 2019	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 27, 2019	Aug. 08, 2019	Jan. 26, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Aug. 08, 2019	Jan. 04, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Jan. 14, 2019	Aug. 08, 2019	Jan. 13, 2020	Radiation (03CH02-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 19, 2018	Aug. 08, 2019	Nov. 18, 2019	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 15, 2019	Aug. 08, 2019	Apr. 14, 2020	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 08, 2019	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 08, 2019	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 08, 2019	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2019	Aug. 09, 2019	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Aug. 09, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Aug. 09, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Aug. 09, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------