



# **HEARING AID COMPATIBILITY T-COIL PARTIAL TEST REPORT**

**FCC ID : IHDT56ZD4**  
**Equipment : Mobile Cellular Phone**  
**Brand Name : Motorola**  
**Model Name : XT2093-3, XT2093DL, XT2093-4, XT2093-2, XT2093-2PP**  
**T-Rating : T3**  
**Applicant : Motorola Mobility LLC**  
**222 W,Merchandise Mart Plaza, Chicago IL 60654 USA**  
**Manufacturer : Motorola Mobility LLC**  
**222 W,Merchandise Mart Plaza, Chicago IL 60654 USA**  
**Standard : FCC 47 CFR §20.19**  
**ANSI C63.19-2011**

The product was received on Aug. 07, 2020 and testing was started from Aug. 22, 2020 and completed on Sep. 07, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Rose Wang

Reviewed by: Rose Wang / Supervisor

Kat Yin

Approved by: Kat Yin / Manager



**Sporton International (Kunshan) Inc.**  
**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300**  
**People's Republic of China**



**Table of Contents**

**1. Attestation of Test Results ..... 5**  
**2. General Information ..... 6**  
**3. Testing Location..... 7**  
**4. Applied Standards ..... 7**  
**5. Air Interface and Operating Mode..... 8**  
**6. Measurement standards for T-Coil ..... 9**  
    6.1 Frequency Response ..... 9  
    6.2 T-Coil Signal Quality Categories..... 9  
**7. T-Coil Test Procedure .....10**  
    7.1 Test Flow Chart.....11  
    7.2 Test Setup Diagram .....12  
    7.3 Description of EUT Test Position .....14  
**8. Test Equipment List .....15**  
**9. T-Coil testing for CMRS Voice.....16**  
    9.1 GSM Tests Results .....16  
    9.2 UMTS Tests Results .....17  
    9.3 CDMA Tests Results .....18  
**10. T-Coil testing for CMRS IP Voice .....19**  
    10.1 VoLTE Tests Results.....19  
    10.2 VoWiFi Tests Results.....23  
**11. Uncertainty Assessment .....25**  
**12. References.....26**

**Appendix A. Plots of T-Coil Measurement**  
**Appendix B. DASy Calibration Certificate**  
**Appendix C. Test Setup Photos**



### History of this test report

Report No.	Version	Description	Issued Date
HA080709B	Rev. 01	Initial issue of report	Sep. 21, 2020



**1. Attestation of Test Results**

Air Interface	Band MHz	T-Rating	Frequency Response	Magnetic Intensity
GSM CMRS Voice	GSM850	T3	Pass	Pass
	GSM1900	T3	Pass	Pass
UMTS CMRS Voice	Band 2	T4	Pass	Pass
	Band 4	T4	Pass	Pass
	Band 5	T4	Pass	Pass
CDMA CMRS Voice	BC0	T4	Pass	Pass
	BC10	T4	Pass	Pass
	BC1	T4	Pass	Pass
VoLTE	Band 2	T4	Pass	Pass
	Band 4	T4	Pass	Pass
	Band 5	T4	Pass	Pass
	Band 7	T4	Pass	Pass
	Band 12	T4	Pass	Pass
	Band 13	T4	Pass	Pass
	Band 17	T4	Pass	Pass
	Band 25	T4	Pass	Pass
	Band 26	T4	Pass	Pass
	Band 66	T4	Pass	Pass
	Band 71	T4	Pass	Pass
	Band 38	T4	Pass	Pass
VoWiFi	2450	T4	Pass	Pass
	5200	T4	Pass	Pass
	5300	T4	Pass	Pass
	5500	T4	Pass	Pass
	5800	T4	Pass	Pass
Date Tested	2020/8/22 ~ 2020/9/7			

1. The device is compliance with HAC limits specified in guidelines FCC 47CFR §20.19 and ANSI Standard ANSI C63.19.
2. This is **partial** report for CMRS voice T-Coil testing . VOIP testing is performed by Sporton International Inc with Report No. HA080625(FCC ID: IHDT56ZD4)



**2. General Information**

Product Feature & Specification	
Applicant Name	Motorola Mobility LLC
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2093-3, XT2093DL, XT2093-4, XT2093-2, XT2093-2PP
IMEI Code	355567110009916
FCC ID	IHDT56ZD4
HW	DVT2
SW	QZA30.32
EUT Stage	Identical Prototype
Frequency Band	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS AMR / RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) CDMA2000 : 1xRTT/1xEv-Do(Rel.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE



### **3. Testing Location**

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

### **4. Applied Standards**

- FCC CFR47 Part 20.19
- ANSI C63.19 2011-version
- FCC KDB 285076 D01 HAC Guidance v05
- FCC KDB 285076 D02 T Coil testing v03
- FCC KDB 285076 D03 HAC FAQ v01



**5. Air Interface and Operating Mode**

Air Interface	Band MHz	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
GSM	GSM850	VO	Yes	WLAN, BT	CMRS Voice	No
	GSM1900			WLAN, BT		No
	EDGE850	VD	Yes	WLAN, BT	Google Duo <sup>(1)</sup>	No
	EDGE1900					
UMTS	850	VO	Yes	WLAN, BT	CMRS Voice	No
	1750			WLAN, BT		No
	1900			WLAN, BT		No
	HSPA	VD	Yes	WLAN, BT	Google Duo <sup>(1)</sup>	No
CDMA	BC0	VO	Yes	WLAN, BT	CMRS Voice	No
	BC1			WLAN, BT		No
	BC10			WLAN, BT		No
	EVDO	VD	Yes	WLAN, BT	Google Duo <sup>(1)</sup>	No
LTE (FDD)	Band 2	VD	Yes	WLAN, BT	VoLTE / Google Duo <sup>(1)</sup>	No
	Band 4			WLAN, BT		No
	Band 5			WLAN, BT		No
	Band 7			WLAN, BT		No
	Band 12			WLAN, BT		No
	Band 13			WLAN, BT		No
	Band 17			WLAN, BT		No
	Band 25			WLAN, BT		No
	Band 26			WLAN, BT		No
	Band 66			WLAN, BT		No
Band 71	WLAN, BT	No				
LTE (TDD)	Band 38	VD	Yes	WLAN, BT	VoLTE / Google Duo <sup>(1)</sup>	No
	Band 41			WLAN, BT		No
Wi-Fi	2450	VD	Yes	GSM,CDMA,WCDMA,LTE	VoWiFi <sup>(1)</sup> / Google Duo <sup>(1)</sup>	No
	5200					No
	5300					No
	5500					No
	5800					No
BT	2450	DT	No	GSM,CDMA,WCDMA,LTE	NA	No

**Type Transport:**  
 VO= Voice only  
 DT= Digital Transport only (no voice)  
 VD= CMRS and IP Voice Service over Digital Transport


**Remark:**  
 1. For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 should be used.  
 2. This is partial report for CMRS voice T-Coil testing . VOIP testing is performed by Sporton International Inc with Report No. HA080625(FCC ID: IHDT56ZD4).

## 6. Measurement standards for T-Coil

### 6.1 Frequency Response


The frequency response of the perpendicular component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz.

Figure 1.1 and Figure 1.2 provide the boundaries as a function of frequency. These response curves are for true field-strength measurements of the T-Coil signal. Thus, the 6 dB/octave probe response has been corrected from the raw readings.

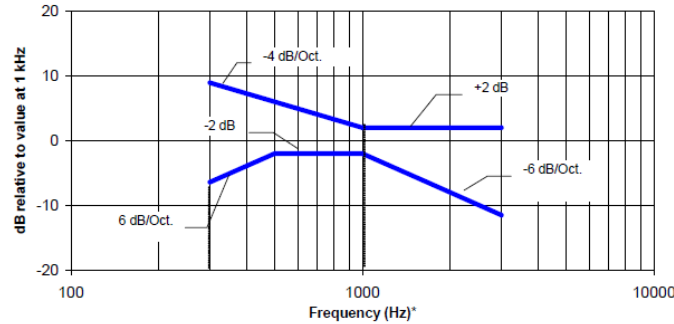

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Fig. 1.1 Magnetic field frequency response for WDs with field strength  $\leq -15$  dB at 1 kHz**

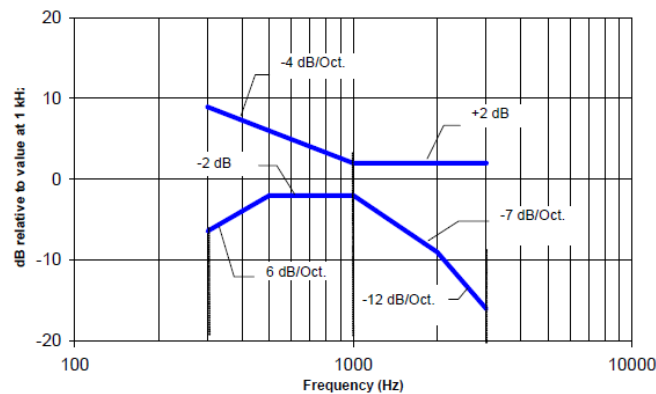

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Fig. 1.2 Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 6.2 T-Coil Signal Quality Categories

This section provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. A device is assessed beginning by determining the category of the RF environment in the area of the T-Coil source.

The RF measurements made for the T-Coil evaluation are used to assign the category T1 through T4. The limitation is given in Table 1. This establishes the RF environment presented by the WD to a hearing aid.

Category	Telephone parameters WD signal quality ((signal + noise) to noise ratio in dB)
Category T1	0 to 10 dB
Category T2	10 to 20 dB
Category T3	20 to 30 dB
Category T4	> 30 dB

**Table 1 T-Coil Signal Quality Categories**



## **7. T-Coil Test Procedure**

Referenced to ANSI C63.19-2011, Section 7.4,

This section describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. To assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for each measurement position. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.


Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load, there might still be RF leakage from the WD, which can interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be performed with the WD operating on battery power with an appropriate normal speech audio signal input level given in ANSI C63.19-2011 Table 7.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well,

Measurement shall be performed at two locations specified in ANSI C63.19-2011 A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage.

The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.


- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in ANSI C63.19-2011 clause 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in ANSI C63.19-2011 Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in ANSI C63.19-2011 clause 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used. The same drive level shall be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in ANSI C63.19-2011 clause 7.4.4.1.1 and 7.4.4.2.
- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in ANSI C63.19-2011 clause 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.
- f. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)
- g. All Measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in ANSI C63.19-2011 clause 7.3.1.
- h. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in ANSI C63.19-2011 clause 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- i. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on ANSI C63.19-2011 Table 8.5.

**7.1 Test Flow Chart**

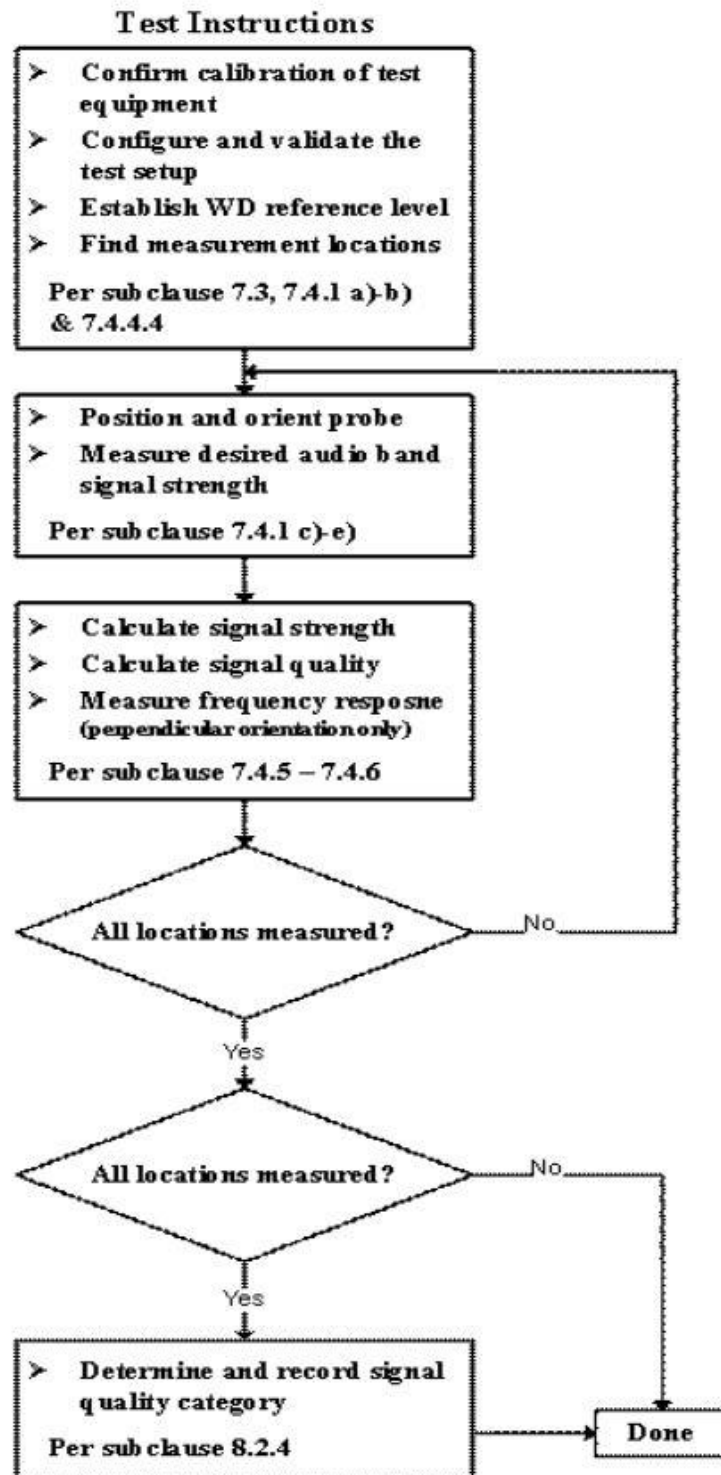

**Fig. 2 T-Coil Signal Test flowchart**

**7.2 Test Setup Diagram**

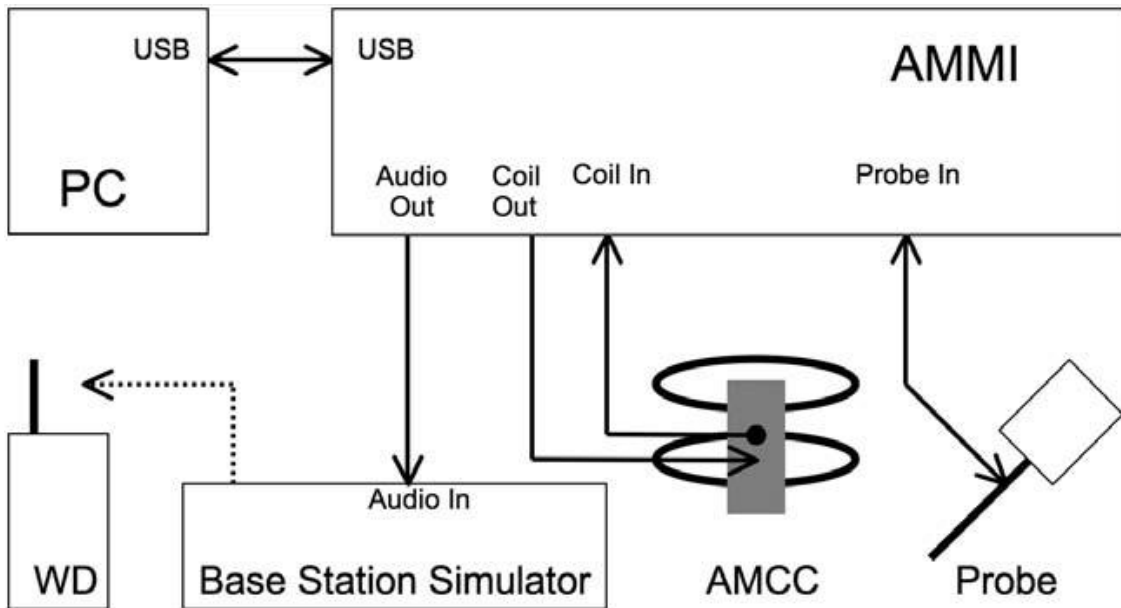

**General Note:**

1. Define the all applicable input audio level as below according to C63 and KDB 285076 D02v03:
  - GSM input level: -16dBm0
  - UMTS input level: -16dBm0
  - CDMA input level: -18dBm0
  - VoLTE input level: -16dBm0
2. For GSM / UMTS / CDMA test setup and input level, the correct input level definition is via a communication tester CMU200's "Decoder Cal" and "Codec Cal" with audio option B52 and B85 to set the correct audio input levels.
3. CMU200 is able to output 1kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal." configuration, the signal reference is used to adjust the AMMI gain setting to reach -16dBm0 for GSM/UMTS and -18dBm0 for CDMA. CMW500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined
4. The test setup used for VoLTE over IMS is via the callbox of CMW500 for T-coil measurement, The data application unit of the CMW500 was used to simulate the IP multimedia subsystem server. The CMW500 can be manually configured to ensure and control the speech input level result is -16dBm0 for VoLTE when the device during the IMS connection.



1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal
2. The below calculation formula is an example and showing how to determine the input level for the device.

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to-RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine	---	3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

(\*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

Calculation formula:


- Audio Level at -16dBm0 = ((-16dBm0) – (3.14dBm0)) + X dBv
- Calculated Gain at -16dBm0 = 10(( audio level at -16dBm0 – Y dBm0) / 20) \* 10
- Gating setting at -16dBm0 = required gain factor \* calculated gain

Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS)
-	3.14	1.5	-	0.51	-
100	5.73	-	40	3.1	3.25
8.20	-16	-	18.27	-	-18.48
Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	8.20
48k_voice_1kHz	1	16.2	-12.7	4.33	35.49
48k_voice_300-3000	2	21.6	-18.6	8.48	69.50

**7.3 Description of EUT Test Position**

Fig.3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ◆ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user’s ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.

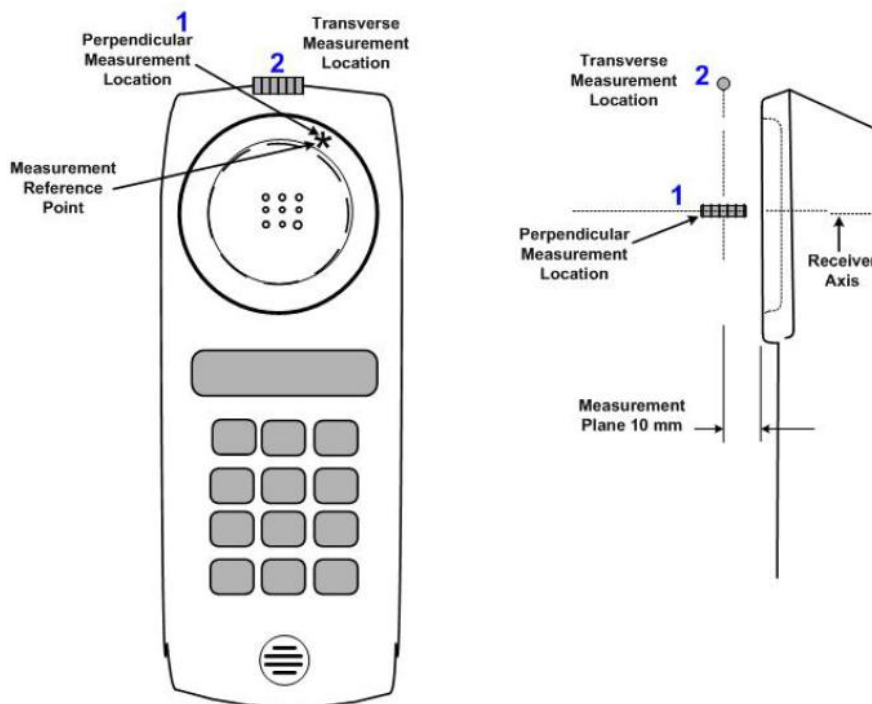

**Fig.3 A typical EUT reference and plane for T-Coil measurements**



**8. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Audio Magnetic 1D Field Probe	AM1DV3	3128	Jun. 18, 2020	Jun. 17, 2021
SPEAG	Data Acquisition Electronics	DAE4	690	Mar. 26, 2020	Mar. 25, 2021
SPEAG	Audio Magnetic Calibration Coil	AMCC	1049	NCR	NCR
SPEAG	Audio Measuring Instrument	AMMI	1041	NCR	NCR
Testo	Hygrometer	608-H1	1241332088	2020/1/8	2021/1/7
R&S	Base Station	CMW500	117336	2020/7/31	2021/7/30
R&S	Base Station	CMU200	143030	2019/10/18	2020/10/17
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR

**Note:**

- 1. NCR: "No-Calibration Required"



**9. T-Coil testing for CMRS Voice**

**General Note:**

1. **Codec Investigation:** For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. **Air Interface Investigation:**
  - a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.
  - b. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

**9.1 GSM Tests Results**

**<Codec Investigation>**

GSM Codec				
Codec	FR_V1	HR_V1	Orientation	Band / Channel
ABM 1 (dBA/m)	-1.89	-29.4	Axial	GSM850 / 189
ABM 2 (dBA/m)	-22.64	-58.69		
Signal Quality (dB)	20.75	29.29		
Freq. Response	PASS	PASS		

Remark: According to codec investigation, the worst codec is FR\_V1

**<Air Interface Investigation>**

Plot No.	Air Interface	Mode	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
1	GSM850	Voice_FR_V1	189	Axial (Z)	-1.45	-22.50	21.05	T3	-55.61	1.07	PASS
				Transversal (Y)	-13.19	-50.81	37.62	T4	-55.78		
2	GSM1900	Voice_FR_V1	661	Axial (Z)	-1.15	-27.04	25.89	T3	-55.54	1.11	PASS
				Transversal (Y)	-12.39	-51.94	39.55	T4	-55.68		

**9.2 UMTS Tests Results**
**<Codec Investigation>**

UMTS Codec					
Codec	AMR 4.75Kbps	AMR 7.95Kbps	AMR 12.2Kbps	Orientation	Band / Channel
ABM 1 (dBA/m)	-2.6	-3.25	-1.84	Axial	Band 5 / 4182
ABM 2 (dBA/m)	-42.16	-43.85	-43.77		
Signal Quality (dB)	39.56	40.6	41.93		
Freq. Response	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is AMR 12.2Kbps

**<Air Interface Investigation>**

Plot No.	Air Interface	Mode	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
3	WCDMA II	Voice_ AMR 4.75Kbps	9400	Axial (Z)	-2.60	-42.16	39.56	T4	-55.91	1.45	PASS
				Transversal (Y)	-11.62	-52.21	40.59	T4	-55.81		
4	WCDMA IV	Voice_ AMR 4.75Kbps	1413	Axial (Z)	-2.18	-44.80	42.62	T4	-55.30	1.36	PASS
				Transversal (Y)	-11.39	-52.78	41.39	T4	-55.69		
5	WCDMA V	Voice_ AMR 4.75Kbps	4182	Axial (Z)	-2.24	-43.59	41.35	T4	-55.61	1.79	PASS
				Transversal (Y)	-11.93	-52.95	41.02	T4	-55.85		



**9.3 CDMA Tests Results**

**<Codec Investigation>**

CDMA Codec					
Codec	RC1 SO68	RC3 SO68	RC4 SO68	Orientation	Band / Channel
ABM 1 (dBA/m)	-1.29	-5.29	-1.52	Axial	BC0 / 384
ABM 2 (dBA/m)	-43.92	-47.84	-44.71		
Signal Quality (dB)	42.63	42.55	43.19		
Freq. Response	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is RC3 SO68.

**<Air Interface Investigation>**

Plot No.	Air Interface	Mode	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
6	CDMA BC0	RC3 SO68	384	Axial (Z)	-5.29	-47.84	42.55	T4	-55.73	0.86	PASS
				Transversal (Y)	-11.76	-53.05	41.29	T4	-55.62		
7	CDMA BC10	RC3 SO68	580	Axial (Z)	-5.26	-47.61	42.35	T4	-55.38	0.33	PASS
				Transversal (Y)	-12.48	-52.85	40.37	T4	-55.75		
8	CDMA BC1	RC3 SO68	600	Axial (Z)	-2.18	-46.62	44.44	T4	-55.61	2.00	PASS
				Transversal (Y)	-10.69	-53.06	42.37	T4	-55.38		



## 10. T-Coil testing for CMRS IP Voice

### 10.1 VoLTE Tests Results

**General Note:**

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
  - a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
  - b. Select LTE FDD / TDD one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration , the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.
  - c. The TDD LTE power class 3 supports uplink-downlink configuration 0 and 6 and power class 2 supports uplink-downlink configuration1 to 5 for this device, an investigation was performed to determine the worst-case uplink-downlink configuration to be used for the testing for the handset.
  - d. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

#### <Codec Investigation>

#### LTE FDD

VoLTE AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	-0.75	-0.29	-0.31	-2.63	Axial	B25 / 20M / 26340
ABM 2 (dBA/m)	-43.55	-41.89	-44.13	-41.36		
Signal Quality (dB)	42.8	41.6	43.82	38.73		
Freq. Response	PASS	PASS	PASS	PASS		

VoLTE EVS Codec								
Codec	EVS SWB 9.6Kbps	EVS SWB 128Kbps	EVS WB 5.9Kbps	EVS WB 128Kbps	EVS NB 5.9Kbps	EVS NB 24.4Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	-0.27	-0.31	-0.39	-0.69	-1.02	-8.6	Axial	B25 / 20M / 26340
ABM 2 (dBA/m)	-42.7	-42.62	-41.64	-40.79	-43.3	-53.36		
Signal Quality (dB)	42.43	42.31	41.25	40.1	42.28	44.76		
Freq. Response	PASS	PASS	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is WB AMR 23.85Kbps



**LTE TDD**

VoLTE AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	-4.73	-5.48	-6.34	-5.22	Axial	B41 / 20M / 40620
ABM 2 (dBA/m)	-36.28	-37.3	-38.53	-37.09		
Signal Quality (dB)	31.55	31.82	32.19	31.87		
Freq. Response	PASS	PASS	PASS	PASS		

VoLTE EVS Codec								
Codec	EVS SWB 9.6Kbps	EVS SWB 128Kbps	EVS WB 5.9Kbps	EVS WB 128Kbps	EVS NB 5.9Kbps	EVS NB 24.4Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	-6.26	-5.59	-5.32	-5	-5.22	-4.85	Axial	B41 / 20M / 40620
ABM 2 (dBA/m)	-38.64	-37.51	-36.94	-35.9	-36.49	-35.93		
Signal Quality (dB)	32.38	31.92	31.62	30.9	31.27	31.08		
Freq. Response	PASS	PASS	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is EVS WB 128Kbps



**<Air Interface Investigation>**

Air Interface		BW (MHz)	Modulation	RB Size	RB offset	Channel	UL-DL Configuration	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB
FDD	LTE B25	20	QPSK	1	0	26340		-11.87	-43.67	31.80
	LTE B25	20	QPSK	50	0	26340		-11.76	-44.56	32.80
	LTE B25	20	QPSK	100	0	26340		-11.85	-44.92	33.07
	LTE B25	20	16QAM	1	0	26340		-11.85	-41.67	29.82
	LTE B25	20	64QAM	1	0	26340		-11.76	-42.08	30.32
	LTE B25	15	16QAM	1	0	26340		-11.83	-42.08	30.25
	LTE B25	10	16QAM	1	0	26340		-11.97	-42.13	30.16
	LTE B25	5	16QAM	1	0	26340		-11.87	-42.97	31.20
	LTE B25	3	16QAM	1	0	26340		-11.81	-42.03	30.22
LTE B25	1.4	16QAM	1	0	26340		-11.84	-41.73	30.19	
TDD	LTE B41_PC3	20	16QAM	1	0	40620	0	-7.39	-38.10	30.71
	LTE B41_PC3	20	16QAM	1	0	40620	1	-7.48	-36.88	29.40
	LTE B41_PC3	20	16QAM	1	0	40620	2	-7.70	-36.04	28.34
	LTE B41_PC3	20	16QAM	1	0	40620	3	-7.48	-38.96	31.48
	LTE B41_PC3	20	16QAM	1	0	40620	4	-7.68	-40.01	32.33
	LTE B41_PC3	20	16QAM	1	0	40620	5	-7.42	-38.88	31.46
	LTE B41_PC3	20	16QAM	1	0	40620	6	-7.32	-39.50	32.18
	LTE B41_PC2	20	16QAM	1	0	40620	1	-7.22	-37.40	30.18
	LTE B41_PC2	20	16QAM	1	0	40620	2	-7.67	-37.92	30.25
	LTE B41_PC2	20	16QAM	1	0	40620	3	-7.39	-38.02	30.63
	LTE B41_PC2	20	16QAM	1	0	40620	4	-7.43	-38.72	31.29
	LTE B41_PC2	20	16QAM	1	0	40620	5	-7.29	-39.52	32.23



Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
9	LTE Band2	20M	16QAM WB AMR 23.85	1RB	0	18900	Axial (Z)	-5.83	-41.50	35.67	T4	-55.78	1.46	PASS
							Transversal (Y)	-17.53	-48.86	31.33	T4	-55.82		
10	LTE Band4	20M	16QAM WB AMR 23.85	1RB	0	20175	Axial (Z)	-5.48	-42.18	36.70	T4	-55.81	1.3	PASS
							Transversal (Y)	-17.20	-51.47	34.27	T4	-55.89		
11	LTE Band5	10M	16QAM WB AMR 23.85	1RB	0	20525	Axial (Z)	-5.96	-41.40	35.44	T4	-55.61	1.29	PASS
							Transversal (Y)	-16.53	-50.37	33.84	T4	-55.91		
12	LTE Band7	20M	16QAM WB AMR 23.85	1RB	0	21100	Axial (Z)	-5.92	-41.96	36.04	T4	-55.43	1.27	PASS
							Transversal (Y)	-16.75	-46.83	30.08	T4	-55.48		
13	LTE Band12	10M	16QAM WB AMR 23.85	1RB	0	23095	Axial (Z)	-6.10	-41.88	35.78	T4	-55.38	1.33	PASS
							Transversal (Y)	-17.43	-49.28	31.85	T4	-55.51		
14	LTE Band13	10M	16QAM WB AMR 23.85	1RB	0	23230	Axial (Z)	-6.29	-41.24	34.95	T4	-55.48	1.26	PASS
							Transversal (Y)	-17.49	-50.98	33.49	T4	-55.61		
15	LTE Band17	10M	16QAM WB AMR 23.85	1RB	0	23790	Axial (Z)	-6.27	-40.66	34.39	T4	-55.72	1.26	PASS
							Transversal (Y)	-16.51	-50.58	34.07	T4	-55.81		
16	LTE Band25	20M	16QAM WB AMR 23.85	1RB	0	26340	Axial (Z)	-0.16	-43.37	43.21	T4	-55.91	0.81	PASS
							Transversal (Y)	-10.73	-52.54	41.81	T4	-55.72		
17	LTE Band26	15M	16QAM WB AMR 23.85	1RB	0	26865	Axial (Z)	-6.51	-39.48	32.97	T4	-55.47	1.21	PASS
							Transversal (Y)	-16.82	-50.45	33.63	T4	-55.65		
18	LTE Band66	20M	16QAM WB AMR 23.85	1RB	0	132322	Axial (Z)	-4.73	-41.97	37.24	T4	-55.81	0.39	PASS
							Transversal (Y)	-16.51	-50.87	34.36	T4	-55.63		
19	LTE Band71	20M	16QAM WB AMR 23.85	1RB	0	133322	Axial (Z)	-5.85	-42.63	36.78	T4	-55.78	0.52	PASS
							Transversal (Y)	-16.42	-50.25	33.83	T4	-55.68		
20	LTE Band38	20M	EVS WB 128Kbps	1RB	0	38000	Axial (Z)	-1.16	-39.34	38.18	T4	-55.46	2	PASS
							Transversal (Y)	-13.61	-48.16	34.55	T4	-55.73		
21	LTE Band41	20M	EVS WB 128Kbps	1RB	0	40620	Axial (Z)	-5.44	-37.11	31.67	T4	-55.82	1.39	PASS
							Transversal (Y)	-16.93	-42.87	25.94	T3	-55.62		



**10.2 VoWiFi Tests Results**

**General Note:**

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
  - a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
  - b. Select WLAN 2.4GHz and WLAN 5GHz one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration , the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.
  - c. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

**<Codec Investigation>**

VoWiFi AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / Channel
ABM 1 (dBA/m)	-3.19	-8.77	-3.12	-7.9	Axial	2.4GHz WLAN / 6
ABM 2 (dBA/m)	-38.85	-41.13	-40.61	-40.29		
Signal Quality (dB)	35.66	32.36	37.49	32.39		
Freq. Response	PASS	PASS	PASS	PASS		

VoWiFi EVS Codec								
Codec	EVS SWB 9.6Kbps	EVS SWB 128Kbps	EVS WB 5.9Kbps	EVS WB 128Kbps	EVS NB 5.9Kbps	EVS NB 24.4Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	-3.12	-5.74	-9.08	-8.38	-5.8	-3.54	Axial	2.4GHz WLAN / 6
ABM 2 (dBA/m)	-35.56	-42.05	-41.54	-41.97	-38.44	-41.43		
Signal Quality (dB)	32.44	36.31	32.46	33.59	32.64	37.89		
Freq. Response	PASS	PASS	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is WB AMR 6.60Kbps



**<Air Interface Investigation>**

Frequency Bands	Modulation	Bandwidth	Data Rate	Channel	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB
WLAN 2.4GHz	802.11b	20	1M	6	-10.13	-34.06	23.93
	802.11b	20	11M	6	-9.58	-34.60	25.02
	802.11g	20	6M	6	-9.25	-38.50	29.25
	802.11g	20	54M	6	-9.27	-36.79	27.52
	802.11n-HT20	20	MCS0	6	-9.54	-36.62	27.08
	802.11n-HT20	20	MCS7	6	-9.41	-38.06	28.65
WLAN 5GHz	802.11a	20	6M	40	-10.54	-43.09	32.55
	802.11a	20	54M	40	-9.48	-43.10	33.62
	802.11an-HT20	20	MCS0	40	-9.75	-40.45	30.70
	802.11an-HT20	20	MCS7	40	-9.07	-41.74	32.67
	802.11an-HT40	40	MCS0	38	-10.67	-41.91	31.24
	802.11an-HT40	40	MCS7	38	-9.48	-41.33	31.85
	802.11ac-VHT20	20	MCS0	40	-9.33	-43.10	33.77
	802.11ac-VHT20	20	MCS8	40	-10.02	-43.26	33.24
	802.11ac-VHT40	40	MCS0	38	-9.54	-43.02	33.48
	802.11ac-VHT40	40	MCS8	38	-10.59	-42.36	31.77
	802.11ac-VHT80	80	MCS0	50	-10.29	-41.79	31.50
	802.11ac-VHT80	80	MCS8	50	-10.21	-42.97	32.76

Plot No.	Air Interface	BW (MHz)	Modulation / Mode	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
22	WLAN2.4GHz	802.11b 1Mbps	WB AMR 6.60Kbps	6	Axial (Z)	-4.63	-44.80	40.17	T4	-55.72	0.41	Pass
					Transversal (Y)	-13.42	-50.70	37.28	T4	-55.58		
23	WLAN5GHz	802.11n-HT20 MCS0	WB AMR 6.60Kbps	40	Axial (Z)	-2.14	-43.97	41.83	T4	-55.79	1.83	Pass
					Transversal (Y)	-11.91	-48.87	36.96	T4	-55.91		
24	WLAN5GHz	802.11n-HT20 MCS0	WB AMR 6.60Kbps	56	Axial (Z)	-2.49	-43.47	40.98	T4	-55.86	1.94	Pass
					Transversal (Y)	-15.62	-45.67	30.05	T4	-55.61		
25	WLAN5GHz	802.11n-HT20 MCS0	WB AMR 6.60Kbps	116	Axial (Z)	-2.35	-42.43	40.08	T4	-55.72	1.29	Pass
					Transversal (Y)	-11.53	-48.69	37.16	T4	-55.78		
26	WLAN5GHz	802.11n-HT20 MCS0	WB AMR 6.60Kbps	157	Axial (Z)	-3.67	-41.51	37.84	T4	-55.84	1.71	Pass
					Transversal (Y)	-11.92	-49.49	37.57	T4	-55.68		

**Remark:**

1. Phone Condition: Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A.
3. Test Engineer : Nick Hu

## 11. Uncertainty Assessment

The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance. The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 8.2. The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) ABM1	(Ci) ABM2	Standard Uncertainty (ABM1) (±%)	Standard Uncertainty (ABM2) (±%)
<b>Probe Sensitivity</b>							
Reference Level	3.0	N	1	1	1	3.0	3.0
AMCC Geometry	0.4	R	1.732	1	1	0.2	0.2
AMCC Current	1.0	R	1.732	1	1	0.6	0.6
Probe Positioning during Calibr.	0.1	R	1.732	1	1	0.1	0.1
Noise Contribution	0.7	R	1.732	0.014	1	0.0	0.4
Frequency Slope	5.9	R	1.732	0.1	1	0.3	3.4
<b>Probe System</b>							
Repeatability / Drift	1.0	R	1.732	1	1	0.6	0.6
Linearity / Dynamic Range	0.6	R	1.732	1	1	0.3	0.3
Acoustic Noise	1.0	R	1.732	0.1	1	0.1	0.6
Probe Angle	2.3	R	1.732	1	1	1.3	1.3
Spectral Processing	0.9	R	1.732	1	1	0.5	0.5
Integration Time	0.6	N	1	1	5	0.6	3.0
Field Distribution	0.2	R	1.732	1	1	0.1	0.1
<b>Test Signal</b>							
Ref. Signal Spectral Response	0.6	R	1.732	0	1	0.0	0.3
<b>Positioning</b>							
Probe Positioning	1.9	R	1.732	1	1	1.1	1.1
Phantom Thickness	0.9	R	1.732	1	1	0.5	0.5
DUT Positioning	1.9	R	1.732	1	1	1.1	1.1
<b>External Contributions</b>							
RF Interference	0.0	R	1.732	1	0.3	0.0	0.0
Test Signal Variation	2.0	R	1.732	1	1	1.2	1.2
<b>Combined Std. Uncertainty</b>						4.0%	6.1%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						8.1%	12.2%

**Table 8.2 Uncertainty Budget of audio band magnetic measurement**



## **12. References**

- [1] ANSI C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 27 May 2011.
- [2] FCC KDB 285076 D01v05, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep 2017
- [3] FCC KDB 285076 D02v03, "Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services", Sep 2017
- [4] FCC KDB 285076 D03v01, "Hearing aid compatibility frequently asked questions", Sep 2017
- [5] SPEAG DASY System Handbook



***Appendix A. Plots of T-Coil Measurement***

The plots are shown as follows.

### 1\_HAC T-Coil GSM850\_Voice\_Ch189 FR-V1 (Z)

Communication System: UID 0, GSM850-1UP (0); Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch189/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 21.05 dB

ABM1 comp = -1.45 dBA/m


BWC Factor = 0.16 dB

Location: 3.3, -8.8, 3.7 mm

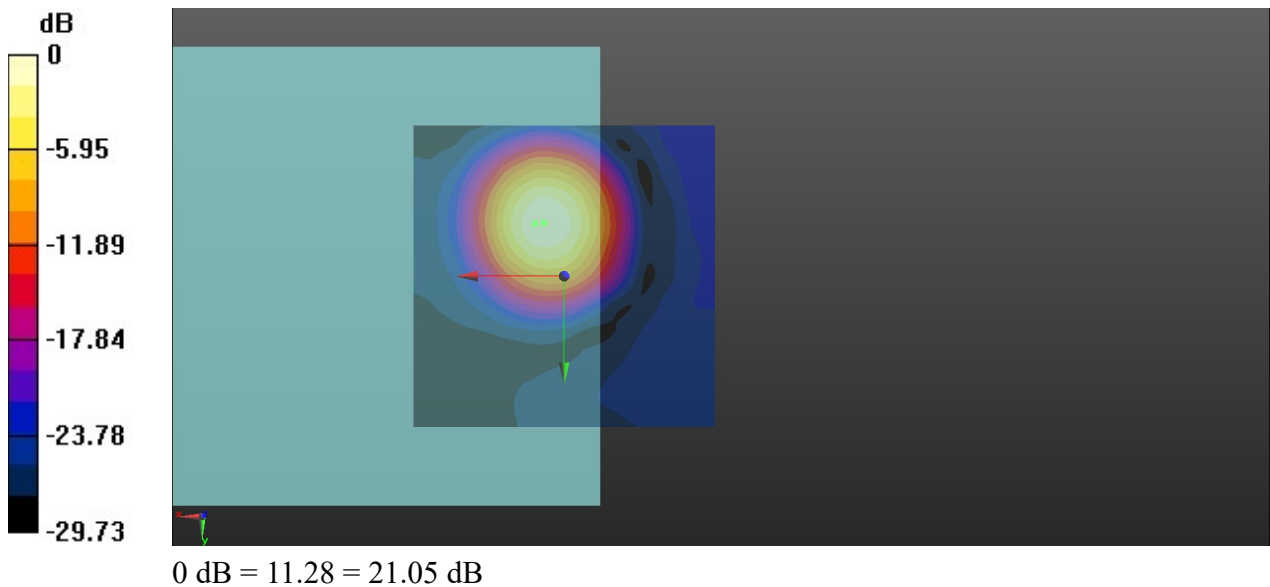

# Ch189/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 4.8, -8.7, 3.7 mm Diff: 1.07dB

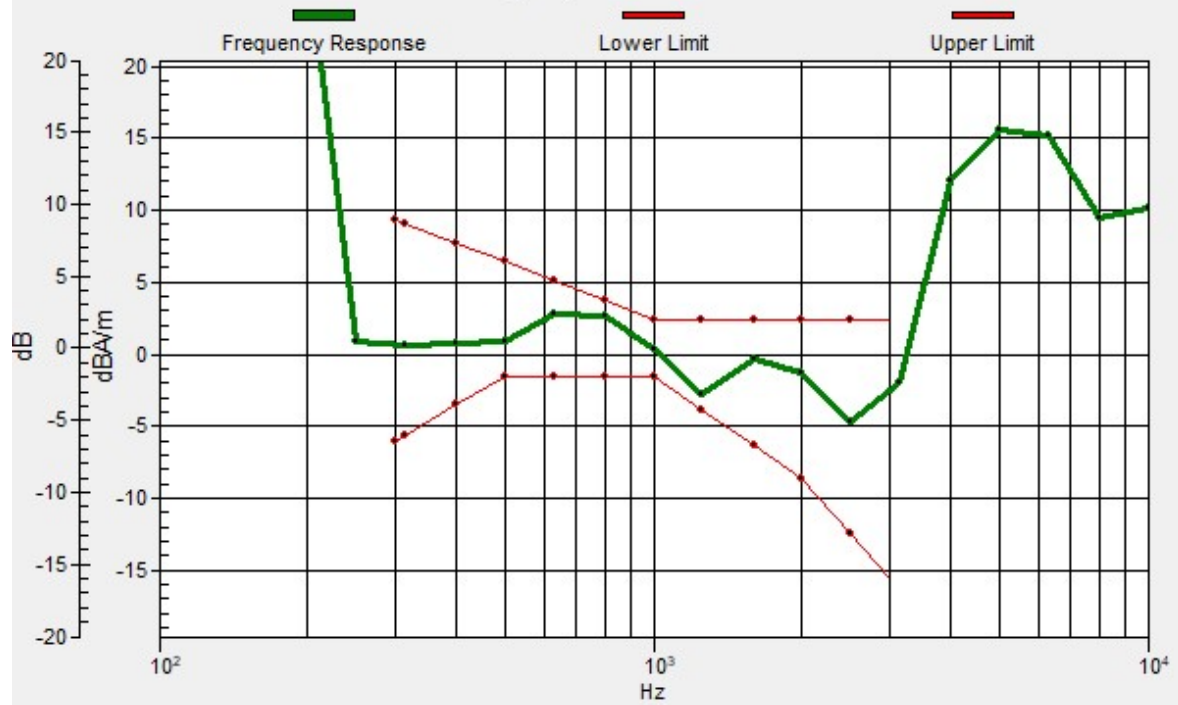

### 1\_HAC T-Coil GSM850\_Voice\_Ch189 FR-V1 (Y)

Communication System: UID 0, GSM850-1UP (0); Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch189/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 37.62 dB

ABM1 comp = -13.19 dBA/m

BWC Factor = 0.16 dB

Location: -2.1, -19.6, 3.7 mm

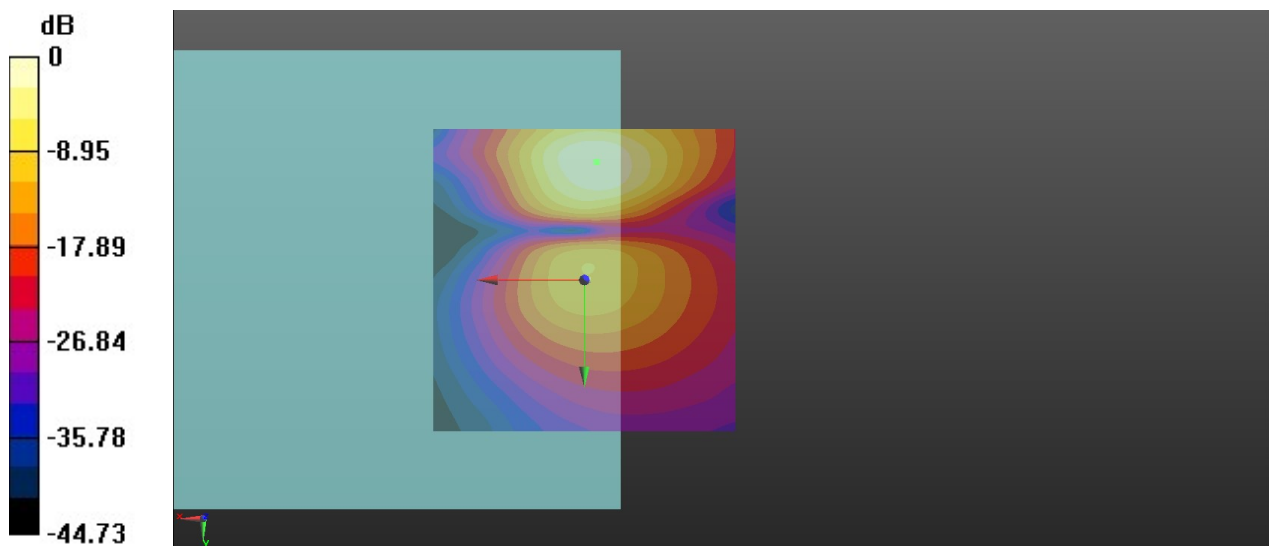

0 dB = 76.04 = 37.62 dB

## 2\_HAC T-Coil GSM1900\_Voice\_Ch661 FR-V1 (Z)

Communication System: UID 0, PCS-1UP (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch661/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 25.89 dB

ABM1 comp = -1.15 dBA/m


BWC Factor = 0.16 dB

Location: 3.3, -8.3, 3.7 mm

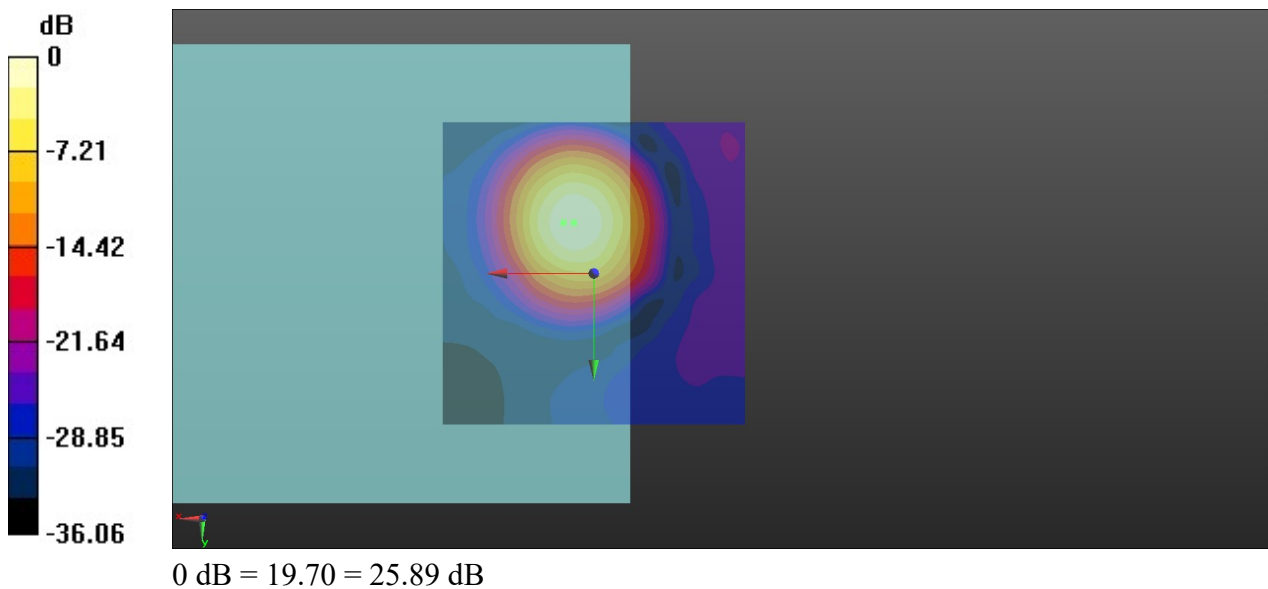

# Ch661/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 5, -8.4, 3.7 mm Diff: 1.11dB

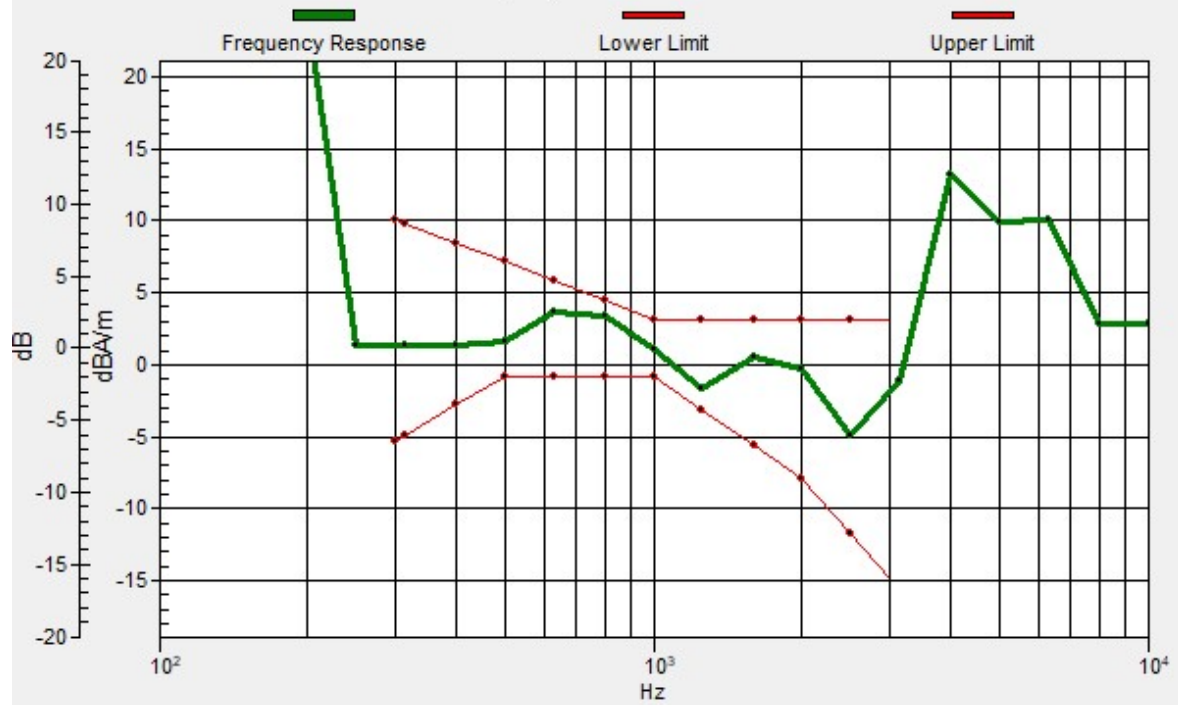

## 2\_HAC T-Coil GSM1900\_Voice\_Ch661 FR-V1 (Y)

Communication System: UID 0, PCS-1UP (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch661/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.55 dB

ABM1 comp = -12.39 dBA/m

BWC Factor = 0.16 dB

Location: -1.2, -19.2, 3.7 mm

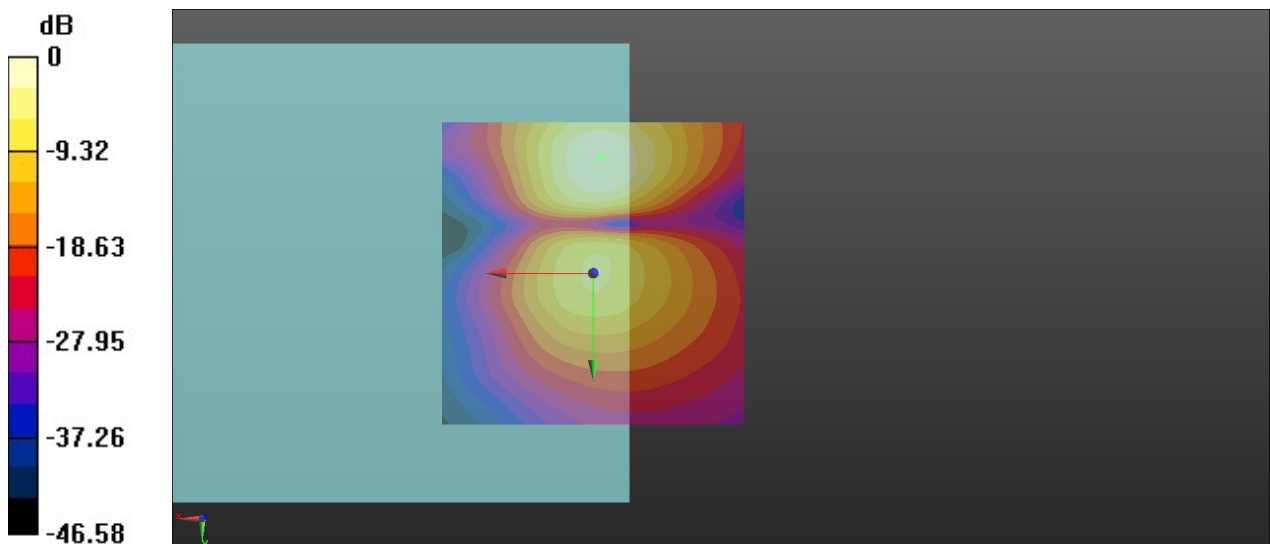

0 dB = 94.90 = 39.55 dB

### 3\_HAC T-Coil WCDMA II\_Voice\_4.75Kbps\_Ch9400 (Z)

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### Ch9400/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.56 dB

ABM1 comp = -2.60 dBA/m

BWC Factor = 0.16 dB


Location: 2.1, -8.3, 3.7 mm

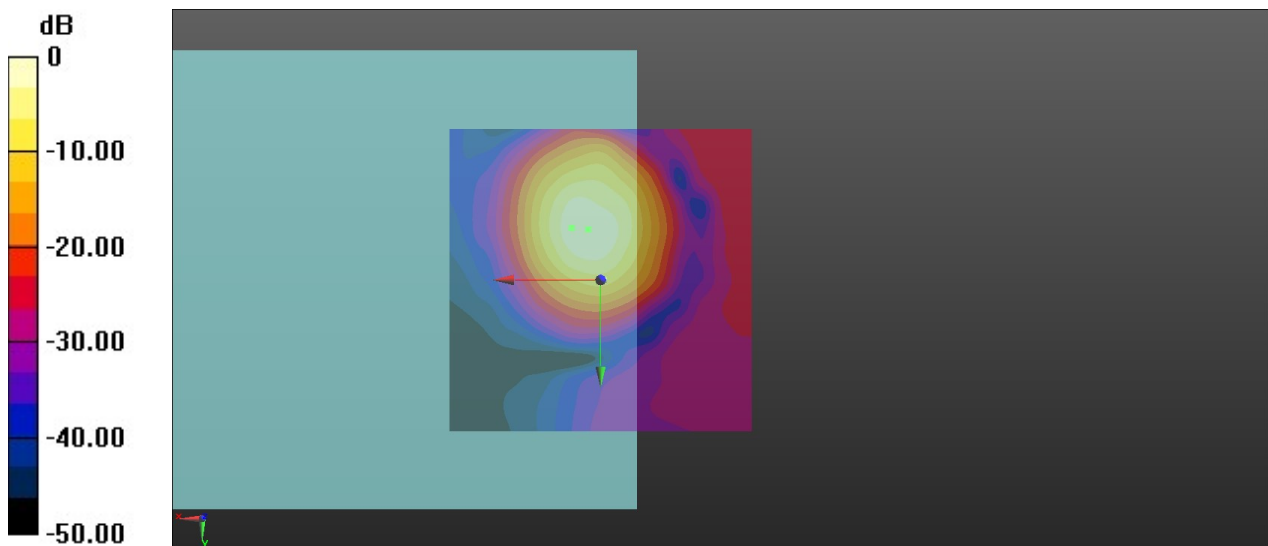

0 dB = 95.08 = 39.56 dB

# Ch9400/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 4.7, -8.6, 3.7 mm Diff: 1.45dB

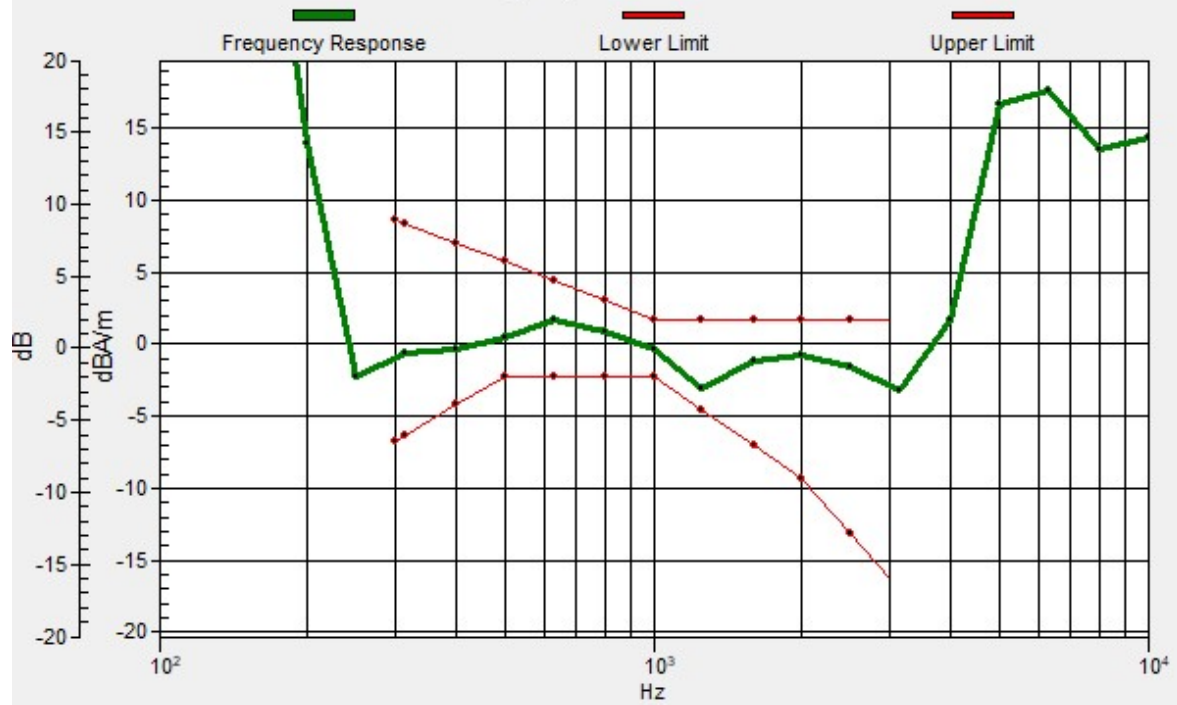

### 3\_HAC T-Coil WCDMA II\_Voice\_4.75Kbps\_Ch9400 (Y)

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### Ch9400/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.59 dB

ABM1 comp = -11.62 dBA/m

BWC Factor = 0.16 dB

Location: -0.4, -17.5, 3.7 mm

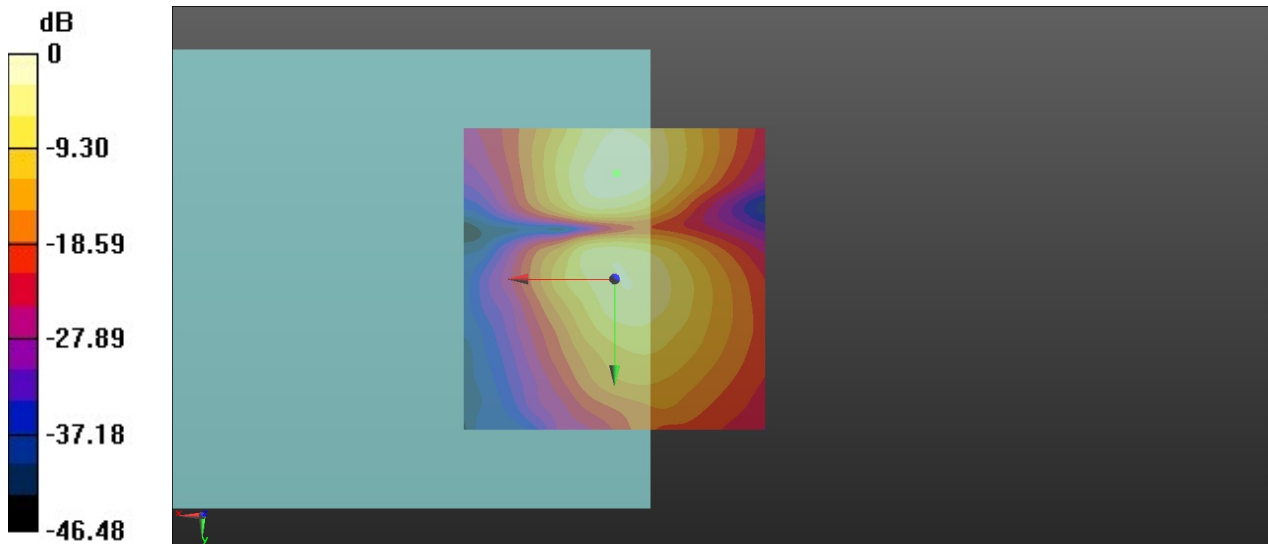

0 dB = 107.0 = 40.59 dB

#### 4\_HAC T-Coil WCDMA IV\_Voice\_4.75Kbps\_Ch1413 (Z)

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### Ch1413/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.62 dB

ABM1 comp = -2.18 dBA/m

BWC Factor = 0.16 dB


Location: 3.3, -8.3, 3.7 mm

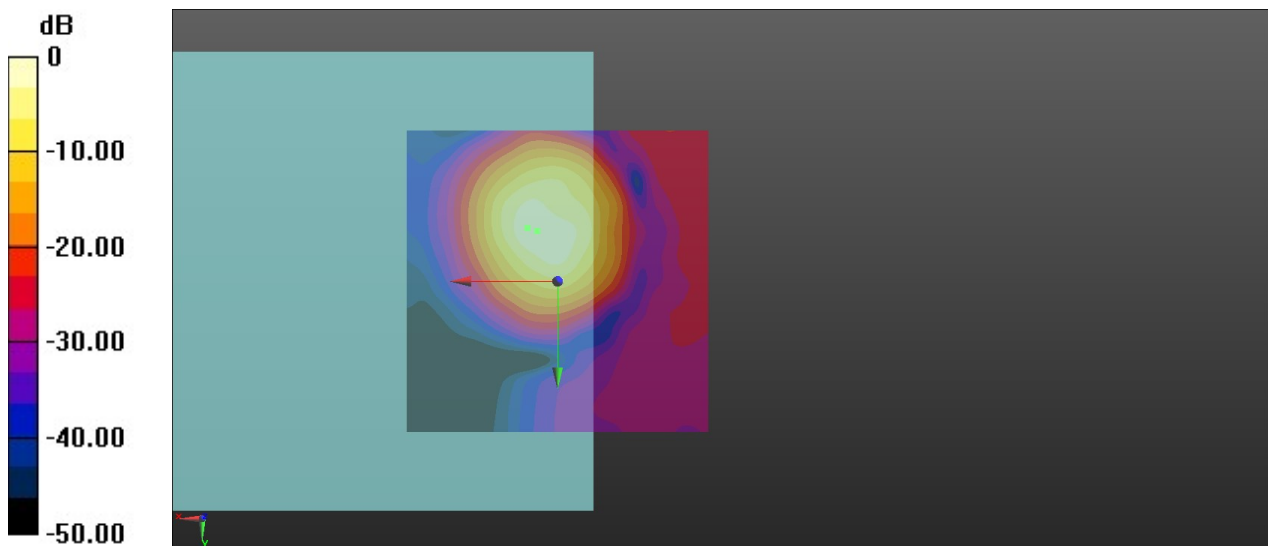

0 dB = 135.3 = 42.63 dB

# Ch1413/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 5, -8.8, 3.7 mm Diff: 1.36dB

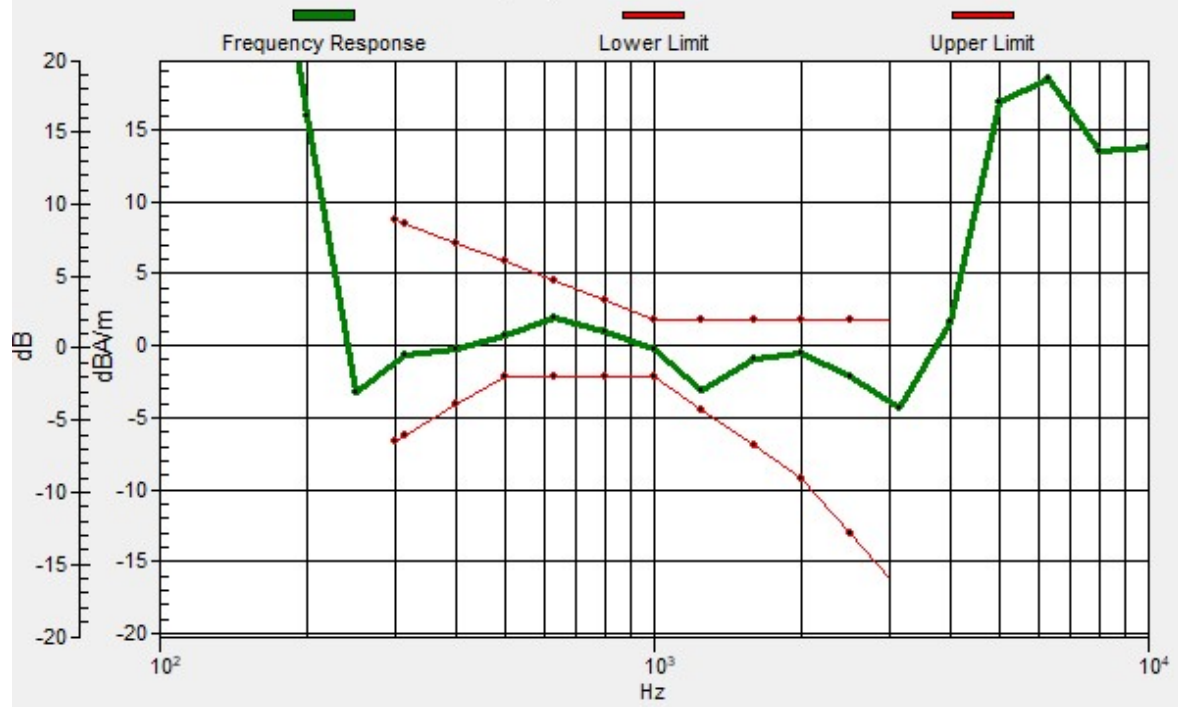

#### 4\_HAC T-Coil WCDMA IV\_Voice\_4.75Kbps\_Ch1413 (Y)

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### Ch1413/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.39 dB

ABM1 comp = -11.39 dBA/m

BWC Factor = 0.16 dB

Location: 0, -18.3, 3.7 mm

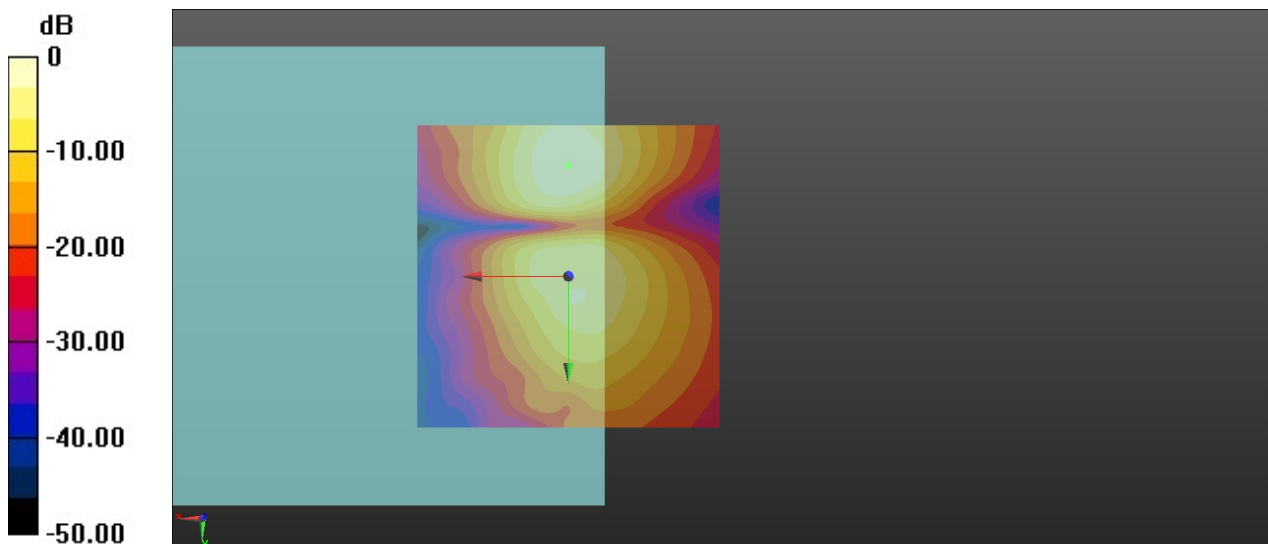

0 dB = 117.4 = 41.39 dB

### 5\_HAC T-Coil WCDMA V\_Voice\_4.75Kbps\_Ch4182 (Z)

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### Ch4182/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.35 dB

ABM1 comp = -2.24 dBA/m


BWC Factor = 0.16 dB

Location: 2.9, -7.9, 3.7 mm

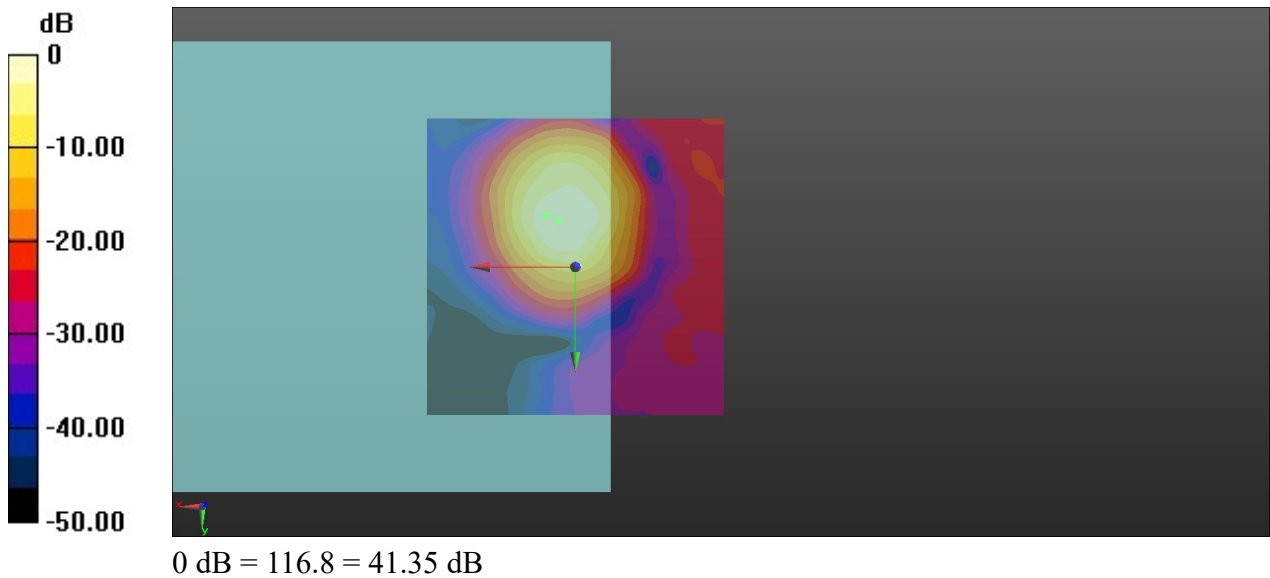

# Ch4182/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 4.8, -8.7, 3.7 mm Diff: 1.79dB

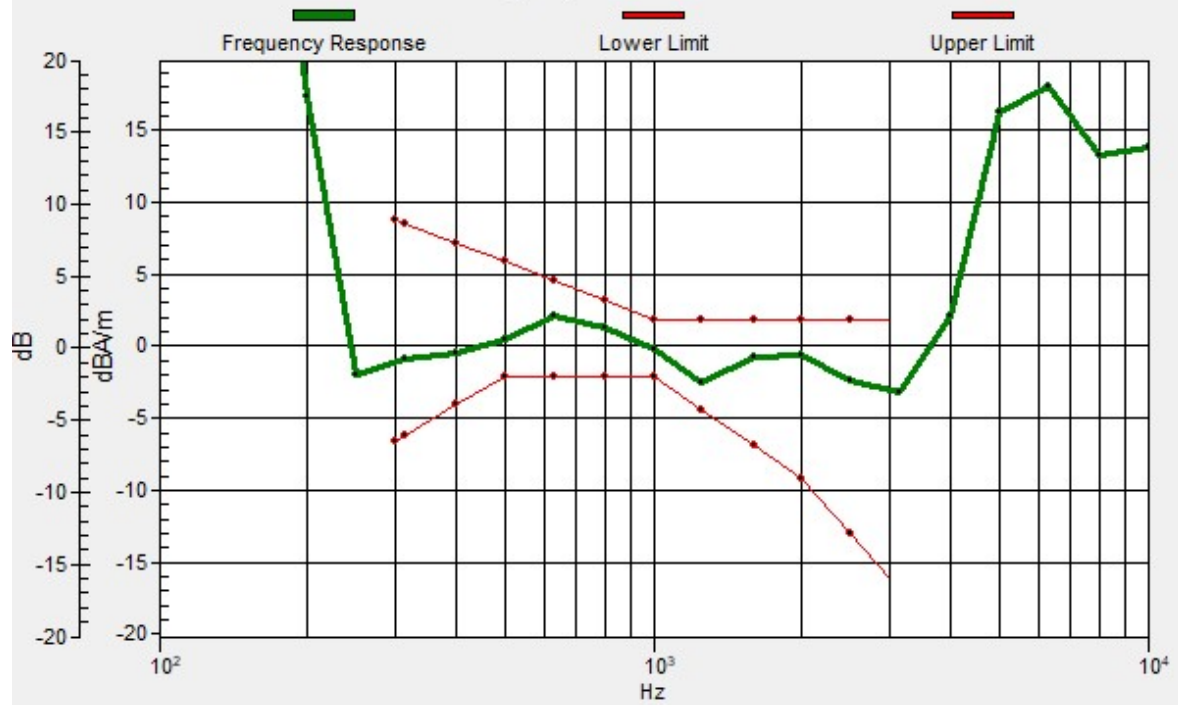

### 5\_HAC T-Coil WCDMA V\_Voice\_4.75Kbps\_Ch4182 (Y)

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch4182/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.02 dB

ABM1 comp = -11.93 dBA/m

BWC Factor = 0.16 dB

Location: -1.2, -18.8, 3.7 mm

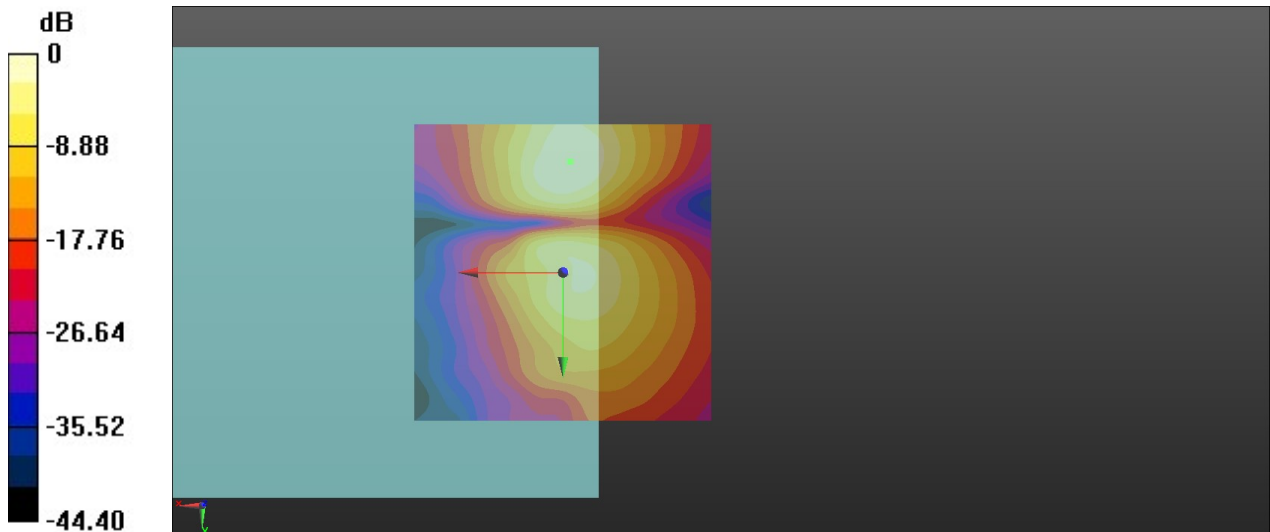

0 dB = 112.4 = 41.02 dB

### 6\_CDMA BC0\_RC3 SO68\_Ch384 (Z)

Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch384/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):


Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.55 dB

ABM1 comp = -5.29 dBA/m

BWC Factor = 0.16 dB


Location: 0.4, -5, 3.7 mm

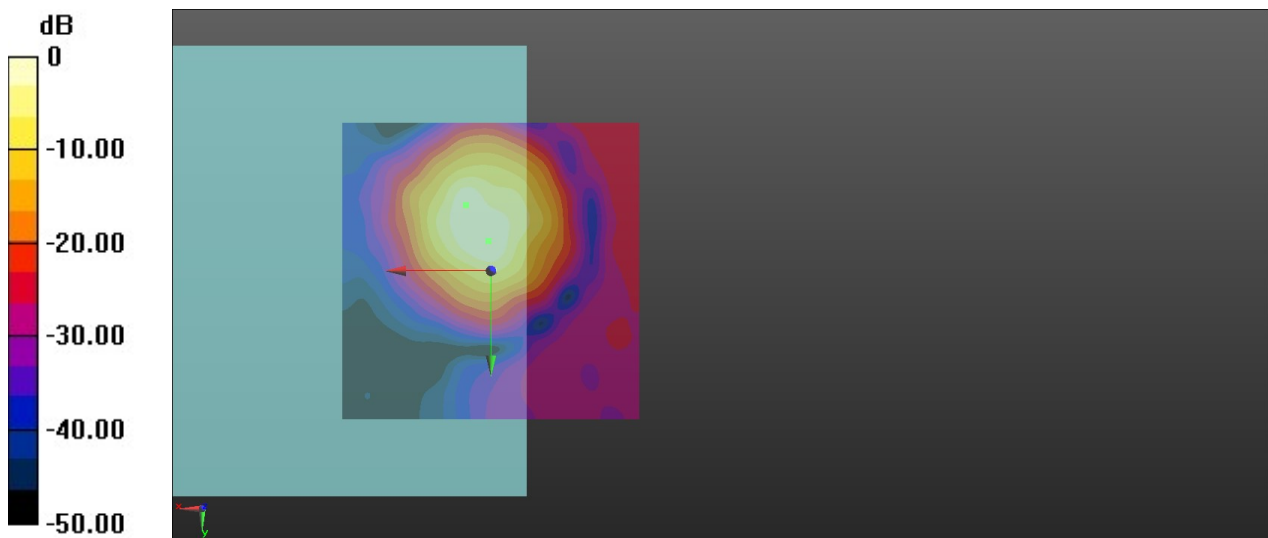

0 dB = 134.2 = 42.56 dB

# Ch384/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 4.2, -11, 3.7 mm Diff: 0.86dB

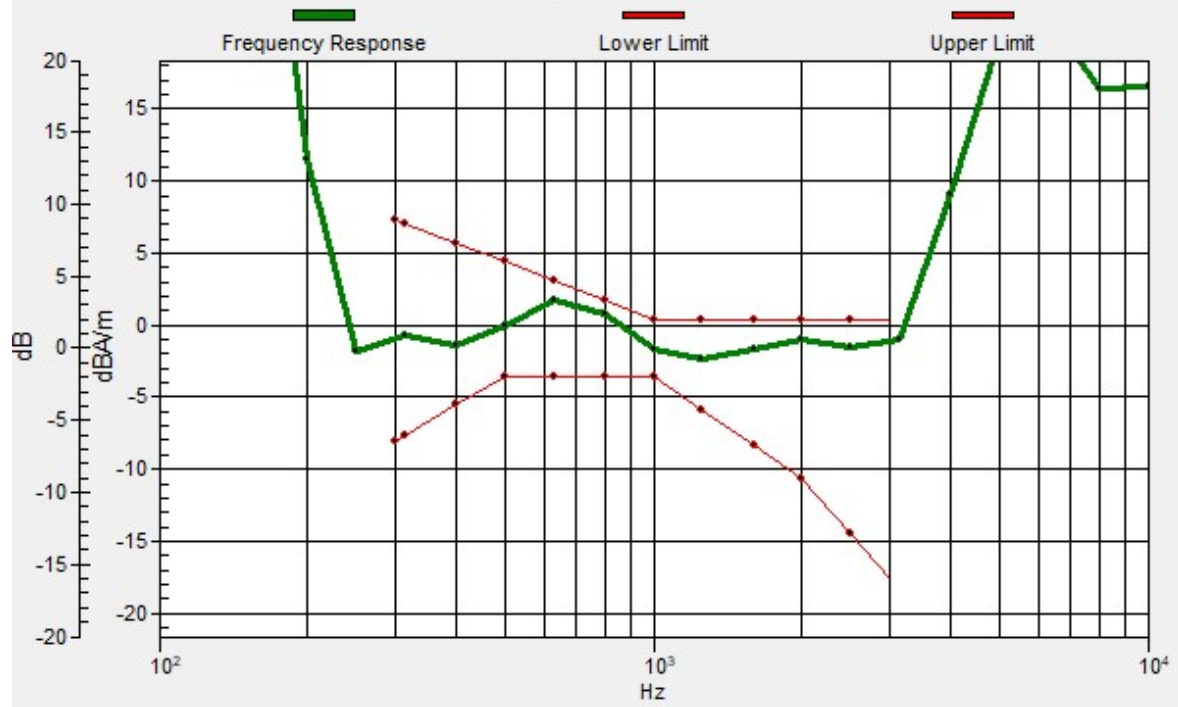

### 6\_CDMA BC0\_RC3 SO68\_Ch384 (Y)

Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3128; ; Calibrated: 2020.6.18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### Ch384/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.29 dB

ABM1 comp = -11.76 dBA/m

BWC Factor = 0.16 dB

Location: 0, -20.4, 3.7 mm

