



MOTOROLA

PERSONAL COMMUNICATIONS SECTOR

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT - Addendum

Test Report Number – 11764-1BT

Report Date – September 8, 2003

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

A handwritten signature in blue ink that reads "Michael E. Hill".

Signature

Name: Michael E. Hill

Title: Senior Electrical Engineer

Date : 2003-09-08

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



EXHIBIT 6A

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	4
Applicable Standards	5
Summary of Testing	6
General and Special Conditions	6
Equipment and Cable Configurations	7
Measuring Equipment and Calibration Information	7
Description of Bluetooth Transmitter	8
Measurement Procedures and Data	
Carrier Frequency Separation	8
Carrier Frequency Plot	9
Number of Hopping Frequencies	10
Number of Hopping Frequencies Plot	11
Time of Occupancy (Dwell Time)	12
Dwell Time Plot	13
20dB Bandwidth	14
20 dB Bandwidth	15
Field Strength of Spurious Emissions	16
30-1000MHz Low Channel Plot	17
30-1000MHz Mid Channel Plot	17
30-100MHz High Channel Plot	18
1-26.5GHz Low Channel Horizontal Plot	19
1-26.5GHz Low Channel Vertical Plot	19
1-26.5GHz Mid Channel Horizontal Plot	20
1-26.5GHz Mid Channel Vertical Plot	20
1-26.5GHz High Channel Horizontal Plot	21
1-26.5GHz High Channel Vertical Plot	21
Peak Output Power	22
Peak Output Power Plot	22
Band-Edge compliance of RF Conducted Emissions	23
Low Band Edge Hopping Disabled Plot	23
Low Band Edge with Hopping Enabled	24
High Band Edge Hopping Disabled Plot	24
High Band Edge Hopping Enabled Plot	25
Spurious RF Conducted Emissions	26
Conducted Spurious Emissions 30-3000MHz	27
Conducted Spurious Emissions 2-10GHz	27
Conducted Spurious Emissions 10-20GHz	28
Conducted Spurious Emissions 20-26.5GHz	28

Appendix A - Radiated Emissions Test Setup Photos	
Figure A.1 – Radiated Emissions Measurement	29
Figure A.2 – Substitution Measurement	29

Test Report Details

Tests Performed By: Motorola Personal Communications Sector
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (561) 739-2179 Fax (561) 739-2131
Motorola PCS FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Radiated Emissions
Performed By: Underwriters Laboratories
International EMC Services
333 Pfingsten RD
Northbrook, IL 60062
Contact: Lubomir Madjarov
(Tel) 847/664-3957
(Fax) 847/313-3957

Tests Requested By: Motorola Inc.
Personal Communications Sector
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 1900, Bluetooth

Model Number: SYN9904A

Serial Numbers: L8406F0-016, L8406F0-020, L8406H0-020

Testing Complete Date: September 8, 2003

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart B – Unintentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" published by the Federal Communications Commission was also used in the testing of this product.

Summary of Testing

Test #	Test Name	Pass/Fail
1	Carrier Frequency Separation	Pass
2	Number of Hopping Frequencies	Pass
3	Time of Occupancy (Dwell Time)	Pass
4	20 dB Bandwidth	Pass
5	Spurious RF Conducted Emissions	Pass
6	Field Strength of Spurious Emissions	Pass
7	Max Power	N/A
8	Band Edges	See plots
9	Conducted Spurious Emissions	Pass

Test #	Test Name	Results
1	Carrier Frequency Separation	1.01MHz
2	Number of Hopping Frequencies	79
3	Time of Occupancy (Dwell Time)	150µs
4	20 dB Bandwidth	622 KHz
5	Spurious RF Conducted Emissions	See plots
6	Field Strength of Spurious Emissions	See plots
7	Max Power	1.729 dBm
8	Band Edges	See plots
9	Conducted Spurious Emissions	See plots

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Hewlett Packard	RF Amplifier	8347A	3307A01225	9/17/2003
Hewlett Packard	Pre-Amplifier	8449B	3008A00535	10/11/2003
ETS	DRG Horn Antenna	3115	6222	9/30/2003
A.H. Systems Inc.	DRG Horn Antenna	SAS-200/571	265	4/29/2004
ETS	Log-Periodic Antenna	3148	1189	4/29/2004
ETS	Biconical Antenna	3110B	3369	4/29/2004
ETS	Biconical Antenna	3110B	3370	10/25/2003
Attenuator	Weinschel	AS-6	6675	10/3/2003
Attenuator	Weinschel	AS-6	6677	10/3/2003
Rohde & Schwarz	Mobile Test Set	CMD 80	DE29008	N/A
Hewlett Packard	Signal Generator	83623B	3844A01195	5/20/2004
Thermotron	Environmental Chamber	S-4	31580	12/19/2003
Hewlett Packard	Pre-Amplifier	8347A		
Hewlett Packard	Pre-Amplifier	8447F	2805A03419	5/19/2004
Agilent	Power Meter	EE4418B		11/26/2003
Agilent	Sensor	E4412B		11/23/2004
U.L. Equipment List				
Hewlett Packard	QP Adapter	85650A	2811A010169	1/15/2004
Hewlett Packard	S/A Display	8566B	2542A12974	1/15/2004
Hewlett Packard	S/A Display	8566B	2637A03376	1/15/2004
Hewlett Packard	RF Preselector	85685A	2810A00692	1/15/2004
Rohde & Schwarz	S/A Display	FSEK20	DE2525315	1/14/2004
EMCO	Horn Antenna 1-18GHz	3115	2638	7/10/2004
EMCO	Horn Antenna 18-26.5GHz	3160-09	9904-1165	N/A
Chase	Bi-Con Antenna 30-300MHz	VBA6106A	1246	6/23/2004
Chase	Log-Periodic Antenna	UPA6108	1120	6/18/2004

All equipment is on a one-year calibration cycle.

Description of Bluetooth Transmitter

The A835 multimedia communicator offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483MHz. The Bluetooth antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by industrial standard. In this application, the device is battery-operated. Therefore conducted AC line emissions testing as described in CFR47, Part 15.207 was not necessary.

Measurement Procedures and Data

CARRIER FREQUENCY SEPARATION

CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth transmitter of the A835 had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Measurement Results

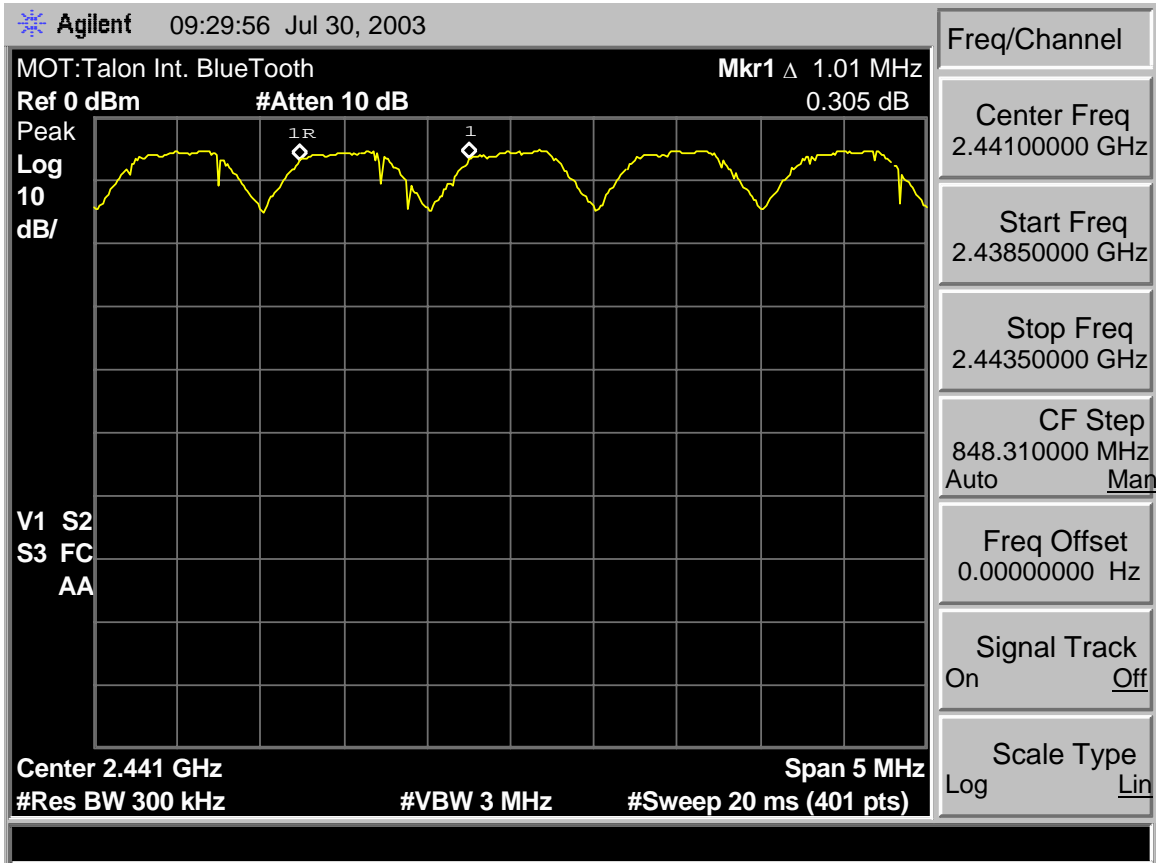

Carrier Frequency Separation

NUMBER OF HOPPING FREQUENCIES

CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.

Measurement Results

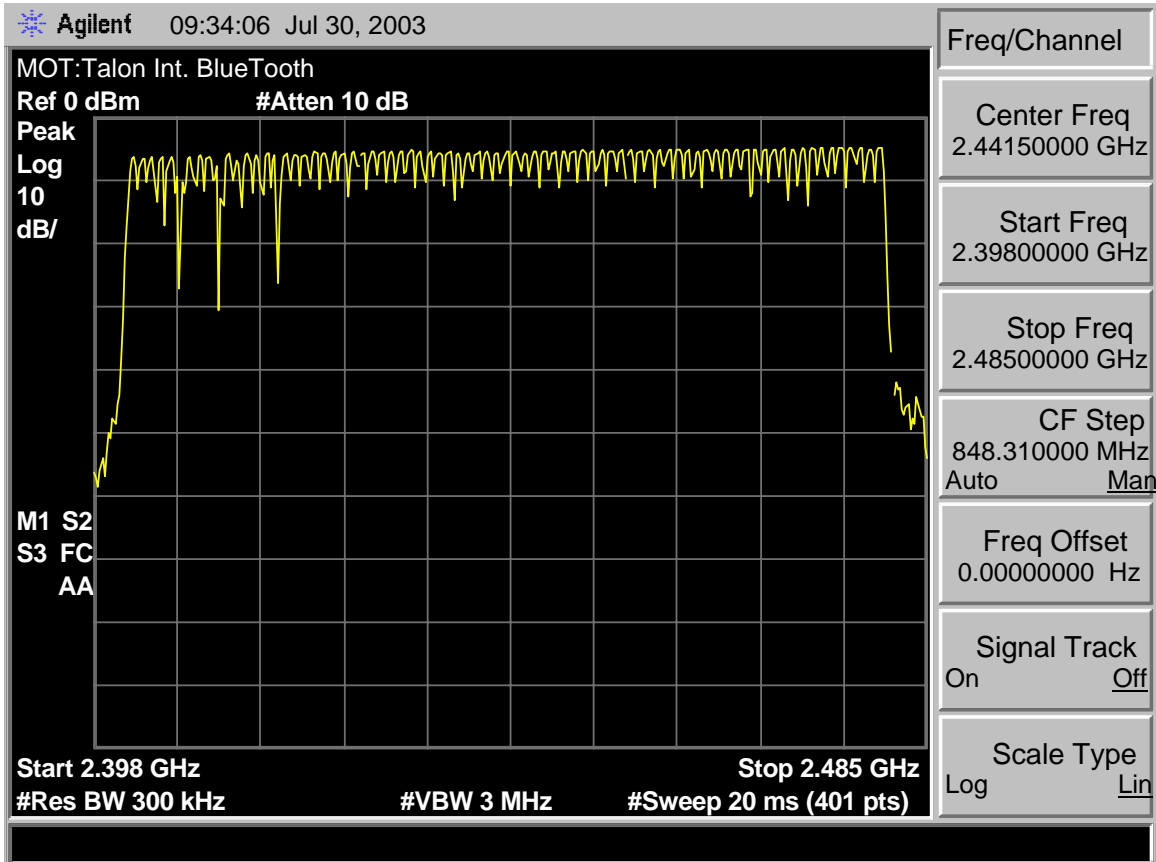

Number of Hopping Frequencies

TIME OF OCCUPANCY (DWELL TIME)

CFR47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:


1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Measurement Results

Attached

Measurement Results

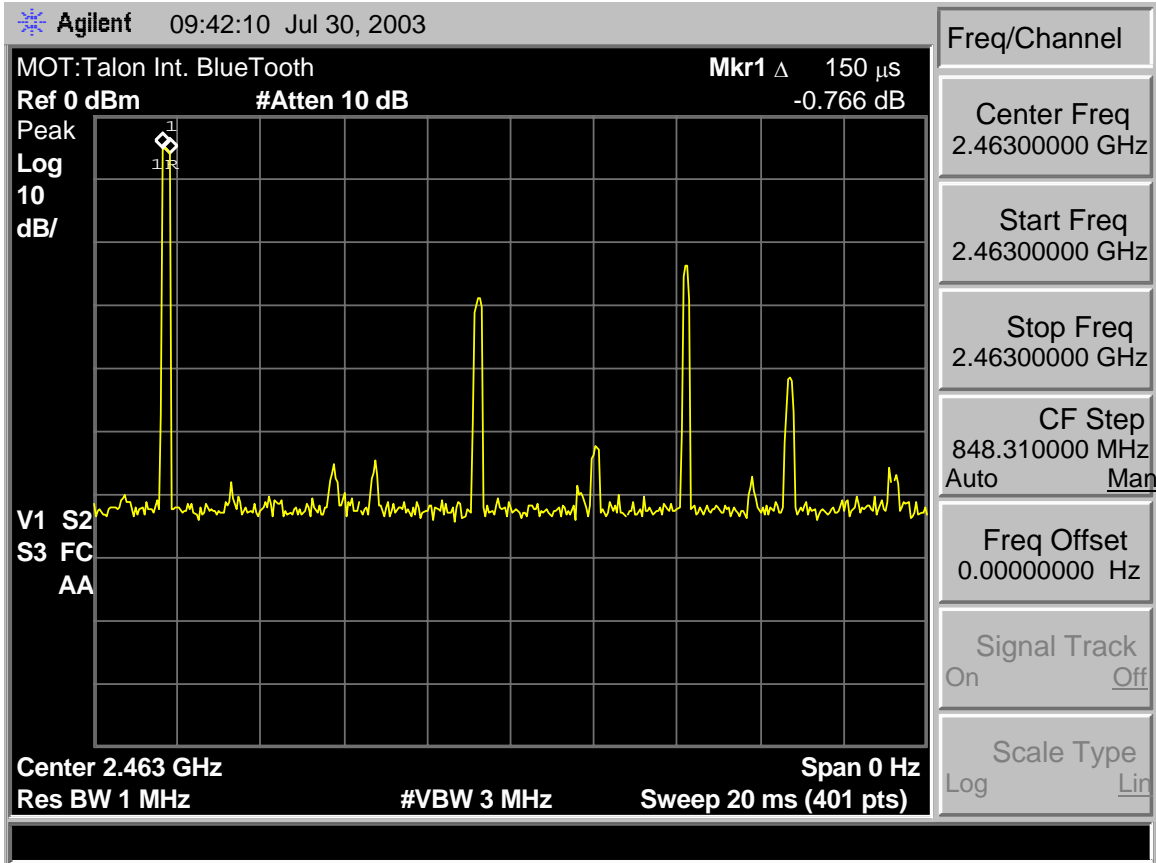

Dwell Time

20dB Bandwidth

CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Measurement Results

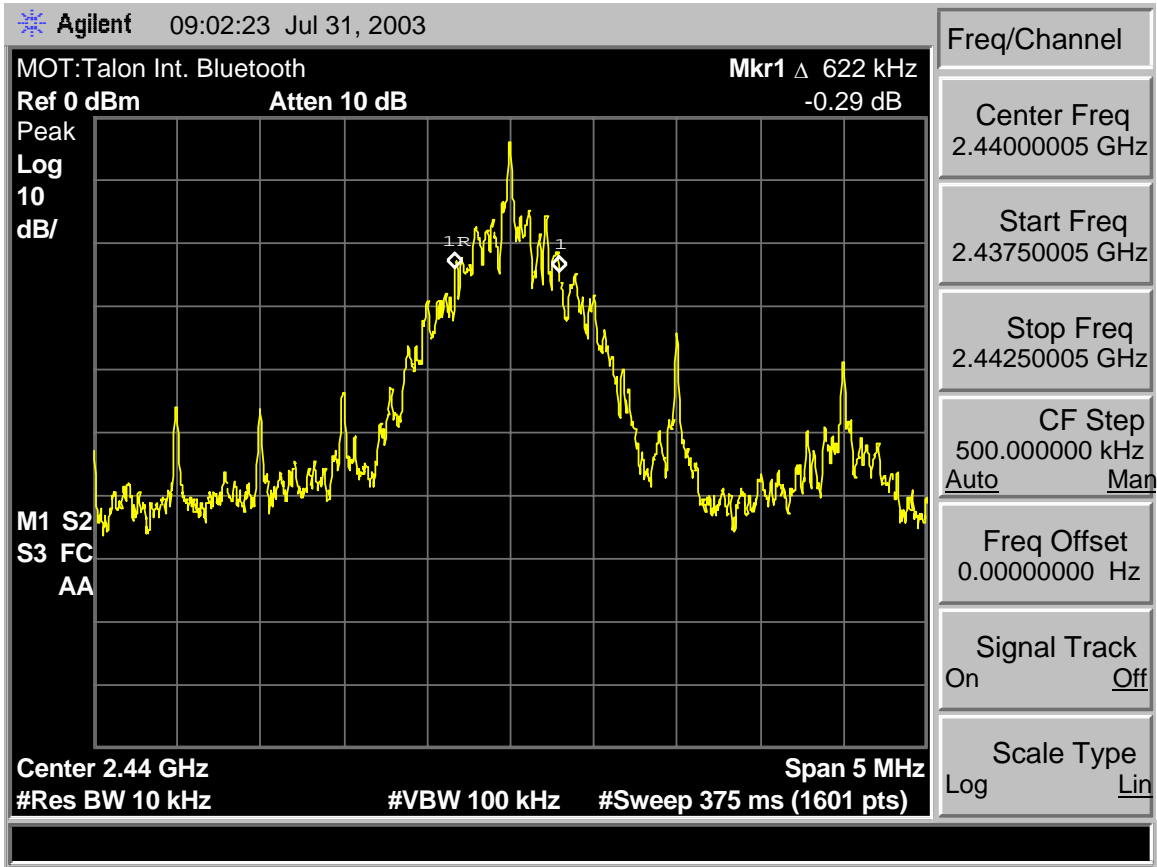

20 dB Bandwidth

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 15.249

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole.


The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) -
Amplifier Gain (dB) + Antenna Correction Factor (1/m)


A fully charged battery was used for the supply voltage.

This data was taken at Underwriter's Laboratories.


Measurement Results

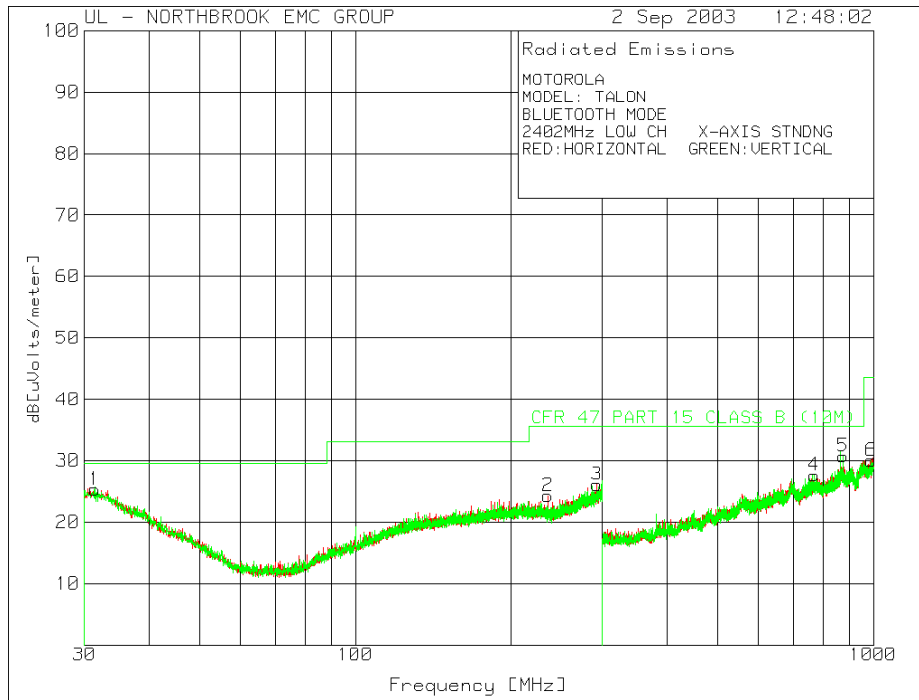


30 -1000MHz Low Channel

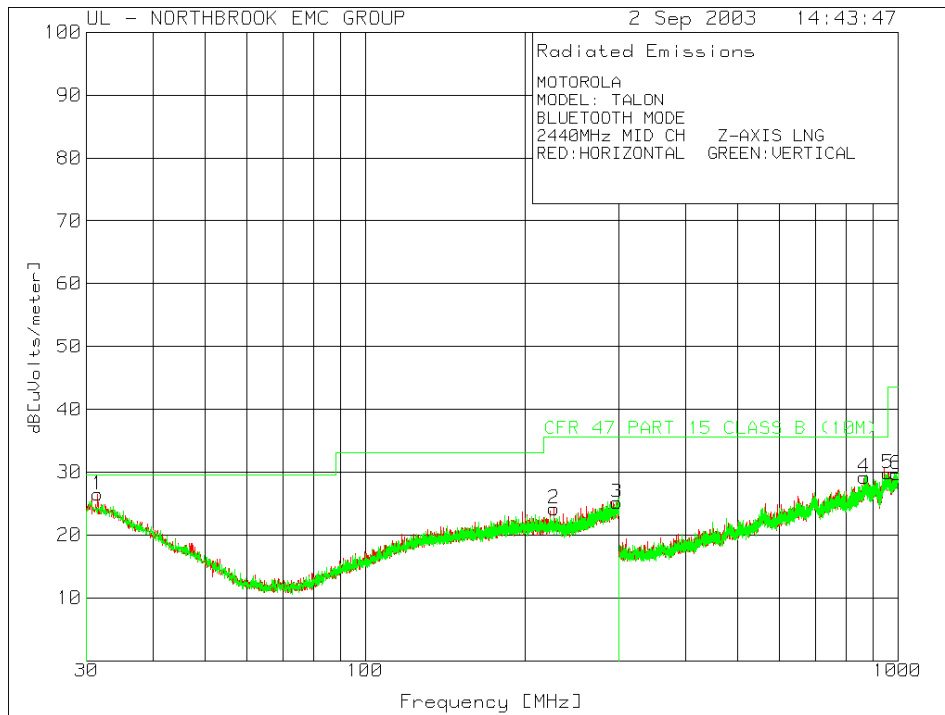


30-1000MHz Mid Channel

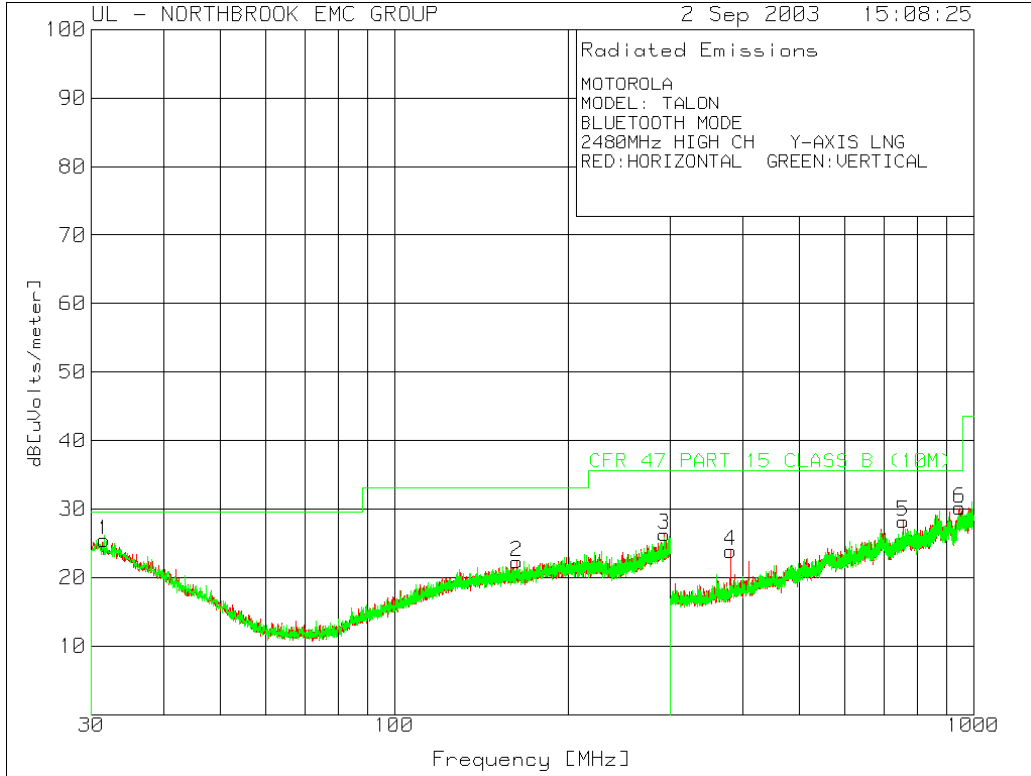


30-1000MHz High Channel

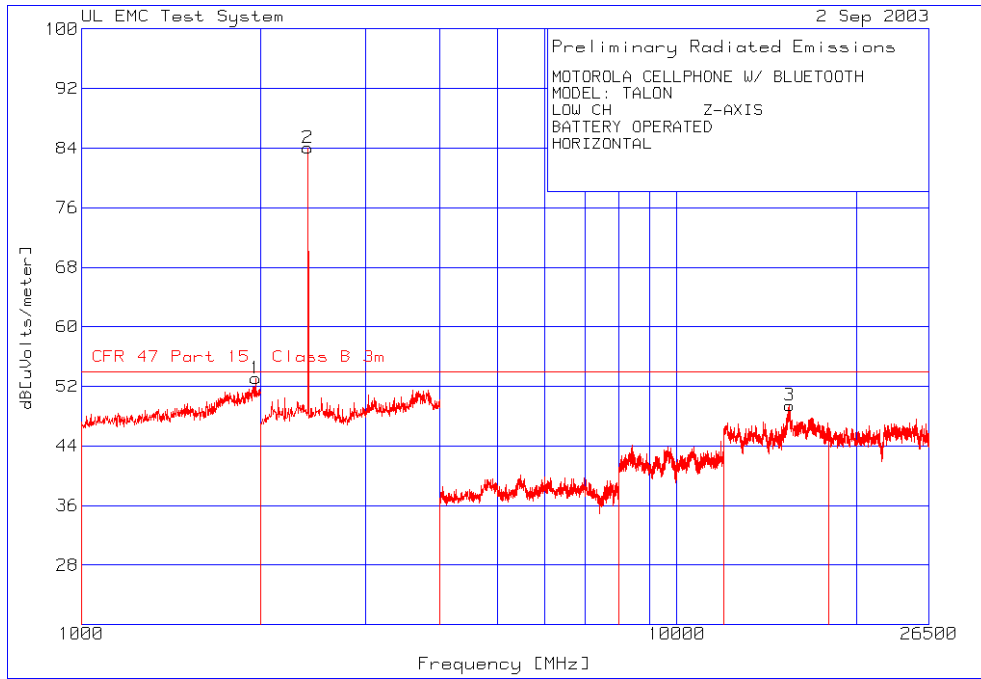


1-26.5 GHz Low Channel Horizontal

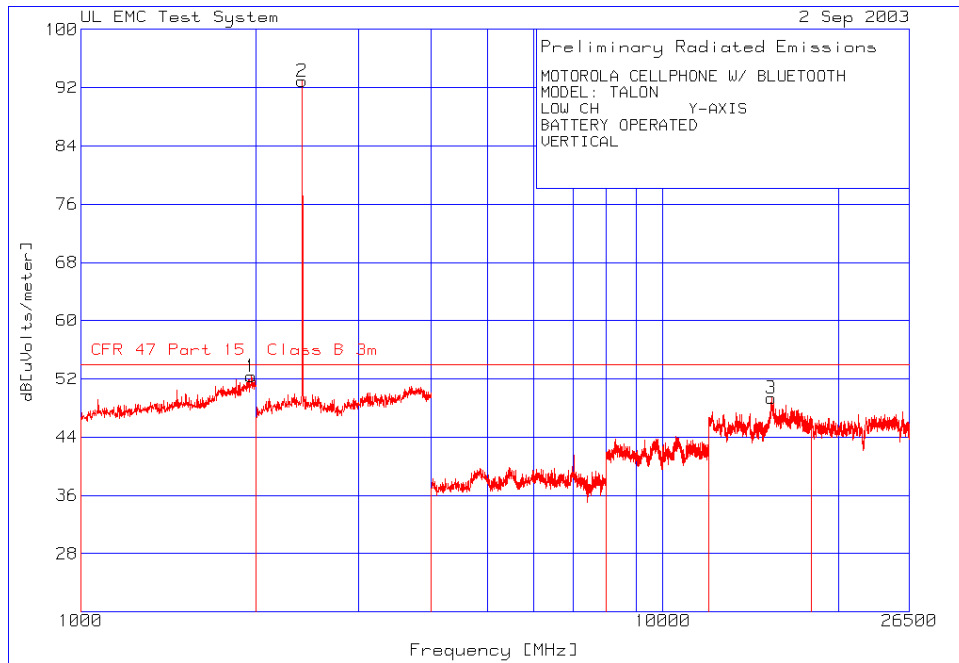


1-26.5 GHz Low Channel Vertical

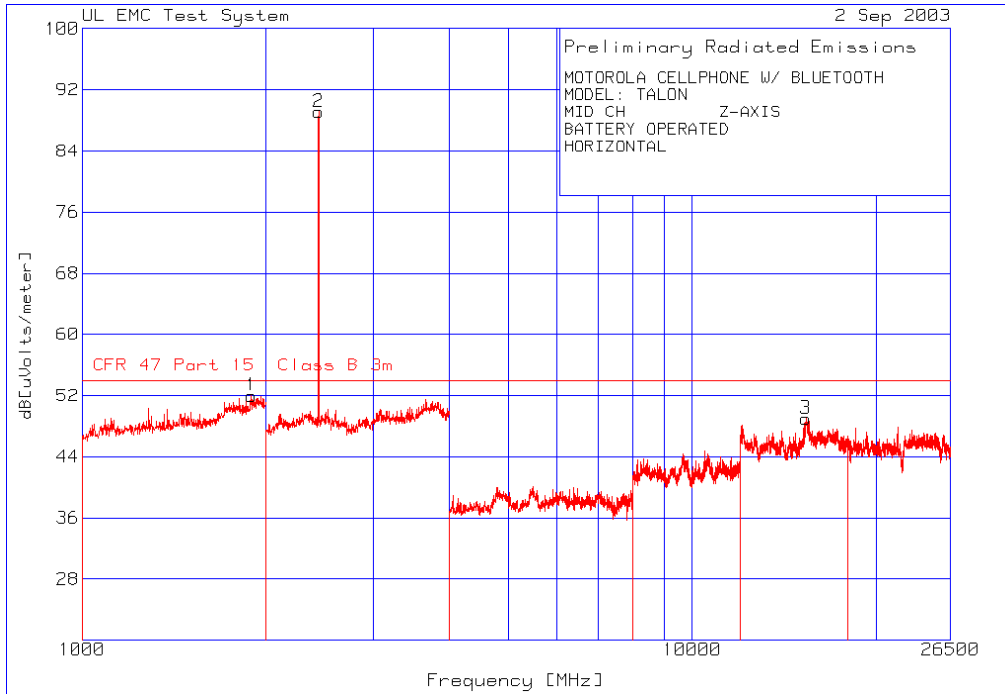


1-26.5 GHz Mid Channel Horizontal

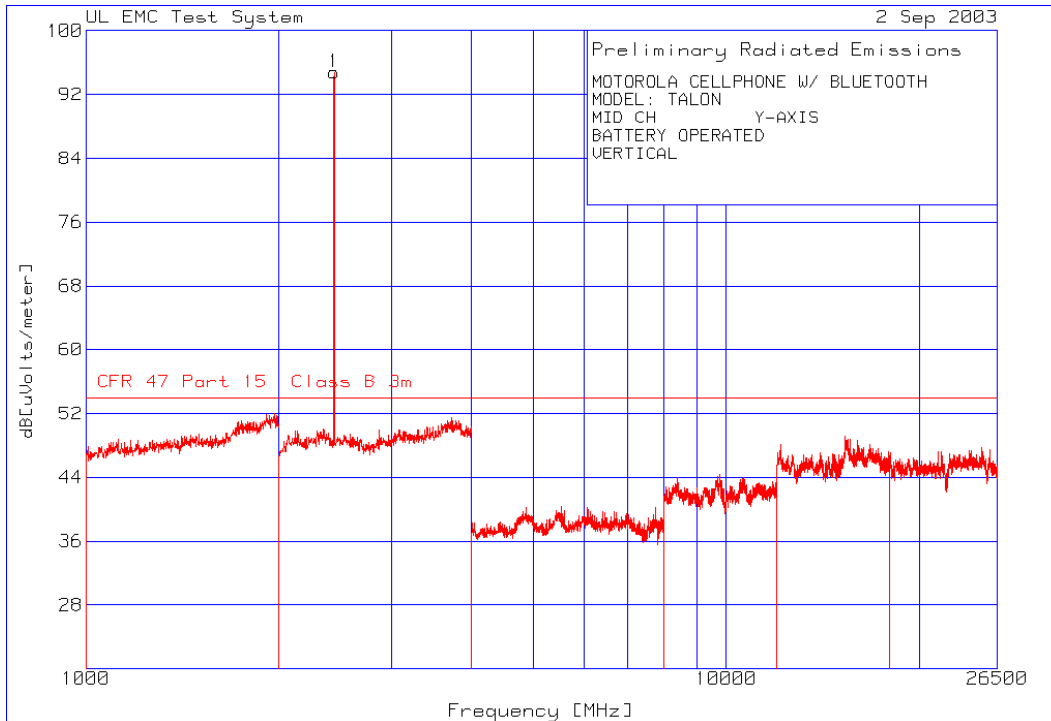

1-26.5 GHz Mid Channel Vertical

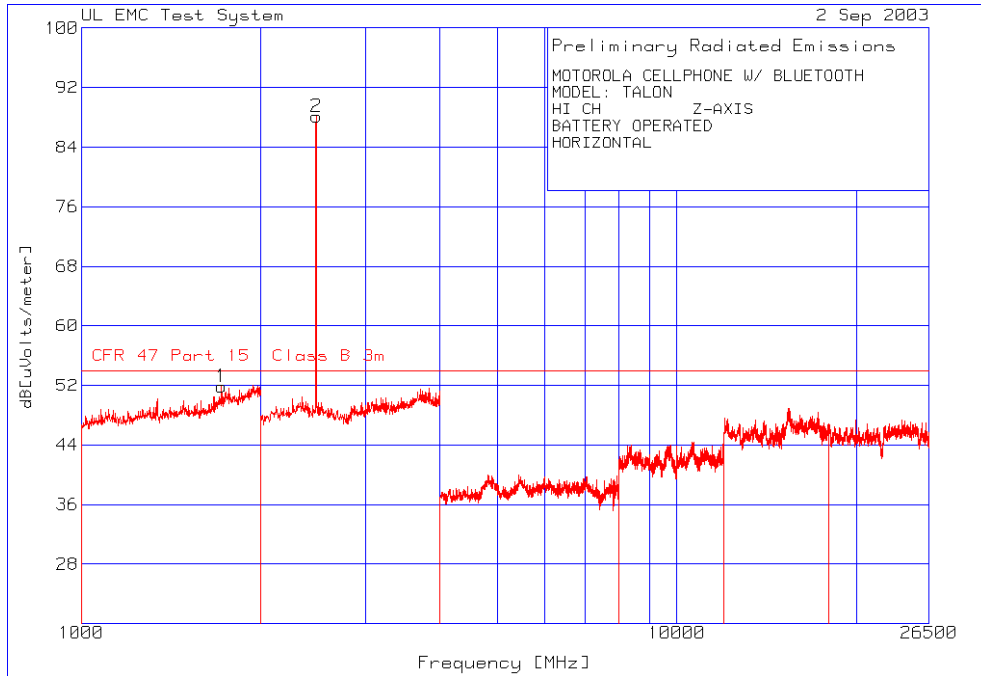

1 – 26.5 GHz High Channel Horizontal

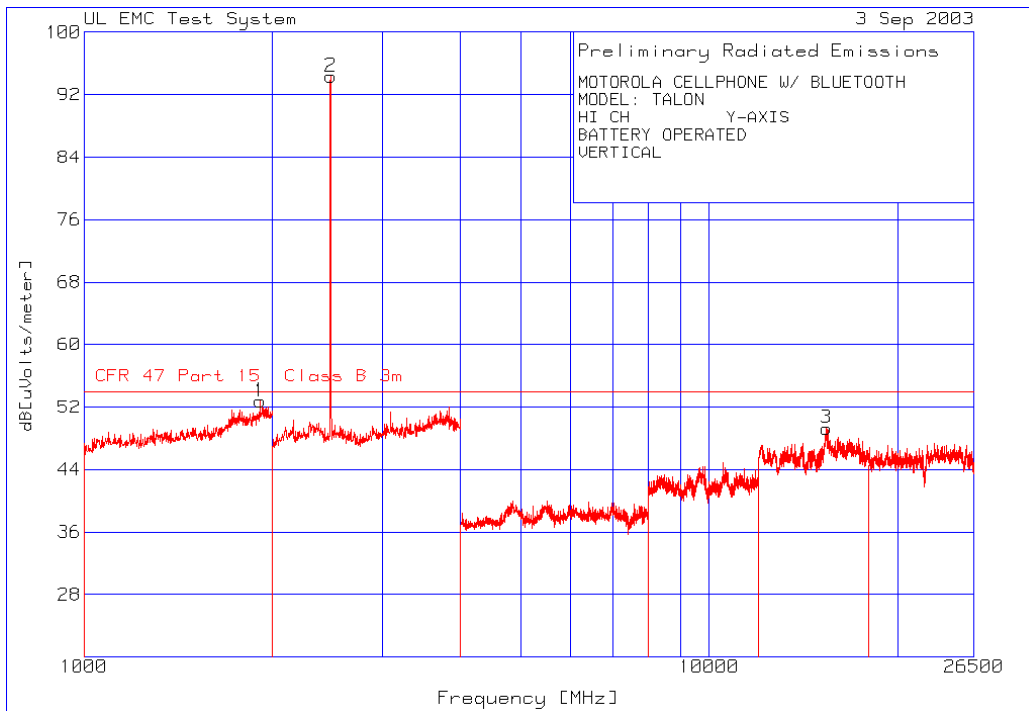

1-26.5 GHz High Channel Vertical


PEAK OUTPUT POWER

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results

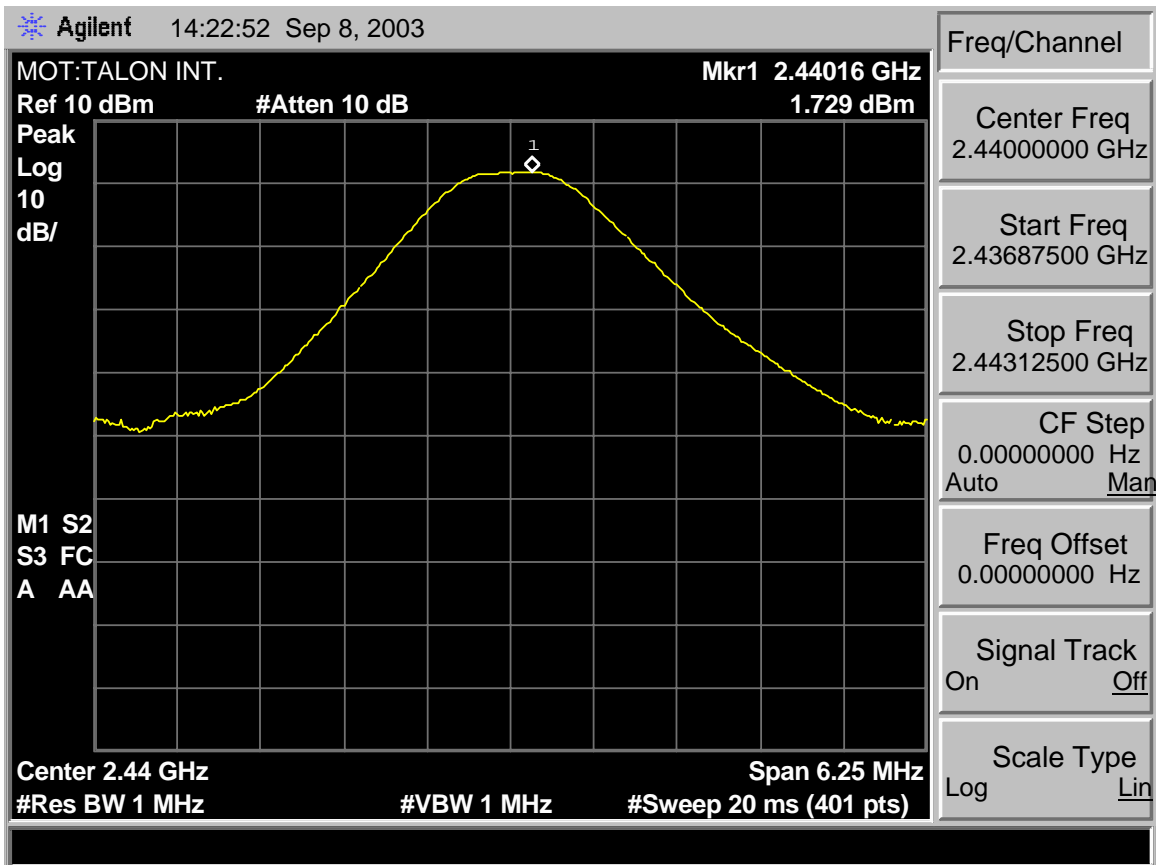

Peak Output Power


BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS

CFR 47 Part 15.247


Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


Measurement Results

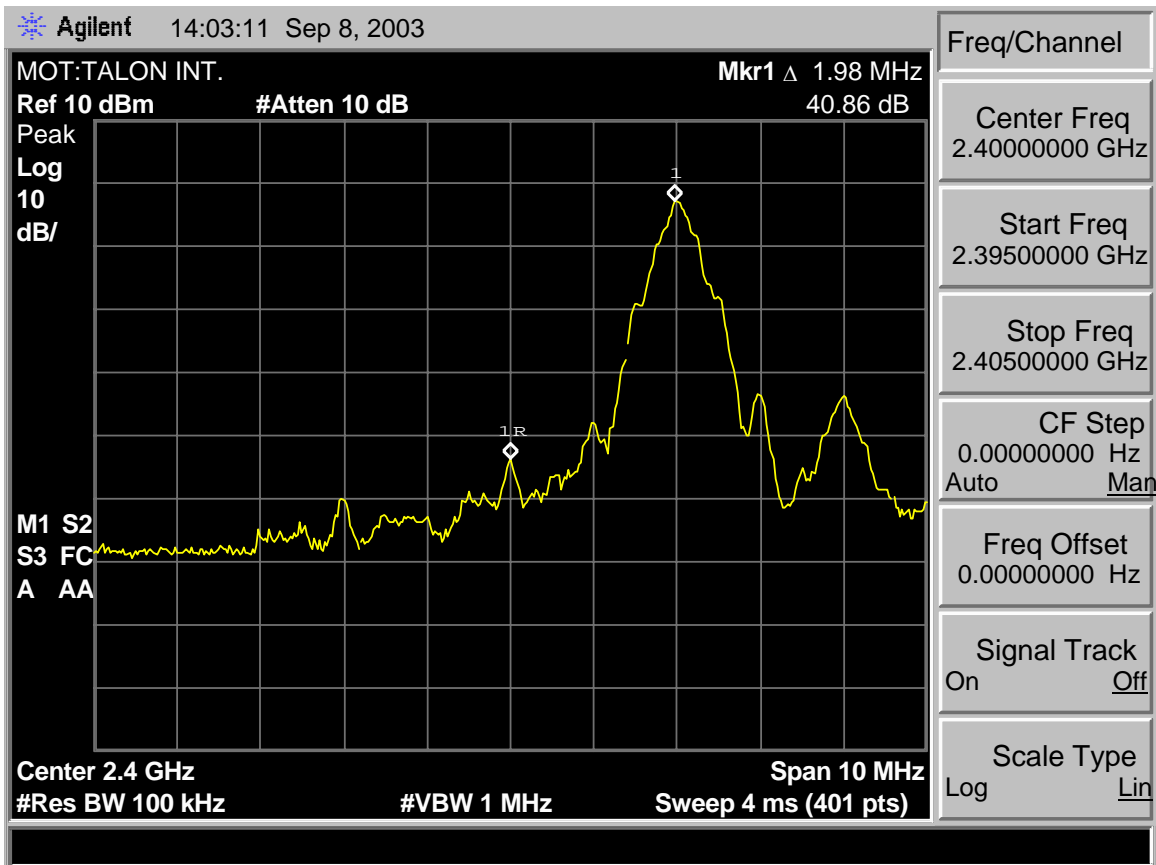


Low Band Edge Hopping Disabled

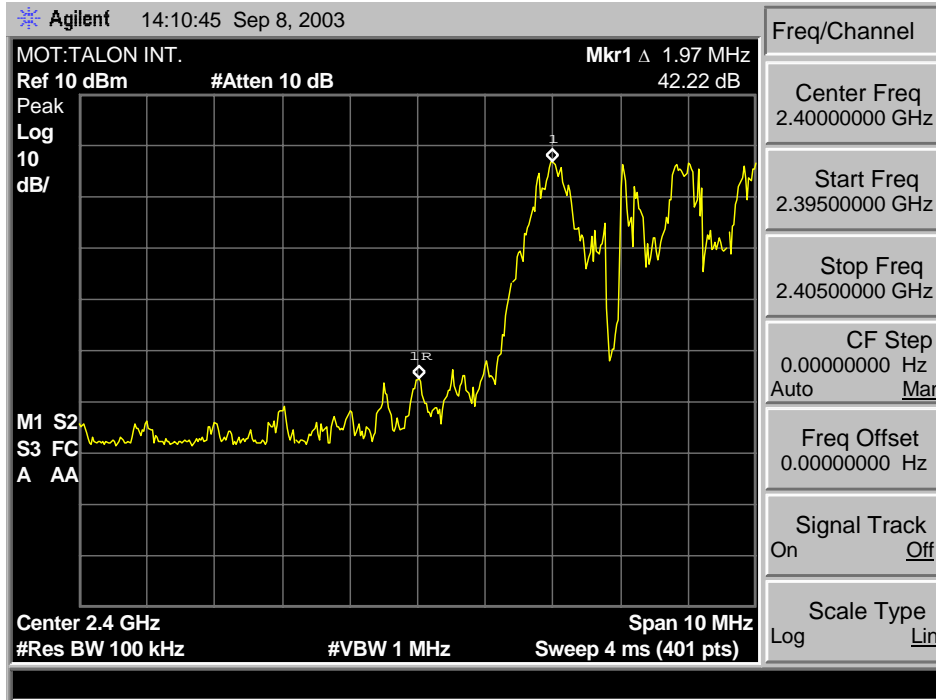

Low Band Edge with Hopping Enabled

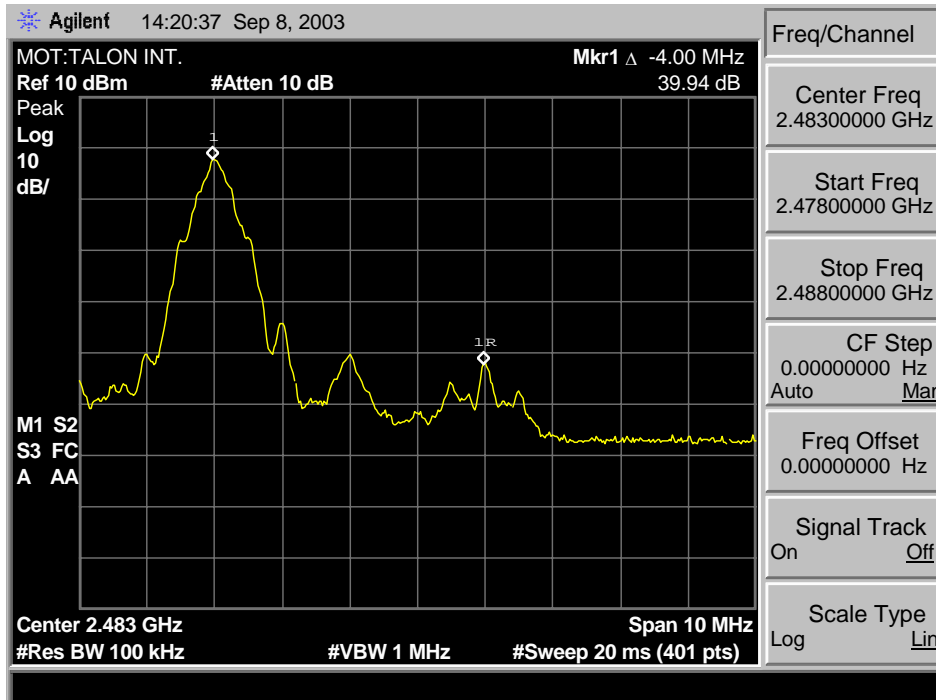

High Band Edge Hopping Disabled

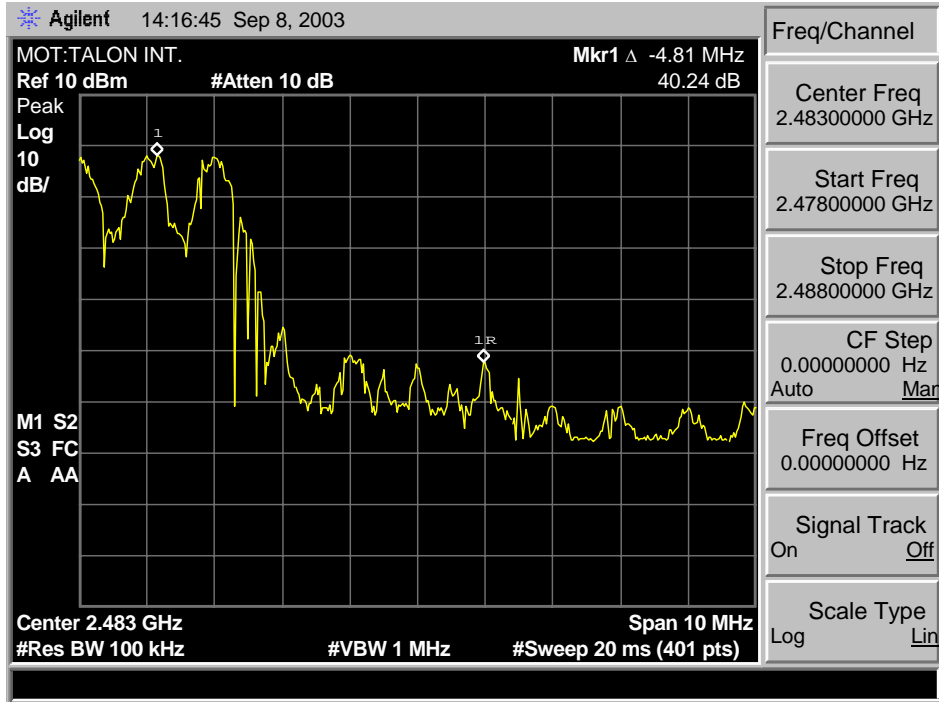

High Band Edge Hopping Enabled

SPURIOUS RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


Attached

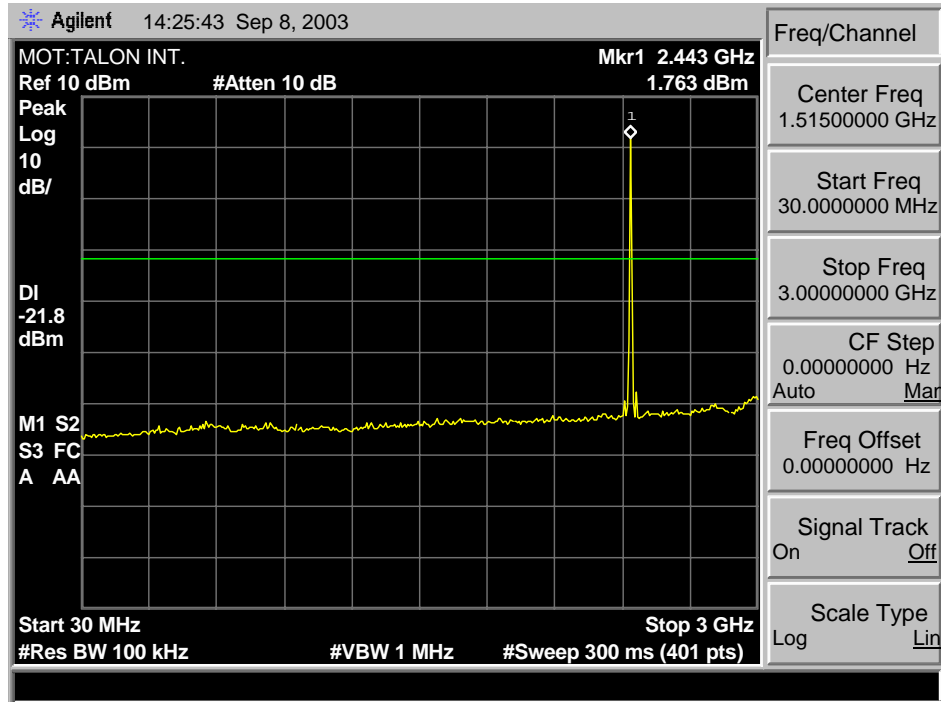


Conducted Spurious Emissions 30-3000MHz

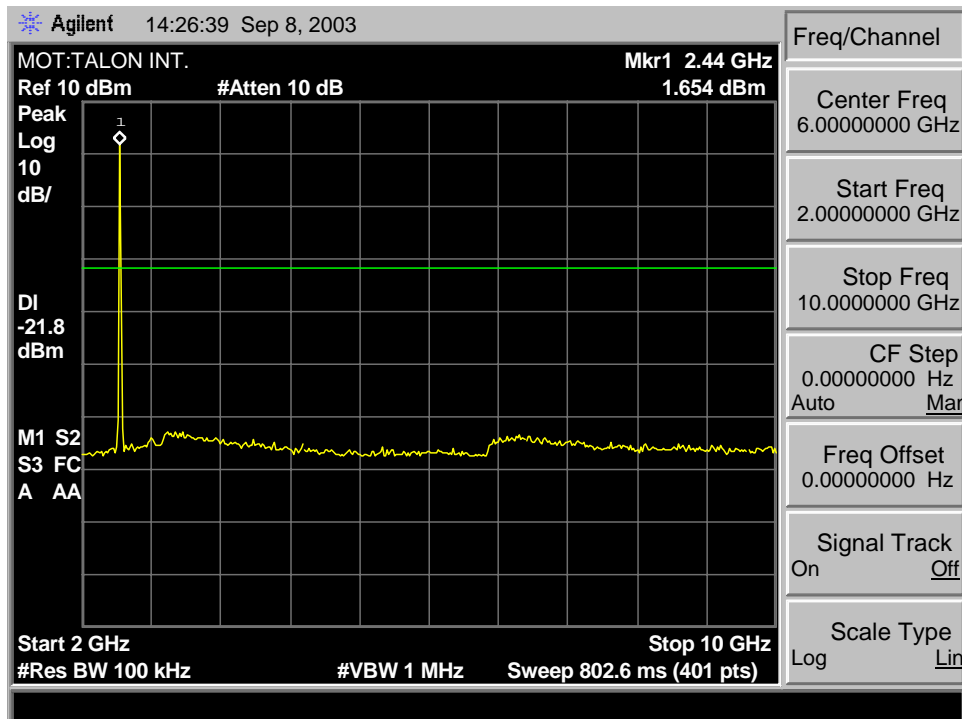

Conducted Spurious Emissions 2-10GHz

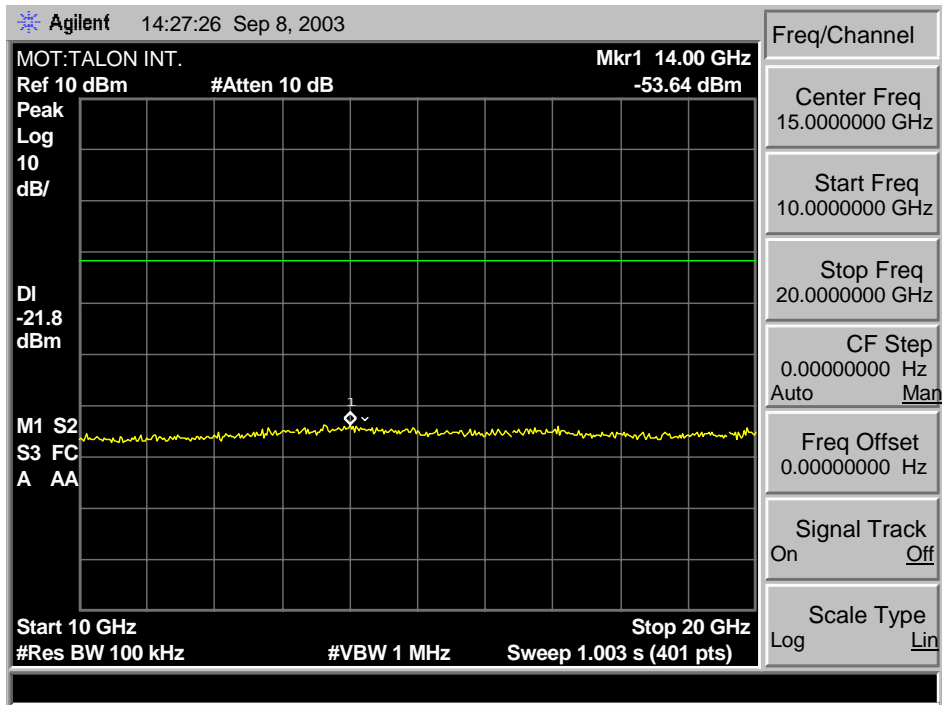


Conducted Spurious Emissions 10-20GHz

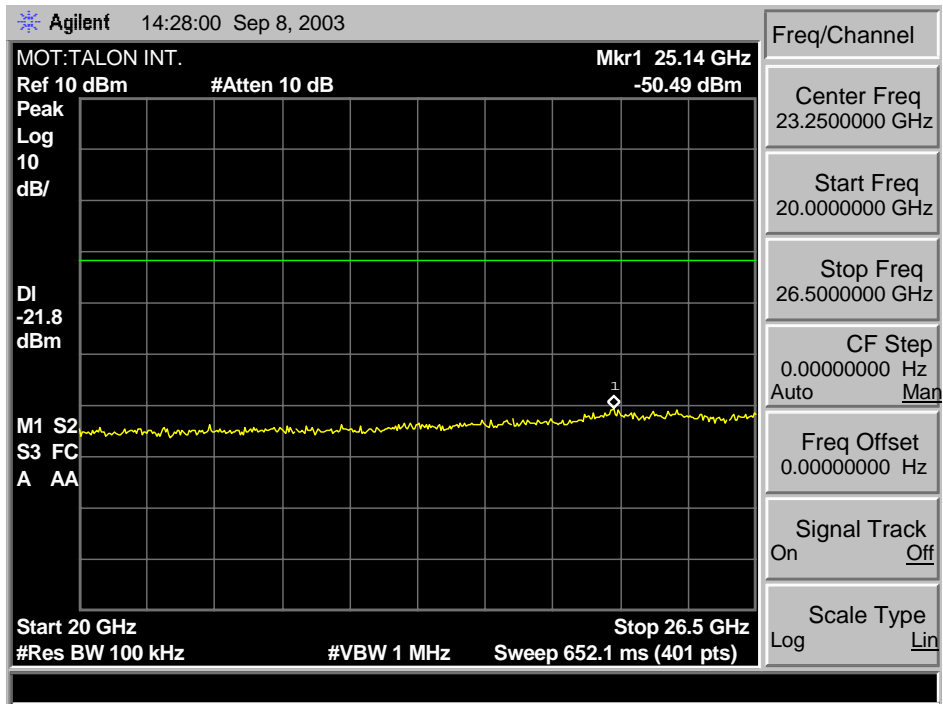


Conducted Spurious Emissions 20-26.5GHz

Appendix A – Radiated Emissions Test Setup Photos

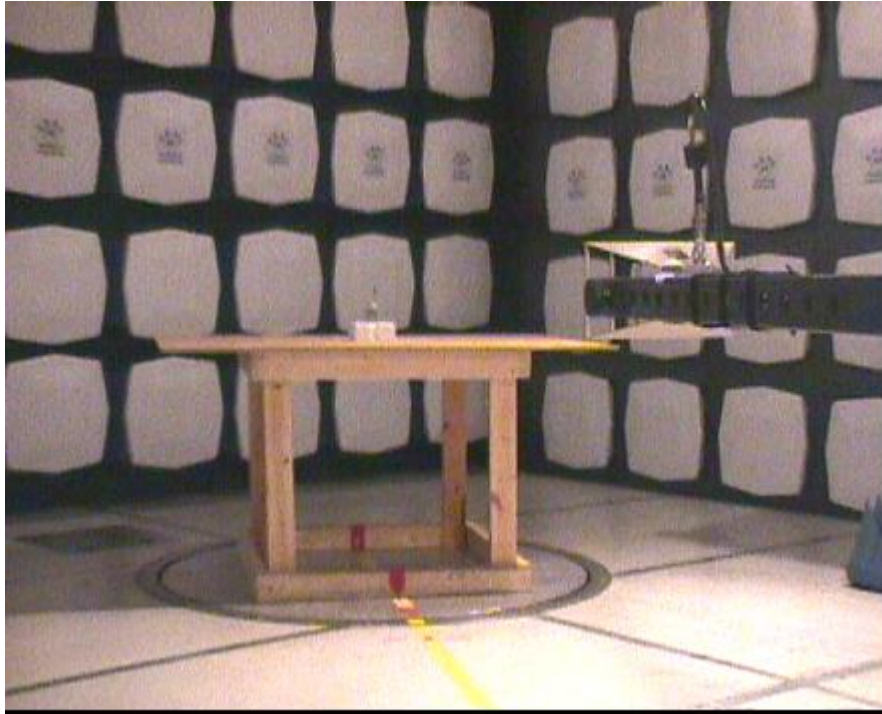

A.1 Radiated Emissions Measurement

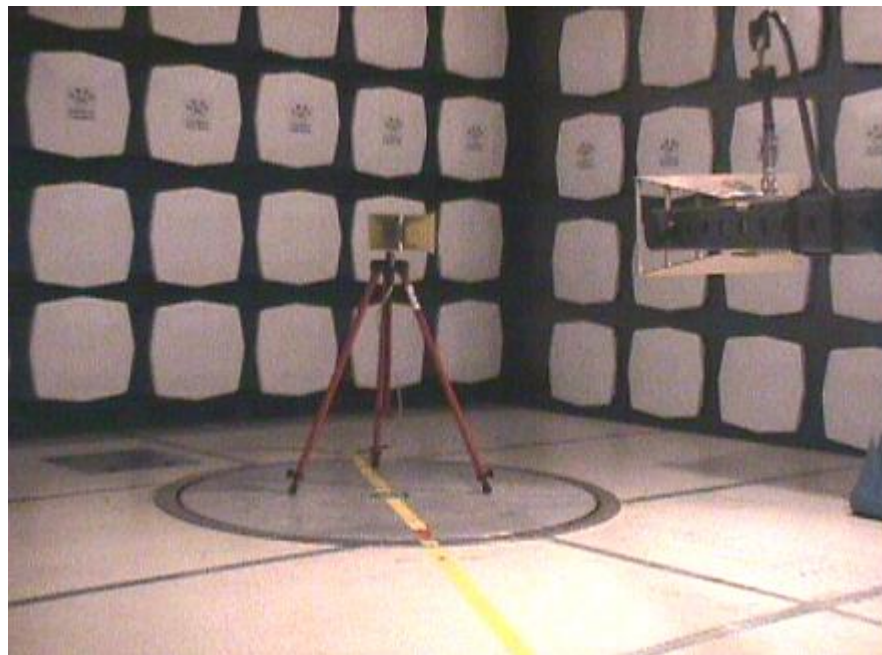

A.2 Substitution Measurement

End of Test Report