



MOTOROLA

Exhibit 11: SAR Test Report IHDT6FN1

Date of test: 04/23/2005 to 05/12/2005
Date of Report: 05/13/2005

Laboratory: Motorola Personal Communications Sector Product Safety & Compliance Laboratory
 600 N. US Highway 45
 Room: MW113
 Libertyville, Illinois 60048

Test Responsible: Albert Patapack
 Senior Staff Engineer

Accreditation: This laboratory is accredited to ISO/IEC 17025-1999 to perform the following tests:



<p><u>Tests:</u> Electromagnetic Specific Absorption Rate</p> <p>Simulated Tissue Preparation RF Power Measurement</p>	<p><u>Procedures:</u> ANSI/IEEE C95.1-1992, 1999 (SAR) IEEE C95.3-1991 IEEE 1528, IEC 62209-1 FCC OET Bulletin 65 (<i>including Supplements A, B, C</i>) Australian Communications Authority Radio Communications (Electromagnetic Radiation – Human Exposure) Standard 1999 CENELEC EN 50361 (2001) APP-0247 DOI-0876, 0900, 0902, 0904, 0915</p>
--	--

On the following products or types of products:
 Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

A2LA certificate #1651-01

Statement of Compliance: Motorola declares under its sole responsibility that portable cellular telephone FCC ID IHDT6FN1 to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093). It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2005
 This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. INTRODUCTION3

2. DESCRIPTION OF THE DEVICE UNDER TEST.....3

2.1 Antenna description3

2.2 Device description.....3

3. TEST EQUIPMENT USED.....4

3.1 Dosimetric System4

3.2 Additional Equipment.....4

4. ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID5

5. SYSTEM ACCURACY VERIFICATION.....5

6. TEST RESULTS.....6

6.1 Head Adjacent Test Results.....7

6.2 Body Worn Test Results9

APPENDIX 1: SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION11

APPENDIX 2: SAR DISTRIBUTION PLOTS FOR PHANTOM HEAD ADJACENT USE12

APPENDIX 3: SAR DISTRIBUTION PLOTS FOR BODY WORN CONFIGURATION13

APPENDIX 4: PROBE CALIBRATION CERTIFICATE14

APPENDIX 5: MEASUREMENT UNCERTAINTY BUDGET.....15

APPENDIX 6: PHOTOGRAPHS OF DEVICE UNDER TEST.....18

1 Introduction

The Motorola Personal Communications Sector Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of portable cellular phone (FCC ID IHDT6FN1). The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with FCC OET Bulletin 65 Supplement C 01-01.

2 Description of the Device Under Test

2.1 Antenna description

Type	External	
Location	Upper Right Corner	
Dimensions	Length	24mm
	Width	10mm
Configuration	Helix	

2.2 Device description

FCC ID Number	IHDT6FN1					
Serial number	356483000000073					
Mode(s) of Operation	GSM 900	GSM 1800	GSM 1900	GPRS 900	GPRS 1800	GPRS 1900
Modulation Mode(s)	GSM	GSM	GSM	GSM	GSM	GSM
Maximum Output Power Setting	32.50 dBm	29.50 dBm	29.50 dBm	32.50 dBm	29.50 dBm	29.50 dBm
Duty Cycle	1:8	1:8	1:8	1:8	1:8	1:8
Transmitting Frequency Rang(s)	880.2-914.8MHz	1710.2-1784.8MHz	1850.20 – 1909.80MHz	880.2-914.8MHz	1710.2-1784.8MHz	1850.20 – 1909.80MHz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype					
Device Category	Portable					
RF Exposure Limits	General Population / Uncontrolled					

3 Test Equipment Used

3.1 Dosimetric System

The Motorola Personal Communications Sector Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.4) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall RSS uncertainty of the measurement system is ±11.7% (K=1) with an expanded uncertainty of ±23.0% (K=2). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg. The list of calibrated equipment used for the measurements is shown below.

Description	Serial Number	Cal Due Date
DASY3 DAE V1	316	01/13/2006
	365	09/22/2005
E-Field Probe ET3DV6	1398	02/24/2006
	1514	07/22/2005
Dipole Validation Kit, D1800V2	259tr	
	272tr	
S.A.M. Phantom used for 1900MHz	TP-1250	
	TP-1154	

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04843	10/25/2005
	3847A04832	09/03/2005
Power Meter E4419B	GB39511082	12/16/2005
	GB39511088	12/16/2005
Power Sensor #1 - E9301A	US39210929	07/21/2005
	US39210915	09/16/2005
Power Sensor #2 - E9301A	US39210930	07/21/2005
	US39210916	09/16/2005
Network Analyzer HP8753ES	US39171846	09/03/2005
Dielectric Probe Kit HP85070C	US99360070	

4 Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the HP85070 Dielectric Probe Kit. These values, along with the temperature of the tissue simulate are shown in the table below. The recommended limits for maximum permittivity and minimum conductivity are also shown. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. It is seen that the measured parameters are satisfactory for compliance testing.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (°C)
1880	Head	Measured, 04/23/2005	38.2	1.45	20.0
		Measured, 05/01/2005	38.7	1.44	20.3
		Measured, 05/03/2005	38.4	1.45	19.8
		Recommended Limits	40.0 ±5%	1.40 ±5%	18-25
	Body	Measured, 04/23/2005	51.6	1.59	19.6
		Measured, 05/12/2005	51.2	1.59	20.1
		Recommended Limits	53.3 ±5%	1.52 ±5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	800MHz Head	800MHz Body	1900MHz Head	1900MHz Body
Sugar	57.0	44.9	--	--
DGBE	--	--	47.0	30.80
Water	40.45	53.06	52.8	68.91
Salt	1.45	0.94	0.2	0.29
HEC	1.0	1.0	--	--
Bact.	0.1	0.1	--	--

5 System Accuracy Verification

A system accuracy verification of the DASY4.4 was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within center section of the SAM phantom.

A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR indicated in Section 8.3.7 Reference SAR Values in IEEE 1528. These tests were done at 900MHz and/or 1800MHz. These frequencies are within 100MHz of the mid-band frequency of the test device. This is within the allowable window given in Supplement C 01-01 Appendix D System Verification section item #5. The test was conducted on the same days as the measurement of the DUT. Recommended limits for maximum permittivity, minimum conductivity are shown in the table below. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. The obtained results from the system accuracy verification are displayed in the table below. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ±0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1. SAR values are normalized to 1W forward power delivered to the dipole.

f (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ϵ_r	σ (S/m)		
1800	Measured, 04/23/2005	37.63	38.7	1.37	21.0	20.0
	Measured, 05/01/2005	36.9.	39.2	1.35	21.0	19.1
	Measured, 05/03/2005	38.05	38.8	1.36	20.0	20.0
	Measured, 05/12/2005	36.18	39.7	1.34	22.0	20.5
	Recommended Limits	38.1	40.0 ±5%	1.4 ±5%	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	1398	1810	5.12	8 of 9
	1514	1800	5.03	7 of 8

6 Test Results

The test sample was operated in a test mode that allows control of the transmitter without the need to place actual phone calls. For the purposes of this test the unit is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in OET Bulletin 65 Supplement C 01-01. Motorola also followed the requirements in Supplement. C / Appendix D: SAR Measurement Procedures, section titled “*Devices Operating Next To A Person’s Ear* “. These directions state “The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).“

The DASY v4.4 SAR measurement system specified in section 3.1 was utilized within the intended operations as set by the SPEAG™ setup. The phone was positioned into the measurement configurations using the positioner supplied with the DASY v4.4 SAR measurement system. The measured dielectric constant of the material used for the positioner is less than 2.9 and the loss tangent is less than 0.02 (± 30%) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and use for measurements. The grid spacing of the course scan was set to 15cm as shown in the SAR plots included in appendix 2 and 3. Please refer to the DASY manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone (FCC ID IHDT6FN1) has the following battery options:

- SNN5683A - 780 mAH Battery
- SNN5683A 2 layer PCB - 780 mAH Battery
- SNN5704C - 700 mAH Battery


The battery with the highest capacity is the SNN5683A. This battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configuration that resulted in the highest SAR values were tested using the other batteries listed above.

6.1 Head Adjacent Test Results

To aid in positioning repeatability, the ear reference line of the device and the axis reference line of the device have been physically added using a non-metallic marker.

- Per Figure 1, the "Ear Reference Line" is centered vertically through the center of the listening area (as defined by the speaker holes in the housing).
- The "Axis Reference Line" bisects the front surface of the device at its top and bottom edges.
- The intersection of these two lines defines the location of the "Ear Reference Point".

The lines drawn on the device extended to the outside edges, as shown in blue in the figure below, & wrap around the sides of the device.

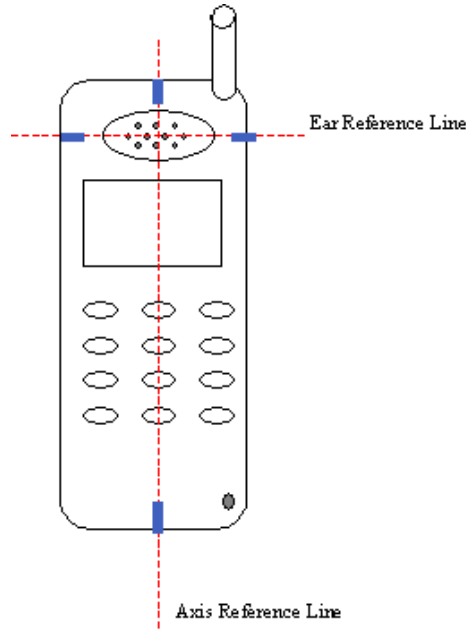

The SAR results shown in tables 1 through 3 are maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. The test conditions indicated as bold numbers in the following table are included in Appendix 2

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since same phantoms and tissue simulate are used for the system accuracy verification as the device SAR measurements, the Z-axis scans included in within Appendix 1 are applicable for verification of tissue simulate depth to be 15.0cm ±0.5cm. All other test conditions measured lower SAR values than those included in Appendix 2.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	1398	1810	5.12	8 of 9
	1514	1800	5.03	7 of 8

f (MHz)	Description	Conducted Output Power (dBm)	Cheek / Touch Position							
			Left Head				Right Head			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 1900MHz	Channel 512	29.48	1.00	-0.13	1.03	19.4	1.01	0.00	1.01	19.3
	Channel 661	29.49	1.06	-0.16	1.10	19.4	1.07	0.00	1.07	19.3
	Channel 810	29.49	1.13	-0.06	1.15	19.4	1.12	-0.02	1.13	19.3

Table 1: SAR measurement results for the portable cellular telephone FCC ID IHDT6FN1 at highest possible output power. Measured against the head in the Cheek/Touch Position.

f (MHz)	Description	Conducted Output Power (dBm)	15° Tilt Position							
			Left Head				Right Head			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 1900MHz	Channel 512	29.48								
	Channel 661	29.49	0.255	0.07	0.26	19.4	0.207	-0.03	0.21	19.3
	Channel 810	29.49								

Table 2: SAR measurement results for the portable cellular telephone FCC ID IHDT6FN1 at highest possible output power. Measured against the right head in the 15° Tilt Position.

f (MHz)	Description	Conducted Output Power (dBm)	Cheek / Touch Position							
			Left Head with SNN5683A 2 layer PCB Battery				Left Head with SNN5704C Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 1900MHz	Channel 512	29.48	1.01	0.00	1.01	19.2	1.00	-0.01	1.00	20.0
	Channel 661	29.49	1.04	-0.04	1.05	19.2	1.00	-0.03	1.01	20.0
	Channel 810	29.49	1.08	-0.02	1.09	20.0	1.01	-0.02	1.01	20.0

Table 3: SAR measurement results for the portable cellular telephone FCC ID IHDT6FN1 at highest possible output power. Measured against the head in the Cheek/Touch Position.

6.2 Body Worn Test Results

The SAR results shown in tables 4 through 6 are the maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. The test conditions indicated as bold numbers in the following table are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories’, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There are two Body-Worn Accessories available for this phone:

A Leather Pouch with Belt Clip: Model #CHYN4459A

A Leather Pouch with Belt Clip: Model #CHYN4629A

Both accessories were tested. In addition, the phone was tested in a body worn configuration, per Supplement C, by using a separation distance of 15mm between the phone and the phantom.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	1398	1810	4.65	8 of 9
	1514	1800	4.46	7 of 8

f (MHz)	Description	Conducted Output Power (dBm)	Body Worn Position							
			CHYN4459A				CHYN4629A			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 1900MHz	Channel 512	29.48								
	Channel 661	29.49	0.259	-0.11	0.27	20.1	0.356	-0.01	0.36	20.1
	Channel 810	29.49								

Table 4: SAR measurement results for the portable cellular telephone FCC ID IHDT6FN1 at highest possible output power. Measured against the body.

f (MHz)	Description	Conducted Output Power (dBm)	Body Worn Position							
			Front of Phone 15mm Away from Phantom				Back of Phone 15mm Away from Phantom			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 1900MHz	Channel 512	29.48								
	Channel 661	29.49	0.183	-0.14	0.19	19.5	0.293	0.22	0.29	19.5
	Channel 810	29.49								

Table 5: SAR measurement results for the portable cellular telephone FCC ID IHDT6FN1 at highest possible output power. Measured against the body.

f (MHz)	Description	Conducted Output Power (dBm)	Body Worn Position							
			CHYN4459A & SNN5683A 2 layer PCB Battery				CHYN4459A with SNN5704C Battery			
			Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)	Measured (W/kg)	Drift (dB)	Extrapolated (W/kg)	Simulate Temp (°C)
Digital 1900MHz	Channel 512	29.48								
	Channel 661	29.49	0.375	-0.04	0.38	20.2	0.370	-0.02	0.37	20.2
	Channel 810	29.49								

Table 6: SAR measurement results for the portable cellular telephone FCC ID IHDT6FN1 at highest possible output power. Measured against the body.

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 4/23/2005 6:18:50PM

Test Laboratory: Motorola 042305 1800 MHZ GOOD -1.2%**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2**

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 259tr PM1 Power = 200 mW

Sim.Temp@meas = 20C Sim.Temp@SPC = 20C Room Temp @ SPC = 21C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1;

Medium: VALIDATION Only; Medium parameters used: $\sigma = 1.37$ mho/m, $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1398; ConvF(5.12, 5.12, 5.12); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1154;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 7.08 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.0 V/m; Power Drift = 0.111 dB Peak SAR (extrapolated) = 12.6 W/kg



SAR(1 g) = 7.44 mW/g; SAR(10 g) = 3.99 mW/g Maximum value of SAR (measured) = 8.33 mW/g**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.0 V/m; Power Drift = 0.111 dB Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 7.61 mW/g; SAR(10 g) = 4.08 mW/g Maximum value of SAR (measured) = 8.56 mW/g**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm Maximum value of SAR (measured) = 8.44 mW/g

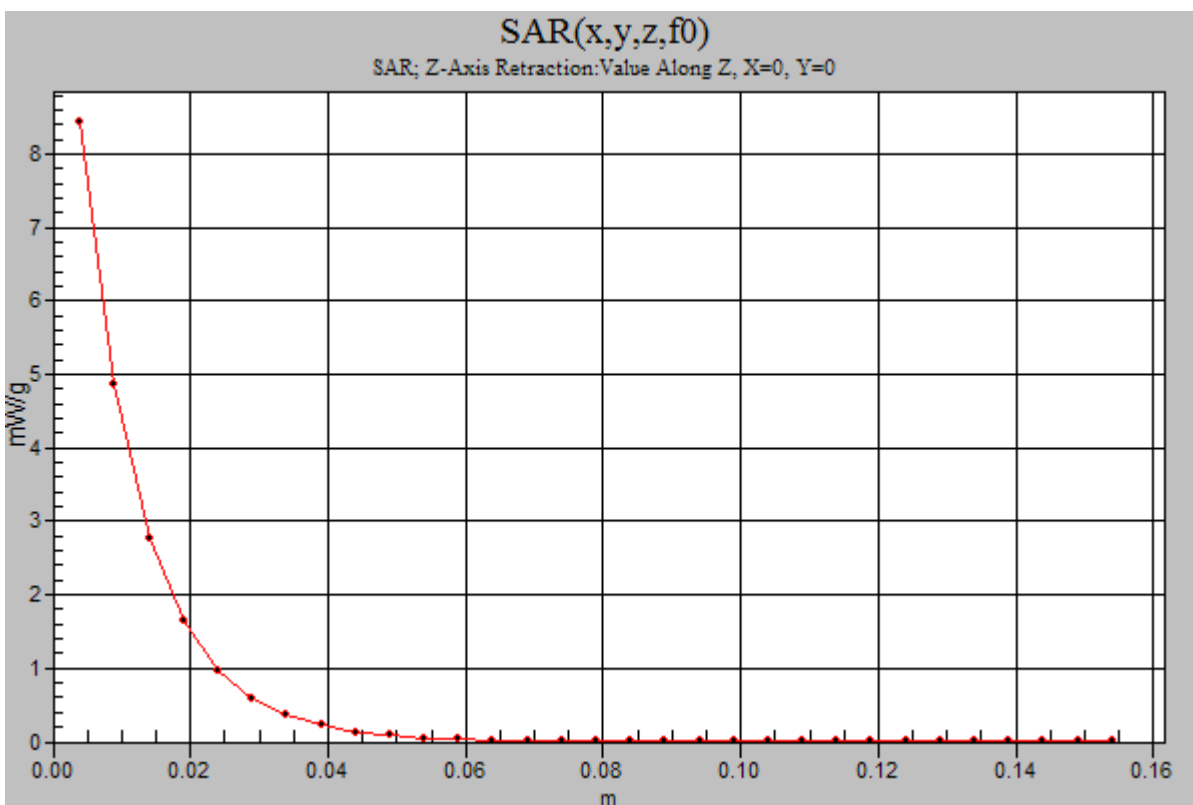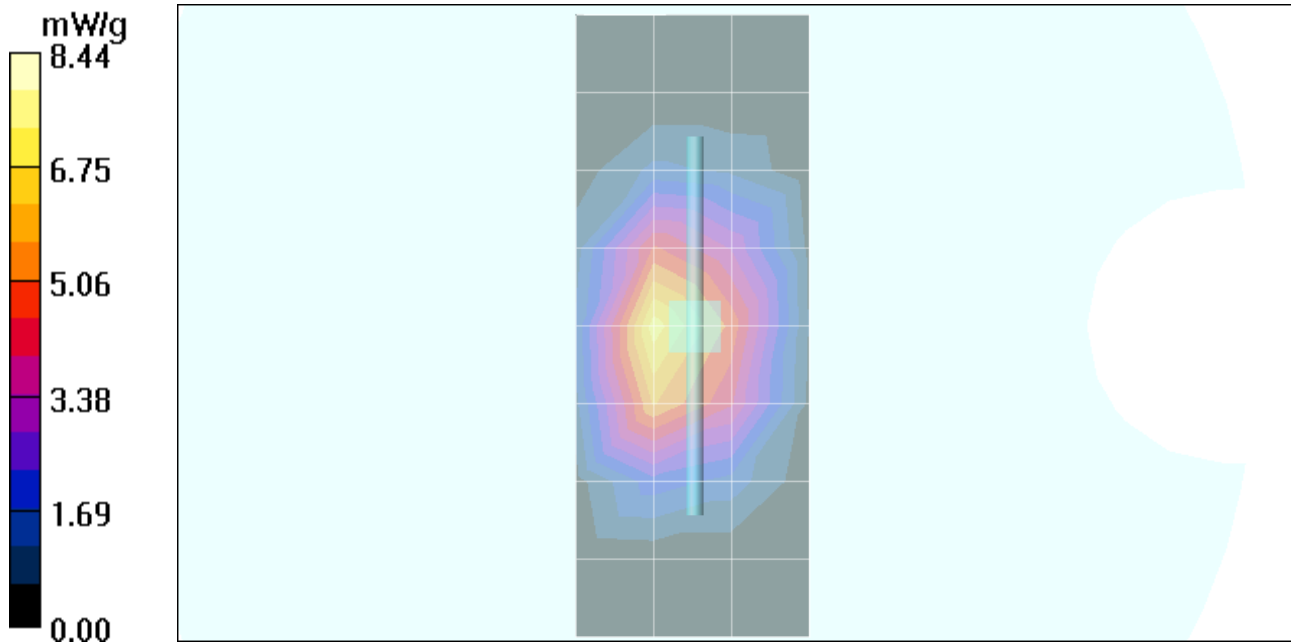

Date/Time: 5/1/2005 8:04:43PM

Test Laboratory: Motorola 050105 1800 MHz GOOD -3.1%**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2**

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272TR PM1 Power = 200 mW

Sim.Temp@meas = 19.3C Sim.Temp@SPC = 19.1C Room Temp @ SPC = 21C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1;

Medium: VALIDATION Only; Medium parameters used: $\sigma = 1.35$ mho/m, $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.03, 5.03, 5.03); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 6.13 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.8 V/m; **Power Drift = 0.01 dB** Peak SAR (extrapolated) = 12.7 W/kg**SAR(1 g) = 7.39 mW/g; SAR(10 g) = 3.95 mW/g** Maximum value of SAR (measured) = 8.31 mW/g**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.8 V/m; **Power Drift = 0.01 dB** Peak SAR (extrapolated) = 12.7 W/kg**SAR(1 g) = 7.38 mW/g; SAR(10 g) = 3.97 mW/g** Maximum value of SAR (measured) = 8.23 mW/g**Daily SPC Check/Z-Axis Retraction (1x1x31):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 8.30 mW/g

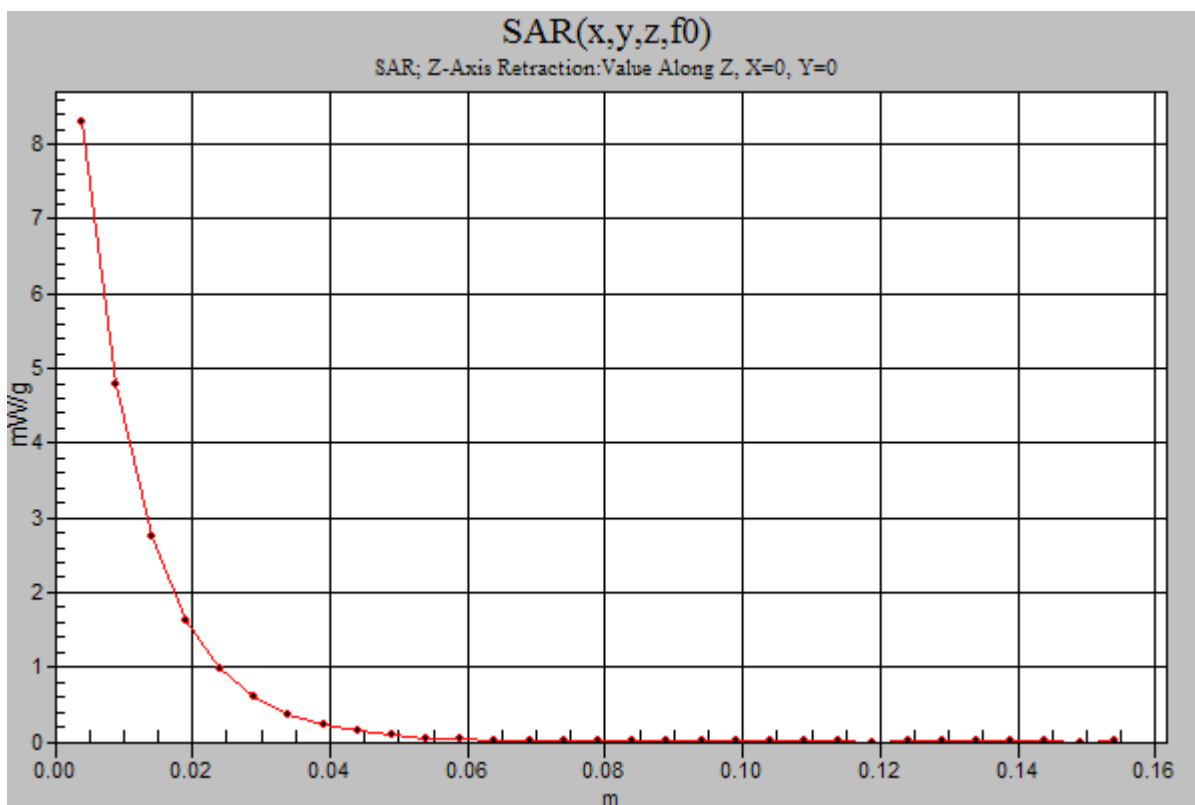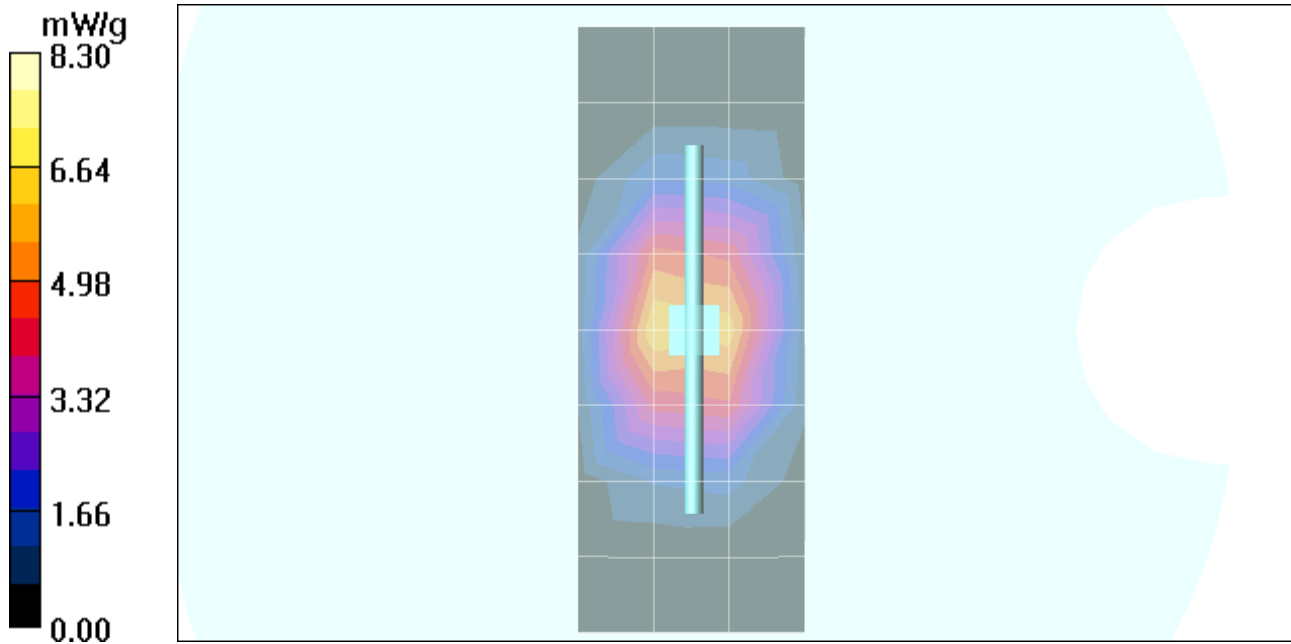

Date/Time: 5/3/2005 8:31:49AM

Test Laboratory: Motorola 050305 1800 MHz GOOD -0.1%**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2**

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272tr PM1 Power = 200mW

[Sim.Temp@meas=20*C](#) Sim.Temp@SPC = 20.*C Room Temp @ SPC = 20*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1;

Medium: VALIDATION Only; Medium parameters used: $\sigma = 1.36$ mho/m, $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.03, 5.03, 5.03); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (9x4x1):



Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 7.32 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.7 V/m; **Power Drift = -0.044 dB** Peak SAR (extrapolated) = 13.3 W/kg
SAR(1 g) = 7.63 mW/g; SAR(10 g) = 4.06 mW/g Maximum value of SAR (measured) = 8.56 mW/g**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**Reference Value = 81.7 V/m; **Power Drift = -0.044 dB** Peak SAR (extrapolated) = 13.2 W/kg
SAR(1 g) = 7.59 mW/g; SAR(10 g) = 4.05 mW/g Maximum value of SAR (measured) = 8.57 mW/g**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm Maximum value of SAR (measured) = 8.55 mW/g

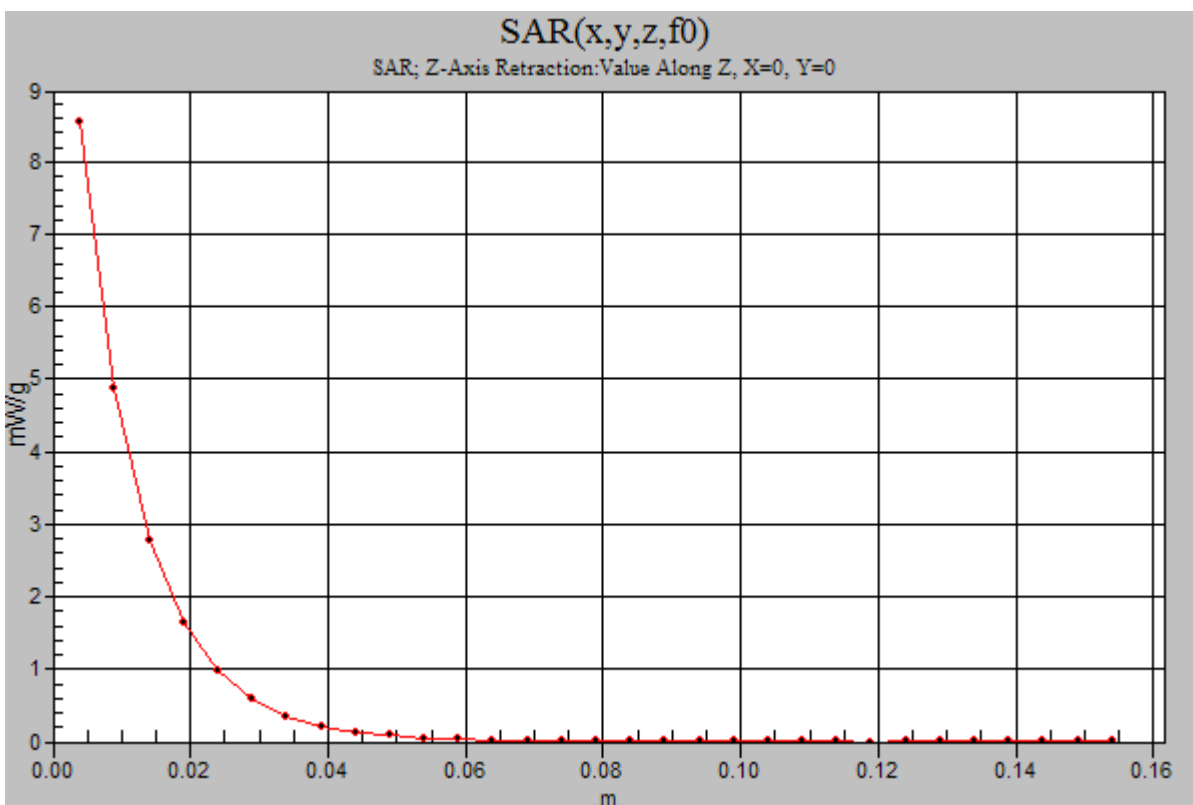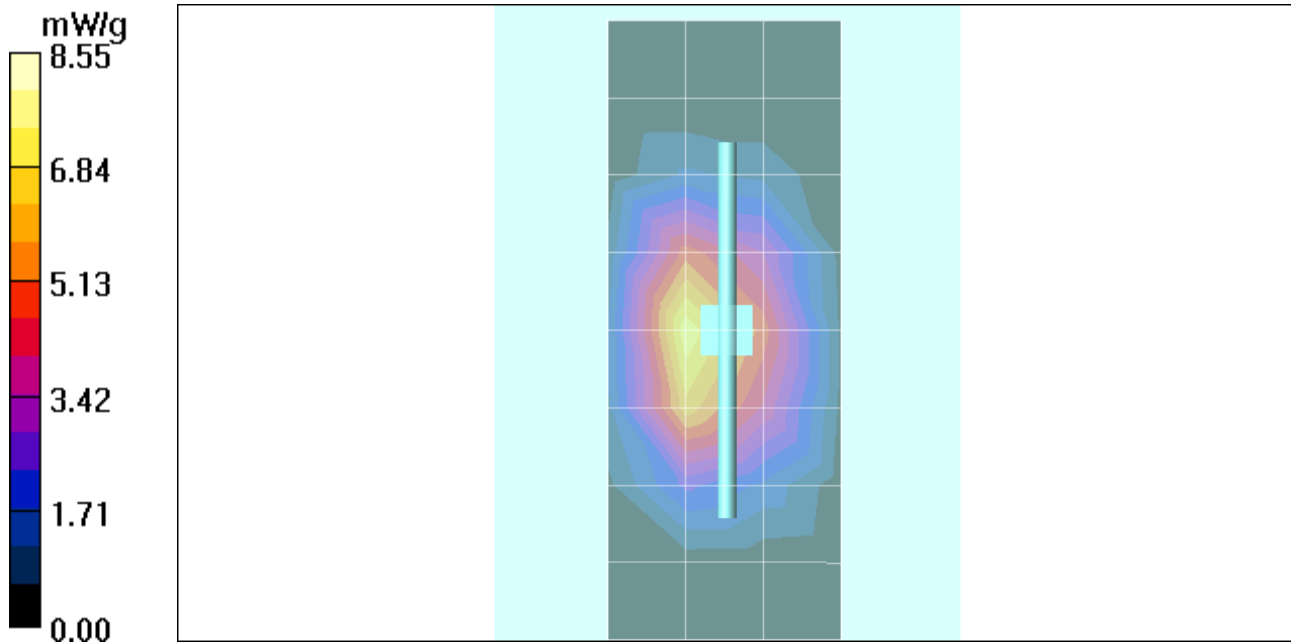

Date/Time: 5/12/2005 8:22:41AM

Test Laboratory: Motorola 051205 1800 MHz GOOD -5.1%**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2**

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272tr PM1 Power = 200mW PM2

Sim.Temp@meas=20.5*C Sim.Temp@SPC = 20.5.*C Room Temp @ SPC = 22*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1;

Medium: VALIDATION Only; Medium parameters used: $\sigma = 1.34$ mho/m, $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.03, 5.03, 5.03); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 6.73 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.7 V/m; **Power Drift = -0.042 dB** Peak SAR (extrapolated) = 12.4 W/kg**SAR(1 g) = 7.21 mW/g; SAR(10 g) = 3.89 mW/g** Maximum value of SAR (measured) = 8.12 mW/g**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.7 V/m; **Power Drift = -0.042 dB** Peak SAR (extrapolated) = 12.5 W/kg**SAR(1 g) = 7.26 mW/g; SAR(10 g) = 3.91 mW/g****Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm Maximum value of SAR (measured) = 8.11 mW/g

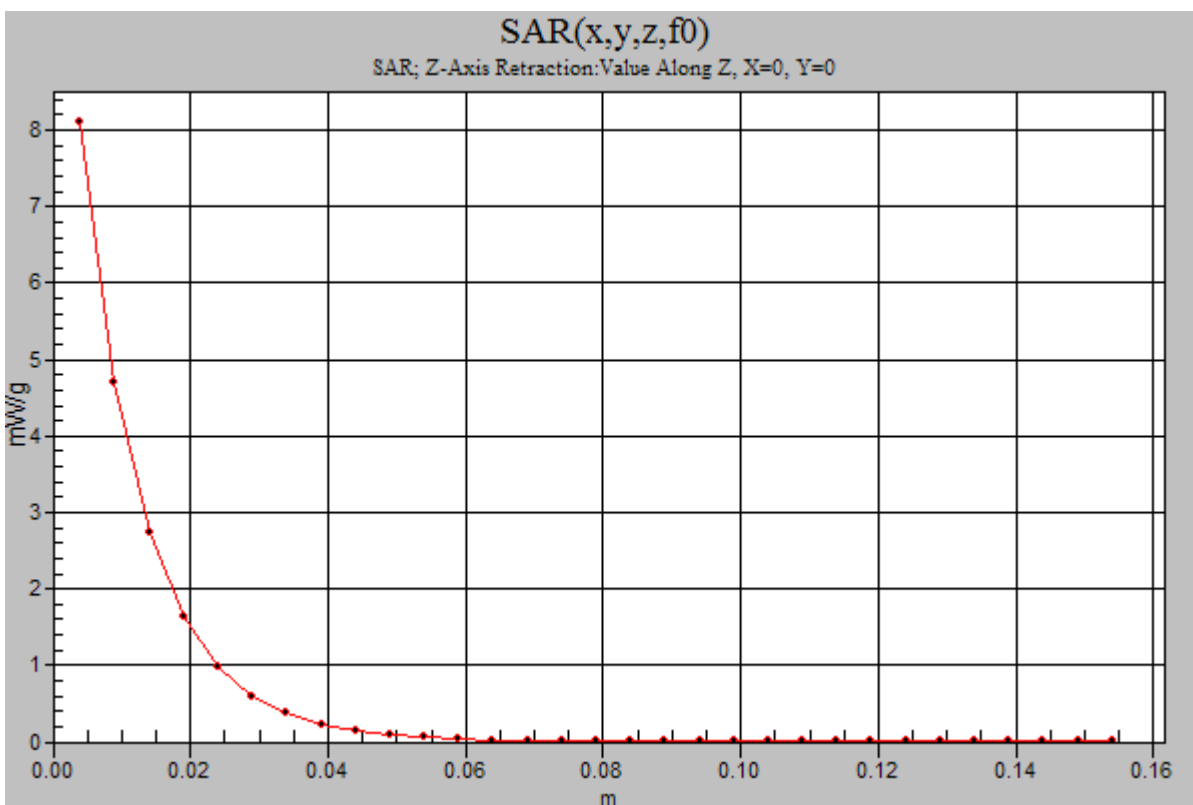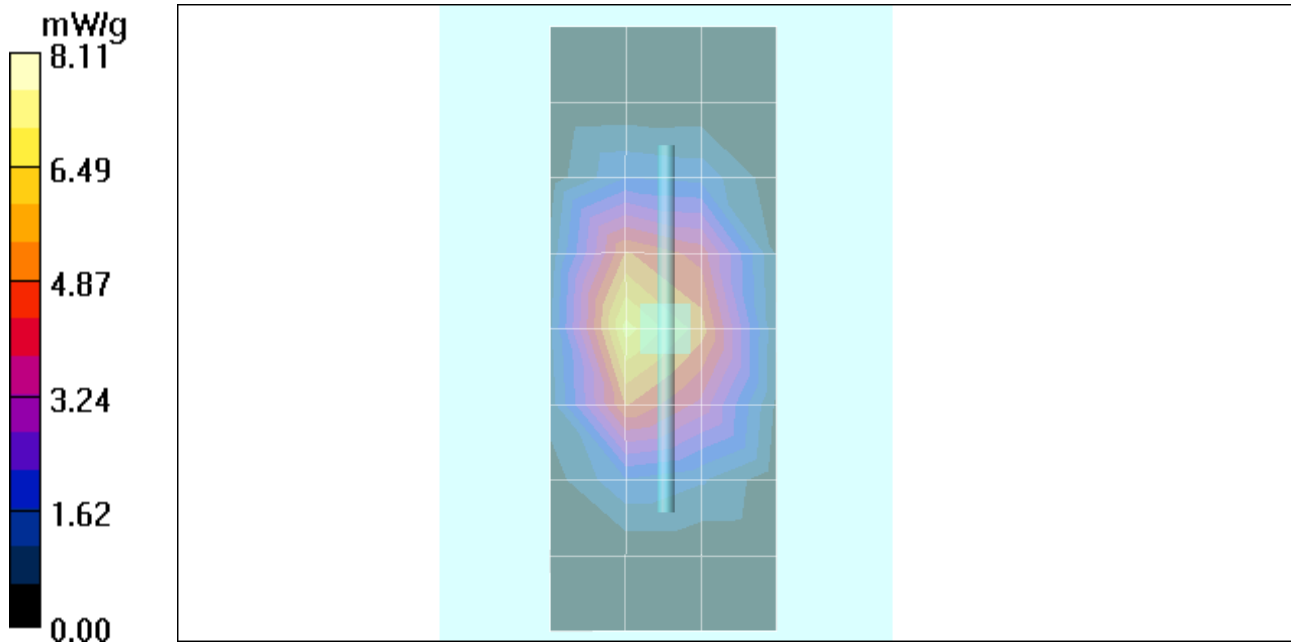

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 4/24/2005 1:18:43AM

Test Laboratory: Motorola 1900 LH Cheek ch810

Serial: 35648300000073

Procedure Notes: Ch# 810 / Pwr Step: 0 Antenna Position: Fixed Accessory Model #: None

Battery Model #: SNN5683A DEVICE POSITION: Cheek

Communication System: GSM 1900; Frequency: 1909.8 MHz; Channel Number: 810; Duty Cycle: 1:8;

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.45$ mho/m, $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1398; ConvF(5.12, 5.12, 5.12); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1154;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Left Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.11 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

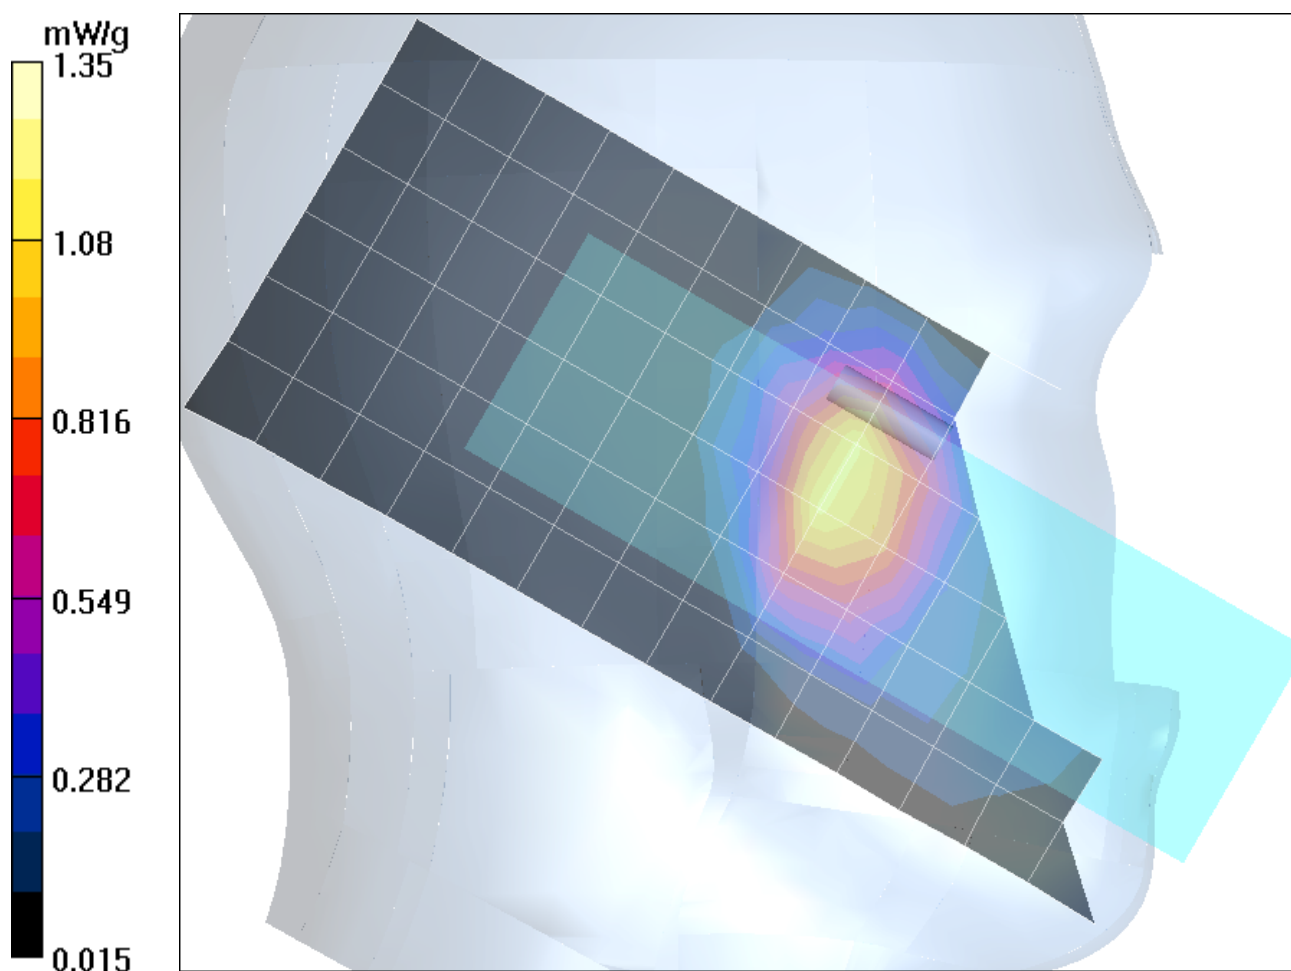Reference Value = 29.8 V/m; **Power Drift = -0.057dB** Peak SAR (extrapolated) = 1.78 W/kg**SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.666 mW/g** Maximum value of SAR (measured) = 1.22 mW/g

Date/Time: 4/24/2005 1:42:16AM

Test Laboratory: Motorola 1900 LH Tilt ch661

Serial: 35648300000073

Procedure Notes: Ch# 661 / Pwr Step: 0 Antenna Position: Fixed Accessory Model #: None

Battery Model #: SNN5683A DEVICE POSITION: Tilted

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.45$ mho/m, $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1398; ConvF(5.12, 5.12, 5.12); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1154;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Left Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.259 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

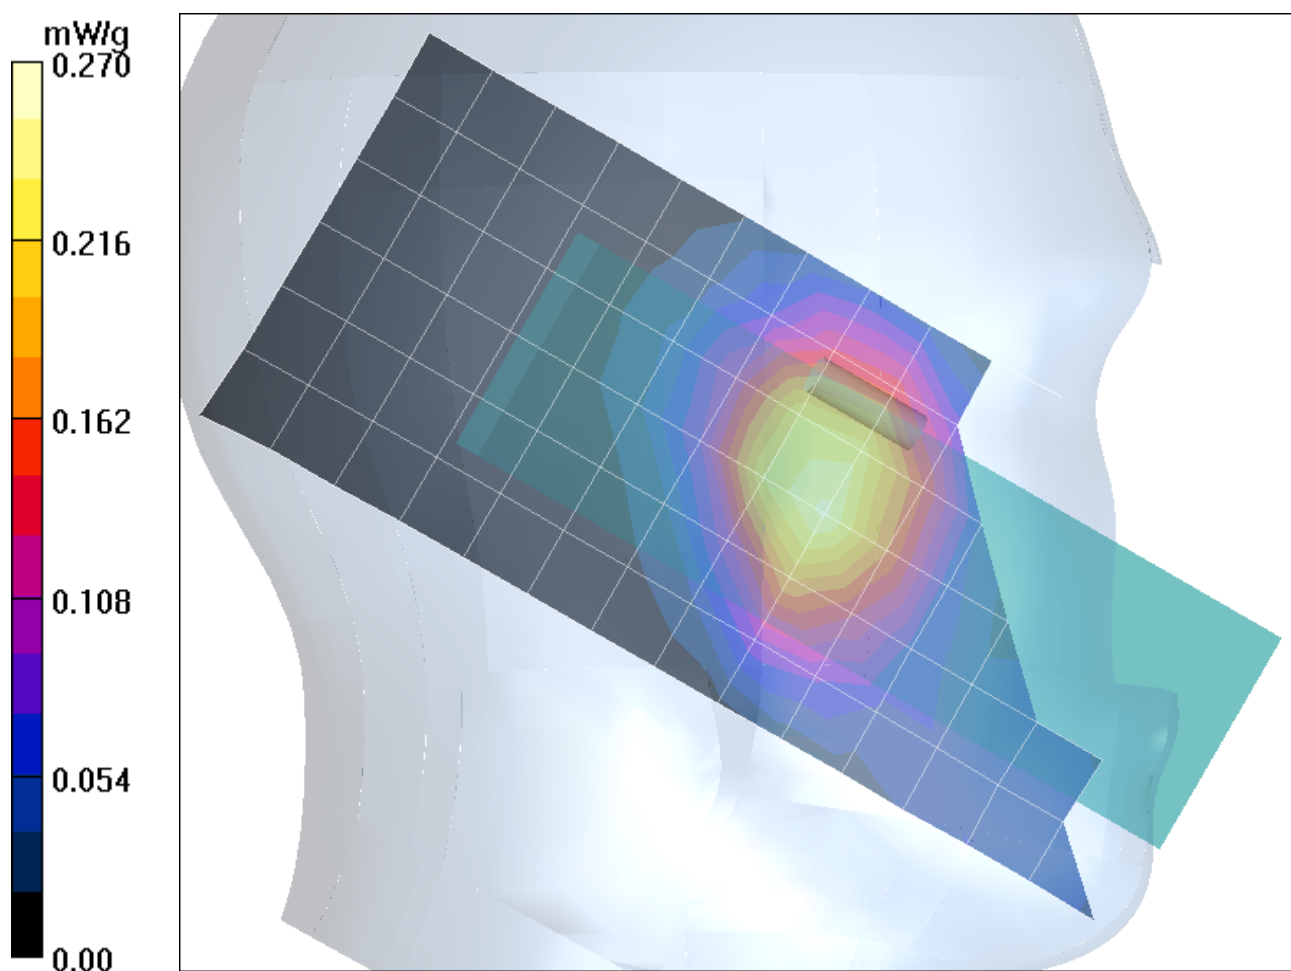Reference Value = 13.4 V/m; **Power Drift = 0.068 dB** Peak SAR (extrapolated) = 0.385 W/kg**SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.161 mW/g** Maximum value of SAR (measured) = 0.278 mW/g

Date/Time: 4/23/2005 11:00:03PM

Test Laboratory: Motorola 1900 RH Cheek ch810

Serial: 35648300000073;

Procedure Notes: Ch# 810 / Pwr Step: 0 Antenna Position: Fixed Accessory Model #: None

Battery Model #: SNN5683A DEVICE POSITION: Cheek

Communication System: GSM 1900; Frequency: 1909.8 MHz; Channel Number: 810; Duty Cycle: 1:8;

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.45$ mho/m, $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1398; ConvF(5.12, 5.12, 5.12); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1154;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.16 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

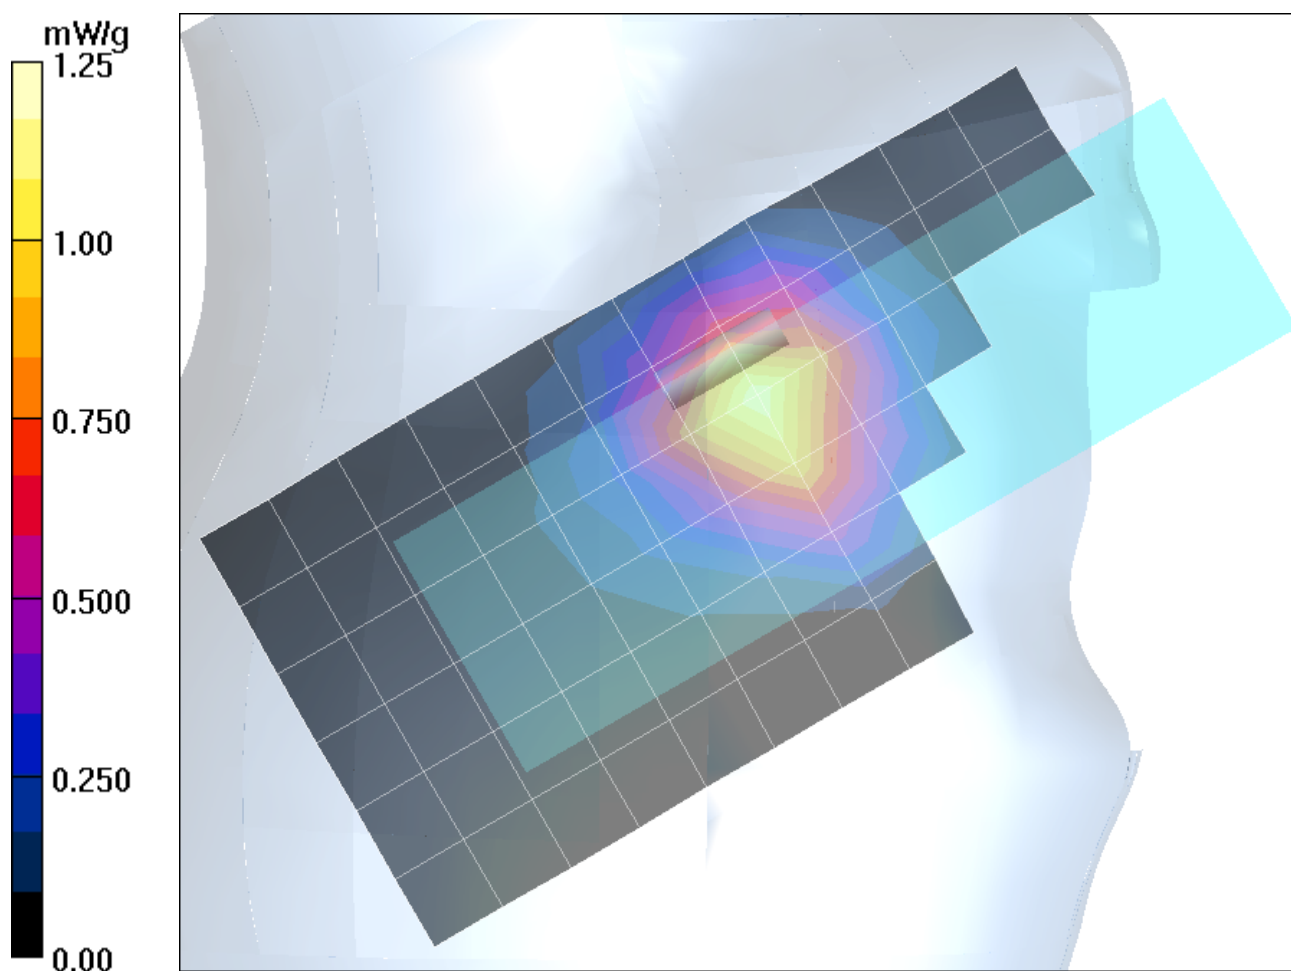Reference Value = 28.0 V/m; **Power Drift = -0.022 dB** Peak SAR (extrapolated) = 1.75 W/kg**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.660 mW/g** Maximum value of SAR (measured) = 1.23 mW/g

Date/Time: 4/23/2005 11:22:22PM

Test Laboratory: Motorola 1900 RH Tilt ch661

Serial: 35648300000073

Procedure Notes: Ch# 661 / Pwr Step: 0 Antenna Position: Fixed Accessory Model #: None

Battery Model #: SNN5683A DEVICE POSITION: Tilted

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.45$ mho/m, $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1398; ConvF(5.12, 5.12, 5.12); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1154;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.205 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

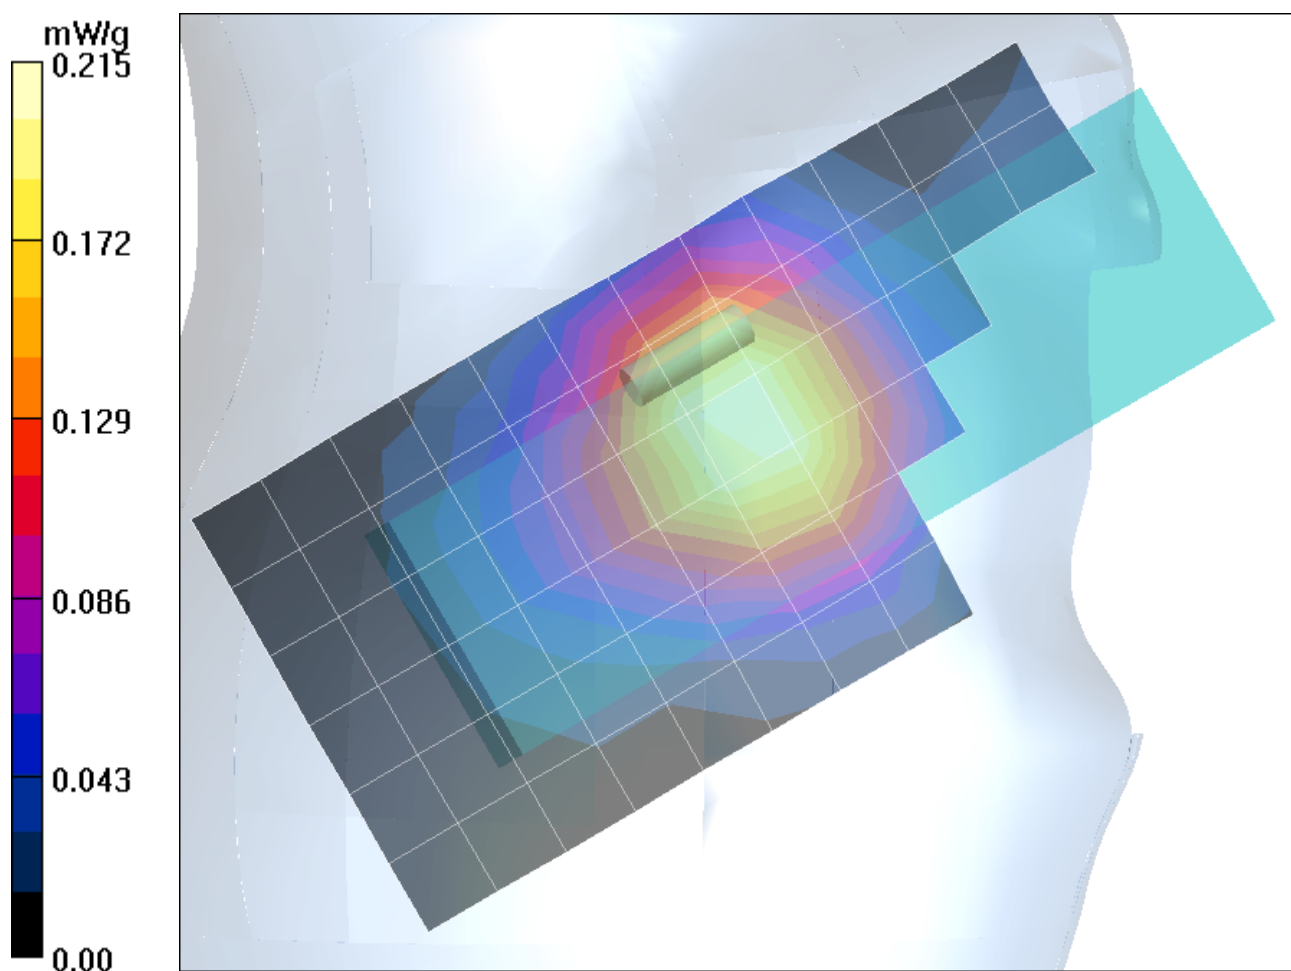Reference Value = 13.1 V/m; **Power Drift = -0.025 dB** Peak SAR (extrapolated) = 0.296 W/kg**SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.135 mW/g** Maximum value of SAR (measured) = 0.223 mW/g

Date/Time: 5/3/2005 10:53:41AM

Test Laboratory: Motorola 1900 LH Cheek ch810 with SNN5683A 2 layer PCB**Serial: 356483000000073;**

Procedure Notes: Ch# 810 Pwr Step: 0 ota Antenna Position: FIXED Accessory Model #: none

Battery Model #: SNN5683A 2 layer PCB DEVICE POSITION : CHEEK

Communication System: GSM 1900; Frequency: 1909.8 MHz; Channel Number: 810; Duty Cycle: 1:8;

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.45$ mho/m, $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1514; ConvF(5.03, 5.03, 5.03); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Left Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.11 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

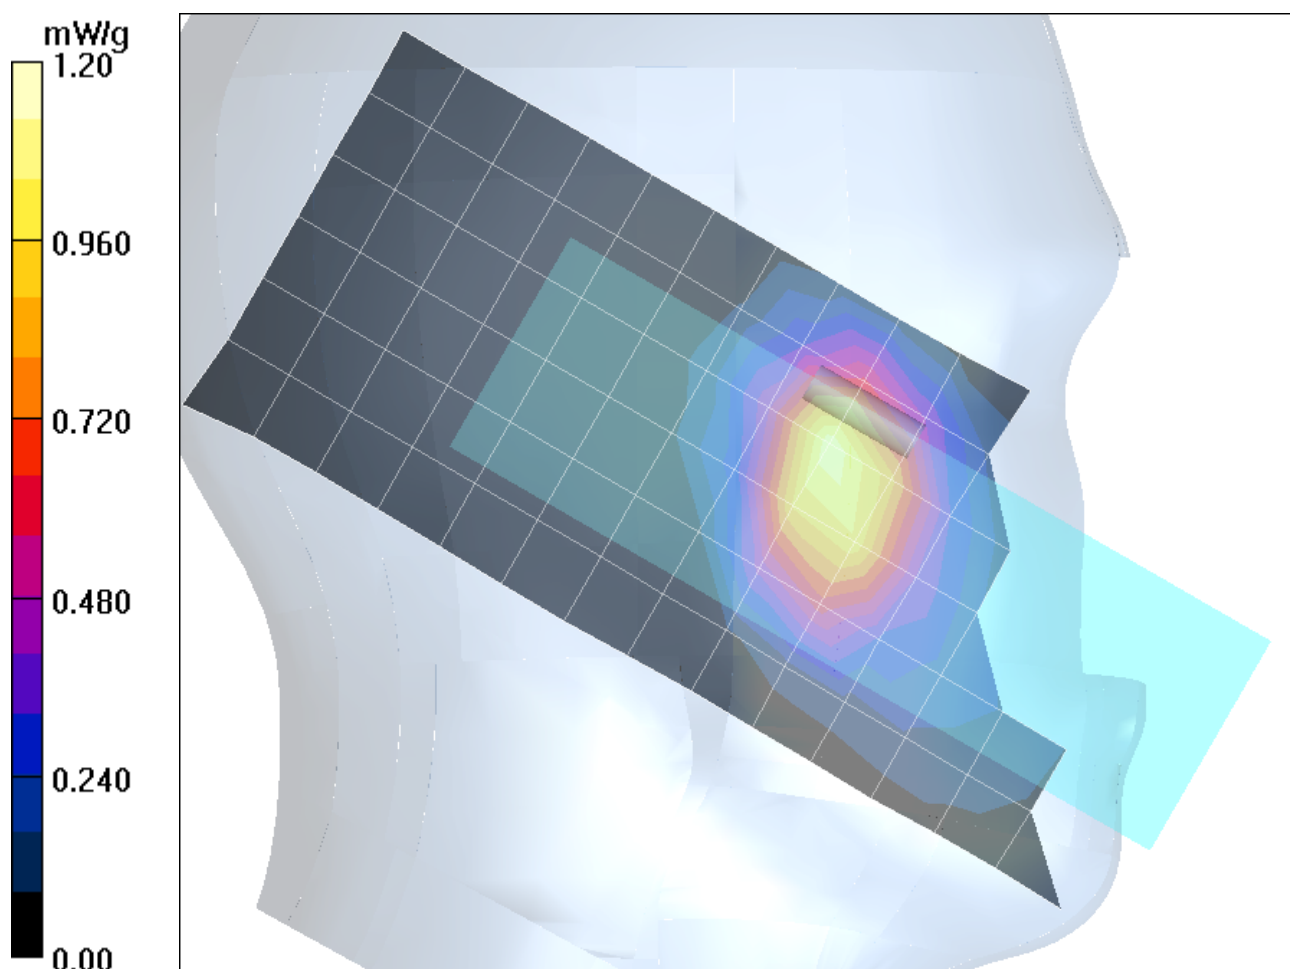Reference Value = 30.0 V/m; **Power Drift = -0.022 dB** Peak SAR (extrapolated) = 1.76 W/kg**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.641 mW/g** Maximum value of SAR (measured) = 1.18 mW/g

Date/Time: 5/3/2005 12:22:20PM

Test Laboratory: Motorola 1900 LH Cheek ch810 with SNN5704C

Serial: 356483000000073;

Procedure Notes: Ch# 810 Pwr Step: 0 ota Antenna Position: FIXED Accessory Model #: none

Battery Model #: SNN5704C DEVICE POSITION : CHEEK

Communication System: GSM 1900; Frequency: 1909.8 MHz; Channel Number: 810; Duty Cycle: 1:8;

Medium: Regular Glycol Head; Medium parameters used: $\sigma = 1.45$ mho/m, $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(5.03, 5.03, 5.03); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.08 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.8 V/m; **Power Drift = -0.021 dB** Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.596 mW/g Maximum value of SAR (measured) = 1.09 mW/g

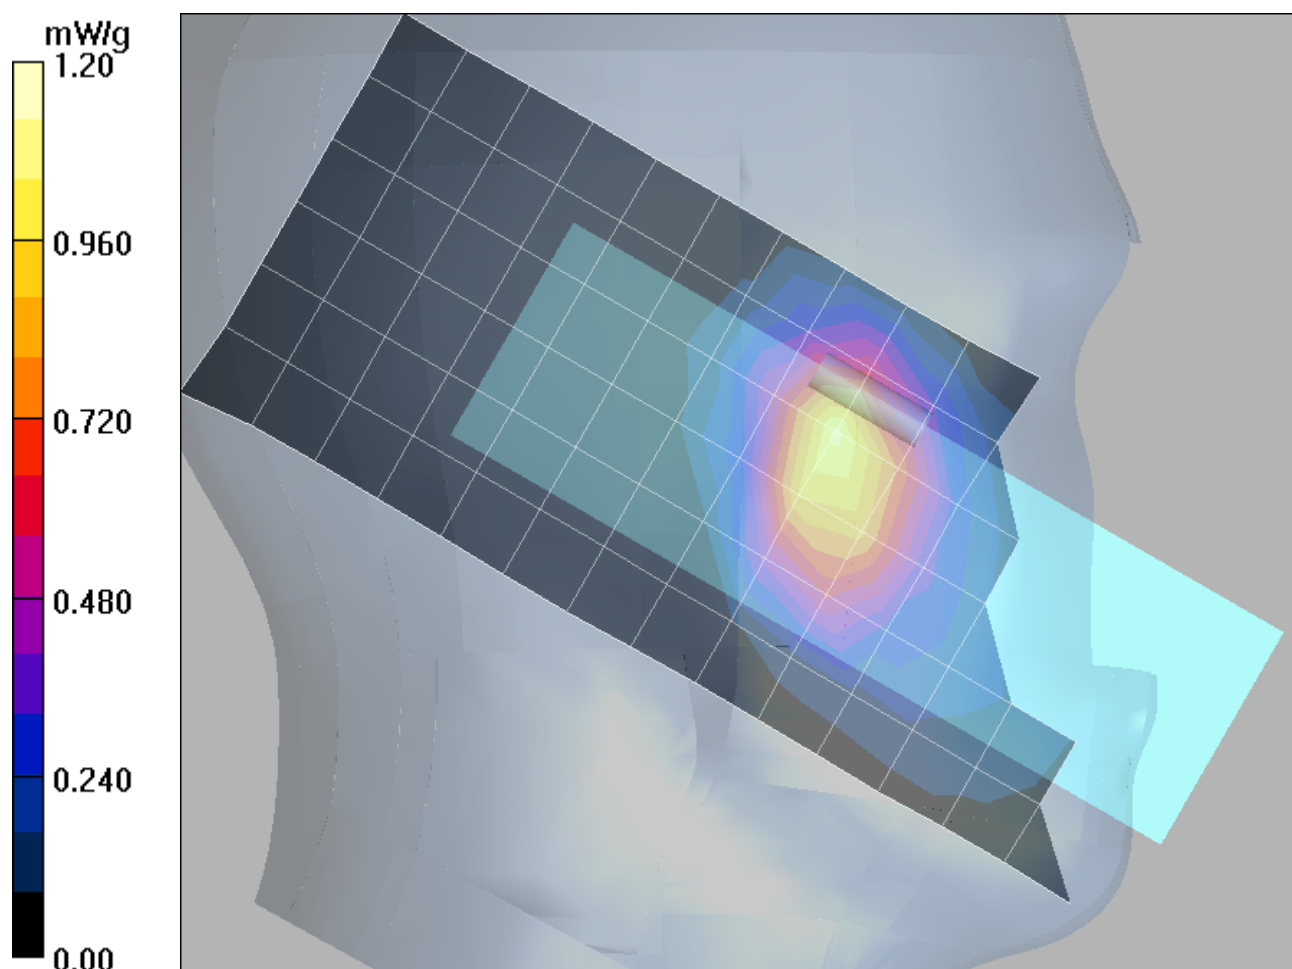

Appendix 3

SAR distribution plots for Body Worn Configuration

Date/Time: 5/12/2005 2:42:46PM

Test Laboratory: Motorola 1900 BW ch661 CHYN4629A & SNN5704C

Serial: 35648300000073

Procedure Notes: Pwr Step: 0 ota Antenna Position: FIXED Battery Model #: SNN5704C

Accessory Model # = pouch (CHYN4629A) tilted so that there is a 2pt.touch.

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;

Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.59$ mho/m, $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1514; ConvF(4.46, 4.46, 4.46); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.370 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

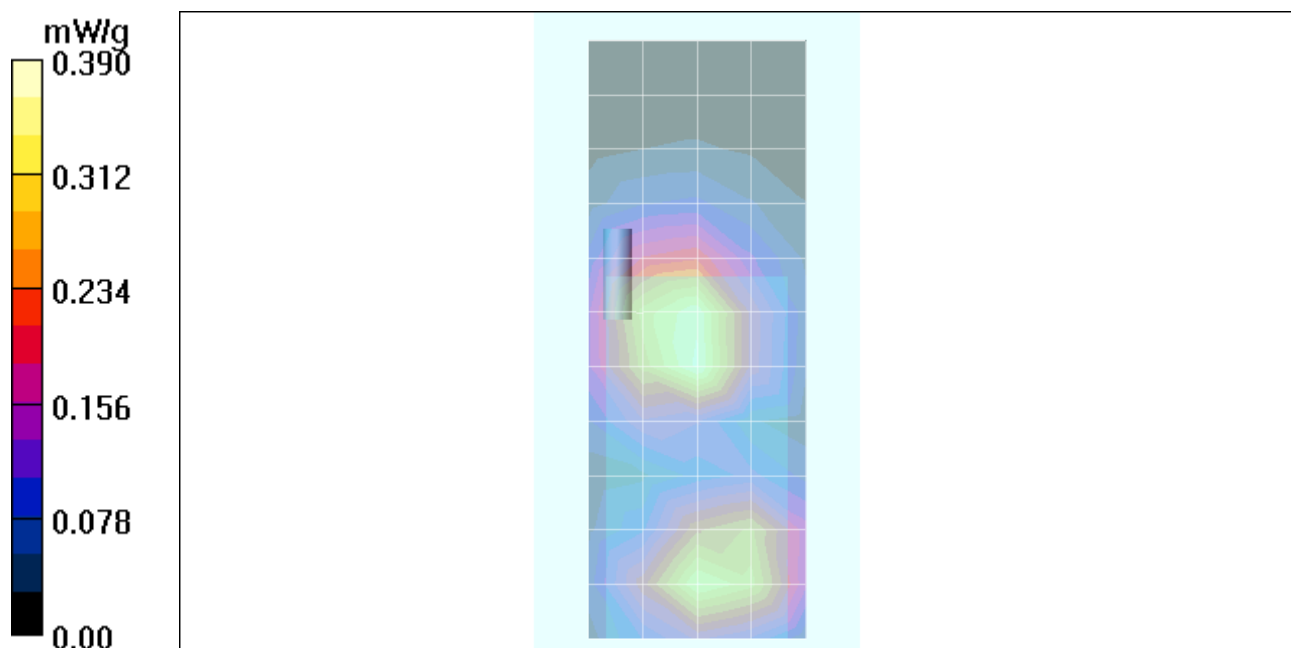Reference Value = 17.0 V/m; **Power Drift = -0.020 dB** Peak SAR (extrapolated) = 0.583 W/kg**SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.226 mW/g** Maximum value of SAR (measured) = 0.401 mW/g

Date/Time: 5/12/2005 2:21:25PM

Test Laboratory: Motorola 1900 BW ch661 CHYN4629A & 2 layer PCB SNN5683A

Serial: 35648300000073

Procedure Notes: Pwr Step: 0 ota Antenna Position: FIXED Battery Model #: SNN5683A 2 layer PCB
Accessory Model # = pouch (CHYN4629A) tilted so that there is a 2pt.touch.

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;
Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.59$ mho/m, $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.46, 4.46, 4.46); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.355 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; **Power Drift = 0.044 dB** Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.227 mW/g Maximum value of SAR (measured) = 0.409 mW/g

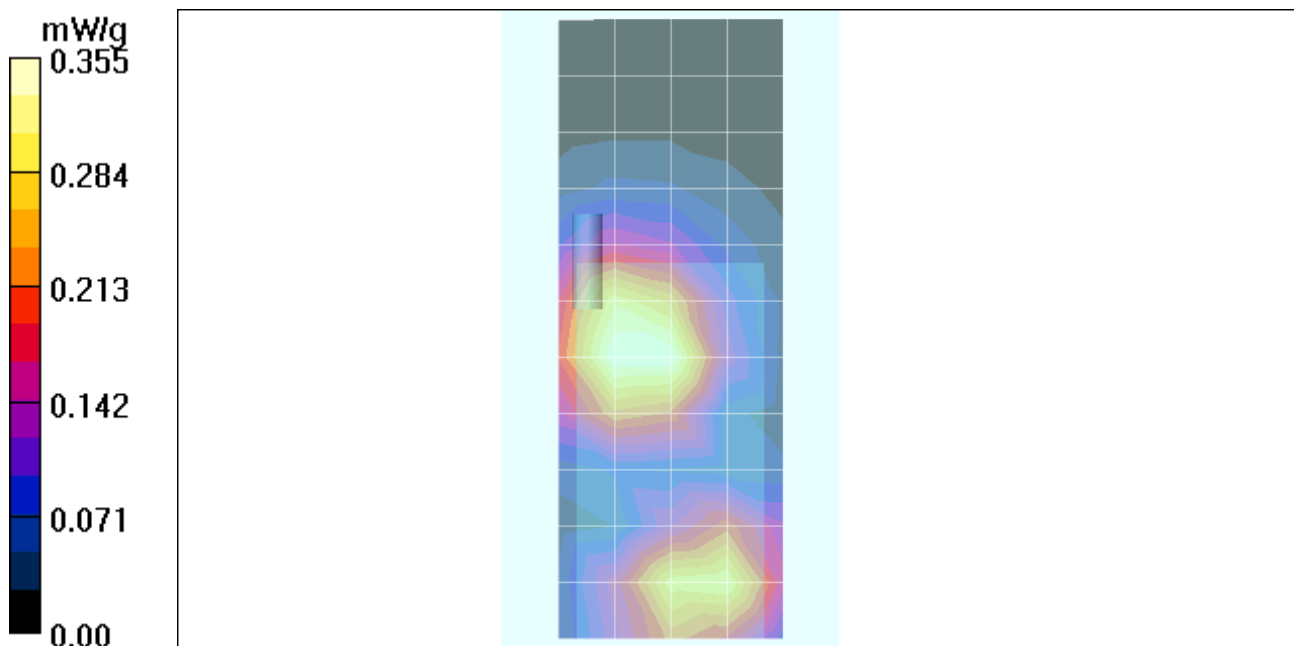

Test Laboratory: Motorola 1900 BW ch661 CHYN4629A

Serial: 35648300000073

Procedure Notes: Pwr Step: 0 ota Antenna Position: FIXED Battery Model #: SNN5683A (old style battery)
Accessory Model # = pouch (CHYN4629) tilted so that there is a 2pt.touch.

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;
Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.59$ mho/m, $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.46, 4.46, 4.46); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.343 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.217 mW/g Maximum value of SAR (measured) = 0.391 mW/g

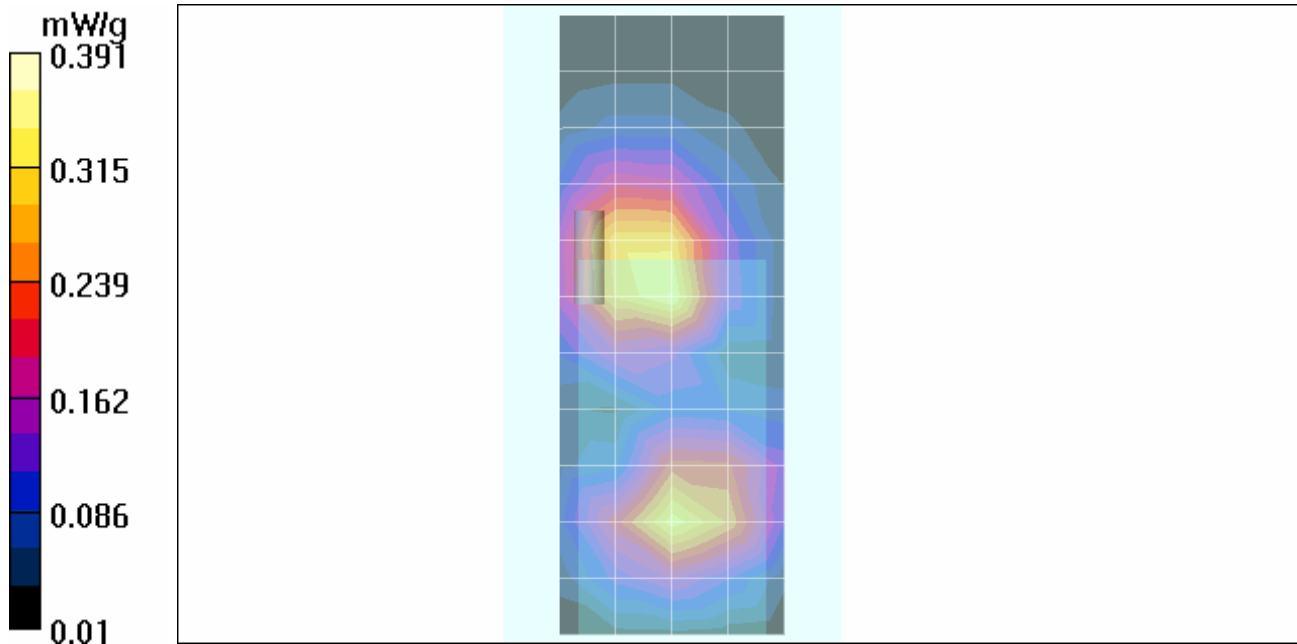

Date/Time: 5/12/2005 10:45:52AM

Test Laboratory: Motorola 1900 BW ch661 CHYN4459A

Serial: 35648300000073

Procedure Notes: Pwr Step: 0 ota Antenna Position: FIXED Battery Model #: SNN5683A (old style battery)
Model # = carry case (CHYN4459A)

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;
Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.59$ mho/m, $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.46, 4.46, 4.46); Calibrated: 7/22/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn365; Calibrated: 9/22/2004
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.253 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.0 V/m; **Power Drift = -0.110 dB** Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.159 mW/g Maximum value of SAR (measured) = 0.282 mW/g

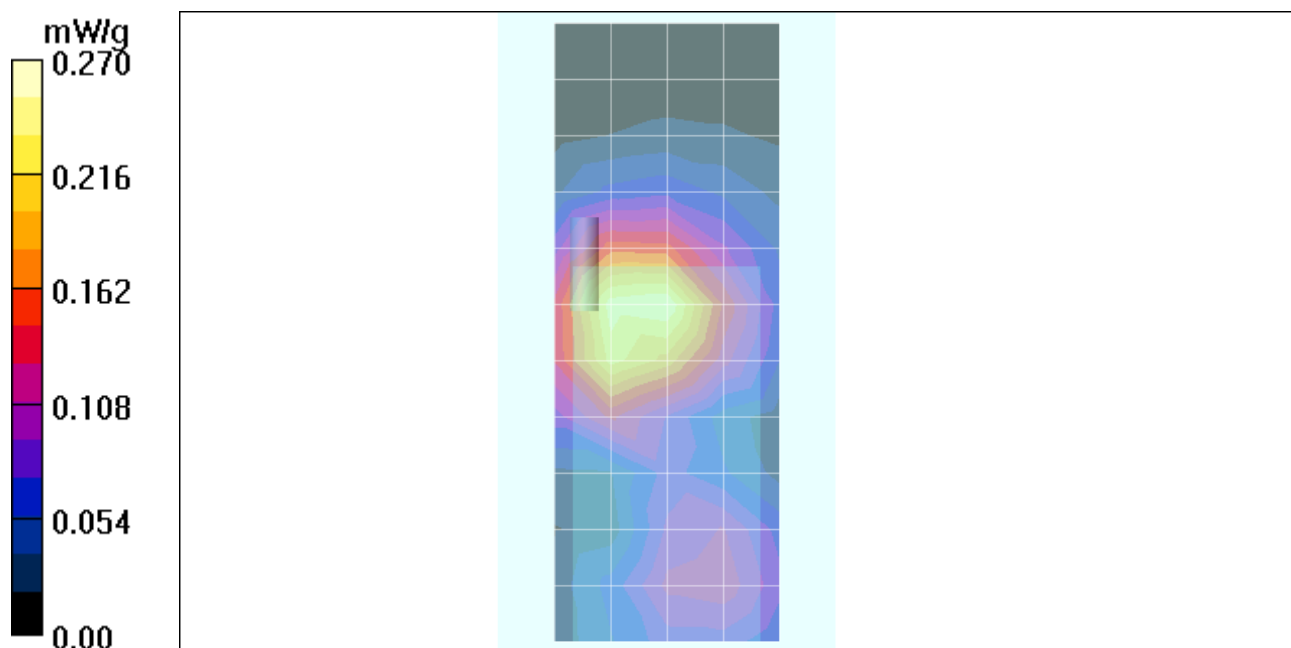

Date/Time: 4/24/2005 2:31:41AM

Test Laboratory: Motorola 1900 BW ch661 back 15mm

Serial: 35648300000073

Procedure Notes: Ch# 661 / Pwr Step: 0 Antenna Position: Fixed Battery Model #: SNN5683A

Accessory Model # = None Back 15MM Away

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;

Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.59$ mho/m, $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:


- Probe: ET3DV6 - SN1398; ConvF(4.65, 4.65, 4.65); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (12x7x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.288 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

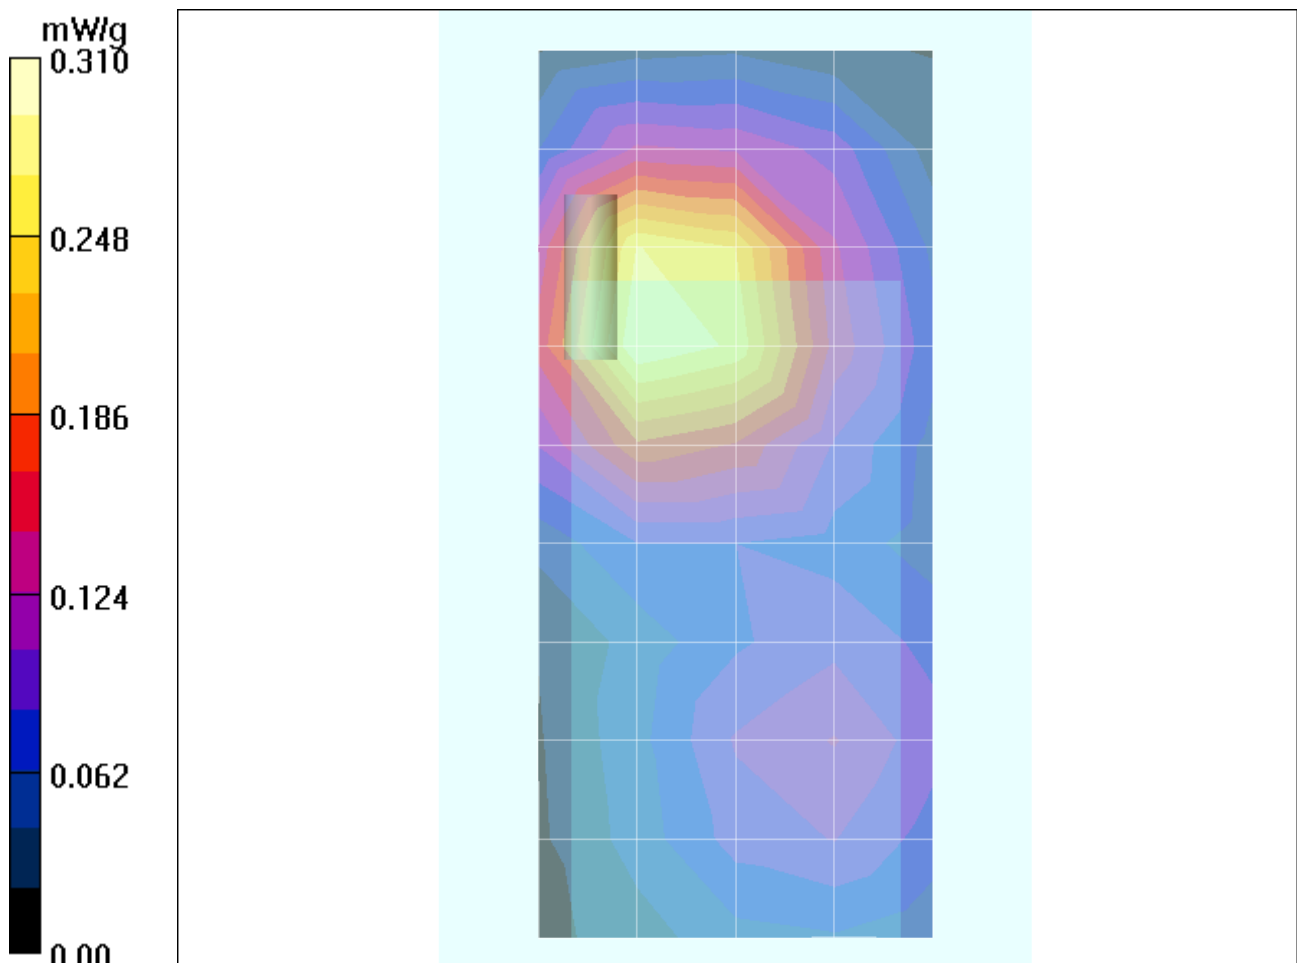Reference Value = 12.1 V/m; **Power Drift = 0.222 dB** Peak SAR (extrapolated) = 0.457 W/kg**SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.180 mW/g** Maximum value of SAR (measured) = 0.318 mW/g

Date/Time: 4/24/2005 2:13:03AM

Test Laboratory: Motorola 1900 BW ch661 front 15mm

Serial: 35648300000073;

Procedure Notes: Ch# 661 / Pwr Step: 0 Antenna Position: Fixed Battery Model #: SNN5683A

Accessory Model # = None Front 15MM Away

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8;

Medium: Regular Glycol Body; Medium parameters used: $\sigma = 1.59$ mho/m, $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1398; ConvF(4.65, 4.65, 4.65); Calibrated: 2/24/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 1/13/2005
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (12x7x1):


Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.190 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.91 V/m; **Power Drift = -0.141 dB** Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.115 mW/g Maximum value of SAR (measured) = 0.197 mW/g

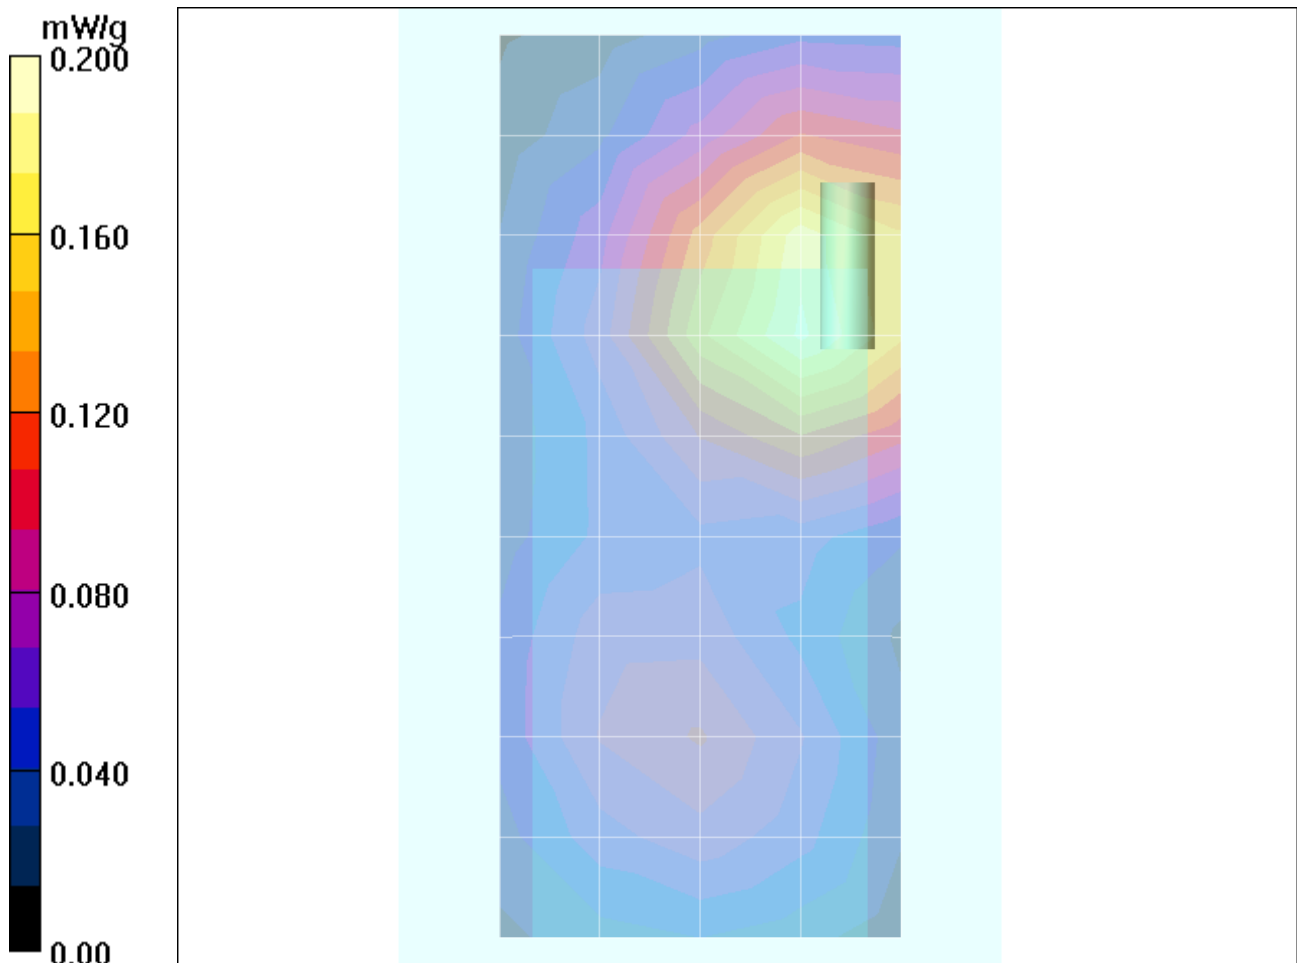

Appendix 4
Probe Calibration Certificate



Accredited by the Swiss Federal Office of Metrology and Accreditation
**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: SCS 108

Client **Motorola Korea**

Certificate No. **ET3-1398_Feb05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN 1398**

Calibration procedure(s) **QA CAL-01 v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **February 24, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by:	Name	Function	Signature
	Nico Venter	Laboratory Technician	

Approved by:	Kalig Pokovic	Technical Manager	
--------------	---------------	-------------------	--

Issued: February 25, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1398

Manufactured:	October 24, 1999
Last calibrated:	February 16, 2004
Recalibrated:	February 24, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1398**Sensitivity in Free Space^A**

NormX	1.48 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.61 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.54 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	92 mV
DCP Y	92 mV
DCP Z	92 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	8.4	4.3
SAR _{be} [%]	With Correction Algorithm	0.6	0.2

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	13.6	9.3
SAR _{be} [%]	With Correction Algorithm	0.9	0.2

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

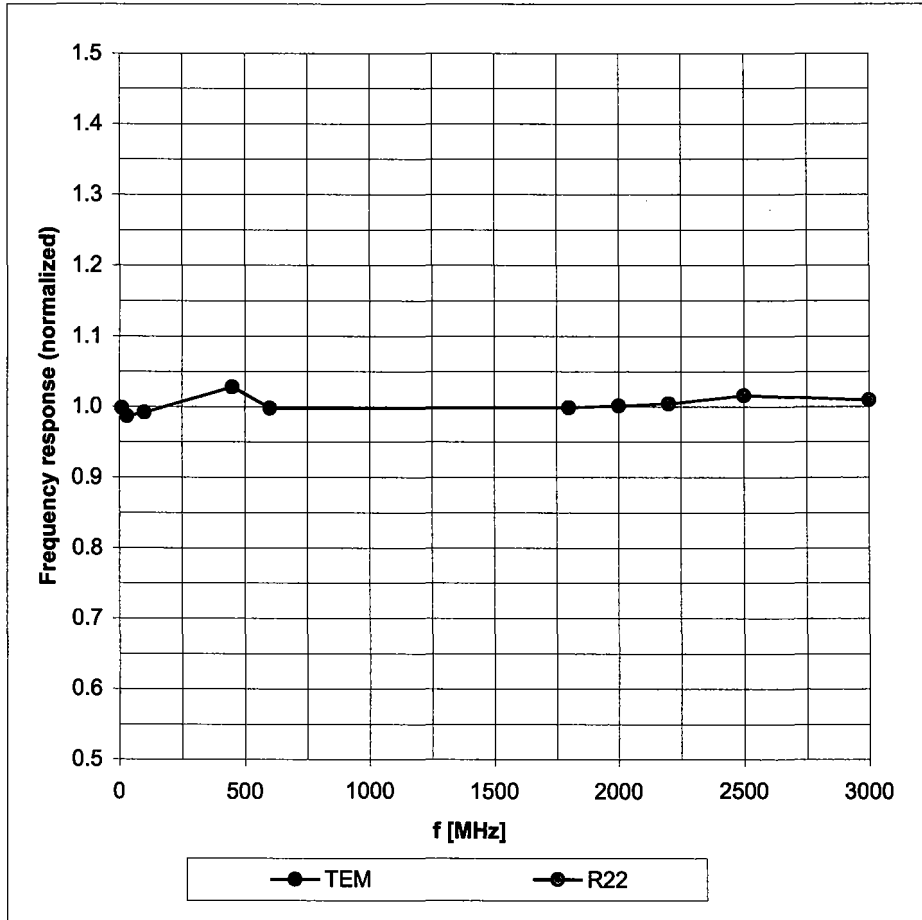


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

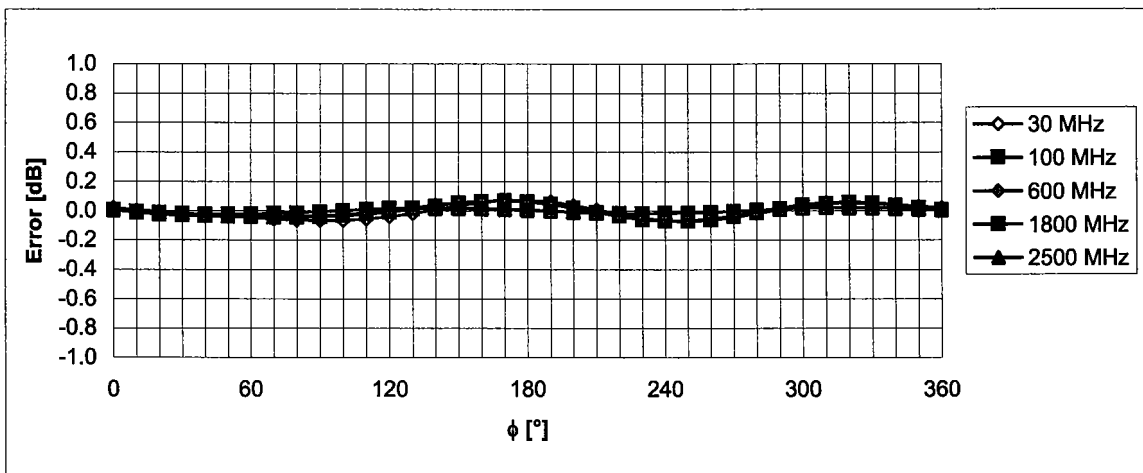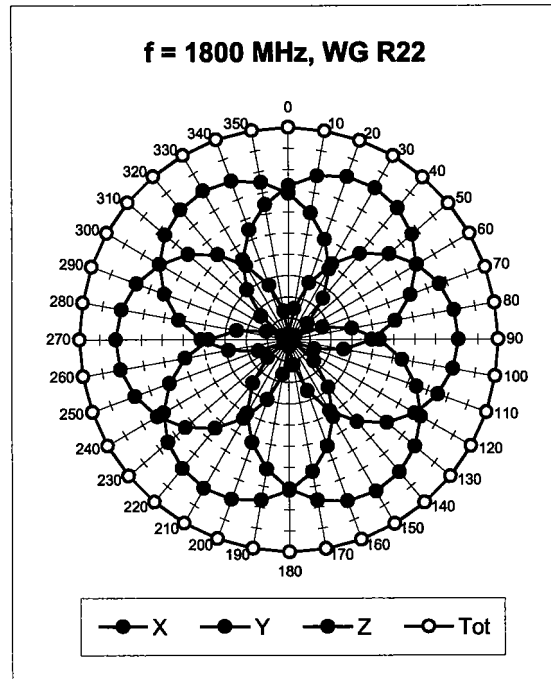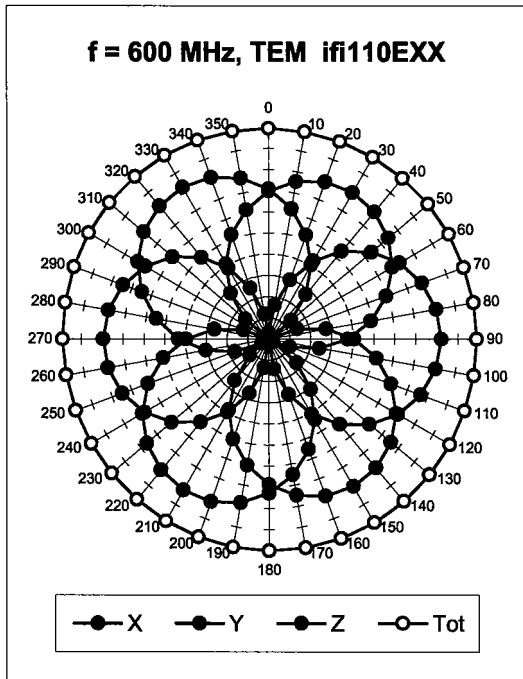



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)

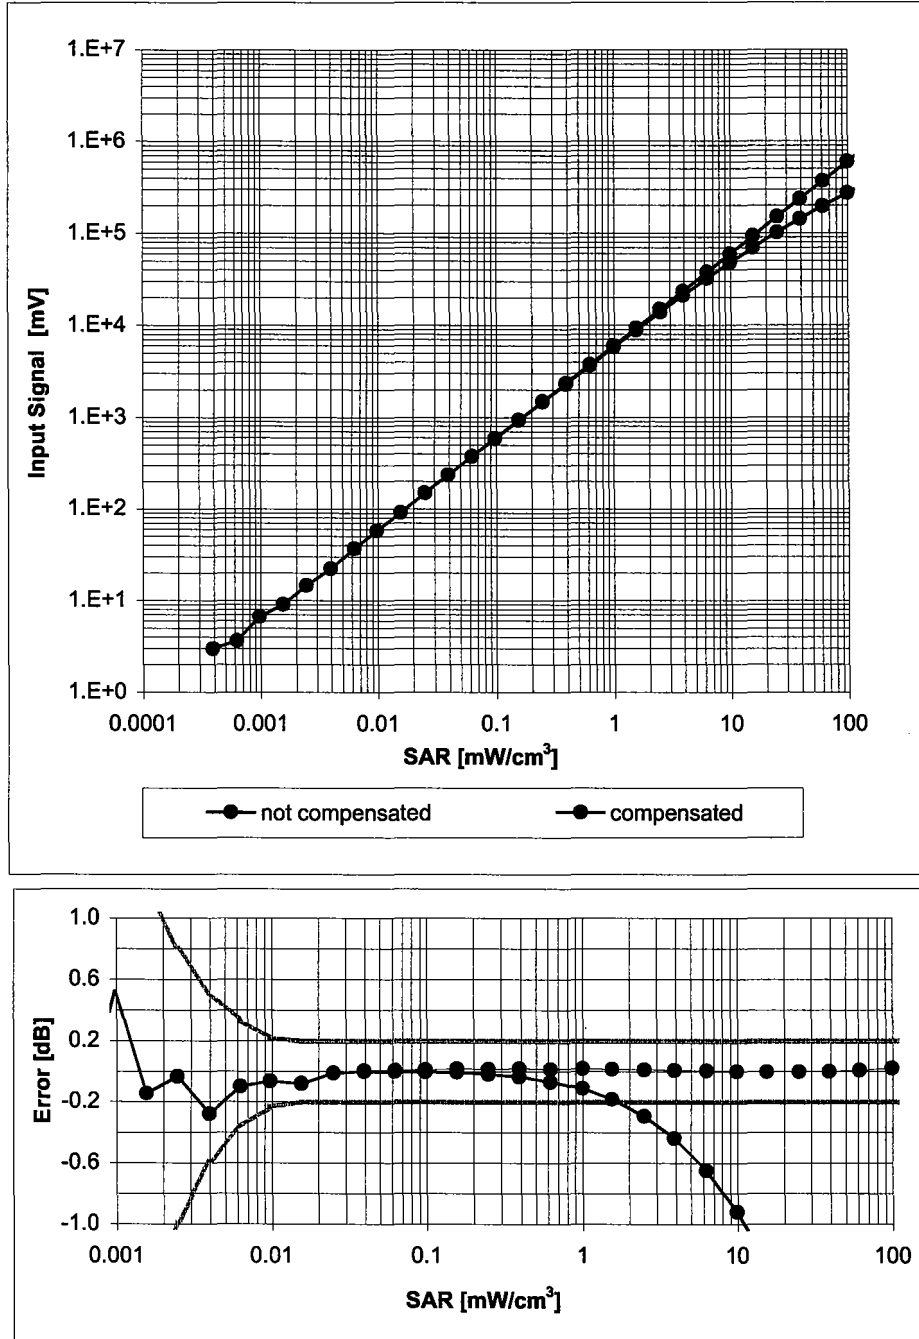

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

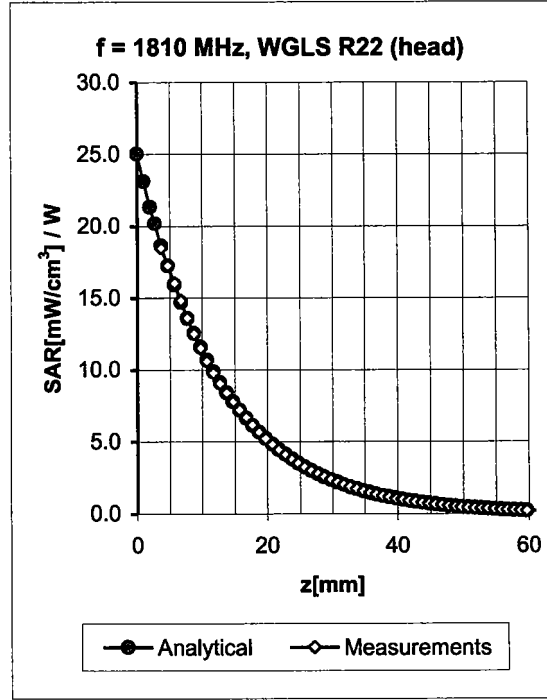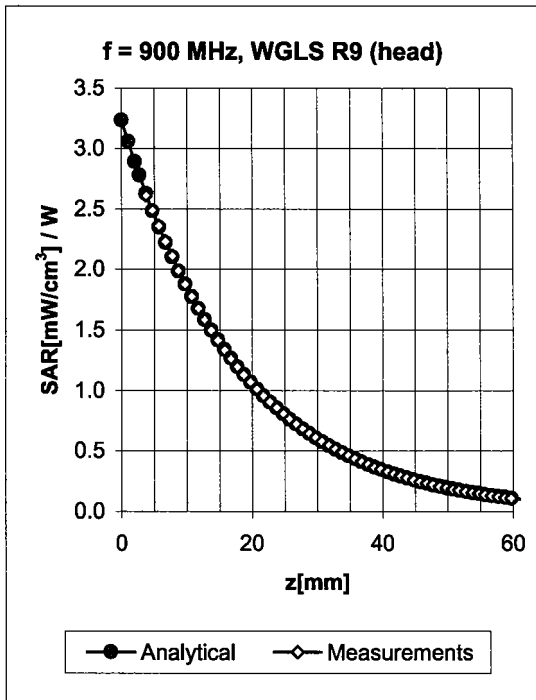


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	1.29	1.35	6.42 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.61	2.36	5.12 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.59	2.50	4.87 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.74	2.11	4.50 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	1.16	1.50	6.04 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.60	2.67	4.65 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.67	2.36	4.43 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.89	1.79	4.26 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

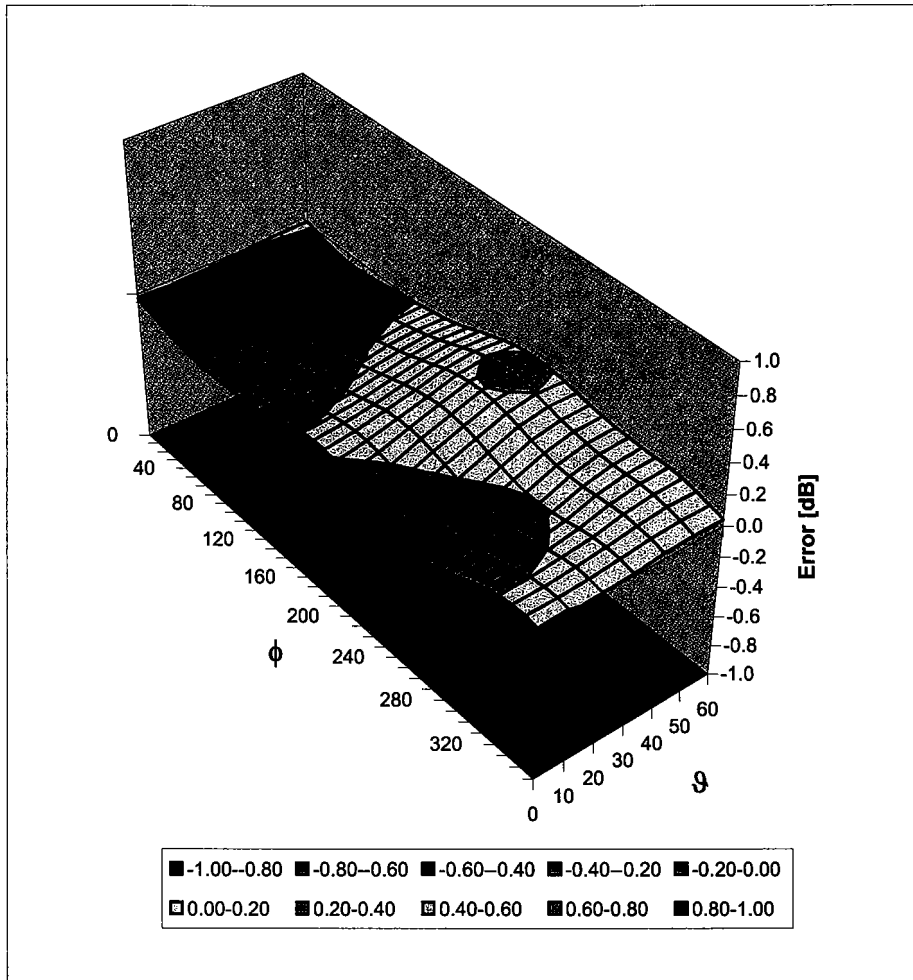

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Client Motorola PCS

CALIBRATION CERTIFICATE

Object(s) ET3DV6 - SN 1514

Calibration procedure(s) QA-CAL-01 v2
Calibration procedure for dosimetric E-field probes

Calibration date: July 22, 2004

Condition of the calibrated item In Tolerance (according to the specific calibration document)

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	5-May-04 (METAS, No 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No 251-00388)	May-05
Reference 20 dB Attenuator	SN: 5086 (20b)	3-May-04 (METAS, No 251-00389)	May-05
Fluke Process Calibrator Type 702	SN: 6295603	8-Sep-03 (Sintrel SCS No. 5030020)	Sep-04
Power sensor HP 8461A	MY41092180	18-Sep-02 (SPEAG, in house check Oct03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug02)	In house check: Aug05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct03)	In house check: Oct 05

Calibrated by: Name: Nico Zahari, Function: Technician, Signature: 

Approved by: Name: Katja Pokorny, Function: Laboratory Director, Signature: 

Date Issued: July 22, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Probe ET3DV6

SN:1514

Manufactured:	November 24, 1999
Last calibrated:	July 31, 2003
Recalibrated:	July 22, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1514

Sensitivity in Free Space

Diode Compression^A

NormX	1.71 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	93	mV
NormY	1.89 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	93	mV
NormZ	1.81 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	93	mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	10.2	5.3
SAR _{bc} [%]	With Correction Algorithm	0.1	0.3

Head 1800 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	14.0	9.1
SAR _{bc} [%]	With Correction Algorithm	0.1	0.0

Sensor Offset


Probe Tip to Sensor Center 2.7 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.




^A numerical linearization parameter; uncertainty not required

Frequency Response of E-Field

(TEM-Cell:iff110, Waveguide R22)


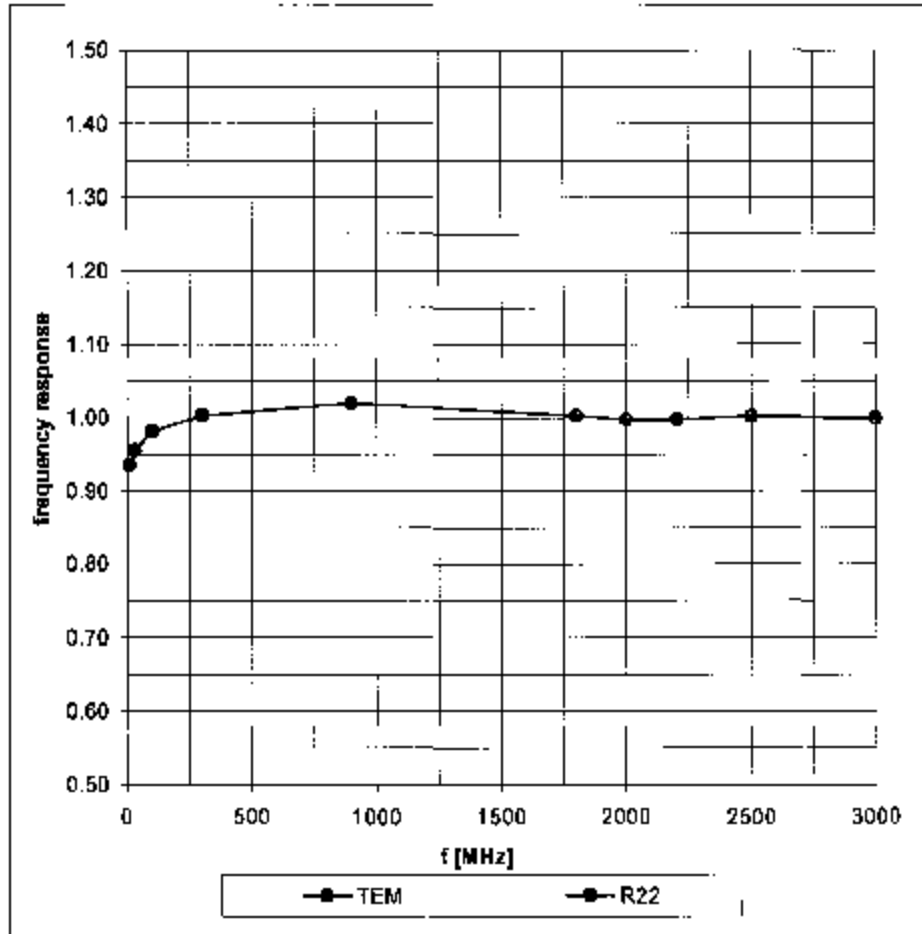


Receiving Pattern (ϕ), $\theta = 0^\circ$

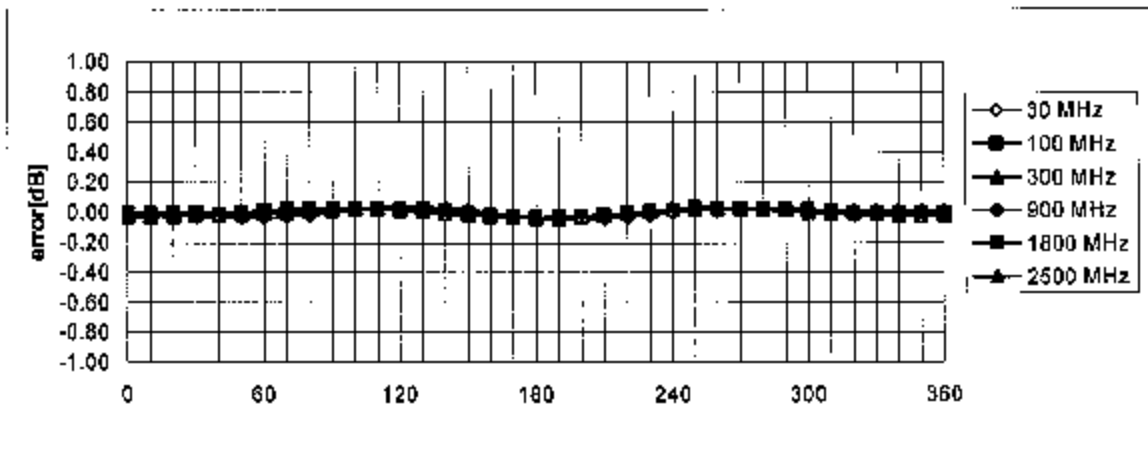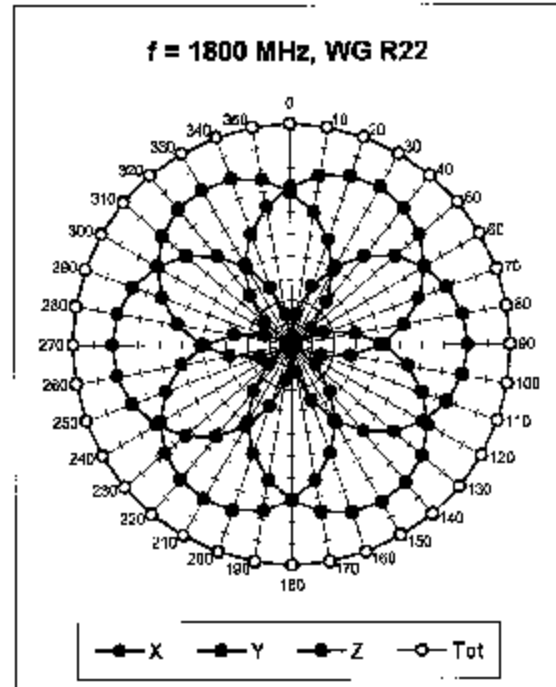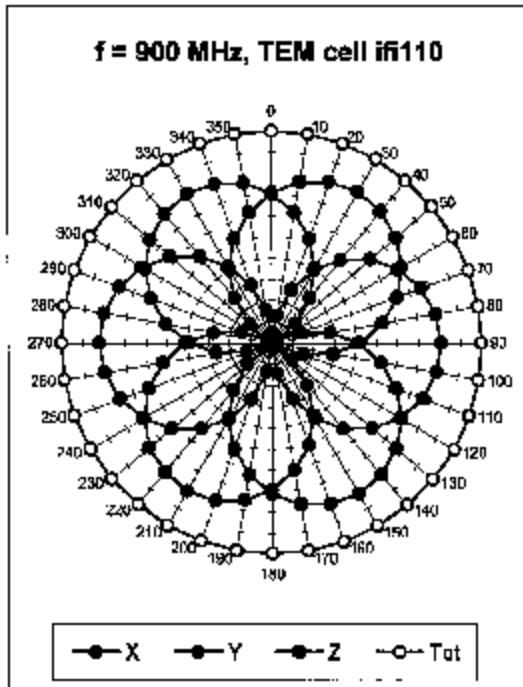


Axial Isotropy Error $< \pm 0.2$ dB

Dynamic Range f(SAR_{head}) (Waveguide R22)

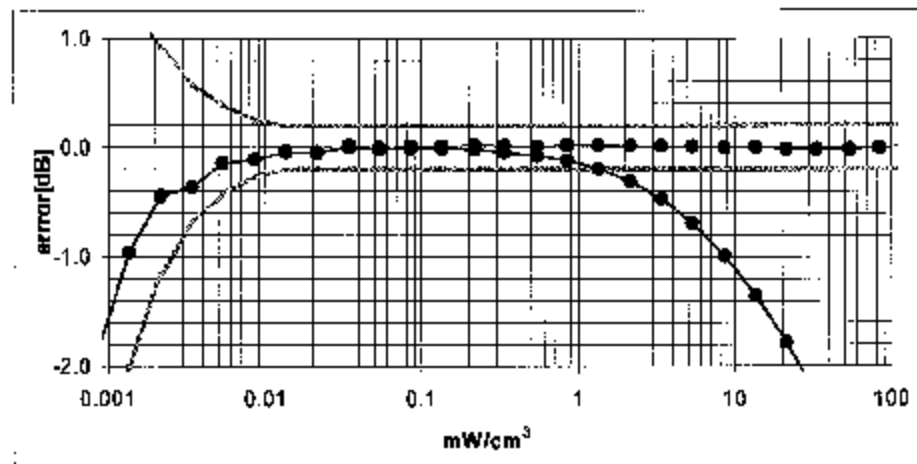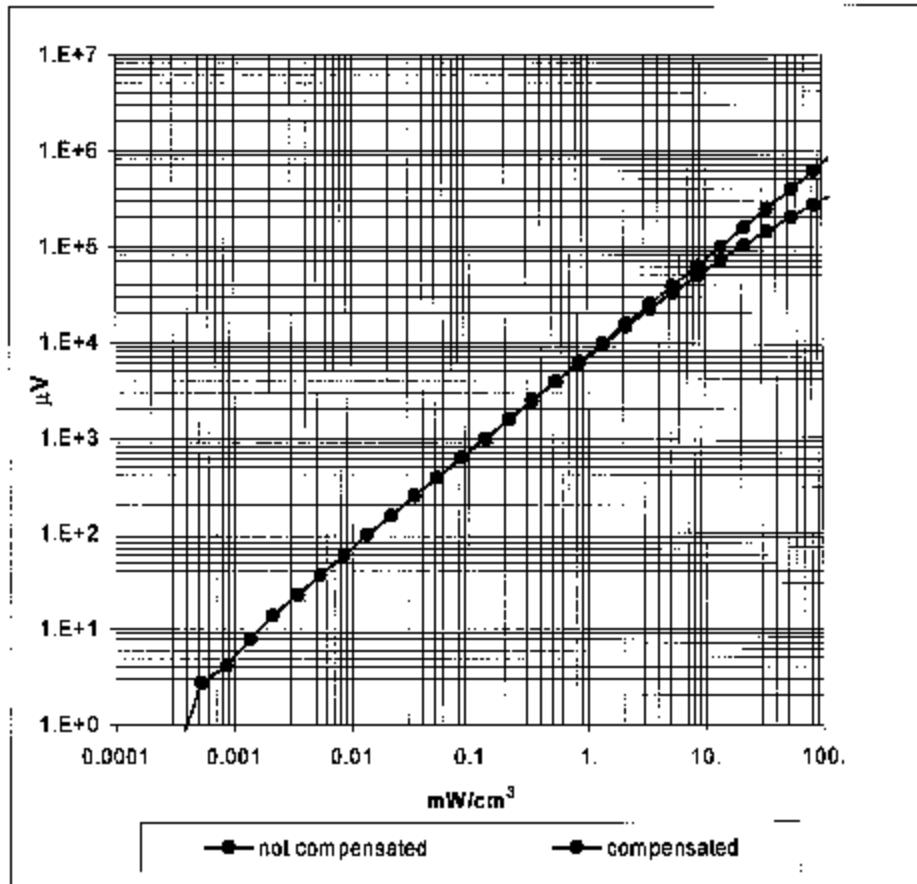

Probe Linearity Error $< \pm 0.2$ dB

Conversion Factor Assessment

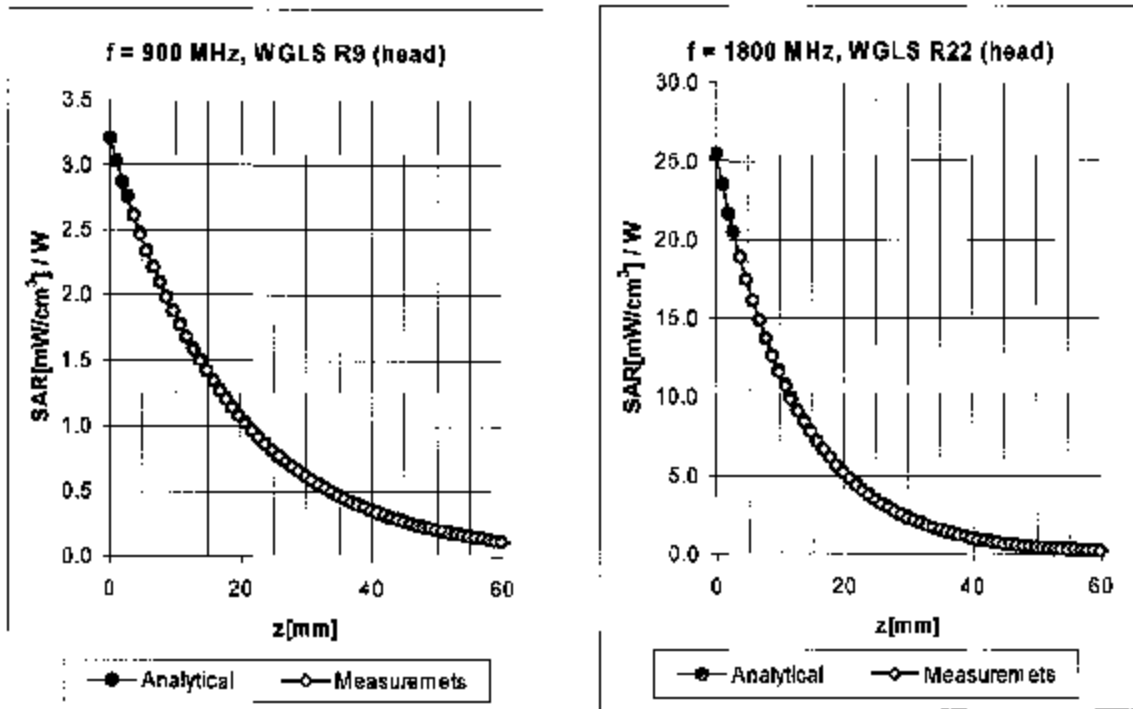


f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	800-1000	Head	41.5 ± 5%	0.97 ± 5%	0.72	1.79	6.08 ± 9.5% (k=2)
1800	1710-1910	Head	40.0 ± 5%	1.40 ± 5%	0.53	2.53	5.03 ± 9.5% (k=2)
1950	1900-2000	Head	40.0 ± 5%	1.40 ± 5%	0.60	2.51	4.74 ± 9.5% (k=2)
2450	2400-2500	Head	39.2 ± 5%	1.80 ± 5%	1.11	1.81	4.46 ± 9.5% (k=2)
900	800-1000	Body	55.0 ± 5%	1.05 ± 5%	0.58	2.10	5.87 ± 9.5% (k=2)
1800	1710-1910	Body	53.3 ± 5%	1.52 ± 5%	0.61	2.67	4.46 ± 9.5% (k=2)
1950	1900-2000	Body	53.3 ± 5%	1.52 ± 5%	0.72	2.39	4.38 ± 9.5% (k=2)
2450	2400-2500	Body	52.7 ± 5%	1.95 ± 5%	1.81	1.30	4.24 ± 9.5% (k=2)

^B The stated uncertainty of calibration is according to P152B.

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

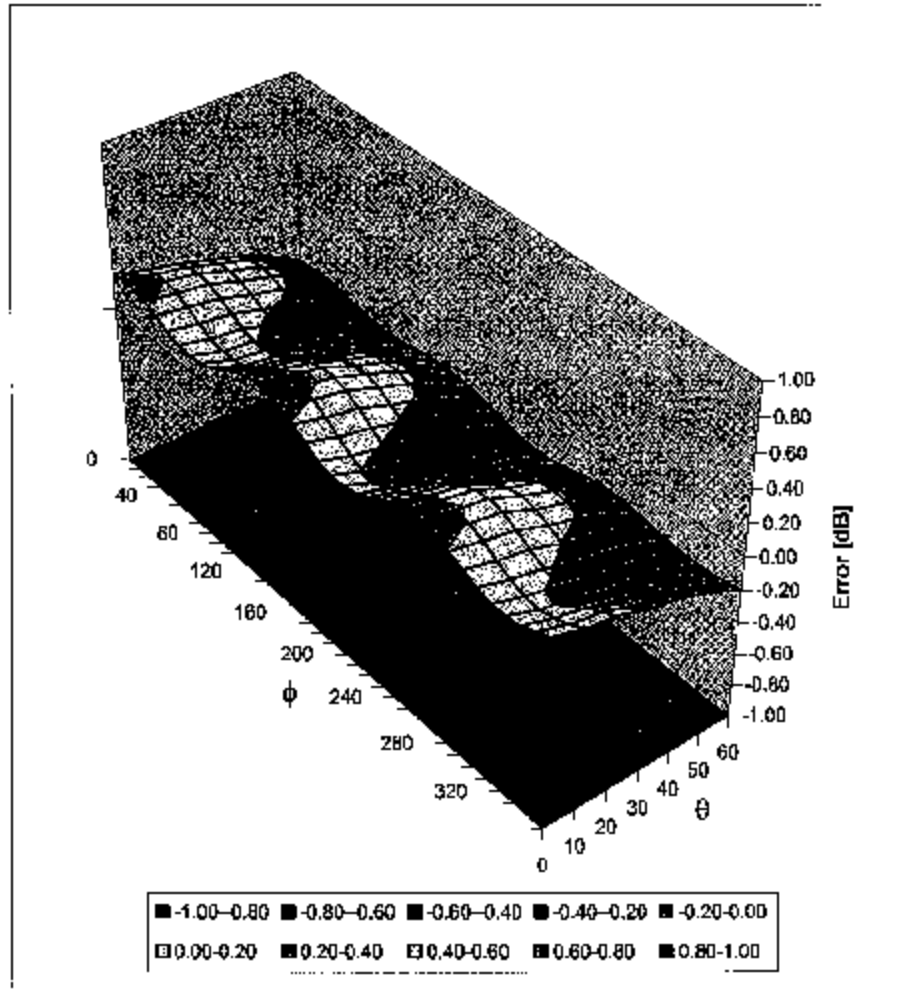

Spherical Isotropy Error $< \pm 0.4$ dB

Appendix 5
Measurement Uncertainty Budget

Uncertainty Budget for Device Under Test									
<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	9.5	N	2.00	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	5.8	R	1.73	1	1	3.3	3.3	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	1.3	R	1.73	1	1	0.8	0.8	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.3	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	1.1	R	1.73	1	1	0.6	0.6	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	3.9	R	1.73	1	1	2.3	2.3	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.6	N	1.00	1	1	3.6	3.6	29
Device Holder Uncertainty	E.4.1	2.8	N	1.00	1	1	2.8	2.8	8
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	10.0	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Permittivity - deviation from target values	E.3.2	10.0	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity - measurement uncertainty	E.3.3	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Combined Standard Uncertainty			RSS				11.72	11.09	1363
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				22.98	21.75	

Uncertainty Budget for System Performance Check (dipole & flat phantom)

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	9.5	N	2.00	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	5.8	R	1.73	1	1	3.3	3.3	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	∞
Response Time	E.2.7	0.0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.3	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	1.1	R	1.73	1	1	0.6	0.6	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	3.9	R	1.73	1	1	2.3	2.3	∞
Dipole									
Dipole Axis to Liquid Distance	8, E.4.2	1.0	R	1.73	1	1	0.6	0.6	∞
Input Power and SAR Drift Measurement	8, 6.6.2	4.7	R	1.73	1	1	2.7	2.7	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	10.0	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Permittivity - deviation from target values	E.3.2	10.0	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity - measurement uncertainty	E.3.3	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Combined Standard Uncertainty			RSS				10.16	9.43	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				19.92	18.48	

Appendix 6

Photographs of the device under test



Figure 1. Front of Phone



Figure 2. Back of Phone



Figure 3. Phone open



Figure 4. Body Worn



Figure 5. CHYN4459A front



Figure 6. CHYN4459A side



Figure 7. CHYN4629A front



Figure 8. CHYN4629A side

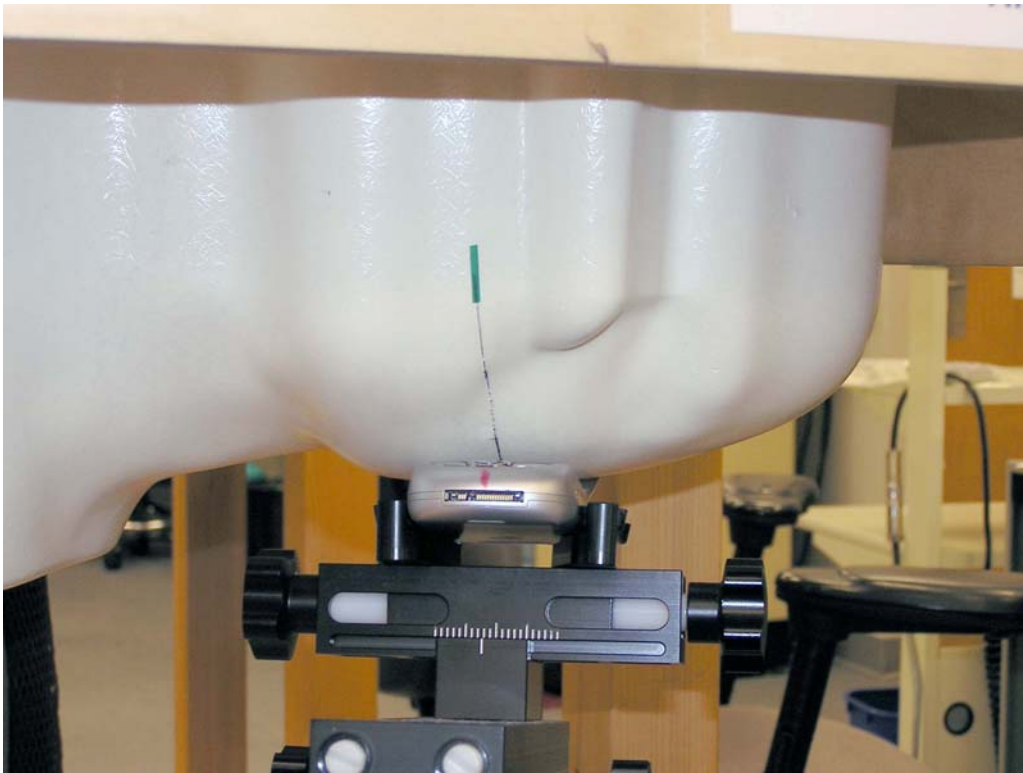


Figure 9. Cheek/Touch Position, front view



Figure 10. Cheek/Touch Position, rear view



Figure 11. Tilt Position, front view



Figure 12. Tilt Position, rear view