



FCC TEST REPORT

REPORT NO.: RF900713R02A

MODEL NO.: BRG700

(The others model no. please refer to page 6)

RECEIVED: July 13, 2001

TESTED: August 17 ~ August 29, 2001

APPLICANT: NATIONAL DATACOMM CORPORATION

ADDRESS: 4F, No.24-2, Industry East 4th Road,
Science Park, Hsinchu,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528



Lab Code: 200102-0

Table of Contents

| | | |
|-------|---|----|
| 1 | CERTIFICATION | 4 |
| 2 | SUMMARY OF TEST RESULTS..... | 5 |
| 3 | GENERAL INFORMATION | 6 |
| 3.1 | GENERAL DESCRIPTION OF EUT..... | 6 |
| 3.2 | DESCRIPTION OF TEST MODES..... | 7 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 7 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS..... | 8 |
| 4 | TEST TYPES AND RESULTS..... | 9 |
| 4.1 | CONDUCTED EMISSION MEASUREMENT | 9 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT..... | 9 |
| 4.1.2 | TEST INSTRUMENTS..... | 9 |
| 4.1.3 | TEST PROCEDURES | 10 |
| 4.1.4 | TEST SETUP | 10 |
| 4.1.5 | EUT OPERATING CONDITIONS..... | 11 |
| 4.1.6 | TEST RESULTS | 12 |
| 4.2 | RADIATED EMISSION MEASUREMENT | 18 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 18 |
| 4.2.2 | TEST INSTRUMENTS | 19 |
| 4.2.3 | TEST PROCEDURES | 20 |
| 4.2.4 | TEST SETUP | 21 |
| 4.2.5 | EUT OPERATING CONDITIONS..... | 21 |
| 4.2.6 | TEST RESULTS | 22 |
| 4.3 | 6DB BANDWIDTH MEASUREMENT | 27 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT..... | 27 |
| 4.3.2 | TEST INSTRUMENTS | 27 |
| 4.3.3 | TEST PROCEDURE..... | 28 |
| 4.3.4 | TEST SETUP | 28 |
| 4.3.5 | EUT OPERATING CONDITIONS..... | 28 |
| 4.3.6 | TEST RESULTS | 29 |
| 4.4 | MAXIMUM PEAK OUTPUT POWER | 33 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 33 |
| 4.4.2 | INSTRUMENTS..... | 33 |
| 4.4.3 | TEST PROCEDURES | 34 |
| 4.4.4 | TEST SETUP | 34 |
| 4.4.5 | EUT OPERATING CONDITIONS..... | 34 |
| 4.4.6 | TEST RESULTS | 35 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT..... | 36 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT | 36 |
| 4.5.2 | TEST INSTRUMENTS..... | 36 |
| 4.5.3 | TEST PROCEDURE..... | 37 |
| 4.5.4 | TEST SETUP | 37 |
| 4.5.5 | EUT OPERATING CONDITION | 37 |
| 4.5.6 | TEST RESULTS | 38 |
| 4.6 | BAND EDGES MEASUREMENT | 42 |



| | | |
|-------|---|----|
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT | 42 |
| 4.6.2 | TEST INSTRUMENTS..... | 42 |
| 4.6.3 | TEST PROCEDURE..... | 42 |
| 4.6.4 | EUT OPERATING CONDITION | 43 |
| 4.6.5 | TEST RESULTS | 43 |
| 4.7 | ANTENNA REQUIREMENT | 46 |
| 4.7.1 | STANDARD APPLICABLE..... | 46 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION | 46 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 47 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 49 |



1 CERTIFICATION

PRODUCT : Broadband Residential Gateway

BRAND NAME : NDC

MODEL NO. : BRG700 (The others model no. please refer to page 6)

APPLICANT : NATIONAL DATACOMM CORPORATION

STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from August 17, 2001 to August 29, 2001. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : Steven Lu • DATE: Sep 3, 2001
Steven Lu

CHECKED BY : Emily Lu • DATE: Sep 3, 2001
Emily Lu

APPROVED BY : Harris W. Lai • DATE: Sep. 3, 2001
Harris W. Lai
Senior V.P.

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: 47 CFR Part 15, Subpart C | | | |
|---|---|--------|---|
| Standard Section | Test Type and Limit | Result | REMARK |
| 15.107 | AC Power Conducted Emission Limit: 48dBuV | PASS | Meet the requirement of limit Minimum passing margin is -12.43dBuV at 12.206MHz |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz | PASS | Meet the requirement of limit |
| 15.247(b) | Maximum Peak Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit |
| 15.247(c) | Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit Minimum passing margin is -2.90dBuV at 200 MHz |
| 15.247(d) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit |
| 15.247(c) | Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit |

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---------------------------|-------------------------------|
| PRODUCT | Broadband Residential Gateway |
| MODEL NO. | BRG700 |
| POWER SUPPLY | 5VDC from AC adapter |
| MODULATION TYPE | BPSK, QPSK, CCK |
| RADIO TECHNOLOGY | DSSS |
| TRANSFER RATE | 1/2/5.5/11Mbps |
| FREQUENCY RANGE | 2412MHz ~ 2462MHz |
| NUMBER OF CHANNEL | 11 |
| OUTPUT POWER | <20dBm |
| ANTENNA TYPE | External dual dipole antenna |
| POWER CABLE | Nonshielded 1.8m |
| I/O PORTS | RJ 45 Port, WAN Port |
| ASSOCIATED DEVICES | NA |

NOTE:

1. The EUT is operated with the following power adapter.

| | |
|-----------------------|------------------------------|
| Brand Name : | HiTRON |
| Model No. : | HES10-05020-01-1 |
| Input Power : | 100 - 240V, 20-40VA, 50-60Hz |
| Output Power : | 5VDC, 2A |

2. The other models are identical, except model no..

| | |
|---------------------|--|
| BRAND NAME : | NDC |
| MODEL NO. : | BRG700CT, BRG700CV, BRG700CX BRG700AT, BRG700AD, BRG700CO BRG700CH, BRG700RO |

3. This report is prepared for FCC calss II permissive change. The difference compared with the original design is the position of the antenna and the outer appearance of the EUT. So the test is necessary.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 7 | 2442 MHz |
| 2 | 2417 MHz | 8 | 2447 MHz |
| 3 | 2422 MHz | 9 | 2452 MHz |
| 4 | 2427 MHz | 10 | 2457 MHz |
| 5 | 2432 MHz | 11 | 2462 MHz |
| 6 | 2437 MHz | | |

NOTE: 1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
 2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Broadband Residential Gateway. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-------------------|----------|----------------|--------------------------|------------------|
| 1 | Personal Computer | HP | Brio BA410 | SG12902751 | FCC DoC APPROVED |
| 2 | 21" COLOR MONITOR | HP | D2846 | JP92233133 | FCC DoC APPROVED |
| 3 | PS/2 KEYBOARD | FORWARD | FDA-104GA | FDKB8110111 | F4ZDA-104G |
| 4 | MOUSE | LOGITECH | M-S43 | LZE00703207 | DZL211106 |
| 5 | PRINTER | HP | 2225C+ | 3123S97230 | DSI6XU2225 |
| 6 | MODEM | ACEEX | 1414 | 980020510 | IFAXDM1414 |
| 7 | NOTEBOOK | DELL | Inspiron 5000e | TW-012JXN-12961-0BP-2192 | FCC DoC APPROVED |
| 8 | LAN CARD | 3COM | 3CLFE575CT-D | 6ZE1316B4E | FCC DoC APPROVED |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |
| 2 | 1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core. |
| 3 | 1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core. |
| 4 | 1.8 m foil shielded wire, terminated with PS2 connector via drain wire, w/o core. |
| 5 | 1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core. |
| 6 | 1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core. |
| 7 | NA |
| 8 | NA |

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Class B (dBuV) | |
|-----------------|----------------|---------|
| | Quasi-peak | Average |
| 0.45 – 30 | 48 | - |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|-----------|--------------|------------------|
| *ROHDE & SCHWARZ Test Receiver | ESHS30 | 828109/007 | July 4, 2002 |
| *ROHDE & SCHWARZ Artificial Mains Network (for EUT) | ESH3-Z5 | 839135/006 | July 3, 2002 |
| ROHDE & SCHWARZ 4-wire ISN | ENY41 | 837032/016 | Nov. 28, 2001 |
| ROHDE & SCHWARZ 2-wire ISN | ENY22 | 837497/016 | Dec. 3, 2001 |
| *EMCO-L.I.S.N. (for peripheral) | 3825/2 | 9204-1964 | July 3, 2002 |
| Software | Cond-V2J | NA | NA |
| *RF cable (JYEBAO) | RG-58A/U | Cable-C02.01 | July 9, 2001 |
| HP Terminator (For EMCO LISN) | 11593A | E1-01-298 | Feb. 20, 2002 |
| HP Terminator (For EMCO LISN) | 11593A | E1-01-299 | Feb. 20, 2002 |
| Shielded Room | Site 2 | ADT-C02 | NA |
| VCCI Site Registration No. | Site 2 | C-240 | NA |


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. “*” = These equipments are used for the final measurement.

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

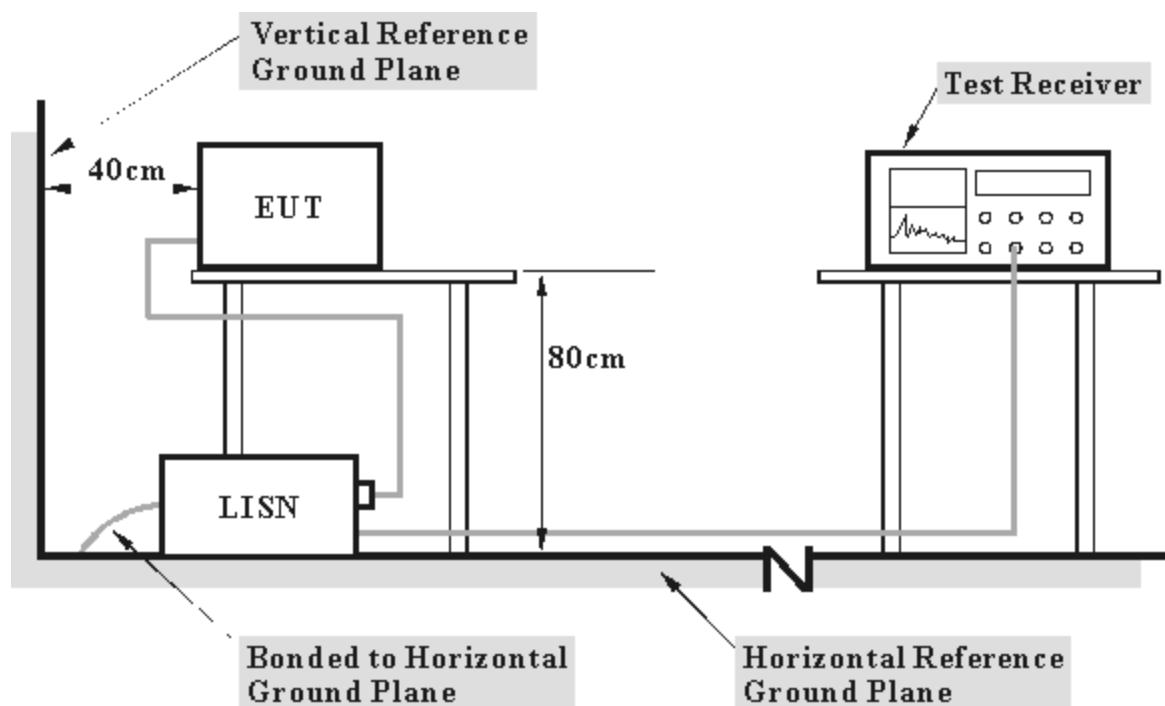

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- a. Placed the EUT (with a computer system) on the testing table.
- b. The computer system sent data to EUT by command "PIN" via an RJ 45 cable.
- c. The computer system sent "H" messages to Color Monitor and Monitor displayed "H" patterns on its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- g. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ 45 cable.
- h. The communication partner sent data to EUT by command "PIN".

4.1.6 TEST RESULTS

| | | | |
|---------------------------------|-------------------------------|----------------------|-----------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 1 | 6dB BANDWIDTH | 10 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Steven Lu |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-----|----------------|-----|
| | | | QP. | AV. | QP. | AV. | QP. | AV. | QP. | AV. |
| 1 | 1.524 | 0.10 | 25.60 | - | 25.70 | - | 48.00 | - | -22.30 | - |
| 2 | 2.667 | 0.17 | 32.39 | - | 32.56 | - | 48.00 | - | -15.44 | - |
| 3 | 9.299 | 0.48 | 33.53 | - | 34.01 | - | 48.00 | - | -13.99 | - |
| 4 | 11.357 | 0.58 | 31.73 | - | 32.31 | - | 48.00 | - | -15.69 | - |
| 5 | 14.534 | 0.77 | 33.32 | - | 34.09 | - | 48.00 | - | -13.91 | - |
| 6 | 24.998 | 1.10 | 30.78 | - | 31.88 | - | 48.00 | - | -16.12 | - |

Remarks: 1. **: Undetectable


2. QP. and AV. are abbreviations of quasi-peak and average individually.

3. -: NA

4. The emission levels of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

6. Emission Level = Correction Factor + Reading Value.

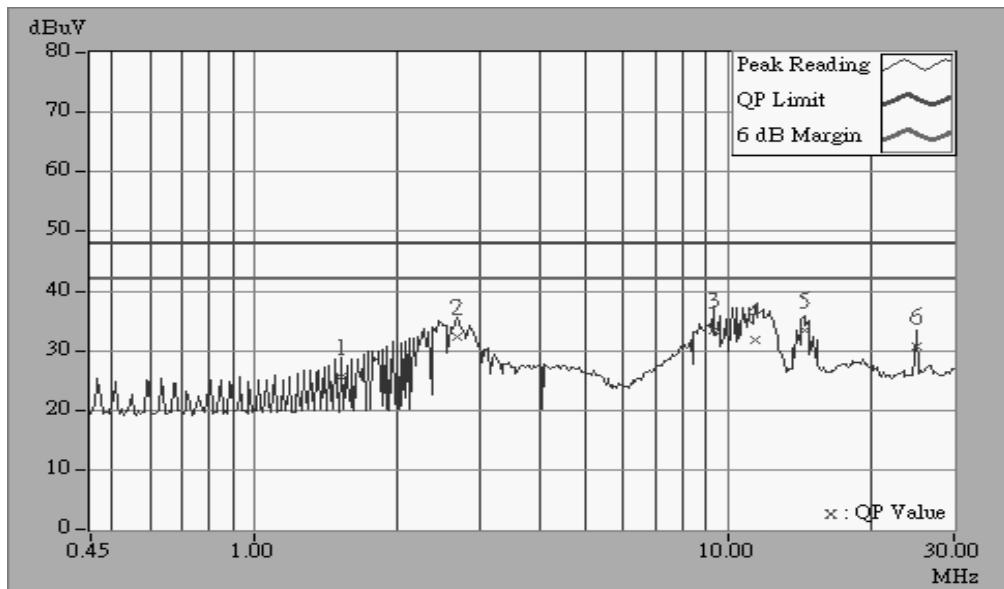

| | | | |
|---------------------------------|-------------------------------|----------------------|-----------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 1 | 6dB BANDWIDTH | 10 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Steven Lu |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-----|----------------|-----|
| | | | QP. | AV. | QP. | AV. | QP. | AV. | QP. | AV. |
| 1 | 0.507 | 0.10 | 26.50 | - | 26.60 | - | 48.00 | - | -21.40 | - |
| 2 | 2.625 | 0.16 | 33.03 | - | 33.19 | - | 48.00 | - | -14.81 | - |
| 3 | 9.299 | 0.39 | 34.52 | - | 34.91 | - | 48.00 | - | -13.09 | - |
| 4 | 12.206 | 0.49 | 35.08 | - | 35.57 | - | 48.00 | - | -12.43 | - |
| 5 | 14.531 | 0.58 | 33.50 | - | 34.08 | - | 48.00 | - | -13.92 | - |
| 6 | 24.998 | 0.90 | 31.50 | - | 32.40 | - | 48.00 | - | -15.60 | - |

Remarks: 1. **: Undetectable


2. QP. and AV. are abbreviations of quasi-peak and average individually.

3. -: NA

4. The emission levels of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

6. Emission Level = Correction Factor + Reading Value.

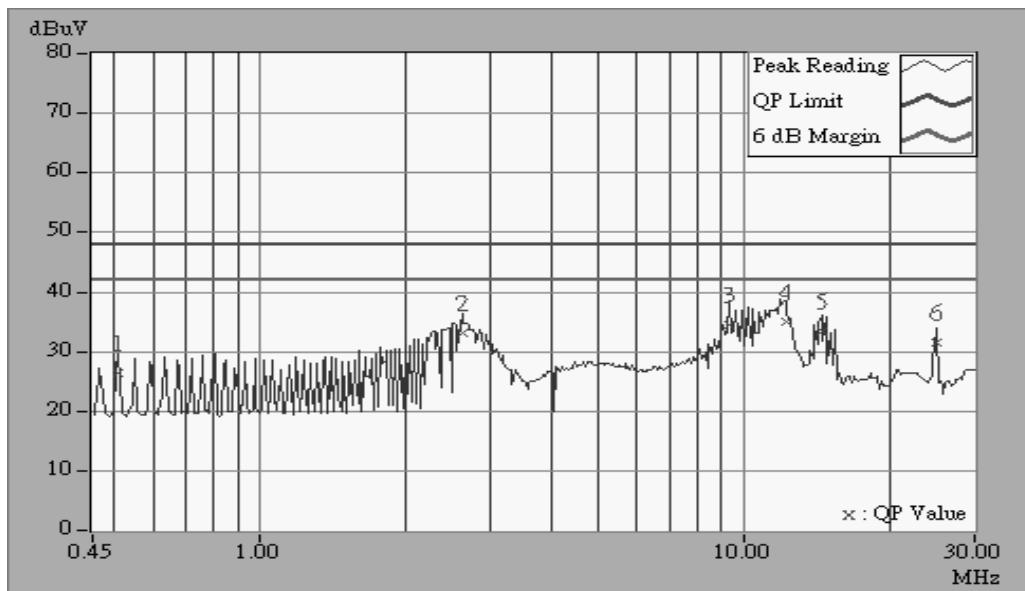

| | | | |
|---------------------------------|-------------------------------|----------------------|-----------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 6 | 6dB BANDWIDTH | 10 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Steven Lu |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-----|----------------|-----|
| | | | QP. | AV. | QP. | AV. | QP. | AV. | QP. | AV. |
| 1 | 0.549 | 0.10 | 21.11 | - | 21.21 | - | 48.00 | - | -26.79 | - |
| 2 | 2.541 | 0.15 | 32.84 | - | 32.99 | - | 48.00 | - | -15.01 | - |
| 3 | 9.587 | 0.49 | 33.33 | - | 33.82 | - | 48.00 | - | -14.18 | - |
| 4 | 11.045 | 0.56 | 33.87 | - | 34.43 | - | 48.00 | - | -13.57 | - |
| 5 | 14.528 | 0.77 | 33.12 | - | 33.89 | - | 48.00 | - | -14.11 | - |
| 6 | 24.998 | 1.10 | 30.82 | - | 31.92 | - | 48.00 | - | -16.08 | - |

Remarks: 1. **: Undetectable


2. QP. and AV. are abbreviations of quasi-peak and average individually.

3. -: NA

4. The emission levels of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

6. Emission Level = Correction Factor + Reading Value.

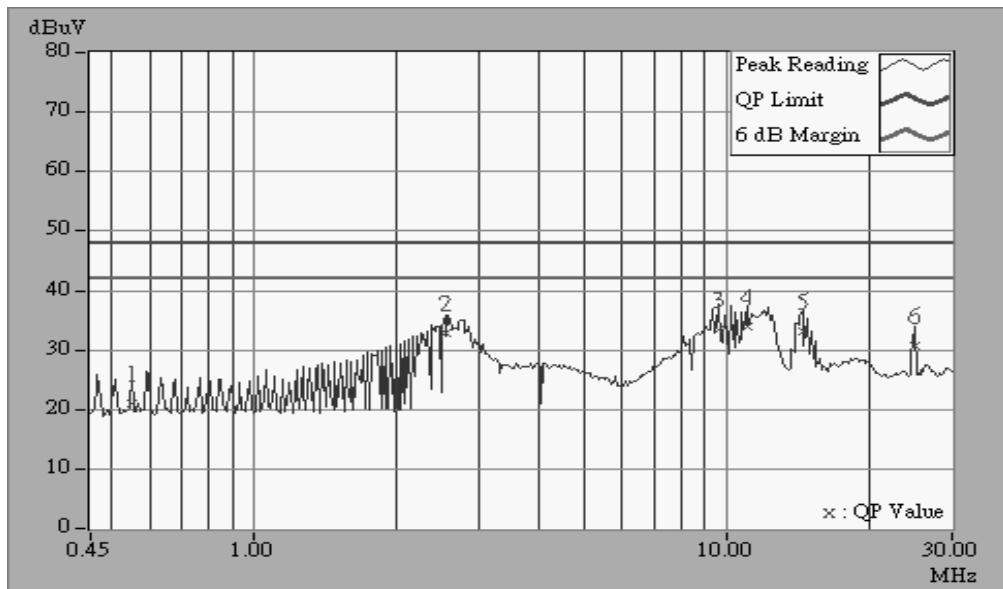

| | | | |
|---------------------------------|-------------------------------|----------------------|-----------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 6 | 6dB BANDWIDTH | 10 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Steven Lu |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-----|----------------|-----|
| | | | QP. | AV. | QP. | AV. | QP. | AV. | QP. | AV. |
| 1 | 0.507 | 0.10 | 26.52 | - | 26.62 | - | 48.00 | - | -21.38 | - |
| 2 | 2.583 | 0.16 | 33.15 | - | 33.31 | - | 48.00 | - | -14.69 | - |
| 3 | 9.590 | 0.39 | 34.46 | - | 34.85 | - | 48.00 | - | -13.15 | - |
| 4 | 11.627 | 0.47 | 32.95 | - | 33.42 | - | 48.00 | - | -14.58 | - |
| 5 | 14.531 | 0.58 | 33.16 | - | 33.74 | - | 48.00 | - | -14.26 | - |
| 6 | 24.998 | 0.90 | 31.62 | - | 32.52 | - | 48.00 | - | -15.48 | - |

Remarks: 1. **: Undetectable


2. QP. and AV. are abbreviations of quasi-peak and average individually.

3. -: NA

4. The emission levels of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

6. Emission Level = Correction Factor + Reading Value.

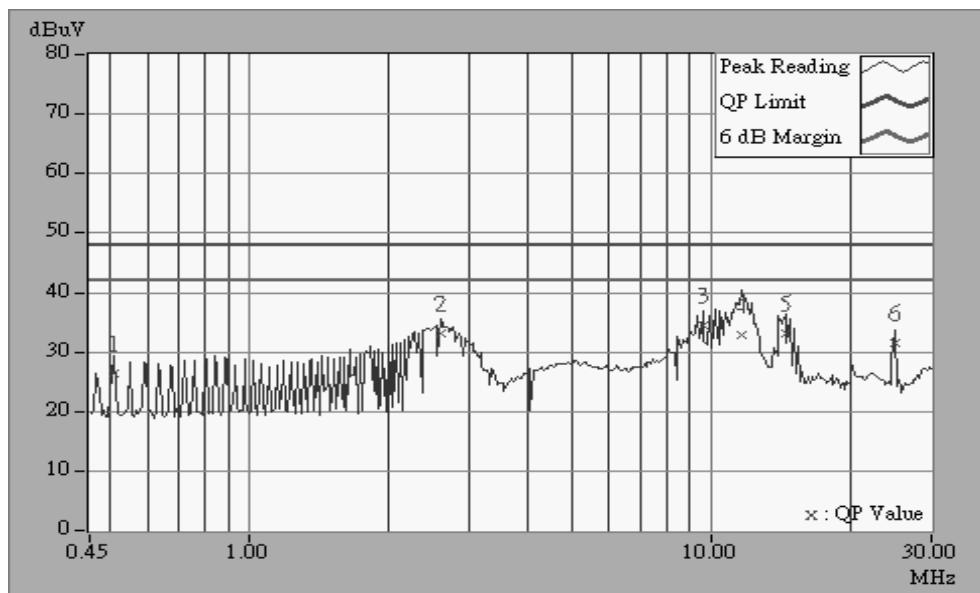

| | | | |
|---------------------------------|-------------------------------|----------------------|-----------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 11 | 6dB BANDWIDTH | 10 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Steven Lu |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-----|----------------|-----|
| | | | QP. | AV. | QP. | AV. | QP. | AV. | QP. | AV. |
| 1 | 0.549 | 0.10 | 21.01 | - | 21.11 | - | 48.00 | - | -26.89 | - |
| 2 | 2.712 | 0.17 | 32.40 | - | 32.57 | - | 48.00 | - | -15.43 | - |
| 3 | 9.299 | 0.48 | 34.08 | - | 34.56 | - | 48.00 | - | -13.44 | - |
| 4 | 12.203 | 0.63 | 34.04 | - | 34.67 | - | 48.00 | - | -13.33 | - |
| 5 | 14.531 | 0.77 | 33.65 | - | 34.42 | - | 48.00 | - | -13.58 | - |
| 6 | 24.998 | 1.10 | 30.90 | - | 32.00 | - | 48.00 | - | -16.00 | - |

Remarks: 1. **: Undetectable


2. QP. and AV. are abbreviations of quasi-peak and average individually.

3. -: NA

4. The emission levels of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

6. Emission Level = Correction Factor + Reading Value.

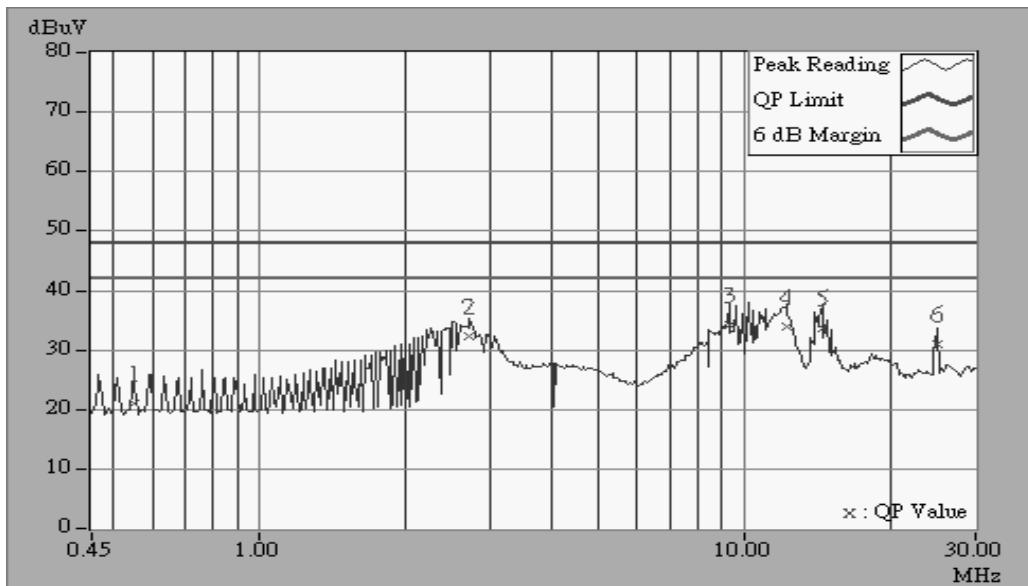

| | | | |
|---------------------------------|-------------------------------|----------------------|-----------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 11 | 6dB BANDWIDTH | 10 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Steven Lu |

| No | Freq. | Corr. Factor | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|--------|--------------|-------------------------|-----|--------------------------|-----|-----------------|-----|-------------|-----|
| | [MHz] | (dB) | QP. | AV. | QP. | AV. | QP. | AV. | QP. | AV. |
| 1 | 0.507 | 0.10 | 26.94 | - | 27.04 | - | 48.00 | - | -20.96 | - |
| 2 | 2.457 | 0.15 | 32.75 | - | 32.90 | - | 48.00 | - | -15.10 | - |
| 3 | 9.299 | 0.39 | 35.17 | - | 35.56 | - | 48.00 | - | -12.44 | - |
| 4 | 11.633 | 0.47 | 30.15 | - | 30.62 | - | 48.00 | - | -17.38 | - |
| 5 | 14.531 | 0.58 | 33.30 | - | 33.88 | - | 48.00 | - | -14.12 | - |
| 6 | 24.998 | 0.90 | 33.72 | - | 34.62 | - | 48.00 | - | -13.38 | - |

Remarks: 1. **: Undetectable


2. QP. and AV. are abbreviations of quasi-peak and average individually.

3. -: NA

4. The emission levels of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

6. Emission Level = Correction Factor + Reading Value.

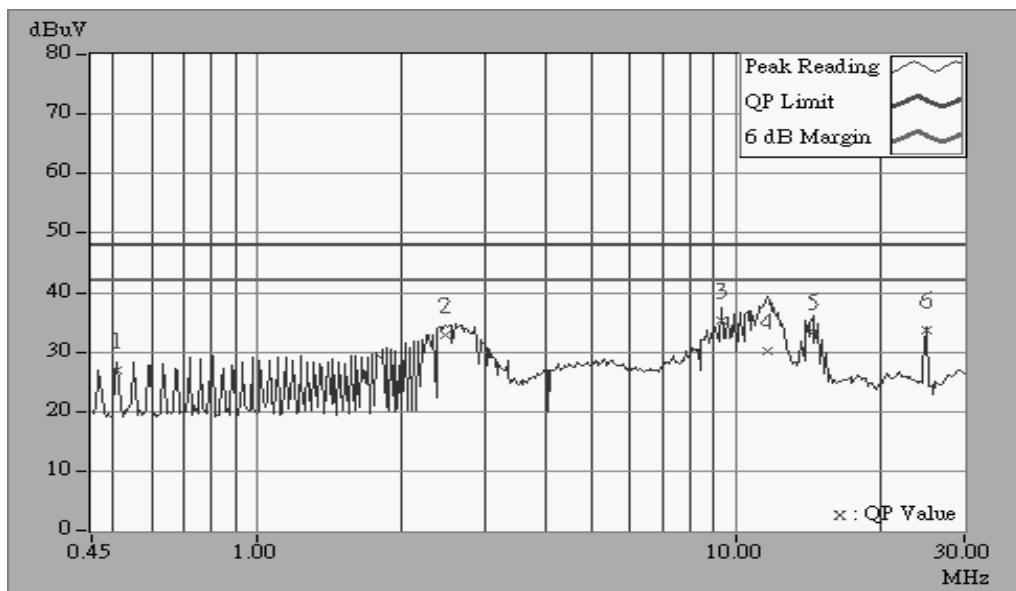

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field Strength of Fundamental | |
|----------------------|-------------------------------|--------|
| | uV/m | dBuV/m |
| 30-88 | 100 | 40.0 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46.0 |
| Above 960 | 500 | 54.0 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|---|--------------|------------------|
| ROHDE & SCHWARZ Test Receiver | ESCS30 | 847793/022 | Feb. 25, 2002 |
| ROHDE & SCHWARZ Artificial Mains Network (for EUT) | ESH2-Z5 | 828075/003 | July 19, 2002 |
| ROHDE & SCHWARZ 4-wire ISN | ENY41 | 838119/028 | Dec. 12, 2001 |
| ROHDE & SCHWARZ 2-wire ISN | ENY22 | 837497/018 | Dec. 3, 2001 |
| EMCO-L.I.S.N. (for peripheral) | 3825/2 | 90031627 | July 19, 2002 |
| Software | Cond-V2J | NA | NA |
| RF cable (JYEBAO) | RG-58A/U | Cable-C05.01 | July 19, 2002 |
| LYNICS Terminator (For EMCO LISN) | 0900510 | E1-01-305 | Feb. 20, 2002 |
| LYNICS Terminator (For EMCO LISN) | 0900510 | E1-01-306 | Feb. 20, 2002 |
| Shielded Room | Site 5 | ADT-C05 | NA |
| VCCI Site Registration No. | Site 5 | C-1093 | NA |
| Site Registration No. | FCC: 90422 VCCI : R-1039 Canada IC: IC 3789-5 | | |

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. ** = These equipments are used for the final measurement.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

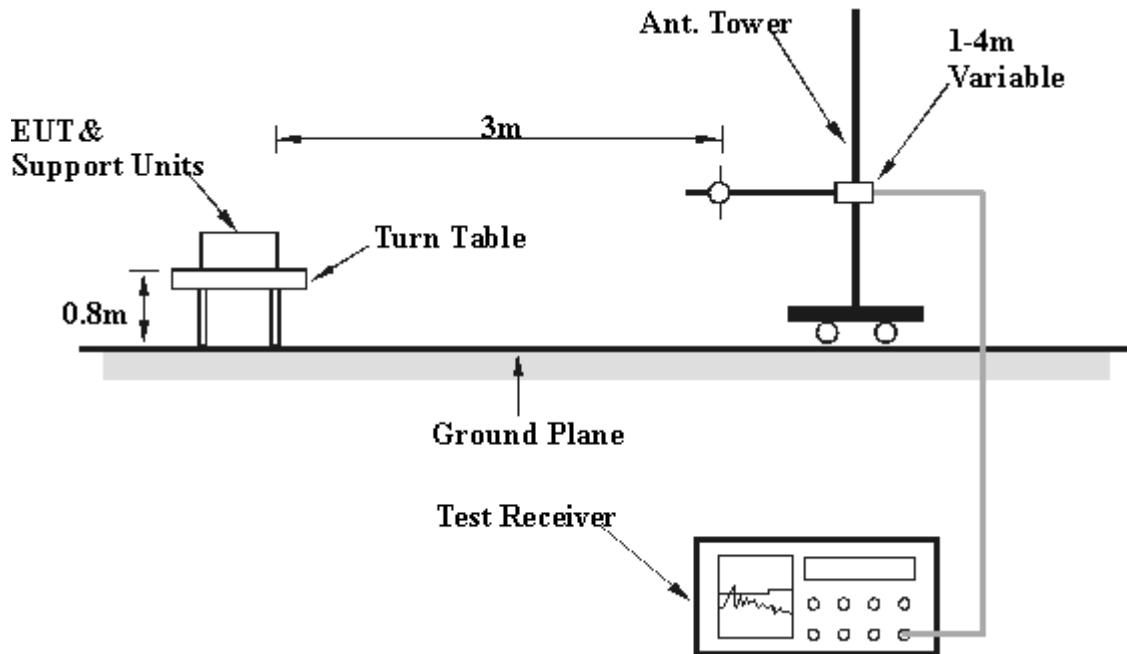

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS

| | | | |
|---------------------------------|-------------------------------|--------------------------|------------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 11 | FREQUENCY RANGE | 30-1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | | TESTED BY: Gary Chang |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 200.00 | 37.8 QP | 43.50 | -5.70 | 2.46H | 191 | 27.40 | 8.98 | 1.42 | 0.00 | -10.40 |
| 2 | 250.01 | 37.5 QP | 46.00 | -8.50 | 1.67H | 206 | 23.80 | 12.02 | 1.66 | 0.00 | -13.69 |
| 3 | 350.17 | 39.4 QP | 46.00 | -6.60 | 1.76H | 8 | 23.10 | 14.21 | 2.04 | 0.00 | -16.26 |
| 4 | 375.04 | 39.7 QP | 46.00 | -6.30 | 1.80H | 218 | 22.40 | 15.13 | 2.14 | 0.00 | -17.27 |
| 5 | 550.02 | 37.8 QP | 46.00 | -8.20 | 1.09H | 113 | 17.20 | 17.93 | 2.68 | 0.00 | -20.60 |
| 6 | 575.02 | 38.5 QP | 46.00 | -7.50 | 1.77H | 256 | 17.41 | 18.28 | 2.76 | 0.00 | -21.04 |
| 7 | 625.05 | 38.0 QP | 46.00 | -8.00 | 1.02H | 8 | 16.20 | 18.91 | 2.92 | 0.00 | -21.83 |
| 8 | 660.00 | 37.5 QP | 46.00 | -8.50 | 1.62H | 299 | 15.20 | 19.25 | 3.05 | 0.00 | -22.29 |
| 9 | 748.21 | 37.2 QP | 46.00 | -8.80 | 1.41H | 239 | 13.80 | 20.14 | 3.26 | 0.00 | -23.40 |
| 10 | 750.02 | 36.1 QP | 46.00 | -9.90 | 1.72H | 40 | 12.70 | 20.18 | 3.26 | 0.00 | -23.44 |
| 11 | 850.67 | 37.7 QP | 46.00 | -8.30 | 1.49H | 309 | 13.70 | 20.48 | 3.50 | 0.00 | -23.98 |
| 12 | 875.00 | 36.7 QP | 46.00 | -9.30 | 1.38H | 5 | 12.50 | 20.63 | 3.54 | 0.00 | -24.18 |
| 13 | 900.00 | 37.8 QP | 46.00 | -8.20 | 2.35H | 191 | 13.40 | 20.80 | 3.58 | 0.00 | -24.39 |
| 14 | 900.00 | 42.6 QP | 46.00 | -3.40 | 2.30H | 355 | 18.20 | 20.80 | 3.58 | 0.00 | -24.39 |
| 15 | 950.46 | 39.5 QP | 46.00 | -6.50 | 1.27H | 206 | 14.50 | 21.21 | 3.79 | 0.00 | -25.01 |

NOTE:

- 1 Emission level = Raw Value - Correction Factor
- 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level - Limit value



| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 149.99 | 37.7 QP | 43.50 | -5.80 | 1.18V | 39 | 26.20 | 10.30 | 1.20 | 0.00 | -11.51 |
| 2 | 200.00 | 40.6 QP | 43.50 | -2.90 | 1.07V | 347 | 30.25 | 8.98 | 1.42 | 0.00 | -10.40 |
| 3 | 250.17 | 35.1 QP | 46.00 | -10.90 | 1.40V | 283 | 21.40 | 12.02 | 1.66 | 0.00 | -13.69 |
| 4 | 350.47 | 38.4 QP | 46.00 | -7.60 | 1.53V | 91 | 22.10 | 14.21 | 2.04 | 0.00 | -16.26 |
| 5 | 400.12 | 38.4 QP | 46.00 | -7.60 | 1.95V | 273 | 20.10 | 16.11 | 2.24 | 0.00 | -18.36 |
| 6 | 475.14 | 35.5 QP | 46.00 | -10.50 | 1.88V | 149 | 16.20 | 16.83 | 2.46 | 0.00 | -19.29 |
| 7 | 500.00 | 41.3 QP | 46.00 | -4.70 | 1.46V | 313 | 21.50 | 17.26 | 2.50 | 0.00 | -19.77 |
| 8 | 525.01 | 35.3 QP | 46.00 | -10.70 | 1.35V | 173 | 15.10 | 17.59 | 2.59 | 0.00 | -20.18 |
| 9 | 550.01 | 41.3 QP | 46.00 | -4.70 | 1.49V | 191 | 20.70 | 17.93 | 2.68 | 0.00 | -20.61 |
| 10 | 650.05 | 35.1 QP | 46.00 | -10.90 | 1.12V | 99 | 12.80 | 19.23 | 3.02 | 0.00 | -22.26 |
| 11 | 748.24 | 38.2 QP | 46.00 | -7.80 | 2.40V | 89 | 14.80 | 20.14 | 3.26 | 0.00 | -23.41 |
| 12 | 750.04 | 38.8 QP | 46.00 | -7.20 | 1.32V | 15 | 15.40 | 20.18 | 3.26 | 0.00 | -23.45 |
| 13 | 850.47 | 35.4 QP | 46.00 | -10.60 | 1.60V | 195 | 11.40 | 20.48 | 3.50 | 0.00 | -23.98 |
| 14 | 875.00 | 36.6 QP | 46.00 | -9.40 | 1.05V | 221 | 12.40 | 20.63 | 3.54 | 0.00 | -24.18 |
| 15 | 900.40 | 33.5 QP | 46.00 | -12.50 | 1.75V | 232 | 9.10 | 20.80 | 3.58 | 0.00 | -24.40 |
| 16 | 950.47 | 33.4 QP | 46.00 | -12.60 | 1.73V | 7 | 8.40 | 21.21 | 3.79 | 0.00 | -25.01 |

NOTE:

- 1 Emission level = Raw Value - Correction Factor
- 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level - Limit value



| | | | |
|---------------------------------|-------------------------------|--------------------------|--------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 1 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | TESTED BY: | Gary Chang |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|--|----------------|-------------------------------|-----------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 2037.80 | 46.6 PK | 74.00 | -27.40 | 1.04H | 57 | 18.07 | 25.27 | 3.29 | 0.00 | -28.57 |
| 2 | *2413.40 | 100.2 PK | - | - | 1.65H | 316 | 69.38 | 27.19 | 3.62 | 0.00 | -30.82 |
| 3 | *2413.40 | 94.0 AV | - | - | 1.65H | 316 | 63.20 | 27.19 | 3.62 | 0.00 | -30.82 |
| 4 | 4075.20 | 50.1 PK | 74.00 | -23.90 | 1.47H | 287 | 15.20 | 30.18 | 4.77 | 0.00 | -34.95 |
| 5 | 4824.20 | 56.4 PK | 74.00 | -17.60 | 1.68H | 226 | 19.72 | 31.43 | 5.21 | 0.00 | -36.64. |
| 6 | 4824.20 | 43.0 AV | 54.00 | -11.00 | 1.68H | 226 | 6.40 | 31.43 | 5.21 | 0.00 | -36.64 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|--|----------------|-------------------------------|-----------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 2037.80 | 49.2 PK | 74.00 | -24.80 | 2.01V | 135 | 20.61 | 25.27 | 3.29 | 0.00 | -28.57 |
| 2 | *2413.50 | 106.0 PK | - | - | 1.82V | 57 | 75.23 | 27.19 | 3.62 | 0.00 | -30.81. |
| 3 | *2413.50 | 99.2 AV | - | - | 1.82V | 57 | 68.40 | 27.19 | 3.62 | 0.00 | -30.81. |
| 4 | 4075.50 | 49.7 PK | 74.00 | -24.30 | 1.11V | 287 | 14.80 | 30.18 | 4.77 | 0.00 | -34.95 |
| 5 | 4824.60 | 62.0 PK | 74.00 | -12.00 | 1.62V | 344 | 25.34 | 31.43 | 5.21 | 0.00 | -36.64. |
| 6 | 4824.60 | 50.2 AV | 54.00 | -3.80 | 1.62V | 344 | 13.54 | 31.43 | 5.21 | 0.00 | -36.64 |

NOTE:

1. Emission level = Raw Value - Correction Factor
2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



| | | | |
|---------------------------------|-------------------------------|--------------------------|--------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 6 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | TESTED BY: | Gary Chang |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|--|----------------|-------------------------------|-----------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 2062.80 | 45.3 PK | 74.00 | -28.70 | 1.29H | 53 | 16.60 | 25.39 | 3.31 | 0.00 | -28.70 |
| 2 | *2438.60 | 100.2 PK | - | - | 1.78H | 15 | 69.22 | 27.30 | 3.64 | 0.00 | -30.95 |
| 3 | *2438.60 | 94.3 AV | - | - | 1.78H | 15 | 63.40 | 27.30 | 3.64 | 0.00 | -30.95 |
| 4 | 4125.50 | 50.5 PK | 74.00 | -23.50 | 1.75H | 193 | 15.40 | 30.28 | 4.79 | 0.00 | -35.07 |
| 5 | 4873.70 | 55.4 PK | 74.00 | -18.6 | 1.41H | 345 | 18.66 | 31.47 | 5.25 | 0.00 | -36.72. |
| 6 | 4873.70 | 42.5 AV | 54.00 | -11.50 | 1.41H | 345 | 5.80 | 31.47 | 5.25 | 0.00 | -36.72 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|--|----------------|-------------------------------|-----------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 2063.50 | 48.6 PK | 74.00 | -25.40 | 1.99V | 58 | 19.90 | 25.39 | 3.31 | 0.00 | -28.70 |
| 2 | *2438.50 | 108.4 PK | - | - | 1.62V | 327 | 77.50 | 27.30 | 3.64 | 0.00 | -30.94 |
| 3 | *2438.50 | 102.3 AV | - | - | 1.62V | 327 | 71.40 | 27.30 | 3.64 | 0.00 | -30.94 |
| 4 | 4125.70 | 49.7 PK | 74.00 | -24.30 | 1.67V | 69 | 14.67 | 30.28 | 4.79 | 0.00 | -35.07 |
| 5 | 4876.50 | 62.9 PK | 74.00 | -11.10 | 1.14V | 225 | 26.17 | 31.47 | 5.25 | 0.00 | -36.72 |
| 6 | 4876.50 | 50.2 AV | 54.00 | -3.80 | 1.14V | 225 | 13.53 | 31.47 | 5.25 | 0.00 | -36.72 |

NOTE:

1. Emission level = Raw Value - Correction Factor
2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



| | | | |
|---------------------------------|-------------------------------|--------------------------|--------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| MODE | Channel 11 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa | TESTED BY: | Gary Chang |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|--|----------------|-------------------------------|-----------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 2087.40 | 47.6 PK | 74.00 | -26.40 | 1.18H | 144 | 18.81 | 25.50 | 3.33 | 0.00 | -28.83 |
| 2 | *2462.70 | 100.1 PK | - | - | 1.06H | 79 | 69.07 | 27.41 | 3.66 | 0.00 | -31.07. |
| 3 | *2462.70 | 93.5 AV | - | - | 1.06H | 79 | 62.40 | 27.41 | 3.66 | 0.00 | -31.07. |
| 4 | 2494.20 | 52.7 PK | 74.00 | -21.30 | 1.27H | 223 | 21.50 | 27.52 | 3.68 | 0.00 | -31.20 |
| 5 | 2494.20 | 44.5 AV | 54.00 | -9.50 | 1.27H | 223 | 13.27 | 27.52 | 3.68 | 0.00 | -31.20 |
| 6 | 4175.30 | 50.0 PK | 74.00 | -24.00 | 1.50H | 281 | 14.80 | 30.38 | 4.81 | 0.00 | -35.19 |
| 7 | 4924.50 | 56.0 PK | 74.00 | -18.00 | 1.78H | 196 | 19.24 | 31.51 | 5.28 | 0.00 | -36.80. |
| 8 | 4924.50 | 41.9 AV | 54.00 | -12.10 | 1.78H | 196 | 5.10 | 31.51 | 5.28 | 0.00 | -36.80 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|--|----------------|-------------------------------|-----------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
| 1 | 2087.70 | 49.1 PK | 74.00 | -24.90 | 1.15V | 131 | 20.30 | 25.50 | 3.33 | 0.00 | -28.83 |
| 2 | *2463.50 | 109.5 PK | - | - | 1.27V | 336 | 78.40 | 27.41 | 3.66 | 0.00 | -31.08 |
| 3 | *2463.50 | 103.4 AV | - | - | 1.27V | 336 | 72.30 | 27.41 | 3.66 | 0.00 | -31.08 |
| 4 | 2483.80 | 59.5 PK | 74.00 | -14.50 | 1.24V | 225 | 28.31 | 27.52 | 3.68 | 0.00 | -31.21 |
| 5 | 2483.80 | 48.7 AV | 54.00 | -5.30 | 1.24V | 225 | 17.50 | 27.52 | 3.68 | 0.00 | -31.20 |
| 6 | 4176.20 | 50.1 PK | 74.00 | -23.90 | 1.66V | 224 | 14.90 | 30.38 | 4.81 | 0.00 | -35.19 |
| 7 | 4921.90 | 62.4 PK | 74.00 | -11.60 | 1.54V | 334 | 25.64 | 31.51 | 5.28 | 0.00 | -36.80. |
| 8 | 4921.90 | 48.9 AV | 54.00 | -5.10 | 1.54V | 334 | 12.08 | 31.51 | 5.28 | 0.00 | -36.80 |

NOTE:

1. Emission level= Raw Value - Correction Factor
2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

4.3 6DB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|-------------------------------|-----------|------------|------------------|
| ROHDE & SCHWARZ TEST RECEIVER | ESMI | 839379/002 | Dec. 28, 2001 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7475A | 2641V27755 | N/A |


Notes:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP

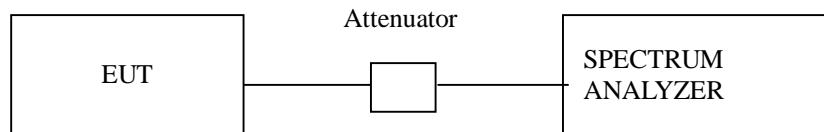

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS


| | | | |
|-----------------------------|-------------------------------|---------------------------------|----------------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27 deg. C, 65%RH, 1005 hPa |
| TESTED BY: Steven Lu | | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6 dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|---------|-------------------------|----------------------|---------------------|-----------|
| 1 | 2412 | 8.84 | 0.5 | PASS |
| 6 | 2437 | 8.84 | 0.5 | PASS |
| 11 | 2462 | 8.84 | 0.5 | PASS |


CH1

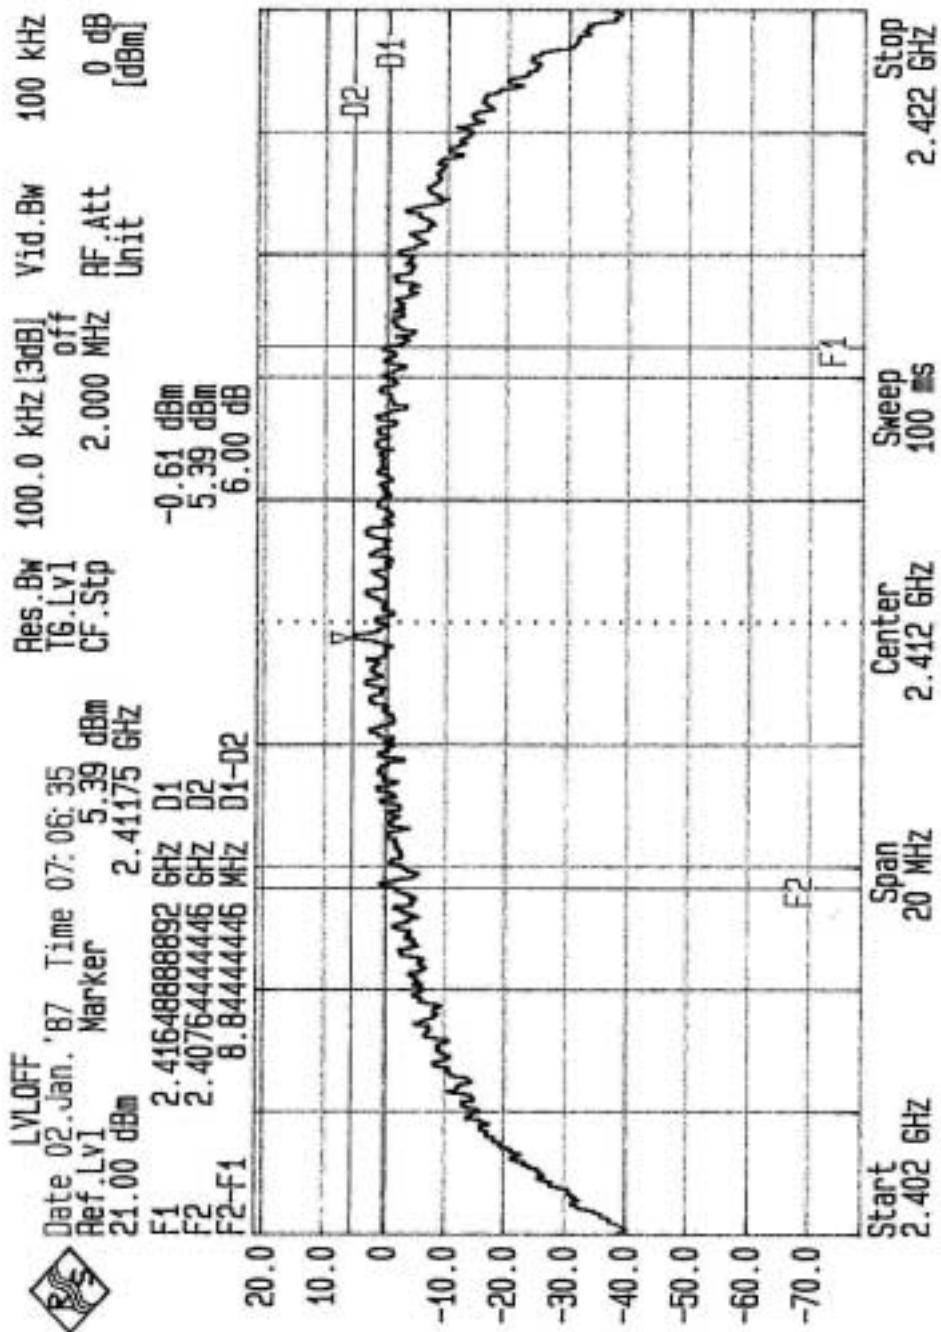

CH6

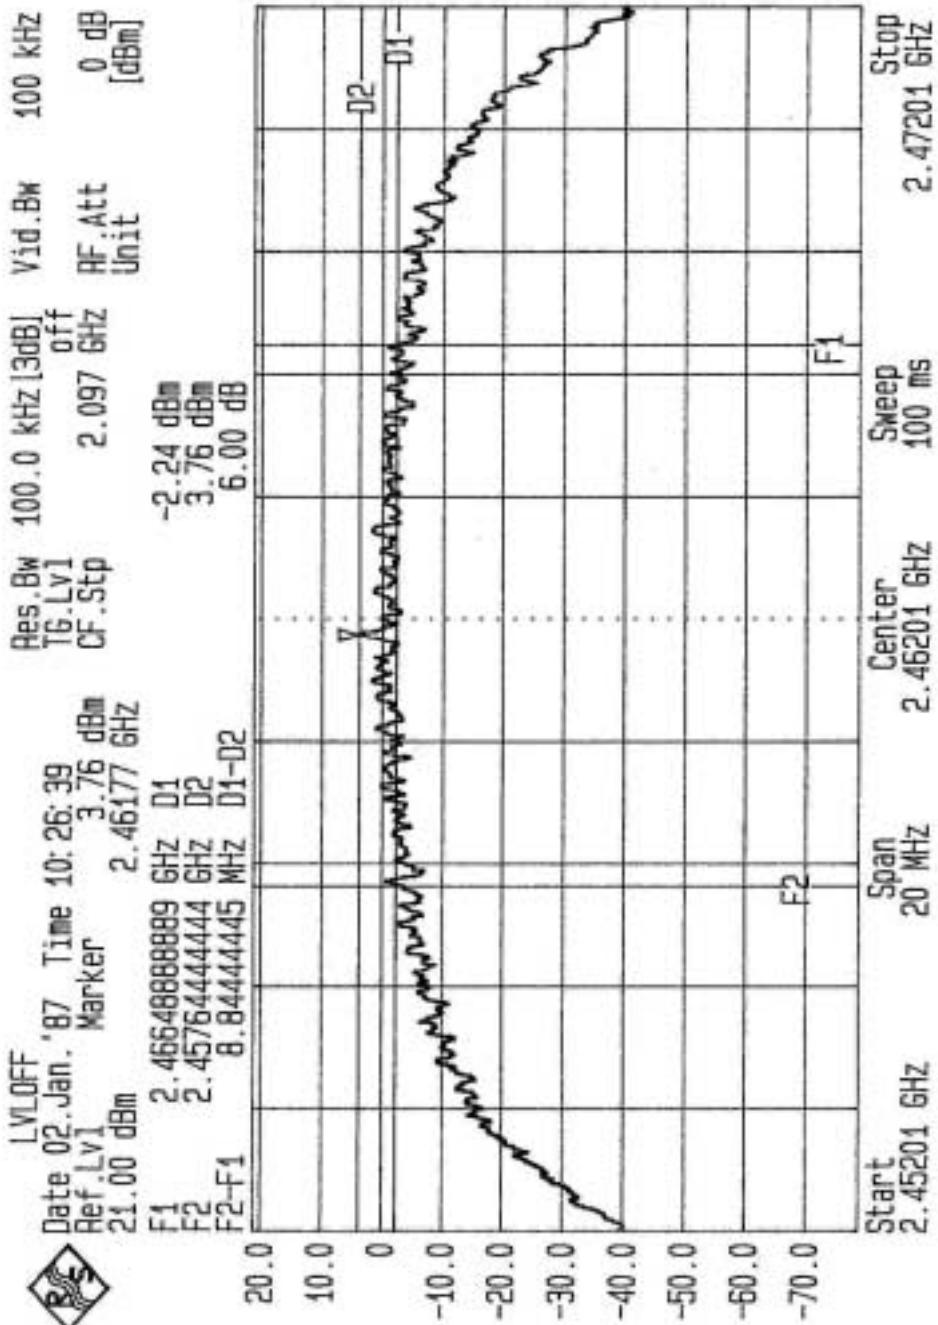

CH11

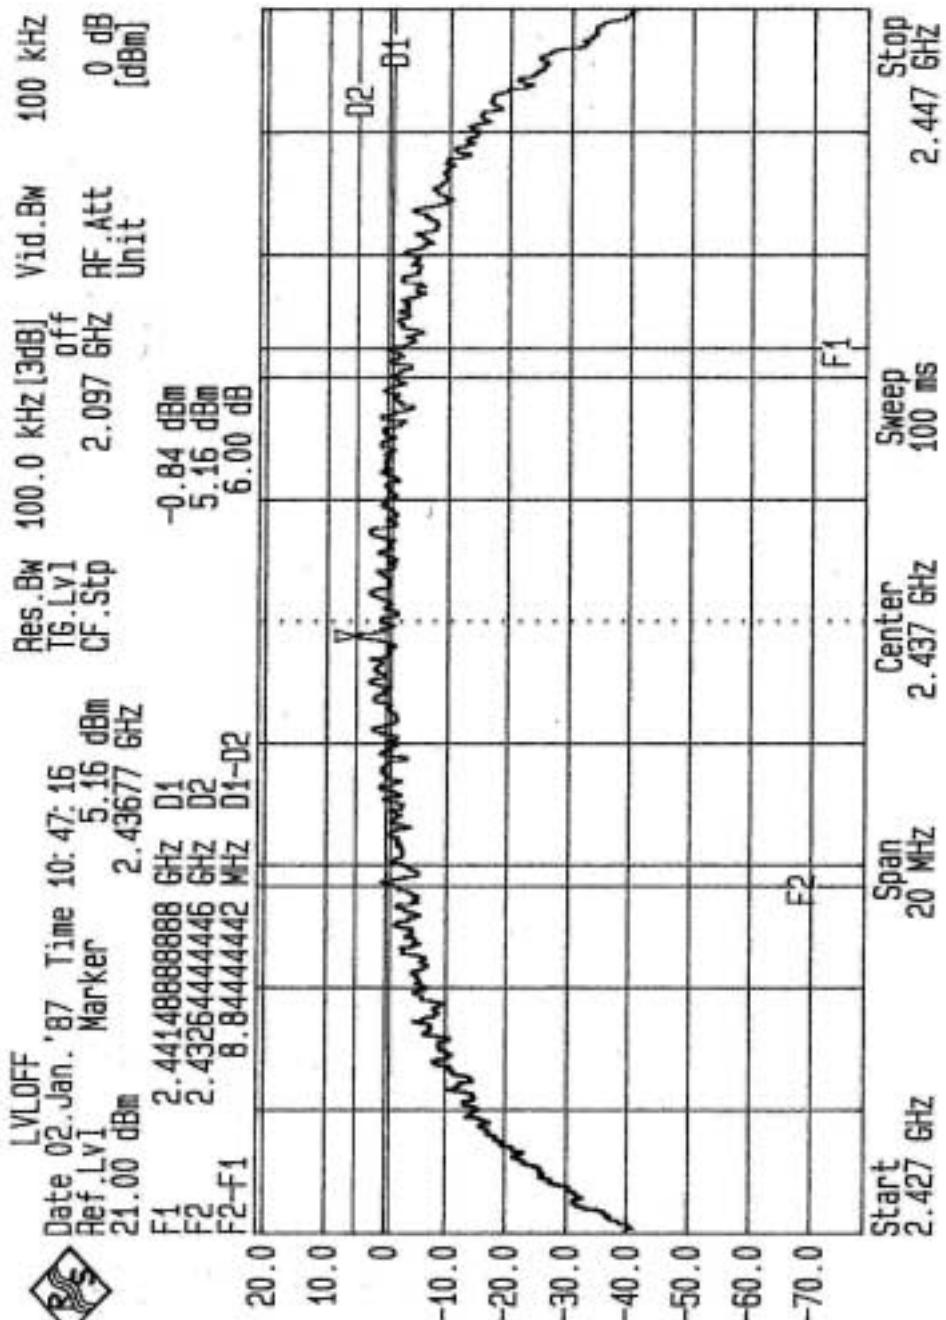

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|-------------------------------|-----------|------------|------------------|
| ROHDE & SCHWARZ TEST RECEIVER | ESMI | 839379/002 | Dec. 28, 2001 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7475A | 2641V27755 | N/A |

NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.


2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
3. The span of the spectrum analyzer was larger than 6dB BandWidth plus 10MHz.
4. Used Peak Search to read the peak power after Maximum Hold function is activated.
5. Shifted the marker to +/- 3MHz and +/-6MHz, and recorded the reading.
6. The Maximum Peak Output Power is the linear summation of the five readings in 4 and 5.

NOTE: This measurement is the total power of 12MHz bandwidth which is far more wider than 6dB bandwidth.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 3.4.5



4.4.6 TEST RESULTS

| | | | |
|-----------------------------|-------------------------------|---------------------------------|----------------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25 deg. C, 60%RH, 1005 hPa |
| TESTED BY: Steven Lu | | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|-----------|
| 1 | 2412 | 18.17 | 30 | PASS |
| 6 | 2437 | 18.58 | 30 | PASS |
| 11 | 2462 | 17.49 | 30 | PASS |

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|-------------------------------|-----------|------------|------------------|
| ROHDE & SCHWARZ TEST RECEIVER | ESMI | 839379/002 | Dec. 28, 2001 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7475A | 2641V27755 | N/A |

NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.


2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITION

Same as Item 3.4.5




4.5.6 TEST RESULTS


| | | | |
|-----------------------------|-------------------------------|---------------------------------|----------------------------------|
| EUT | Broadband Residential Gateway | MODEL | BRG700 |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27 deg. C, 65%RH, 1005 hPa |
| TESTED BY: Steven Lu | | | |

| CHANNEL NUMBER | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|----------------|-------------------------|----------------------------------|---------------------|-----------|
| 1 | 2412 | -10.97 | 8 | PASS |
| 6 | 2437 | -12.72 | 8 | PASS |
| 11 | 2462 | -11.02 | 8 | PASS |


CH1

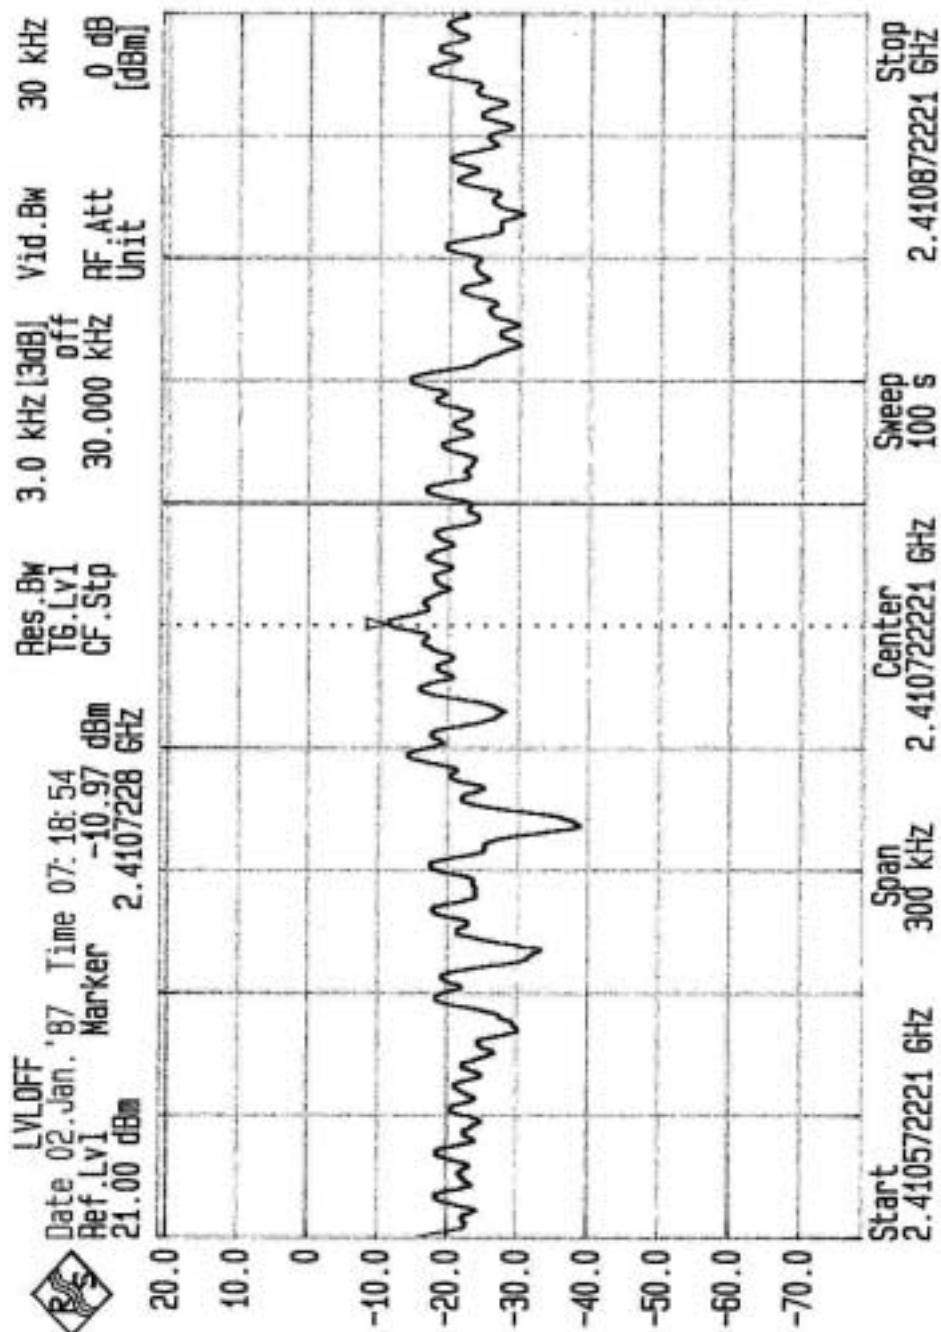

CH6

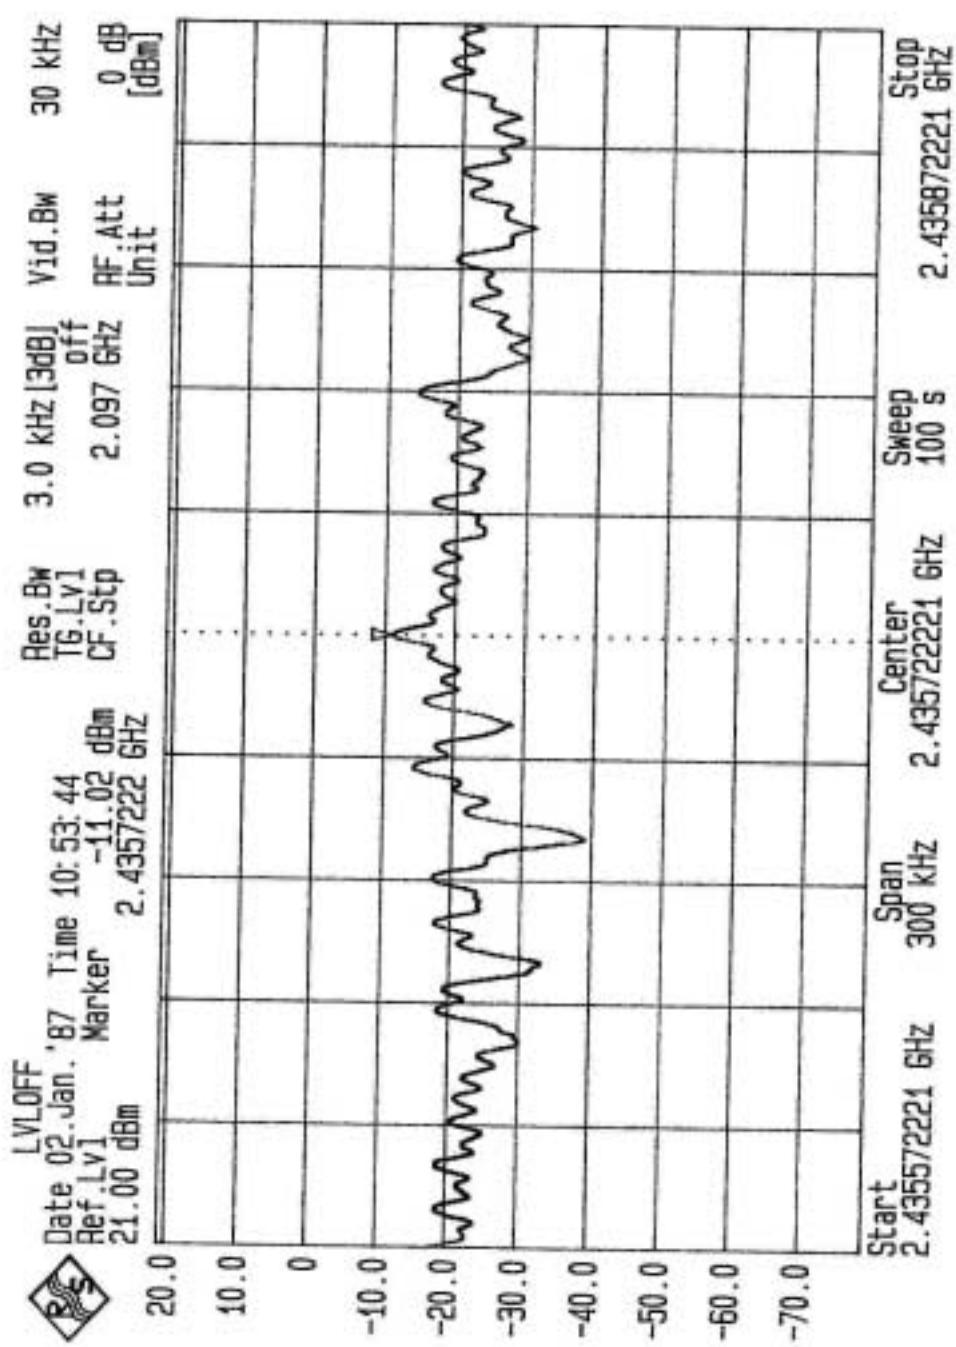

CH11

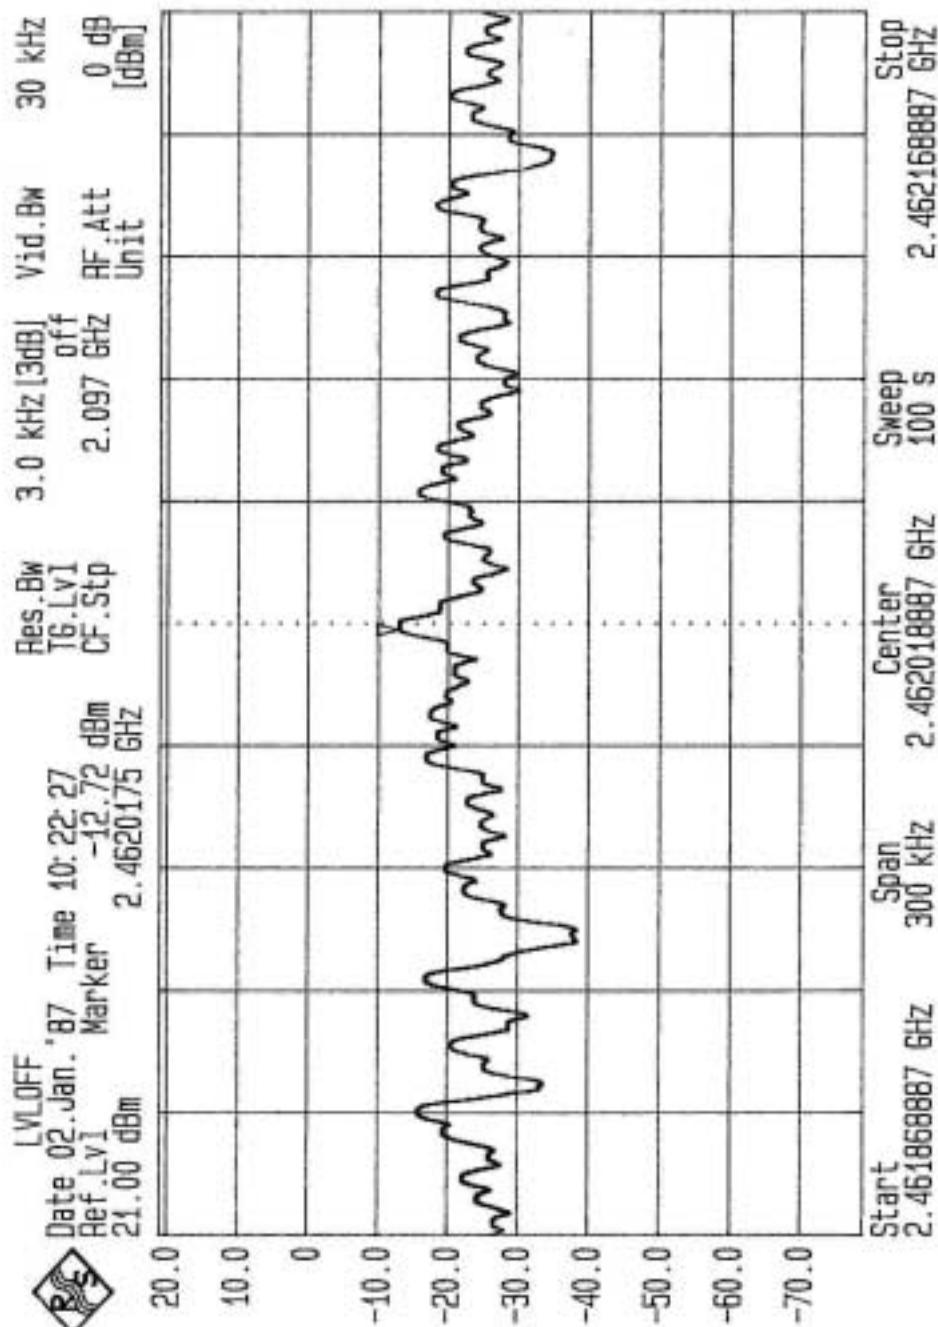



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|-------------------------------|-----------|--------------------------|------------------|
| ROHDE & SCHWARZ TEST RECEIVER | ESMI | 848926/005 846839/018 | Dec 28, 2001 |
| HP ATTENUATOR | 8496B | 3247A18505 | Cal. on use |
| HP PLOTTER | 7475A | 2641V27755 | N/A |

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.




4.6.4 EUT OPERATING CONDITION


Same as Item 3.4.5

4.6.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 49.97dB delta between carrier maximum power and local maximum emission in restrict band (2.4885GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.6 (Page 26) is 103.4dB_uV/m, so the maximum field strength in restrict band is $103.4 - 49.97 = 53.43$ dB_uV/m which is under 54 dB_uV/m limit.

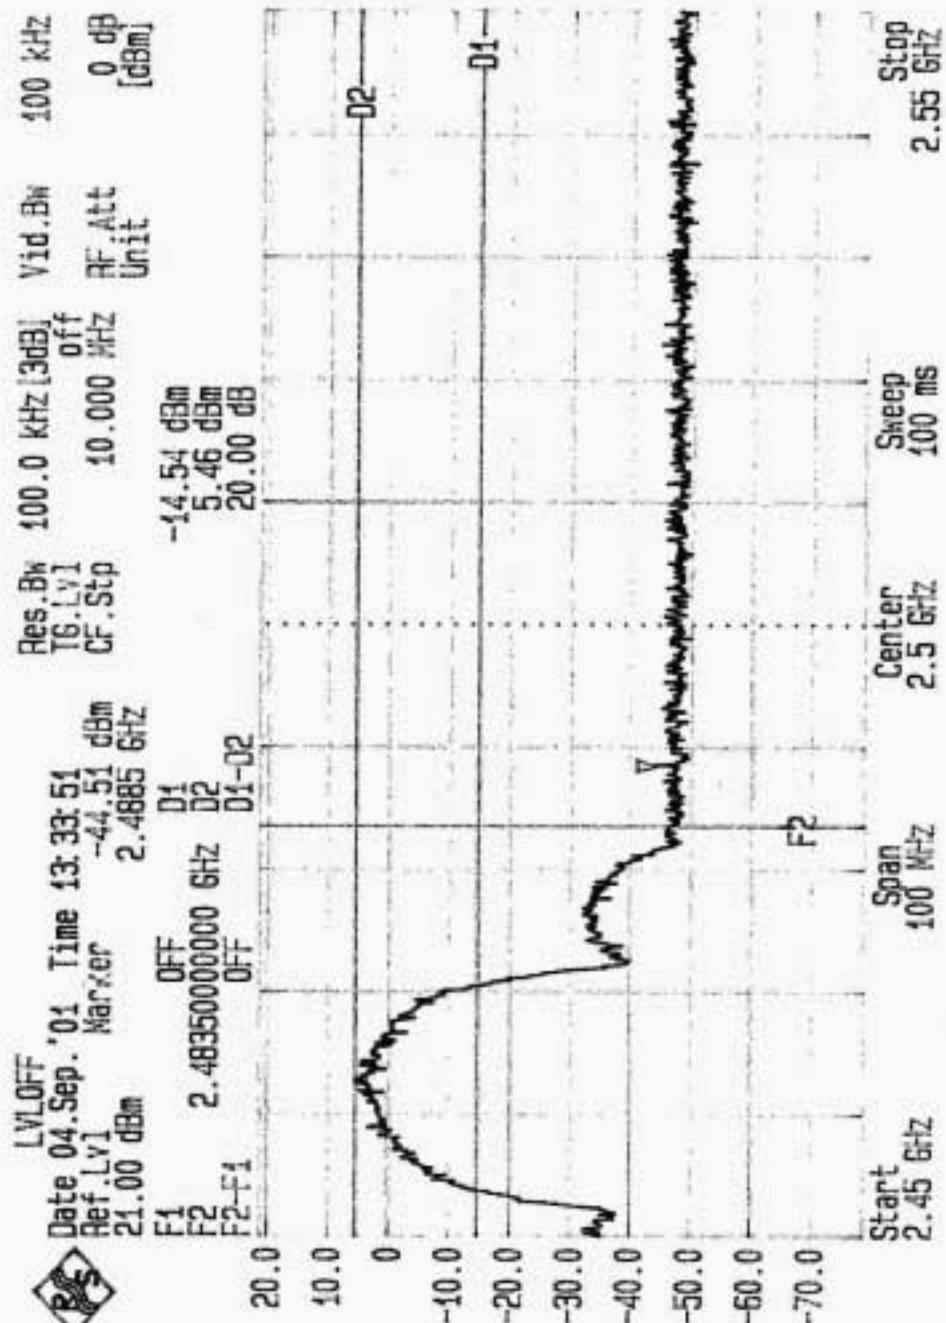

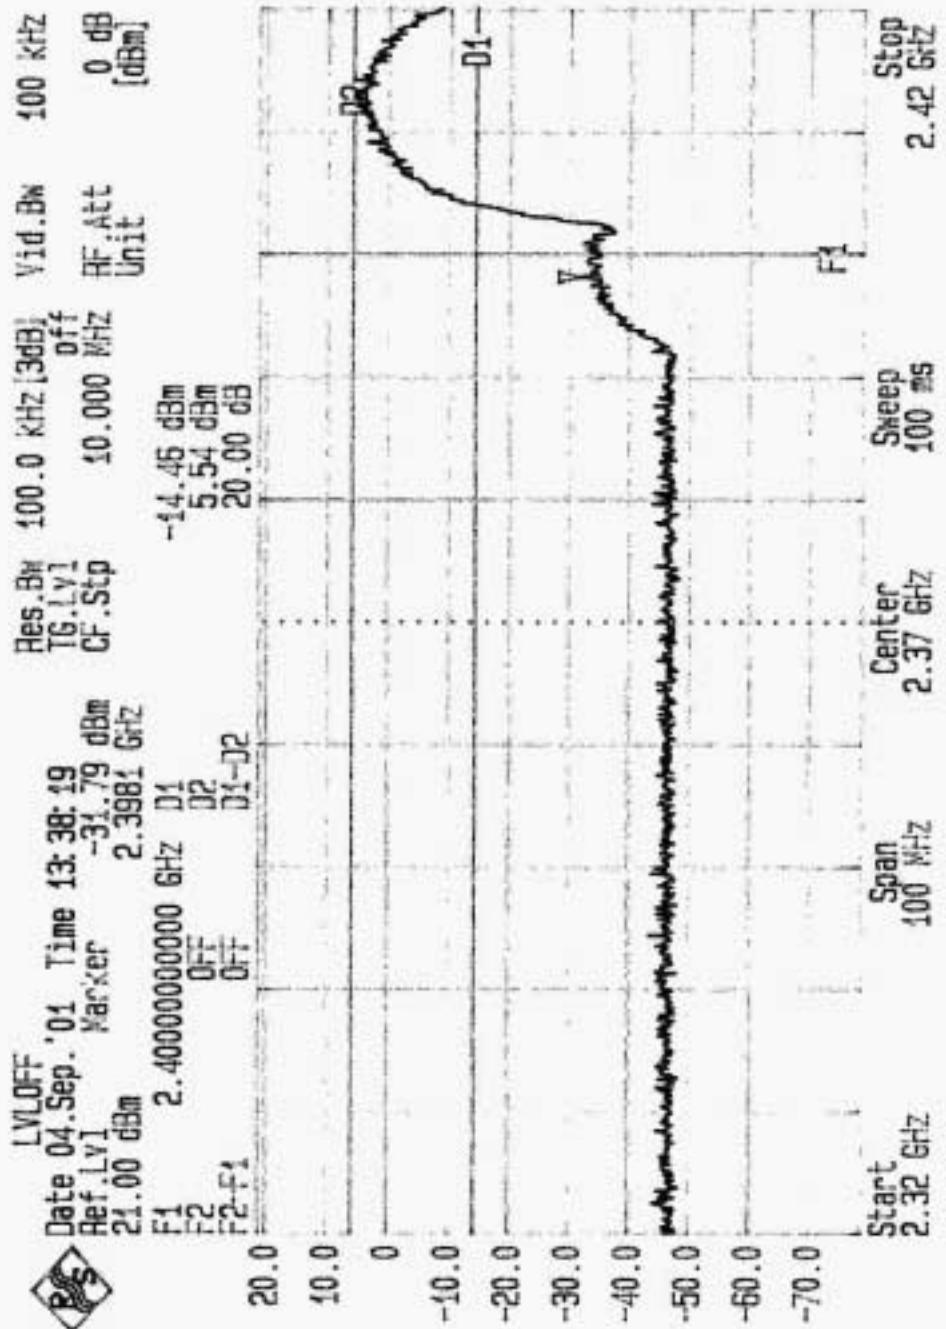



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is dual dipole antenna and its connector type is Reversed TNC. The maximum Gain of the antenna is 1dBi only.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

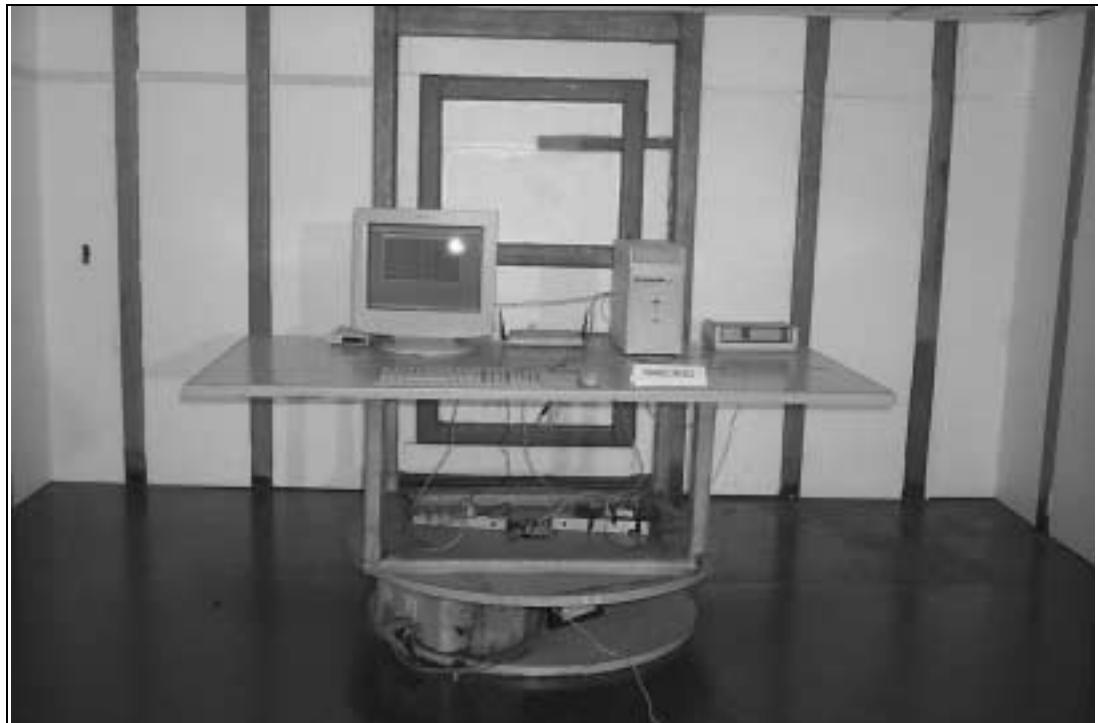



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

| | |
|--------------------|-----------------|
| USA | FCC, NVLAP, UL |
| Germany | TUV Rheinland |
| Japan | VCCI |
| New Zealand | MoC |
| Norway | NEMKO |
| R.O.C. | BSMI, DGT, CNLA |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.