



深圳市尚远科技有限公司

Shenzhen Sunnyway Technology Co.Ltd.

Antenna SPEC

Customer: WANLIDA		Project Name:	
Working Band: BT2.4G			
Mainboard Version:			
Sunnyway BOM			
SPEC-Type	Model Name		Antenna Type
BT Antenna	SZ24168IB77-1		FPC

Change history			
Preparation/change date	change content	Changed by	version
2024.07.18	First edition	Xu Wei	A

Sunnyway Countersign Column				
R&D	ME:	Audit:	Quality Engineer:	Approval:
	RF:	Audit:		
Customer Countersign Column				
Electronic Engineer	Project Manager		Structural Engineer	Quality Engineer

Tel: +86-021-64842326 (Shanghai) ; +86-0755-82504258 (Shenzhen)

Fax: +86-021-64842328

Shanghai R & D center: Room 302, building 65, No.421, Hong Cao Road, Caohejing Development Zone, Shanghai.

Shenzhen R&D Center: Room 405, 4th Floor, Jinke Building, No.8 Qiongyu Road, Nanshan District, Shenzhen

ITEM

1 TEST FIXTURE

2 MATCHING CIRCUIT

3 S11 TEST

3.0 S11 test method

3.1 S11 parameter

3.2 Efficiency&Gain

4 CHAMBER TEST DATA

4.0 test equipment

4.1 active data

5 GROUND HANDLING

6 MASS PRODUCTION ANTENNA SPEC


7 Structural drawings

8 Environmental testing report

1. TEST FIXTURE

Purpose: To test antenna passive parameters as accurately as possible.

methods: the fixture is to use a 50 ohm coaxial cable, one end is connected to the pad after the antenna's matching circuit (the front of the antenna switch) , and the other end is connected to the SMA connector.

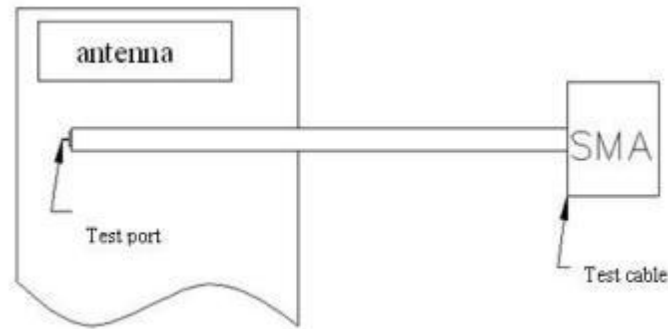

2. MATCHING CIRCUIT

Antenna matching did not modify


3. S11 test

3.0 S11 test method instructions

Test equipment: LNA (Agilent E5071B)

Test method: With a 50 ohm CABLE ,CABLE export from instrument testing port , After the calibration with calibration Key, connected to the SMA connector , Records the return loss and VSWR of the related frequency points.

Test schematic diagram is as follows:

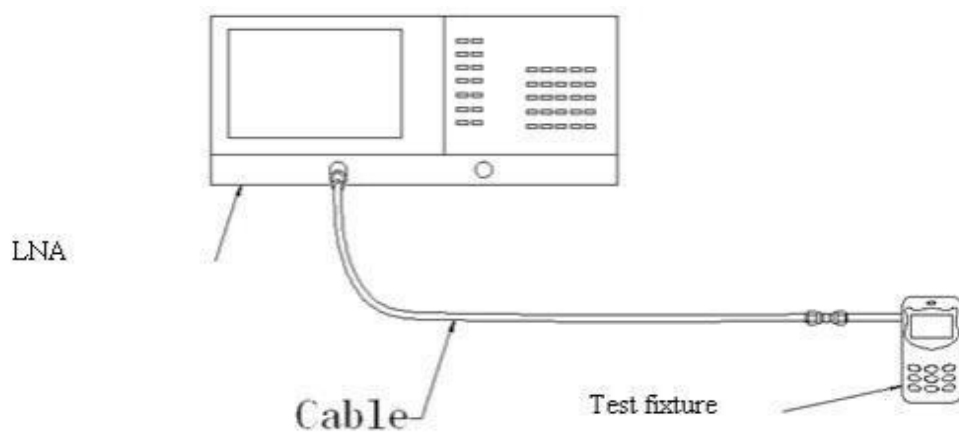

Test schematic diagram

3.1 S11 parameter
WIFI ANT VSWR

频率 (Freq.) MHz	2400	2450	2500
驻波比 VSWR	1.7	1.2	1.7



4 CHAMBER TEST DATA

4.0 Test equipment

Test system: chamber

Test environment: the temperature of 22 °C + 3 °C, humidity of 50% plus or minus 15%


Test equipment: to test passive status , use Agilent 8960 Agilent E5071B
to

test active status, use CMW500

更換前面位置		
Frequency/Mhz	Efficiency / %	MaxGain/dBi
2400	51.25	3.93
2410	49.98	4.04
2420	49.98	3.95
2430	49.62	3.94
2440	51.07	3.94
2450	51.8	4
2460	53.1	3.98
2470	51.8	4.22
2480	52.72	4.05
2490	51.8	4.42
2500	49.45	3.98

Test data

Field diagram

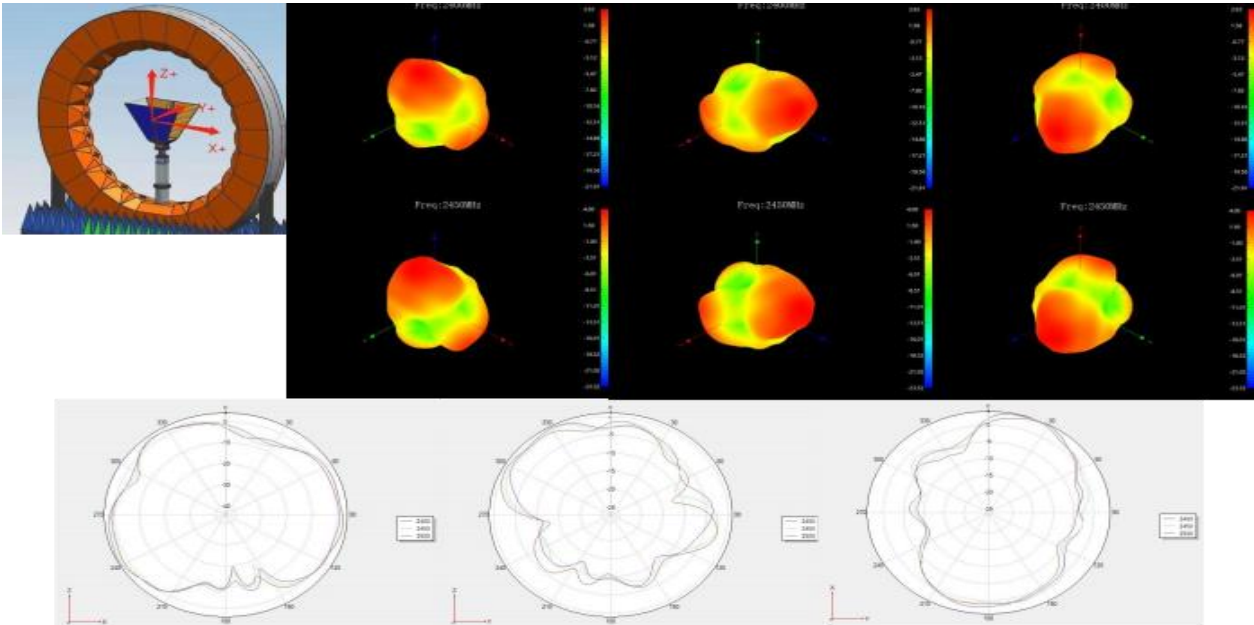

5. Ground handling

Measurement	Band	Channel	更换前面位置
TRP	BLUETOOTH	0	2.32
TRP	BLUETOOTH	39	2.54
TRP	BLUETOOTH	78	2.3
TIS(EIRP)	BLUETOOTH	0	-86.48
TIS(EIRP)	BLUETOOTH	39	-85.36
TIS(EIRP)	BLUETOOTH	78	-85.59


6. Mass production antenna Spec

During Mass production, to test VSWR as production test standard

According to the difference of the project itself, the following specification:

Frequency	SPEC , Mass Production
2400-2500MHz	VSWR（MP performance）<VSWR(Verify performance)±0.5

7. Structural drawings

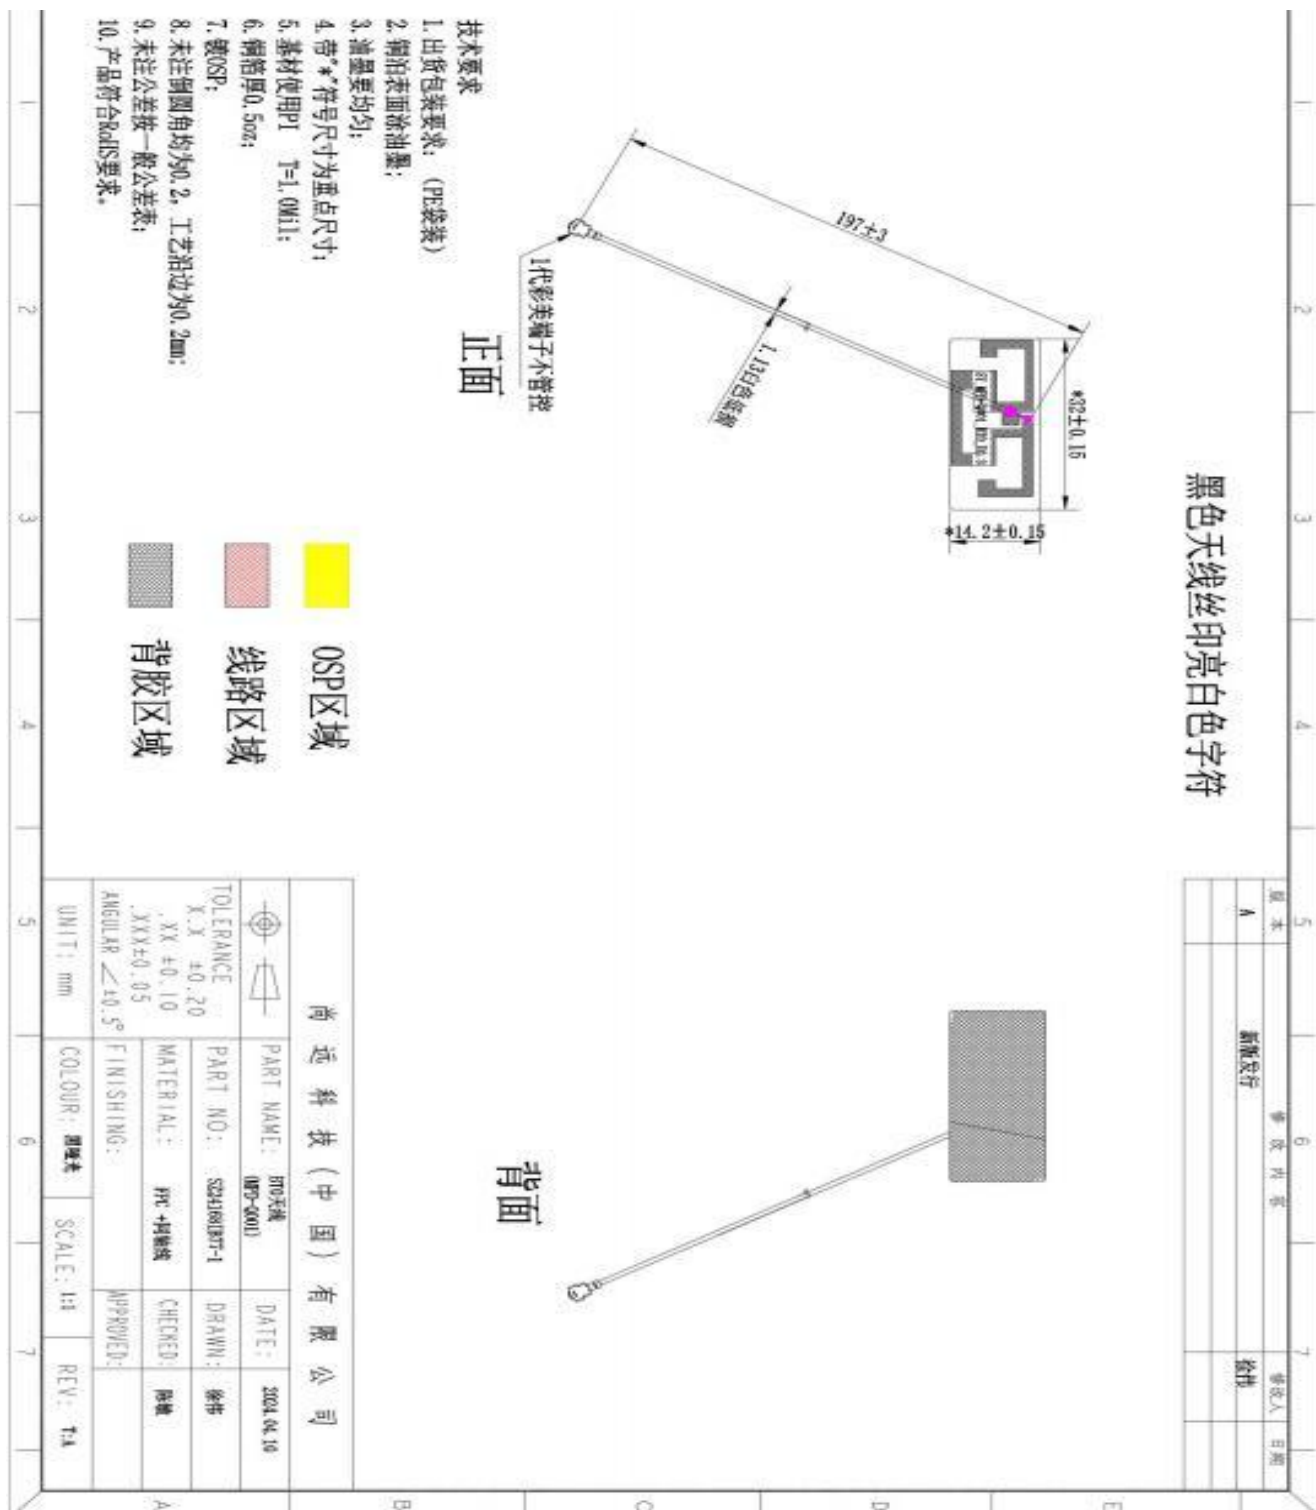

8. Environmental testing report

 SUNNYWAY		Sunnyway Technology (China) Co., Ltd.					Antenna Environment Test Report								
Customer Name: WAN.LDA		entry name: MPD-Q001		sunnyway NO: SZ241681B77-1											
Number of samples: 5PCS		Test time: 2024/7/18													
Test time	测试项目Test items	测试条件和需求Test conditions and requirements	测试设备Test equipment	测试结果test result											
2023.10.10 - 2023.10.11	low temperature storage	Store in a incubator (-40 ℃ ± 5) for 24 hours, and then let it dry at room temperature for 2 hours before testing. The electrical performance (VSWR) and structural appearance	Standard temperature and humidity		1	2	3	4	5						
					-40℃	-40℃	-40℃	-40℃	-40℃						
				RF	OK	OK	OK	OK	OK						
2023.10.10 - 2023.10.11	高温存储 high temperature	Store in a temperature box (80 ℃ ± 5) for 24 hours, and then let it dry at room temperature for 2 hours before testing. The electrical performance (VSWR) and structural appearance	Standard temperature and humidity	外观	OK	OK	OK	OK	OK						
					1	2	3	4	5						
					+85℃	+85℃	+85℃	+85℃	+85℃						
2023.10.11 - 2023.10.12	Constant temperature and humidity	The temperature is 60 ℃ ± 5, the humidity is 90%-95% RH, and after 24 hours, it is required that the structure is undamaged and the electrical performance remains unchanged.	Standard temperature and humidity	RF	OK	OK	OK	OK	OK						
				外观	OK	OK	OK	OK	OK	OK					
					1	2	3	4	5						
2023.10.13 - 2023.10.14	耐盐雾实验 Salt spray resist	NaCl solution with salt spray concentration of 5%, spray the antenna for 24 hours continuously at 35 ℃, then remove it for cleaning and dry it. The surface of the antenna should be free	Salt mist machine		60℃/95%	60℃/95%	60℃/95%	60℃/95%	60℃/95%						
				RF	OK	OK	OK	OK	OK	OK					
				外观	OK	OK	OK	OK	OK	OK					
					1	2	3	4	5						
					35℃/5%	35℃/5%	35℃/5%	35℃/5%	35℃/5%						
				RF	OK	OK	OK	OK	OK	OK					
				外观	OK	OK	OK	OK	OK						
审核 to examine: 林长青			确认confirm: 陈小平			测试 test: 韦月丽									