



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Applicant's company | Belkin International, Inc.                         |
| Applicant Address   | 12045 East Waterfront Drive, Playa Vista, CA 90094 |
| FCC ID              | K7SF9K1102V2                                       |

|                  |                                       |
|------------------|---------------------------------------|
| Product Name     | N600 DB Wireless N+ Router            |
| Brand Name       | belkin                                |
| Model No.        | F9K1102V4                             |
| Test Rule        | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range | 2400 ~ 2483.5MHz                      |
| Received Date    | Mar. 04, 2016                         |
| Final Test Date  | Jun. 06, 2016                         |
| Submission Type  | Class II Change                       |

### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|                                                         |                |
|---------------------------------------------------------|----------------|
| <b>1. VERIFICATION OF COMPLIANCE .....</b>              | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>              | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                     | <b>3</b>       |
| 3.1. Product Details.....                               | 3              |
| 3.2. Accessories.....                                   | 4              |
| 3.3. Table for Filed Antenna.....                       | 5              |
| 3.4. Table for Carrier Frequencies .....                | 6              |
| 3.5. Table for Test Modes .....                         | 7              |
| 3.6. Table for Testing Locations.....                   | 7              |
| 3.7. Table for Class II Change .....                    | 8              |
| 3.8. Table for Supporting Units .....                   | 8              |
| 3.9. Test Configurations .....                          | 9              |
| <b>4. TEST RESULT .....</b>                             | <b>11</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement..... | 11             |
| 4.2. Radiated Emissions Measurement .....               | 15             |
| 4.3. Antenna Requirements .....                         | 21             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>            | <b>22</b>      |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                  | <b>23</b>      |
| <b>APPENDIX A. TEST PHOTOS .....</b>                    | <b>A1 ~ A3</b> |


## History of This Test Report

| REPORT NO.    | VERSION | DESCRIPTION             | ISSUED DATE   |
|---------------|---------|-------------------------|---------------|
| FR4N1172-29AA | Rev. 01 | Initial issue of report | Jun. 22, 2016 |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |

## 1. VERIFICATION OF COMPLIANCE

Product Name : N600 DB Wireless N+ Router  
Brand Name : belkin  
Model No. : F9K1102V4  
Applicant : Belkin International, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 04, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

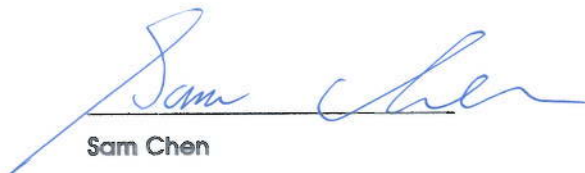

Sam Chen  
SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                   |          |
|------------------------------------------------|--------------|-----------------------------------|----------|
| Part                                           | Rule Section | Description of Test               | Result   |
| 4.1                                            | 15.207       | AC Power Line Conducted Emissions | Complies |
| 4.2                                            | 15.247(d)    | Radiated Emissions                | Complies |
| 4.3                                            | 15.203       | Antenna Requirements              | Complies |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

| Items               | Description                                                                                                          |
|---------------------|----------------------------------------------------------------------------------------------------------------------|
| Product Type        | IEEE 802.11b/g: WLAN (1TX, 1RX)<br>IEEE 802.11n: WLAN (2TX, 2RX)                                                     |
| Radio Type          | Intentional Transceiver                                                                                              |
| Power Type          | From power adapter                                                                                                   |
| Modulation          | IEEE 802.11b: DSSS<br>IEEE 802.11g: OFDM<br>IEEE 802.11n: see the below table                                        |
| Data Modulation     | IEEE 802.11b: DSSS (BPSK / QPSK / CCK)<br>IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)                         |
| Data Rate (Mbps)    | IEEE 802.11b: DSSS (1/ 2/ 5.5/11)<br>IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54)<br>IEEE 802.11n: see the below table |
| Frequency Range     | 2400 ~ 2483.5MHz                                                                                                     |
| Channel Number      | 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth                                                                       |
| Carrier Frequencies | Please refer to section 3.4                                                                                          |
| Antenna             | Please refer to section 3.3                                                                                          |

| Items                | Description                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------|
| Beamforming Function | <input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming |

### Antenna and Band width

| Antenna         | Single (TX) |        | Two (TX) |        |
|-----------------|-------------|--------|----------|--------|
| Band width Mode | 20 MHz      | 40 MHz | 20 MHz   | 40 MHz |
| IEEE 802.11b    | V           | X      | X        | X      |
| IEEE 802.11g    | V           | X      | X        | X      |
| IEEE 802.11n    | X           | X      | V        | V      |

### IEEE 11n Spec.

| Protocol                                                                                                                                                                                                                  | Number of Transmit Chains (NTX) | Data Rate / MCS |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------|
| 802.11n (HT20)                                                                                                                                                                                                            | 2                               | MCS 8-15        |
| 802.11n (HT40)                                                                                                                                                                                                            | 2                               | MCS 8-15        |
| <p>Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).<br/>Then EUT supports HT20 and HT40.</p> <p>Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n</p> |                                 |                 |

## 3.2. Accessories

| Power                             | Brand | Model           | Rating                                            |
|-----------------------------------|-------|-----------------|---------------------------------------------------|
| Adapter                           | LEI   | MU12AR120100-A1 | Input: 100-240V ~ 50/60Hz 0.3A<br>Output: 12V, 1A |
| Others                            |       |                 |                                                   |
| RJ-45 Cable*1, Non-shielded, 1.2m |       |                 |                                                   |

### 3.3. Table for Filed Antenna

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) |      | Remark |
|------|-------|------------|--------------|-----------|------------|------|--------|
|      |       |            |              |           | 2.4GHz     | 5GHz |        |
| 1    | -     | -          | PIFA Antenna | I-PEX     | 3.95       | 6.27 | TX/RX  |
| 2    | -     | -          | PIFA Antenna | I-PEX     | 3.80       | 4.51 | TX/RX  |

Note: The EUT has two antennas.

<For 2.4GHz Band>:

For IEEE 802.11b/g mode (1TX/1RX):

Only Chain 1 can be used as transmitting/receiving antenna.

For IEEE 802.11n mode (2TX/2RX):

Both Chain 1 and Chain 2 could transmit/receive simultaneously.


<For 5GHz Band>:

For IEEE 802.11a mode (1TX/1RX):

Only Chain 1 can be used as transmitting/receiving antenna.

For IEEE 802.11n mode (2TX/2RX):

Both Chain 1 and Chain 2 could transmit/receive simultaneously.

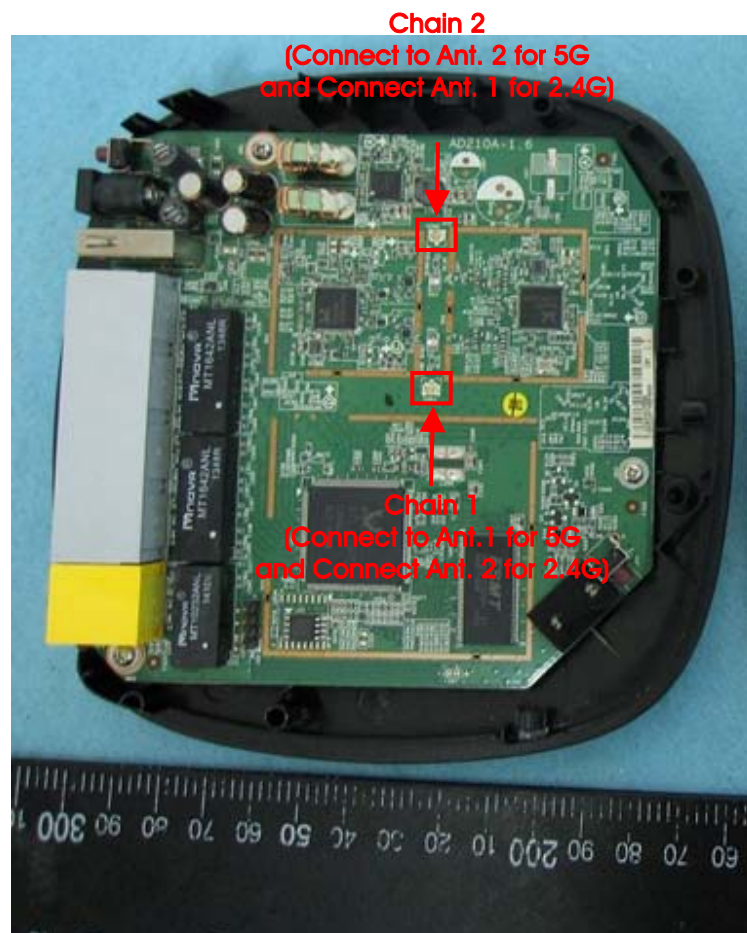



### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1           | 2412 MHz  | 7           | 2442 MHz  |
|                | 2           | 2417 MHz  | 8           | 2447 MHz  |
|                | 3           | 2422 MHz  | 9           | 2452 MHz  |
|                | 4           | 2427 MHz  | 10          | 2457 MHz  |
|                | 5           | 2432 MHz  | 11          | 2462 MHz  |
|                | 6           | 2437 MHz  | -           | -         |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                        | Mode        | Data Rate | Channel | Antenna |
|-----------------------------------|-------------|-----------|---------|---------|
| AC Power Line Conducted Emissions | Normal Link | -         | -       | -       |
| Radiated Emissions 9kHz~1GHz      | Normal Link | -         | -       | -       |

Note: The EUT can only be used at Y axis position

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link

**For Radiated Emission test:**

Mode 1. Normal Link

**For Co-location MPE:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA4N172-29AA) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

| Test Site Location |                                                                            |          |                     |             |
|--------------------|----------------------------------------------------------------------------|----------|---------------------|-------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |                     |             |
| TEL:               | 886-3-656-9065                                                             |          |                     |             |
| FAX:               | 886-3-656-9085                                                             |          |                     |             |
| Test Site No.      | Site Category                                                              | Location | FCC Designation No. | IC File No. |
| 03CH01-CB          | SAC                                                                        | Hsin Chu | TW0006              | IC 4086D    |
| CO01-CB            | Conduction                                                                 | Hsin Chu | TW0006              | IC 4086D    |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR241874AC

Below is the table for the change of the product with respect to the original one.

| Description                                                                                                                                                                                                                                                                                                                                                                      | Performance Checking                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| 1. Adding a new power adapter<br>(Model Name: MU12AR120100-A1).<br>2. Updating the flash memory.<br>3. Adding RJ-45 Cable                                                                                                                                                                                                                                                        | 1. AC Power Line Conducted Emissions<br>2. Radiated Emissions Below 1GHz |
| 4. Updating brand name to "belkin" from "Belkin".<br>5. Updating model name to "F9K1102V4" from "F9K1102V2".<br>6. Updating applicant to applicant address to "12045 East Waterfront Drive, Playa Vista, CA 90094 " from "12045 E. Waterfront Driv Playa Viste, CA 90094, USA".<br>7. Removing two adapters (Model No.: DSA-12PFE-12 BUS 120100 and Model No.: SYS1381-1212-W2). | After evaluating, it is not necessary to verify.                         |

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB


| Support Unit | Brand         | Model     | FCC ID |
|--------------|---------------|-----------|--------|
| NB*4         | DELL          | E4300     | DoC    |
| Flash disk   | Silicon Power | Touch 835 | DoC    |

For Test Site No: CO01-CB

| Support Unit | Brand   | Model    | FCC ID |
|--------------|---------|----------|--------|
| NB*4         | DELL    | E6430    | DoC    |
| Flash disk   | Silicon | I-Series | DoC    |

### 3.9. Test Configurations


#### 3.9.1. AC Power Line Conduction Emissions Test Configuration

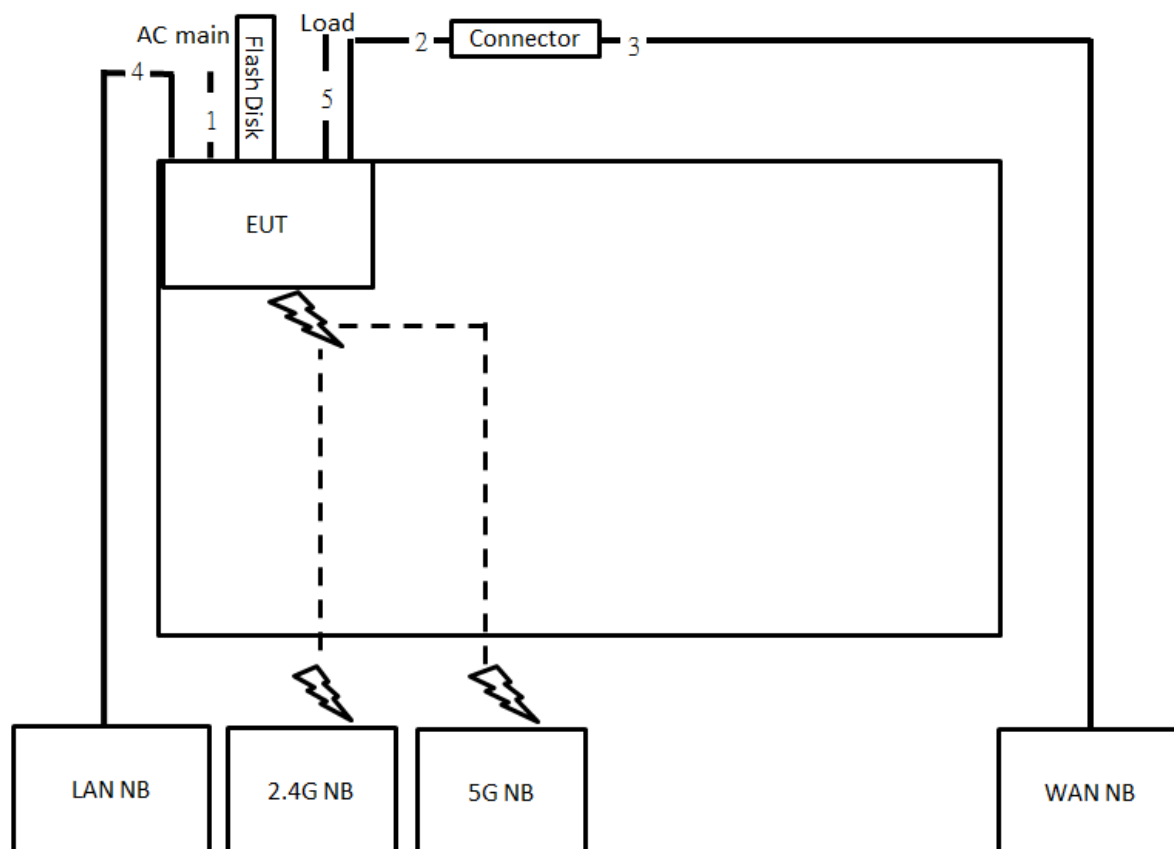

| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | Power cable   | No       | 1.5m   |
| 2    | RJ-45 cable   | No       | 1.2m   |
| 3    | RJ-45 cable   | No       | 10m    |
| 4    | RJ-45 cable   | No       | 10m    |
| 5    | RJ-45 cable*3 | No       | 1.5m   |

### 3.9.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

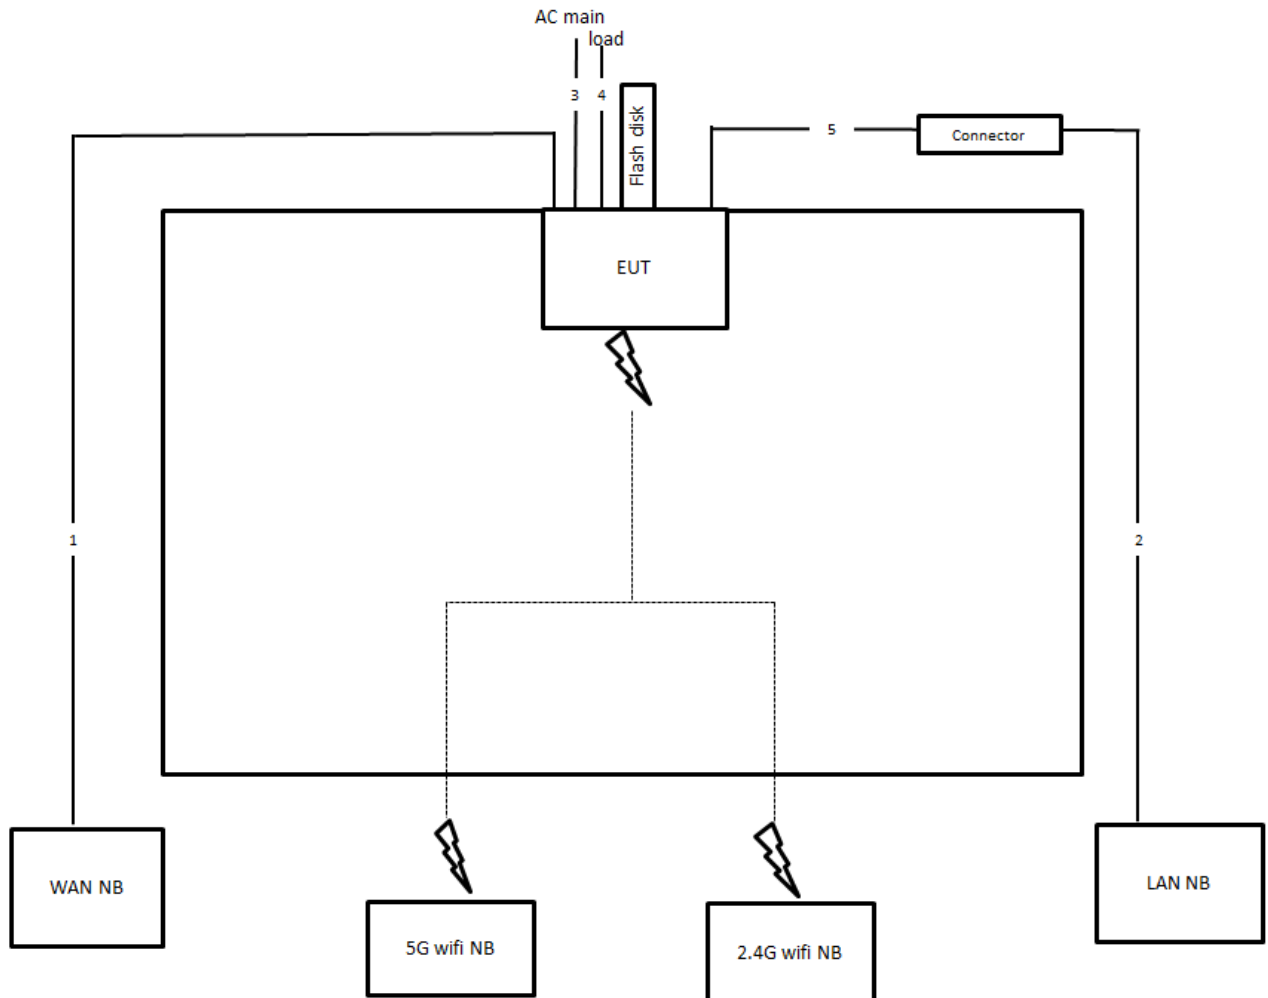

| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | RJ-45 cable   | No       | 10m    |
| 2    | RJ-45 cable   | No       | 10m    |
| 3    | Power cable   | No       | 1.5m   |
| 4    | RJ-45 cable*3 | No       | 1.5m   |
| 5    | RJ-45 cable   | No       | 1.2m   |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

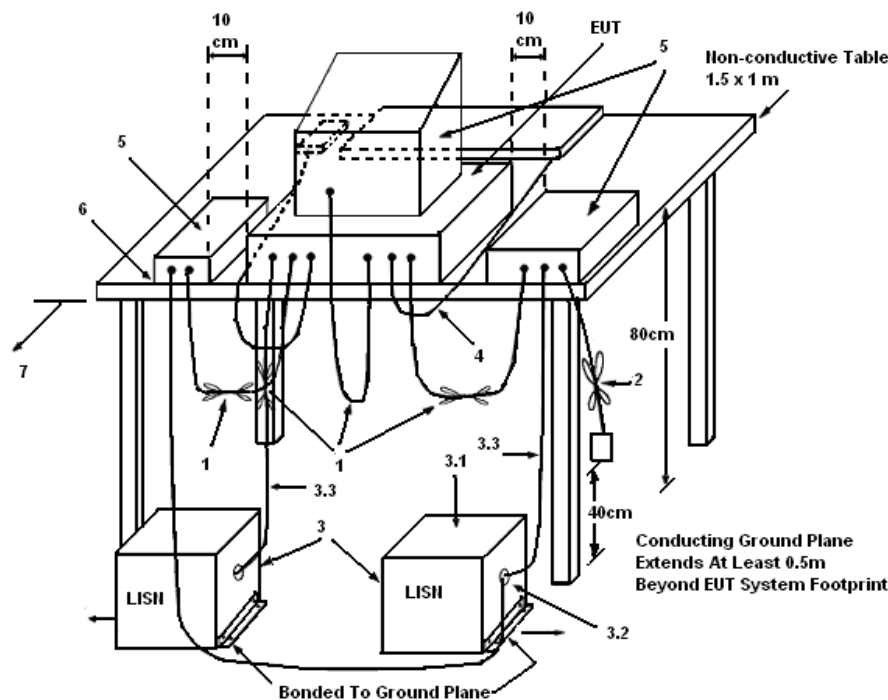

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement


|               |             |          |      |
|---------------|-------------|----------|------|
| Temperature   | 23°C        | Humidity | 58%  |
| Test Engineer | Da Deng     | Phase    | Line |
| Configuration | Normal Link |          |      |

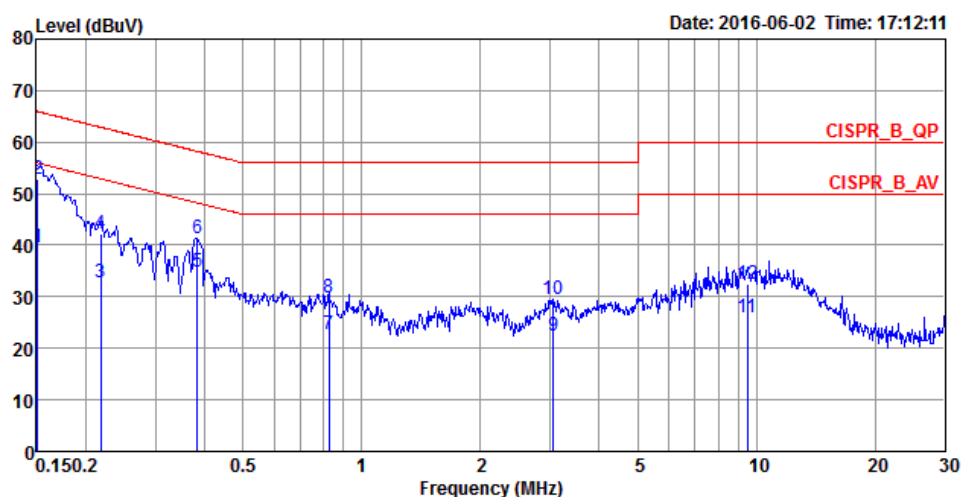

|    | Freq   | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  | Pol/Phase |
|----|--------|-------|------------|------------|------------|-------------|------------|---------|-----------|
|    | MHz    | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |           |
| 1  | 0.1508 | 39.69 | -16.27     | 55.96      | 29.57      | 9.96        | 0.16       | Average | LINE      |
| 2  | 0.1508 | 52.92 | -13.04     | 65.96      | 42.80      | 9.96        | 0.16       | QP      | LINE      |
| 3  | 0.2185 | 32.84 | -20.04     | 52.88      | 22.70      | 9.96        | 0.18       | Average | LINE      |
| 4  | 0.2185 | 42.27 | -20.61     | 62.88      | 32.13      | 9.96        | 0.18       | QP      | LINE      |
| 5  | 0.3832 | 34.92 | -13.29     | 48.21      | 24.71      | 10.01       | 0.20       | Average | LINE      |
| 6  | 0.3832 | 41.19 | -17.02     | 58.21      | 30.98      | 10.01       | 0.20       | QP      | LINE      |
| 7  | 0.8261 | 22.85 | -23.15     | 46.00      | 12.62      | 10.04       | 0.19       | Average | LINE      |
| 8  | 0.8261 | 29.79 | -26.21     | 56.00      | 19.56      | 10.04       | 0.19       | QP      | LINE      |
| 9  | 3.0576 | 22.45 | -23.55     | 46.00      | 12.05      | 10.10       | 0.30       | Average | LINE      |
| 10 | 3.0576 | 29.39 | -26.61     | 56.00      | 18.99      | 10.10       | 0.30       | QP      | LINE      |
| 11 | 9.5016 | 25.93 | -24.07     | 50.00      | 15.40      | 10.15       | 0.38       | Average | LINE      |
| 12 | 9.5016 | 32.53 | -27.47     | 60.00      | 22.00      | 10.15       | 0.38       | QP      | LINE      |



|               |             |          |         |
|---------------|-------------|----------|---------|
| Temperature   | 23°C        | Humidity | 58%     |
| Test Engineer | Da Deng     | Phase    | Neutral |
| Configuration | Normal Link |          |         |

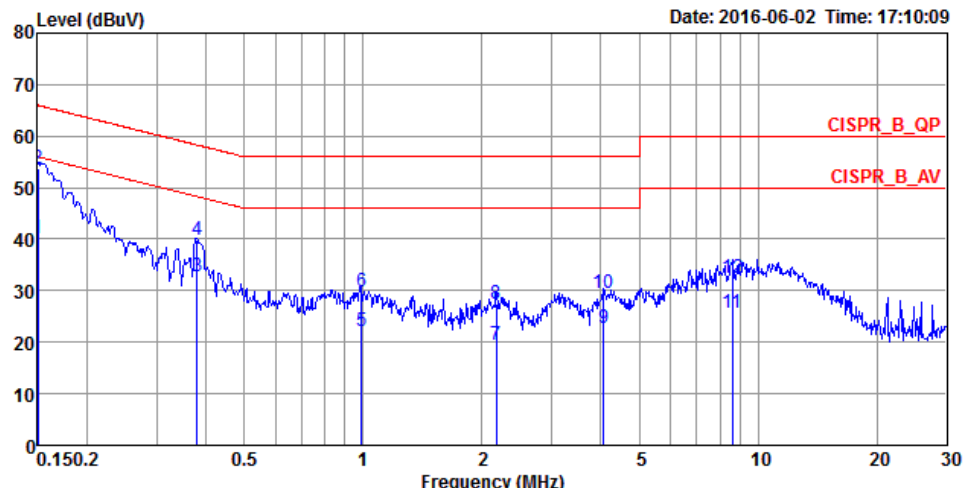

|    | Freq   | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  | Pol/Phase |
|----|--------|-------|------------|------------|------------|-------------|------------|---------|-----------|
|    | MHz    | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |           |
| 1  | 0.1500 | 40.03 | -15.97     | 56.00      | 29.91      | 9.96        | 0.16       | Average | NEUTRAL   |
| 2  | 0.1500 | 53.64 | -12.36     | 66.00      | 43.52      | 9.96        | 0.16       | QP      | NEUTRAL   |
| 3  | 0.3791 | 32.65 | -15.65     | 48.30      | 22.48      | 9.97        | 0.20       | Average | NEUTRAL   |
| 4  | 0.3791 | 39.71 | -18.59     | 58.30      | 29.54      | 9.97        | 0.20       | QP      | NEUTRAL   |
| 5  | 0.9891 | 22.05 | -23.95     | 46.00      | 11.89      | 9.97        | 0.19       | Average | NEUTRAL   |
| 6  | 0.9891 | 29.80 | -26.20     | 56.00      | 19.64      | 9.97        | 0.19       | QP      | NEUTRAL   |
| 7  | 2.1783 | 19.41 | -26.59     | 46.00      | 9.15       | 9.99        | 0.27       | Average | NEUTRAL   |
| 8  | 2.1783 | 27.40 | -28.60     | 56.00      | 17.14      | 9.99        | 0.27       | QP      | NEUTRAL   |
| 9  | 4.0704 | 22.72 | -23.28     | 46.00      | 12.37      | 10.02       | 0.33       | Average | NEUTRAL   |
| 10 | 4.0704 | 29.54 | -26.46     | 56.00      | 19.19      | 10.02       | 0.33       | QP      | NEUTRAL   |
| 11 | 8.5917 | 25.72 | -24.28     | 50.00      | 15.22      | 10.13       | 0.37       | Average | NEUTRAL   |
| 12 | 8.5917 | 32.38 | -27.62     | 60.00      | 21.88      | 10.13       | 0.37       | QP      | NEUTRAL   |

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Radiated Emissions Measurement

### 4.2.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micovolts/meter) | Measurement Distance<br>(meters) |
|----------------------|-------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                         | 300                              |
| 0.490~1.705          | 24000/F(kHz)                        | 30                               |
| 1.705~30.0           | 30                                  | 30                               |
| 30~88                | 100                                 | 3                                |
| 88~216               | 150                                 | 3                                |
| 216~960              | 200                                 | 3                                |
| Above 960            | 500                                 | 3                                |

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                         |
|---------------------------------------------|-------------------------------------------------|
| Attenuation                                 | Auto                                            |
| Start Frequency                             | 1000 MHz                                        |
| Stop Frequency                              | 10th carrier harmonic                           |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak,<br>1MHz / 1/T for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz / 300kHz for peak                        |


| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RBW 120kHz for QP |

#### 4.2.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.2.4. Test Setup Layout

For Radiated Emissions: 9kHz ~30MHz

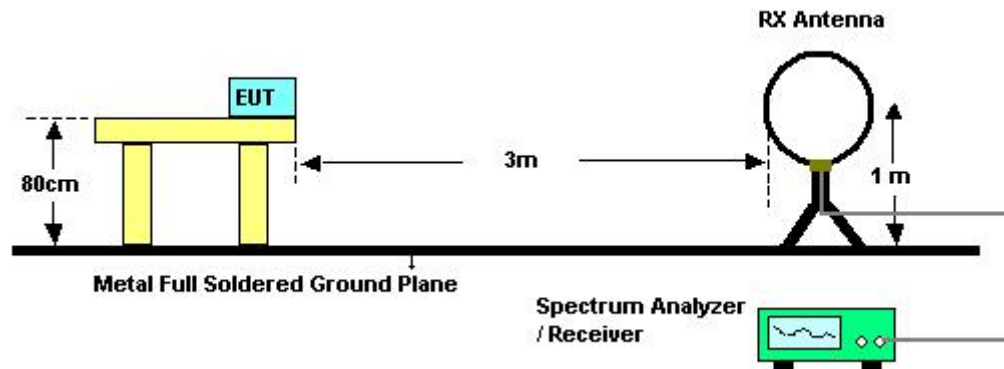

For Radiated Emissions: 30MHz~1GHz

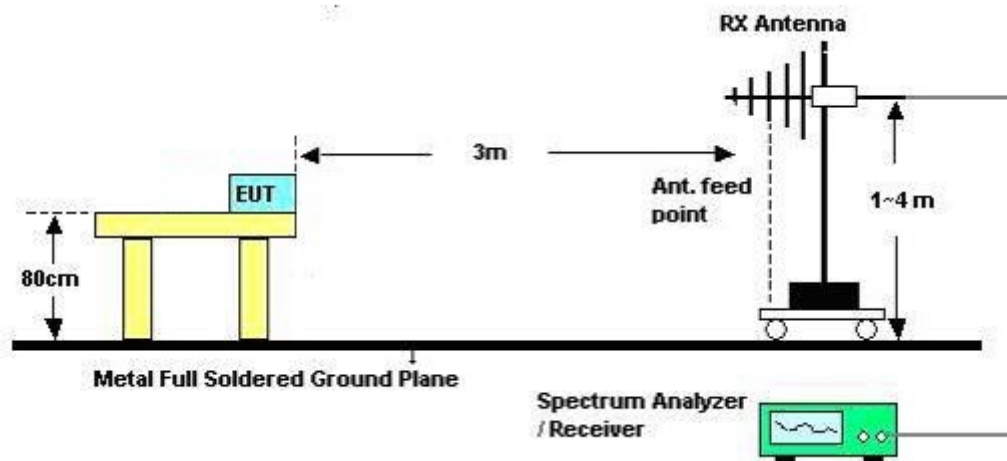

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Results of Radiated Emissions (9kHz~30MHz)

|               |               |                |             |
|---------------|---------------|----------------|-------------|
| Temperature   | 22.6°C        | Humidity       | 51%         |
| Test Engineer | Serway Li     | Configurations | Normal Link |
| Test Date     | Jun. 06, 2016 |                |             |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.2.8. Results of Radiated Emissions (30MHz~1GHz)


|               |           |                |             |
|---------------|-----------|----------------|-------------|
| Temperature   | 22.6°C    | Humidity       | 51%         |
| Test Engineer | Serway Li | Configurations | Normal Link |

##### Horizontal

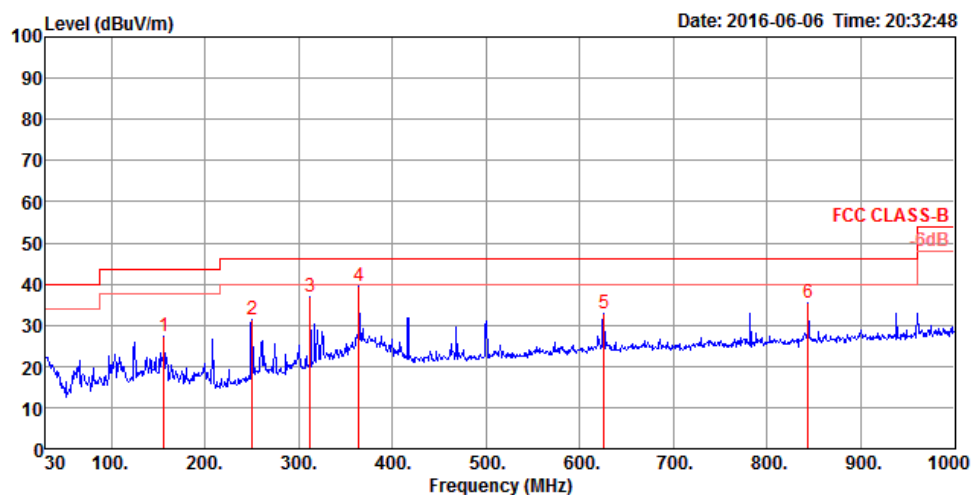

|   | Freq   | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark   | Pol/Phase  |
|---|--------|--------|--------|--------|-------|--------------|--------|-------|-------|----------|------------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg      |            |
| 1 | 156.10 | 27.14  | 43.50  | -16.36 | 41.36 | 1.07         | 17.06  | 32.35 | 300   | 172 Peak | HORIZONTAL |
| 2 | 250.19 | 31.19  | 46.00  | -14.81 | 43.05 | 1.34         | 19.10  | 32.30 | 125   | 235 Peak | HORIZONTAL |
| 3 | 312.27 | 36.89  | 46.00  | -9.11  | 47.32 | 1.51         | 20.35  | 32.29 | 125   | 138 Peak | HORIZONTAL |
| 4 | 364.65 | 39.61  | 46.00  | -6.39  | 48.50 | 1.64         | 21.78  | 32.31 | 125   | 138 Peak | HORIZONTAL |
| 5 | 625.58 | 32.83  | 46.00  | -13.17 | 37.30 | 2.16         | 25.77  | 32.40 | 150   | 207 Peak | HORIZONTAL |
| 6 | 843.83 | 35.25  | 46.00  | -10.75 | 37.43 | 2.51         | 27.33  | 32.02 | 125   | 37 Peak  | HORIZONTAL |

### Vertical

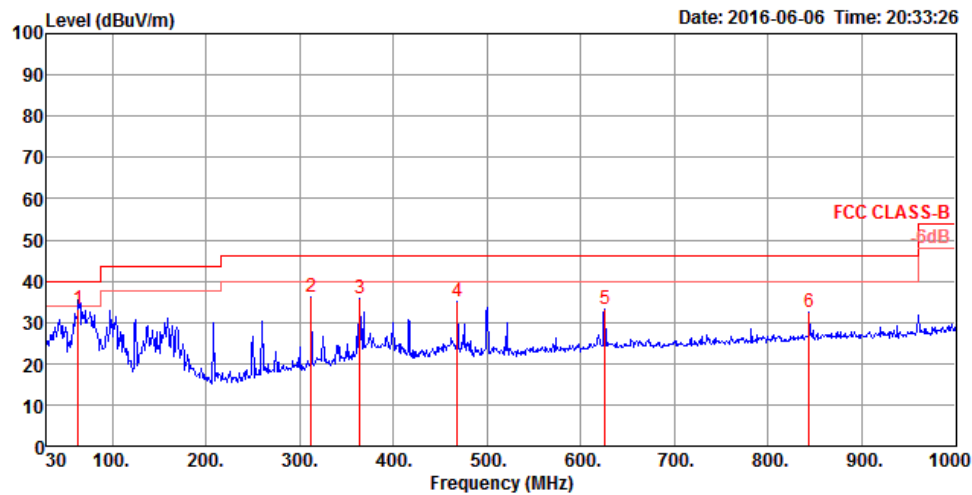

|   | Freq   | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark   | Pol/Phase |
|---|--------|--------|--------|--------|-------|--------------|--------|-------|-------|----------|-----------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg      |           |
| 1 | 63.95  | 33.25  | 40.00  | -6.75  | 51.58 | 0.70         | 13.37  | 32.40 | 150   | 314 QP   | VERTICAL  |
| 2 | 312.27 | 36.01  | 46.00  | -9.99  | 46.44 | 1.51         | 20.35  | 32.29 | 200   | 155 Peak | VERTICAL  |
| 3 | 364.65 | 35.90  | 46.00  | -10.10 | 44.79 | 1.64         | 21.78  | 32.31 | 125   | 155 Peak | VERTICAL  |
| 4 | 468.44 | 35.04  | 46.00  | -10.96 | 41.98 | 1.88         | 23.52  | 32.34 | 150   | 184 Peak | VERTICAL  |
| 5 | 625.58 | 33.03  | 46.00  | -12.97 | 37.50 | 2.16         | 25.77  | 32.40 | 100   | 324 Peak | VERTICAL  |
| 6 | 843.83 | 32.40  | 46.00  | -13.60 | 34.58 | 2.51         | 27.33  | 32.02 | 100   | 1 Peak   | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### **4.3. Antenna Requirements**

#### **4.3.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **4.3.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

| Instrument        | Manufacturer | Model No.        | Serial No.  | Characteristics | Calibration Date | Remark                |
|-------------------|--------------|------------------|-------------|-----------------|------------------|-----------------------|
| EMI Receiver      | Agilent      | N9038A           | My52260123  | 9kHz ~ 8.45GHz  | Jan. 27, 2016    | Conduction (CO01-CB)  |
| LISN              | F.C.C.       | FCC-LISN-50-16-2 | 04083       | 150kHz ~ 100MHz | Dec. 08, 2015    | Conduction (CO01-CB)  |
| LISN              | Schwarzbeck  | NSLK 8127        | 8127647     | 9kHz ~ 30MHz    | Dec. 23, 2015    | Conduction (CO01-CB)  |
| COND Cable        | Woken        | Cable            | 01          | 0.15MHz ~ 30MHz | Dec. 01, 2015    | Conduction (CO01-CB)  |
| Software          | Audix        | E3               | 6.120210n   | -               | N.C.R.           | Conduction (CO01-CB)  |
| BILOG ANTENNA     | Schaffner    | CBL6112D         | 37880       | 20MHz ~ 2GHz    | Sep. 03, 2015    | Radiation (03CH01-CB) |
| Loop Antenna      | Teseq        | HLA 6120         | 24155       | 9kHz - 30 MHz   | Mar. 16, 2016*   | Radiation (03CH01-CB) |
| Pre-Amplifier     | Agilent      | 8447D            | 2944A10991  | 0.1MHz ~ 1.3GHz | Mar. 15, 2016    | Radiation (03CH01-CB) |
| Spectrum Analyzer | R&S          | FSP40            | 100056      | 9kHz ~ 40GHz    | Oct. 27, 2015    | Radiation (03CH01-CB) |
| EMI Receiver      | Agilent      | N9038A           | MY52260123  | 9kHz ~ 8.4GHz   | Jan. 27, 2016    | Radiation (03CH01-CB) |
| RF Cable-low      | Woken        | Low Cable-1      | N/A         | 30 MHz ~ 1 GHz  | Nov. 02, 2015    | Radiation (03CH01-CB) |
| Test Software     | Audix        | E3               | 6.2009-10-7 | N/A             | N/A              | Radiation (03CH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

“\*\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 3.2 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 3.6 dB      | Confidence levels of 95% |