



Antenna Specification

Antenna Manufacturer Company Name: Wieson Technologies Co., LTD.

Antenna Manufacturer Company Address: 15F, No.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221006, Taiwan

Antenna Model: ARY196-0232-044-00

Antenna Type: PCB antenna

Directional Gain

Directional Gain=

$$10 \log \left[\frac{\left(10^{\frac{G1}{20}} + 10^{\frac{G2}{20}} + \dots + 10^{\frac{Gn}{20}} \right)^2}{N_{ant}} \right] dBi$$

Category	Peak Gain(dBi)	Directional Gain (dBi)
Wi-Fi 5G	A8: 3.2 A9: 3.17 A10: 3.09	7.92

A8


Antenna specification



Item	Specification
Operating Frequency(GHz)	5.15-5.85
Bandwidth	700 MHz (Min.)
Return Loss	10dB (Min.)
Polarization	Linear
Azimuth Bandwidth	Omni-directional
Peak Gain	3.2dBi (Max.)
Impedance	50Ω
Material	PCB
Connector	MHF I
Cable type	O.D. 1.37 L/L
Maximum Power	1W
V.S.W.R	2 : 1
Radiation	Omni directional
Efficiency	55%(Max.)
Operating Temperature	-10~60°C
Storage temp	-10~70°C

S-Parameter

A8

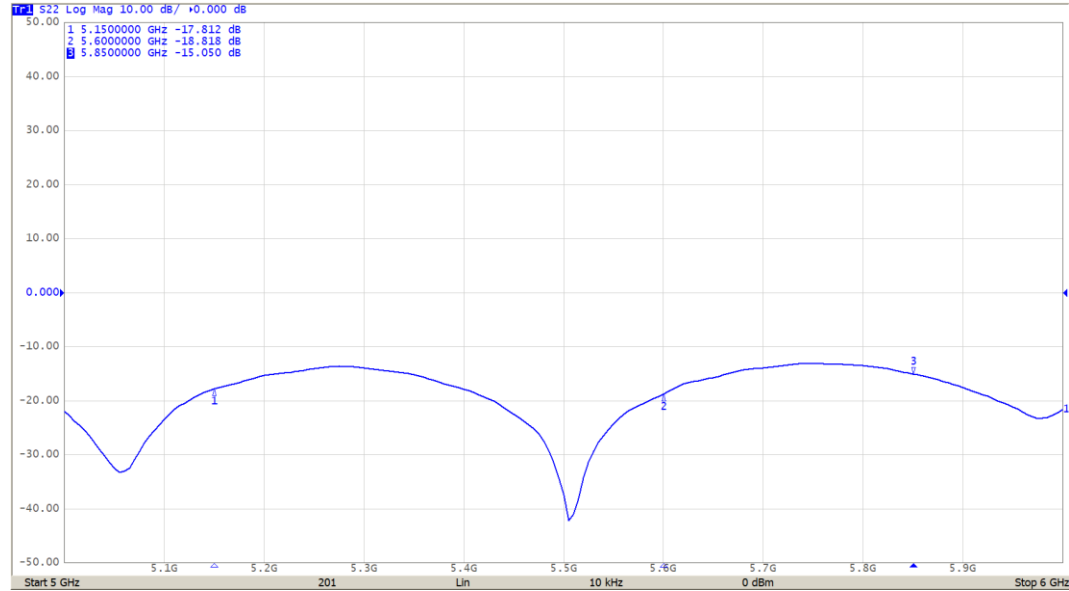

Freq(MHz)	5150	5600	5850
S11(dB)	-17.8	-18.8	-15

A8

3D Gain Total


Freq(GHz)	Peak Gain(dBi)	3D-avg Gain(dBi)	Efficiency(%)
5.15	3.2	-3.03	50
5.25	2.9	-2.97	50
5.35	2.86	-2.8	52
5.47	2.53	-2.63	55
5.6	2.75	-2.7	54
5.725	2.79	-2.8	52
5.785	2.7	-2.87	52
5.85	1.88	-2.98	50

Antenna Pattern


A8

Frequency : 5600MHz


Freq(GHz)	Peak Gain(dBi)	3D-avg Gain(dBi)	Efficiency(%)
5.6	2.75	-2.7	54

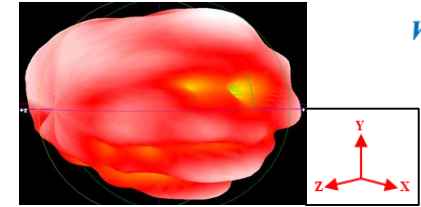


XZ-plane

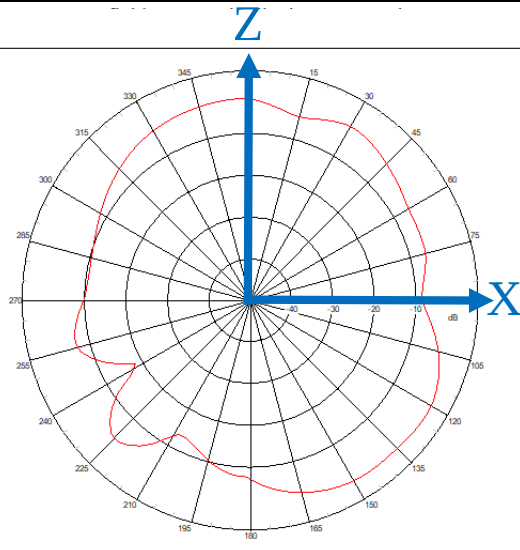

YZ-plane

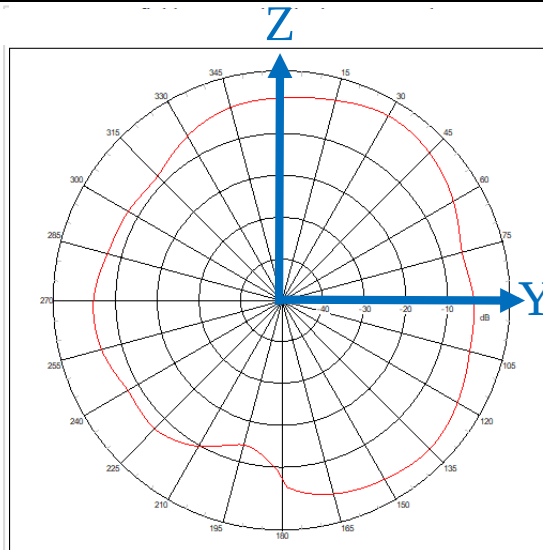

XY-plane

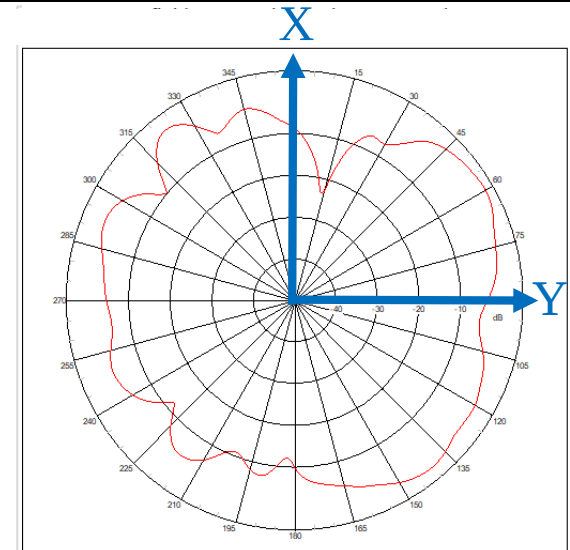

Far-field amplitude limits:

Max: 5dB

min: -50dB