



# FCC RADIO TEST REPORT

Applicant : D-Link Corporation

---

Address : 14420 Myford Road Suite 100 Irvine California  
United States 92606

---

Equipment : BE3600 Wi-Fi 7 Smart Mesh Router,  
Wi-Fi 7 BE3600 Mesh Router

---

Model No. : M36

---

Trade Name : D-Link

---

FCC ID : KA2M36B1

---

**I HEREBY CERTIFY THAT :**

The sample was received on Dec. 24, 2024 and the testing was completed on May. 08, 2025 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## Contents

|   |           |
|---|-----------|
| <b>1. Summary of Test Procedure and Test Results</b>    | <b>5</b>  |
| 1.1 Applicable Standards                                | 5         |
| <b>2. Test Configuration of Equipment under Test</b>    | <b>6</b>  |
| 2.1 Feature of Equipment under Test                     | 6         |
| 2.2 Carrier Frequency of Channels                       | 7         |
| 2.3 Test Mode and Test Software                         | 8         |
| 2.4 Description of Test System                          | 10        |
| 2.5 General Information of Test                         | 11        |
| 2.6 Measurement Uncertainty                             | 12        |
| <b>3. Test Equipment and Ancillaries Used for Tests</b> | <b>13</b> |
| <b>4. Antenna Requirements</b>                          | <b>17</b> |
| 4.1 Standard Applicable                                 | 17        |
| 4.2 Antenna Construction and Directional Gain           | 17        |
| <b>5. Test of AC Power Line Conducted Emission</b>      | <b>18</b> |
| 5.1 Test Limit  | 18        |
| 5.2 Test Procedures                                     | 18        |
| 5.3 Typical Test Setup                                  | 19        |
| 5.4 Test Result and Data                                | 20        |
| 5.5 Test Photographs                                    | 22        |
| <b>6. Test of Radiated Spurious Emission</b>            | <b>23</b> |
| 6.1 Test Limit  | 23        |
| 6.2 Test Procedures                                     | 24        |
| 6.3 Typical Test Setup                                  | 25        |
| 6.4 Test Result and Data (9KHz ~ 30MHz)                 | 26        |
| 6.5 Test Result and Data (30MHz ~ 1GHz)                 | 26        |
| 6.6 Test Result and Data (1GHz ~ 25GHz)                 | 28        |
| 6.7 Restricted Bands of Operation                       | 52        |
| 6.8 Test Photographs (30MHz ~ 1GHz)                     | 53        |
| 6.9 Test Photographs (1GHz ~ 25GHz)                     | 54        |
| <b>7. Test of Conducted Spurious Emission</b>           | <b>56</b> |
| 7.1 Test Limit  | 56        |
| 7.2 Test Procedure                                      | 56        |
| 7.3 Test Setup Layout                                   | 56        |
| 7.4 Test Result and Data                                | 56        |
| <b>8. On Time, Duty Cycle and Measurement methods</b>   | <b>69</b> |
| 8.1 Test Limit  | 69        |
| 8.2 Test Procedure                                      | 69        |
| 8.3 Test Setup Layout                                   | 69        |
| 8.4 Test Result and Data                                | 69        |
| <b>9. 6dB Bandwidth Measurement Data</b>                | <b>71</b> |
| 9.1 Test Limit  | 71        |
| 9.2 Test Procedures                                     | 71        |



9.3 Test Setup Layout ..... 71

9.4 Test Result and Data ..... 71

**10. Maximum Average Output Power ..... 76**

10.1 Test Limit ..... 76

10.2 Test Procedures ..... 76

10.3 Test Setup Layout ..... 76

10.4 Test Result and Data ..... 77

**11. Power Spectral Density ..... 78**

11.1 Test Limit ..... 78

11.2 Test Procedures ..... 78

11.3 Test Setup Layout ..... 78

11.4 Test Result and Data ..... 79





# 1. Summary of Test Procedure and Test Results

## 1.1 Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

| FCC Rule         | Description of Test                | Result |
|------------------|------------------------------------|--------|
| 15.203           | . Antenna Requirement              | PASS   |
| 15.207           | . AC Power Line Conducted Emission | PASS   |
| 15.209<br>15.205 | . Radiated Spurious Emission       | PASS   |
| 15.247(d)        | . Conducted Spurious Emission      | PASS   |
| 15.247(a)(2)     | . 6dB Bandwidth                    | PASS   |
| 15.247(b)        | . Output Power                     | PASS   |
| 15.247(e)        | . Power Spectral Density           | PASS   |
| 2.1091           | . Radio Frequency Exposure         | PASS   |

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

|                           |  |
|---------------------------|--|
| Operation Frequency Range | 802.11b/g/n(Turbo QAM)/ax/be : 2400-2483.5MHz<br>802.11a/n/ac/ax/be: 5150-5250MHz, 5250-5350MHz,<br>5470-5725MHz, 5725-5875MHz   |
| Center Frequency Range    | 802.11b/g/n(Turbo QAM)/ax/be : 2412-2462MHz<br>802.11a/n/ac/ax/be: 5180-5240MHz, 5260-5320MHz,<br>5500-5720MHz, 5745-5825MHz   |
| Modulation Type           | 2.4GHz:<br>802.11b: CCK, DQPSK, DBPSK<br>802.11g/n: BPSK, QPSK, 16QAM, 64QAM, 256QAM(TurboQAM)<br>802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM<br>802.11be: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM,<br>4096QAM<br>5GHz:<br>802.11n/a: BPSK, QPSK, 16QAM, 64QAM<br>802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM<br>802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM<br>802.11be: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM,<br>4096QAM |
| Modulation Technology     | DSSS, OEDM, OFDMA  |
| Data Rate                 | 2.4GHz:<br>802.11b: 1, 2, 5.5, 11Mbps<br>802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps<br>802.11n: MCS0 – MCS15,HT20/40<br>MCS0 – MCS9, VHT20/40(TurboQAM)<br>802.11ax: MCS0 – MCS11,HE20/40<br>802.11be: MCS0 – MCS13,EHT20/40<br>5GHz:<br>802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps<br>802.11n: MCS0 – MCS15, HT20/40<br>802.11ac: MCS0 – MCS9, VHT20/40/80/160<br>802.11ax: MCS0 – MCS11,HE20/40/80/160<br>802.11be: MCS0 – MCS13,EHT20/40/80/160 |
| Antenna Type              | Dipole Antenna   |
| Antenna Gain              | 2412-2484MHz: ANT B:1.57dBi, ANT C: 1.58dBi<br>5180-5260MHz: ANT A 1.68dBi, ANT D: 1.82dBi<br>5260-5320MHz: ANT A 1.63dBi, ANT D: 1.89dBi<br>5500-5700MHz: ANT A 1.72dBi, ANT D: 2.01dBi<br>5745-5875MHz: ANT A 1.73dBi, ANT D: 1.97dBi  |
| Adapter                   | 1. Brand: AMIGO Model: AMS200-1201500FU<br>2. Brand: AMIGO Model: AMS200-1201500F  |
| RJ45 Cable                | Brand: Nienyi /Model: NYS6200  |

Note:

1. EUT support TPC Function.
2. EUT support AP Mode (Master)
3. EUT support Bridge/Extender/Mesh Mode(Master/Client).
4. EUT Only Support Full RU
5. WLAN 2.4GHz 802.11ax/be support beamforming Function.
6. WLAN 5GHz 802.11ax/be support beamforming Function.
7. For more details, please refer to the User's manual of the EUT.



## 2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20, VHT20, 802.11ax HE20, 802.11be EHT20

| Channel    | Frequency(MHz) | Channel    | Frequency(MHz) |
|------------|----------------|------------|----------------|
| <b>*01</b> | <b>2412</b>    | 07         | 2442           |
| 02         | 2417           | 08         | 2447           |
| 03         | 2422           | 09         | 2452           |
| 04         | 2427           | 10         | 2457           |
| 05         | 2432           | <b>*11</b> | <b>2462</b>    |
| <b>*06</b> | <b>2437</b>    | ---        | ---            |

802.11n HT40, VHT40, 802.11ax HE40, 802.11be EHT40

| Channel    | Frequency(MHz) | Channel    | Frequency(MHz) |
|------------|----------------|------------|----------------|
| ---        | ---            | 07         | 2442           |
| ---        | ---            | 08         | 2447           |
| <b>*03</b> | <b>2422</b>    | <b>*09</b> | <b>2452</b>    |
| 04         | 2427           | ---        | ---            |
| 05         | 2432           | ---        | ---            |
| <b>*06</b> | <b>2437</b>    | ---        | ---            |

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- c. An executive program, " QSPR V6.00.00164.3" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

| Conducted Emissions from the AC mains power ports                                      |  |
|--|--|
| Test Mode  | Operating Description                        |
| 1  | TX Mode, 802.11b, Power from Adapter.        |
| 2  | TX Mode, 802.11g, Power from Adapter.        |
| 3  | TX Mode, 802.11be EHT20, Power from Adapter. |
| 4  | TX Mode, 802.11be EHT40, Power from Adapter. |
| caused "Test Mode 3" generated the worst case, it was reported as the final data.      |  |
| Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)                                       |  |
| Test Mode  | Operating Description                        |
| 1  | TX Mode, 802.11b , Power from Adapter.       |
| 2  | TX Mode, 802.11g, Power from Adapter.        |
| 3  | TX Mode, 802.11be EHT20, Power from Adapter. |
| 4  | TX Mode, 802.11be EHT40, Power from Adapter. |
| caused "Test Mode 3" generated the worst case, they were reported as the final data.   |  |
| Radiation Emissions (1GHz ~ 25GHz)   |  |
| Test Mode  | Operating Description                        |
| 1  | TX Mode, 802.11b , Power from Adapter.       |
| 2  | TX Mode, 802.11g, Power from Adapter.        |
| 3  | TX Mode, 802.11be EHT20, Power from Adapter. |
| 4  | TX Mode, 802.11be EHT40, Power from Adapter. |
| caused "Test Mode 1~4" generated the worst case, they were reported as the final data. |  |

Note:

- 1.Non-Beamforming was the worst case, so it was used for the test result.
- 2. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz. worst case (V)

| Test Item /test voltage           | AC 120V / 60Hz | AC 240V / 60Hz. |
|-----------------------------------|----------------|-----------------|
| AC Power Line Conducted Emission: | V              |                 |
| Radiation Emissions (Below 1GHz)  | V              |                 |

3.The EUT has Two types of Adapters. After engineering evaluation, For AC Power Line Conducted Emission, AMS200-1202000F is worst case. For Radiated Spurious Emission(Below 1GHz), AMS200-1202000FU is worst case. For Radiated Spurious Emission(Above 1GHz), AMS200-1202000FU is worst case., hence, are used at test report



The EUT incorporates a MIMO function

| Modulation Type        | TX CONFIGURATION |
|------------------------|------------------|
| 802.11b                | 2TX              |
| 802.11g                | 2TX              |
| 802.11n HT20           | 2TX              |
| 802.11n HT40           | 2TX              |
| 802.11n HT20(TurboQAM) | 2TX              |
| 802.11n HT40(TurboQAM) | 2TX              |
| 802.11ax HE20          | 2TX              |
| 802.11ax HE40          | 2TX              |
| 802.11be EHT20         | 2TX              |
| 802.11be EHT40         | 2TX              |



### 2.4 Description of Test System

#### Non-beamforming

| RF Conducted                     |                 |               |             |                        |
|----------------------------------|-----------------|---------------|-------------|------------------------|
| Equipment                        | Brand           | Model         | Length/Type | Power cord/Length/Type |
| Notebook                         | DELL            | Latitude 7490 | N/A         | Adapter / 1.8m / NS    |
| RJ45 Cable                       | TE CONNECTIVITY | CAT5E         | 1.2m / NS   | N/A                    |
| Radiated Emissions               |                 |               |             |                        |
| Equipment                        | Brand           | Model         | Length/Type | Power cord/Length/Type |
| Notebook                         | DELL            | Latitude 7490 | N/A         | Adapter / 1.8m / NS    |
| AC Power Line Conducted Emission |                 |               |             |                        |
| Equipment                        | Brand           | Model         | Length/Type | Power cord/Length/Type |
| Notebook                         | DELL            | Latitude 7490 | N/A         | Adapter / 1.8m / NS    |

#### Beamforming

| RF Conducted |                 |               |             |                        |
|--------------|-----------------|---------------|-------------|------------------------|
| Equipment    | Brand           | Model         | Length/Type | Power cord/Length/Type |
| Notebook     | DELL            | Latitude 7490 | N/A         | Adapter / 1.8m / NS    |
| RJ45 Cable   | TE CONNECTIVITY | CAT5E         | 1.2m / NS   | N/A                    |



**2.5 General Information of Test**

|                              |  |                  |  |
|------------------------------|--|------------------|--|
| Organization                 | CerpPASS Technology Corp.  |                  |  |
| ☒ Test Site                  | CerpPASS Technology Corporation Test Laboratory<br>Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.)<br>Tel: +886-3-3226-888<br>Fax: +886-3-3226-881 |                  |  |
|                              | FCC  | TW1439, TW1079   |  |
|                              | IC   | 4934E-1, 4934E-2 |  |
| Frequency Range Investigated | Conducted: from 150kHz to 30 MHz<br>Radiation: from 30 MHz to 25,000MHz  |                  |  |
| Test Distance                | The test distance of radiated emission from antenna to EUT is 3 M.   |                  |  |

**Non-beamforming**

| Test Item                        | Test Site  | Test period | Environmental Conditions | Tested By  |
|----------------------------------|------------|-------------|--------------------------|------------|
| RF Conducted                     | RFCON01-NK | 2025/01/03  | 20.9°C / 54%             | Leon Huang |
| RF Conducted                     | RFCON01-NK | 2025/01/04  | 23.9°C / 45%             | Leon Huang |
| RF Conducted                     | RFCON01-NK | 2025/01/08  | 25°C / 50%               | Leon Huang |
| RF Conducted                     | RFCON01-NK | 2025/03/08  | 22.2°C / 49%             | Leon Huang |
| RF Conducted                     | RFCON01-NK | 2025/05/08  | 25.8°C / 47%             | Leon Huang |
| Radiated Emissions               | 3M02-NK    | 2025/01/02  | 19.8°C / 50%             | Park Chen  |
| Radiated Emissions               | 3M02-NK    | 2025/03/20  | 20.3°C / 56%             | Park Chen  |
| AC Power Line Conducted Emission | CON02-NK   | 2025/03/20  | 17.1°C / 55%             | Park Chen  |

**Beamforming**

| Test Item                        | Test Site  | Test period | Environmental Conditions | Tested By  |
|----------------------------------|------------|-------------|--------------------------|------------|
| RF Conducted                     | RFCON01-NK | 2025/01/11  | 22.4°C / 47%             | Leon Huang |
| AC Power Line Conducted Emission | CON02-NK   | 2025/02/24  | 17.1°C / 55%             | Leon Huang |
| AC Power Line Conducted Emission | CON02-NK   | 2025/02/24  | 17.1°C / 55%             | Leon Huang |



## 2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Measurement Item                         | Uncertainty |
|--|-------------|
| AC Power Line Conduction(150K~30MHz)     | ±3.2dB      |
| Radiated Spurious Emission(9KHz~30MHz)   | ±3.5dB      |
| Radiated Spurious Emission(30MHz~1GHz)   | ±5.1dB      |
| Radiated Spurious Emission(1GHz~40GHz)   | ±5.2dB      |
| Conducted Spurious Emission              | ±2.1dB      |
| 6dB Bandwidth                            | ±5.4%       |
| 20dB Bandwidth                           | ±4.4%       |
| Occupied Bandwidth                       | ±4.5%       |
| Peak Output Power(Conducted Power Meter) | ±1.1dB      |
| Dwell Time / Deactivation Time           | ±7.6%       |
| Power Spectral Density                   | ±2.0dB      |
| Duty Cycle                               | ±3.5%       |



### 3. Test Equipment and Ancillaries Used for Tests

Non-beamforming

| Test Item           | Radiated Emissions (2025/1/2) |                      |             |                  |            |
|---------------------|-------------------------------|----------------------|-------------|------------------|------------|
| Test Site           | Semi Anechoic Room(3M02-NK)   |                      |             |                  |            |
| Instrument          | Manufacturer                  | Model No             | Serial No   | Calibration Date | Valid Date |
| Bilog Antenna       | Schwarzbeck                   | VULB9168             | 369         | 2024/02/19       | 2025/02/18 |
| Active Loop Antenna | Schwarzbeck                   | FMZB 1513            | 414         | 2024/01/16       | 2025/01/15 |
| Horn Antenna        | EMCO                          | 3115                 | 31589       | 2024/02/26       | 2025/02/25 |
| Horn Antenna        | EMCO                          | 3116                 | 31970       | 2024/02/23       | 2025/02/22 |
| EMI Receiver        | ROHDE & SCHWARZ               | ESR 7                | 101906      | 2024/05/13       | 2025/05/12 |
| Spectrum Analyzer   | ROHDE & SCHWARZ               | FSV 40-N             | 101329      | 2024/07/16       | 2025/07/15 |
| Preamplifier        | Agilent                       | 8449B                | 3008A01954  | 2024/03/01       | 2025/02/28 |
| Preamplifier        | EMC INSTRUMENTS               | EMC184045            | 980065      | 2024/10/15       | 2025/10/14 |
| Preamplifier        | EM Electronics corp.          | EM330                | 60659       | 2024/12/16       | 2025/12/15 |
| Cable-4m(9k-3G)     | EMEC                          | RG-223               | 18274M      | 2024/08/08       | 2025/08/07 |
| Cable-3in1(30M-1G)  | HARBOUR INDUSTRIES            | LL142                | CCE1315     | 2024/02/23       | 2025/02/22 |
| Cable-0.5m(1G-40G)  | HUBER SUHNER                  | SUCOFLEX 104         | 805443/4    | 2024/03/05       | 2025/03/04 |
| Cable-3m(1G-40G)    | HUBER SUHNER                  | SUCOFLEX 104         | 805796/4    | 2024/03/05       | 2025/03/04 |
| Cable-8m(1G-26.5G)  | WOKEN                         | WCBA-WCA203SM        | CCE1374     | 2024/03/05       | 2025/03/04 |
| Cable-3m(10M-40G)   | HUBER SUHNER                  | SF102                | 804619/2    | 2024/10/14       | 2025/10/13 |
| Cable-1m(10M-40G)   | HUBER SUHNER                  | SF102                | 804398/2    | 2024/10/14       | 2025/10/13 |
| E3                  | AUDIX                         | v8.2014-8-6          | RK-000529   | NA               | NA         |
| High Pass Filter    | WOKEN                         | WFIL-H3000-18000F-03 | WR377WC2B1  | 2024/10/15       | 2025/10/14 |
| Notch Filter        | Warison                       | WFIL-N5925-7125F-04  | WRQ4BFWC4M1 | 2024/03/11       | 2025/03/10 |
| Hipass Filter       | Warison                       | WFIL-H7500-18000F    | WRQ4BFWC2J1 | 2024/03/11       | 2025/03/10 |



| Test Item           | Radiated Emissions (2025/3/20) |                      |             |                  |            |
|---------------------|--------------------------------|----------------------|-------------|------------------|------------|
| Test Site           | Semi Anechoic Room(3M02-NK)    |                      |             |                  |            |
| Instrument          | Manufacturer                   | Model No             | Serial No   | Calibration Date | Valid Date |
| Bilog Antenna       | Schwarzbeck                    | VULB9168             | 369         | 2025/02/17       | 2026/02/16 |
| Active Loop Antenna | EMCO                           | 6507                 | 00040855    | 2024/05/02       | 2025/05/01 |
| Horn Antenna        | EMCO                           | 3115                 | 31589       | 2025/02/14       | 2026/02/13 |
| Horn Anrenna        | EMCO                           | 3116                 | 31970       | 2025/02/20       | 2026/02/19 |
| EMI Receiver        | ROHDE & SCHWARZ                | ESR 7                | 101906      | 2024/05/13       | 2025/05/12 |
| Spectrum Analyzer   | ROHDE & SCHWARZ                | FSV 40-N             | 101329      | 2024/07/16       | 2025/07/15 |
| Preamplifier        | Agilent                        | 8449B                | 3008A01954  | 2025/02/12       | 2026/02/11 |
| Preamplifier        | EMC INSTRUMENTS                | EMC184045            | 980065      | 2024/10/15       | 2025/10/14 |
| Preamplifier        | EM Electronics corp.           | EM330                | 60659       | 2024/12/16       | 2025/12/15 |
| Cable-4m(9k-3G)     | EMEC                           | RG-223               | 18274M      | 2024/08/08       | 2025/08/07 |
| Cable-3in1(30M-1G)  | HARBOUR INDUSTRIES             | LL142                | CCE1315     | 2025/02/21       | 2026/02/20 |
| Cable-0.5m(1G-40G)  | HUBER SUHNER                   | SUCOFLEX 104         | 805443/4    | 2025/02/26       | 2026/02/25 |
| Cable-3m(1G-40G)    | HUBER SUHNER                   | SUCOFLEX 104         | 805796/4    | 2025/02/26       | 2026/02/25 |
| Cable-8m(1G-26.5G)  | WOKEN                          | WCBA-WCA203SM        | CCE1374     | 2025/02/26       | 2026/02/25 |
| Cable-3m(10M-40G)   | HUBER SUHNER                   | SF102                | 804619/2    | 2024/10/14       | 2025/10/13 |
| Cable-1m(10M-40G)   | HUBER SUHNER                   | SF102                | 804398/2    | 2024/10/14       | 2025/10/13 |
| E3                  | AUDIX                          | v8.2014-8-6          | RK-000529   | NA               | NA         |
| High Pass Filter    | WOKEN                          | WFIL-H3000-18000F-03 | WR377WC2B1  | 2024/10/15       | 2025/10/14 |
| Notch Filter        | Warison                        | WFIL-N5925-7125F-04  | WRQ4BFWC4M1 | 2025/02/21       | 2026/02/20 |
| Hipass Filter       | Warison                        | WFIL-H7500-18000F    | WRQ4BFWC2J1 | 2025/02/21       | 2026/02/20 |

| Test Item           | RF Conducted(2025/01/3~2025/01/08) |          |            |                  |            |
|---------------------|------------------------------------|----------|------------|------------------|------------|
| Test Site           | RFCON01-NK                         |          |            |                  |            |
| Instrument          | Manufacturer                       | Model No | Serial No  | Calibration Date | Valid Date |
| CAX Signal Analyzer | KEYSIGHT                           | N9000B   | MY57100339 | 2024/10/23       | 2025/10/22 |
| Power Meter         | Anritsu                            | ML2495A  | 1224005    | 2024/02/17       | 2025/02/16 |
| Power Sensor        | Anritsu                            | MA2411B  | 1207295    | 2024/02/17       | 2025/02/16 |
| Attenuator          | KEYSIGHT                           | 8491B    | MY39250703 | 2024/02/20       | 2025/02/19 |



| Test Item           | RF Conducted(2025/03/08~2025/05/08) |          |            |                  |            |
|---------------------|-------------------------------------|----------|------------|------------------|------------|
| Test Site           | RFCON01-NK                          |          |            |                  |            |
| Instrument          | Manufacturer                        | Model No | Serial No  | Calibration Date | Valid Date |
| CAX Signal Analyzer | KEYSIGHT                            | N9000B   | MY57100339 | 2024/10/23       | 2025/10/22 |
| Power Meter         | Anritsu                             | ML2495A  | 1224005    | 2025/02/12       | 2026/02/11 |
| Power Sensor        | Anritsu                             | MA2411B  | 1207295    | 2025/02/12       | 2026/02/11 |
| Attenuator          | KEYSIGHT                            | 8491B    | MY39250703 | 2025/02/12       | 2026/02/11 |

| Test Item                            | AC Power Line Conducted Emission |             |           |                  |            |
|--------------------------------------|----------------------------------|-------------|-----------|------------------|------------|
| Test Site                            | CON02-NK                         |             |           |                  |            |
| Instrument                           | Manufacturer                     | Model No    | Serial No | Calibration Date | Valid Date |
| EMI Receiver                         | ROHDE & SCHWARZ                  | ESR 7       | 101906    | 2024/05/13       | 2025/05/12 |
| Two-Line V-Network                   | ROHDE & SCHWARZ                  | ENV216      | 102185    | 2024/08/27       | 2025/08/26 |
| Line Impedance Stabilization Network | Schwarzbeck                      | NSLK 8127   | 8127740   | 2024/08/27       | 2025/08/26 |
| Cable-4m(9k-3G)                      | EMEC                             | RG-223      | 18274M    | 2024/08/08       | 2025/08/07 |
| E3                                   | AUDIX                            | v8.2014-8-6 | RK-000536 | NA               | NA         |



Beamforming

| Test Item           | RF Conducted |          |            |                  |            |
|---------------------|--------------|----------|------------|------------------|------------|
| Test Site           | RFCON01-NK   |          |            |                  |            |
| Instrument          | Manufacturer | Model No | Serial No  | Calibration Date | Valid Date |
| CAX Signal Analyzer | KEYSIGHT     | N9000B   | MY57100339 | 2024/10/23       | 2025/10/22 |
| Power Meter         | Anritsu      | ML2495A  | 1224005    | 2024/02/17       | 2025/02/16 |
| Power Sensor        | Anritsu      | MA2411B  | 1207295    | 2024/02/17       | 2025/02/16 |
| Attenuator          | KEYSIGHT     | 8491B    | MY39250703 | 2024/02/20       | 2025/02/19 |

| Test Item                            | AC Power Line Conducted Emission |             |           |                  |            |
|--------------------------------------|----------------------------------|-------------|-----------|------------------|------------|
| Test Site                            | CON02-NK                         |             |           |                  |            |
| Instrument                           | Manufacturer                     | Model No    | Serial No | Calibration Date | Valid Date |
| EMI Receiver                         | ROHDE & SCHWARZ                  | ESR 7       | 101906    | 2024/05/13       | 2025/05/12 |
| Cable-4m(9k-3G)                      | EMEC                             | RG-223      | 18274M    | 2024/08/08       | 2025/08/07 |
| Line Impedance Stabilization Network | Schwarzbeck                      | NSLK 8127   | 8127740   | 2024/08/27       | 2025/08/26 |
| Two-Line V-Network                   | ROHDE & SCHWARZ                  | ENV216      | 102185    | 2024/08/27       | 2025/08/26 |
| E3                                   | AUDIX                            | v8.2014-8-6 | RK-000531 | NA               | NA         |



### 4. Antenna Requirements

#### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 4.2 Antenna Construction and Directional Gain

|              |  |
|--------------|--|
| Antenna Type | Dipole Antenna                               |
| Antenna Gain | 2412-2484MHz: ANT B: 1.57dBi ,ANT C: 1.58dBi |

##### (Non-Beamforming)

2412-2484MHz

For Power directional gain=  $G_{ant}$ = 1.58 dBi

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$   
= 4.59 (dBi)

\*MIMO type: Cyclic Delay Diversity (CDD) mode.

##### (Beamforming)

For Power directional gain=  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$   
= 4.59 (dBi)

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$   
= 4.59 (dBi)



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

| Frequency (MHz) | Quasi Peak (dB $\mu$ V) | Average (dB $\mu$ V) |
|-----------------|-------------------------|----------------------|
| 0.15 – 0.5      | 66-56*                  | 56-46*               |
| 0.5 – 5.0       | 56                      | 46                   |
| 5.0 – 30.0      | 60                      | 50                   |


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



### 5.3 Typical Test Setup

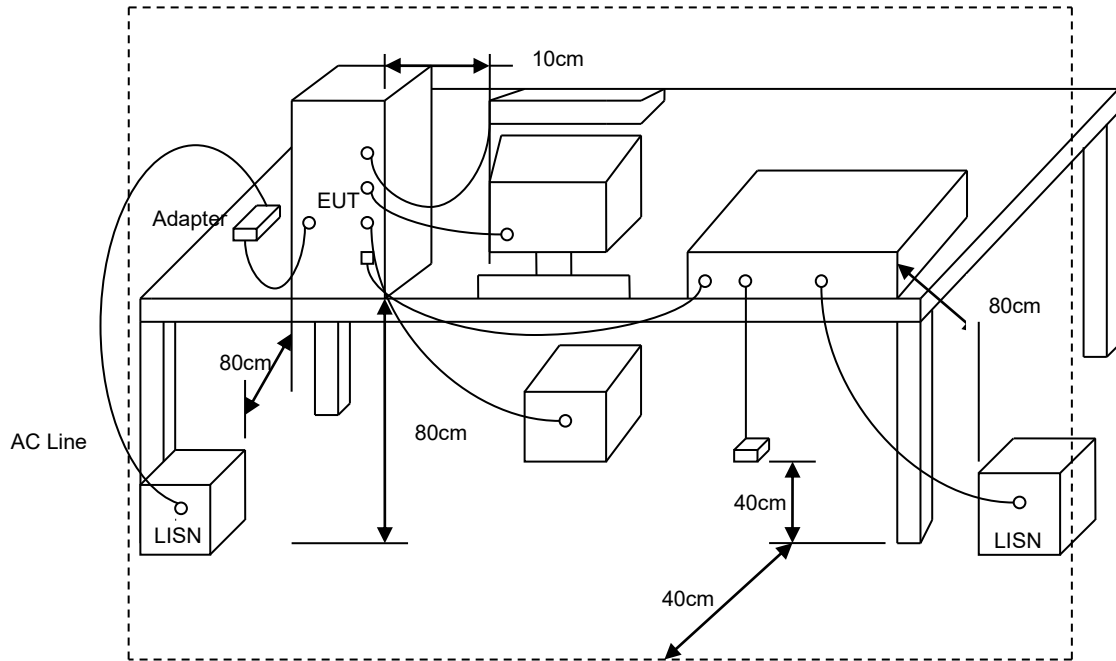




### 5.4 Test Result and Data

Test Mode : 2TX 11be20 CH06 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Phase : Line

Data: 21

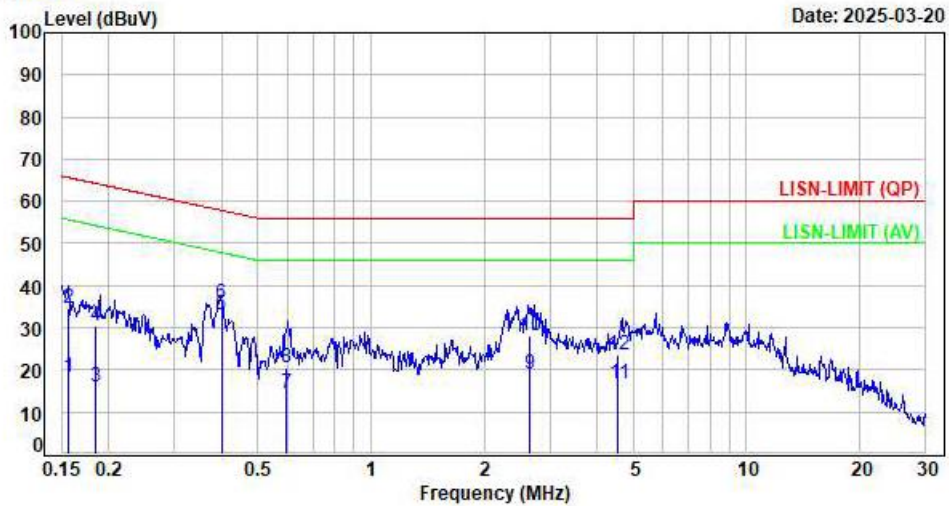

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-----|
| 1   | 0.1562          | 9.63        | 8.48           | 18.11        | 55.66        | -37.55      | Average  | P   |
| 2   | 0.1562          | 9.63        | 25.09          | 34.72        | 65.66        | -30.94      | QP       | P   |
| 3   | 0.1850          | 9.63        | 6.48           | 16.11        | 54.26        | -38.15      | Average  | P   |
| 4   | 0.1850          | 9.63        | 20.88          | 30.51        | 64.26        | -33.75      | QP       | P   |
| 5   | 0.3995          | 9.65        | 23.49          | 33.14        | 47.86        | -14.72      | Average  | P   |
| 6   | 0.3995          | 9.65        | 26.27          | 35.92        | 57.86        | -21.94      | QP       | P   |
| 7   | 0.5970          | 9.66        | 4.91           | 14.57        | 46.00        | -31.43      | Average  | P   |
| 8   | 0.5970          | 9.66        | 10.69          | 20.35        | 56.00        | -35.65      | QP       | P   |
| 9   | 2.6571          | 9.71        | 9.42           | 19.13        | 46.00        | -26.87      | Average  | P   |
| 10  | 2.6571          | 9.71        | 18.55          | 28.26        | 56.00        | -27.74      | QP       | P   |
| 11  | 4.5632          | 9.75        | 7.04           | 16.79        | 46.00        | -29.21      | Average  | P   |
| 12  | 4.5632          | 9.75        | 13.81          | 23.56        | 56.00        | -32.44      | QP       | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11be20 CH06 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Phase : Neutral

Data: 22

Date: 2025-03-20

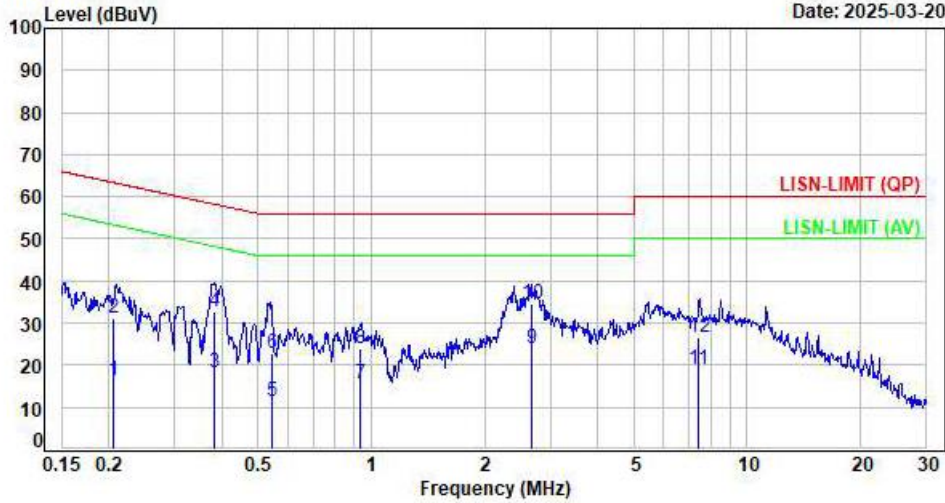

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|-----|
| 1   | 0.2054          | 9.61        | 6.79           | 16.40        | 53.39        | -36.99      | Average  | P   |
| 2   | 0.2054          | 9.61        | 21.73          | 31.34        | 63.39        | -32.05      | QP       | P   |
| 3   | 0.3812          | 9.62        | 8.46           | 18.08        | 48.25        | -30.17      | Average  | P   |
| 4   | 0.3812          | 9.62        | 23.24          | 32.86        | 58.25        | -25.39      | QP       | P   |
| 5   | 0.5432          | 9.62        | 1.83           | 11.45        | 46.00        | -34.55      | Average  | P   |
| 6   | 0.5432          | 9.62        | 13.01          | 22.63        | 56.00        | -33.37      | QP       | P   |
| 7   | 0.9375          | 9.65        | 6.04           | 15.69        | 46.00        | -30.31      | Average  | P   |
| 8   | 0.9375          | 9.65        | 14.41          | 24.06        | 56.00        | -31.94      | QP       | P   |
| 9   | 2.6643          | 9.69        | 14.09          | 23.78        | 46.00        | -22.22      | Average  | P   |
| 10  | 2.6643          | 9.69        | 25.01          | 34.70        | 56.00        | -21.30      | QP       | P   |
| 11  | 7.4237          | 9.79        | 9.27           | 19.06        | 50.00        | -30.94      | Average  | P   |
| 12  | 7.4237          | 9.79        | 16.98          | 26.77        | 60.00        | -33.23      | QP       | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Radiated Spurious Emission

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009 ~ 0.490   | 2400/F(kHz)                      | 300                           |
| 0.490 ~ 1.705   | 24000/F(kHz)                     | 30                            |
| 1.705 ~ 30.0    | 30                               | 30                            |
| 30 ~ 88         | 100                              | 3                             |
| 88 ~ 216        | 150                              | 3                             |
| 216 ~ 960       | 200                              | 3                             |
| Above 960       | 500                              | 3                             |



## 6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m).  
There's no corresponding limitation in the actual test item.




### 6.3 Typical Test Setup


Below 30MHz test setup

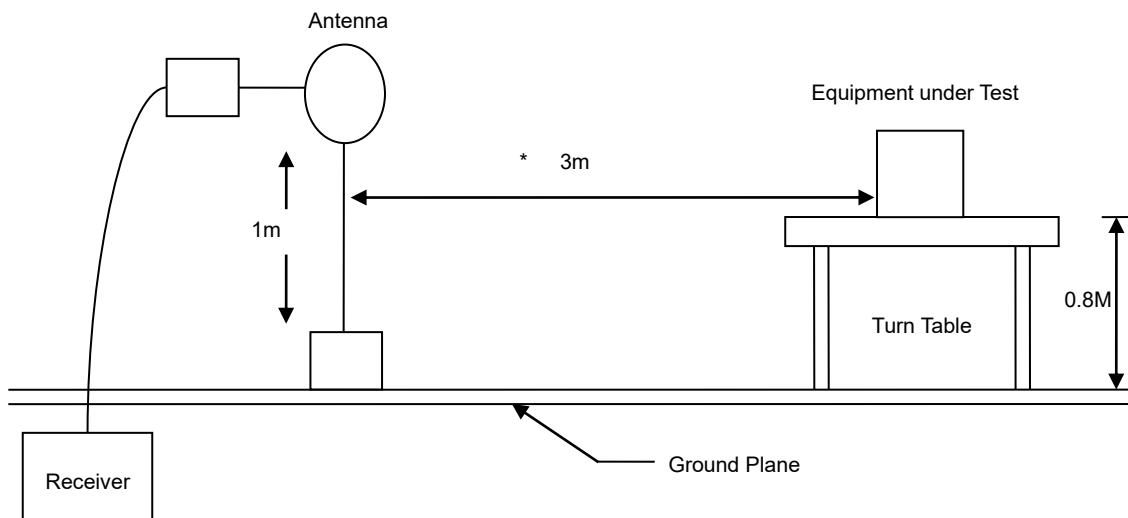

30MHz- 1GHz Test Setup

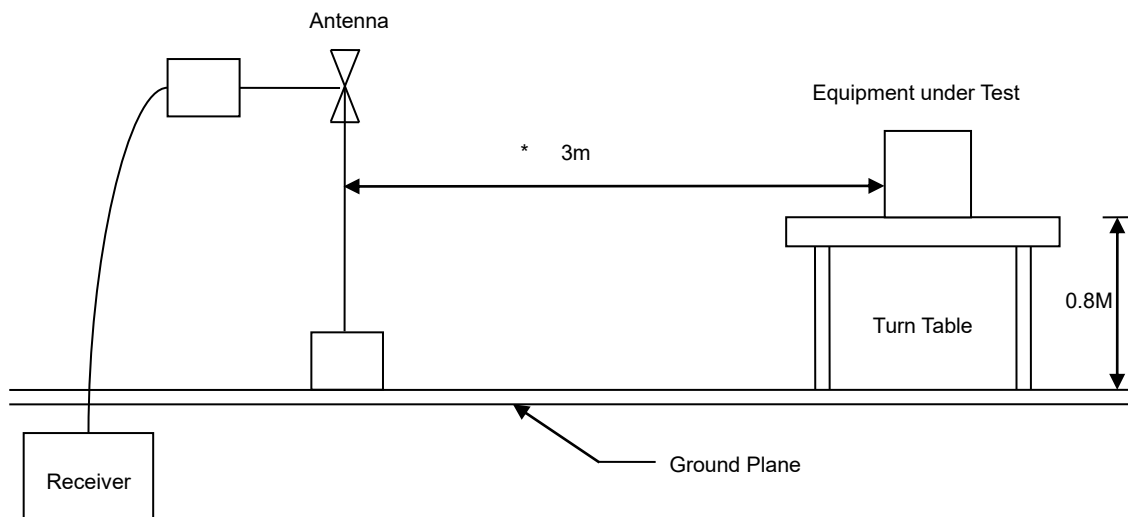

Above 1GHz Test Setup

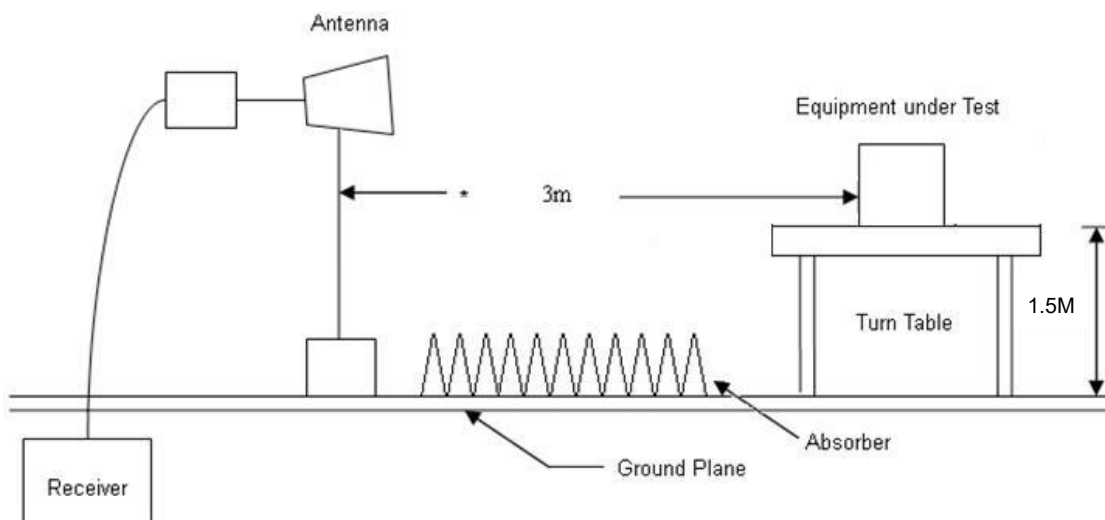




### 6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

### 6.5 Test Result and Data (30MHz ~ 1GHz)

Test Mode : 2TX 11be20 CH06 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

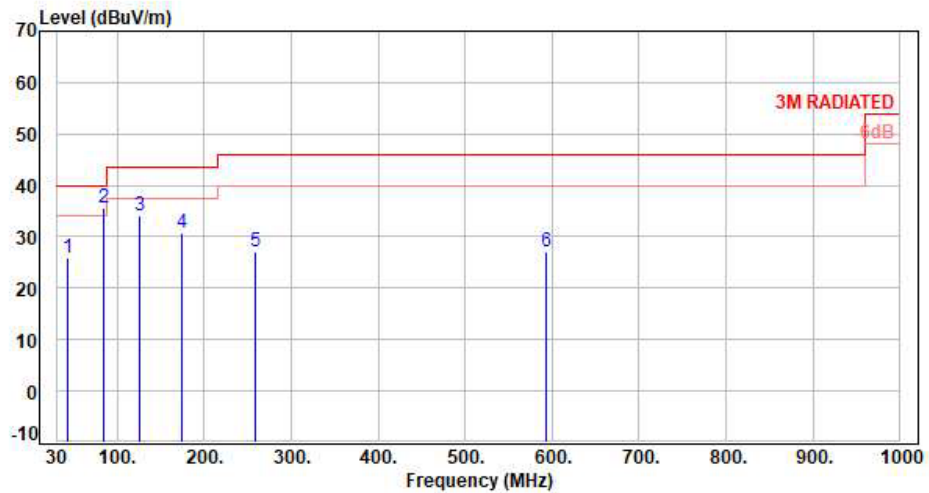


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 43.58           | -9.67       | 35.71          | 26.04          | 40.00          | -13.96      | Peak     | 400         | 0             | P   |
| 2   | 84.32           | -15.37      | 51.11          | 35.74          | 40.00          | -4.26       | QP       | 121         | 19            | P   |
| 3   | 125.06          | -12.02      | 46.17          | 34.15          | 43.50          | -9.35       | Peak     | 400         | 0             | P   |
| 4   | 173.56          | -10.13      | 40.95          | 30.82          | 43.50          | -12.68      | Peak     | 400         | 0             | P   |
| 5   | 258.92          | -10.18      | 37.34          | 27.16          | 46.00          | -18.84      | Peak     | 400         | 0             | P   |
| 6   | 592.60          | -0.45       | 27.43          | 26.98          | 46.00          | -19.02      | Peak     | 400         | 0             | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be20 CH06 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

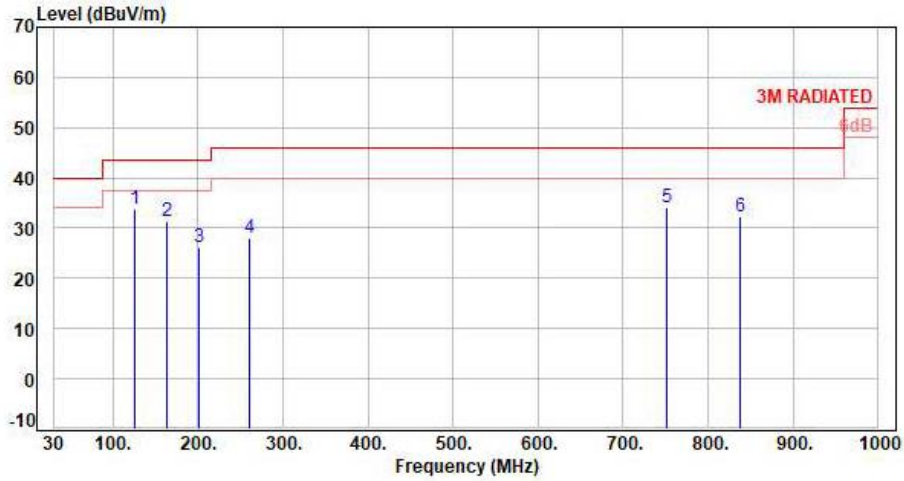


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 125.06          | -12.02      | 45.72          | 33.70          | 43.50          | -9.80       | Peak     | 400         | 0             | P   |
| 2   | 163.86          | -9.66       | 40.93          | 31.27          | 43.50          | -12.23      | Peak     | 400         | 0             | P   |
| 3   | 200.72          | -12.37      | 38.67          | 26.30          | 43.50          | -17.20      | Peak     | 400         | 0             | P   |
| 4   | 260.86          | -10.14      | 38.27          | 28.13          | 46.00          | -17.87      | Peak     | 400         | 0             | P   |
| 5   | 751.68          | 2.53        | 31.61          | 34.14          | 46.00          | -11.86      | Peak     | 400         | 0             | P   |
| 6   | 837.04          | 3.65        | 28.63          | 32.28          | 46.00          | -13.72      | Peak     | 400         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



### 6.6 Test Result and Data (1GHz ~ 25GHz)

Test Mode : 2TX 11b CH01 1Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

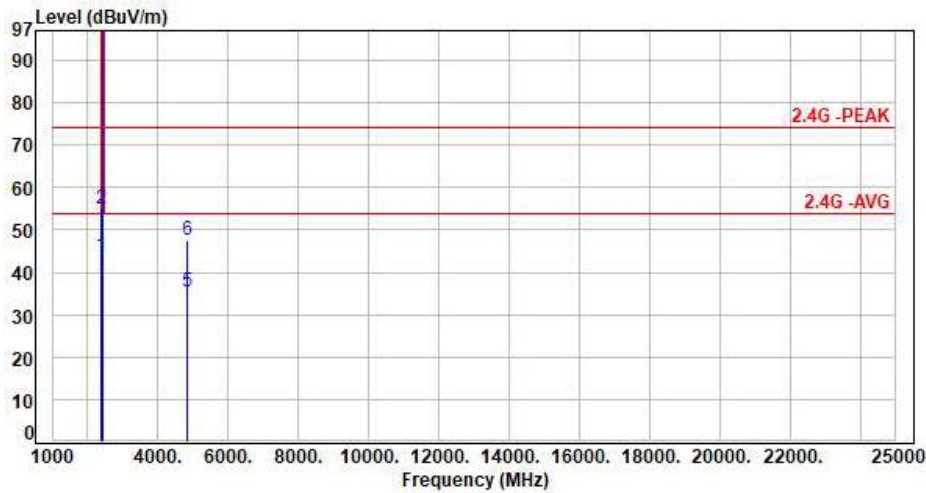


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 46.32          | 43.99          | 54.00          | -10.01      | Average  | 233         | 83            | P   |
| 2   | 2390.00         | -2.33       | 57.27          | 54.94          | 74.00          | -19.06      | Peak     | 233         | 83            | P   |
| 3   | 2412.00         | -2.29       | 111.20         | 108.91         | 200.00         | -91.09      | Average  | 233         | 83            | P   |
| 4   | 2412.00         | -2.29       | 113.73         | 111.44         | 200.00         | -88.56      | Peak     | 233         | 83            | P   |
| 5   | 4824.00         | 6.05        | 29.53          | 35.58          | 54.00          | -18.42      | Average  | 100         | 216           | P   |
| 6   | 4824.00         | 6.05        | 41.52          | 47.57          | 74.00          | -26.43      | Peak     | 100         | 216           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH01 1Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

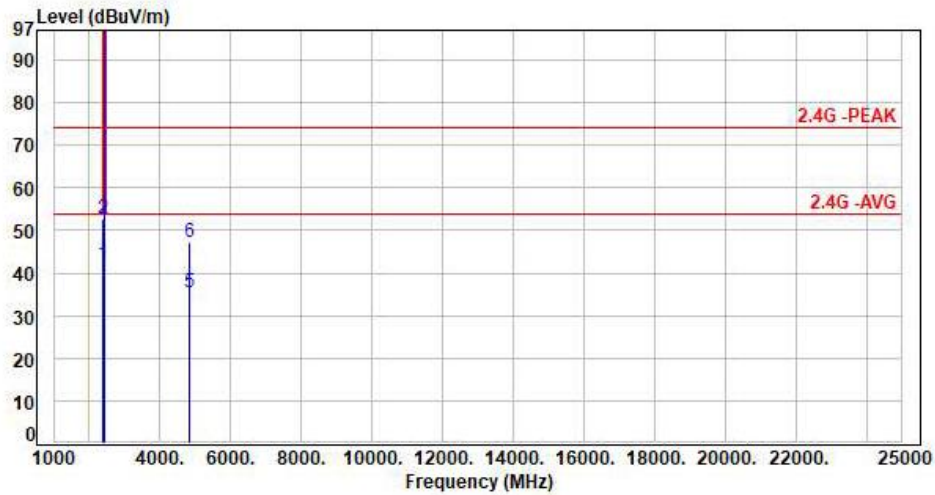


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 44.34          | 42.01          | 54.00          | -11.99      | Average  | 100         | 49            | P   |
| 2   | 2390.00         | -2.33       | 54.97          | 52.64          | 74.00          | -21.36      | Peak     | 100         | 49            | P   |
| 3   | 2412.00         | -2.29       | 105.04         | 102.75         | 200.00         | -97.25      | Average  | 100         | 49            | P   |
| 4   | 2412.00         | -2.29       | 107.43         | 105.14         | 200.00         | -94.86      | Peak     | 100         | 49            | P   |
| 5   | 4824.00         | 6.05        | 29.20          | 35.25          | 54.00          | -18.75      | Average  | 100         | 315           | P   |
| 6   | 4824.00         | 6.05        | 41.18          | 47.23          | 74.00          | -26.77      | Peak     | 100         | 315           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH06 1Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

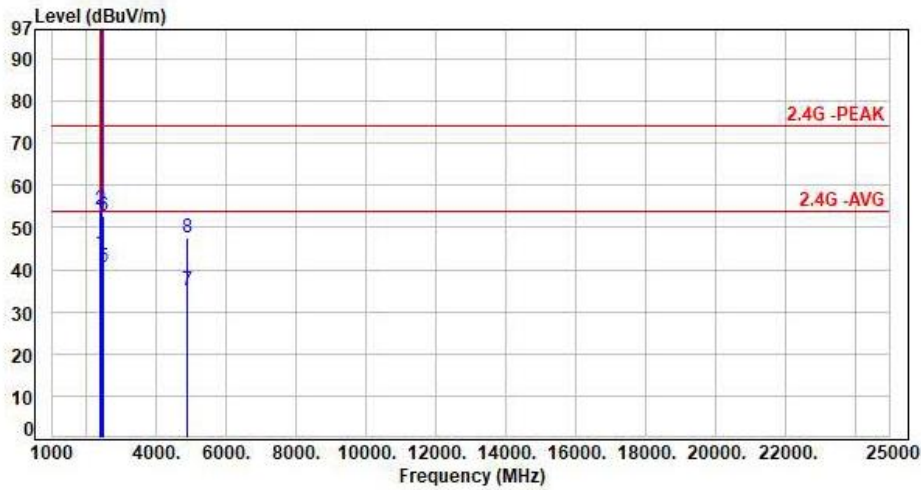


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 46.17          | 43.84          | 54.00          | -10.16      | Average  | 155         | 97            | P   |
| 2   | 2390.00         | -2.33       | 56.45          | 54.12          | 74.00          | -19.88      | Peak     | 155         | 97            | P   |
| 3   | 2437.00         | -2.17       | 110.51         | 108.34         | 200.00         | -91.66      | Average  | 155         | 97            | P   |
| 4   | 2437.00         | -2.17       | 112.95         | 110.78         | 200.00         | -89.22      | Peak     | 155         | 97            | P   |
| 5   | 2483.50         | -2.01       | 42.66          | 40.65          | 54.00          | -13.35      | Average  | 155         | 97            | P   |
| 6   | 2483.50         | -2.01       | 54.88          | 52.87          | 74.00          | -21.13      | Peak     | 155         | 97            | P   |
| 7   | 4874.00         | 6.21        | 28.70          | 34.91          | 54.00          | -19.09      | Average  | 100         | 214           | P   |
| 8   | 4874.00         | 6.21        | 41.23          | 47.44          | 74.00          | -26.56      | Peak     | 100         | 214           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH06 1Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

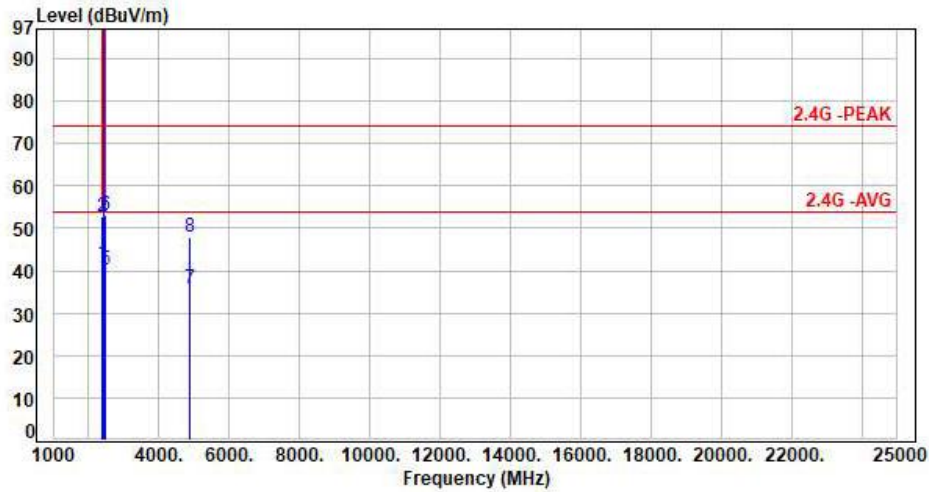


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 43.86          | 41.53          | 54.00          | -12.47      | Average  | 100         | 41            | P   |
| 2   | 2390.00         | -2.33       | 55.12          | 52.79          | 74.00          | -21.21      | Peak     | 100         | 41            | P   |
| 3   | 2437.00         | -2.17       | 104.27         | 102.10         | 200.00         | -97.90      | Average  | 100         | 41            | P   |
| 4   | 2437.00         | -2.17       | 106.81         | 104.64         | 200.00         | -95.36      | Peak     | 100         | 41            | P   |
| 5   | 2483.50         | -2.01       | 42.29          | 40.28          | 54.00          | -13.72      | Average  | 100         | 41            | P   |
| 6   | 2483.50         | -2.01       | 55.25          | 53.24          | 74.00          | -20.76      | Peak     | 100         | 41            | P   |
| 7   | 4874.00         | 6.21        | 29.68          | 35.89          | 54.00          | -18.11      | Average  | 100         | 311           | P   |
| 8   | 4874.00         | 6.21        | 41.56          | 47.77          | 74.00          | -26.23      | Peak     | 100         | 311           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH11 1Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

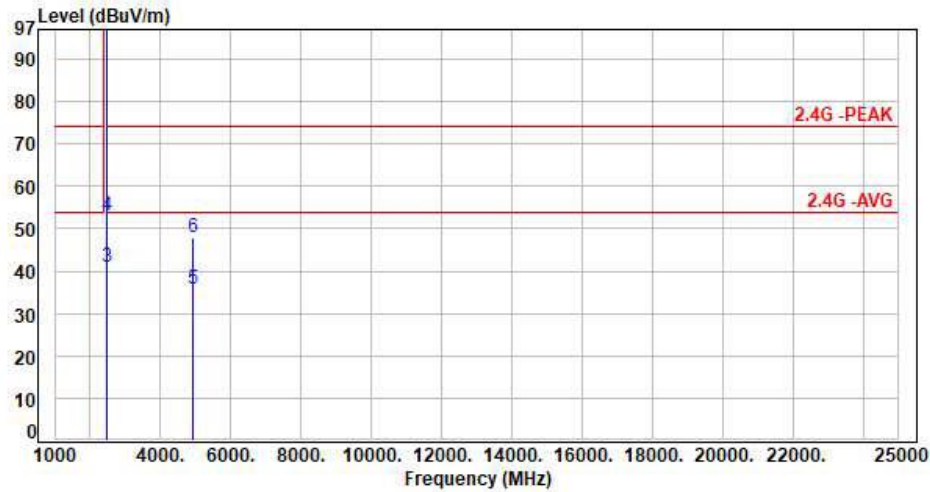


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2462.00         | -2.04       | 111.23         | 109.19         | 200.00         | -90.81      | Average  | 229         | 99            | P   |
| 2   | 2462.00         | -2.04       | 113.79         | 111.75         | 200.00         | -88.25      | Peak     | 229         | 99            | P   |
| 3   | 2483.50         | -2.01       | 43.05          | 41.04          | 54.00          | -12.96      | Average  | 229         | 99            | P   |
| 4   | 2483.50         | -2.01       | 55.19          | 53.18          | 74.00          | -20.82      | Peak     | 229         | 99            | P   |
| 5   | 4924.00         | 6.38        | 29.41          | 35.79          | 54.00          | -18.21      | Average  | 100         | 218           | P   |
| 6   | 4924.00         | 6.38        | 41.53          | 47.91          | 74.00          | -26.09      | Peak     | 100         | 218           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH11 1Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

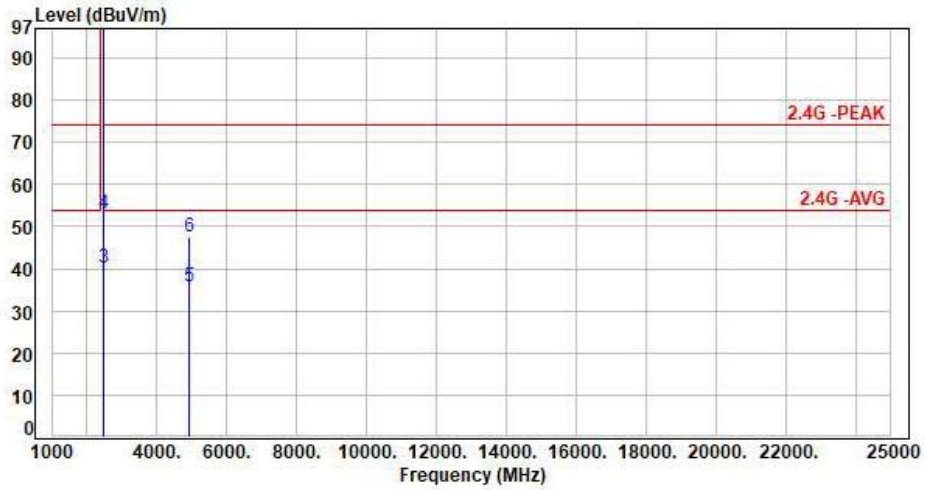


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2462.00         | -2.04       | 107.05         | 105.01         | 200.00         | -94.99      | Average  | 100         | 62            | P   |
| 2   | 2462.00         | -2.04       | 109.46         | 107.42         | 200.00         | -92.58      | Peak     | 100         | 62            | P   |
| 3   | 2483.50         | -2.01       | 42.35          | 40.34          | 54.00          | -13.66      | Average  | 100         | 62            | P   |
| 4   | 2483.50         | -2.01       | 55.24          | 53.23          | 74.00          | -20.77      | Peak     | 100         | 62            | P   |
| 5   | 4924.00         | 6.38        | 29.54          | 35.92          | 54.00          | -18.08      | Average  | 100         | 317           | P   |
| 6   | 4924.00         | 6.38        | 41.37          | 47.75          | 74.00          | -26.25      | Peak     | 100         | 317           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH01 6Mbps  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

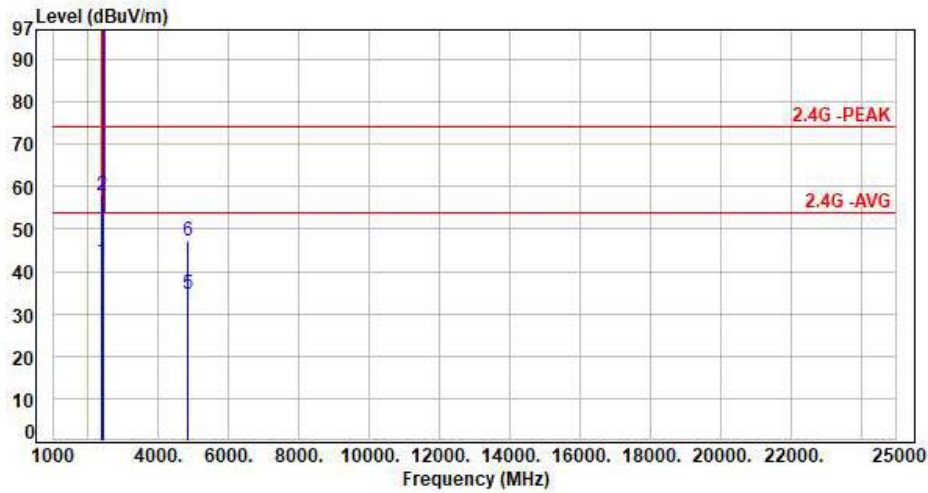


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 44.72          | 42.39          | 54.00          | -11.61      | Average  | 180         | 95            | P   |
| 2   | 2390.00         | -2.33       | 60.38          | 58.05          | 74.00          | -15.95      | Peak     | 180         | 95            | P   |
| 3   | 2412.00         | -2.29       | 105.49         | 103.20         | 200.00         | -96.80      | Average  | 180         | 95            | P   |
| 4   | 2412.00         | -2.29       | 115.51         | 113.22         | 200.00         | -86.78      | Peak     | 180         | 95            | P   |
| 5   | 4824.00         | 6.05        | 28.69          | 34.74          | 54.00          | -19.26      | Average  | 100         | 214           | P   |
| 6   | 4824.00         | 6.05        | 41.33          | 47.38          | 74.00          | -26.62      | Peak     | 100         | 214           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH01 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

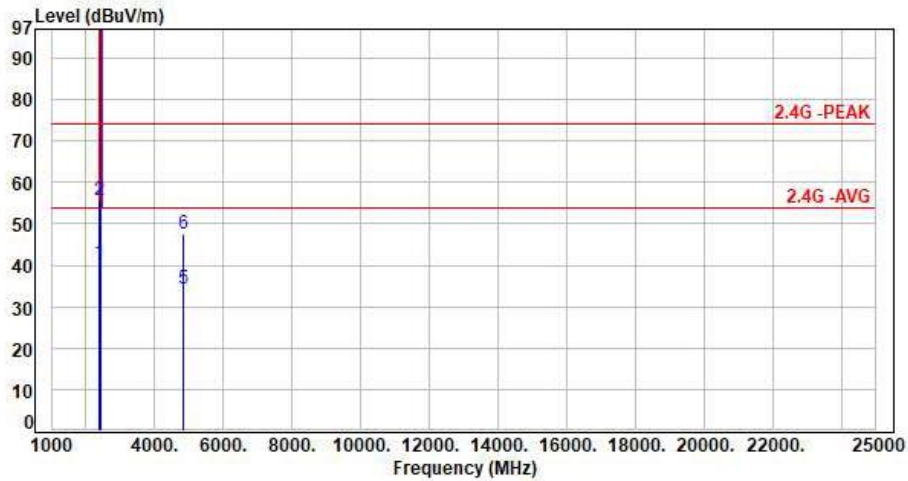


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 42.93          | 40.60          | 54.00          | -13.40      | Average  | 173         | 59            | P   |
| 2   | 2390.00         | -2.33       | 58.14          | 55.81          | 74.00          | -18.19      | Peak     | 173         | 59            | P   |
| 3   | 2412.00         | -2.29       | 100.55         | 98.26          | 200.00         | -101.74     | Average  | 173         | 59            | P   |
| 4   | 2412.00         | -2.29       | 110.63         | 108.34         | 200.00         | -91.66      | Peak     | 173         | 59            | P   |
| 5   | 4824.00         | 6.05        | 28.18          | 34.23          | 54.00          | -19.77      | Average  | 100         | 317           | P   |
| 6   | 4824.00         | 6.05        | 41.36          | 47.41          | 74.00          | -26.59      | Peak     | 100         | 317           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH06 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

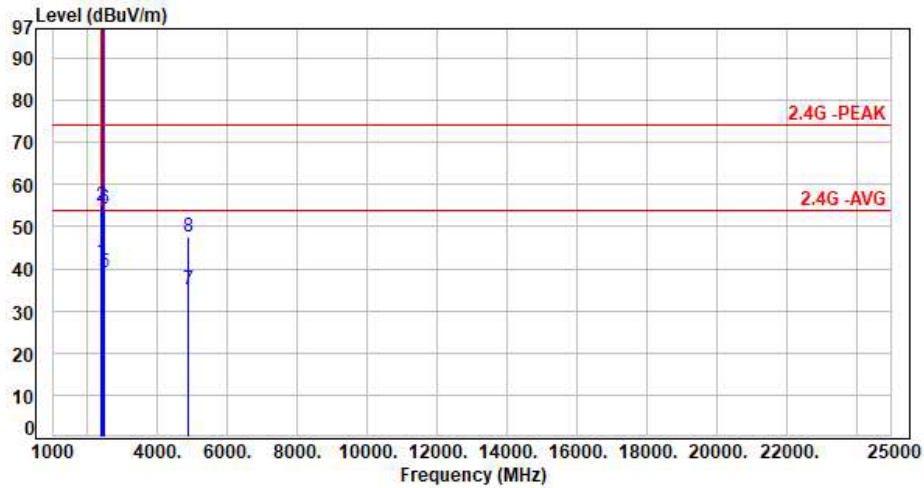


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 44.00          | 41.67          | 54.00          | -12.33      | Average  | 151         | 96            | P   |
| 2   | 2390.00         | -2.33       | 57.37          | 55.04          | 74.00          | -18.96      | Peak     | 151         | 96            | P   |
| 3   | 2437.00         | -2.17       | 105.21         | 103.04         | 200.00         | -96.96      | Average  | 151         | 96            | P   |
| 4   | 2437.00         | -2.17       | 115.37         | 113.20         | 200.00         | -86.80      | Peak     | 151         | 96            | P   |
| 5   | 2483.50         | -2.01       | 41.24          | 39.23          | 54.00          | -14.77      | Average  | 151         | 96            | P   |
| 6   | 2483.50         | -2.01       | 56.32          | 54.31          | 74.00          | -19.69      | Peak     | 151         | 96            | P   |
| 7   | 4874.00         | 6.21        | 28.77          | 34.98          | 54.00          | -19.02      | Average  | 100         | 214           | P   |
| 8   | 4874.00         | 6.21        | 41.27          | 47.48          | 74.00          | -26.52      | Peak     | 100         | 214           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH06 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

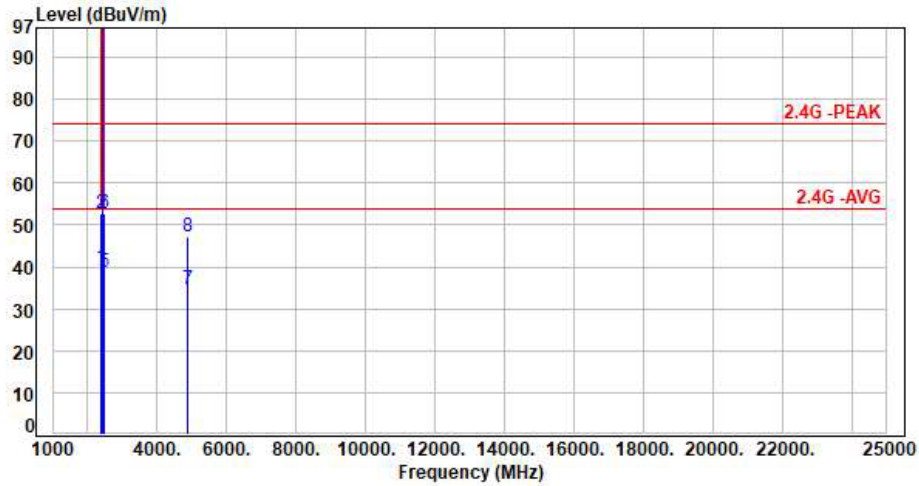


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 42.02          | 39.69          | 54.00          | -14.31      | Average  | 164         | 61            | P   |
| 2   | 2390.00         | -2.33       | 55.19          | 52.86          | 74.00          | -21.14      | Peak     | 164         | 61            | P   |
| 3   | 2437.00         | -2.17       | 100.42         | 98.25          | 200.00         | -101.75     | Average  | 164         | 61            | P   |
| 4   | 2437.00         | -2.17       | 110.92         | 108.75         | 200.00         | -91.25      | Peak     | 164         | 61            | P   |
| 5   | 2483.50         | -2.01       | 40.85          | 38.84          | 54.00          | -15.16      | Average  | 164         | 61            | P   |
| 6   | 2483.50         | -2.01       | 54.85          | 52.84          | 74.00          | -21.16      | Peak     | 164         | 61            | P   |
| 7   | 4874.00         | 6.21        | 28.57          | 34.78          | 54.00          | -19.22      | Average  | 100         | 311           | P   |
| 8   | 4874.00         | 6.21        | 41.02          | 47.23          | 74.00          | -26.77      | Peak     | 100         | 311           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH11 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

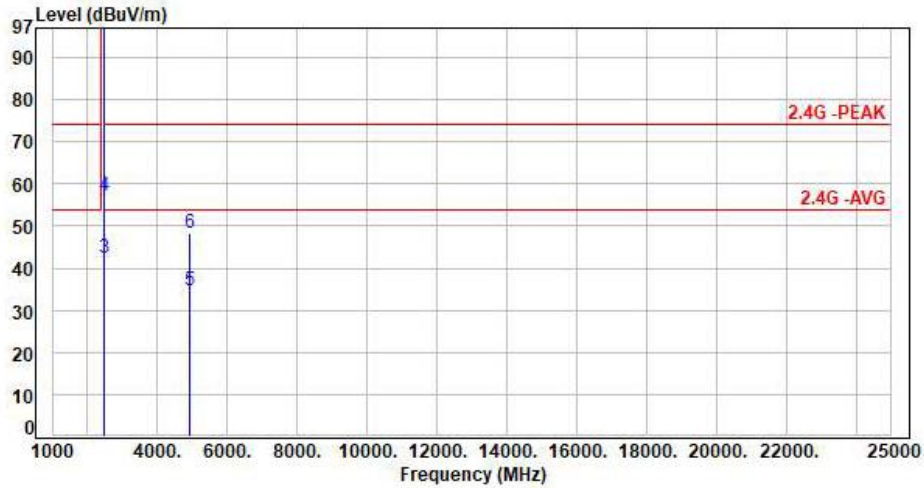


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2462.00         | -2.04       | 105.35         | 103.31         | 200.00         | -96.69      | Average  | 227         | 98            | P   |
| 2   | 2462.00         | -2.04       | 115.22         | 113.18         | 200.00         | -86.82      | Peak     | 227         | 98            | P   |
| 3   | 2483.50         | -2.01       | 44.35          | 42.34          | 54.00          | -11.66      | Average  | 227         | 98            | P   |
| 4   | 2483.50         | -2.01       | 59.02          | 57.01          | 74.00          | -16.99      | Peak     | 227         | 98            | P   |
| 5   | 4924.00         | 6.38        | 28.38          | 34.76          | 54.00          | -19.24      | Average  | 100         | 212           | P   |
| 6   | 4924.00         | 6.38        | 41.87          | 48.25          | 74.00          | -25.75      | Peak     | 100         | 212           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH11 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

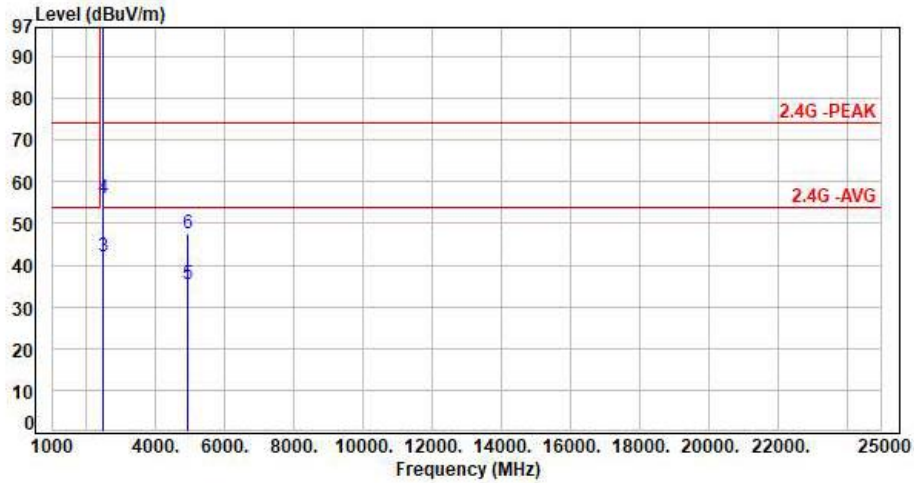


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2462.00         | -2.04       | 101.83         | 99.79          | 200.00         | -100.21     | Average  | 165         | 63            | P   |
| 2   | 2462.00         | -2.04       | 111.51         | 109.47         | 200.00         | -90.53      | Peak     | 165         | 63            | P   |
| 3   | 2483.50         | -2.01       | 43.98          | 41.97          | 54.00          | -12.03      | Average  | 165         | 63            | P   |
| 4   | 2483.50         | -2.01       | 58.08          | 56.07          | 74.00          | -17.93      | Peak     | 165         | 63            | P   |
| 5   | 4924.00         | 6.38        | 28.84          | 35.22          | 54.00          | -18.78      | Average  | 100         | 315           | P   |
| 6   | 4924.00         | 6.38        | 41.22          | 47.60          | 74.00          | -26.40      | Peak     | 100         | 315           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH01 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

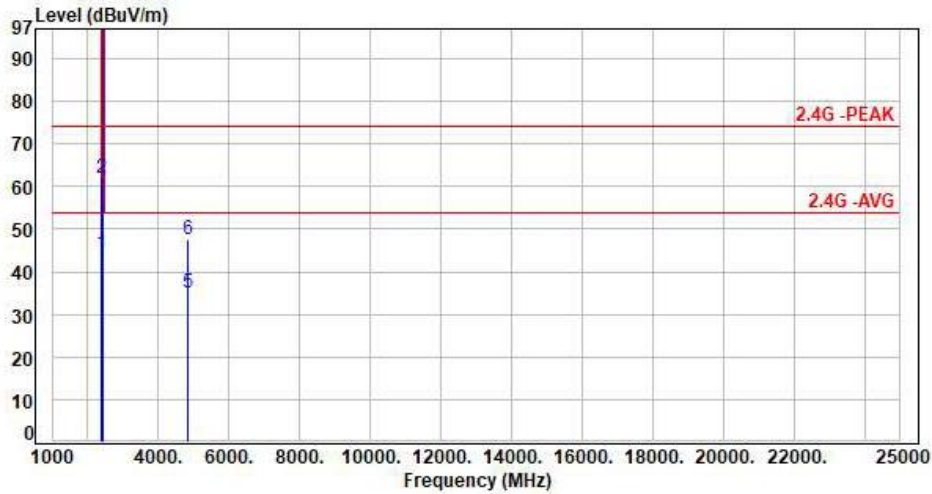


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 46.63          | 44.30          | 54.00          | -9.70       | Average  | 337         | 93            | P   |
| 2   | 2390.00         | -2.33       | 64.34          | 62.01          | 74.00          | -11.99      | Peak     | 337         | 93            | P   |
| 3   | 2412.00         | -2.29       | 104.21         | 101.92         | 200.00         | -98.08      | Average  | 337         | 93            | P   |
| 4   | 2412.00         | -2.29       | 116.64         | 114.35         | 200.00         | -85.65      | Peak     | 337         | 93            | P   |
| 5   | 4824.00         | 6.05        | 29.15          | 35.20          | 54.00          | -18.80      | Average  | 100         | 212           | P   |
| 6   | 4824.00         | 6.05        | 41.54          | 47.59          | 74.00          | -26.41      | Peak     | 100         | 212           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH01 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

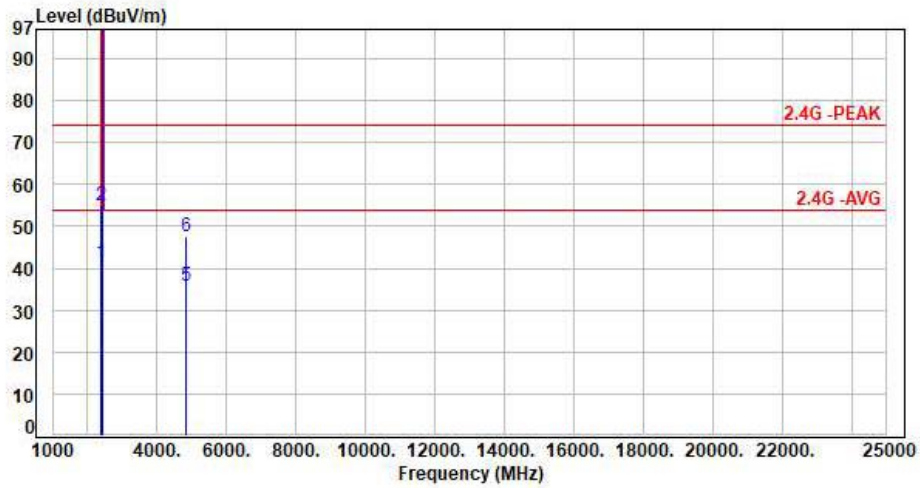

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 2390.00         | -2.33       | 43.59          | 41.26          | 54.00          | -12.74      | Average  | 123         | 23            | P   |
| 2   | 2390.00         | -2.33       | 57.19          | 54.86          | 74.00          | -19.14      | Peak     | 123         | 23            | P   |
| 3   | 2412.00         | -2.29       | 99.78          | 97.49          | 200.00         | -102.51     | Average  | 123         | 23            | P   |
| 4   | 2412.00         | -2.29       | 110.99         | 108.70         | 200.00         | -91.30      | Peak     | 123         | 23            | P   |
| 5   | 4824.00         | 6.05        | 29.60          | 35.65          | 54.00          | -18.35      | Average  | 100         | 310           | P   |
| 6   | 4824.00         | 6.05        | 41.47          | 47.52          | 74.00          | -26.48      | Peak     | 100         | 310           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor