

Date: 2004-01-12
No.: HM112241

TEST REPORT

Page 1 of 19

FCC PART 15 SUBPART C CERTIFICATION REPORT FOR LOW POWER TRANSMITTER

TEST REPORT No.: HM112241

Equipment Under Test [EUT]: Radio Controlled Forklift
Model Number: FK-318
Applicant: Enlsion Industries Co.
FCC ID : KYDFK-318

Date: 2004-01-12

No.: HM112241

TEST REPORT

Page 2 of 19

CONTENT:

| | |
|------------|----------------|
| Cover | Page 1 of 19 |
| Content | Page 2-3 of 19 |
| Conclusion | Page 4 of 19 |

1.0 General Details

| | | |
|-----|---------------------------------|--------------|
| 1.1 | Test Laboratory | Page 5 of 19 |
| 1.2 | Applicant Details | Page 5 of 19 |
| | Applicant | |
| | HKSTC Code Number for Applicant | |
| | Manufacturer | |
| 1.3 | Equipment Under Test [EUT] | Page 6 of 19 |
| | Description of EUT operation | |
| 1.4 | Date of Order | Page 6 of 19 |
| 1.5 | Submitted Sample | Page 6 of 19 |
| 1.6 | Test Duration | Page 6 of 19 |
| 1.7 | Country of Origin | Page 6 of 19 |
| 1.8 | Additional Information of EUT | Page 7 of 19 |

2.0 Technical Details

| | | |
|-----|------------------------------------|--------------|
| 2.1 | Investigations Requested | Page 8 of 19 |
| 2.2 | Test Standards and Results Summary | Page 8 of 19 |

3.0 Test Results

| | | |
|-----|-----------------------|------------------|
| 3.1 | Emission | Page 9-13 of 19 |
| 3.2 | Bandwidth Measurement | Page 14-15 of 19 |

Date: 2004-01-12
No.: HM112241

TEST REPORT

Page 3 of 19

Appendix A

List of Measurement Equipment

Page 16 of 19

Appendix B

Duty Cycle Correction During 100 msec

Page 17-18 of 19

Appendix C

Photographs

Page 19-19 of 19

Date: 2004-01-12
No.: HM112241

TEST REPORT

Page 4 of 19

CONCLUSION

The submitted product was deemed to have COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Verified by
Ivan Toa

K C Lee
for Chief Executive

Date: 2004-01-12

TEST REPORT

Page 5 of 19

No.: HM112241

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

1.2 Applicant Details

Applicant

Enlision Industries Co.
Unit 6, 12/F., Paramount Bldg., 12 Ka Yip St.,
Chai Wan, Hong Kong

HKSTC Code Number for Applicant

ENI005

Manufacturer

Enlision Industries Co.
Unit 6, 12/F., Paramount Bldg., 12 Ka Yip St.,
Chai Wan, Hong Kong

Date: 2004-01-12

TEST REPORT

Page 6 of 19

No.: HM112241

1.3 Equipment Under Test [EUT]

Description of Sample

Product: Radio Controlled Forklift
Manufacturer: Enlsion Industries Co.
Brand Name: N/A
Model Number: FK-318
Input Voltage: 9Vd.c ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is an Enlsion Industries Co., Ltd., Radio Controlled Forklift. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, Modulation by IC. and tape is pulses modulation.

1.4 Date of Order

2003-11-28

1.5 Submitted Sample(s):

1 Sample per model

1.6 Test Duration

2003-12-22

1.7 Country of Origin

China

Date: 2004-01-12

TEST REPORT

Page 7 of 19

No.: HM112241

1.8 Additional Information of EUT

| | Submitted | Not Available |
|------------------------------------|-------------------------------------|--------------------------|
| User Manual | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Part List | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Circuit Diagram | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Printed Circuit Board [PCB] Layout | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Block diagram | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC ID Label | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

Date: 2004-01-12

TEST REPORT

Page 8 of 19

No.: HM112241

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2000 for FCC Certification.

2.2 Test Standards and Results Summary Tables

| EMISSION Results Summary | | | | | | |
|--|------------------|-----------------|---------------------|-------------------------------------|--------------------------|-------------------------------------|
| Test Condition | Test Requirement | Test Method | Class / Severity | Test Result | | |
| | | | | Pass | Failed | N/A |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.235 | ANSI C63.4:2000 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.209 | ANSI C63.4:2000 | Class B | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Conducted Emissions on AC, 0.15MHz to 30MHz | FCC 47CFR 15.207 | ANSI C63.4:2000 | Class B | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Note: N/A - Not Applicable


3.0 Test Results**3.1 Emission****3.1.1 Radiated Emissions (30 – 1000MHz)**

| | |
|--------------------|--------------------------|
| Test Requirement: | FCC 47CFR 15.109 Class A |
| Test Method: | ANSI C63.4: 2000 |
| Test Date: | 2003-12-22 |
| Mode of Operation: | On mode |

Test Method:

The sample was placed 0.8m above the ground plane on the OATS *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

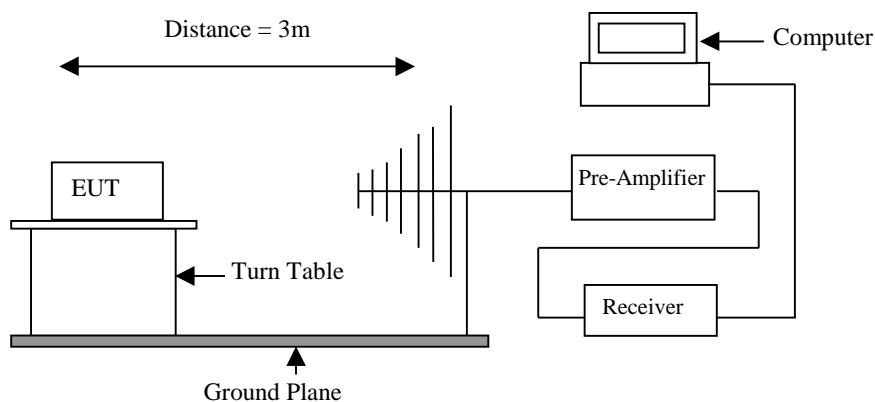Test Setup:

Date: 2004-01-12

TEST REPORT

Page 10 of 19

No.: HM112241

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

| Frequency Range of Fundamental [MHz] | Field Strength of Fundamental Emission [Peak] [μ V/m] | Field Strength of Fundamental Emission [Average] [μ V/m] |
|---|--|---|
| 49.82-49.90 | 100,000 | 10,000 |

Results:

| Field Strength of Fundamental Emissions Peak Value | | | | | | |
|---|---------------------------------------|--------------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| 49.86 | 49.1 | 10.2 | 59.3 | 922.6 | 100,000 | Vertical |

| Field Strength of Fundamental Emissions Average | | | | | | |
|--|---------------------------------------|--------------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| *49.86 | 43.3 | 10.2 | 53.5 | 473.2 | 10,000 | Vertical |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

*: Adjusted by Duty Cycle = -5.8dB

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ± 5.7 dB

Date: 2004-01-12

TEST REPORT

Page 11 of 19

No.: HM112241

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

| Frequency Range [MHz] | Quasi-Peak Limits [μ V/m] |
|--------------------------|-----------------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

| Radiated Emissions Quasi-Peak | | | | | | |
|----------------------------------|---------------------------------------|--------------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| 99.72 | < 1.0 | 10.8 | < 11.8 | < 3.9 | 150 | Vertical |
| 149.58 | < 1.0 | 9.8 | < 10.8 | < 3.5 | 150 | Vertical |
| 199.44 | < 1.0 | 11.5 | < 12.5 | < 4.2 | 150 | Vertical |
| 249.30 | < 1.0 | 15.9 | < 16.9 | < 7.0 | 200 | Vertical |
| 299.16 | < 1.0 | 17.4 | < 18.4 | < 8.3 | 200 | Vertical |
| 349.02 | < 1.0 | 17.2 | < 18.2 | < 8.1 | 200 | Vertical |
| 398.88 | < 1.0 | 18.8 | < 19.8 | < 9.8 | 200 | Vertical |
| 448.74 | < 1.0 | 19.7 | < 20.7 | < 10.8 | 200 | Vertical |
| 498.60 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 200 | Vertical |

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ± 5.7 dB

Date: 2004-01-12
No.: HM112241

TEST REPORT

Page 12 of 19

3.1.2 Conducted Emissions (0.15MHz to 30MHz)

| | |
|--------------------|------------------|
| Test Requirement: | FCC 47CFR 15.107 |
| Test Method: | ANSI C63.4:2000 |
| Test Date: | 2003-12-22 |
| Mode of Operation: | N/A |

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

Date: 2004-01-12

TEST REPORT

Page 13 of 19

No.: HM112241

3.2 20B Bandwidth of Fundamental Emission

Test Requirement:

FCC 47 CFR 15.235

Test Method:

ANSI C63.4: 2000 (Section 13.1.7)

Test Date:

2003-12-22

Mode of Operation:

On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Date: 2004-01-12

TEST REPORT


Page 14 of 19

No.: HM112241

Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range [MHz] | 20dB Bandwidth [KHz] | FCC Limits [MHz] |
|--------------------------|-------------------------|---------------------|
| 49.86 | 48.3 | within 49.82-49.90 |

20B Bandwidth of Fundamental Emission

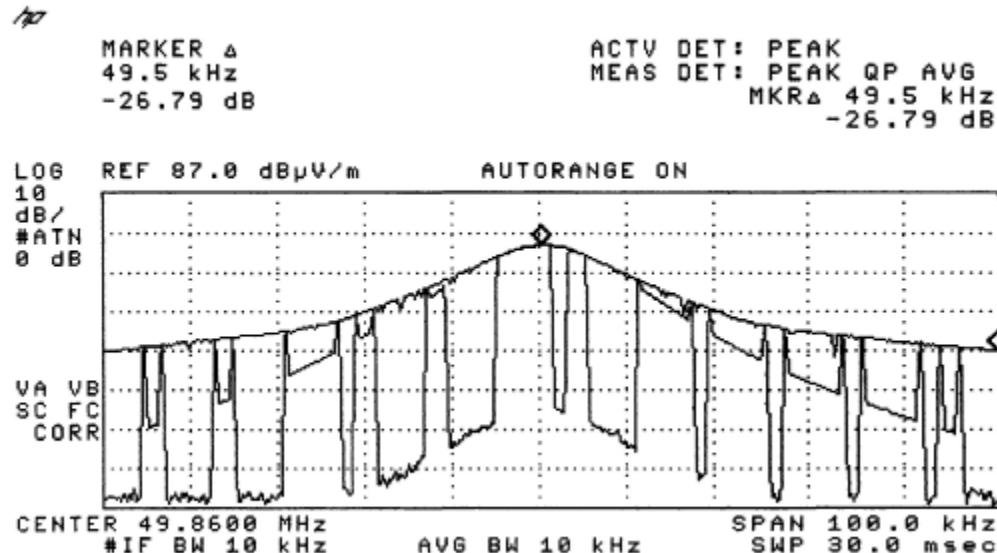

Date: 2004-01-12

TEST REPORT

Page 15 of 19

No.: HM112241

Appendix A

Test Equipment Audit

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|--|---|--------------------------------|--|----------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 14/03/03 |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | 14/03/03 |
| EM009 | QUASI PEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 14/03/03 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 14/03/03 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 14/03/03 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 14/03/03 |
| EM013 | CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE | HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD | HP9000 HP A1097C HP9133L | 6226A60314 3151J39517 2623A02468 | CM |
| EM020 | HORN ANTENNA | EMCO | 3115 | 4032 | 19/07/00 |
| EM022 | LOOP ANTENNA | EMCO | 6502 | 1189-2424 | 04/08/00 |
| EM072 | SIGNAL GENERATOR | HEWLETT PACKARD | 8640B | 1948A11892 | N/A |
| EM083 | HKSTC OPEN AREA TEST SITE | HKSTC | N/A | N/A | 08/11/02 |
| EM131 | PORTABLE SPECTRUM ANALYSER | HEWLETT PACKARD | 8595EM | 3710A00155 | 18/12/01 |
| EM145 | EMI TEST RECEIVER | R & S | ESCS 30 | 830245/021 | 02/08/03 |
| EM194 | BICONILOG ANTENNA | EMCO | 3142B | 1795 | 14/05/02 |
| EM195 | ANTENNA POSITIONING MAST | EMCO | 2075 | 2368 | N/A |
| EM196 | MULTI-DEVICE CONTROLLER | EMCO | 2090 | 1662 | N/A |

Conducted Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|-------------------------------------|----------------------------------|------------|---------------------|----------|
| EM078 | VARIAC | SHANGHAI VOLTAGE | TDGC-3/0.5 | N/A | CM |
| EM081 | SMALL SCREENED ROOM | MIKO INST HK | N/A | N/A | 18/10/02 |
| EM119 | LISN | R & S | ESH3-Z5 | 0831.5518.5 2 | 01/10/02 |
| EM127 | ISOLATION TRANSFORMER 220 TO 300 | WING SUN | N/A | N/A | CM |
| EM142 | PULES LIMITER | R & S | ESH3Z2 | 357.8810.52 | 03/07/02 |
| EM181 | EMI TEST RECEIVER | R & S | ESIB7 | 100072 | 28/11/01 |
| EM154 | SHIELDING ROOM | SIEMENA MATSUSHITA COMPONENTS | N/A | 803-740-057- 99A | 18/10/02 |
| EM197 | LISN | EMCO | 4825/2 | 1193 | 08/04/03 |

Remarks:

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

Appendix B**Duty Cycle Correction During 100msec**


Each function key sends a different series of characters, but each packet period (39.0msec) never exceeds a series of 8 long (1.875msec) and 8 short (625 μ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $8 \times 1.875\text{msec} + 8 \times 625\mu\text{sec}$ per 39msec=51.2% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = $20\log(0.512) = -5.8\text{dB}$

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

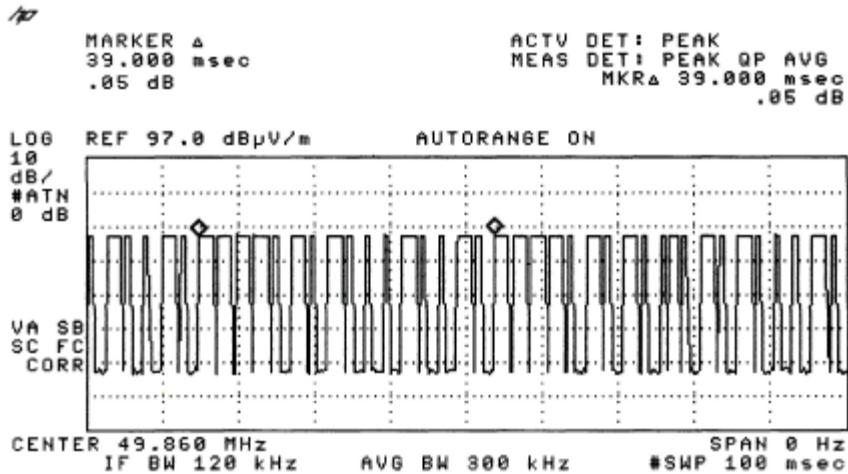

Date: 2004-01-12

TEST REPORT

Page 17 of 19

No.: HM112241

Figure B [Long Pulse]


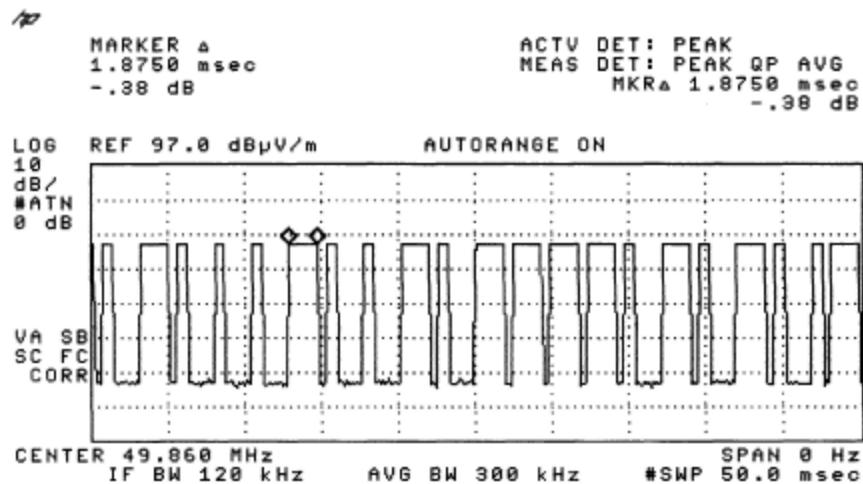


Figure C [Short Pulse]

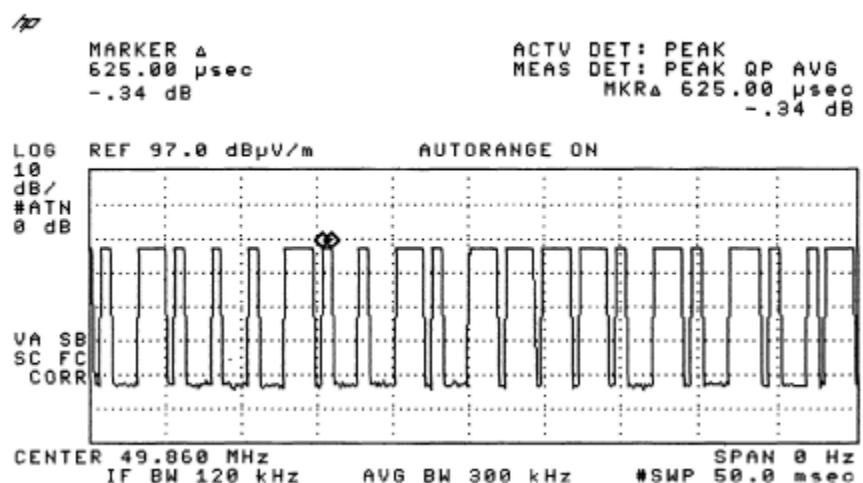

Date: 2004-01-12
No.: HM112241

TEST REPORT

Page 18 of 19

Appendix C

Photographs of EUT


Front View of the product



Rear View of the product



Inner Circuit Top View

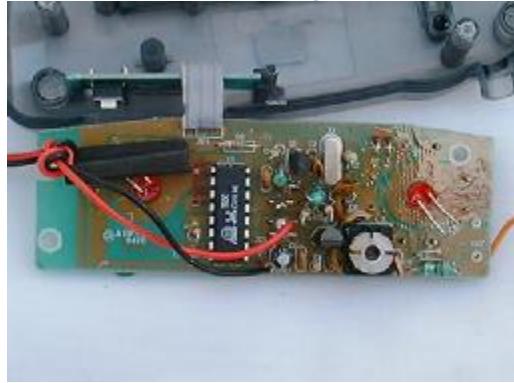

Inner Circuit Bottom View



Date: 2004-01-12
No.: HM112241

TEST REPORT

Page 19 of 19

Photographs of EUT

Measurement of Radiated Emission Test Set Up



End of Document