

FCC TEST REPORT (WLAN)

REPORT NO.: RF991006E03 R1

MODEL NO.: REN301Z-xx, TEI301Z-xx, TES301Z-xx

FCC ID: LDK-TEI301Z

RECEIVED: Oct. 06, 2010

TESTED: Oct. 09 to 26, 2010

ISSUED: Feb. 08, 2011

APPLICANT: Cisco Systems Inc.

ADDRESS: 170 West Tasman Drive, San Jose, CA
95134-1706, USA.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 81 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

RELEASE CONTROL RECORD.....	5
1. CERTIFICATION.....	6
2. SUMMARY OF TEST RESULTS.....	7
2.1 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	15
3.4 DESCRIPTION OF SUPPORT UNITS.....	16
3.5 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS.....	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2 TEST INSTRUMENTS	18
4.1.3 TEST PROCEDURES.....	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS.....	20
4.1.7 TEST RESULTS (MODE 1).....	21
4.1.8 TEST RESULTS (MODE 2).....	23
4.2 RADIATED EMISSION MEASUREMENT	25
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2 TEST INSTRUMENTS	26
4.2.3 TEST PROCEDURES.....	27
4.2.4 DEVIATION FROM TEST STANDARD	27
4.2.5 TEST SETUP	28
4.2.6 EUT OPERATING CONDITIONS.....	28

4.2.7	TEST RESULTS.....	29
4.3	6DB BANDWIDTH MEASUREMENT	58
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	58
4.3.2	TEST INSTRUMENTS	58
4.3.3	TEST PROCEDURE	58
4.3.4	DEVIATION FROM TEST STANDARD	58
4.3.5	TEST SETUP	58
4.3.6	EUT OPERATING CONDITIONS.....	58
4.3.7	TEST RESULTS.....	59
4.4	MAXIMUM PEAK OUTPUT POWER	63
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	63
4.4.2	INSTRUMENTS	63
4.4.3	TEST PROCEDURES.....	63
4.4.4	DEVIATION FROM TEST STANDARD	63
4.4.5	TEST SETUP	63
4.4.6	EUT OPERATING CONDITIONS.....	63
4.4.7	TEST RESULTS.....	64
4.5	POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.2	TEST INSTRUMENTS	66
4.5.3	TEST PROCEDURE	66
4.5.4	DEVIATION FROM TEST STANDARD	66
4.5.5	TEST SETUP	66
4.5.6	EUT OPERATING CONDITION	66
4.5.7	TEST RESULTS.....	67
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	71
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	71
4.6.2	TEST INSTRUMENTS	71
4.6.3	TEST PROCEDURE	71



A D T

4.6.4	DEVIATION FROM TEST STANDARD	71
4.6.5	EUT OPERATING CONDITION	71
4.6.6	TEST RESULTS.....	71
5.	INFORMATION ON THE TESTING LABORATORIES	80
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	81

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Jan. 19, 2011
RF991006E03 R1	Modified the product name of the EUT	Feb. 08, 2011

1. CERTIFICATION

PRODUCT: IP Managed Services Home Gateway
BRAND NAME: Cisco
MODEL NO.: REN301Z-xx, TEI301Z-xx, TES301Z-xx
TEST SAMPLE: MASS-PRODUCTION
TESTED: Oct. 09 to 26, 2010
APPLICANT: Cisco Systems Inc.
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: TEI301Z-NA) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Sunny Wen, **DATE:** Feb. 08, 2011
(Sunny Wen, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung, **DATE:** Feb. 08, 2011
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen, **DATE:** Feb. 08, 2011
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.50dB at 0.181MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 2390.0MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.30 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IP Managed Services Home Gateway
MODEL NO.	REN301Z-xx, TEI301Z-xx, TES301Z-xx
FCC ID	LDK-TEI301Z
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps 802.11n (20MHz, 800ns GI): 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps 802.11n (40MHz, 800ns GI): 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps 802.11n (20MHz, 400ns GI): 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps 802.11n (40MHz, 400ns GI): 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 151.4mW 802.11g: 338.8mW 802.11n (20MHz): 625.3mW 802.11n (40MHz): 296.5mW
ANTENNA TYPE	Please see note 3
DATA CABLE	NA
I/O PORTS	For Model No.: REN301Z-xx USB port x 2 Ethernet (10/100/1000Mbps) port x 4 Internet (10/100/1000Mbps) port x 1
	For Model No.: TEI301Z-xx, TES301Z-xx USB port x 2 Ethernet (10/100/1000Mbps) port x 4 Internet (10/100/1000Mbps) port x 1 PHONE port x 2
ASSOCIATED DEVICES	Adapter

NOTE:

1. There are ZigBee technology and WLAN technology used for the EUT. <the ZigBee test data please refer "RF991006E03-1">
2. The EUT has below model names, which are identical to each other in all aspects except for the following table:

Model No.	Basic Function	Add Function-1	Add Function-2	Add Function-3
		FXS x 2ch	SIM controller	Internal ZigBee
REN301Z-XX	Yes	-	-	Yes
TEI301Z-XX	Yes	Yes	Yes	Yes
TES301Z-XX	Yes	Yes	-	Yes

Note : The "xx" of Model Names could be 0~9, A~Z, a~z or blank

From the above models, model: **TEI301Z-NA** was selected as model for the test and its data was recorded in this report.

3. There are two antennas provided to this EUT, please refer to the following table:

Chain	Antenna Type	Antenna Connector	Antenna Gain (dBi)	Cable Loss (dB)	Net Gain (dBi)	Cable Length (cm)
Chain (0) Antenna (1)	PIFA	I-PEX	3	1	2	26
Chain (1) Antenna (2)	PIFA	I-PEX	3	1	2	21

4. The EUT could be supplied with a power adapter and following two different model names could be chosen:

Adapter 1	
Brand:	DELTA
Model No.:	EADP-30RB A
Input power :	100-240V, 50/60Hz, 1A AC input cable (unshielded, 0.3m)
Output power :	12V, 2.5A DC output cable (unshielded, 1.5m)
Adapter 2	
Brand:	PHIHONG
Model No.:	PSA24A-120
Input power :	100-240V, 50/60Hz, 0.6A
Output power :	12V, 2.0A DC output cable (unshielded, 1.5m)

5. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Level-set (Put on tabletop) with adapter 1
Mode B	Tower-set (Wall-mounted) with adapter 1
Mode C	Level-set (Put on tabletop) with adapter 2

For worst radiated test mode was found in **Mode C**. Therefore only the test data of the modes were recorded in this report.

6. The EUT incorporates a MIMO function with 802.11n.

7. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function. The 11b/g legacy mode is limited to single transmitter only.

8. The EUT complies with 802.11n standards and backwards compatible with 802.11b, 802.11g products.

9. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
MODE 1	√	-	-	-	With adapter 1
MODE 2	√	√	√	√	With adapter 2

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11 b	√	-
B	802.11 g	√	-
C	802.11n (20MHz) for MCS 0~7	√	-
D	802.11n (40MHz) for MCS 0~7	√	-
E	802.11n (20MHz) for MCS 0~15	√	√
F	802.11n (40MHz) for MCS 0~15	√	√

Note:

1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. Mode A, B, E & F the worst modes were selected as representative mode for the report.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
WORSE CHANNEL	-	-	-	-	-	-

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5	E

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	E
802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	F

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 11	OFDM	BPSK	6	B
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	E
802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5	F

✂ After verification, conducted out band emission as show worst chain in report by investigations.

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ The EUT have MIMO power save mode, one transmitter may be active (chain 0) while other is inactive (chain 1). Output power is no different compared to operation when both transmitter chains are active. Transmitter power is not increased or decreased for chain 0 when in single chain mode, compared to dual chain active mode.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	E
802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	F

※ After verification, bandwidth as show worst chain in report by investigations.

※ **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	25deg. C, 73%RH, 1013 hPa	120Vac, 60Hz	Rex Huang
RE<1G	21deg. C, 70%RH, 1013 hPa	120Vac, 60Hz	Eric Lee
PLC	28deg. C, 76%RH, 1013 hPa	120Vac, 60Hz	Timmy Hu
APCM	25deg. C, 70%RH, 1013 hPa	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	TELEPHONE	WONDER	WD-303	6C17FA00515	NA
5	TELEPHONE	WONDER	WD-303	6C17FA00774	NA
6	iPod	Apple	A1137	6U6078FMUPR	FCC DoC
7	iPod	Apple	A1137	5K7170JBUPR	FCC DoC

No.	Signal cable description
1	10 m UTP cable.
2	10 m UTP cable.
3	10 m UTP cable.
4	2.0 m wrapped unshielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
5	2.0 m wrapped unshielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
6	1.0 m shielded cable, terminated with USB connector, w/o core.
7	1.0 m shielded cable, terminated with USB connector, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

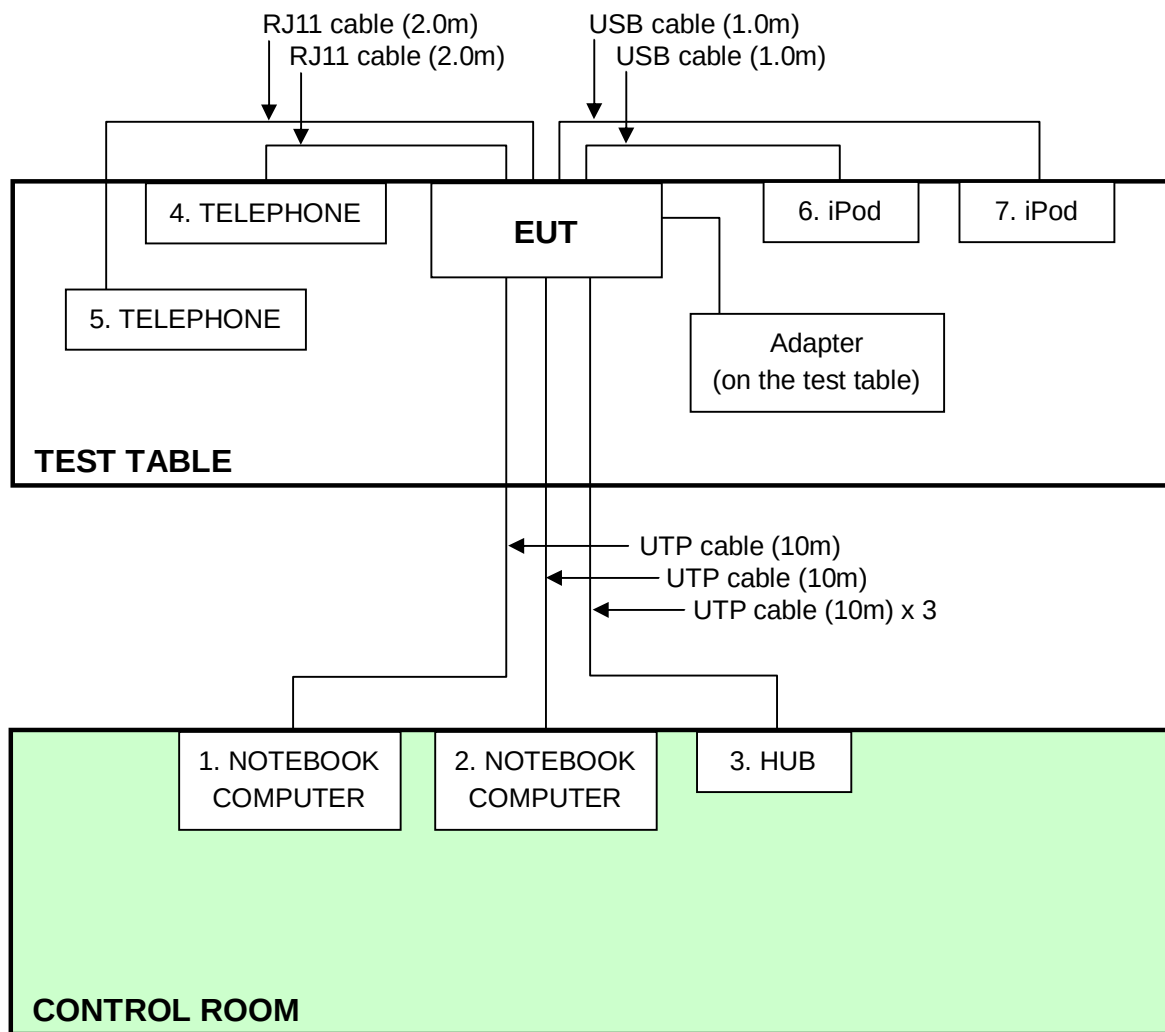

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5	Quasi-peak	Average
0.5-5	66 to 56	56 to 46
5-30	56	46
	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Tested Date: Oct. 14

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2010	Mar. 08, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-522	Sep. 08, 2010	Sep. 07, 2011
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Oct. 26, 2009	Oct. 25, 2010
RF Cable (JYEBAO)	5DFB	COBCAB-001	Nov. 24, 2009	Nov. 23, 2010
50 ohms Terminator	50	3	Oct. 28, 2009	Oct. 27, 2010
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

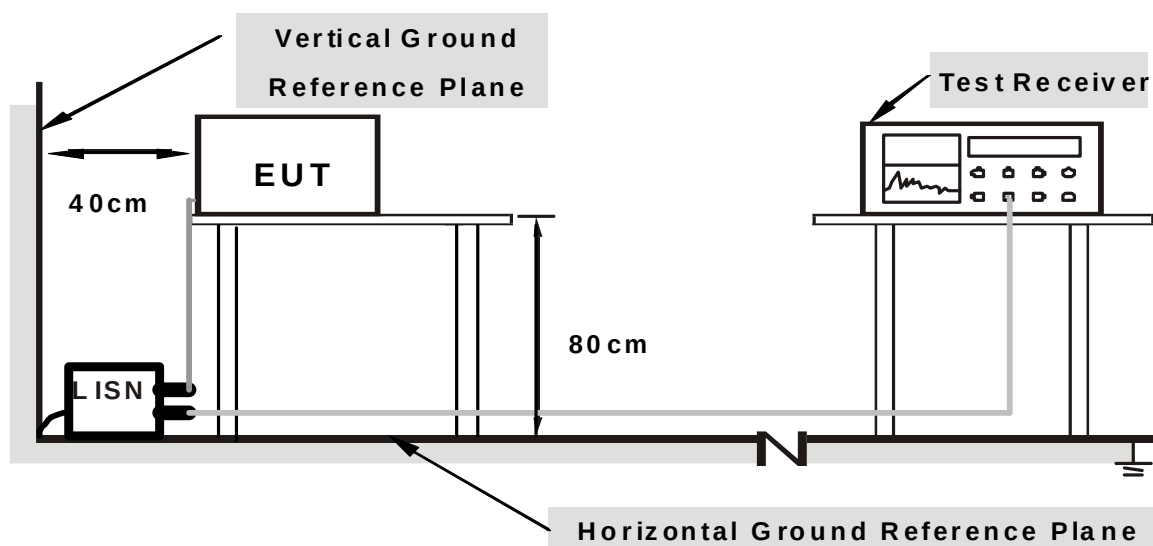

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 2) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “Broadcom wl command” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cables.

4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	9.72	33.15	-	42.87	-	65.58	55.58	-22.71	-
2	0.412	9.75	25.31	-	35.06	-	57.61	47.61	-22.55	-
3	0.463	9.75	26.19	-	35.94	-	56.65	46.65	-20.71	-
4	1.973	9.77	20.56	-	30.33	-	56.00	46.00	-25.67	-
5	6.016	9.86	24.19	-	34.05	-	60.00	50.00	-25.95	-
6	7.313	9.89	23.37	-	33.26	-	60.00	50.00	-26.74	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

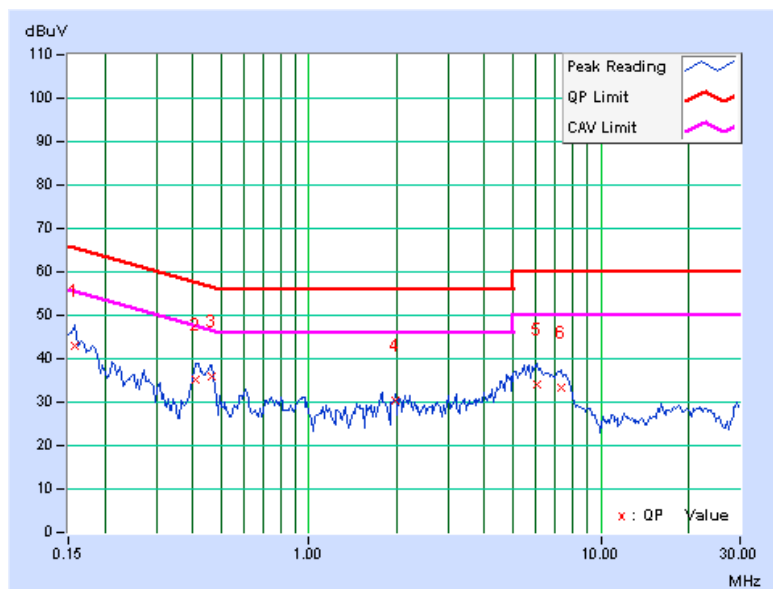

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	9.72	33.49	-	43.21	-	65.58	55.58	-22.37	-
2	0.181	9.73	28.61	-	38.34	-	64.43	54.43	-26.09	-
3	0.423	9.75	24.66	-	34.41	-	57.38	47.38	-22.97	-
4	0.463	9.75	25.34	-	35.09	-	56.65	46.65	-21.56	-
5	1.973	9.77	19.49	-	29.26	-	56.00	46.00	-26.74	-
6	5.680	9.86	24.79	-	34.65	-	60.00	50.00	-25.35	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

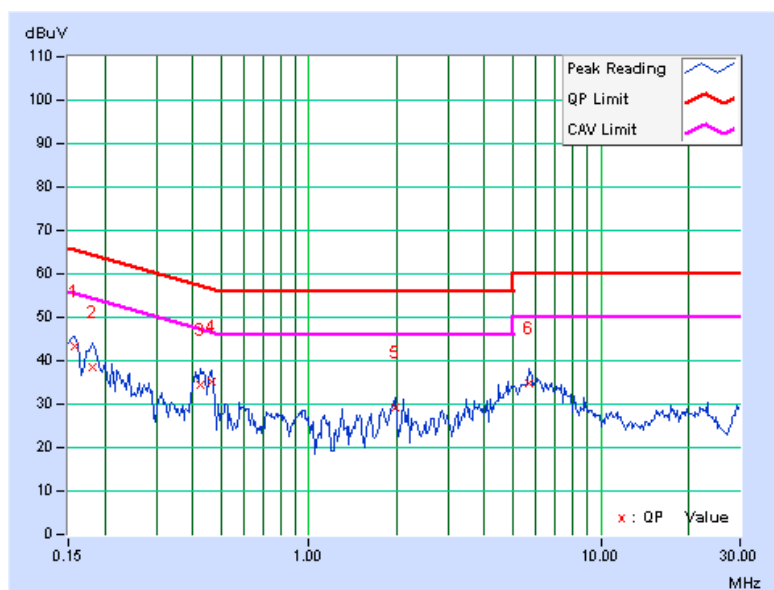


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	9.73	43.20	-	52.93	-	64.43	54.43	-11.50	-
2	0.248	9.74	33.81	-	43.55	-	61.84	51.84	-18.28	-
3	0.302	9.75	34.08	-	43.83	-	60.18	50.18	-16.35	-
4	0.517	9.75	24.16	-	33.91	-	56.00	46.00	-22.09	-
5	2.715	9.78	23.15	-	32.93	-	56.00	46.00	-23.07	-
6	3.508	9.79	23.24	-	33.03	-	56.00	46.00	-22.97	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

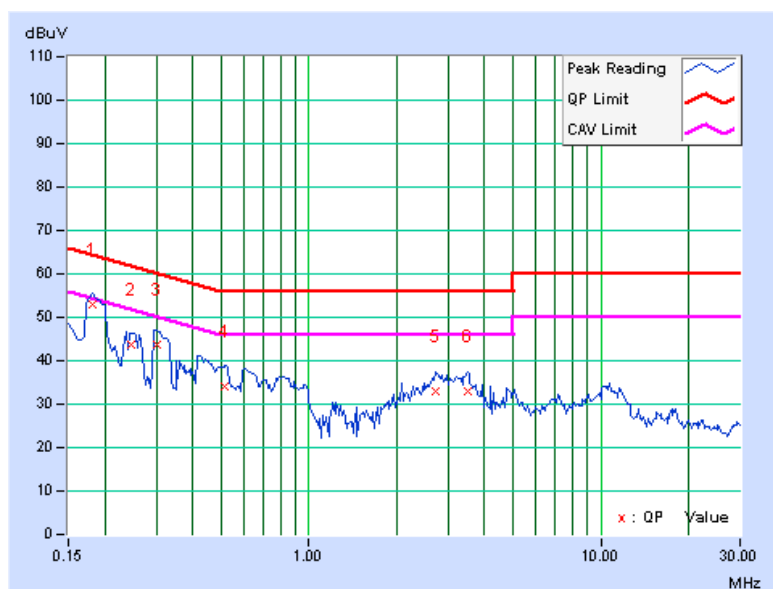

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	9.73	43.17	-	52.90	-	64.43	54.43	-11.53	-
2	0.248	9.74	33.63	-	43.37	-	61.84	51.84	-18.46	-
3	0.310	9.75	31.26	-	41.01	-	59.97	49.97	-18.96	-
4	0.912	9.76	21.41	-	31.17	-	56.00	46.00	-24.83	-
5	3.199	9.79	23.64	-	33.43	-	56.00	46.00	-22.57	-
6	4.156	9.81	22.77	-	32.58	-	56.00	46.00	-23.42	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

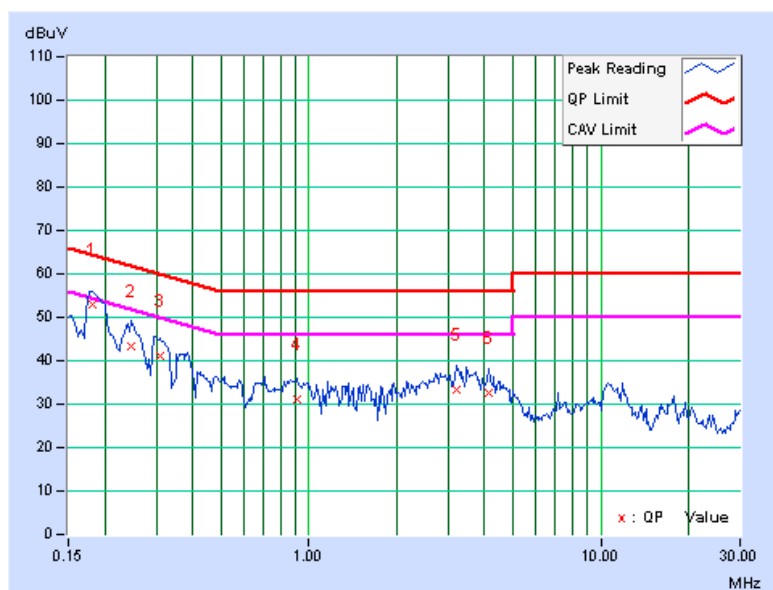

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 14, 2010	July 13, 2011
Agilent Pre-Selector	N9039A	MY46520311	July 14, 2010	July 13, 2011
Agilent Signal Generator	N5181A	MY49060517	July 14, 2010	July 13, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02578	July 05, 2010	July 04, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 29, 2010	Apr. 28, 2011
AISI Horn_Antenna	AIH.8018	000032009111 0	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

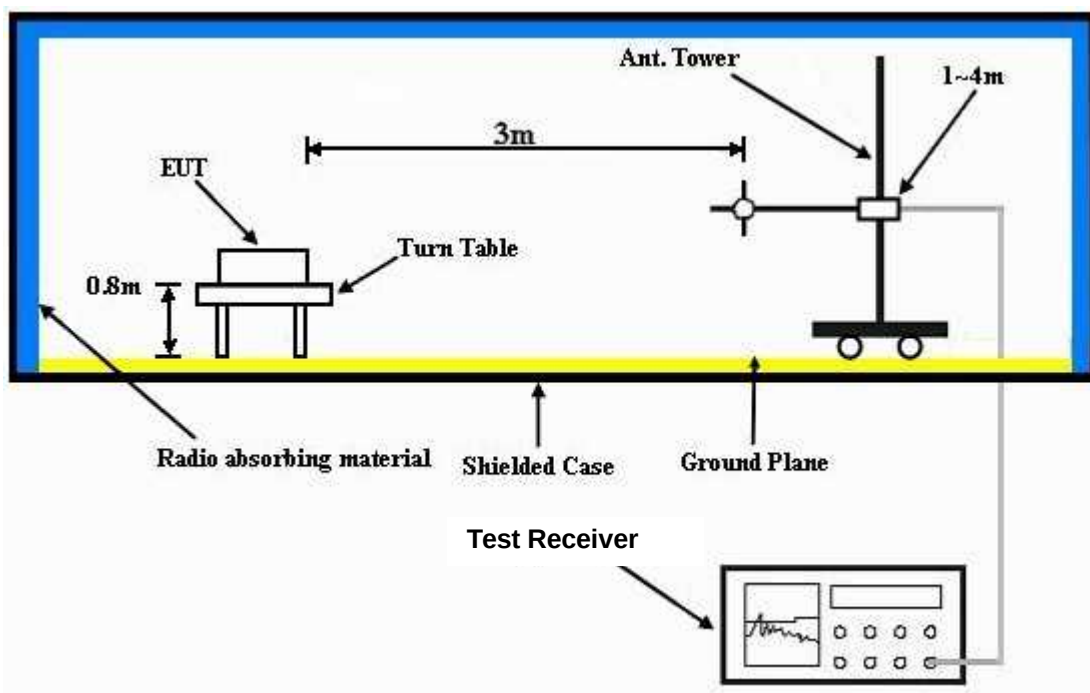

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 71%RH 1013 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	120.00	32.90 QP	43.50	-10.60	2.00 H	130	20.44	12.46
2	198.87	37.16 QP	43.50	-6.34	1.00 H	103	26.51	10.65
3	250.03	36.69 QP	46.00	-9.31	1.00 H	87	23.50	13.19
4	374.97	36.51 QP	46.00	-9.49	1.00 H	138	19.70	16.81
5	750.01	35.11 QP	46.00	-10.89	1.00 H	360	11.27	23.84
6	875.06	39.58 QP	46.00	-6.42	1.00 H	343	13.77	25.81
7	937.47	40.31 QP	46.00	-5.69	2.00 H	167	13.77	26.54
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.14	36.46 QP	40.00	-3.54	1.00 V	146	22.34	14.12
2	52.15	37.01 QP	40.00	-2.99	1.00 V	307	23.26	13.75
3	124.97	31.89 QP	43.50	-11.61	1.00 V	61	19.10	12.79
4	374.97	38.41 QP	46.00	-7.59	1.50 V	0	21.60	16.81
5	421.86	33.87 QP	46.00	-12.13	1.50 V	192	16.02	17.85
6	468.76	35.08 QP	46.00	-10.92	1.00 V	204	16.12	18.96
7	500.02	37.94 QP	46.00	-8.06	1.00 V	12	18.23	19.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.5 PK	74.0	-14.5	1.01 H	246	27.84	31.66
2	2390.00	50.9 AV	54.0	-3.1	1.01 H	246	19.24	31.66
3	*2412.00	111.3 PK			1.00 H	244	79.57	31.73
4	*2412.00	109.0 AV			1.00 H	244	77.27	31.73
5	4824.00	45.8 PK	74.0	-28.2	1.55 H	72	6.83	38.97
6	4824.00	36.4 AV	54.0	-17.6	1.55 H	72	-2.57	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.03 V	206	25.44	31.66
2	2390.00	44.5 AV	54.0	-9.5	1.03 V	206	12.84	31.66
3	*2412.00	100.8 PK			1.72 V	205	69.07	31.73
4	*2412.00	98.2 AV			1.72 V	205	66.47	31.73
5	4824.00	46.2 PK	74.0	-27.8	1.18 V	255	7.23	38.97
6	4824.00	38.0 AV	54.0	-16.0	1.18 V	255	-0.97	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.4 PK			1.01 H	250	79.59	31.81
2	*2437.00	109.3 AV			1.01 H	250	77.49	31.81
3	4874.00	46.1 PK	74.0	-27.9	1.49 H	96	6.96	39.14
4	4874.00	37.2 AV	54.0	-16.8	1.49 H	96	-1.94	39.14
5	7311.00	52.8 PK	74.0	-21.2	1.50 H	91	6.17	46.63
6	7311.00	42.9 AV	54.0	-11.1	1.50 H	91	-3.73	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.8 PK			1.68 V	207	68.99	31.81
2	*2437.00	98.4 AV			1.68 V	207	66.59	31.81
3	4874.00	46.9 PK	74.0	-27.1	1.68 V	207	7.76	39.14
4	4874.00	38.4 AV	54.0	-15.6	1.68 V	207	-0.74	39.14
5	7311.00	53.2 PK	74.0	-20.8	1.34 V	82	6.57	46.63
6	7311.00	43.6 AV	54.0	-10.4	1.34 V	82	-3.03	46.63

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.5 PK			1.01 H	244	78.61	31.89
2	*2462.00	108.1 AV			1.01 H	244	76.21	31.89
3	2493.90	64.7 PK	74.0	-9.3	1.00 H	242	32.70	32.00
4	2493.90	49.7 AV	54.0	-4.3	1.00 H	242	17.70	32.00
5	4924.00	46.4 PK	74.0	-27.6	1.51 H	88	7.09	39.31
6	4924.00	37.8 AV	54.0	-16.2	1.51 H	88	-1.51	39.31
7	7386.00	51.9 PK	74.0	-22.1	1.44 H	100	5.30	46.60
8	7386.00	42.4 AV	54.0	-11.6	1.44 H	100	-4.20	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.7 PK			1.65 V	209	69.81	31.89
2	*2462.00	99.4 AV			1.65 V	209	67.51	31.89
3	2483.50	56.7 PK	74.0	-17.3	1.65 V	209	24.73	31.97
4	2483.50	44.8 AV	54.0	-9.2	1.65 V	209	12.83	31.97
5	4924.00	47.2 PK	74.0	-26.8	1.17 V	286	7.89	39.31
6	4924.00	39.1 AV	54.0	-14.9	1.17 V	286	-0.21	39.31
7	7386.00	53.5 PK	74.0	-20.5	1.36 V	91	6.90	46.60
8	7386.00	42.9 AV	54.0	-11.1	1.36 V	91	-3.70	46.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

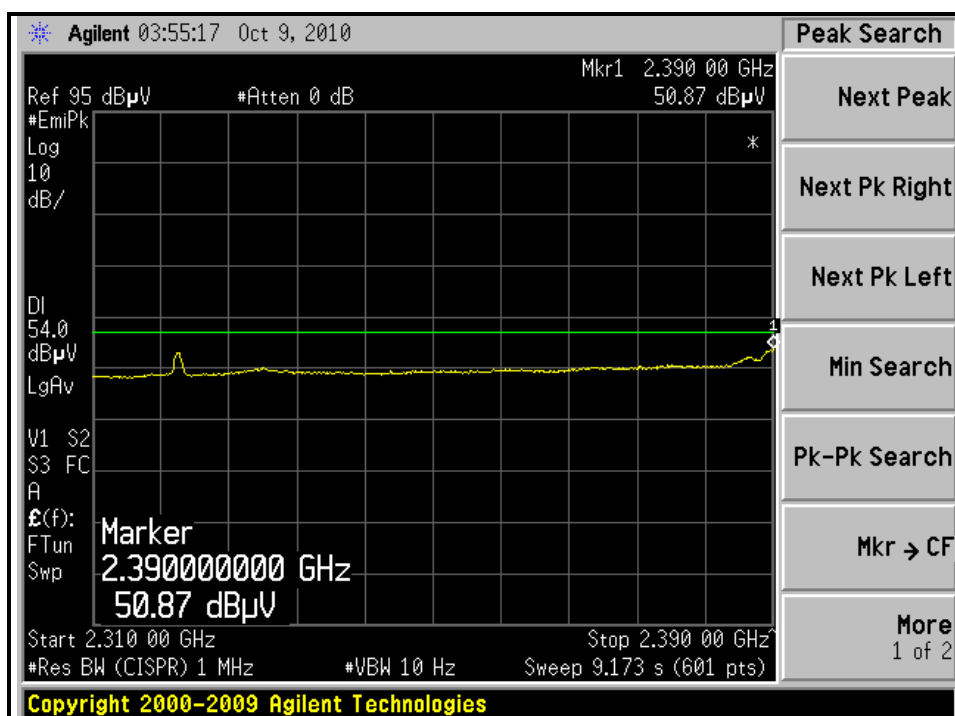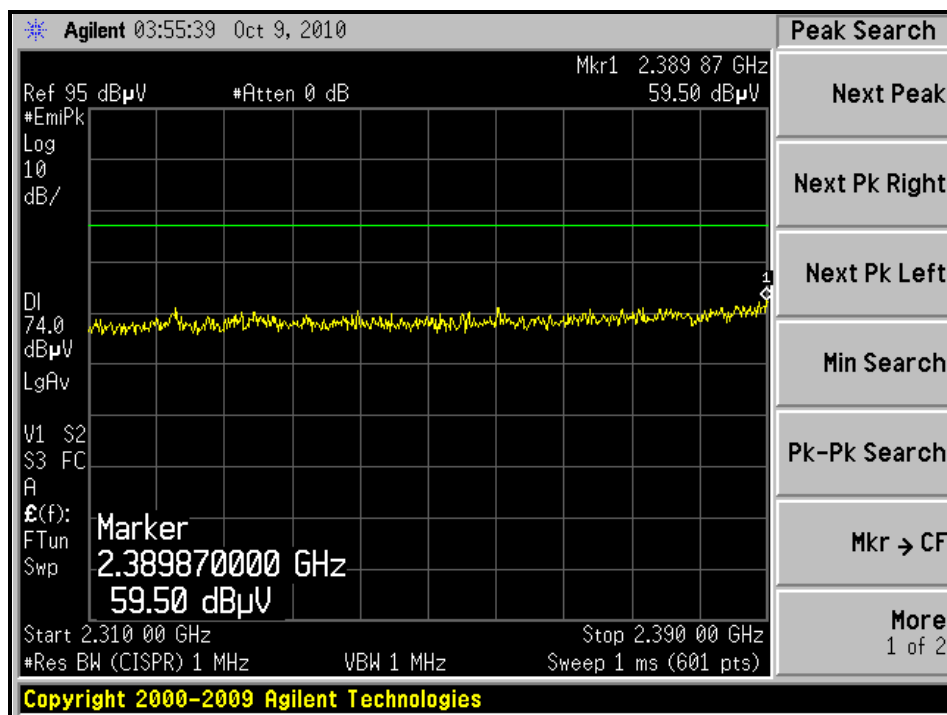



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

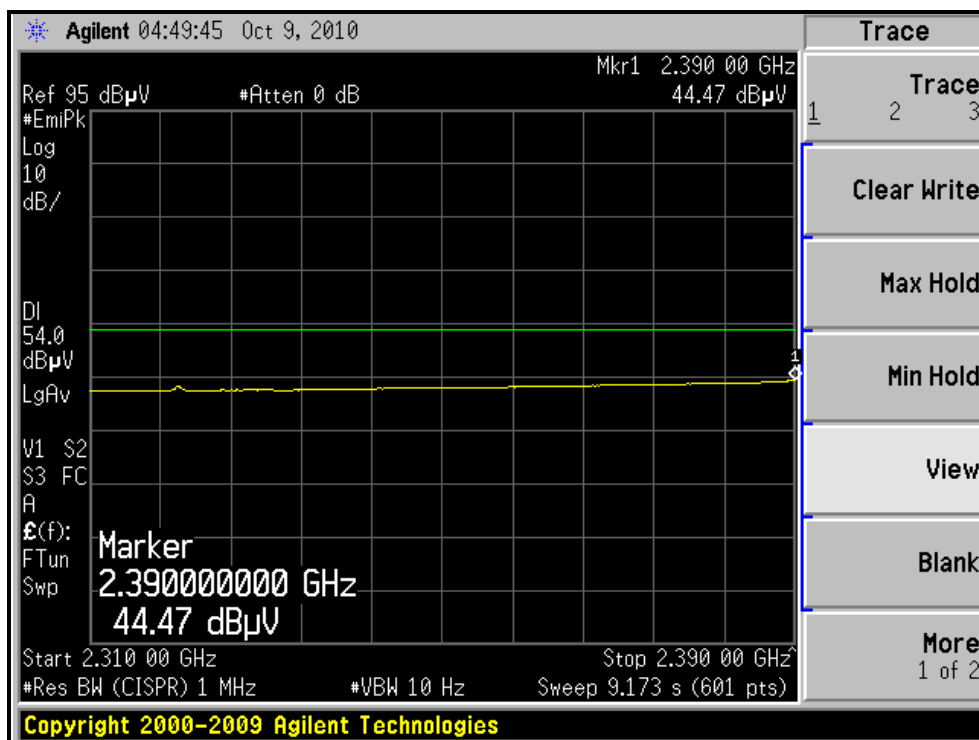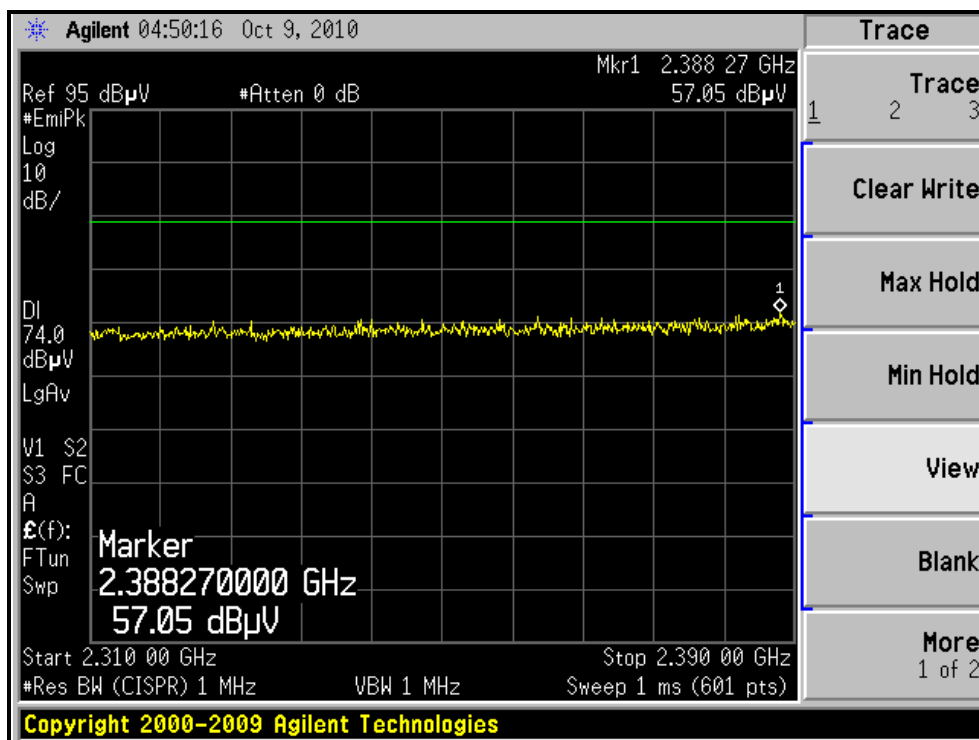





A D T

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

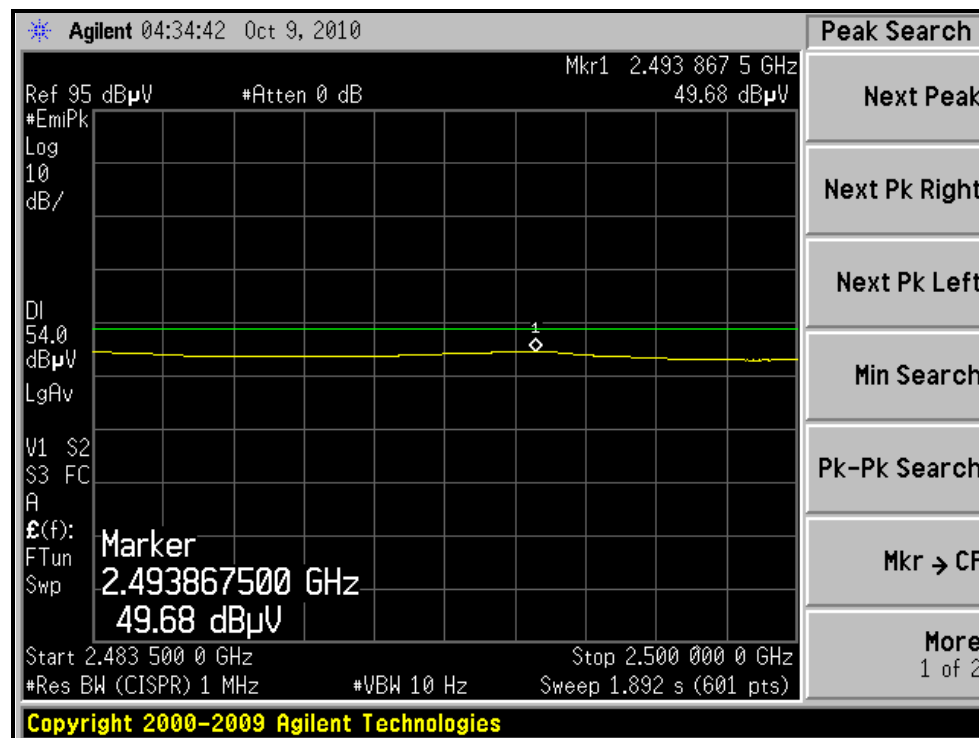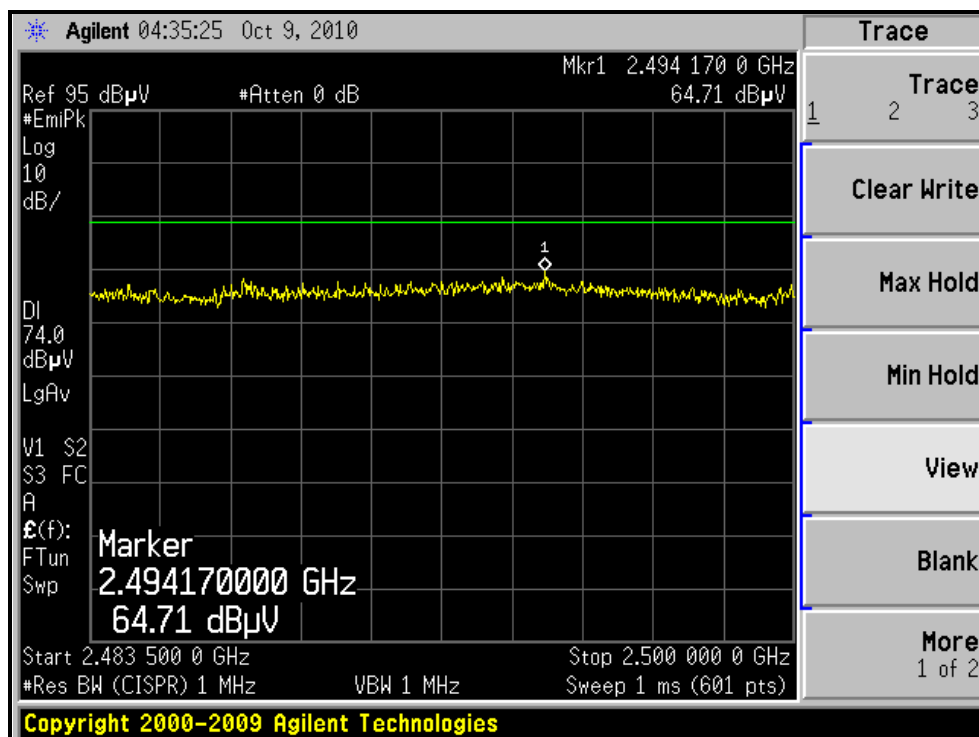

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

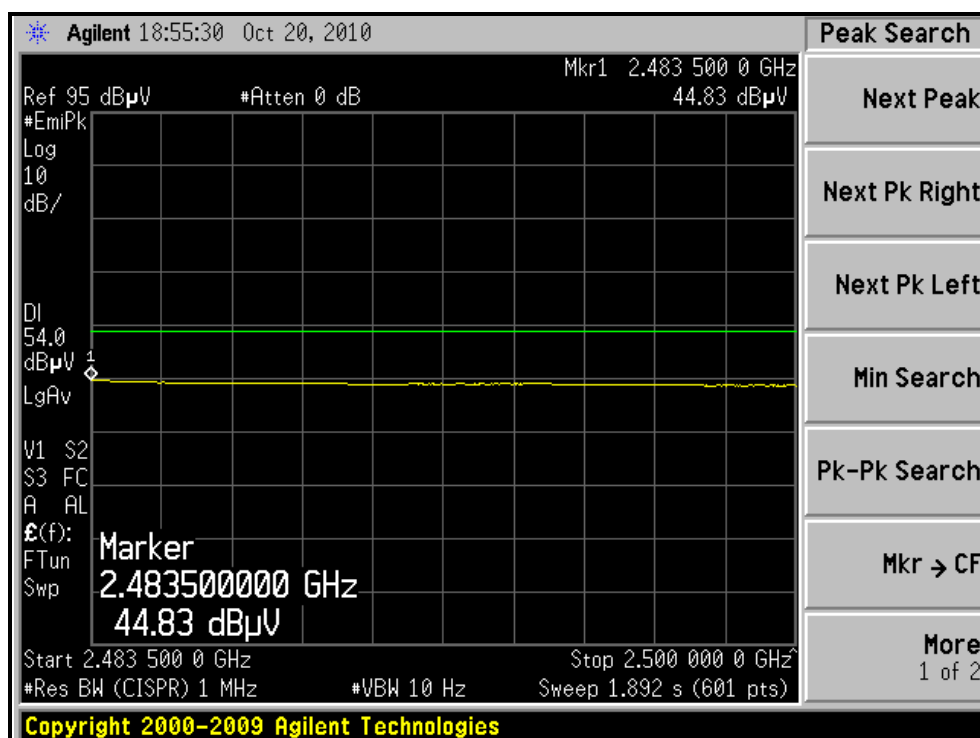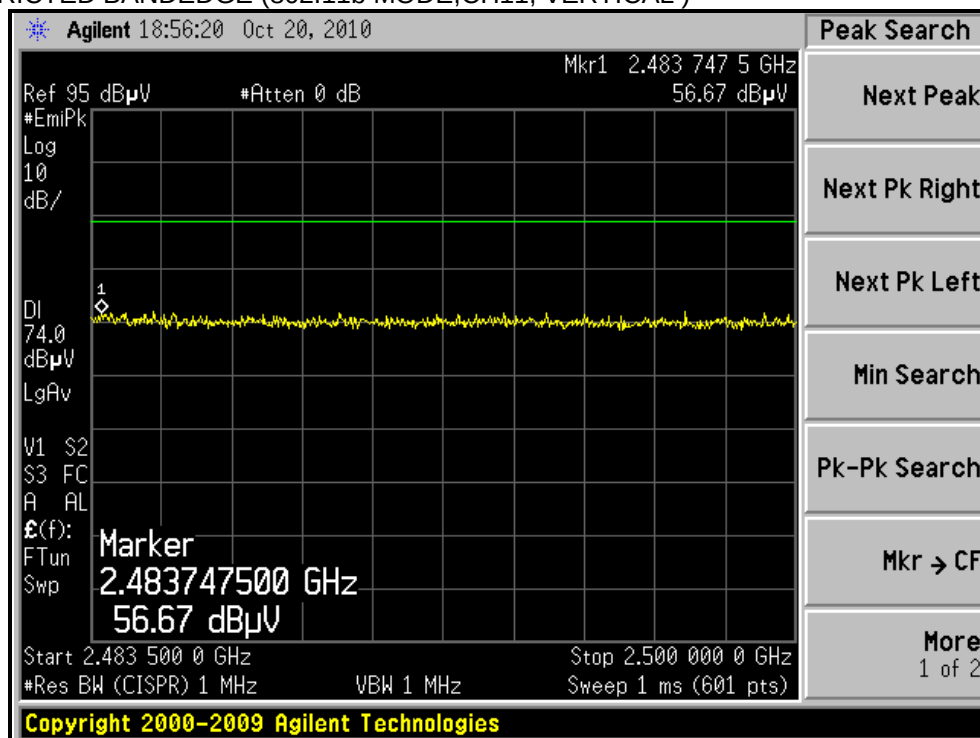



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.02 H	247	40.64	31.66
2	2390.00	53.5 AV	54.0	-0.5	1.02 H	247	21.84	31.66
3	*2412.00	108.5 PK			1.02 H	249	76.77	31.73
4	*2412.00	98.2 AV			1.02 H	249	66.47	31.73
5	4824.00	45.1 PK	74.0	-28.9	1.24 H	153	6.13	38.97
6	4824.00	33.8 AV	54.0	-20.2	1.24 H	153	-5.17	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.72 V	206	28.64	31.66
2	2390.00	46.3 AV	54.0	-7.7	1.72 V	206	14.64	31.66
3	*2412.00	98.1 PK			1.72 V	206	66.37	31.73
4	*2412.00	88.7 AV			1.72 V	206	56.97	31.73
5	4824.00	45.7 PK	74.0	-28.3	1.20 V	241	6.73	38.97
6	4824.00	34.1 AV	54.0	-19.9	1.20 V	241	-4.87	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.4 PK			1.00 H	250	79.59	31.81
2	*2437.00	102.4 AV			1.00 H	250	70.59	31.81
3	2494.00	65.1 PK	74.0	-8.9	1.01 H	244	33.10	32.00
4	2494.00	52.9 AV	54.0	-1.1	1.01 H	244	20.90	32.00
5	4874.00	45.9 PK	74.0	-28.1	1.31 H	144	6.76	39.14
6	4874.00	34.1 AV	54.0	-19.9	1.31 H	144	-5.04	39.14
7	7311.00	53.1 PK	74.0	-20.9	1.29 H	158	6.47	46.63
8	7311.00	41.2 AV	54.0	-12.8	1.29 H	158	-5.43	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			1.69 V	206	69.69	31.81
2	*2437.00	91.3 AV			1.69 V	206	59.49	31.81
3	4874.00	46.9 PK	74.0	-27.1	1.06 V	284	7.76	39.14
4	4874.00	35.3 AV	54.0	-18.7	1.06 V	284	-3.84	39.14
5	7311.00	53.9 PK	74.0	-20.1	1.41 V	144	7.27	46.63
6	7311.00	42.2 AV	54.0	-11.8	1.41 V	144	-4.43	46.63

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			1.00 H	249	74.91	31.89
2	*2462.00	96.3 AV			1.00 H	249	64.41	31.89
3	2483.50	67.0 PK	74.0	-7.0	1.02 H	248	35.03	31.97
4	2483.50	53.4 AV	54.0	-0.6	1.02 H	248	21.43	31.97
5	4924.00	45.7 PK	74.0	-28.3	1.39 H	196	6.39	39.31
6	4924.00	34.2 AV	54.0	-19.8	1.39 H	196	-5.11	39.31
7	7386.00	53.3 PK	74.0	-20.7	1.21 H	215	6.70	46.60
8	7386.00	41.4 AV	54.0	-12.6	1.21 H	215	-5.20	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.0 PK			1.66 V	209	65.11	31.89
2	*2462.00	87.3 AV			1.66 V	209	55.41	31.89
3	2483.50	59.6 PK	74.0	-14.4	1.66 V	209	27.63	31.97
4	2483.50	46.8 AV	54.0	-7.2	1.66 V	209	14.83	31.97
5	4924.00	46.5 PK	74.0	-27.5	1.02 V	291	7.19	39.31
6	4924.00	34.8 AV	54.0	-19.2	1.02 V	291	-4.51	39.31
7	7386.00	53.6 PK	74.0	-20.4	1.42 V	114	7.00	46.60
8	7386.00	42.0 AV	54.0	-12.0	1.42 V	114	-4.60	46.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

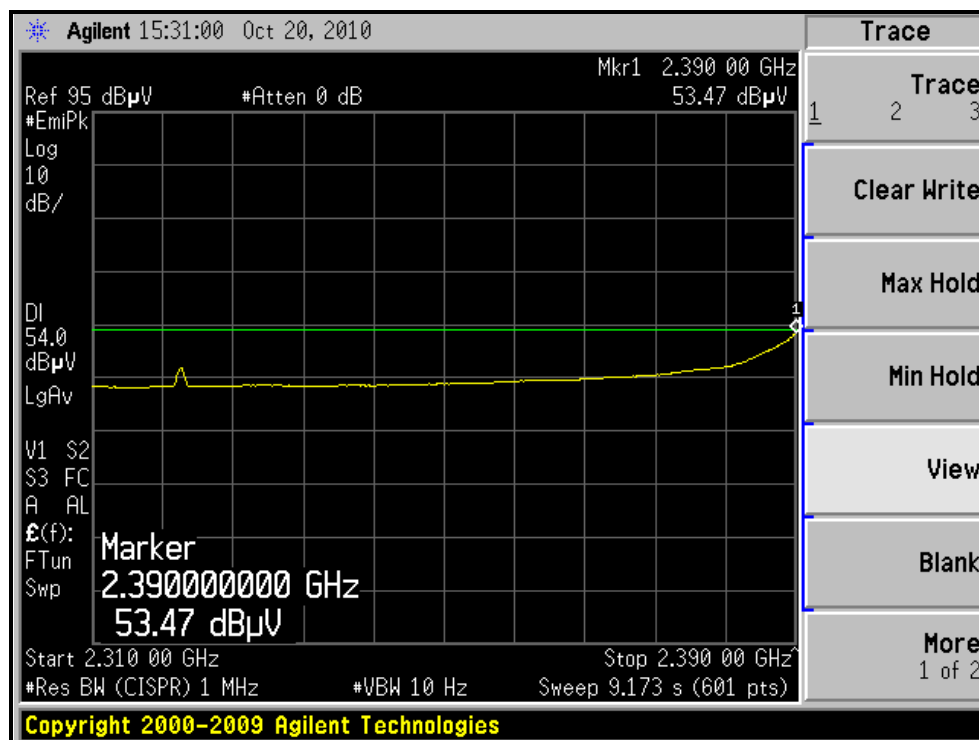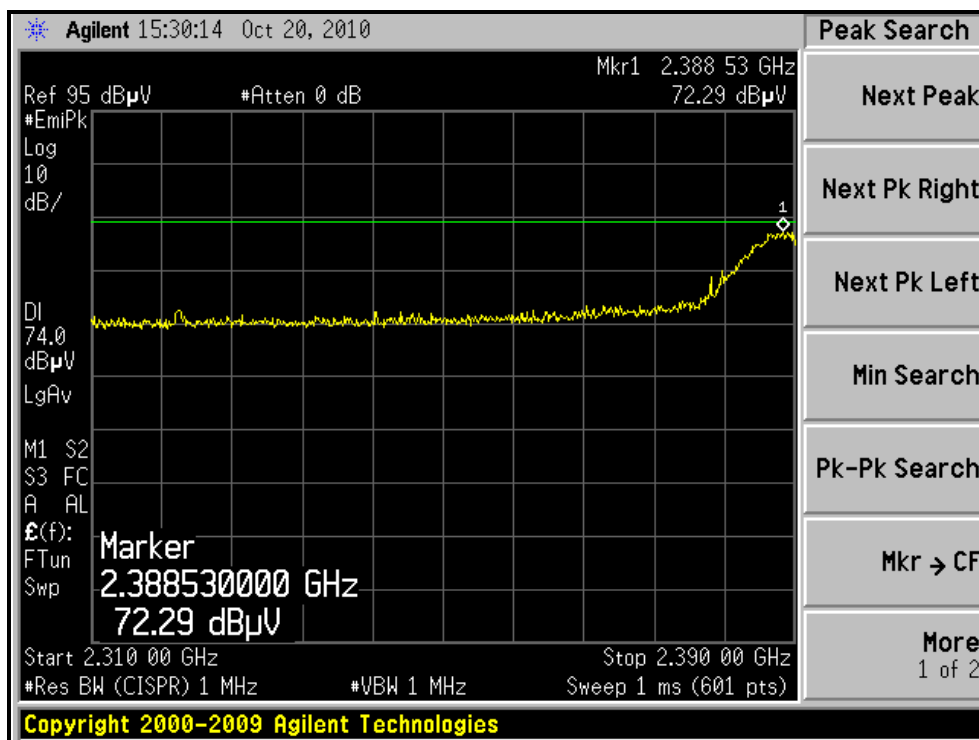



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

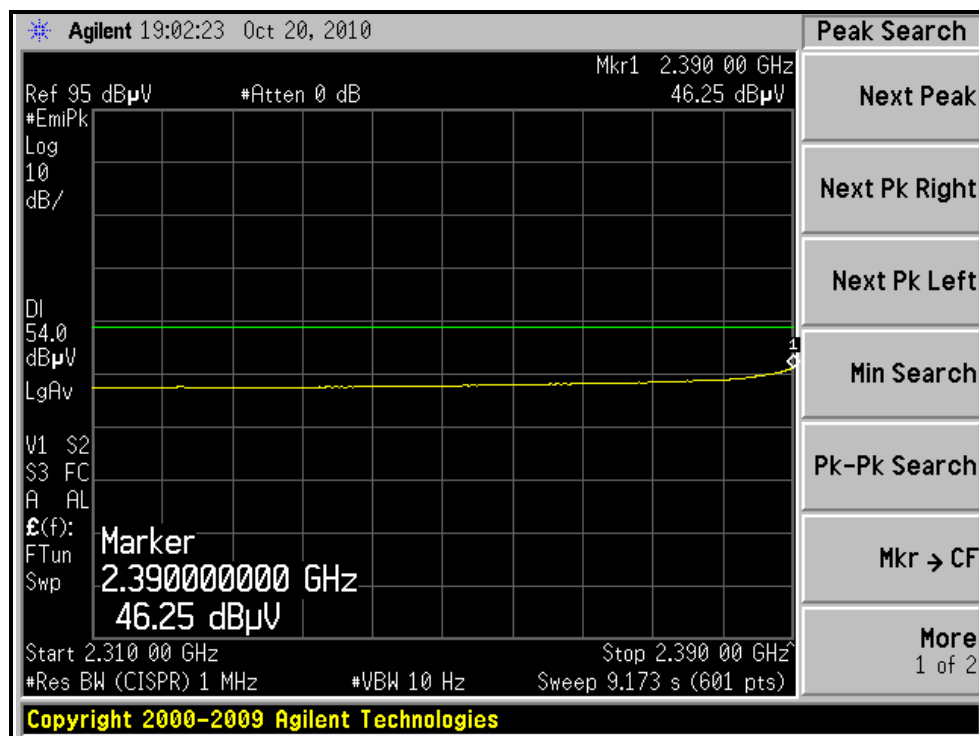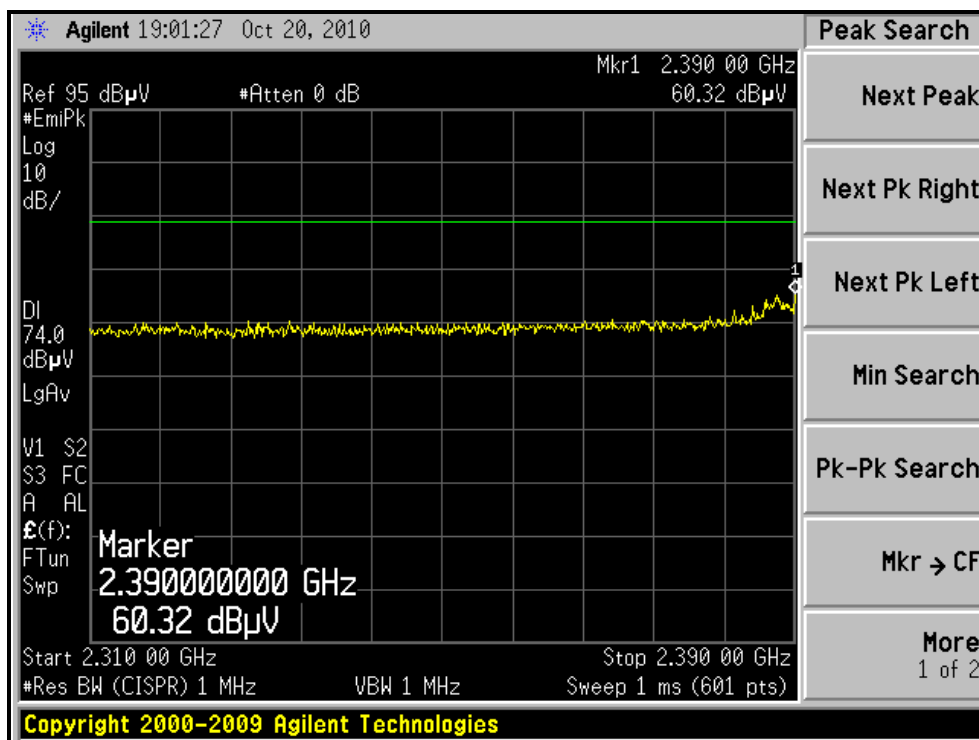

RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

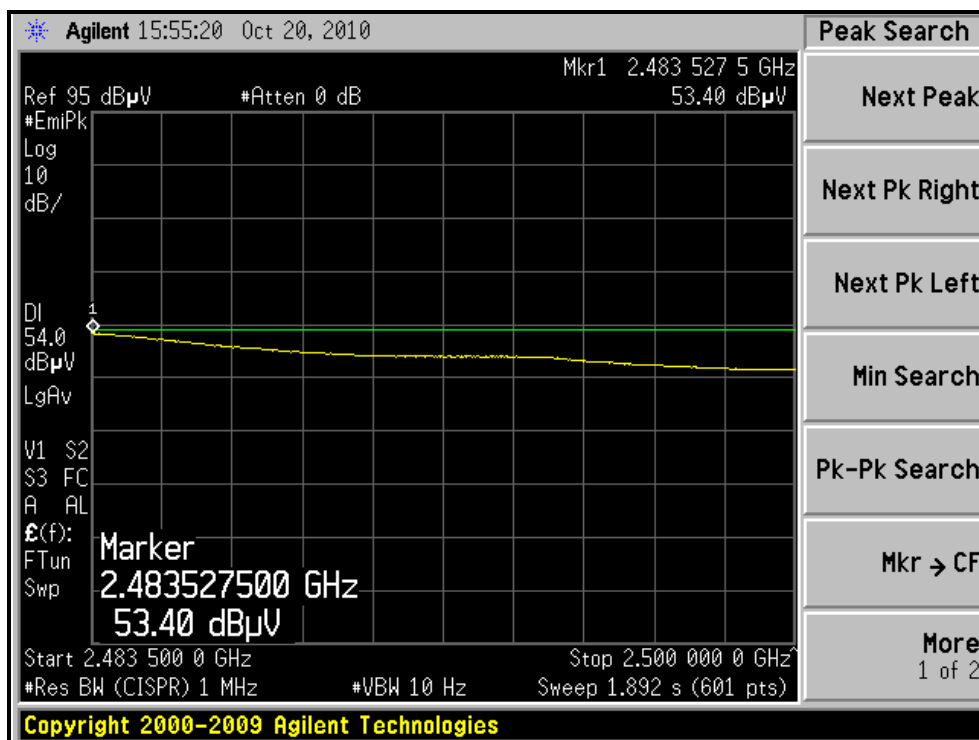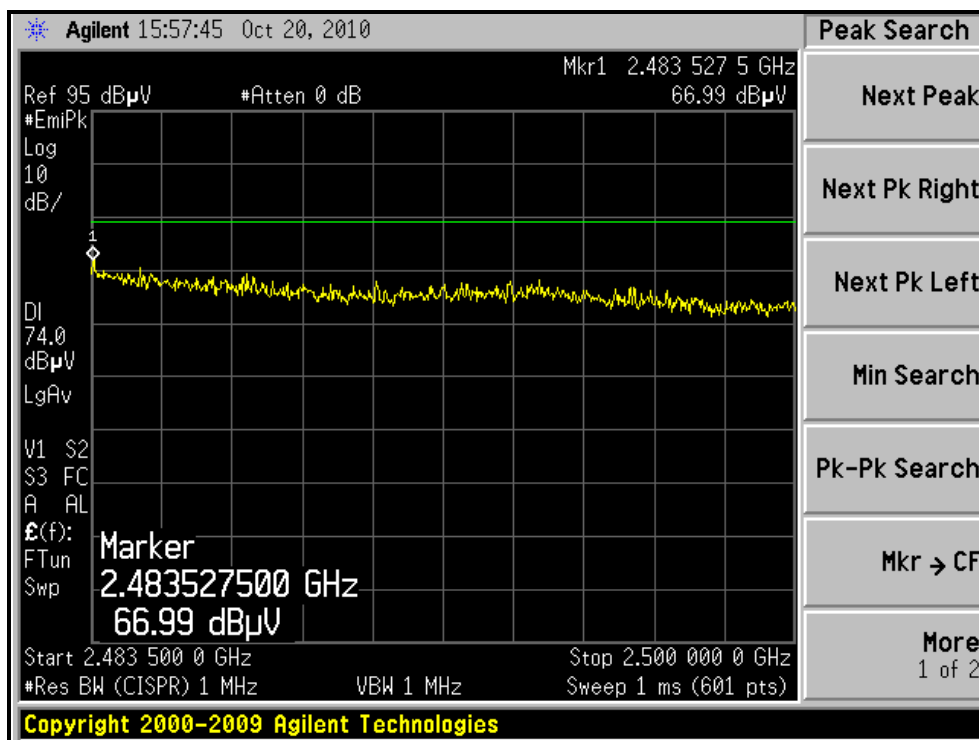

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

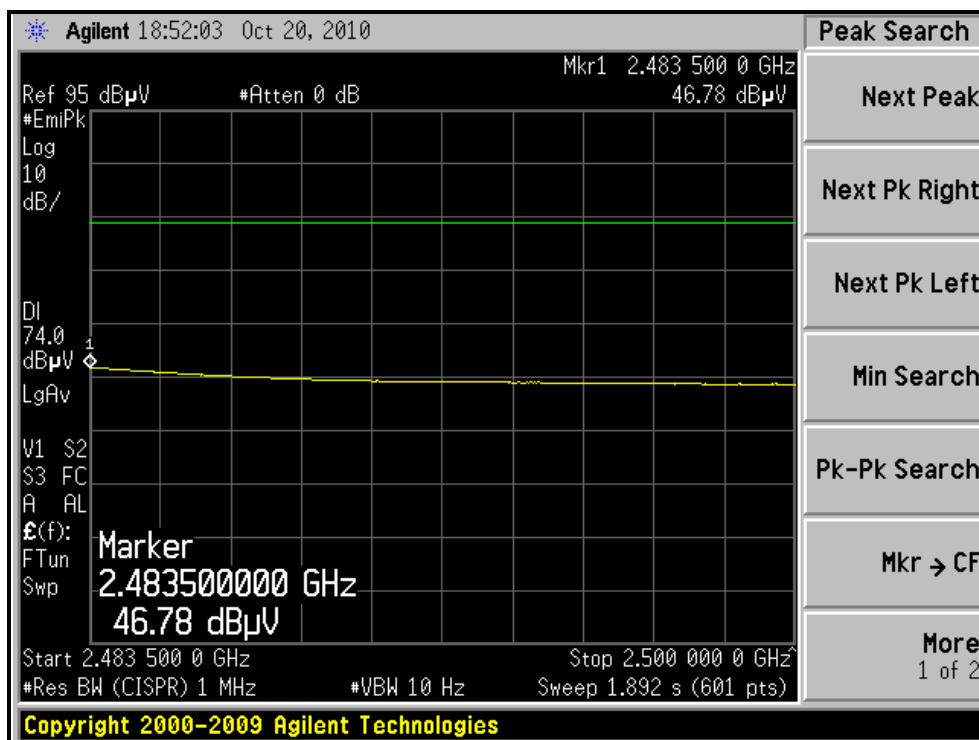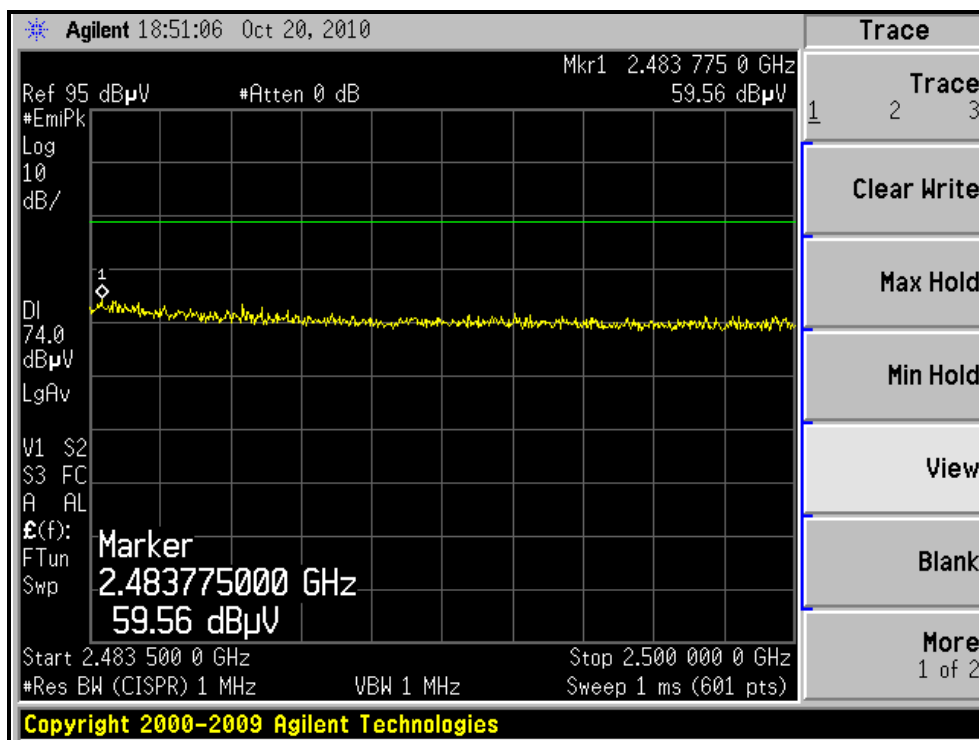



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.03 H	246	34.14	31.66
2	2390.00	53.2 AV	54.0	-0.8	1.03 H	246	21.54	31.66
3	*2412.00	108.8 PK			1.00 H	246	77.07	31.73
4	*2412.00	96.7 AV			1.00 H	246	64.97	31.73
5	4824.00	45.1 PK	74.0	-28.9	1.29 H	164	6.13	38.97
6	4824.00	33.7 AV	54.0	-20.3	1.29 H	164	-5.27	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	1.72 V	207	28.04	31.66
2	2390.00	46.2 AV	54.0	-7.8	1.72 V	207	14.54	31.66
3	*2412.00	98.2 PK			1.72 V	207	66.47	31.73
4	*2412.00	87.1 AV			1.72 V	207	55.37	31.73
5	4824.00	45.2 PK	74.0	-28.8	1.21 V	249	6.23	38.97
6	4824.00	33.9 AV	54.0	-20.1	1.21 V	249	-5.07	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.1 PK			1.00 H	261	83.29	31.81
2	*2437.00	105.2 AV			1.00 H	261	73.39	31.81
3	2494.00	67.2 PK	74.0	-6.8	1.01 H	244	35.20	32.00
4	2494.00	53.0 AV	54.0	-1.0	1.01 H	244	21.00	32.00
5	4874.00	46.3 PK	74.0	-27.7	1.50 H	161	7.16	39.14
6	4874.00	34.8 AV	54.0	-19.2	1.50 H	161	-4.34	39.14
7	7311.00	53.7 PK	74.0	-20.3	1.28 H	200	7.07	46.63
8	7311.00	41.2 AV	54.0	-12.8	1.28 H	200	-5.43	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			1.69 V	207	69.69	31.81
2	*2437.00	90.5 AV			1.69 V	207	58.69	31.81
3	4874.00	45.8 PK	74.0	-28.2	1.05 V	114	6.66	39.14
4	4874.00	35.1 AV	54.0	-18.9	1.05 V	114	-4.04	39.14
5	7311.00	55.6 PK	74.0	-18.4	1.52 V	132	8.97	46.63
6	7311.00	42.3 AV	54.0	-11.7	1.52 V	132	-4.33	46.63

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.1 PK			1.03 H	249	76.21	31.89
2	*2462.00	96.2 AV			1.03 H	249	64.31	31.89
3	2483.50	65.8 PK	74.0	-8.2	1.00 H	248	33.83	31.97
4	2483.50	53.3 AV	54.0	-0.7	1.00 H	248	21.33	31.97
5	4924.00	45.4 PK	74.0	-28.6	1.37 H	189	6.09	39.31
6	4924.00	34.1 AV	54.0	-19.9	1.37 H	189	-5.21	39.31
7	7386.00	53.1 PK	74.0	-20.9	1.19 H	221	6.50	46.60
8	7386.00	41.5 AV	54.0	-12.5	1.19 H	221	-5.10	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.6 PK			1.66 V	208	65.71	31.89
2	*2462.00	86.9 AV			1.66 V	208	55.01	31.89
3	2483.50	58.6 PK	74.0	-15.4	1.66 V	208	26.63	31.97
4	2483.50	46.7 AV	54.0	-7.3	1.66 V	208	14.73	31.97
5	4924.00	46.2 PK	74.0	-27.8	1.06 V	281	6.89	39.31
6	4924.00	34.9 AV	54.0	-19.1	1.06 V	281	-4.41	39.31
7	7386.00	53.4 PK	74.0	-20.6	1.41 V	126	6.80	46.60
8	7386.00	41.9 AV	54.0	-12.1	1.41 V	126	-4.70	46.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL)

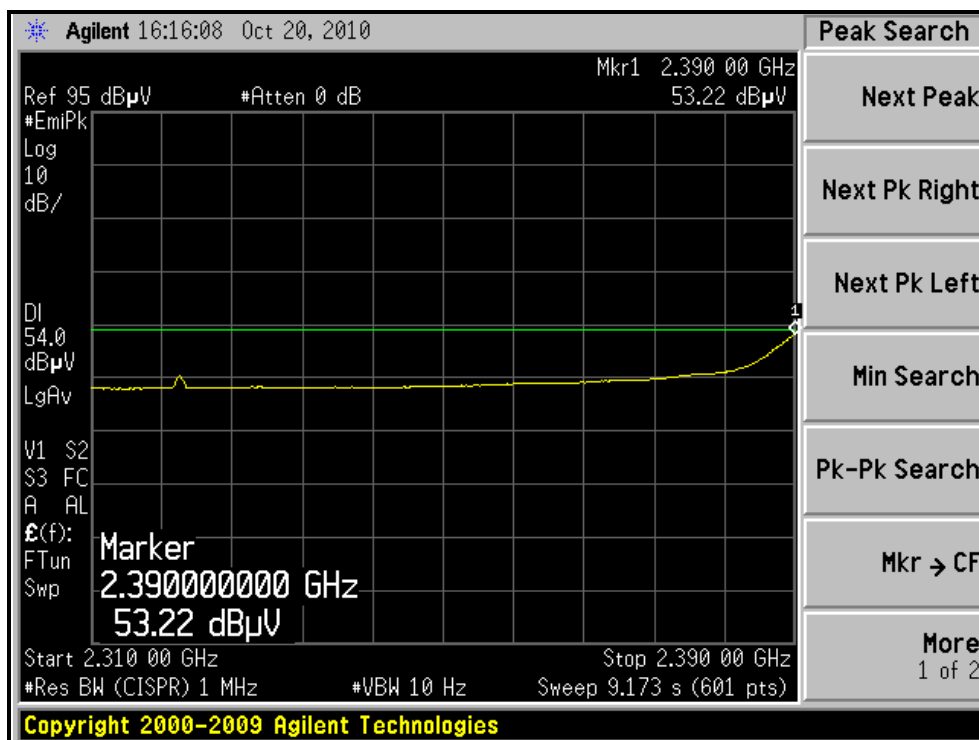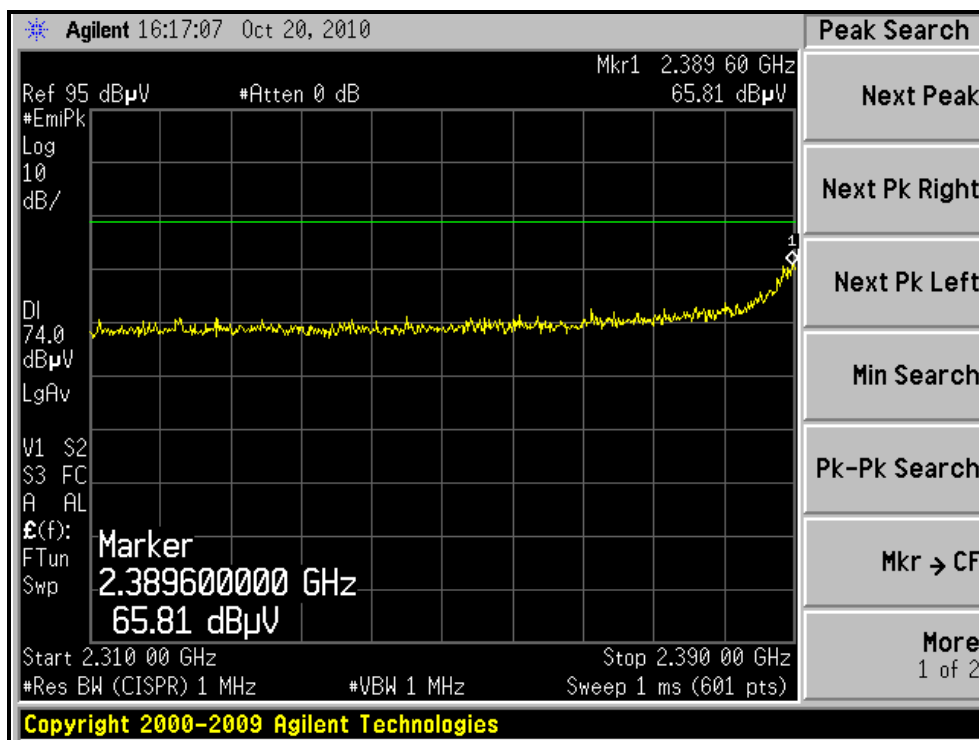



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL)

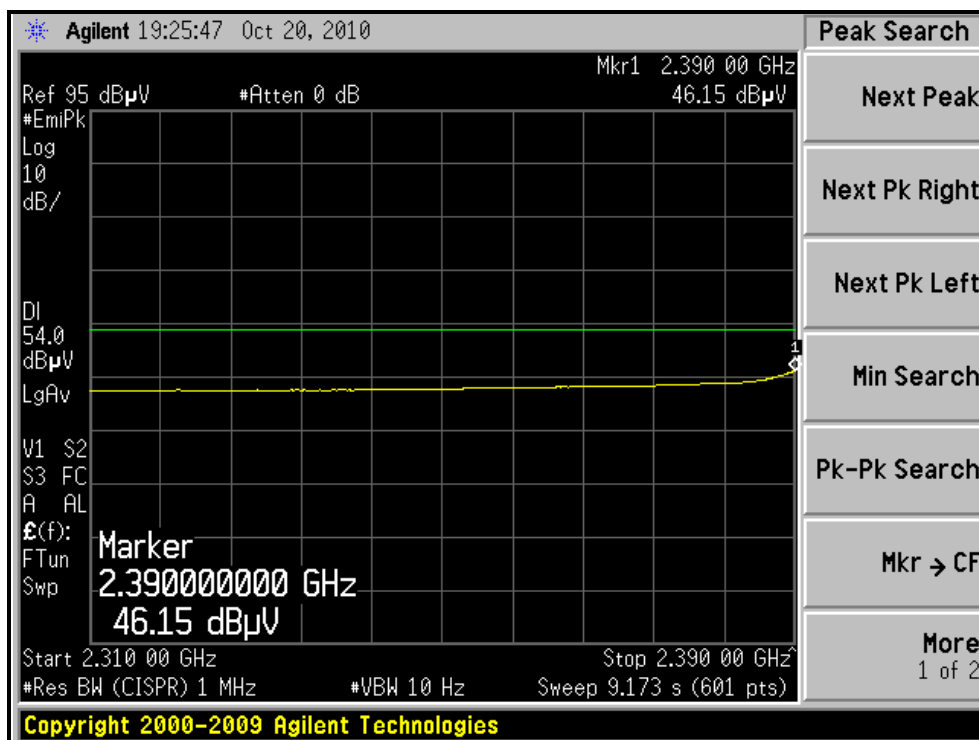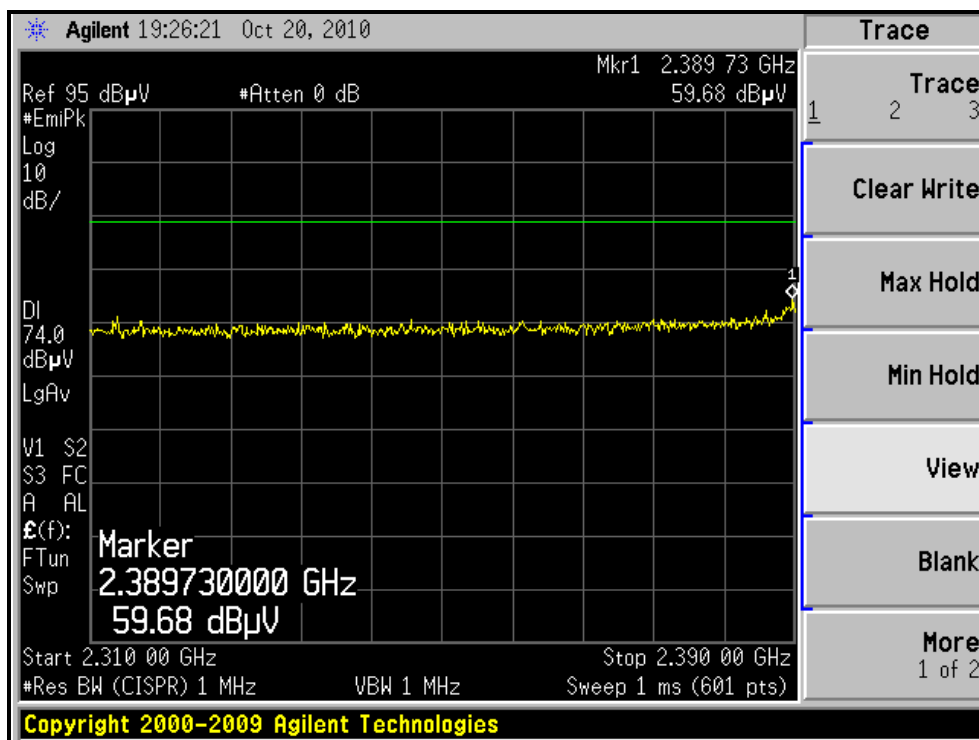

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL)

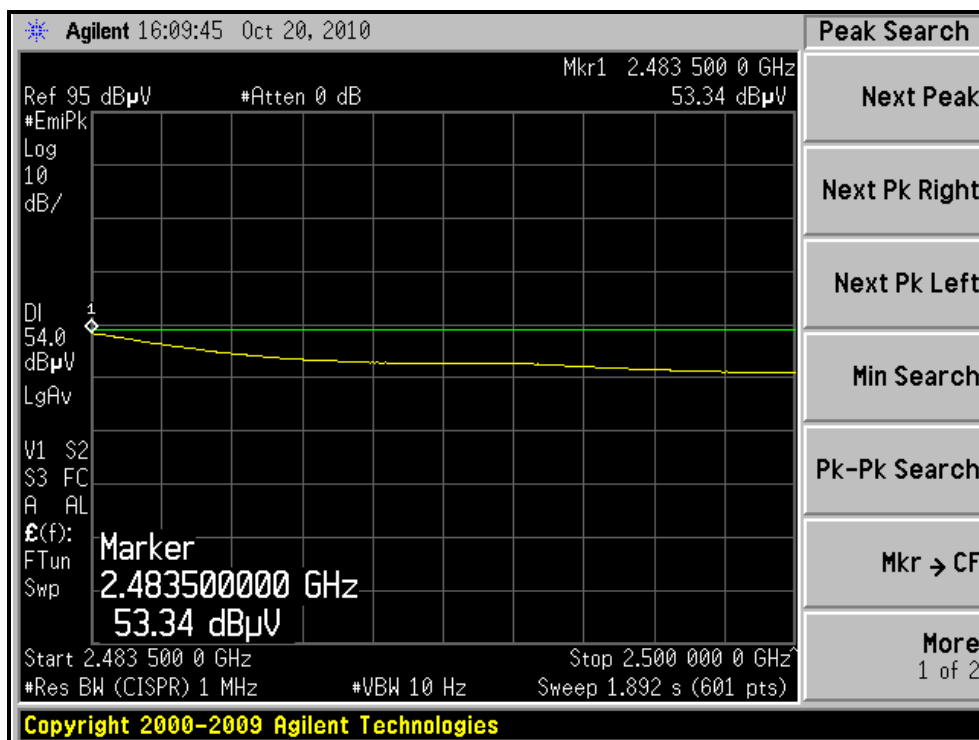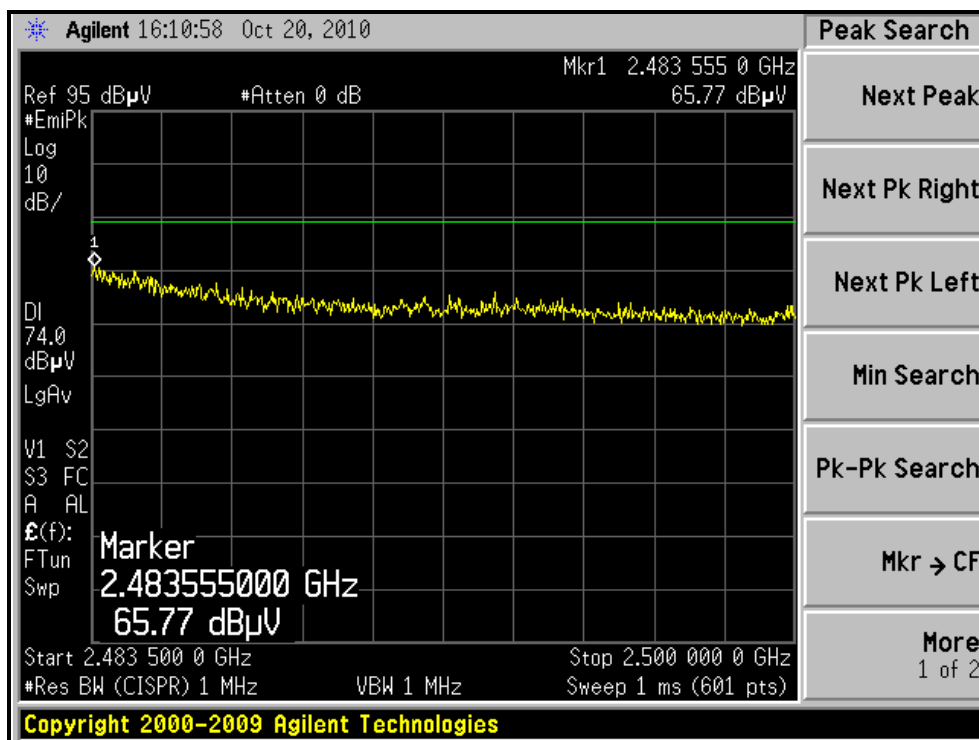

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL)

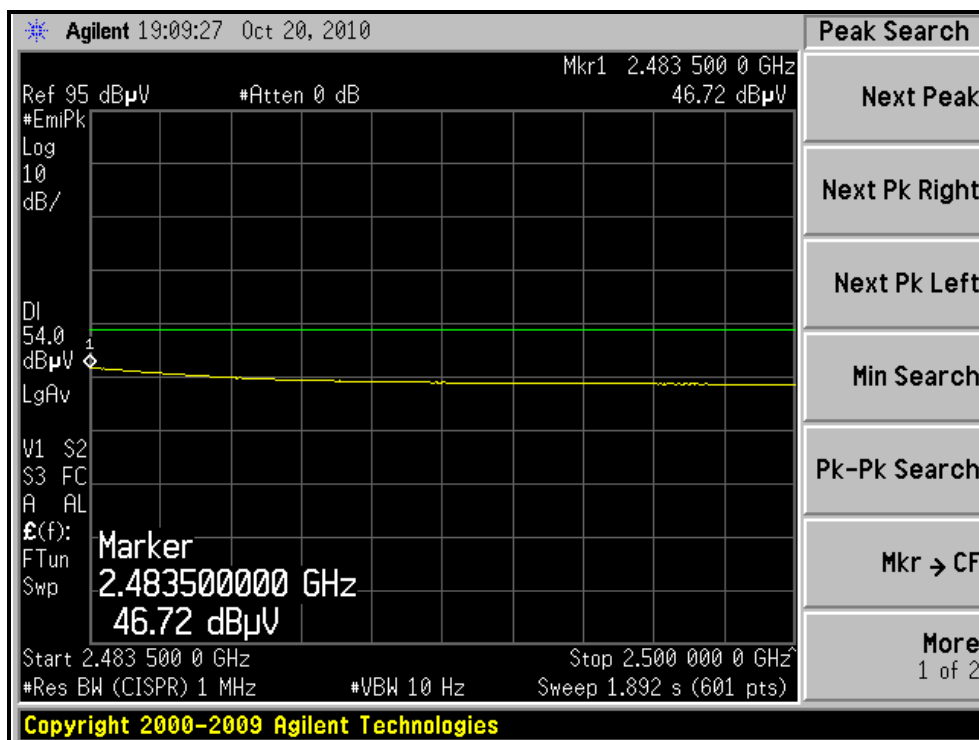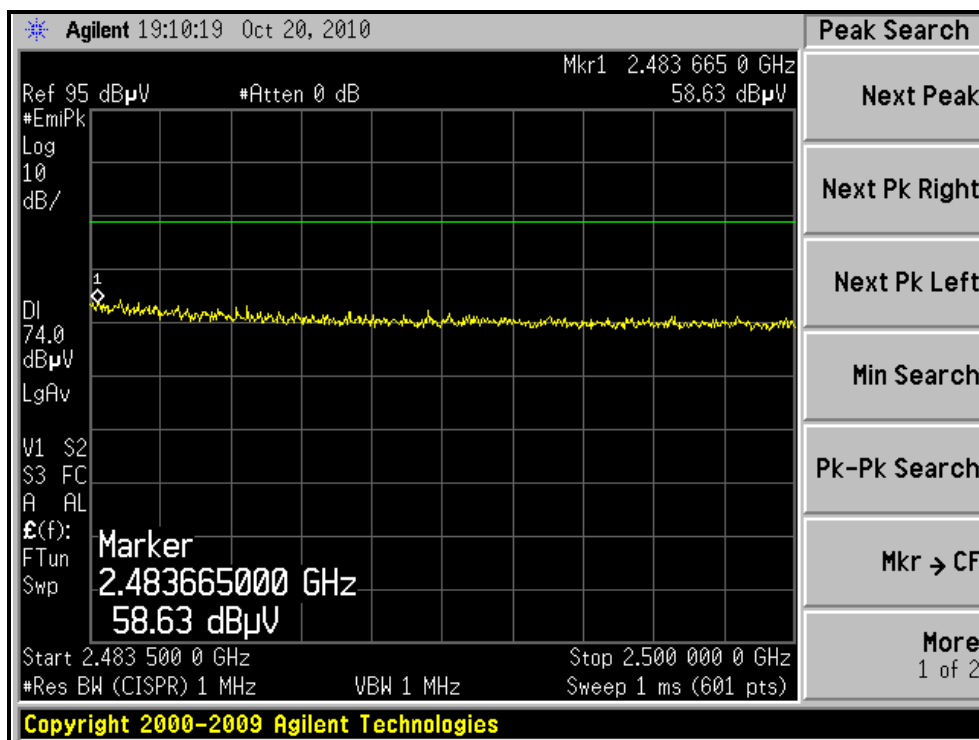



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.00 H	244	37.74	31.66
2	2390.00	53.5 AV	54.0	-0.5	1.00 H	244	21.84	31.66
3	*2422.00	105.5 PK			1.00 H	248	73.74	31.76
4	*2422.00	91.8 AV			1.00 H	248	60.04	31.76
5	4844.00	45.2 PK	74.0	-28.8	1.31 H	157	6.16	39.04
6	4844.00	33.9 AV	54.0	-20.1	1.31 H	157	-5.14	39.04
7	7266.00	52.6 PK	74.0	-21.4	1.21 H	165	5.93	46.67
8	7266.00	39.4 AV	54.0	-14.6	1.21 H	165	-7.27	46.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.47	59.2 PK	74.0	-14.8	1.72 V	208	27.54	31.66
2	2389.47	46.7 AV	54.0	-7.3	1.72 V	208	15.04	31.66
3	*2422.00	94.2 PK			1.72 V	208	62.44	31.76
4	*2422.00	82.3 AV			1.72 V	208	50.54	31.76
5	4844.00	45.4 PK	74.0	-28.6	1.17 V	234	6.36	39.04
6	4844.00	33.9 AV	54.0	-20.1	1.17 V	234	-5.14	39.04
7	7266.00	52.7 PK	74.0	-21.3	1.46 V	154	6.03	46.67
8	7266.00	41.4 AV	54.0	-12.6	1.46 V	154	-5.27	46.67

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.1 PK			1.00 H	244	76.29	31.81
2	*2437.00	97.4 AV			1.00 H	244	65.59	31.81
3	2483.50	70.2 PK	74.0	-3.8	1.01 H	242	38.23	31.97
4	2483.50	53.1 AV	54.0	-0.9	1.01 H	242	21.13	31.97
5	4874.00	46.0 PK	74.0	-28.0	1.21 H	354	6.86	39.14
6	4874.00	33.8 AV	54.0	-20.2	1.21 H	354	-5.34	39.14
7	7311.00	52.1 PK	74.0	-21.9	1.11 H	68	5.47	46.63
8	7311.00	40.7 AV	54.0	-13.3	1.11 H	68	-5.93	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.3 PK			1.69 V	206	63.49	31.81
2	*2437.00	83.4 AV			1.69 V	206	51.59	31.81
3	4874.00	45.9 PK	74.0	-28.1	1.06 V	115	6.76	39.14
4	4874.00	34.5 AV	54.0	-19.5	1.06 V	115	-4.64	39.14
5	7311.00	55.3 PK	74.0	-18.7	1.51 V	137	8.67	46.63
6	7311.00	42.1 AV	54.0	-11.9	1.51 V	137	-4.53	46.63

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH 1013 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.2 PK			1.18 H	211	73.34	31.86
2	*2452.00	90.8 AV			1.18 H	211	58.94	31.86
3	2483.50	68.4 PK	74.0	-5.6	1.15 H	214	36.43	31.97
4	2483.50	53.2 AV	54.0	-0.8	1.15 H	214	21.23	31.97
5	4904.00	45.6 PK	74.0	-28.4	1.34 H	205	6.36	39.24
6	4904.00	34.2 AV	54.0	-19.8	1.34 H	205	-5.04	39.24
7	7356.00	53.0 PK	74.0	-21.0	1.19 H	226	6.39	46.61
8	7356.00	41.4 AV	54.0	-12.6	1.19 H	226	-5.21	46.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.0 PK			1.66 V	208	63.14	31.86
2	*2452.00	83.0 AV			1.66 V	208	51.14	31.86
3	2483.50	59.9 PK	74.0	-14.1	1.66 V	208	27.93	31.97
4	2483.50	46.4 AV	54.0	-7.6	1.66 V	208	14.43	31.97
5	4904.00	45.7 PK	74.0	-28.3	1.05 V	276	6.46	39.24
6	4904.00	34.6 AV	54.0	-19.4	1.05 V	276	-4.64	39.24
7	7356.00	53.2 PK	74.0	-20.8	1.42 V	118	6.59	46.61
8	7356.00	41.5 AV	54.0	-12.5	1.42 V	118	-5.11	46.61

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH1, HORIZONTAL)

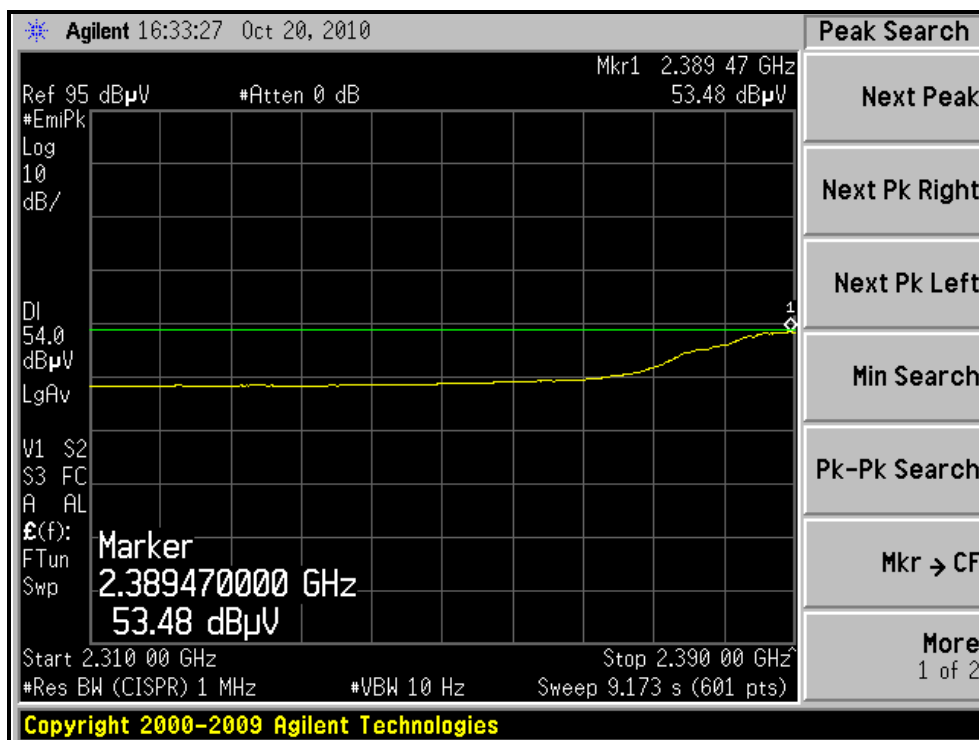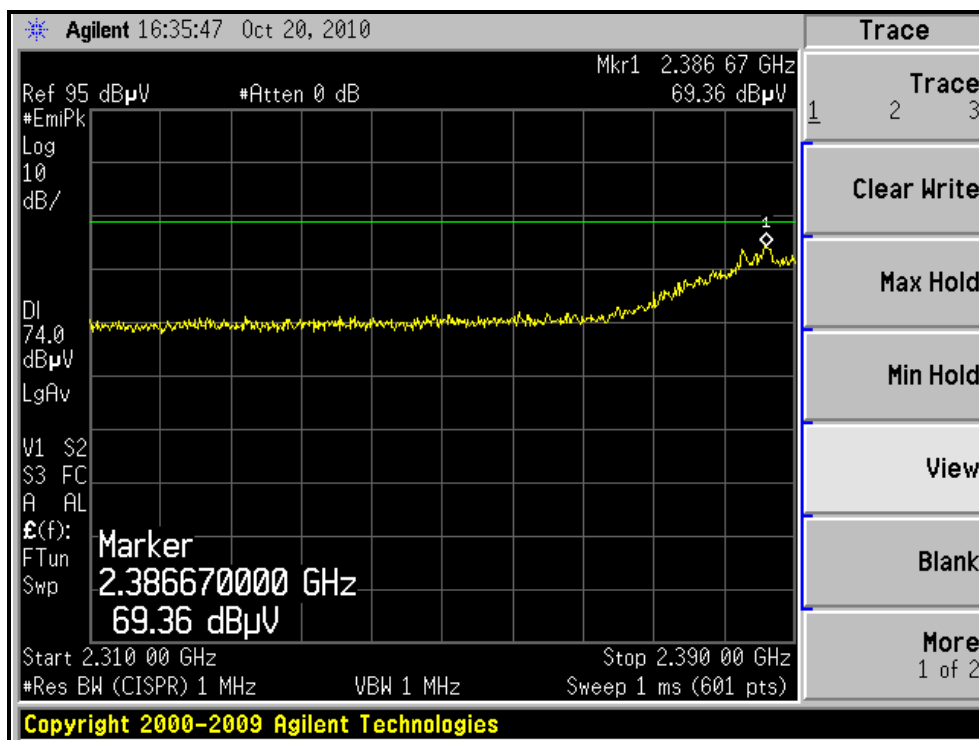



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH1, VERTICAL)

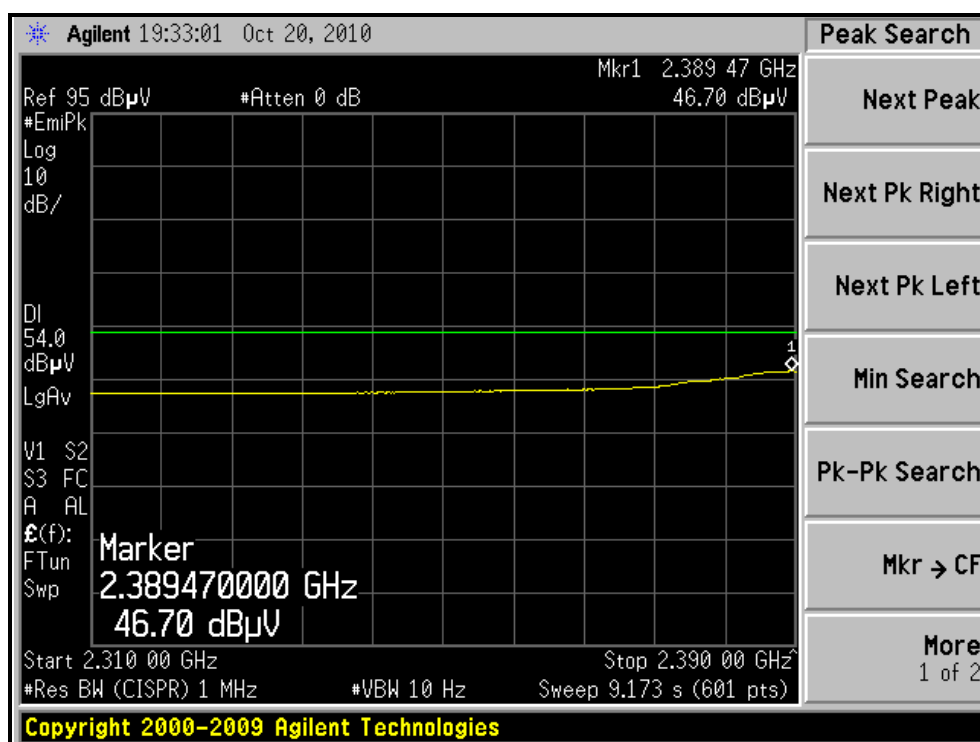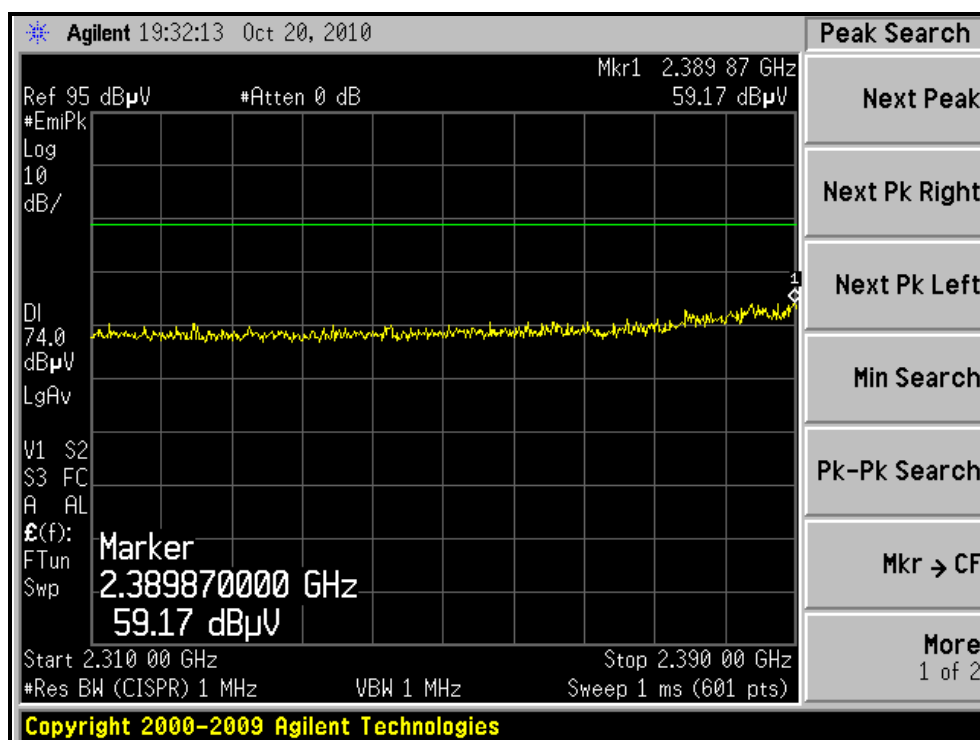





A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH7, HORIZONTAL)

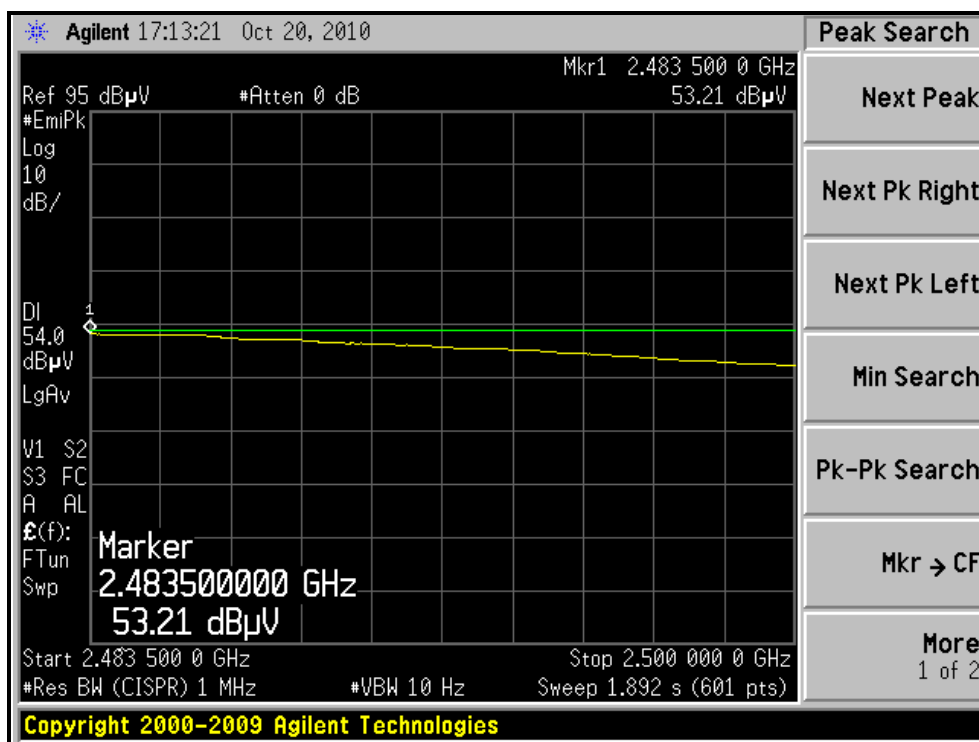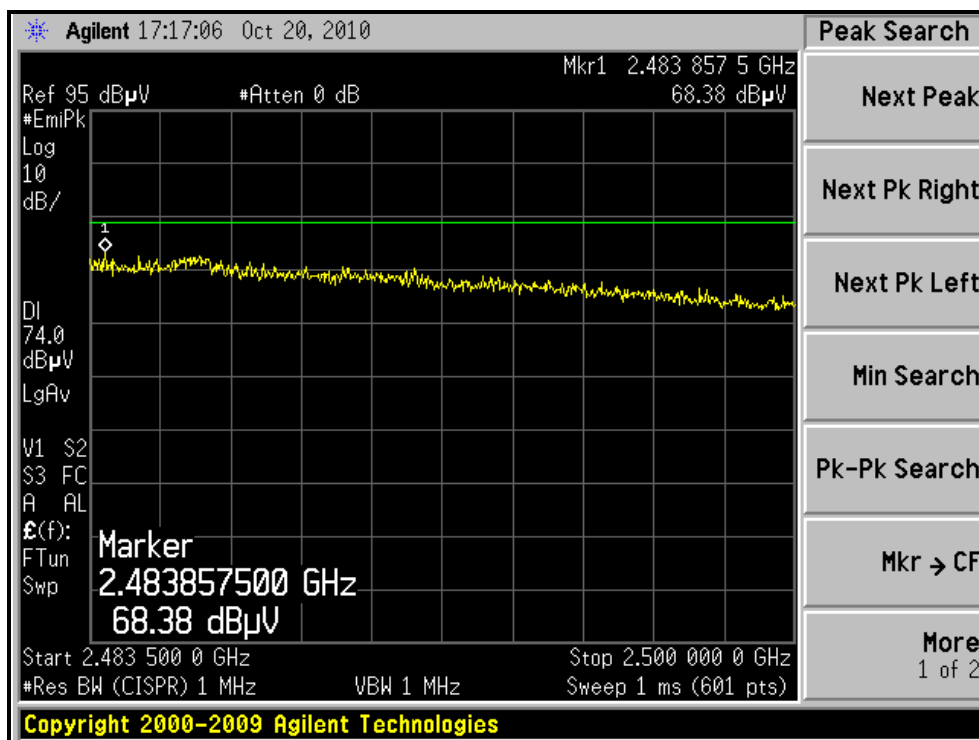

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH7, VERTICAL)

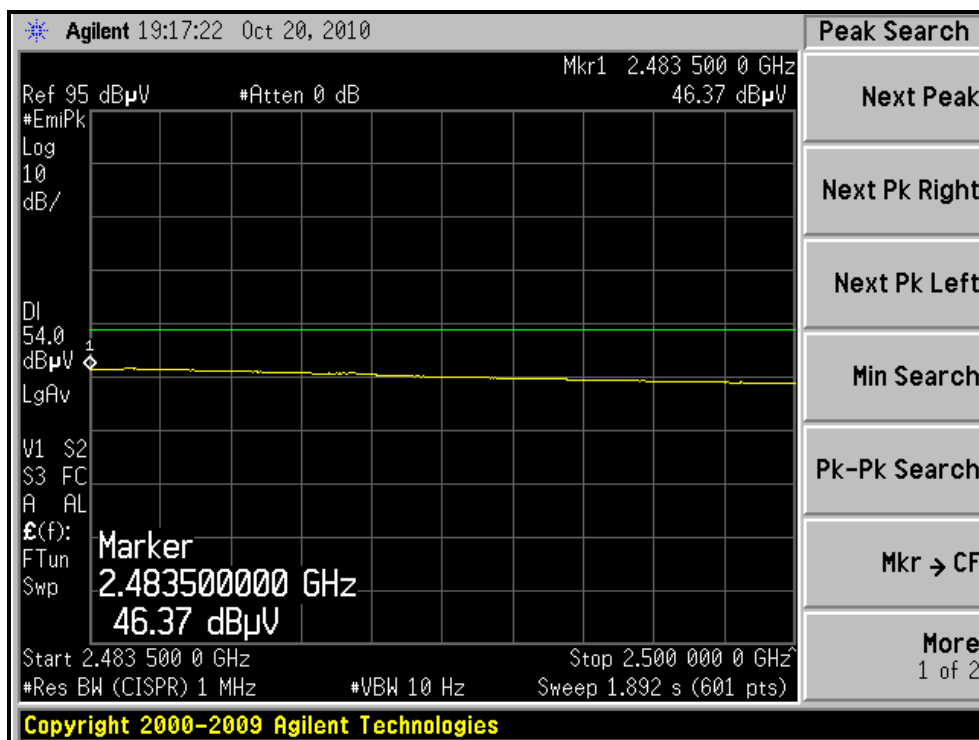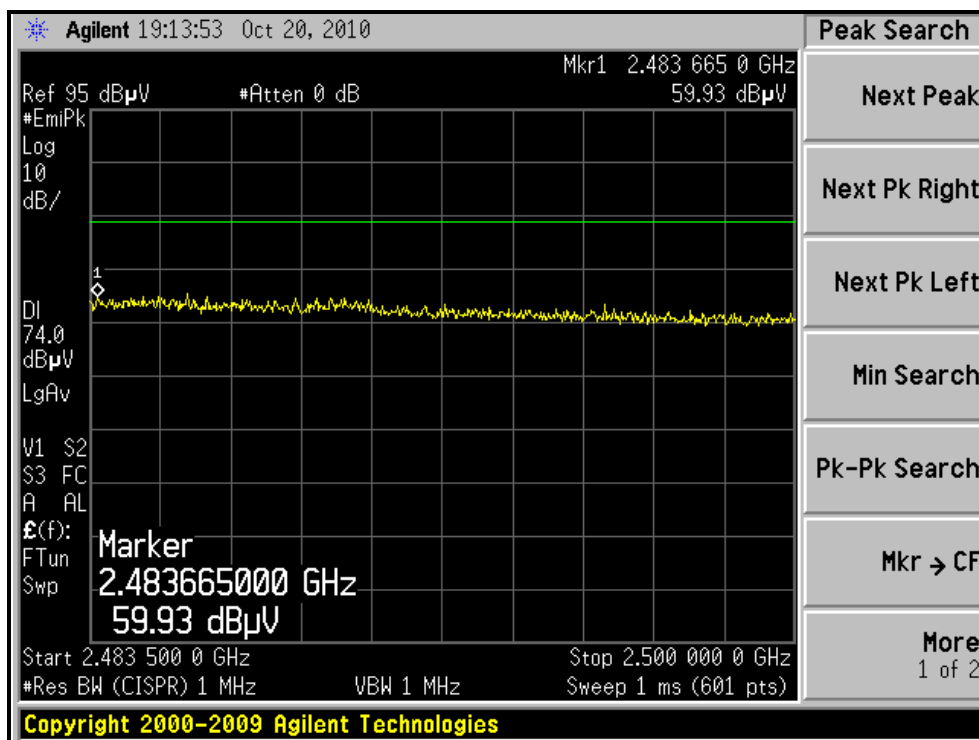

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

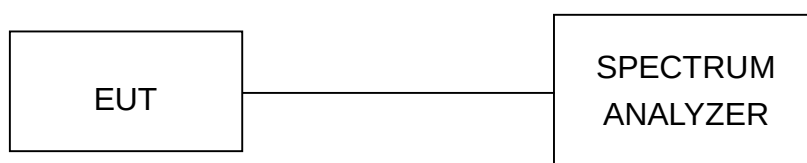

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	7.95	0.5	PASS
6	2437	7.79	0.5	PASS
11	2462	7.21	0.5	PASS

CH1

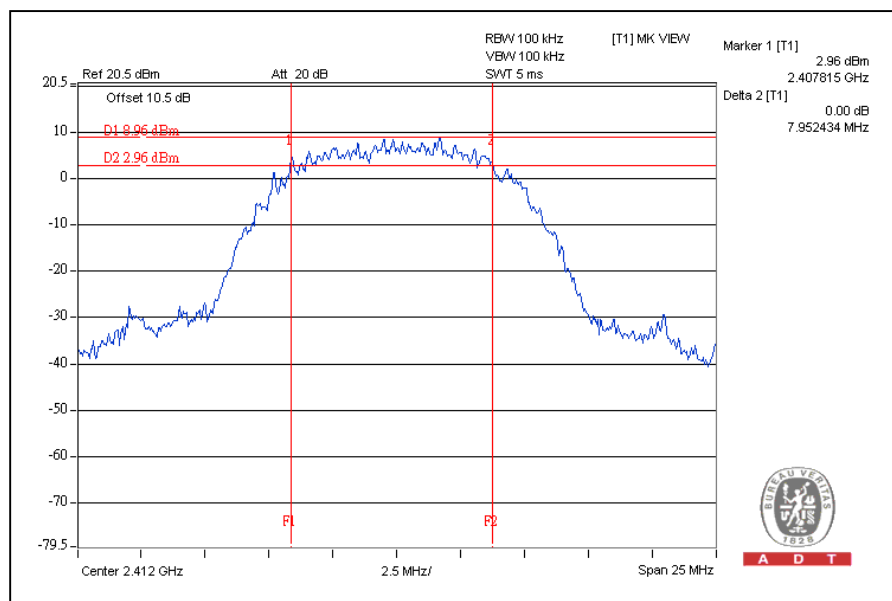

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	14.72	0.5	PASS
6	2437	15.74	0.5	PASS
11	2462	15.09	0.5	PASS


CH6



802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.70	0.5	PASS
6	2437	15.74	0.5	PASS
11	2462	15.16	0.5	PASS


CH6

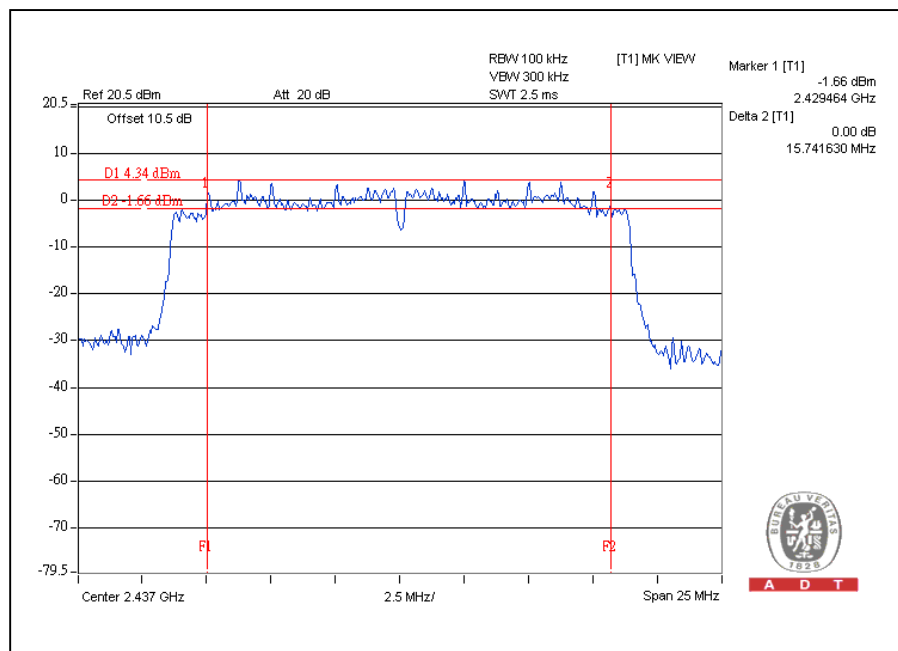

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	35.78	0.5	PASS
4	2437	35.71	0.5	PASS
7	2452	35.81	0.5	PASS

CH7

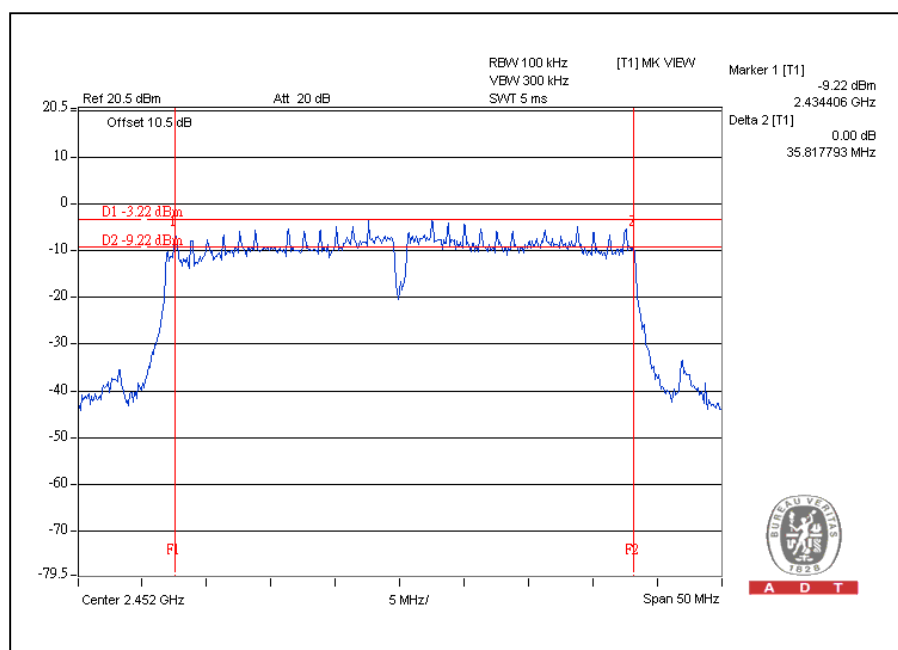

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2010	May 03, 2011
Power Sensor	MA2411B	0738172	May 04, 2010	May 03, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

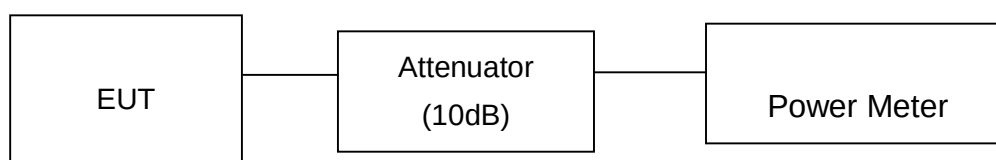

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	151.4	21.8	30	PASS
6	2437	151.4	21.8	30	PASS
11	2462	147.9	21.7	30	PASS

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	199.5	23.0	30	PASS
6	2437	338.8	25.3	30	PASS
11	2462	173.8	22.4	30	PASS

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	21.1	20.5	241.0	23.8	30	PASS
6	2437	24.9	25.0	625.3	28.0	30	PASS
11	2462	19.7	19.8	188.8	22.8	30	PASS



A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2422	20.2	20.8	224.9	23.5	30	PASS
4	2437	21.4	22.0	296.5	24.7	30	PASS
7	2452	20.2	21.4	242.8	23.9	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-4.6	8	PASS
6	2437	-3.9	8	PASS
11	2462	-4.7	8	PASS

CH6

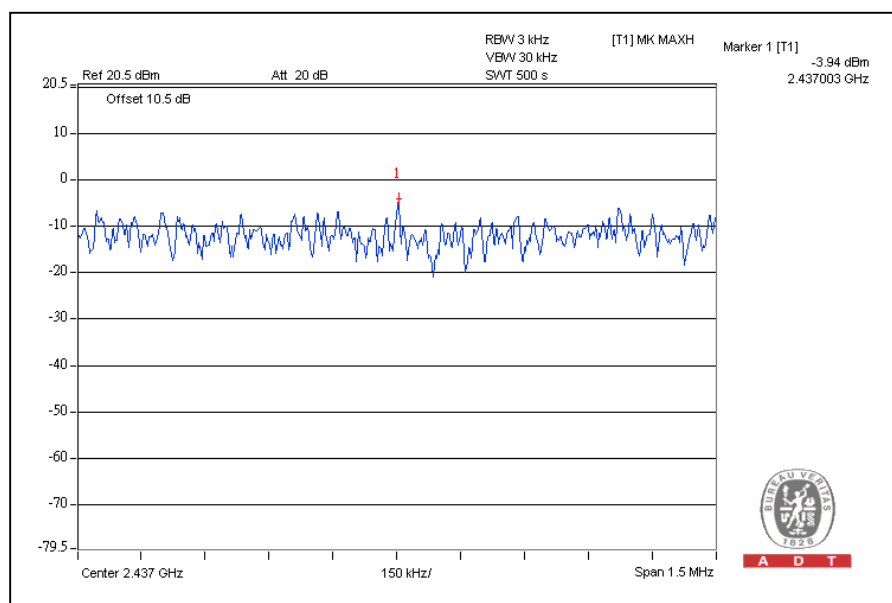




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-13.9	8	PASS
6	2437	-10.7	8	PASS
11	2462	-15.6	8	PASS


CH6

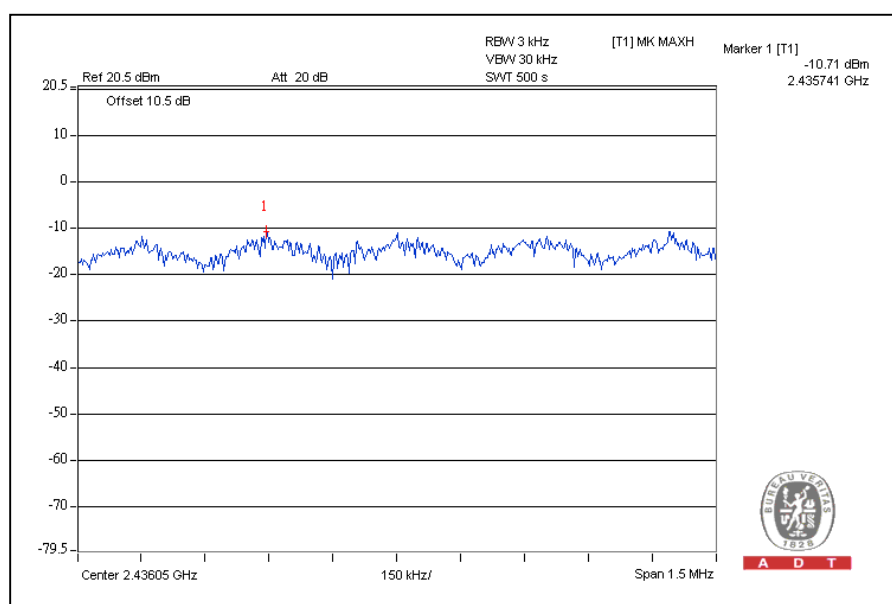

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
1	2412	-15.9	-15.9	-12.9	8	PASS
6	2437	-11.3	-10.8	-8.0	8	PASS
11	2462	-16.7	-15.7	-13.2	8	PASS


For Chain(1): CH6

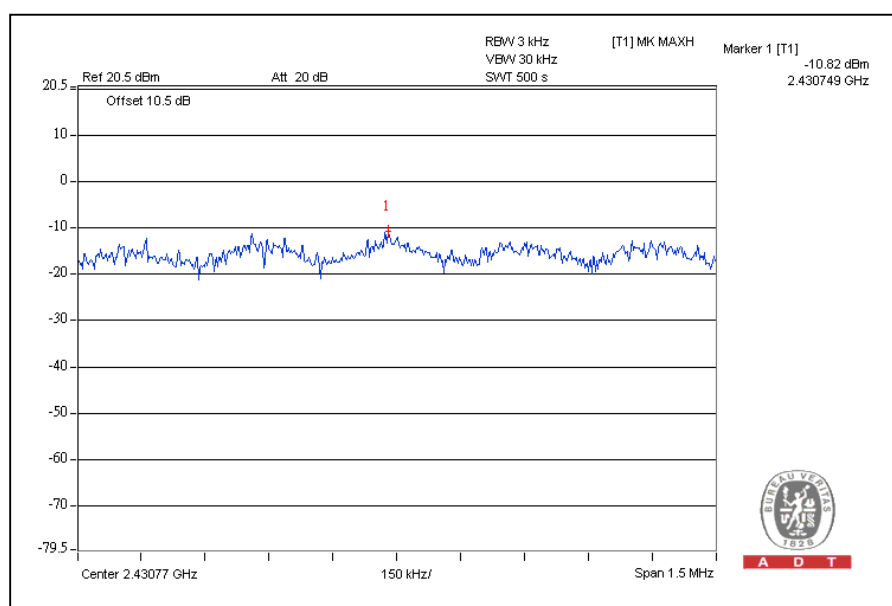

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
1	2422	-18.0	-18.5	-15.2	8	PASS
4	2437	-17.8	-17.4	-14.6	8	PASS
7	2452	-18.8	-18.2	-15.5	8	PASS

For Chain (1): CH4

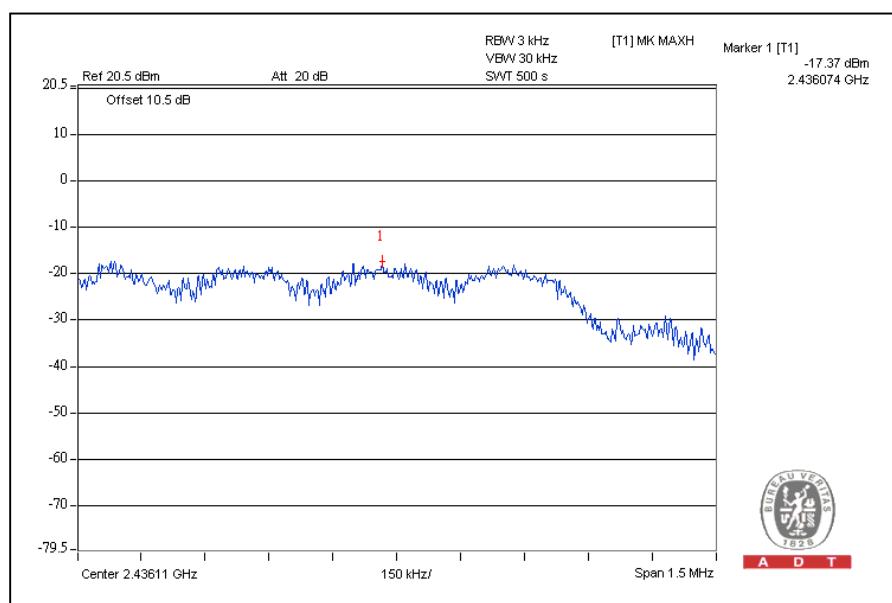

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz or 200 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH1

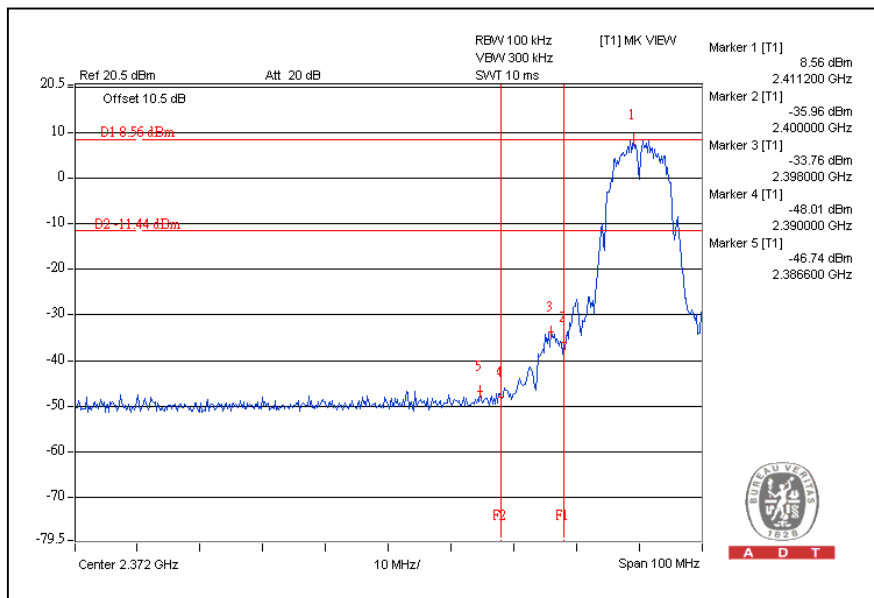


CH11

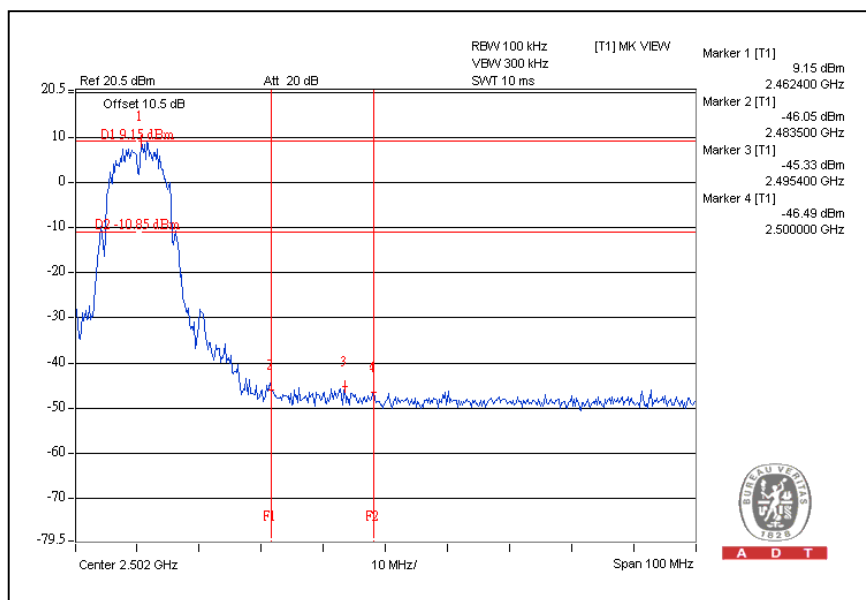

CH1

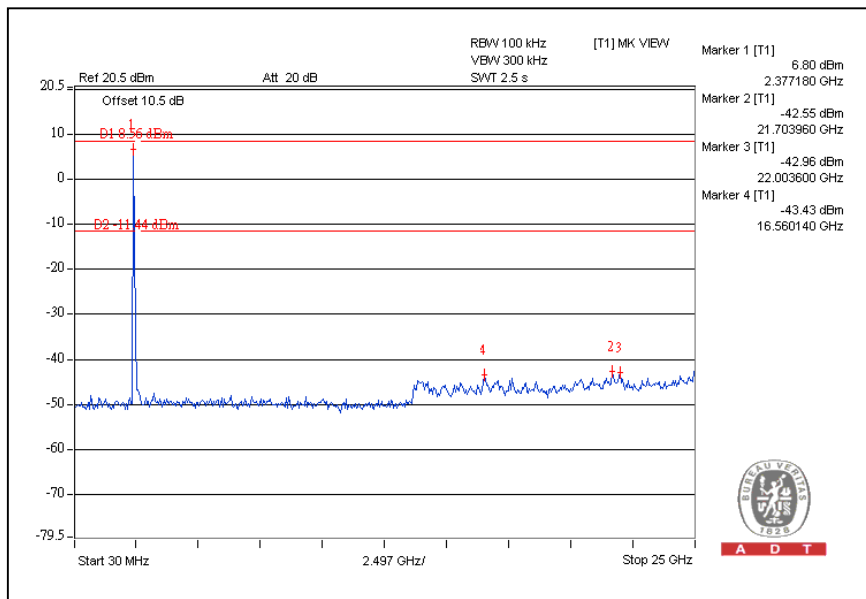


CH11

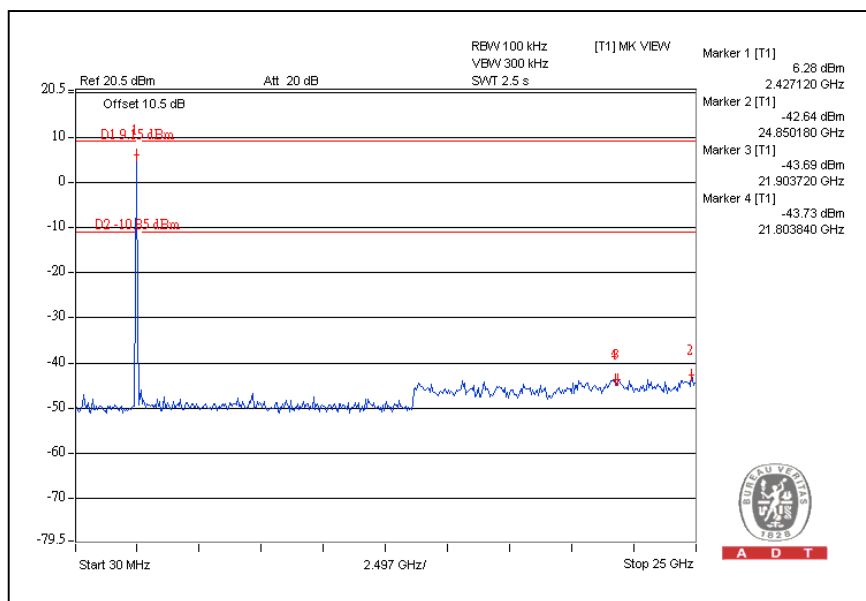


802.11g OFDM MODULATION:


CH1

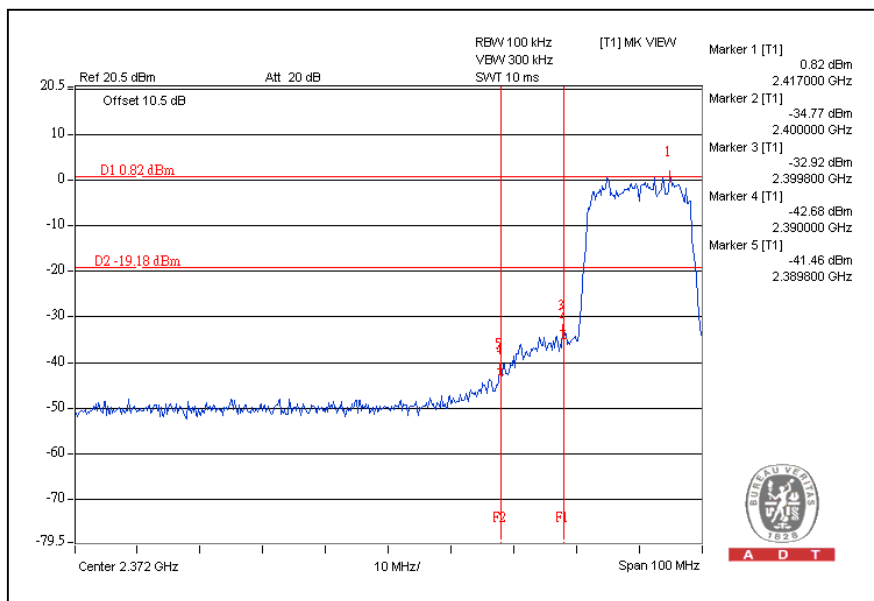


CH11

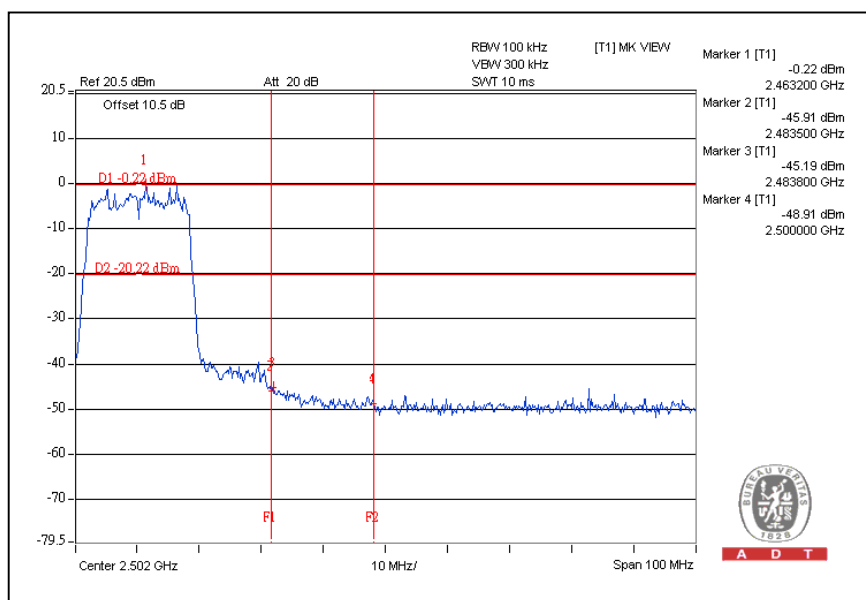

CH1

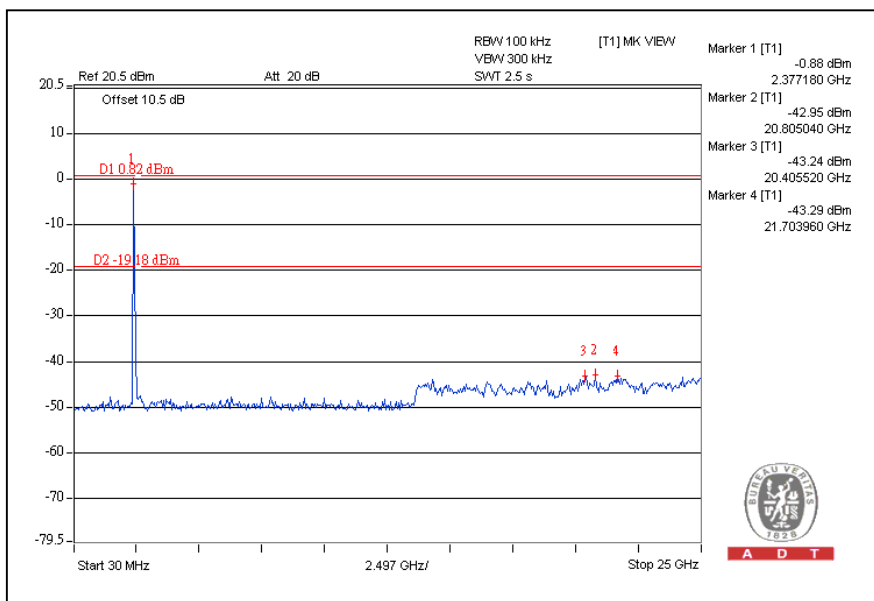


CH11

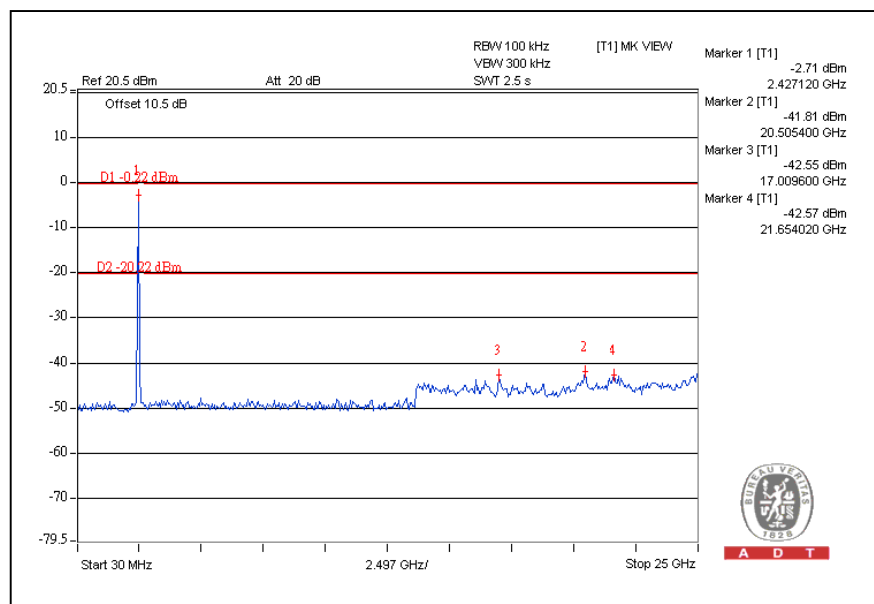


802.11n (20MHz) OFDM MODULATION:


CH1

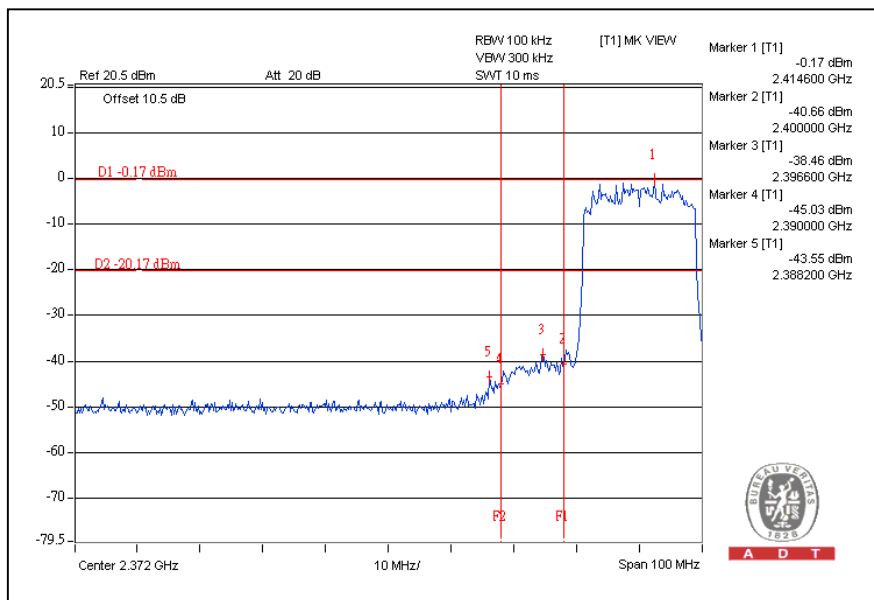


CH11

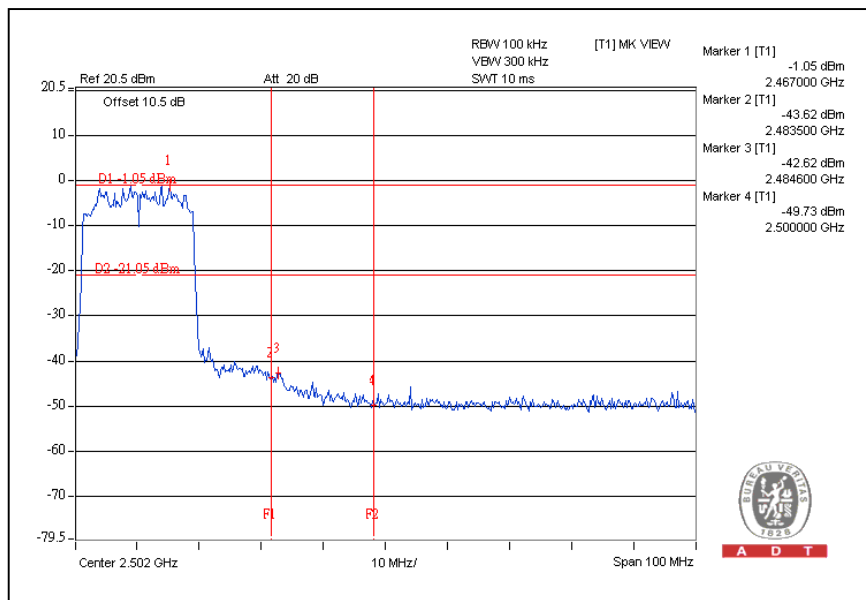

CH1

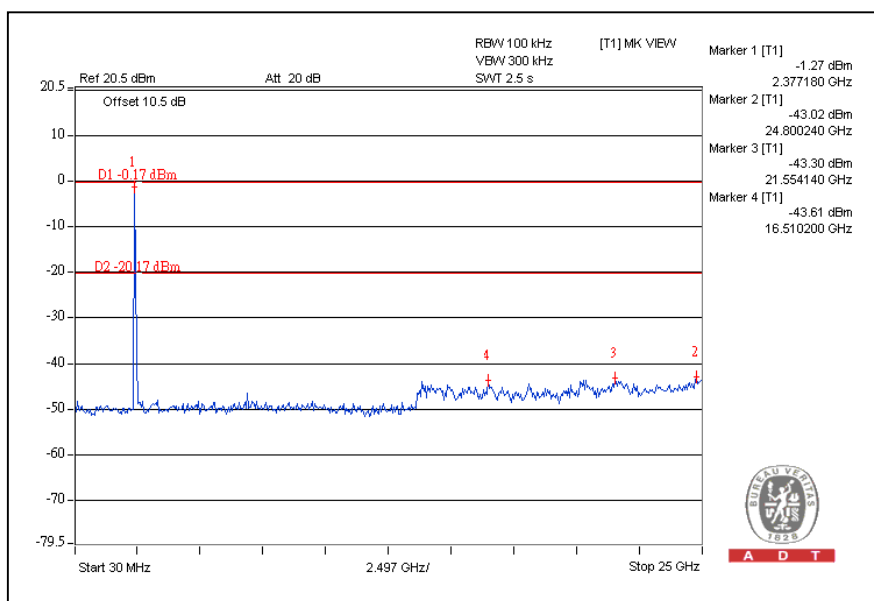


CH11

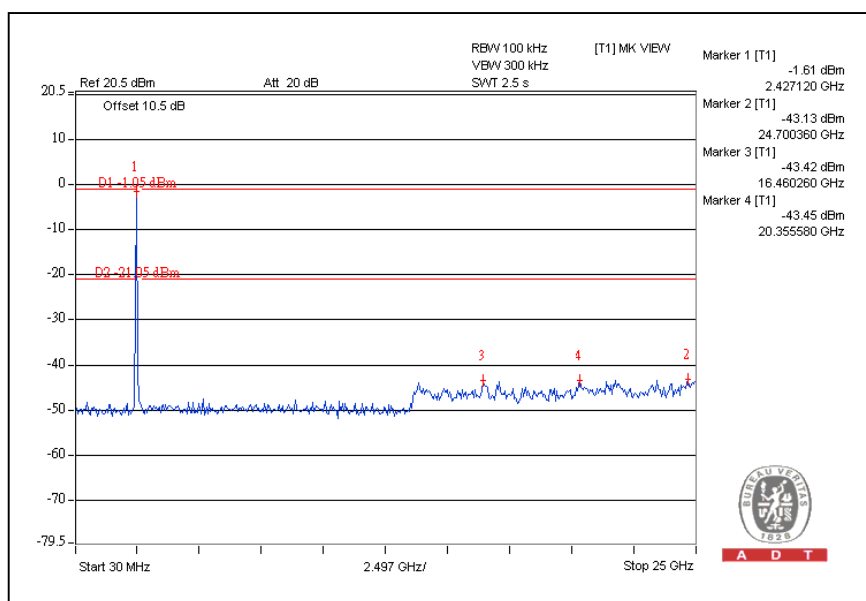


802.11n (40MHz) OFDM MODULATION:


CH1

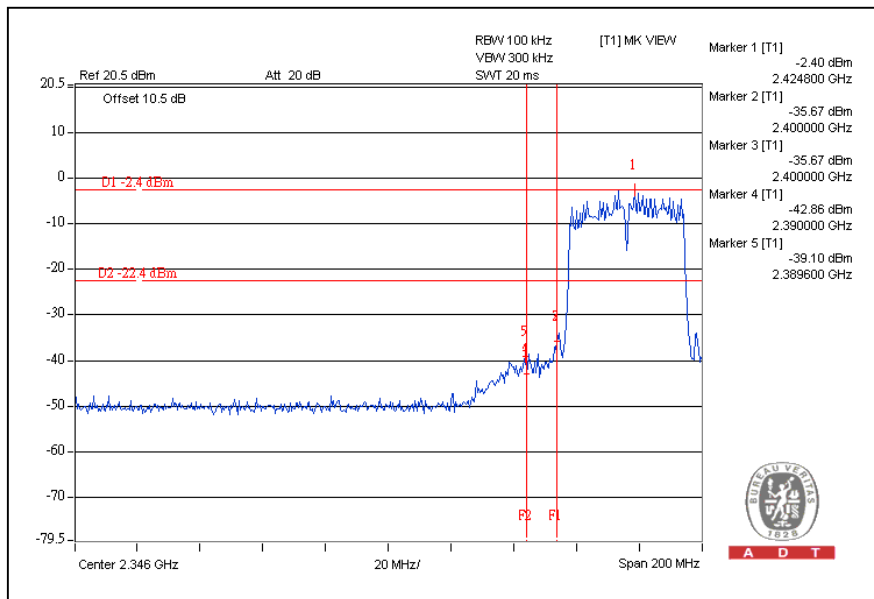


CH7

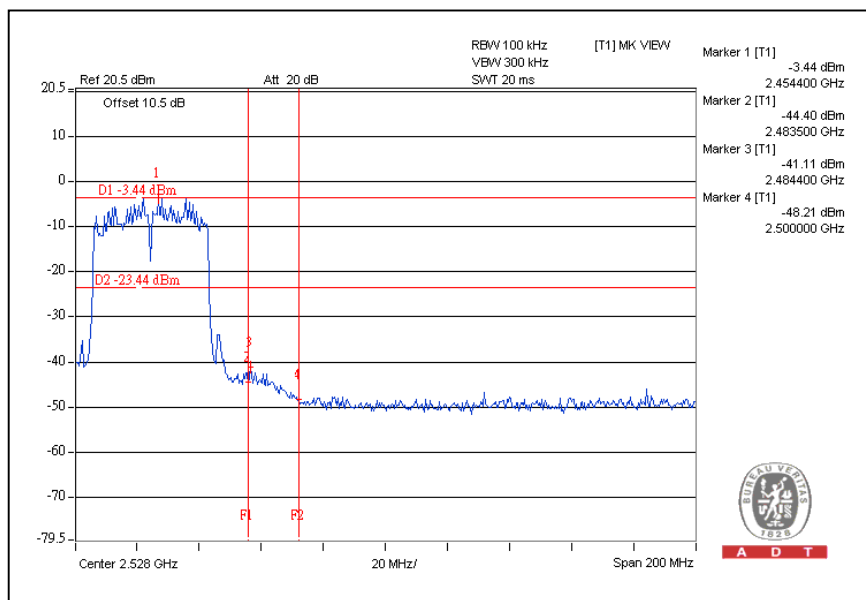

CH1

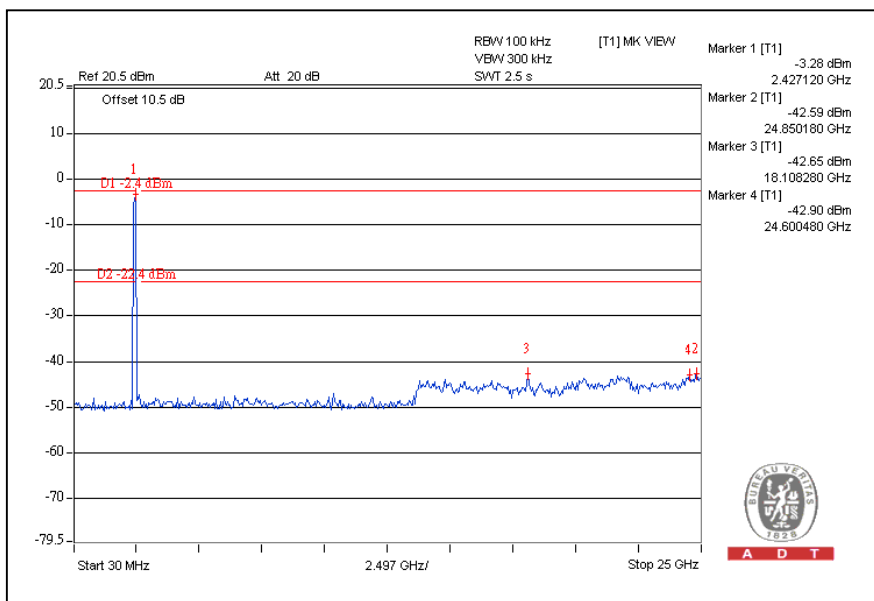

CH7

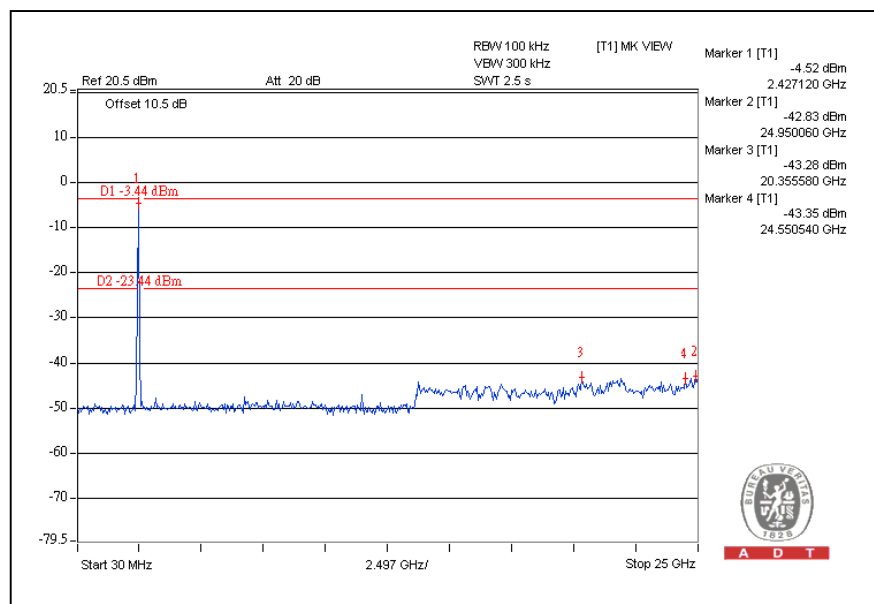

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---