



**SAR Evaluation Report
for
Industry Canada RSS-102 Issue 4
and
FCC OET Bulletin 65 Supplement C**

Report No.: 12-08-MAS-184-02

Client: **Unication CO., LTD.**

Product: **G1 Voice Pager**

Model: **G1**

FCC ID: **LEA-G1**

IC ID: **3819A-G1**

Manufacturer/supplier: **Unication CO., LTD.**

Date test item received: 2012/08/16

Date test campaign completed: 2012/10/29

Date of issue: 2012/10/29



Test Result: ☒ Compliance ☐ Not Compliance

Statement of Compliance:

The SAR values measured for the test sample are below the maximum recommended level of 1.6 W/kg averaged over any 1g tissue according to Industry Canada RSS-102 (Issue 4, 2010) and FCC OET Bulletin 65 Supplement C (Edition 01-01).

The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 155 pages

Test Engineer	Checked by	Approved by
 Hsin-Pei	 Perry Lin	 James Cheng

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

Applicant Information

Client	: Unication CO., LTD.
Address	: 5F, NO. 6, Wu-Kung 5Rd. Hsinchuang City, Taipei, Taiwan ROC.
Manufacturer	: Unication CO., LTD.
Address	: 5F, NO. 6, Wu-Kung 5Rd. Hsinchuang City, Taipei, Taiwan ROC.
EUT	: G1 Voice Pager
Trade Name	Unication
Model No.	: G1
Standard Applied	: Industry Canada RSS-102 Issue 4 (March, 2010) FCC OET 65 Supplement C (Edition 01-01, June 2001) IEEE Standard 1528-2003
Test Location	: Electronics Testing Center, Taiwan (www.etc.org.tw) No.8, Lane 29, Wenming RD., LeShan Tsuen, GuiShan Shiang, Taoyuan County 33383, Taiwan, R.O.C.

The G1 Voice Pager is in compliance with the FCC Report and Order 93-326 and Health Canada Safety Code 6, and the tests were performed according to the FCC OET65c and RSS-102 for uncontrolled exposure.

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, TAF, NCC, NVLAP, ILAC MRA, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through TAF
- ⑤ FCC Registration Number: 91095, 392735, 278818
- ⑥ Industry Canada Site Registration number: IC 2949A-2



NVLAP Lab Code 200133-0

Table of Contents

EXECUTIVE SUMMARY	5
1 GENERAL INFORMATION	6
1.1 Description of Equipment Under Test	6
1.2 Photograph of EUT	6
1.3 Environment Conditions	7
1.4 FCC Requirements for SAR Compliance Testing	7
1.4.1 RF Exposure Limits	7
1.5 The SAR Measurement Procedure for Mobile	8
1.5.1 General Requirements	8
1.5.2 Phantom Requirements	8
1.5.3 Test Positions	8
1.5.4 Test Procedures	10
2 DESCRIPTION OF THE TEST EQUIPMENT	11
2.1 Test Equipment List	11
2.2 DASY4 Measurement System Diagram	13
2.3 DASY4 Measurement Server	15
2.4 DAE (Data Acquisition Electronics)	16
2.5 Phantom	17
2.6 Device Holder	18
2.7 Specifications of Probes	19
2.8 SAR Measurement Procedures in DASY4	19
2.9 Simulating Liquids	20
2.10 Justification for Extended SAR Dipole Calibrations	21
2.11 System Performance Check	22
2.11.1 Purpose	22
2.11.2 System Performance Check Procedure	22
2.11.3 System Performance Check Setup	23
2.11.4 Result of System Performance Check: Valid Result	24
2.11.5 Peak Output Power Measurements Result	25
3 RESULTS	26
3.1 Summary of Test Results	26
3.2 850MHz band - Body	26
3.3 1900MHz band - Body	26
3.4 850MHz band - Head	27
3.5 1900MHz band - Head	27
3.6 Measurement Position (Including LC, LT, RC, RT)	28
3.6.1 Left-Cheek (LC)	28

3.6.2	Left-Tilt (LT)	28
3.6.3	Right-Cheek (RC)	29
3.6.4	Right-Tilt (RT).....	29
3.6.5	EUT Position A.....	30
4	THE DESCRIPTION OF TEST PROCEDURE FOR FCC.....	31
4.1	Scan Procedure.....	31
4.2	SAR Averaging Methods	31
4.3	Data Storage	31
4.4	Data Evaluation.....	32
4.5	Spatial Peak SAR Evaluation.....	34
5	MEASUREMENT UNCERTAINTY (300MHz~3GHz)	35
6	References	36
7	ANNEX : TEST RESULTS OF DASY4 (REFER TO ANNEX).....	36

Executive Summary

The product is a G1 Voice Pager operating in the 850MHz and 1900 MHz frequency ranges. The measurements was conducted by ETC and carried out with the dosimetric assessment system – DASY4.

The measurements of handset were conducted according to FCC OET 65 Supplement C [Reference 5] for evaluating compliance with requirements of FCC Report and Order 96-326 [Reference 3] and also according to Industry Standard RSS-102 Issue 4 [Reference 8] for evaluating compliance with requirements of Health Canada Safety Code 6[Reference 9].

The device's frequency range is followed as:

GSM850		DCS1900	
CH	MHz	CH	MHz
128	824.2	512	1850.2
190	836.6	661	1880.0
251	848.8	810	1909.8

This device includes GSM, Bluetooth and Pager function. This device only can use GSM to make the emergency call. GSM and Bluetooth function cannot operate at the same time. No headset (cable) or Bluetooth headset can use by user when the GSM emergency call is making. The device is only to connect the voice message from voice pager receiver to a Bluetooth headset.

The maximum output power of Bluetooth is not over $60/f_{\text{(GHz)}}$ mW. No SAR evaluation required since transmitter output power is below FCC threshold.

1 General Information

1.1 Description of Equipment Under Test

EUT Type	G1 Voice Pager	
Trade Name	Unication	
Model Name	G1	
Hardware version	N/A	
Software version	N/A	
Tx Frequency	824.2 MHz ~ 848.8 MHz ; 1850.2 ~ 1909.8 MHz	
Rx Frequency	824.2 MHz ~ 848.8 MHz ; 1850.2 ~ 1909.8 MHz	
Antenna Type	Internal Type	
Max. conducted output power	30.89 dBm (measured in CH190)	
Device Category	Portable Part	
RF Exposure Environment	General Population / Uncontrolled	
Power supply	Internal battery (NiMH / 2.4V / 750mAh)	
Crest Factor	8.3	
Body-Worn Operation	☒ Yes	☐ No

1.2 Photograph of EUT

Front



Back



1.3 Environment Conditions

Item	Target	Measured
Ambient Temperature (°C)	15 ~ 30	24 ± 1
Temperature of Simulant (°C)	20 ~ 24	24 ± 1
Relative Humidity(% RH)	30 ~ 70	60 ~ 70

1.4 FCC Requirements for SAR Compliance Testing

According to the FCC order “Guidelines for Evaluating the Environmental Effects of RF Radiation”, for consumer products, the SAR limit is **1.6W/kg** for an uncontrolled environment and **8.0W/kg** for an occupational/controlled environment. Pursuant to the Supplement C of OET Bulletin 65 “Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields”, released on June 29, 2001 by FCC, the equipment under test should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for intended or normal operation, incorporating normal antenna operating positions, equipment under test peak performance frequencies and positions for maximum RF power coupling.

1.4.1 RF Exposure Limits

	Whole-Body	Partial-Body	Arms and Legs
Population/Uncontrolled Environments (W/kg)	0.08	1.6	4.0
Occupational/Controlled Environments (W/kg)	0.4	8.0	20.0

Notes:

1. Population/Uncontrolled Environments: Locations where there is the exposure of individuals who have no sense or control of their exposure.
2. Occupational/Controlled Environments: Locations where there is exposure that may be incurred by people who have knowledge of the potential for exposure.
3. Whole-Body: SAR is averaged over the entire body.
4. Partial-Body: SAR is averaged over any 1g of tissue volume as defined in specification.
5. Arms and Legs: SAR is averaged over 10g of tissue volume as defined in specification.

1.5 The SAR Measurement Procedure for Mobile

1.5.1 General Requirements

The test should be performance in a laboratory without influence on SAR measurements by ambient RF sources and any reflection from the environment inside. The ambient temperature should be kept in the range of 18°C to 25°C with a maximum variation within $\pm 2^\circ\text{C}$ during the test.

1.5.2 Phantom Requirements

The phantoms used in test are simplified representations of the human head and body as a specific shaped container for the head or body simulating liquids. The physical characteristics of the phantom models should resemble the head and the body of a mobile user since the shape is a dominant parameter for exposure. The shell of the phantom should be made of low loss and low permittivity material and the thickness tolerance should be less than 0.2 mm. In addition, the phantoms should provide simulations of both right and left hand operations.

1.5.3 Test Positions

Due to a fact of that it cannot be expected that all mobile user will hold the mobile exactly in one well-defined position, different operational conditions should be conducted. IEEE 1528-2003 [Reference 7] requires two test positions: the cheek and tilted positions. In each test position the acoustic output should be placed directly at the entrance of the auditory canal in phantom.

The acoustic output is defined in Fig. 1. There are two imaginary lines defined on the handset: the vertical center line and the horizontal line and the cross of these two lines is the acoustic output. The human head position is given by means of a reference plane defined by the following three reference points: RE (Right-Ear), LE (Left-Ear) and M (Mouth) and shown in Fig. 2 and 3.

The Cheek Position: the vertical center line should lie in the reference plane and the acoustic output meets the reference points RE or LE. The vertical center line should align to the line connecting the point M to points RE or LE and the angle between these two lines should be reduced to minimum by touching the cheek of the phantom with handset.

The Tilted Position: same as Cheek Position but only change the angle by 15° between vertical center line and the line connecting the point M to points RE or LE.

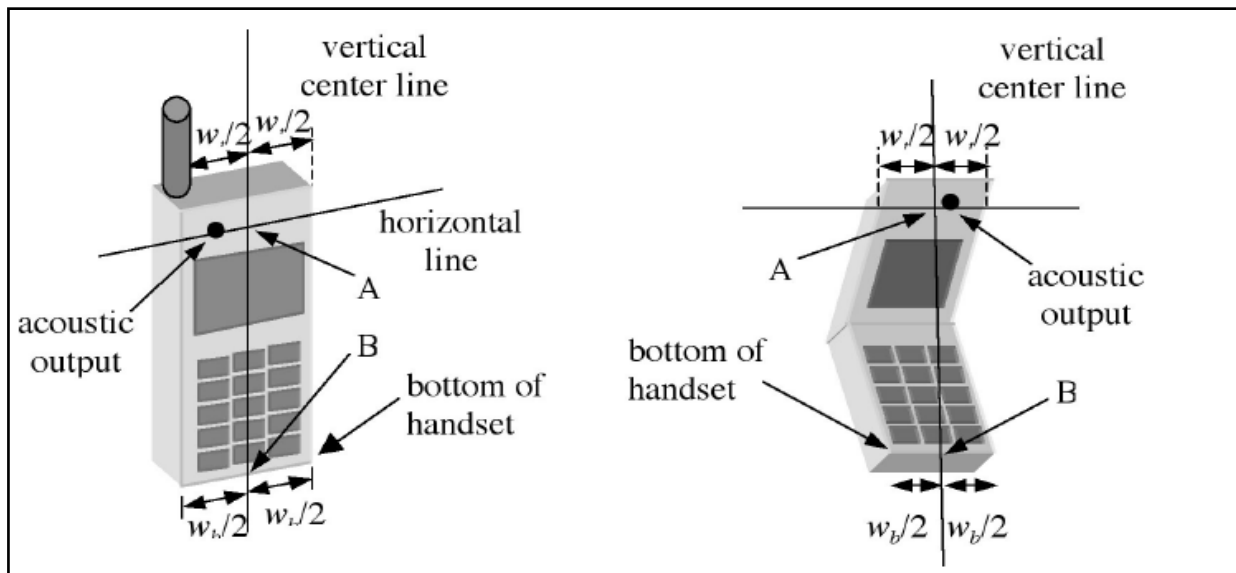


Fig.1 Test reference points on handset

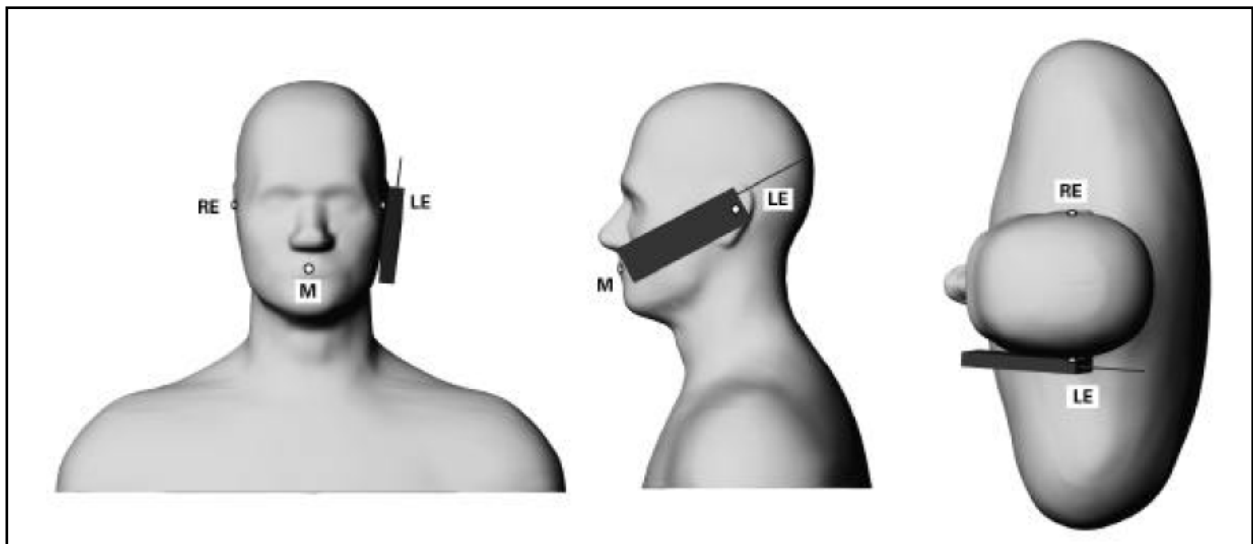


Fig. 2 Cheek Position


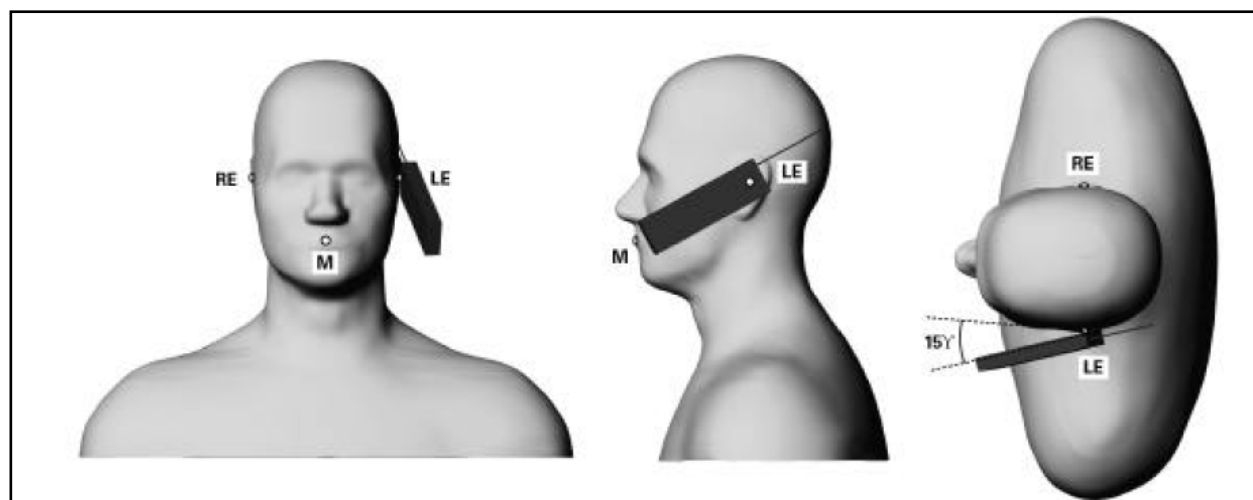


Fig. 3 Tilted Position

1.5.4 Test Procedures

The SAR test should be performed with both Cheek Position and Tilted Position mentioned above. The detailed procedure is referenced to the following flow chart to apply SAR test on G1 Voice Pager for HEAD.

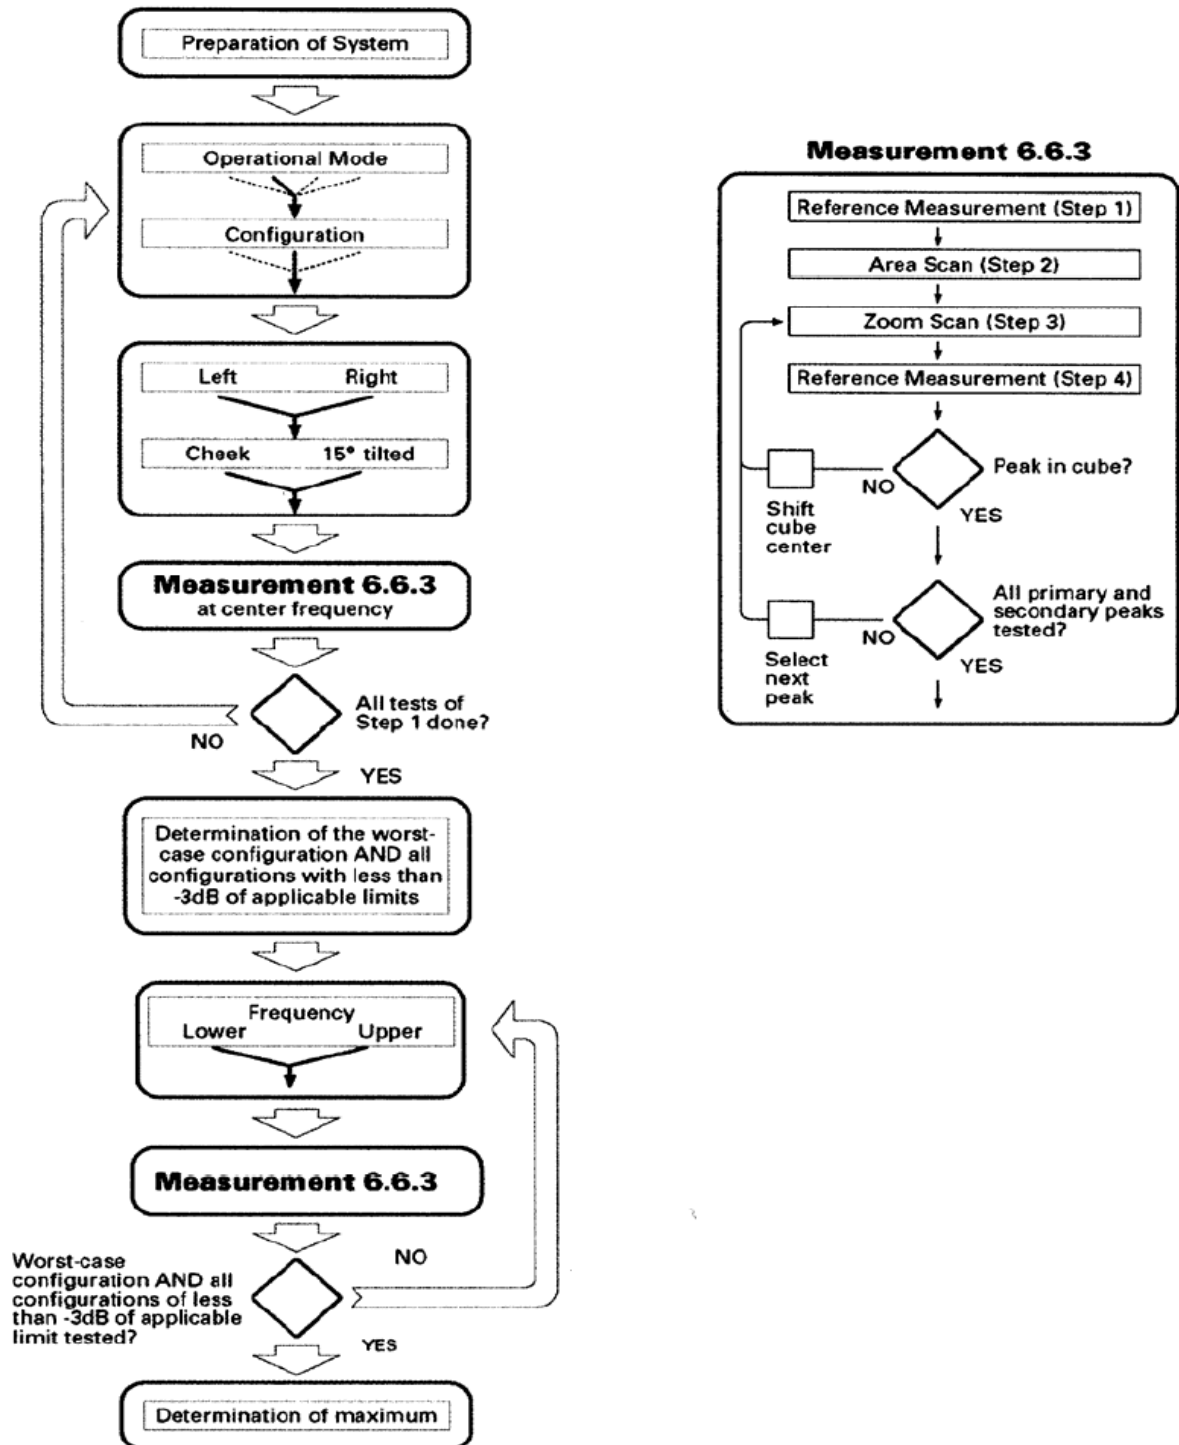

2 Description of the Test Equipment

The measurements were performed using an automated near-field scanning system, DASY4 software, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the test device was the ‘worstcase extrapolation’ algorithm.

2.1 Test Equipment List

Equipment	Manufacturer	Type	S/N	Calibration Expiry
Robot	Staubli	RX90B L	F03/5W16A1/A/01	(not necessary)
Robot Controller	Staubli	CS7MB	F03/5W16A1/C/01	(not necessary)
Teach Pendant	Staubli	-----	D221340061	(not necessary)
E-field Probe	Schmid & Partner Engineering AG	EX3DV4	3555	2012-09-28
E-field Probe	Schmid & Partner Engineering AG	EX3DV4	3555	2013-09-27
Dipole Validation Kit	Schmid & Partner Engineering AG	D835V2	4d130	2013-02-02
DAE4	Schmid & Partner Engineering AG	-----	629	2012-09-22
DAE4	Schmid & Partner Engineering AG	-----	629	2013-09-26
Dipole Validation Kit	Schmid & Partner Engineering AG	D900V2	1d010	2014-09-23
Dipole Validation Kit	Schmid & Partner Engineering AG	D1900V2	5d054	2012-09-16
Dipole Validation Kit	Schmid & Partner Engineering AG	D1900V2	5d054	2014-09-30
DIGITAL RADIO TESTER	Rohde & Schwarz	CTS 60	1094.0006.60 Sr.100584	2013-07-24
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	101006	2013-04-22
Thermo-Hygro.meter	TFA	-----	-----	2013-07-22
Directional Coupler	Amplifier Research	DC7420	310569	2013-09-12
DASY4 Software	Schmid & Partner Engineering AG	-----	Version 4.6B23	To automatically control the robot and perform the SAR measurement
SEMCAD Software	Schmid & Partner Engineering AG	-----	Version 1.8B160	Post-processing and report management
Signal Generator	Agilent	83640B	3844A01143	2013-10-07
Amplifier	Mini-Circuits	ZHL-42W	D111704-01-02	2013-09-12
Power Meter	BOONTON	4532-0102	136601	2013-06-20
Power Sensor	BOONTON	51011-EMC	32861	2013-06-20
S-Parameter Network Analyzer	Agilent	8753ES	MY40001340	2013-02-15
Calibration Kit	Agilent	85033C	2920A03287	(not necessary)

Dielectric Probe Kit	Agilent	85070E	MY44300101	(not necessary)
----------------------	---------	--------	------------	-----------------

2.2 DASY4 Measurement System Diagram

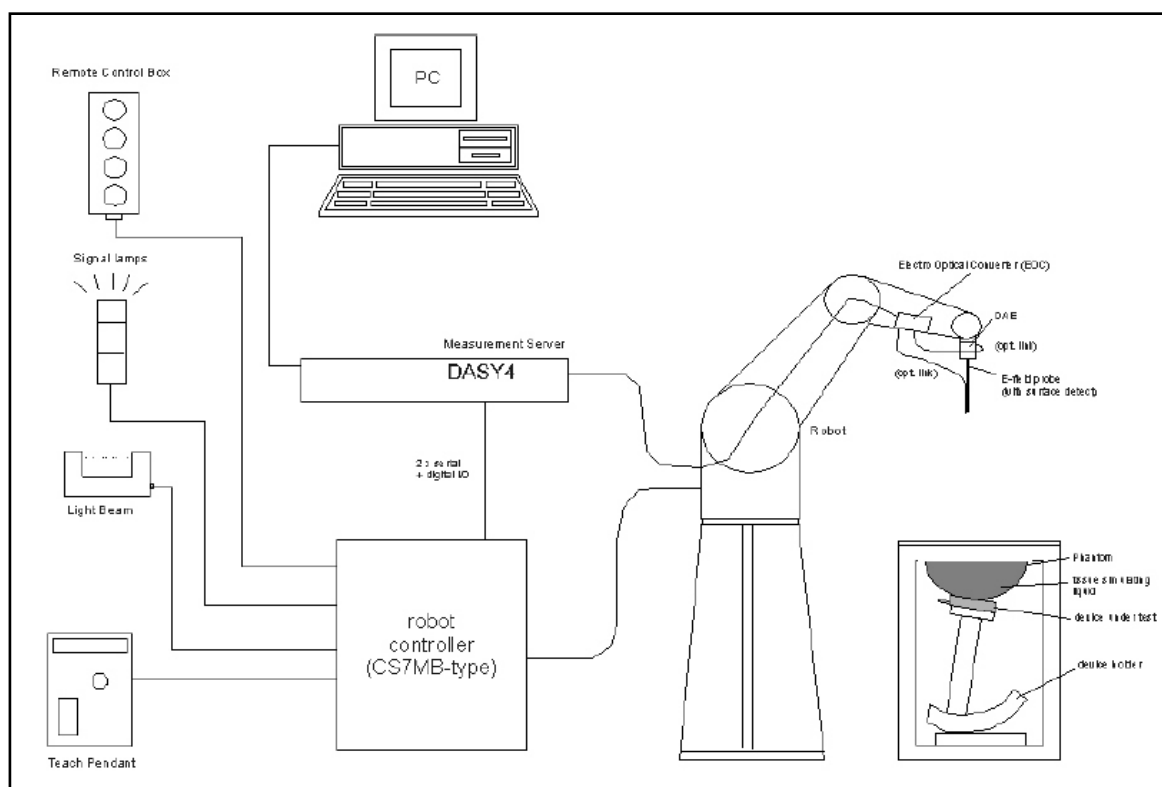


Fig. 4 The DASY4 Measurement System



Fig. 5 The DASY4 System Photo

The DASY4 system consists of the following items:

- A fixed-on-ground high precision 6-axis robot with controller and software and an arm extension for moving the Data Acquisition Electronics (DAE) and Probe.
- A dosimetric probe, an isotropic E-field probe optimized and calibrated for usage in head or body tissue simulating liquids. Some of the probes are equipped with an optical surface detector system.
- A Data Acquisition Electronic (DAE) performing the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. DAE is powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to Electro-Optical Coupler (EOC).
- The EOC performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server performing all real-time data evaluation for field measurements and surface detection, controlling robot movements and handling safety operation. A computer with operating Windows 2000 is used for server.
- DASY4 software and SEMCAD data evaluation software are installed in PC.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed well according to the given recipes.
- System validation dipoles is used to validate the proper functioning of the system

2.3 DASY4 Measurement Server



Fig. 6 DASY4 Measurement Server

The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server.

2.4 DAE (Data Acquisition Electronics)



Fig. 7 DAE Photo

Some probes are equipped with an optical multifiber line, ending at the front of the probe tip. This line is connected to the EOC box on the robot arm and provides automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. If the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases during the approach, reaches a maximum and then decreases. If the probe perpendicularly touches the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped upon reaching the maximum.

The optical surface detection works in transparent liquids and on di_use reflecting surfaces with a repeatability of better than ± 0.1 mm. The distance of the maximum depends on the fiber and the surrounding media. It is typically 1.0 mm to 2.0 mm in tissue simulating mixtures. The distance can be measured with the surface check job (described in the reference guide).

2.5 Phantom

SAM Twin Phantom V4.0:

The phantom used for all tests i.e. for both system performance checking and device testing, was the twinheaded "SAM Twin Phantom V4.0", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

SAM Phantom ELI4:

Phantom for compliance testing of handheld and body mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid.



Fig. 8 SAM Twin Phantom and ELI4 Phantom

2.6 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integrated part of the Dasy system.



Fig. 9 Device holder supplied by SPEAG

2.7 Specifications of Probes

The E-Field Probes ET3DV6 or EX3DV4, manufactured and calibrated annually by Schmid & Partner Engineering AG with following specification are used for the dosimetric measurements.

ET3DV6:

- Dynamic range: $5 \mu\text{W/g} \sim 100 \text{ mW/g}$
- Tip diameter: 6.8 mm
- Probe linearity: $\pm 0.2 \text{ dB}$ (30MHz to 3 GHz)
- Axial isotropy: $\pm 0.2 \text{ dB}$
- Spherical isotropy: $\pm 0.4 \text{ dB}$
- Distance from probe tip to dipole centers: 2.7 mm
- Calibration range: 900MHz/1750MHz/1900MHz/ /2450MHz for head and body simulating liquids.

EX3DV4:

- Dynamic range: $10 \mu\text{W/g} \sim 100 \text{ mW/g}$
- Tip diameter: 2.5 mm
- Probe linearity: $\pm 0.2 \text{ dB}$ (30MHz to 3 GHz)
- Axial isotropy: $\pm 0.2 \text{ dB}$
- Spherical isotropy: $\pm 0.4 \text{ dB}$
- Distance from probe tip to dipole centers: 1.0 mm
- Calibration range: 900MHz/1810MHz for head simulating liquid and

2.8 SAR Measurement Procedures in DASY4

Step 1 Setup a Call Connection

Establish a call in handset at the maximum power level with a base station simulator via air interface.

Step 2 Power Reference Measurement

To measure the local E-field value at a fixed location which value will be taken as a reference value for calculating a possible power drift.

Step 3 Area Scan

To measure the SAR distribution with a grid with spacing of 15 mm x 15 mm and kept with a constant distance to the inner surface of the phantom. Additional all peaks within 3 dB of the maximum SAR are searched.

Step 4 Zoom Scan

At these points (maximum number of SAR peaks is two), a cube of 32 mm x 32 mm x 30 mm is applied to and measured with 5 x 5 x 7 points. With these measured data, a peak spatial-average SAR value can be calculated by SEMCAD software.

Step 5 Power Drift Measurement

Repetition of the E-field measurement at the fixed location mentioned in Step 1 to make sure the two results differ by less than $\pm 0.2 \text{ dB}$.

2.9 Simulating Liquids

Liquid Recipes for this test report are as following:

HSL 900MHz Band (Head)

Ingredient	% by weight
Water	52
Sugar	46.6
Salt	1.15
Preventol	0.25

1900MHz band

Ingredient	% by weight
Water	55.85
Diethylene Glycol Butyl Ether(DGBE)	44.00
Salt	0.15

2.10 Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 2 years ago but more than 1 year ago were confirmed in maintaining return loss ($\leq -20\text{dB}$, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 450824:

Extended Dipole Calibration Data

D900V2 SN:1d010				
Date of Measurement	Return Loss	$\Delta\%$	Impedance	$\Delta\Omega$
2010/09/17	-21.7dB	---	45.6 Ω	---
2011/09/18	-24.2dB	-7	48.2 Ω	+2.6
D1800V2 SN:2d103				
Date of Measurement	Return Loss	$\Delta\%$	Impedance	$\Delta\Omega$
2010/09/21	-26.8dB	---	46.1 Ω	---
2011/09/20	-28.2dB	-5	47.6 Ω	+1.5
D1900V2 SN:5d054				
Date of Measurement	Return Loss	$\Delta\%$	Impedance	$\Delta\Omega$
2010/09/21	-24.9dB	---	50 Ω	---
2011/09/20	-25.7dB	-8	50.3 Ω	+0.3
D2450V2 SN:764				
Date of Measurement	Return Loss	$\Delta\%$	Impedance	$\Delta\Omega$
2010/09/21	-28.9dB	---	48.8 Ω	---
2011/09/25	-29.8dB	-3	49.3 Ω	+0.5

2.11 System Performance Check

2.11.1 Purpose

1. To verify the simulating liquids are valid for testing.
2. To verify the performance of testing system is valid for testing.

2.11.2 System Performance Check Procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and the system performance check. They are read-only document files and destined as fully defined but unmeasured masks, so the finished system performance check must be saved under a different name. The system performance check document requires the SAM Twin Phantom, so this phantom must be properly installed in your system. (User defined measurement procedures can be created by opening a new document or editing an existing document file). Before you start the system performance check, you need only to tell the system with which components (probe, medium, and device) you are performing the system performance check; the system will take care of all parameters.


- **The Power Reference Measurement and Power Drift Measurement** jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ± 0.02 dB.

- **The Surface Check** job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid.

- **The Area Scan** job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. Schmid & Partner Engineering AG, DASY4 Manual, February 2005 16-2 System Performance Check Application Notes If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

- **The Zoom Scan** job measures the field in a volume around the peak SAR value assessed in the previous Area Scan job (for more information see the application note on SAR evaluation). If the system performance check gives reasonable results, the SAR peak, 1 g and 10 g spatial average SAR values normalized to 1W dipole input power give reference data for comparisons. The next sections analyze the expected uncertainties of these values, as well as additional checks for further information or troubleshooting.

2.11.3 System Performance Check Setup

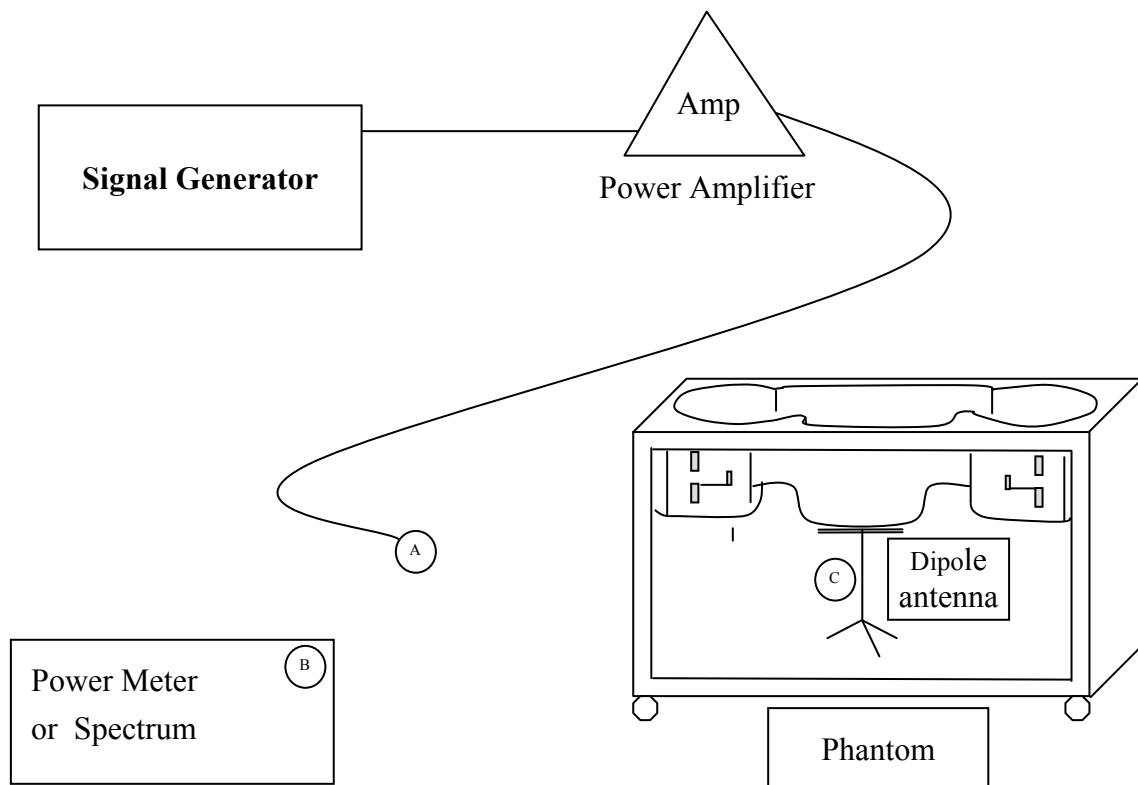

Note :

1. A connected to B is used to make sure whether the input power is 250mW for target frequency..
2. A connected to C is used to input the measured power to dipole antenna

2.11.4 Result of System Performance Check: Valid Result**850MHz band - Dipole Antenna: D835V2 (S/N: 4d130)**

Date of Measurement And Reference Value	SAR@1g [W/kg]	Dielectric Parameters		Temperature [°C]
		ϵ_r	σ [S/m]	
Body 835MHz Recommended Value	$2.4 \pm 10\%$ [2.16 ~ 2.64]	$53.3 \pm 5\%$ [50.635 ~ 55.965]	$0.98 \pm 5\%$ [0.931 ~ 1.029]	22.0 ± 2 [20 ~ 24]
2012-08-30	2.44	54.1	0.967	22.5

850MHz band - Dipole Antenna: D835V2 (S/N: 4d130)

Date of Measurement And Reference Value	SAR@1g [W/kg]	Dielectric Parameters		Temperature [°C]
		ϵ_r	σ [S/m]	
Head 835MHz Recommended Value	$2.33 \pm 10\%$ [2.097 ~ 2.563]	$41.8 \pm 5\%$ [39.71 ~ 43.89]	$0.89 \pm 5\%$ [0.8455 ~ 0.9345]	22.0 ± 2 [20 ~ 24]
2012-08-30	2.22	42.6	0.905	22.5

1900MHz band - Dipole Antenna: D1900V2 (S/N: 5d054)

Date of Measurement And Reference Value	SAR@1g [W/kg]	Dielectric Parameters		Temperature [°C]
		ϵ_r	σ [S/m]	
Body 1900MHz Recommended Value	$10 \pm 10\%$ [9 ~ 11]	$52.5 \pm 5\%$ [49.875 ~ 55.125]	$1.54 \pm 5\%$ [1.463 ~ 1.617]	22.0 ± 2 [20 ~ 24]
2012-10-23	10.4	55.5	1.44	22.5
2012-10-29	10.7	55.5	1.44	22.3

1900MHz band - Dipole Antenna: D1900V2 (S/N: 5d054)

Date of Measurement And Reference Value	SAR@1g [W/kg]	Dielectric Parameters		Temperature [°C]
		ϵ_r	σ [S/m]	
Head 1900MHz Recommended Value	$9.63 \pm 10\%$ [8.886 ~ 10.593]	$39.7 \pm 5\%$ [37.715 ~ 41.685]	$1.41 \pm 5\%$ [1.3395 ~ 1.4805]	22.0 ± 2 [20 ~ 24]
2012-09-05	10.00	38.1	1.38	22.3
2012-09-06	9.95	38.1	1.38	22.3

2012-10-29	9.05	38.1	1.38	22.4
------------	------	------	------	------

2.11.5 Peak Output Power Measurements Result

Test Mode	Channel	Frequency(MHz)	Maximum Peak Output Power (dBm)
GSM850	128	824.2	30.32
	190	836.6	30.89
	251	848.8	30.87

Test Mode	Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)
PCS1900	512	1850.2	28.40
	661	1880.0	28.04
	810	1909.8	28.76

3 Results

3.1.1 Evaluation of SAR results

Evaluate the tune-up tolerances be take into account in scaling the SAR. The tune-up tolerance is $\pm 1.0/-2.0$ dB

Band/mode	EMC Power (dBm)	SAR Power (dBm)	Tune up Power					Measured SAR		Scaled SAR	
			Target (dBm)	Tolerance		Maximum (dBm)	Minimum (dBm)	Head (W/Kg)	Body (W/Kg)	Head (W/Kg)	Body (W/Kg)
				+	-						
850											
824.2	30.28	30.28	30.00	1.00	2.00	31.00	28.00	0.808	0.655	0.954	0.773
836.6	30.75	30.75	30.00	1.00	2.00	31.00	28.00	0.619	0.488	0.656	0.517
848.8	30.79	30.79	30.00	1.00	2.00	31.00	28.00	0.434	0.362	0.456	0.380
1900											
1850.2	28.40	28.40	28.00	1.00	2.00	29.00	26.00	0.738	0.843	0.859	1.206
1880	27.94	27.94	28.00	1.00	2.00	29.00	26.00	0.702	1.070	0.896	1.366
1909.8	28.58	28.58	28.00	1.00	2.00	29.00	26.00	0.665	0.961	0.733	1.059

Note: 1. The Scaled SAR = Measured SAR * $10^{((\text{Maximum Power} - \text{SAR Power})/10)}$.

2. The Scaled SAR results remain compliant.

3.1.2 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	☒
The deviations as specified in this chapter were ascertained in the course of the tests Performed.	☐

3.2 850MHz band - Body

Frequency		Mode	Conducted Power (dBm)			SAR@1g [W/kg]	Power Drift (dB)	Note
CH	MHz		Before	After	Drift			
128	824.2	Mid(GPRS)	30.28	30.18	-0.1	0.655	-0.053	Worst
190	836.6	Mid(GPRS)	30.75	30.65	-0.1	0.488	0.004	
251	848.8	Mid(GPRS)	30.79	30.59	-0.2	0.362	-0.026	

The Max Head SAR@850MHz@1g was 0.655 W/kg, less than limitation of 1.6 W/kg

3.3 1900MHz band - Body

Frequency		Mode	Conducted Power (dBm)			SAR@1g [W/kg]	Power Drift (dB)	Note
CH	MHz		Before	After	Drift			
512	1850.2	Mid(GPRS)	26.74	26.64	-0.1	1.05	0.028	
661	1880	Mid(GPRS)	27.94	27.74	-0.2	1.07	0.089	Worst
810	1909.8	Mid(GPRS)	28.58	28.48	-0.1	0.961	-0.066	

The Max Head SAR@1900MHz@1g was 1.07 W/kg, less than limitation of 1.6 W/kg.

3.4 850MHz band - Head

Frequency		Mode	Conducted Power (dBm)			SAR@1g [W/kg]	Power Drift (dB)	Note
CH	MHz		Before	After	Drift			
190	836.6	LC-Mid(GSM)	30.72	30.52	-0.2	0.619	0.000	
190	836.6	LT-Mid(GSM)	30.80	30.50	-0.3	0.496	-0.053	
190	836.6	RC-Mid(GSM)	30.73	30.63	-0.1	0.578	-0.121	
190	836.6	RT-Mid(GSM)	30.79	30.69	-0.1	0.476	-0.006	
251	848.8	LC-High(GSM)	30.80	30.60	-0.2	0.434	-0.002	
128	824.2	LC-Low(GSM)	30.25	30.05	-0.2	0.808	-0.017	Worst

The Max Head SAR@850MHz@1g was 0.808 W/kg, less than limitation of 1.6 W/kg.


3.5 1900MHz band - Head

Frequency		Mode	Conducted Power (dBm)			SAR@1g [W/kg]	Power Drift (dB)	Note
CH	MHz		Before	After	Drift			
661	1880.0	LC-Mid(GSM)	27.93	27.83	-0.1	0.702	-0.043	
661	1880.0	LT-Mid(GSM)	28.01	27.81	-0.2	0.684	0.148	
661	1880.0	RC -Mid(GSM)	27.89	27.69	-0.2	0.0012	0.130	
661	1880.0	RT-Mid(GSM)	27.96	27.76	-0.2	0.00706	-0.126	
810	1909.8	LC-High(GSM)	28.70	28.60	-0.1	0.665	-0.041	
512	1850.2	LC-Low(GSM)	26.74	26.64	-0.1	0.748	-0.125	Worst

The Max Head SAR@1900MHz@1g was 0.748 W/kg, less than limitation of 1.6 W/kg.


3.6 Measurement Position (Including LC, LT, RC, RT)

3.6.1 Left-Cheek (LC)

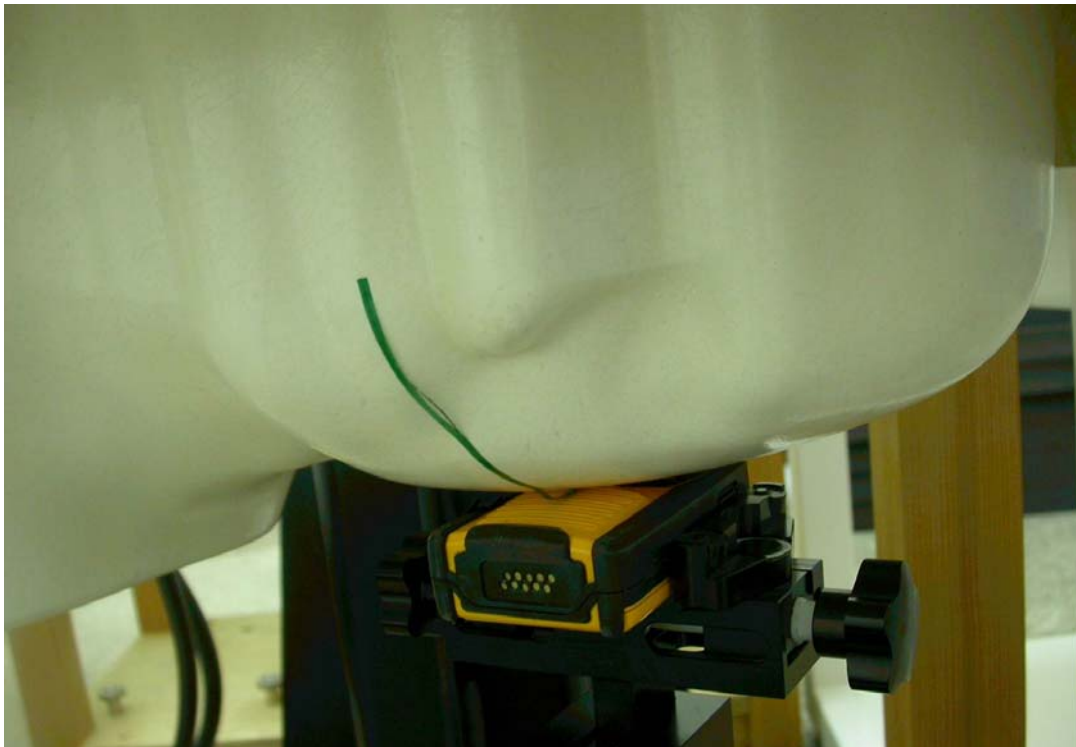

Measurement Position of Left-Cheek (LC) with Handset

3.6.2 Left-Tilt (LT)

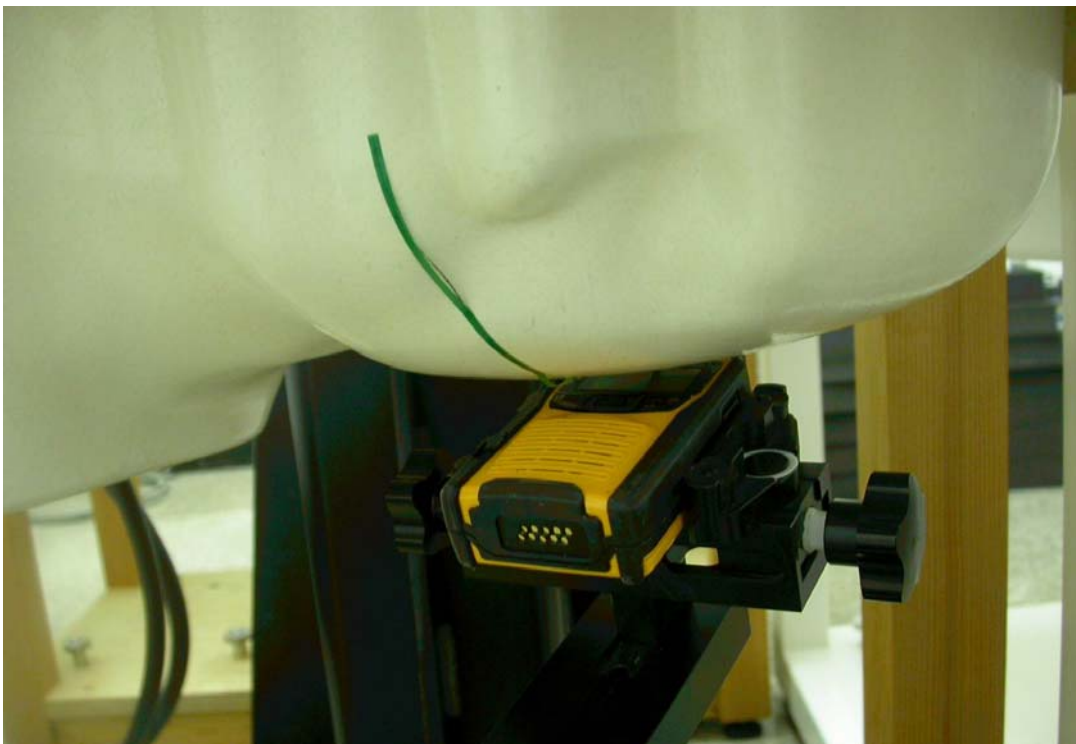

Measurement Position of Left-Tilt (LT) with Handset

3.6.3 Right-Cheek (RC)




Measurement Position of Right-Cheek (RC) with Handset

3.6.4 Right-Tilt (RT)



Measurement Position of Right-Tilt (RT) with Handset

3.6.5 EUT Position A

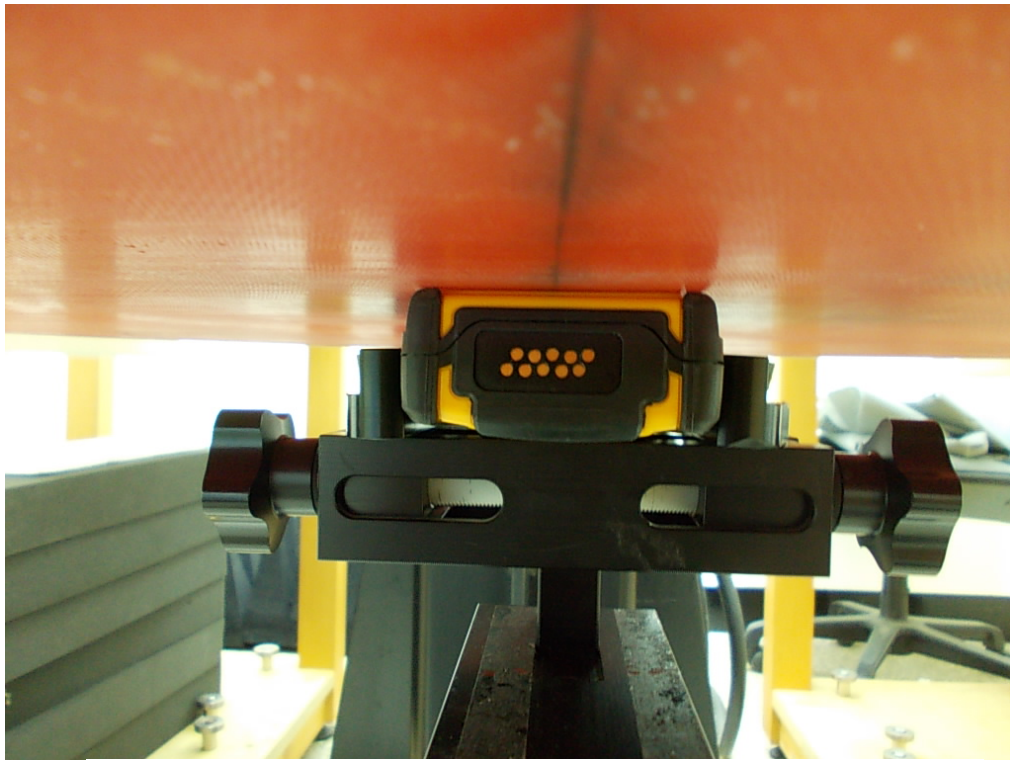

The Bottom site of the EUT to the ELI4 phantom distance: 0 mm.

4 The Description of Test Procedure for FCC

4.1 Scan Procedure

First coarse scans were used for determination of the field distribution. Next a cube scan, 5x5x7 points covering a volume of 32x32x30mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

4.2 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation. The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Lagre Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics. In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

4.3 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m] or [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

4.4 Data Evaluation

The DASY4 postprocessing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i	= compensated signal of channel i	(i = x, y, z)
U_i	= input signal of channel i	(i = x, y, z)
cf	= crest factor of exciting field	(DASY parameter)
dcp_i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\begin{aligned} \text{E – fieldprobes :} \quad E_i &= \sqrt{\frac{V_i}{Norm_i \cdot ConvF}} \\ \text{H – fieldprobes :} \quad H_i &= \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f} \end{aligned}$$

with	V_i	= compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= sensor sensitivity of channel i	(i = x, y, z)
		$\mu V/(V/m)^2$ for E-field Probes	
	$ConvF$	= sensitivity enhancement in solution	
	a_{ij}	= sensor sensitivity factors for H-field probes	
	f	= carrier frequency [GHz]	
	E_i	= electric field strength of channel i in V/m	
	H_i	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with	SAR	= local specific absorption rate in mW/g
	E_{tot}	= total field strength in V/m
	σ	= conductivity in [mho/m] or [Siemens/m]
	ρ	= equivalent tissue density in g/cm ³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

4.5 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- boundary correction
- extrapolation
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor o_set . Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosimetric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_o + S_b \exp\left(-\frac{z}{a}\right) \cos\left(\pi \frac{z}{\lambda}\right)$$

Since the decay of the boundary effect dominates for small probes ($a \ll \lambda$), the cos-term can be omitted. Factors S_b (parameter Alpha in the DASY4 software) and a (parameter Delta in the DASY4 software) are assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- the boundary curvature is small
- the probe axis is angled less than 30° to the boundary normal
- the distance between probe and boundary is larger than 25% of the probe diameter
- the probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY4 system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the measurement data extraction during postprocessing.

5 Measurement Uncertainty (300MHz~3GHz)

Error Description	Unc. value $\pm\%$	Prob. Dist.	Div.	C_i (1g)	C_i (10g)	Std. Unc. $\pm\%$ (1g)	Std. Unc. $\pm\%$ (10g)	$v_i (v_{eff})$
Measurement System								
Probe Calibration	± 6.6	N	1	1	1	± 6.6	± 6.6	∞
Axial Isotropy	± 0.3	R	$\sqrt{3}$	0.7	0.7	± 0.1	± 0.1	∞
Hemispherical Isotropy	± 1.3	R	$\sqrt{3}$	0.7	0.7	± 0.5	± 0.5	∞
Boundary Effects	± 0.5	R	$\sqrt{3}$	1	1	± 0.3	± 0.3	∞
Linearity	± 0.3	R	$\sqrt{3}$	1	1	± 0.2	± 0.2	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	1	± 0.6	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	1	± 0.3	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	1	± 0.5	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	1	± 1.5	± 1.5	∞
RF Ambient Conditions	± 3.0	R	$\sqrt{3}$	1	1	± 1.7	± 1.7	∞
Probe Positioner	± 0.4	R	$\sqrt{3}$	1	1	± 0.2	± 0.2	∞
Probe Positioning	± 2.9	R	$\sqrt{3}$	1	1	± 1.7	± 1.7	∞
Max. SAR Evaluation	± 1.0	R	$\sqrt{3}$	1	1	± 0.6	± 0.6	∞
Test Sample Related								
Test Sample Positioning	± 2.9	N	1	1	1	± 2.9	± 2.9	145
Device Holder Uncertainty	± 3.6	N	1	1	1	± 3.6	± 3.6	5
SAR Drift Measurement	± 5.0	R	$\sqrt{3}$	1	1	± 2.9	± 2.9	∞
Phantom and Setup								
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	1	± 2.3	± 2.3	∞
Liquid Conductivity(target)	± 5.0	R	$\sqrt{3}$	0.64	0.43	± 1.8	± 1.2	∞
Liquid Conductivity(meas.)	± 2.5	N	1	0.64	0.43	± 1.6	± 1.1	∞
Liquid Permittivity(target)	± 5.0	R	$\sqrt{3}$	0.6	0.49	± 1.7	± 1.4	∞
Liquid Permittivity(meas.)	± 2.5	N	1	0.6	0.49	± 1.5	± 1.2	∞
Combined Std. Uncertainty						± 10.0	± 9.7	330
Expanded STD Uncertainty (k=2)						± 19.9	± 19.4	

6 References

1. [IEEE Std C95.1-2005]

Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The Institute of Electrical and Electronics Engineers, Inc. (IEEE), 2005.

2. [IEEE Std C95.3-1992]

Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave". The Institute of Electrical and Electronics Engineers, Inc. (IEEE), 1992.

3. [FCC Report and Order 96-326]

Federal Communications Commission, "Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, 1996.

4. [FCC OET Bulletin 65]

Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. OET Bulletin 65 Edition 97-01, August 1997. Federal Communications Commission (FCC), Office of Engineering & Technology. (OET)

5. [FCC OET Bulletin 65 Supplement C]

Additional Information for Evaluating Compliance of Mobile and Portable Device with FCC Limits for Human Exposure to Radiofrequency Emissions. Supplement C (Edition 01-01) to OET Bulletin 65, June 2001. Federal Communications Commission (FCC), Office of Engineering & Technology. (OET)

6. [DASY 4]

Schmid & Partner Engineering AG: DASY 4 Manual, September 2005.

7. [IEEE 1528-2003]

IEEE Std 1528-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques. 1528-2003, 19th December, 2003, The Institute of Electrical and Electronics Engineers, Inc. (IEEE).

8. [RSS-102, Issue 2]

Radio Standards Specification 102, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) sets out the requirements and measurement techniques used to evaluate radio frequency (RF) exposure compliance of radiocommunication apparatus designed to be used within the vicinity of the human body. November, 2005. Industry Canada.

9. [Health Canada Safety Code 6]

Canada's Safety Code 6: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz (99-EHD-237)

7 Annex : Test Results of DASY4 (Refer to ANNEX)

ANNEX

Index of Annex

ANNEX A: CONSTRUCTION PHOTOS OF EUT.....	38
ANNEX B: SAR RESULTS.....	45
ANNEX C: DIPOLE CERTIFICATE.....	86
ANNEX D: PROBE CERTIFICATE.....	120

ANNEX A: CONSTRUCTION PHOTOS OF EUT


1. Outside view 1 of EUT




2. Outside view 2 of EUT




3. Inside View 1 of EUT

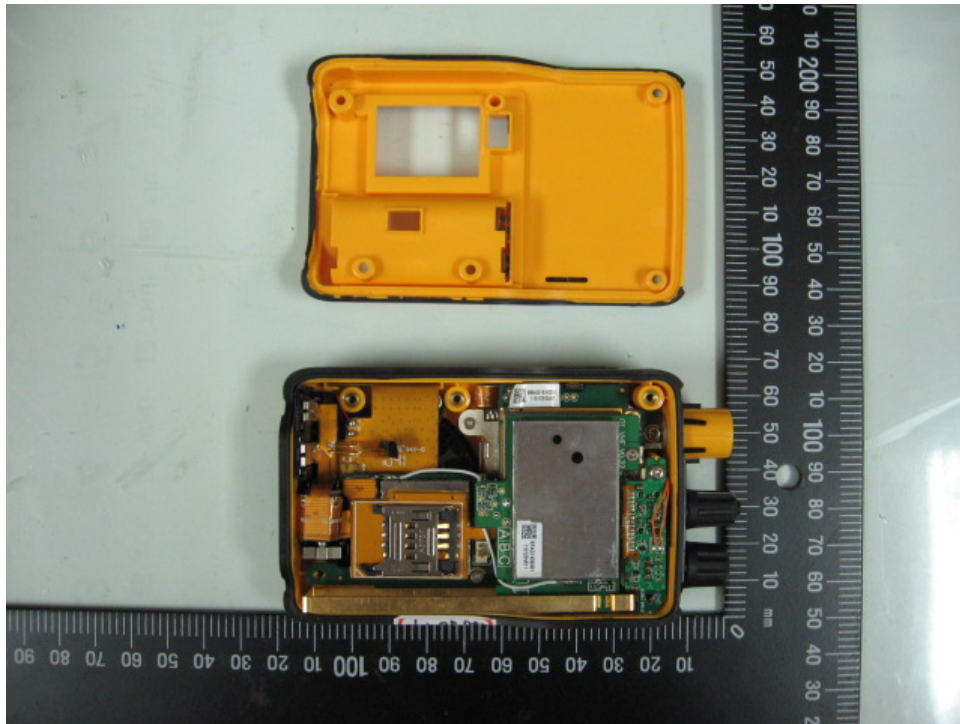


4. Inside View 2 of EUT

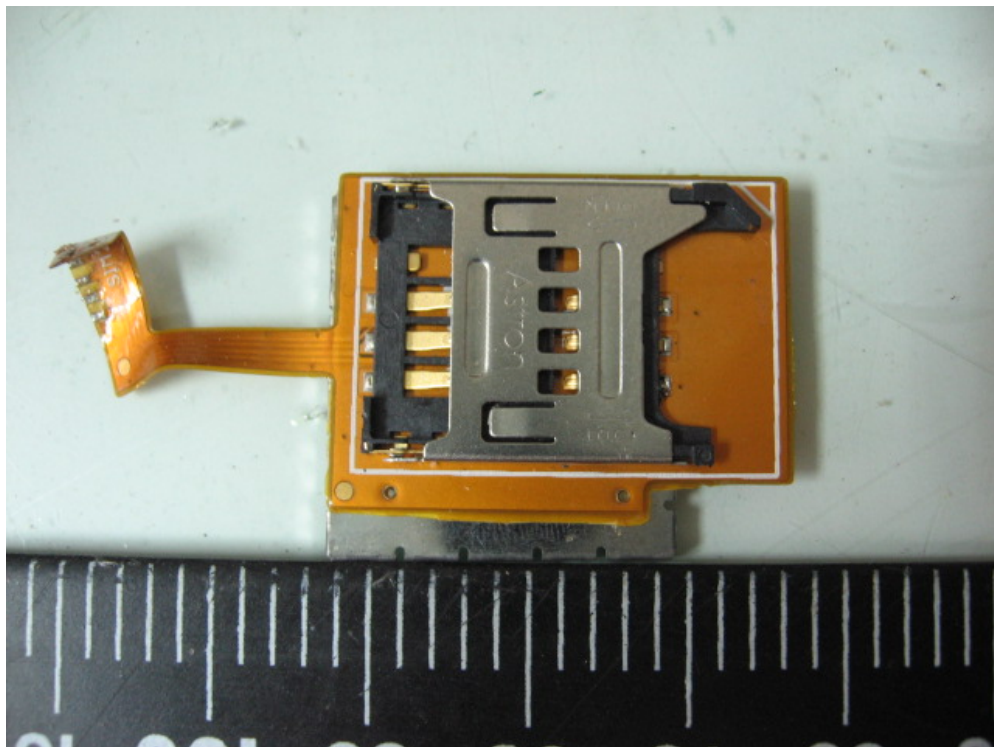


5. Front view of PCB1

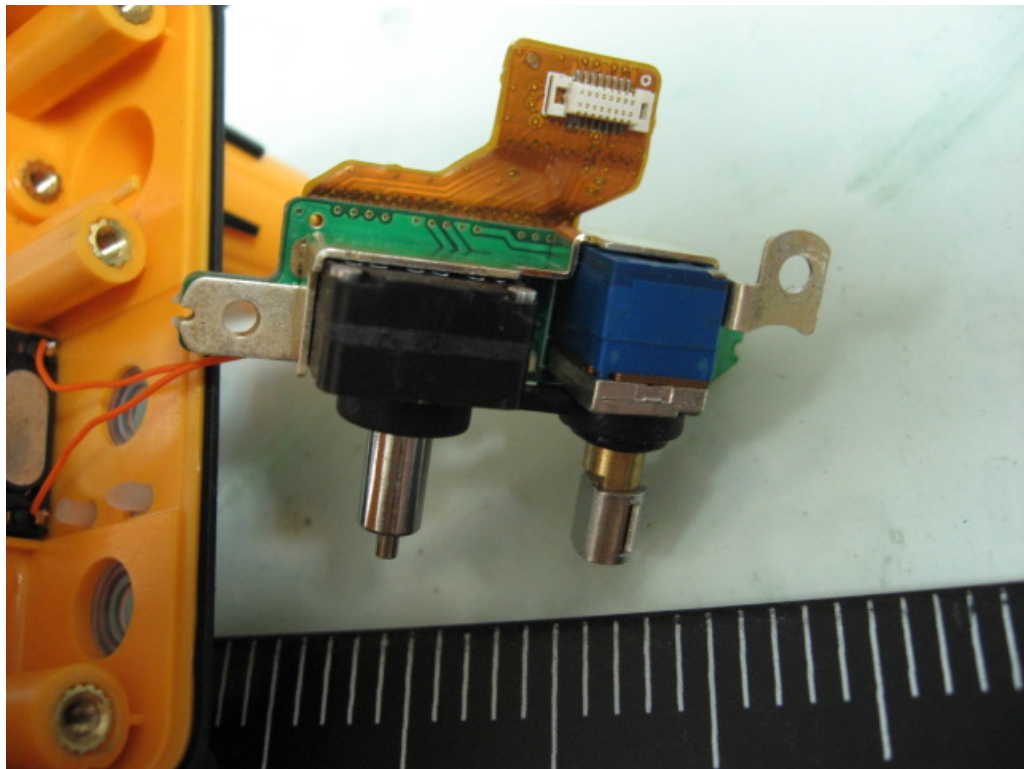


6. Rear view of PCB1

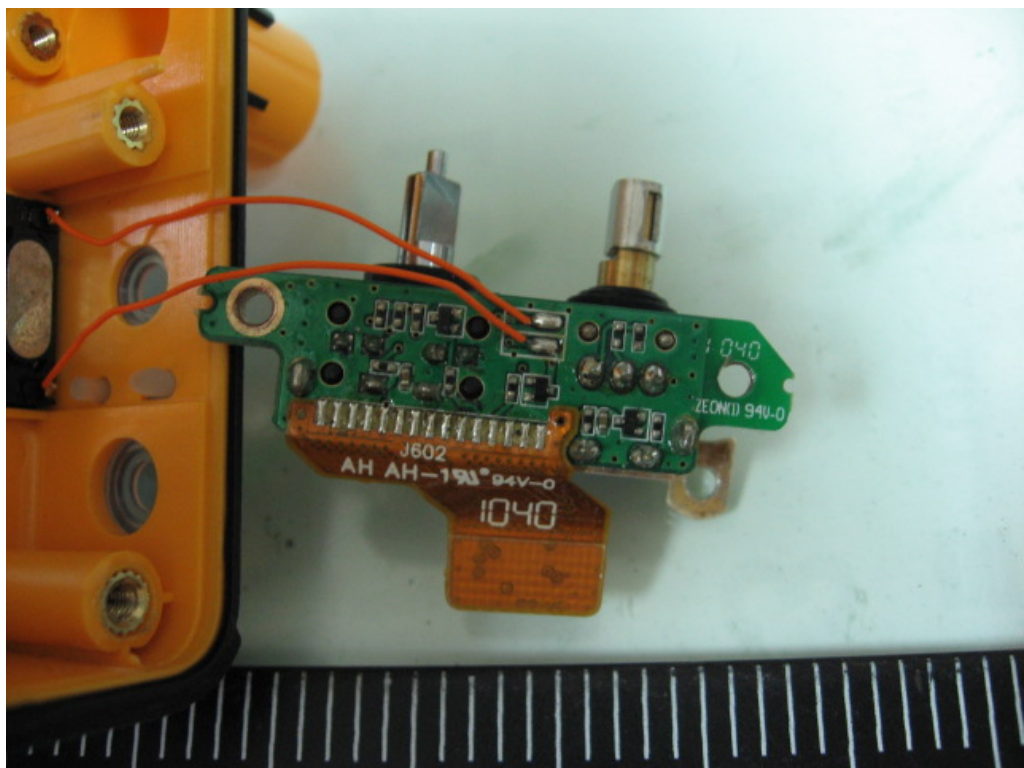


7. Front view of PCB2

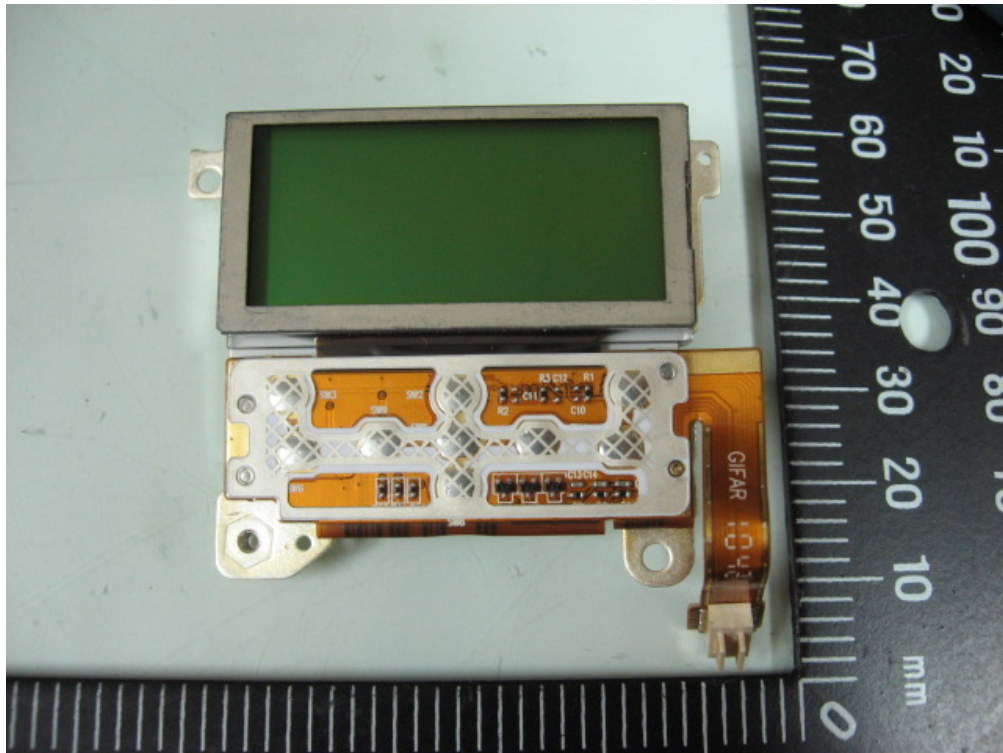


8. Rear view of PCB2

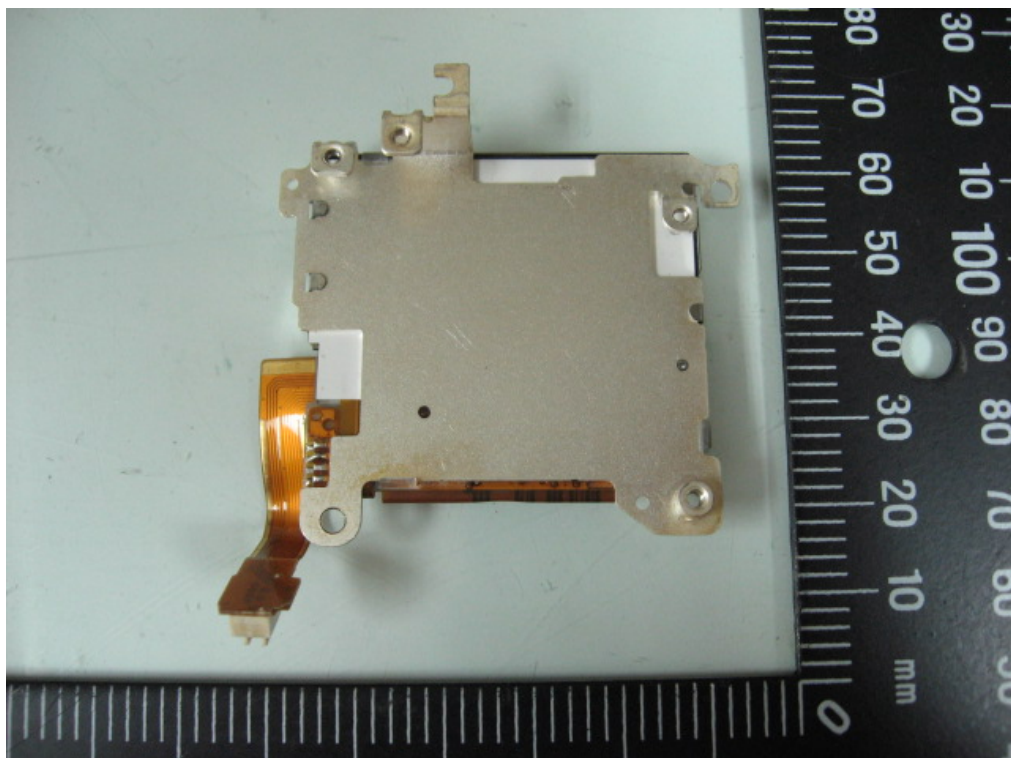


9. Front view of PCB3

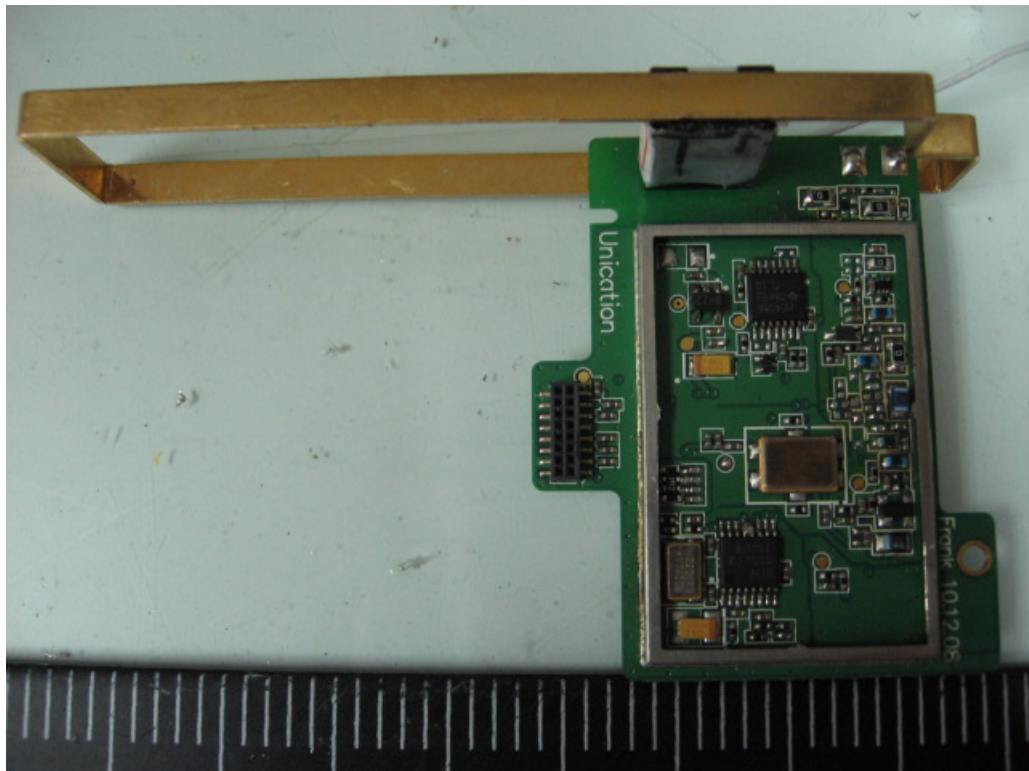


10. Rear view of PCB3

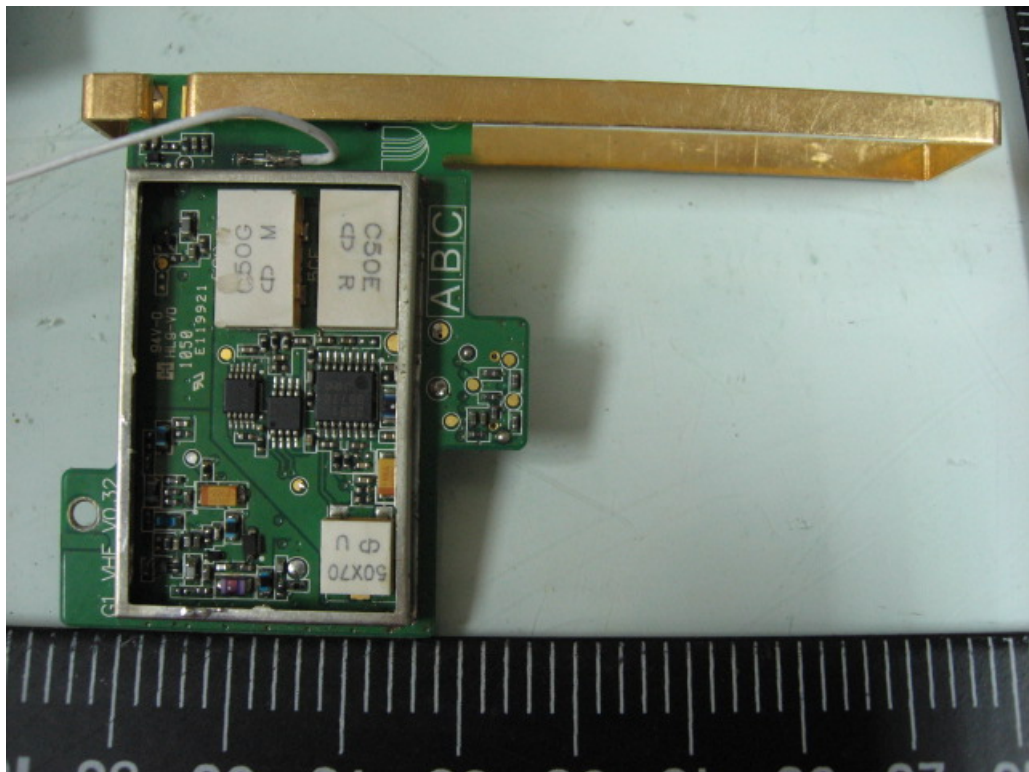


11. Front view of PCB4

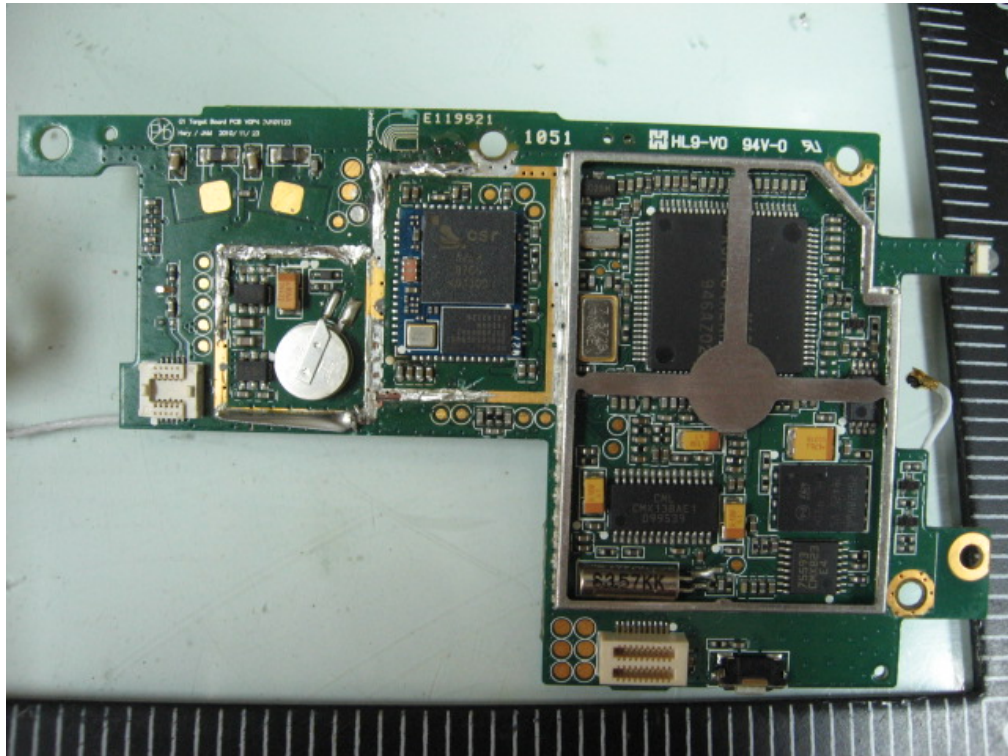

12. Rear view of PCB4

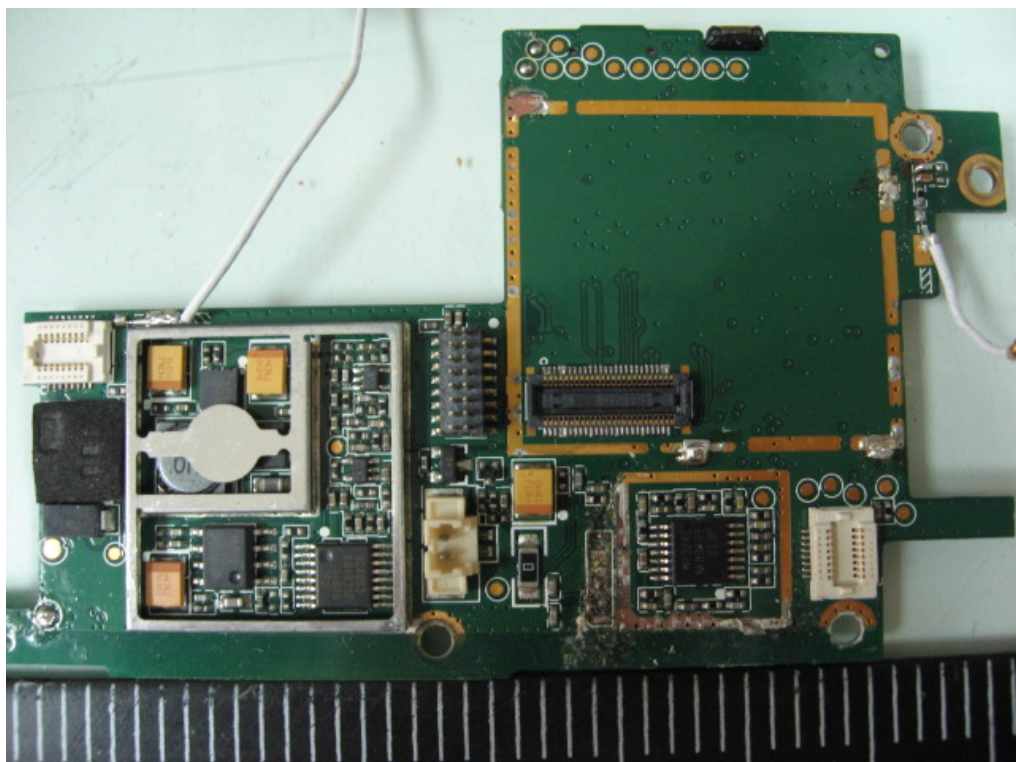

13. Front view of PCB5

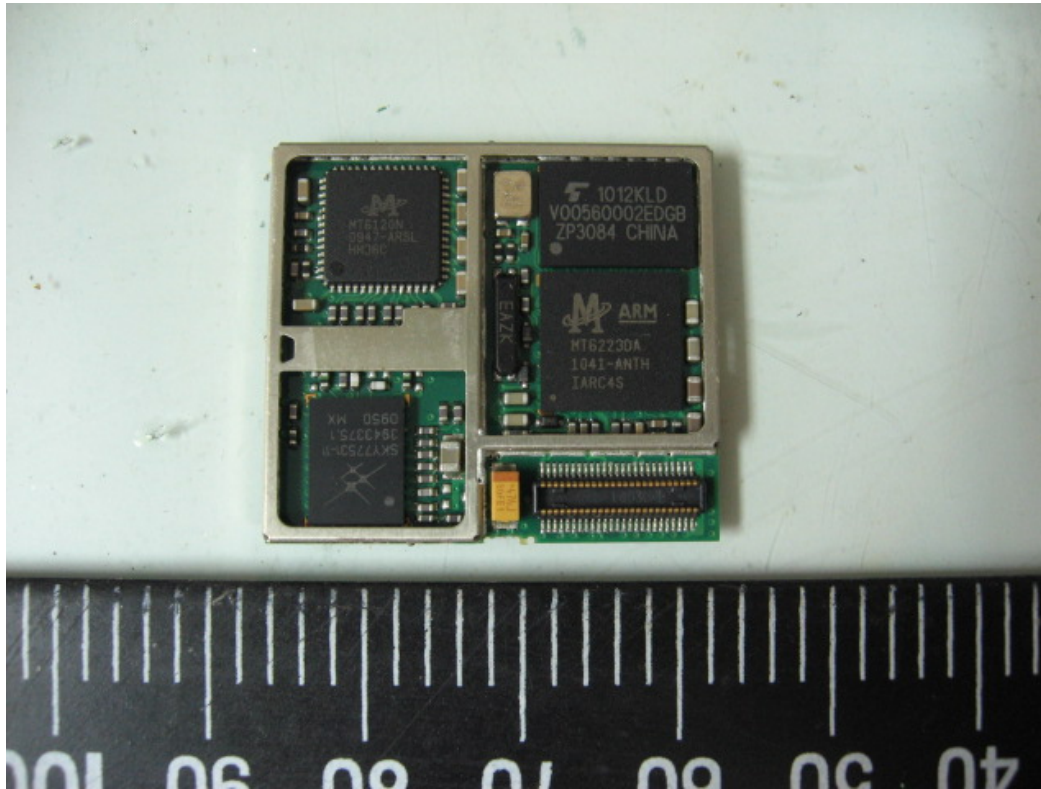

14. Rear view of PCB5

