

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RX-51_11.doc	Date of Report:	16-Jul-2009
Number of pages:	33	Customer's Contact person:	Tuomo Pursiheimo
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RX-51, Battery BL-5J, AC-Charger AC-10E, Headset WH-205		
FCC ID:	LJPRX-51	IC:	661E-RX-51
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Anni Manninen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	08-Jun-2009
Testing completed	10-Jul-2009
The customer's contact person	Tuomo Pursiheimo
Test Plan referred to	T:\Projects\RX-51\TestPlan_RS\RS_testplan_RX-51.xls
Notes	-
Document name	FCC15C_RX-51_11.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RX-51	004401107150423	2001	-		13970
Battery	BL-5J	4620409094J1010003260670573	-	-	-	13967
Charger	AC-10E	399791836609050330860675408	-	-	-	13924
Headset	WH-205	06944219175C1R02518	-	-	-	13925
Phone	RX-51	004401107150605	2001	-	1.2009.22-15	13966
Phone	RX-51	004401107150431	2001	-	1.2009.22-15	13894
Battery	BL-5J	4620409094J1010002560670573	-	-	-	13912
Charger	AC-10E	3997918112240401179;0675408	-	-	-	12916
Headset	WH-205	31	A31	3.1	-	13929

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (b)	Power spectral density	PASSED

FM TX:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.239(a)	A2.8	Field strength of the fundamental signal	NP
15.239(c)	A2.8	Spurious radiated emissions	NP
15.207	6.6	AC powerline conducted emissions	NP
15.239(a)	A2.8	26 dB bandwidth	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))	6
3.1. Test method and limit.....	6
3.2. WLAN Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit.....	10
4.2. WLAN Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	13
5.1. Test method and limit.....	13
5.2. WLAN Test results	14
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	17
6.1. Test method and limit.....	17
6.2. WLAN Test results	18
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	21
7.1. Test method and limit.....	21
7.2. WLAN Test results	22
8. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))	24
8.1. Test method and limit.....	24
8.2. WLAN test results	25
9. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))	28
9.1. Test method and limit.....	28
9.2. WLAN test results	29
10. Test Equipment	32
10.1. Conducted measurements	32
10.2. Radiated measurements	32

2. Test setups


2.1. Conducted RF test setup

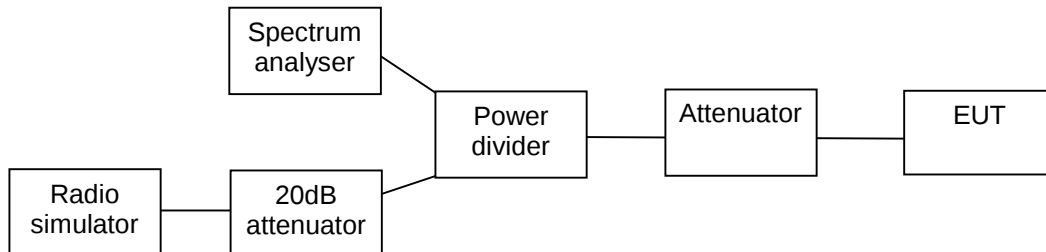

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

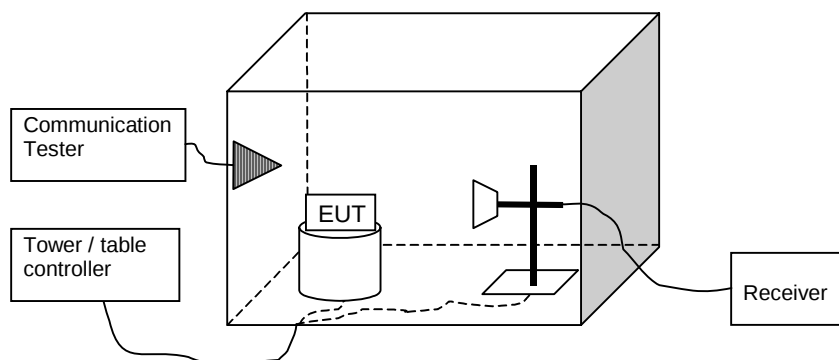

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RX-51, DUT; 13966
Accessories with DUT numbers	BL-5J, DUT 13967, AC-10E, DUT 13924, WH-205, DUT 13925
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 102
Date of measurements	29-Jun-2009 / 30-Jun-2009
Measured by	Sami Lehtonen / Jouko Kaivonen

3.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. WLAN Test results


3.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	23.49	0.223	PASSED
7 / 2442	23.90	0.245	PASSED
11 / 2462	23.97	0.249	PASSED


Channel 1 / 2412 MHz

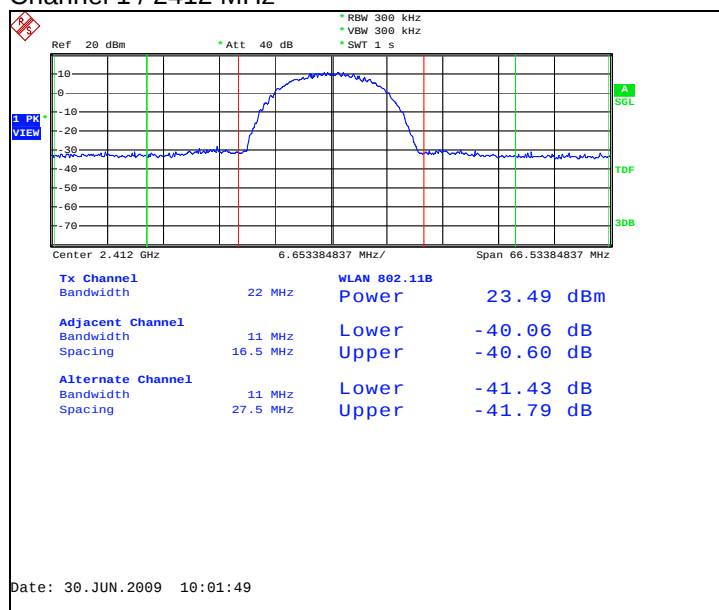

Channel 7 / 2442 MHz

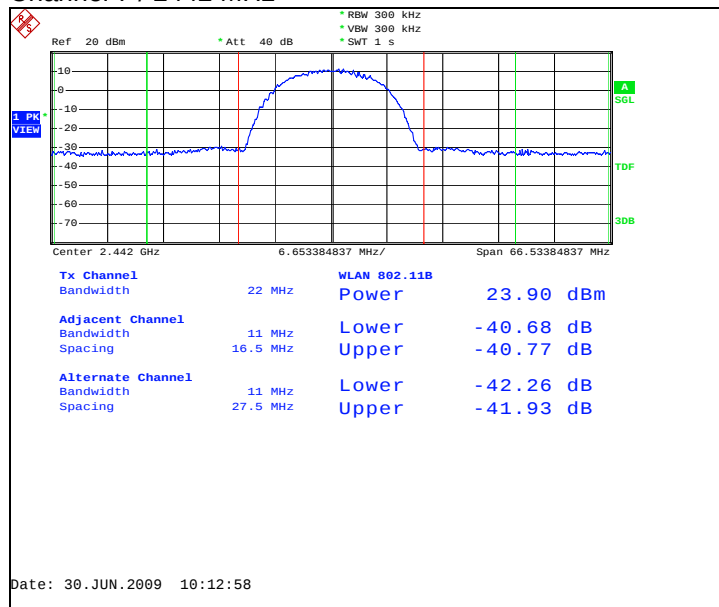


Channel 11 / 2462 MHz

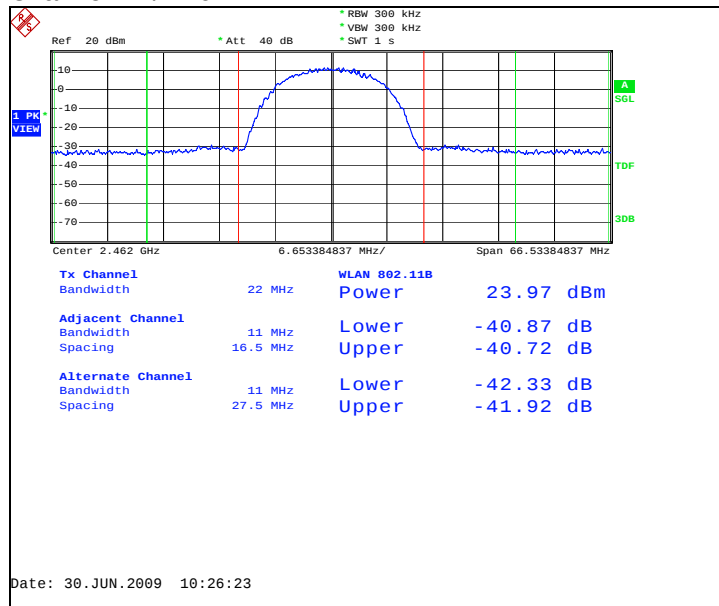


3.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	20.65	0.116	PASSED
7 / 2442	22.52	0.179	PASSED
11 / 2462	20.86	0.122	PASSED


Channel 1 / 2412 MHz

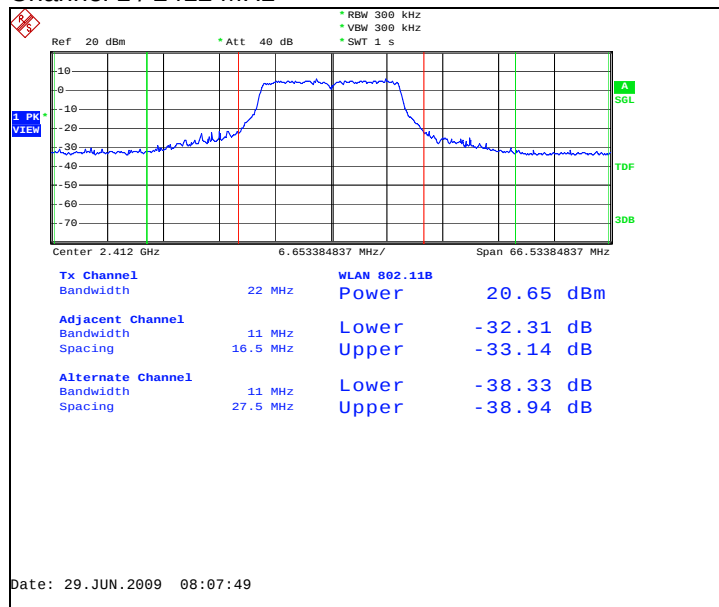

Channel 7 / 2442 MHz

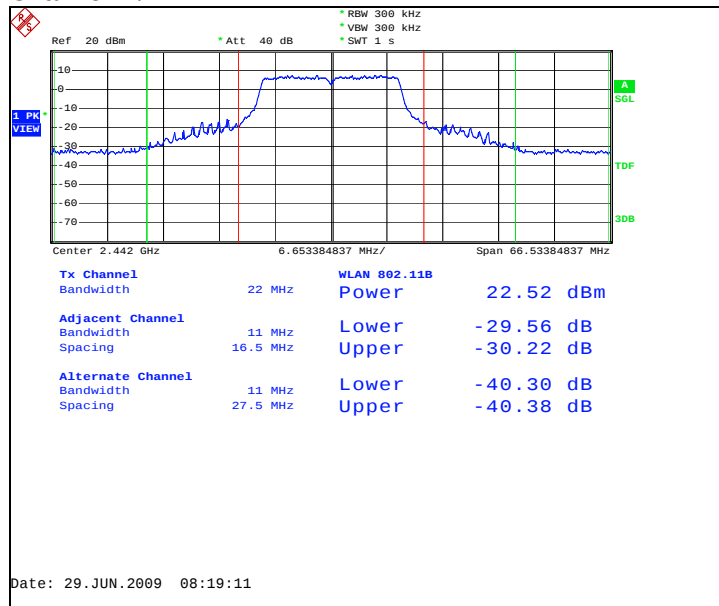

Channel 11 / 2462 MHz

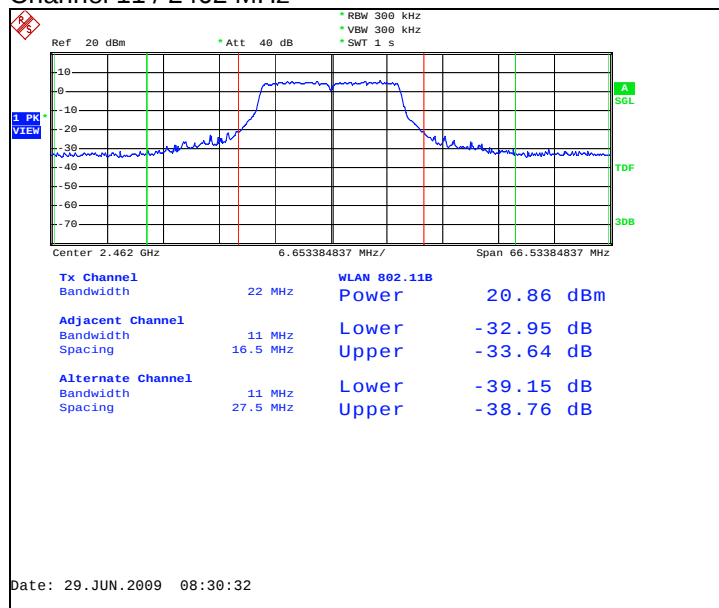

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RX-51, DUT 13894
Accessories with DUT numbers	BL-5J, DUT 13912; WH-205, DUT 13929; AC-10E, DUT 12916
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101.6
Date of measurements	08-Jul-2009 – 10-Jul-2009
Measured by	Kalle Hannila / Sami Lehtonen

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. WLAN Test results


4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 1 / 2412 MHz

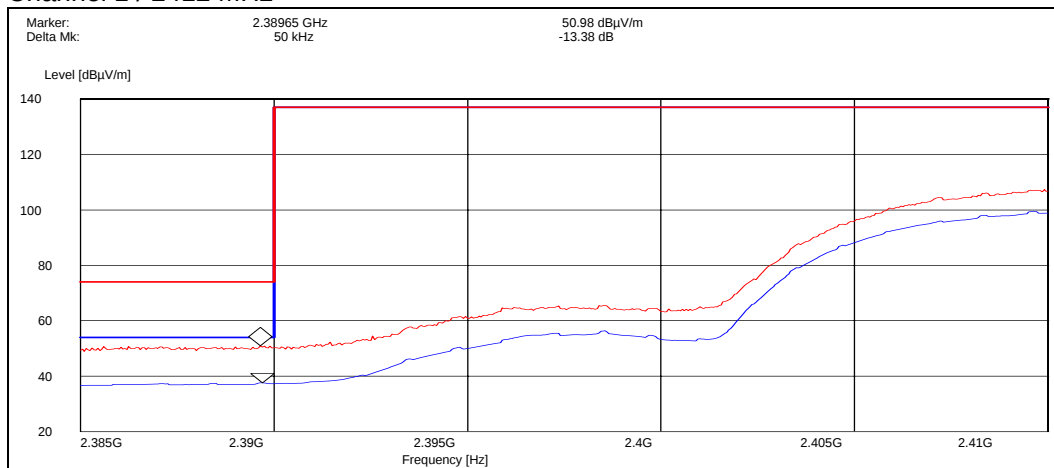

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	51.00	PASSED
Average	37.60	PASSED


Channel 11 / 2462 MHz

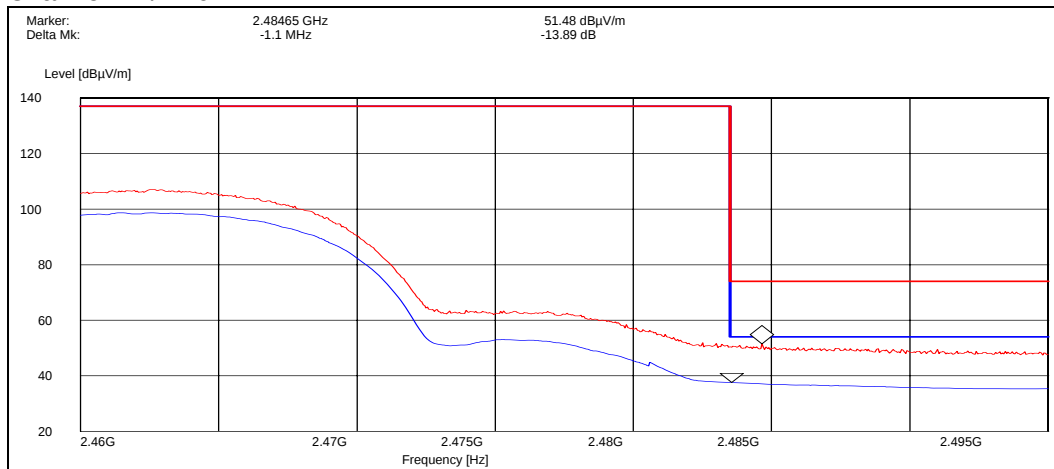

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	51.50	PASSED
Average	37.60	PASSED


4.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 1 / 2412 MHz

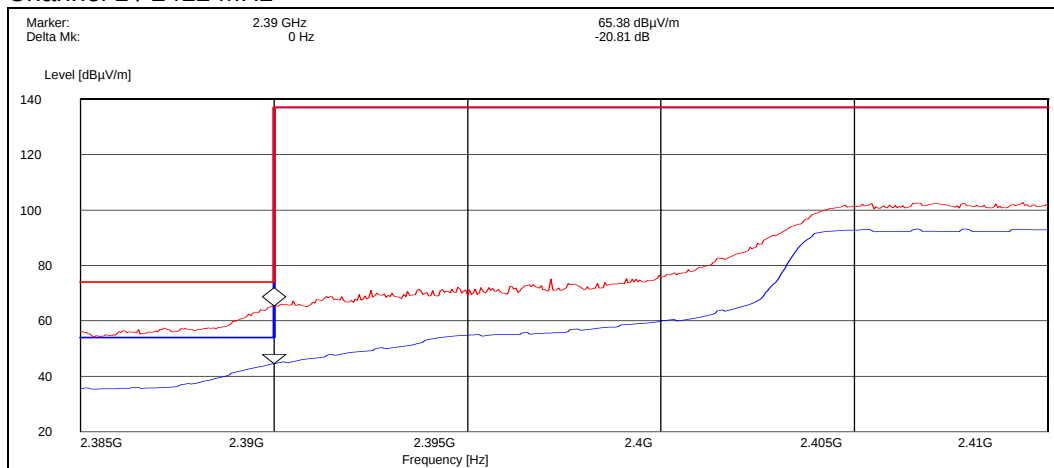

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	65.40	PASSED
Average	44.60	PASSED

Channel 11 / 2462 MHz

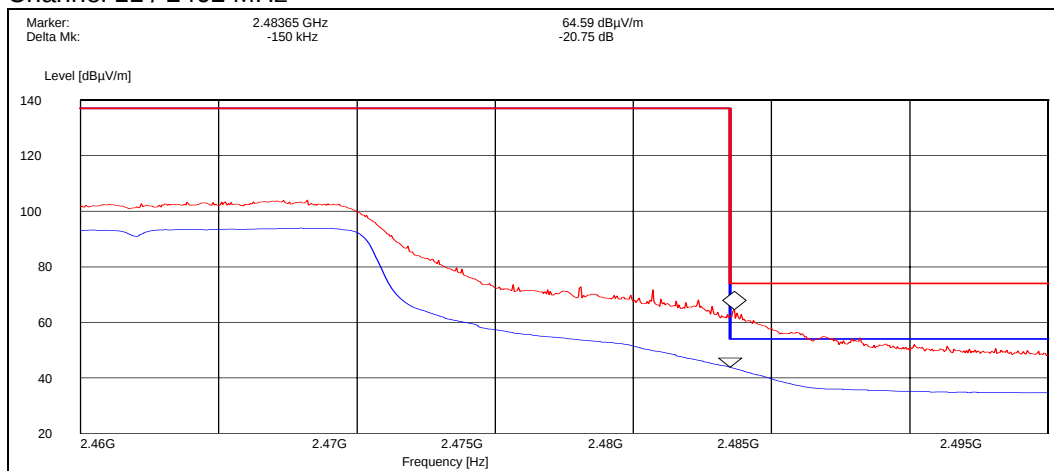

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	64.60	PASSED
Average	43.80	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RX-51, DUT 13966
Accessories with DUT numbers	BL-5J, DUT 13967; AC-10E, DUT 13924; WH-205, DUT 13925
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 102
Date of measurements	29-Jun-2009 / 30-Jun-2009
Measured by	Sami Lehtonen / Jouko Kaivonen

5.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. WLAN Test results

5.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

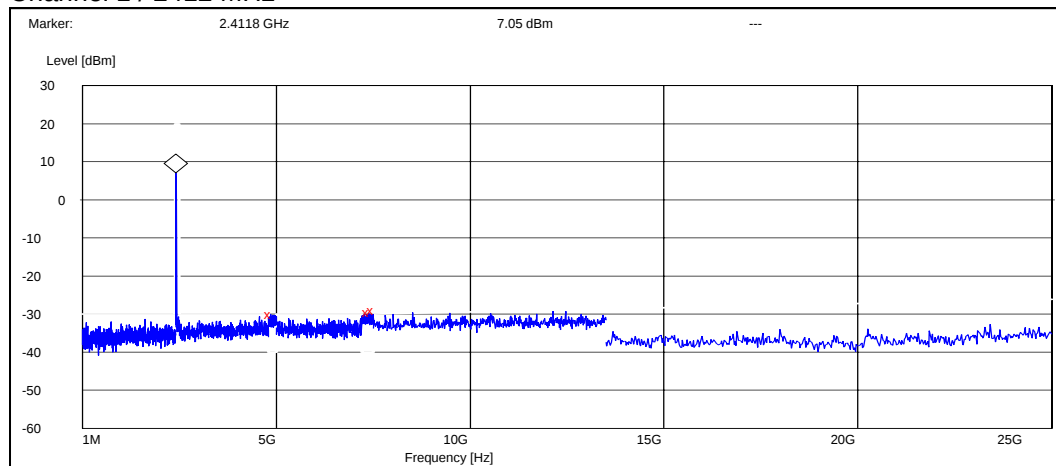

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4852.000000	-37.046460	PASSED
7387.800000	-36.646460	PASSED
7500.000000	-36.046460	PASSED


Channel 7 / 2442 MHz

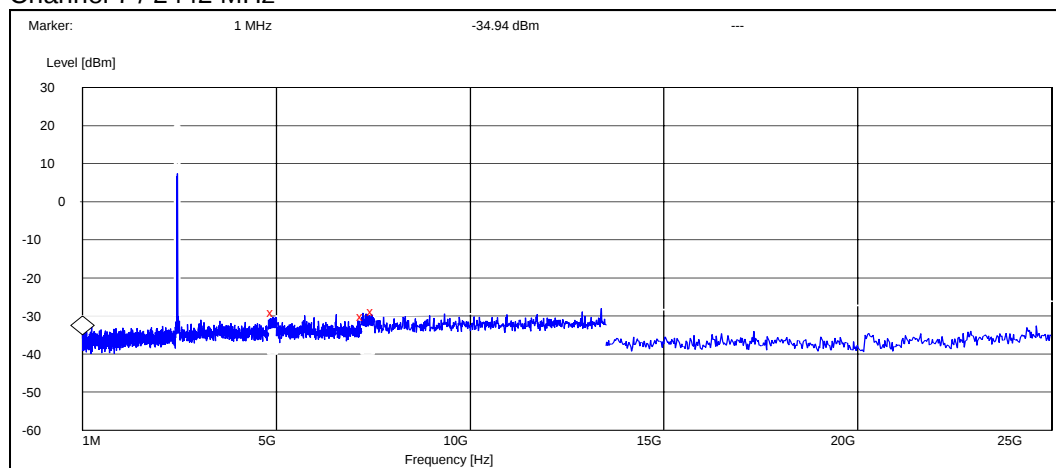

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4914.800000	5.936512	PASSED
7231.800000	4.736512	PASSED
7500.000000	6.136512	PASSED

Channel 11 / 2462 MHz

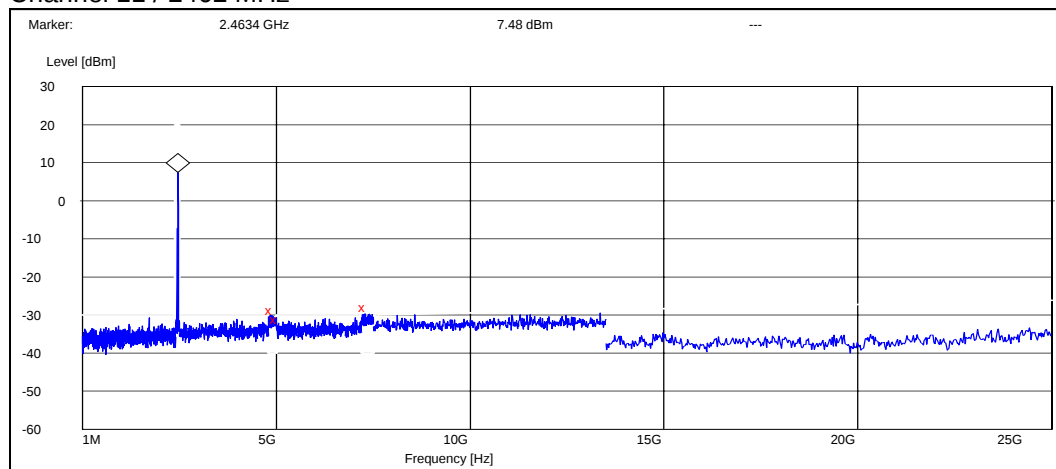


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4882.400000	-36.281081	PASSED
5000.000000	-38.481081	PASSED
7284.000000	-35.381081	PASSED

5.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

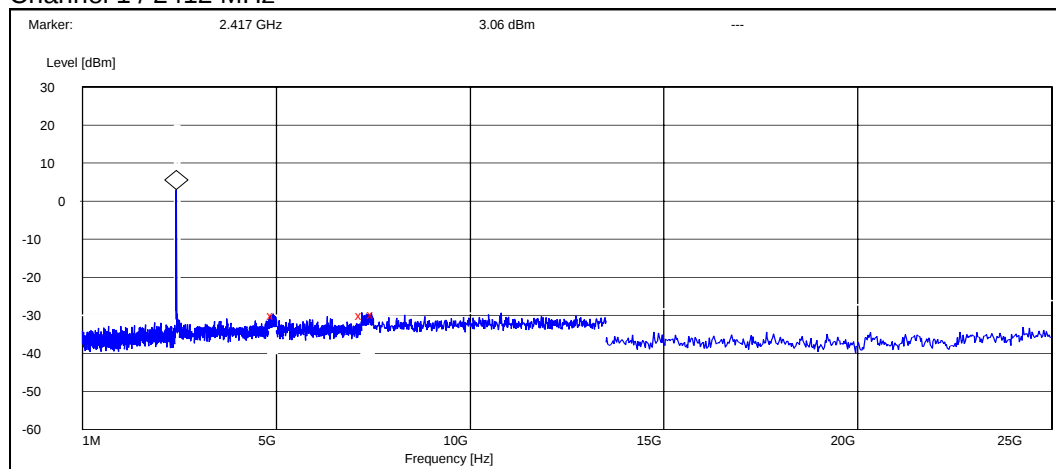

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4927.200000	-33.162386	PASSED
7205.400000	-33.162386	PASSED
7500.000000	-32.762386	PASSED


Channel 7 / 2442 MHz

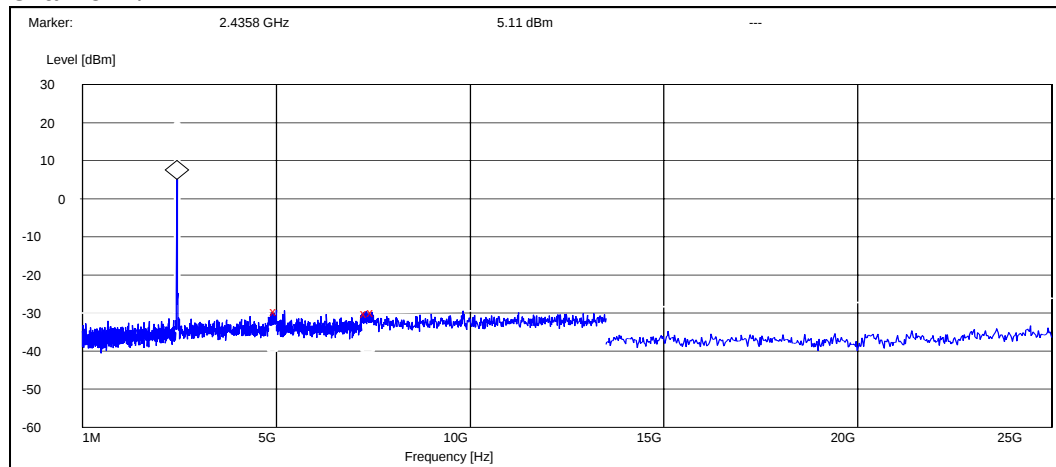

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4998.400000	-34.813411	PASSED
7330.200000	-35.213411	PASSED
7500.000000	-35.013411	PASSED

Channel 11 / 2462 MHz

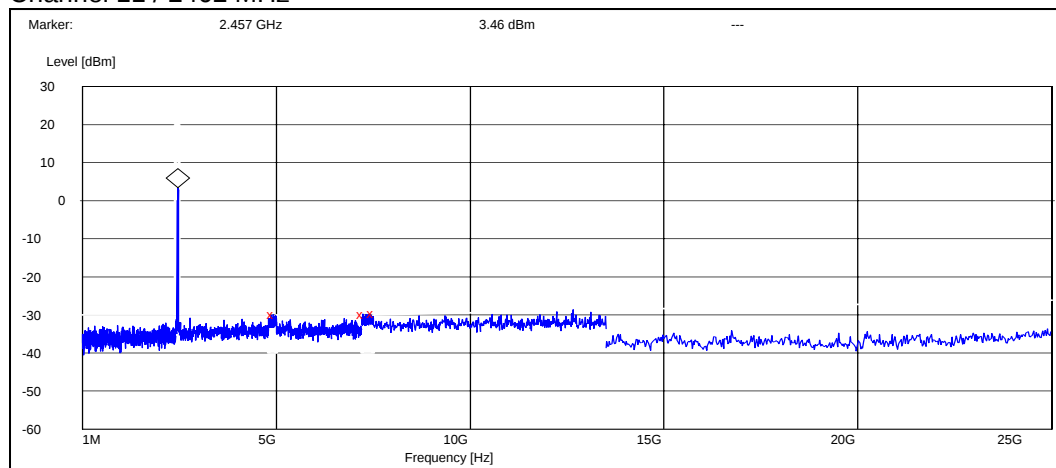

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4923.200000	-33.362363	PASSED
7228.800000	-33.362363	PASSED
7500.000000	-33.162363	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RX-51, DUT 13894
Accessories with DUT numbers	BL-5J, DUT 13912; WH-205, DUT 13929; AC-10E, DUT 12916
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101.6
Date of measurements	08-Jul-2009 – 10-Jul-2009
Measured by	Kalle Hannila / Sami Lehtonen

6.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. WLAN Test results

6.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	47.80	245.47	46.50	1.3	VERTICAL	PASSED
7236.000000	46.70	216.27	43.70	3.0	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	41.10	113.50	39.80	1.3	VERTICAL	PASSED
7236.000000	33.70	48.42	30.70	3.0	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.795391	23.30	14.62	42.00	-18.7	VERTICAL	PASSED
74.169940	16.00	6.31	43.90	-27.9	HORIZONTAL	PASSED
74.548497	15.80	6.17	43.60	-27.8	HORIZONTAL	PASSED
120.923246	23.30	14.62	50.60	-27.3	VERTICAL	PASSED
123.806613	22.10	12.74	49.70	-27.6	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4872.247495	46.60	213.80	45.20	1.4	VERTICAL	PASSED
13304.113226	53.40	467.74	40.70	12.7	HORIZONTAL	PASSED
13383.261523	53.20	457.09	39.60	13.6	HORIZONTAL	PASSED
15376.251503	55.90	623.73	37.50	18.4	HORIZONTAL	PASSED
15992.991984	55.20	575.44	37.50	17.7	VERTICAL	PASSED
16050.106212	57.80	776.25	37.10	20.7	VERTICAL	PASSED
17955.907816	58.00	794.33	38.00	20.0	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4873.747495	31.90	39.36	30.50	1.4	VERTICAL	PASSED
13305.613226	40.50	105.93	27.80	12.7	HORIZONTAL	PASSED
13382.261523	40.30	103.51	26.70	13.6	HORIZONTAL	PASSED
15377.251503	43.30	146.22	25.00	18.3	HORIZONTAL	PASSED
15993.991984	42.60	134.90	24.90	17.7	VERTICAL	PASSED
16052.606212	44.50	167.88	24.00	20.5	VERTICAL	PASSED
17953.407816	44.80	173.78	24.90	19.9	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	47.70	242.66	47.00	0.7	VERTICAL	PASSED
7386.000000	48.00	251.19	43.80	4.2	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	39.00	89.13	38.30	0.7	VERTICAL	PASSED
7386.000000	34.90	55.59	30.70	4.2	VERTICAL	PASSED

6.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	49.70	305.49	48.40	1.3	VERTICAL	PASSED
7236.000000	54.10	506.99	51.10	3.0	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	38.20	81.28	36.90	1.3	VERTICAL	PASSED
7236.000000	39.30	92.26	36.30	3.0	VERTICAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.595391	27.40	23.44	45.90	-18.5	VERTICAL	PASSED
118.696994	23.00	14.13	50.20	-27.2	HORIZONTAL	PASSED
136.233066	24.60	16.98	53.40	-28.8	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4882.763527	52.30	412.10	51.00	1.3	VERTICAL	PASSED
7317.137275	65.20	1 819.70	62.00	3.2	HORIZONTAL	PASSED
7319.641283	64.80	1 737.80	61.60	3.2	HORIZONTAL	PASSED
12462.921844	52.40	416.87	40.70	11.7	HORIZONTAL	PASSED
15378.763527	57.00	707.95	38.80	18.2	VERTICAL	PASSED
15586.178357	55.50	595.66	38.00	17.5	VERTICAL	PASSED
16053.100200	57.40	741.31	36.90	20.5	VERTICAL	PASSED
17948.401804	57.60	758.58	37.80	19.8	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4882.763527	37.70	76.74	36.40	1.3	VERTICAL	PASSED
7322.141283	50.30	327.34	47.00	3.3	HORIZONTAL	PASSED
7322.637275	50.00	316.23	46.70	3.3	HORIZONTAL	PASSED
12456.921844	40.00	100.00	28.30	11.7	HORIZONTAL	PASSED
15377.763527	43.30	146.22	25.00	18.3	VERTICAL	PASSED
15589.678357	42.50	133.35	25.10	17.4	VERTICAL	PASSED
16047.100200	44.50	167.88	23.80	20.7	VERTICAL	PASSED
17954.401804	44.70	171.79	24.70	20.0	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	49.90	312.61	49.20	0.7	VERTICAL	PASSED
7386.000000	61.70	1 216.19	57.50	4.2	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	40.20	102.33	39.50	0.7	VERTICAL	PASSED
7386.000000	45.00	177.83	40.80	4.2	VERTICAL	PASSED

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RX-51, DUT 13970
Accessories with DUT numbers	BL-5J, DUT 13967; AC-10E, DUT 13924; WH-205, DUT 13925
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 75 / 102
Date of measurements	30-Jun-2009
Measured by	Sami Lehtonen / Jouko Kaivonen

7.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. WLAN Test results

7.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

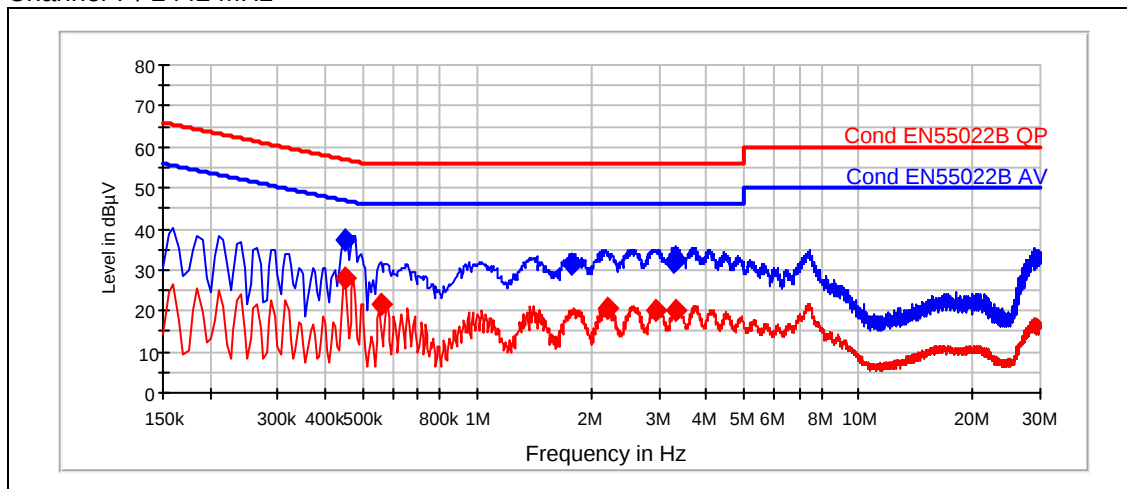

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	Quasi peak [dBμV]	Line	Margin [dB]	Result
0.450	37.35	L1	19.58	PASSED
1.775	31.27	L1	24.70	PASSED
3.295	31.96	L1	24.00	PASSED
3.320	32.38	L1	23.60	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	Average [dBμV]	Line	Margin [dB]	Result
0.450	28.13	L1	18.78	PASSED
0.560	21.84	L1	24.20	PASSED
2.200	20.82	L1	25.20	PASSED
2.950	20.14	L1	25.90	PASSED
3.335	20.21	L1	25.80	PASSED

7.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 7 / 2442 MHz

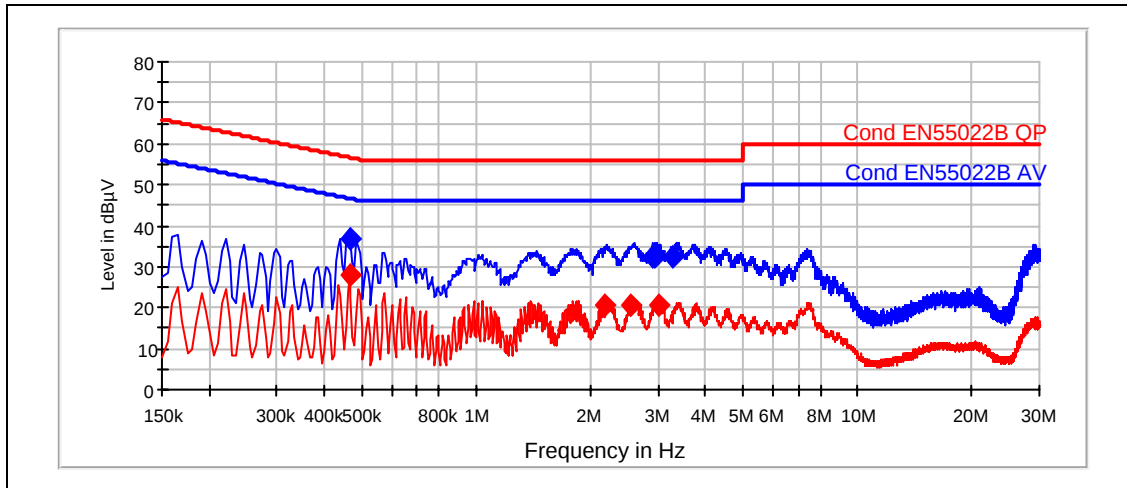

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	Quasi peak [dBμV]	Line	Margin [dB]	Result
0.470	36.75	L1	19.71	PASSED
2.920	32.39	L1	23.60	PASSED
2.955	32.42	L1	23.60	PASSED
3.290	32.17	L1	23.80	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	Average [dBμV]	Line	Margin [dB]	Result
0.465	27.92	L1	18.70	PASSED
2.165	20.56	L1	25.40	PASSED
2.555	20.74	L1	25.30	PASSED
3.000	20.42	L1	25.60	PASSED

8. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))

EUT with DUT number	RX-51, DUT 13966
Accessories with DUT numbers	BL-5J, DUT 13967; AC-10E, DUT 13924; WH-205, DUT 13925
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 102
Date of measurements	29-Jun-2009 / 30-Jun-2009
Measured by	Sami Lehtonen / Jouko Kaivonen

8.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

8.2. WLAN test results


8.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	10500.000	PASSED
7	10500.000	PASSED
11	10800.000	PASSED


Channel 1 / 2412 MHz

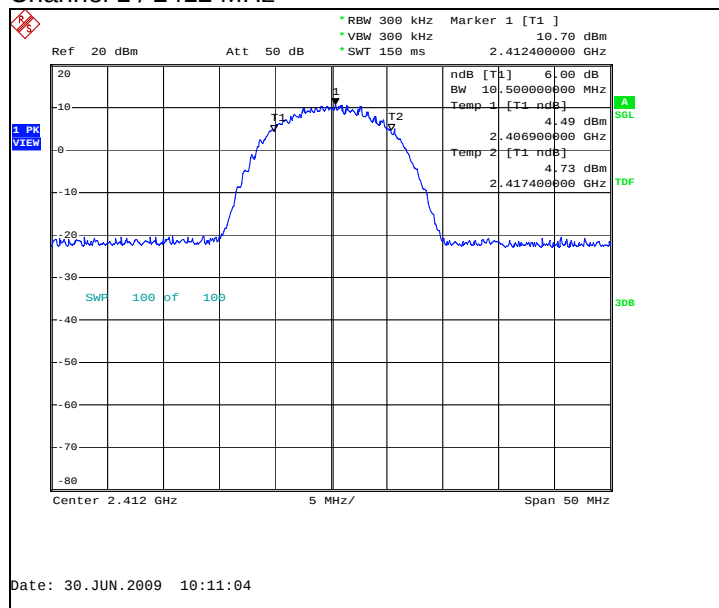

Channel 7 / 2442 MHz

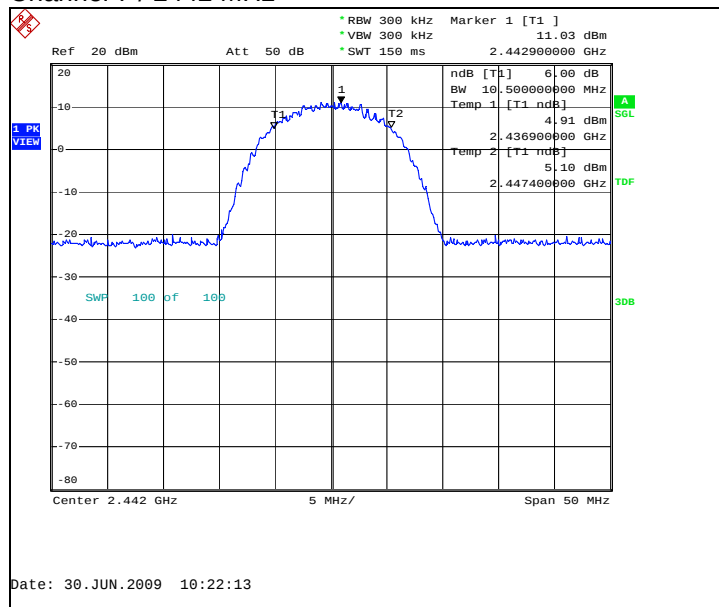


Channel 11 / 2462 MHz

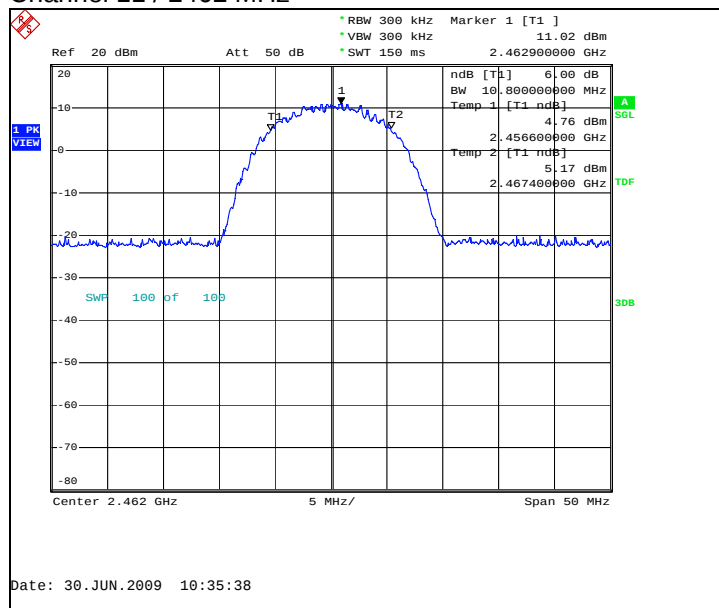


8.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	16600.000	PASSED
7	16600.000	PASSED
11	16600.000	PASSED


Channel 1 / 2412 MHz

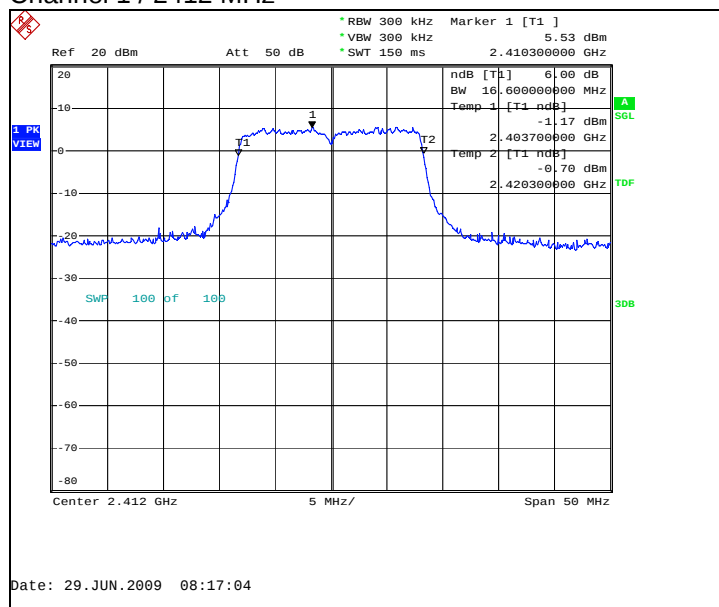

Channel 7 / 2442 MHz

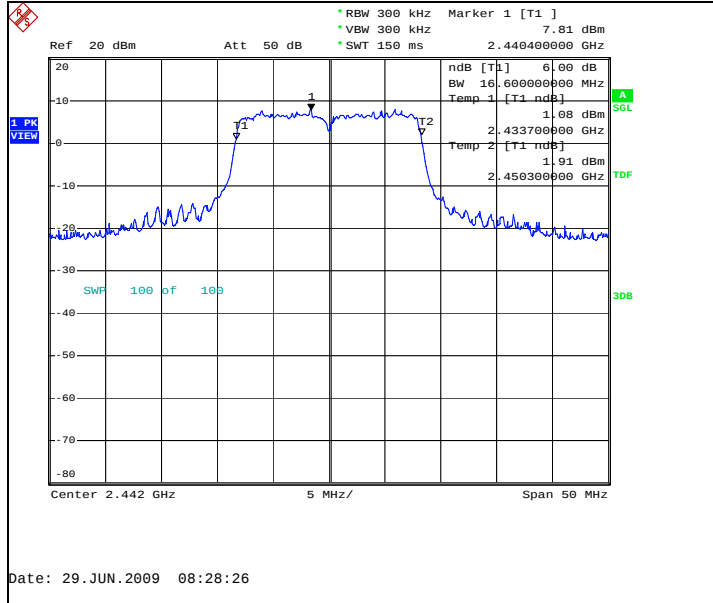

Channel 11 / 2462 MHz

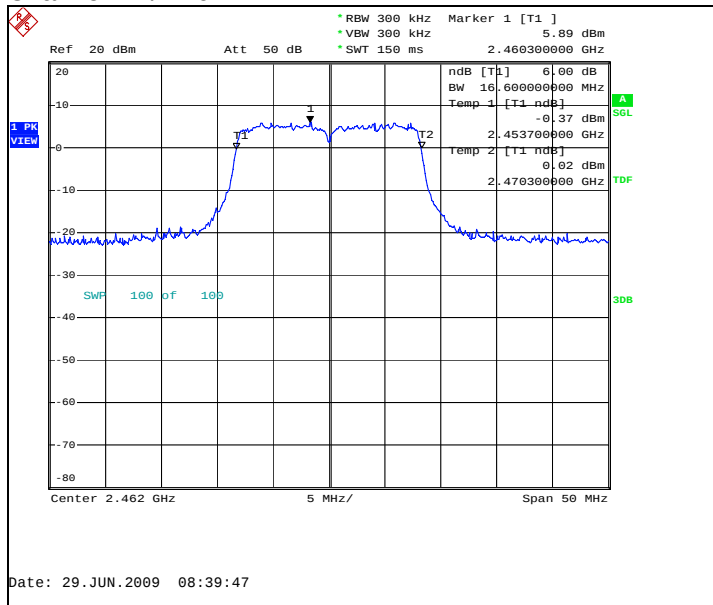

9. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))

EUT with DUT number	RX-51, DUT 13966
Accessories with DUT numbers	BL-5J, DUT 13967; AC-10E, DUT 13924; WH-205, DUT 13925
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 102
Date of measurements	29-Jun-2009 / 30-Jun-2009
Measured by	Sami Lehtonen / Jouko Kaivonen

9.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

9.2. WLAN test results


9.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	7.45	PASSED
7 / 2442	7.85	PASSED
11 / 2462	7.94	PASSED


Channel 1 / 2412 MHz

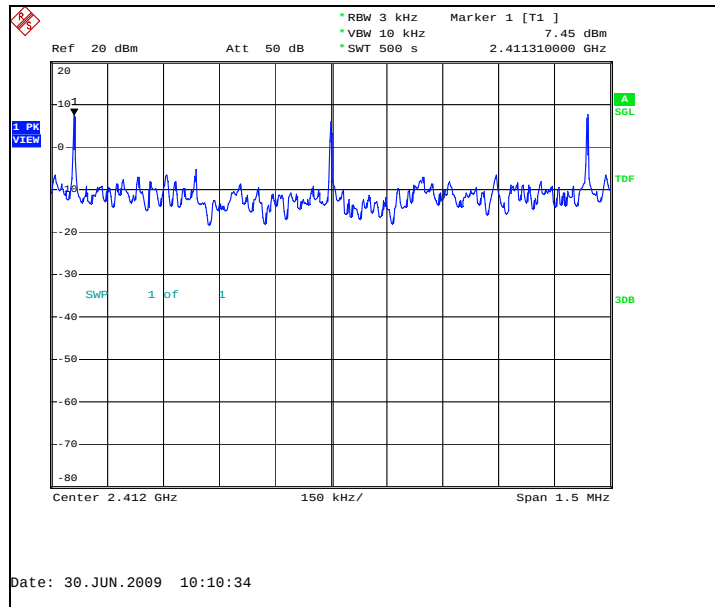

Channel 7 / 2442 MHz

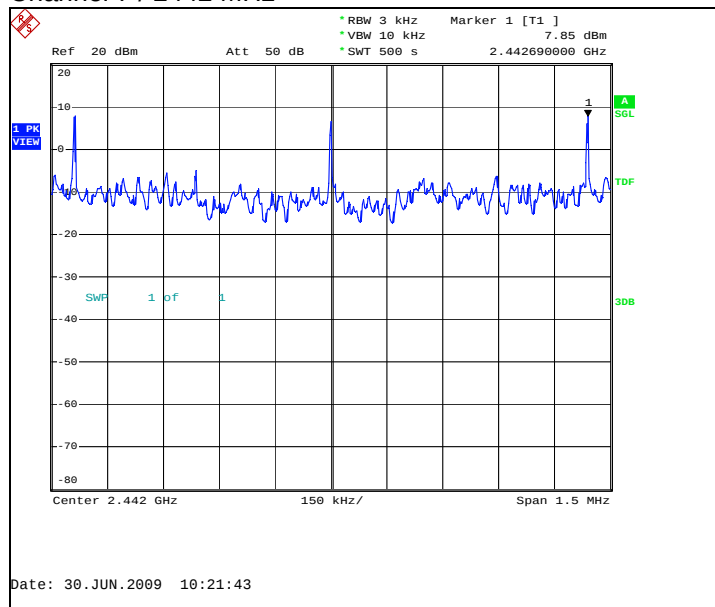


Channel 11 / 2462 MHz

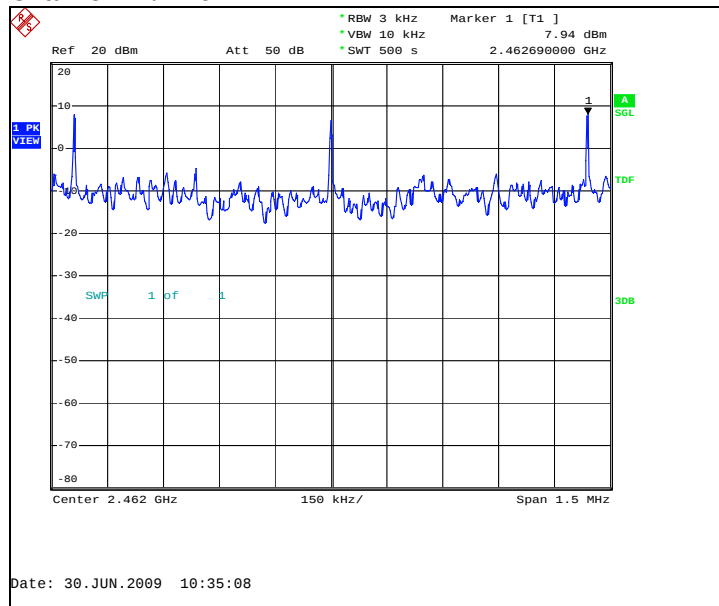


9.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-11.34	PASSED
7 / 2442	-10.12	PASSED
11 / 2462	-12.00	PASSED


Channel 1 / 2412 MHz

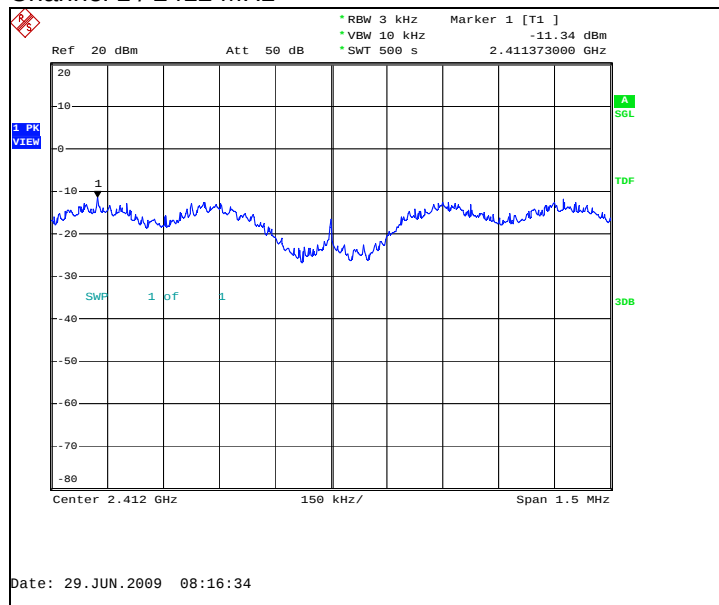

Channel 7 / 2442 MHz

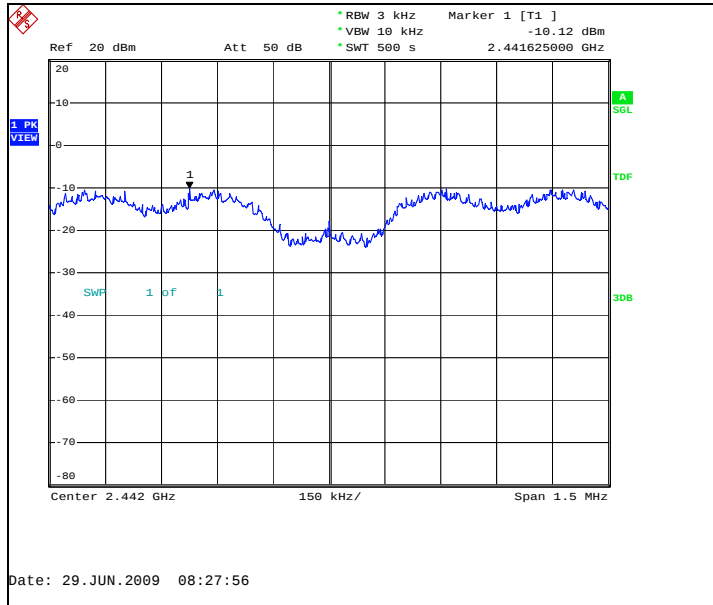

Channel 11 / 2462 MHz

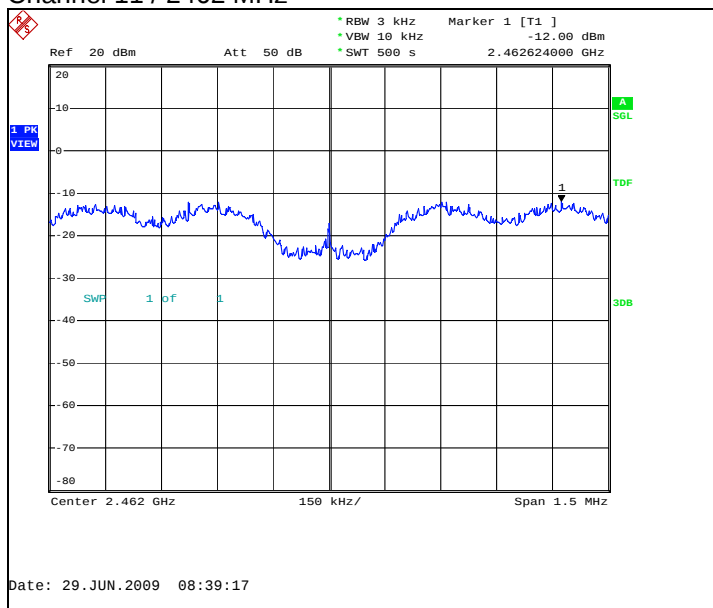

10. Test Equipment

10.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIO Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24/27, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B

10.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1749	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24/27, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24/27, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24/27, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24/27, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24/27, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24/27, 15C, 15B
2019	Multimeter	34401A	HP	22/24/27, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24/27, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24, 15C, 15B
2048	Band Reject Filter	WRCC1700/1800-0.2-10SS	Wainwright	27, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24/27, 15C
2057	Log. per. Antenna	HL025	R&S	22/24/27, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24/27, 15C, 15B
2110	Multimeter	34401A	HP	22/24/27, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24/27, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24/27, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24/27, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24/27, 15C

Eq. No	Equipment	Type	Manufacturer	Used in
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24/27, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24/27, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24/27, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24/27, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24/27, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24/27, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24/27, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24/27, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24/27, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24/27, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24/27
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24/27
2365	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B