

DATE: 13 November 2011

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

ElmoTech Ltd


Equipment under test:

Ankle Tag

TRXS-860

Written by: 
D. Shidlow, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

FCC ID: LSQ-TRXS-860

Shai Avigdori
Elmo Tech Ltd.
2 Habarzel St.
Tel-Aviv, 61131
Israel
Tel: +972-3-767-1700
Fax: +972-3-767-1701
e-mail: Shaia@Attentigroup.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification	7
2.2	Special Accessories	7
2.3	Equipment Modifications	7
2.4	Configuration of Tested System	7
3.	RADIATED MEASUREMENT TEST SET-UP PHOTOS-----	8
4.	AVERAGE FACTOR CALCULATION-----	10
4.1	Test Instrumentation Used	12
5.	PERIODIC OPERATION-----	13
5.1	Specification	13
5.2	Requirements	13
5.3	Results	13
6.	FIELD STRENGTH OF FUNDAMENTAL -----	18
6.1	Test Specification	18
6.2	Test Procedure	18
6.3	Measured Data	18
6.4	Test Instrumentation Used, Field Strength of Fundamental	22
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ-----	23
7.1	Test Specification	23
7.2	Test Procedure	23
7.3	Measured Data	23
7.4	Test Instrumentation Used, Radiated Measurements	24
7.5	Field Strength Calculation	24
8.	SPURIOUS RADIATED EMISSION-----	25
8.1	Test Specification	25
8.2	Test Procedure	25
8.3	Test Data	26
8.4	Test Instrumentation Used, Radiated Measurements	28
9.	BANDWIDTH -----	29
9.1	Test procedure	29
9.2	Results table	30
9.3	Test Equipment Used	31
10.	APPENDIX A - CORRECTION FACTORS-----	32
10.1	Correction factors for CABLE	32
10.2	Correction factors for CABLE	33
10.3	Correction factors for CABLE	34
10.4	Correction factors for LOG PERIODIC ANTENNA	35
10.5	Correction factors for LOG PERIODIC ANTENNA	36
10.6	Correction factors for BICONICAL ANTENNA	37
10.7	Correction factors for ACTIVE LOOP ANTENNA	38

1. General Information

1.1 Administrative Information

Manufacturer:	ElmoTech Ltd
Manufacturer's Address:	P.O.B. 13236 2 Habarzel St., Tel-Aviv, 61132 Israel Tel: +972-3-767-1700 Fax: +972-3-767-1701
Manufacturer's Representative:	Arad Dudkevitz
Equipment Under Test (E.U.T):	Ankle Tag
Equipment Model No.:	TRXS-860
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	19.07.11
Start of Test:	19.07.11
End of Test:	20.07.11
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Sub-part C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The TRXS-860 is a portable transmitter 318 MHz carrier frequency attached to the client's wrist or ankle. The transceiver shall transmit pseudorandom periodic transmission every 20sec with additional data regarding tamper attempts and battery status to the EMS network.

1.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 03, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 *Justification*

Radiated emission screening was performed in 3 orthogonal orientations. The vertical position was selected as the “worst” case position for testing. .

2.2 *Special Accessories*

No special accessories were needed.

2.3 *Equipment Modifications*

No modifications were needed in order to achieve compliance

2.4 *Configuration of Tested System*




Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photos



Figure 2. Radiated Emission Test Above 1 GHz



Figure 3. Radiated Emission Test 9 kHz – 30 MHz

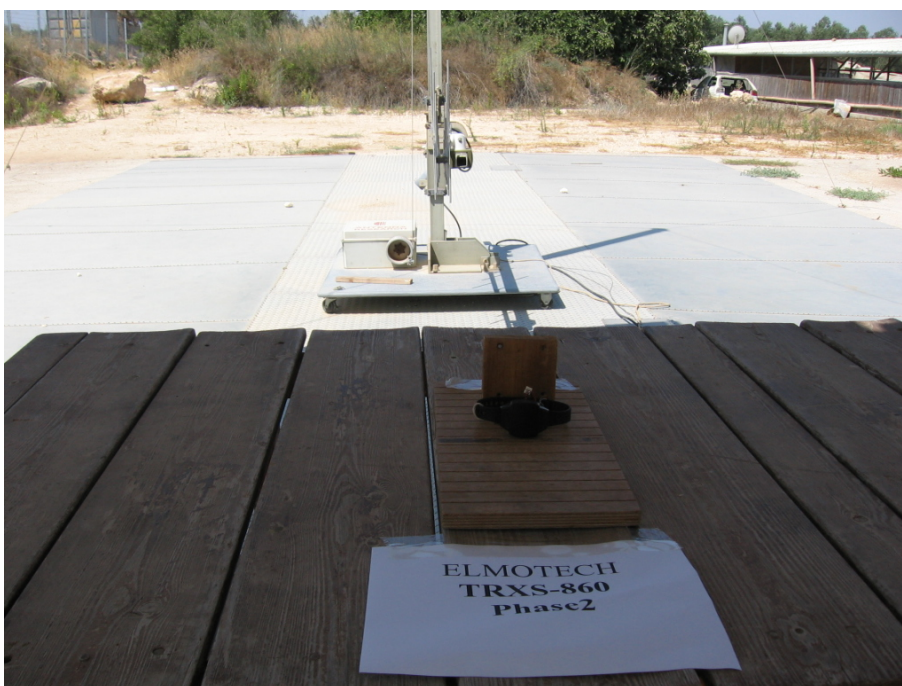


Figure 4. Radiated Emission Test 30 MHz – 1000 MHz

4. Average Factor Calculation

1. Burst duration = 4.5msec + 6.0msec
2. Time between bursts = 32.5msec
3.
$$\text{Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[1 \times \frac{10.5}{100} \right] = -19.6\text{dB}$$

Note Pulse duration and pulse period was considered worst case always ON cines unit transmits randomly.

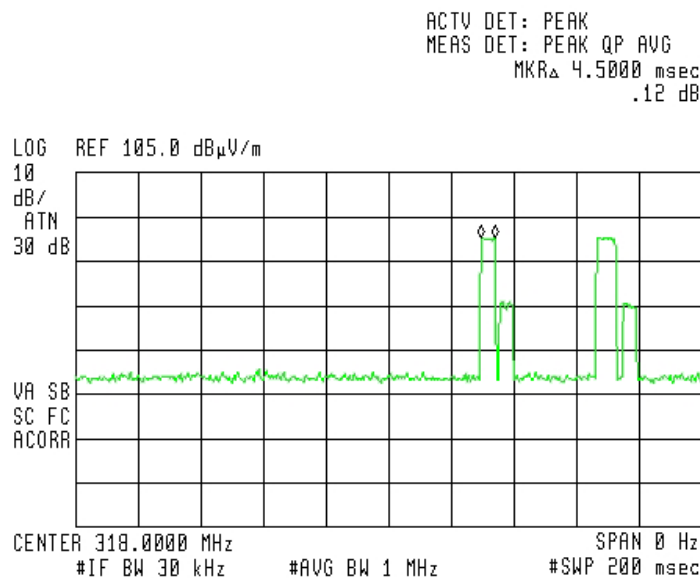


Figure 5. First Burst duration = 4.5 msec

Note: The lower pulse is the acknowledge signal transmitted by the base station, not defined under this scope of work.

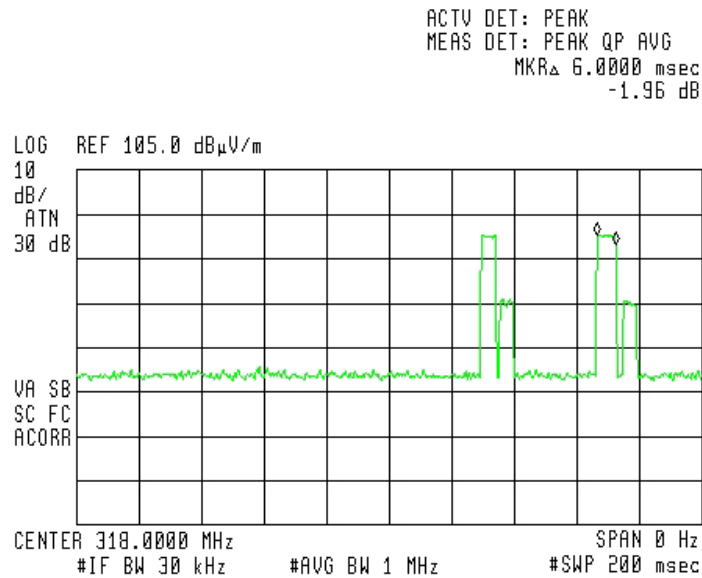


Figure 6. Second Burst duration = 6 msec

Note: The lower pulse is the acknowledge signal transmitted by the base station, not defined under this scope of work.

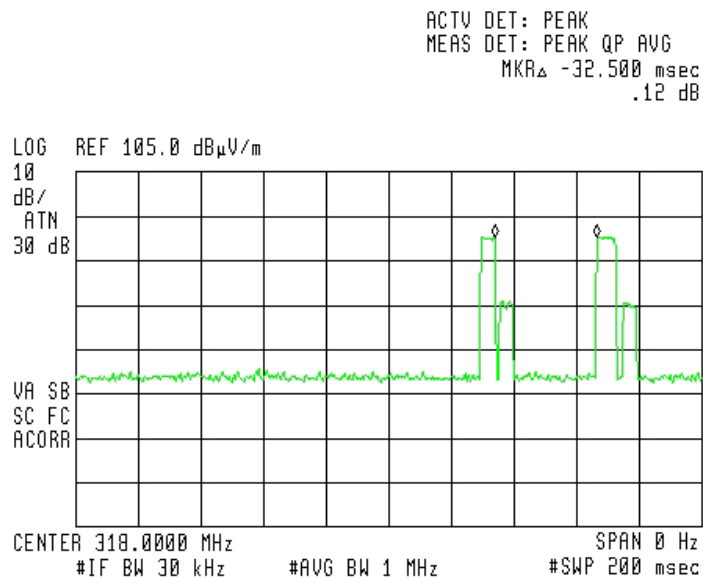


Figure 7. Number of Transmissions within 100msec

Note: The lower pulse is the acknowledge signal transmitted by the base station, not defined under this scope of work.

4.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 Year
Antenna Biconical	ETS	3109	002-3244	August 1, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	N/A	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	See Figure 8.	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See Figure 9 to Figure 10.	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.11

Typed/Printed Name: A. Sharabi

Periodic Operation

E.U.T Description Ankle Tag
 Type TRXS-860
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

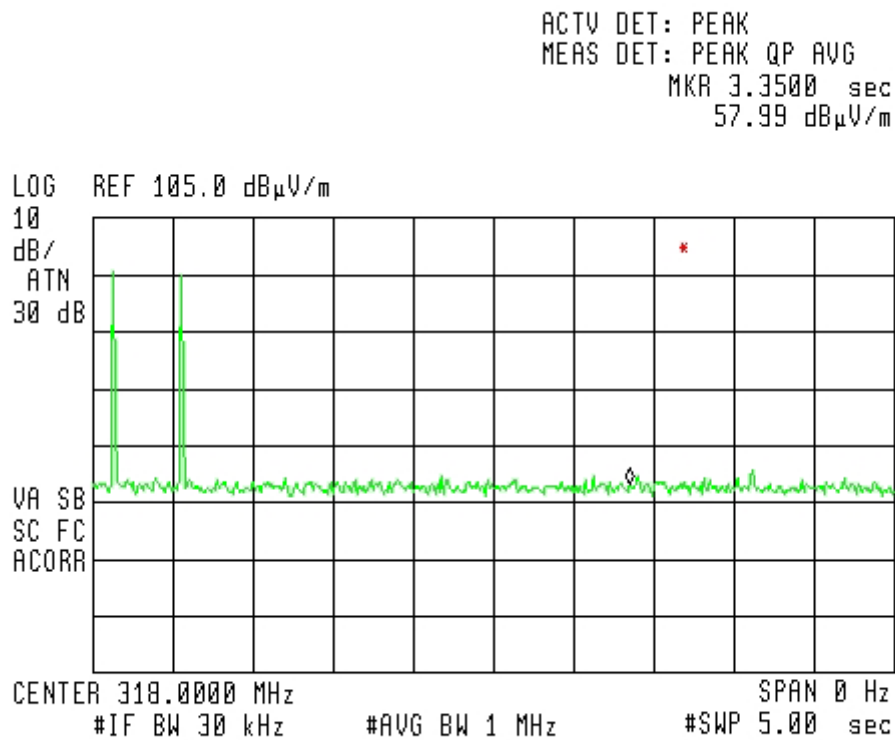


Figure 8-Transmission Within 5sec

Periodic Operation

E.U.T Description Ankle Tag
 Type TRXS-860
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

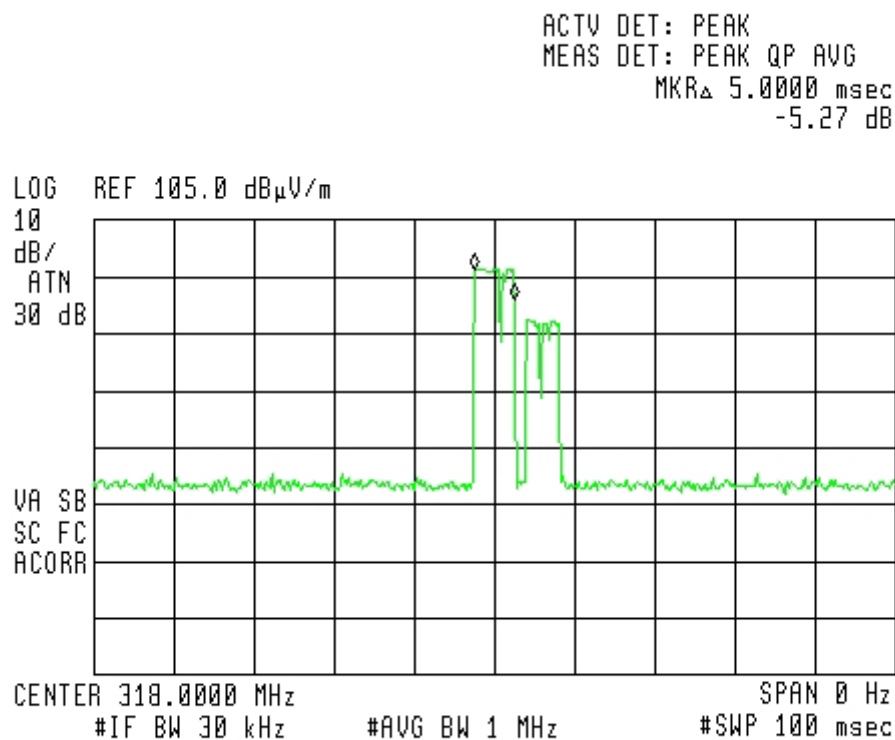



Figure 9. Supervision Signal Once Every 29.8sec for 5msec

Note: The lower pulse is the acknowledge signal transmitted by the base station, not defined under this scope of work.

Periodic Operation

E.U.T Description Ankle Tag
Type TRXS-860
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

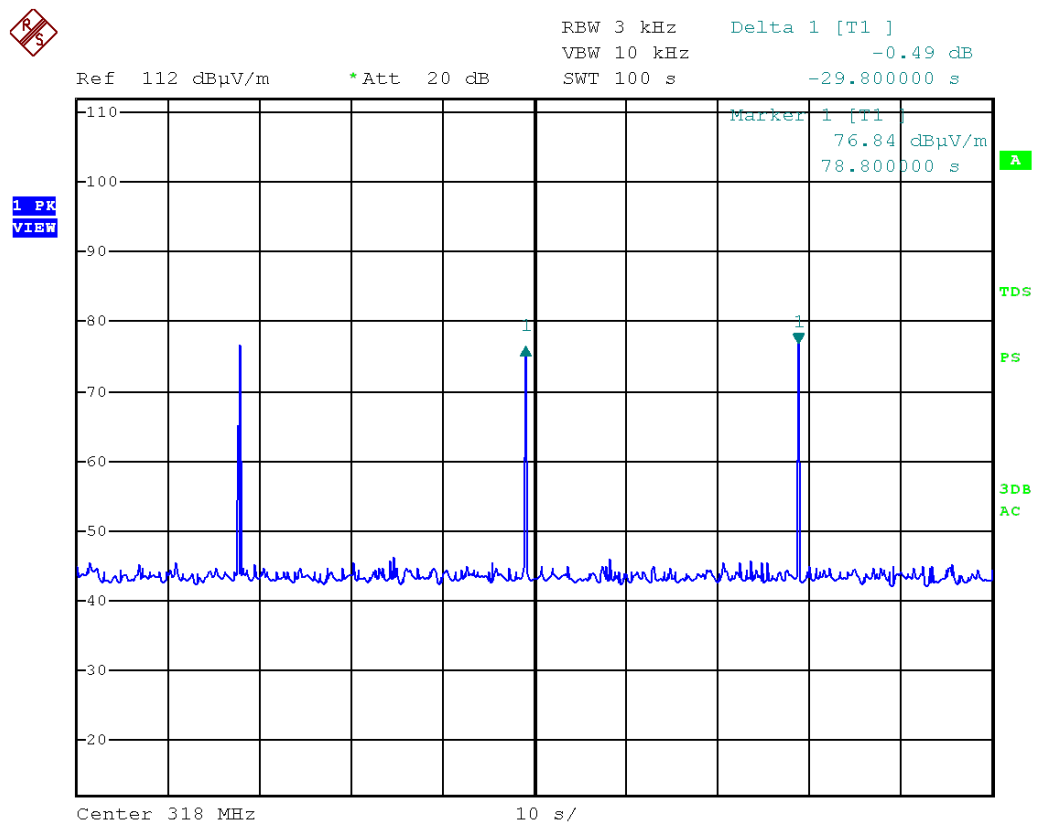

Date: 19.JUL.2011 10:33:04

Figure 10. Supervision Signal Once Every 29.8sec

$$[(3600/29.8) \times 5 \text{ msec}] = 610 \text{ msec} < 2 \text{ sec}$$

5.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	Rohde & Schwarz	ESCI7	100724	October 2010, 2010	1 Year
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (318 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

6.3 Measured Data

JUDGEMENT: Passed by 4.0 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 11 to Figure 13.

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.11

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Ankle Tag
Type TRXS-860
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dBμV/m)	Average Factor (dB)	Average Result (dBμV/m)	Average Specification (dBμV/m)	Margin (dB)
318.00	H	91.4	-19.6	71.8	75.8	-4.0
318.00	V	78.1	-19.6	58.5	75.8	-17.3

**Figure 11. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL.
Detector: Peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dBμV/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Result" (dBμV/m)=Peak Reading (dBμV/m)+ Average Factor (dB)

Field Strength of Fundamental

E.U.T Description Ankle Tag
 Type TRXS-860
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

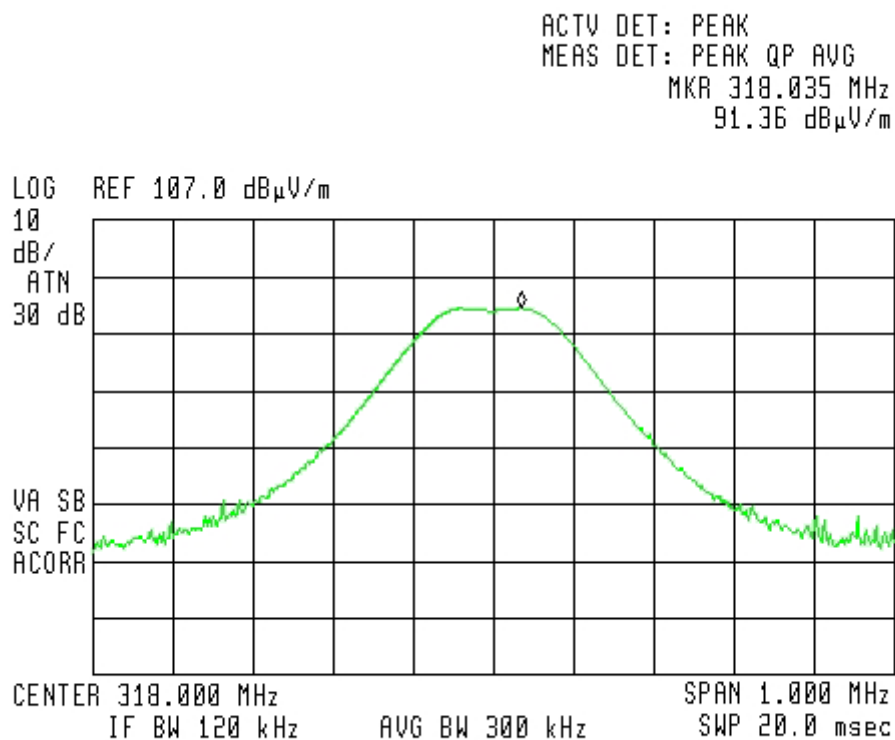


Figure 12. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak, Average

Field Strength of Fundamental


E.U.T Description Ankle Tag
Type TRXS-860
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

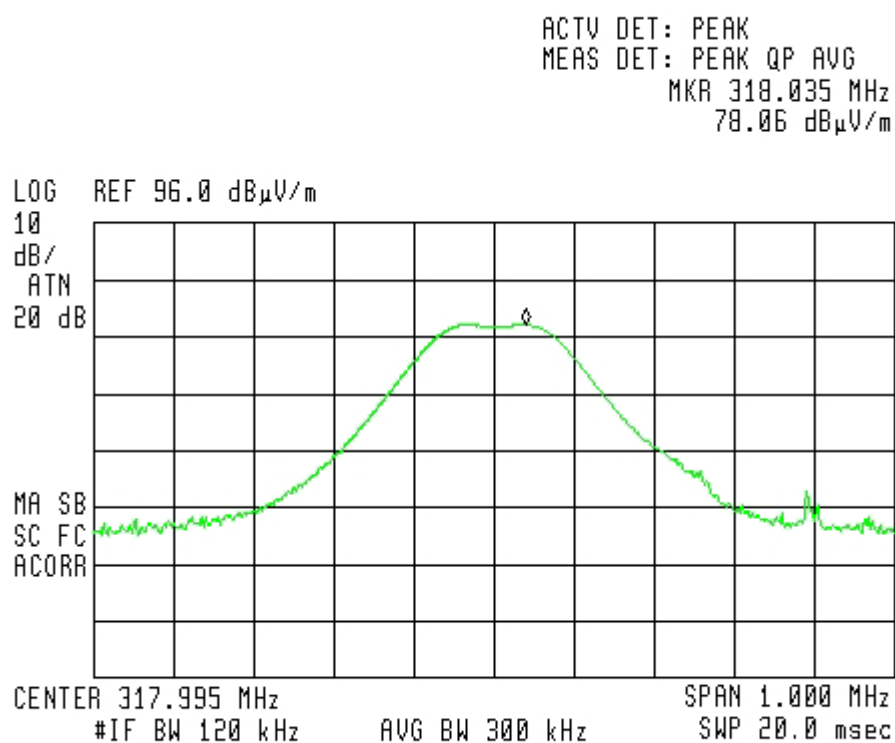

**Figure 13. Field Strength of Fundamental. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak, Average**

6.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.

The E.U.T. was operated at the frequency of 318 MHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.11

Typed/Printed Name: A. Sharabi

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ v/m]
 RA: Receiver Amplitude [dB μ v]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

8. Spurious Radiated Emission

8.1 Test Specification

30 - 3500 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions in the frequency range of 30 – 1000 MHz were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 3.5 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

8.3 Test Data

JUDGEMENT: Passed by 25.4 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 25.4 dB in the worst case at the frequency of 1272 MHz, Horizontal polarization.

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.11

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Ankle Tag
Type TRXS-860
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 3500 MHz
Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency (MHz)	Antenna Polarity (H/V)	Peak Reading (dBμV/m)	Average Factor	Average Result (dBμV/m)	Average Specification (dBμV/m)	Margin (dB)
636.00	V	41.3	19.6	21.7	55.8	-34.1
636.00	H	39.9	19.6	20.3	55.8	-35.5
1272.00	V	45.0	19.6	25.4	55.8	-30.4
1272.00	H	50.0	19.6	30.4	55.8	-25.4

**Figure 14. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak,Avg**

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dBμV/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Result" (dBμV/m)=Peak Reading (dBμV/m)+ Average Factor (dB)

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	November 05, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2010	1 Year
Antenna Bioconical	ETS	3109	002-3244	August 1, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 27, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 120 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20Bc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

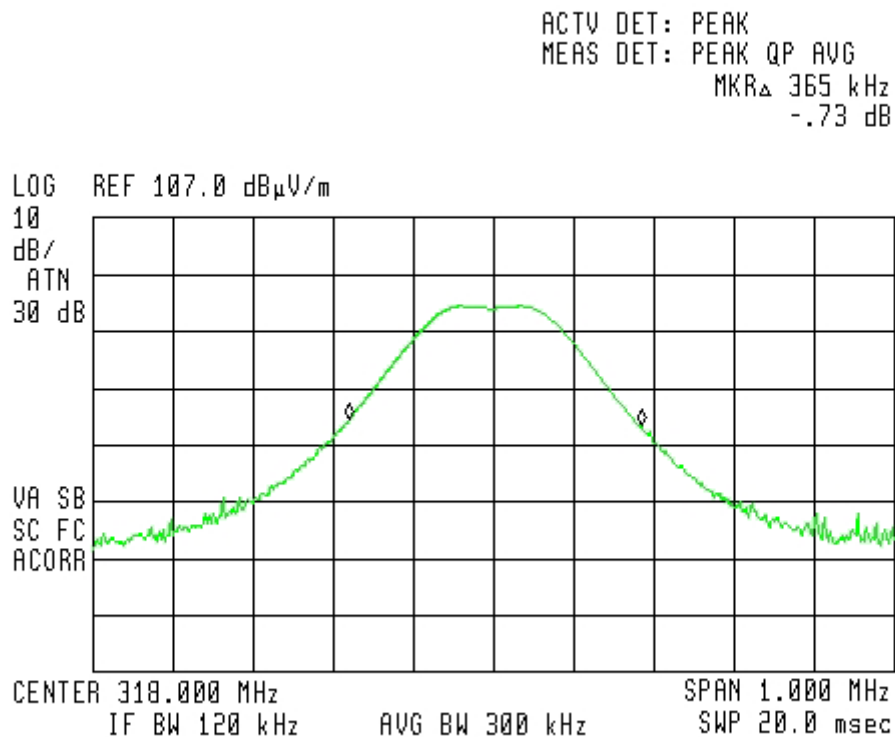


Figure 15- Bandwidth

9.2 Results table

E.U.T Description: Ankle Tag

Model: TRXS-860

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading	Specification (1) (kHz)	Margin (kHz)
365 kHz	795	430

Figure 16 Bandwidth

JUDGEMENT: Passed by 430 kHz

TEST PERSONNEL:

Tester Signature: 

Date: 30.10.11

Typed/Printed Name: A. Sharabi

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 Test Equipment Used.

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 17 Test Equipment Used

10. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY	CORRECTION
(GHz)	FACTOR
(dB)	
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

10.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

10.4 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

10.5 Correction factors for BICONICAL ANTENNA
Type 3109,
at 3 meter range

FREQUENCY	AFE
(MHz)	(dB/m)
30.0	13.3
40.0	12.7
50.0	11.0
60.0	9.2
70.0	10.0
80.0	7.2
90.0	7.9
100.0	9.4
120.0	11.9
140.0	13.1
160.0	12.3
180.0	12.4
200.0	14.8
250.0	15.3
300.0	17.9

NOTE:

1. Antenna serial number is 002-3244.

10.6 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2