

FCC BT REPORT

Class II Permissive Change

Applicant Name:
Socket Mobile, Inc.

Address:
39700 Eureka Drive
Newark, CA, USA 94560

Date of Issue:
December 26, 2018
Test Site/Location:
EMCE Engineering
1726 Ringwood Avenue San Jose, California USA
Report No.: EMCE-R-1811-F001-1

FCC ID: **LUBMA41**

APPLICANT: **Socket Mobile, Inc.**

Model: S700, S730, S740
EUT Type: Barcode Scanner
Max. RF Output Power: 3.627 dBm (2.305 mW)
Frequency Range: 2402 MHz - 2480 MHz (Bluetooth)
Modulation type GFSK(Normal), π/4DQPSK and 8DPSK(EDR)
FCC Classification: FCC Part 15 Spread Spectrum Transmitter
FCC Rule Part(s): Part 15 subpart C 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

Steve.In
Test Engineer
Certification Division

Billy Kim
Technical Manager
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the EMCE Engineering, Inc..

Version

TEST REPORT NO.	DATE	DESCRIPTION
EMCE-RF-1811-F001	November 16, 2018	- First Approval Report
EMCE-RF-1811-F001-1	December 26, 2018	- Revised correction factors

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES.....	6
4. INSTRUMENT CALIBRATION	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES.....	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. MEASUREMENT UNCERTAINTY	7
8. SUMMARY OF TEST RESULTS	8
9. TEST RESULT	9
9.1 PEAK POWER	9
9.2 BAND EDGES.....	16
9.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW).....	24
9.4 NUMBER OF HOPPING FREQUENCY	33
9.5 TIME OF OCCUPANCY (DWELL TIME)	37
9.6 SPURIOUS EMISSIONS	44
9.6.1 CONDUCTED SPURIOUS EMISSIONS	44
9.6.2 RADIATED SPURIOUS EMISSIONS.....	53
9.6.3 RADIATED RESTRICTED BAND EDGES.....	69
9.7 POWERLINE CONDUCTED EMISSIONS	77
10. LIST OF TEST EQUIPMENT	84
11. ANNEX A_ TEST SETUP PHOTO	85

1. GENERAL INFORMATION

Applicant: Socket Mobile, Inc.
Address: 39700 Eureka Drive Newark, CA, USA 94560
FCC ID: LUBMA41
EUT Type: Barcode Scanner
Model: S700, S730, S740
Date(s) of Tests: November 01, 2018 ~ November 26, 2018
Place of Tests: EMCE Engineering
 1726 Ringwood Avenue San Jose, California USA

2. EUT DESCRIPTION

Model	S700, S730, S740
EUT Type	Barcode Scanner
Power Supply	Adapter DC 5.0 V / Battery 2.4 V
Frequency Range	2402 MHz - 2480 MHz (Bluetooth)
Max. RF Output Power:	3.627 dBm (2.305 mW)
BT Operating Mode	Normal, EDR
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79Channels
Antenna Specification	Antenna type: PCB trace Antenna Peak Gain : 0.36 dBi

* 15.247 Requirements for Bluetooth transmitter

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

Conducted Antenna Terminal

See Section from 7.8.2 to 7.8.8.(ANSI 63.10-2013)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

CSR BT Power setting is below.

CSR Power setting	GFSK	8DPSK	π/4DQPSK
Ext	255	255	255
Int	32	104	104

Note. There is no design change that increases or decreases the output power. A decrease in the power setting configuration.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 1726 Ringwood Avenue, San Jose, CA 95131, USA

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.68
Radiated Disturbance (9 kHz ~ 30 MHz)	3.20
Radiated Disturbance (30 MHz ~ 1 GHz)	4.73
Radiated Disturbance (1 GHz ~ 18 GHz)	5.21
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

8. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)(ii) or (iii)	N/A	CONDUCTED	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	< 1 W if \geq 75 non-overlapping hopping channels used < 0.125 W if < 75 non-overlapping hopping channels used		PASS
Carrier Frequency Separation	§15.247(a)(1)	>25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	\geq 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 9.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 9.6.2	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 9.6.3		PASS

NOTE

1. Host device use the Approval Single Modular / FCC ID : LUBMA41
2. There is no design change that increases or decreases the output power.

Decrease the power setting configuration.

9. TEST RESULT


9.1 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

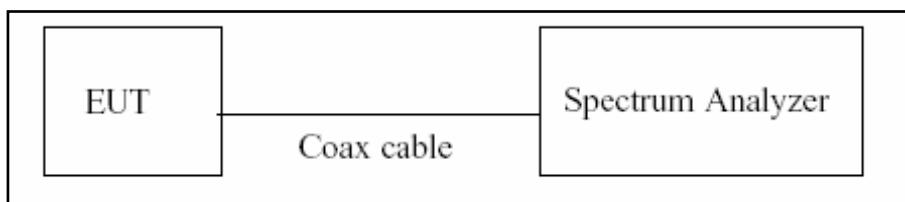

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW \geq RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

SAMPLE CALCULATION

$$\begin{aligned} \text{Output Power} &= \text{Spectrum Reading Power} + \text{Cable loss} \\ &= 10 \text{ dBm} + 0.6 \text{ dB} = 10.6 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the splitter and cable combination.
2. Spectrum offset = Cable loss

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)	Result
		(dBm)	(mW)		
Low	2402	-7.386	0.183	125	PASS
Mid	2441	-7.696	0.170		PASS
High	2480	-6.998	0.200		PASS

Channel	Frequency (MHz)	Output Power (8DPSK)		Output Power (π/4DQPSK)		Limit (mW)	Result
		(dBm)	(mW)	(dBm)	(mW)		
Low	2402	3.300	2.138	3.127	2.054	125	PASS
Mid	2441	3.068	2.027	2.888	1.944		PASS
High	2480	3.627	2.305	3.415	2.195		PASS

Test Plots (GFSK)
Peak Power (CH.0)



Test Plots (GFSK)
Peak Power (CH.39)




Test Plots (GFSK)

Peak Power (CH.78)




Test Plots (8DPSK)

Peak Power (CH.0)

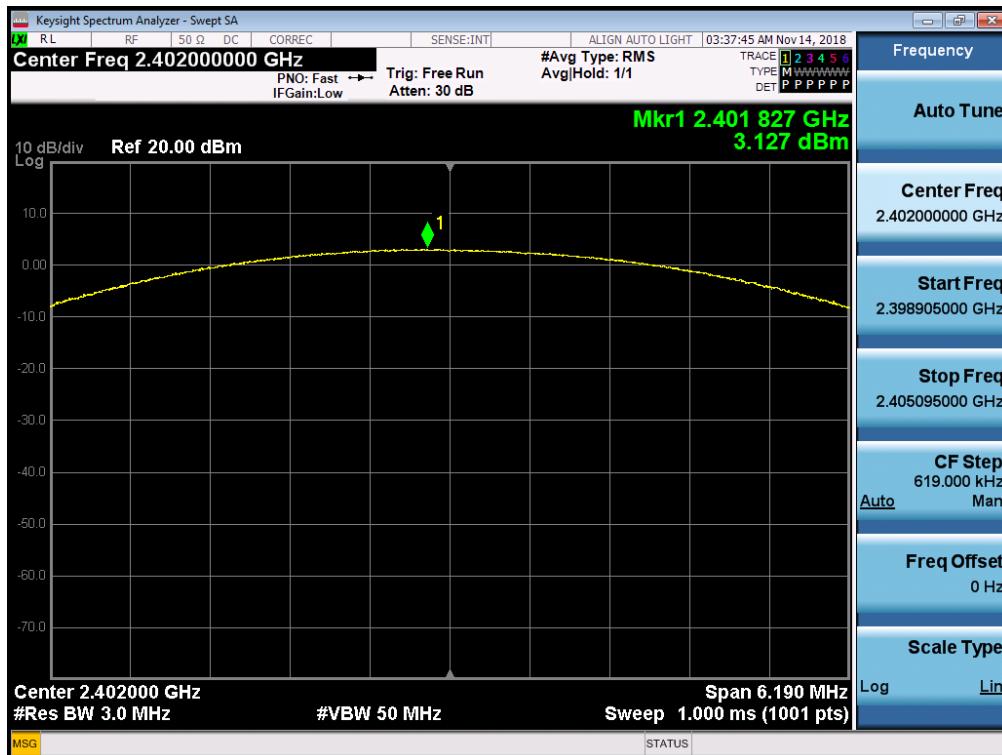


Test Plots (8DPSK)

Peak Power (CH.39)

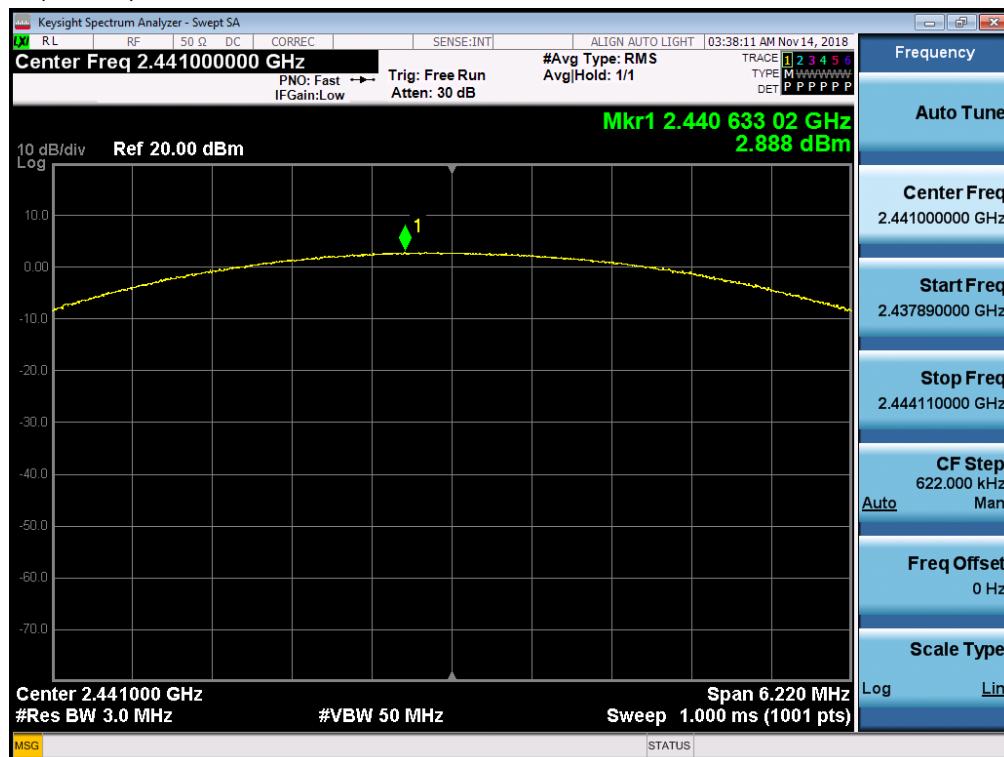

Test Plots (8DPSK)

Peak Power (CH.78)

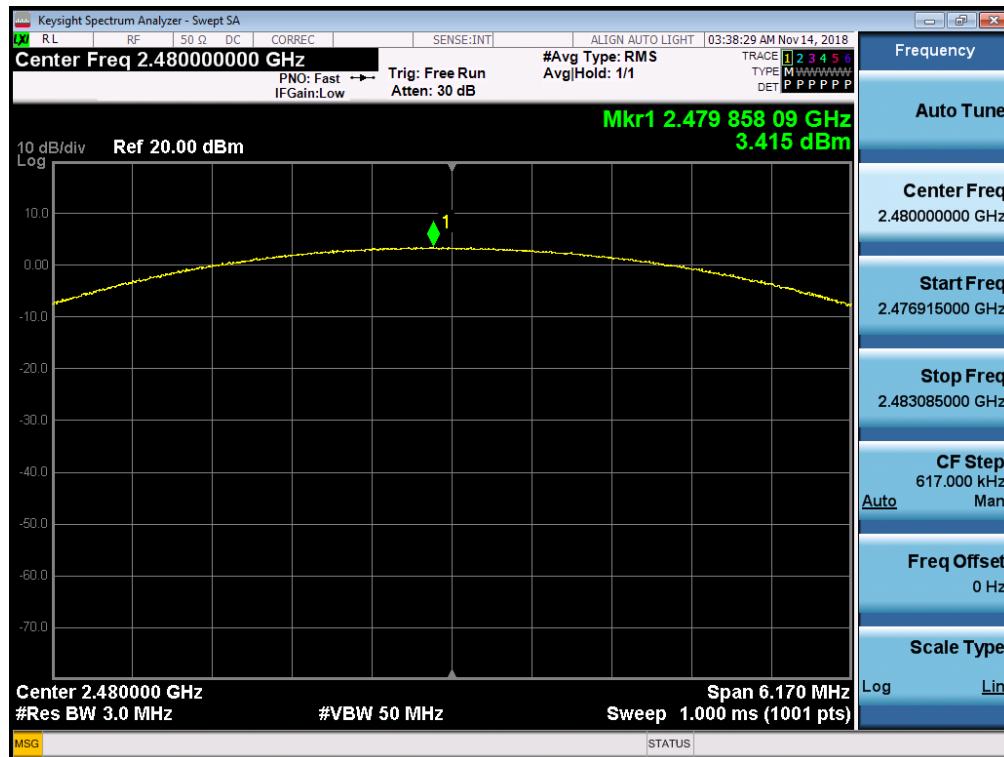

Test Plots (π /4DQPSK)

Peak Power (CH.0)




Test Plots (π /4DQPSK)

Peak Power (CH.39)



Test Plots (π /4DQPSK)

Peak Power (CH.78)

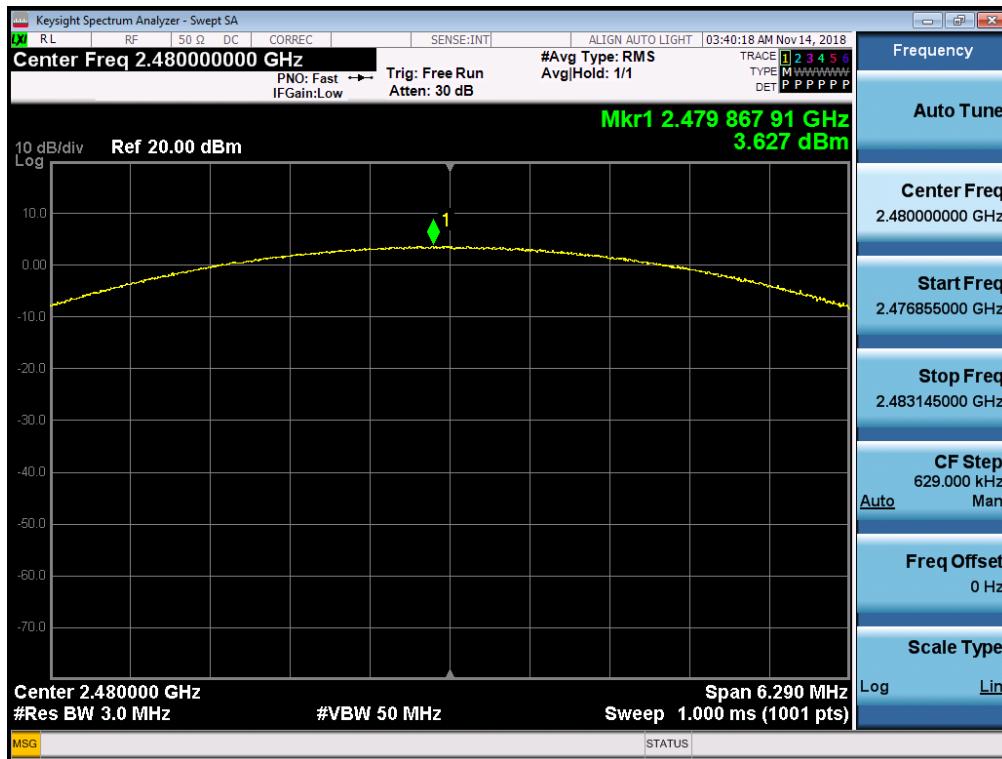


9.2 BAND EDGES

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

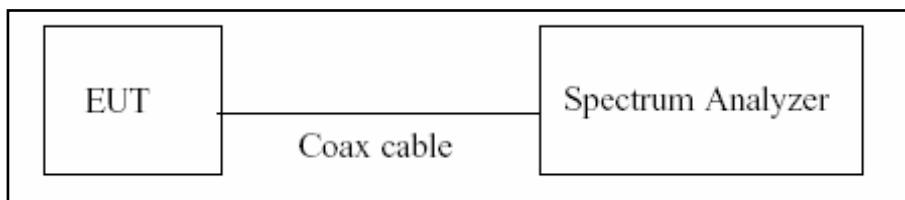

TEST PROCEDURE

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

TEST RESULTS

See attached.

Note :

1. The results in plot is already including the actual values of loss for the splitter and cable combination.
2. Spectrum offset = Power Splitter loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the splitter and cable combination is 7.36 dB at 2402 MHz and is 7.44 dB at 2480 MHz. So, 7.4 dB is offset. And the offset gap in the 2.4 GHz range do not affect the band edge measurement final result.
4. And the loss of the added RF cable is 0.6dB. So, We applied 8 dB offset.

Test Data

- Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	π/4DQPSK (dB)	Limit (dBc)	Margin			Result
					GFSK (dBc)	8DPSK (dBc)	π/4DQPSK (dBc)	
Lower	38.620	47.568	44.880	20	18.62	27.57	24.88	PASS
Upper	39.846	45.137	43.806		19.85	25.14	23.81	PASS


- With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	π/4DQPSK (dB)	Limit (dBc)	Margin			Result
					GFSK (dBc)	8DPSK (dBc)	π/4DQPSK (dBc)	
Lower	39.149	48.670	46.200	20	19.15	28.67	26.20	PASS
Upper	39.506	44.679	44.116		19.51	24.68	24.12	PASS


Note :

1. The results in plot is already including the actual values of loss for cable
2. Spectrum offset = Cable loss


Test Plots without hopping (GFSK)
Band Edges (CH.0)

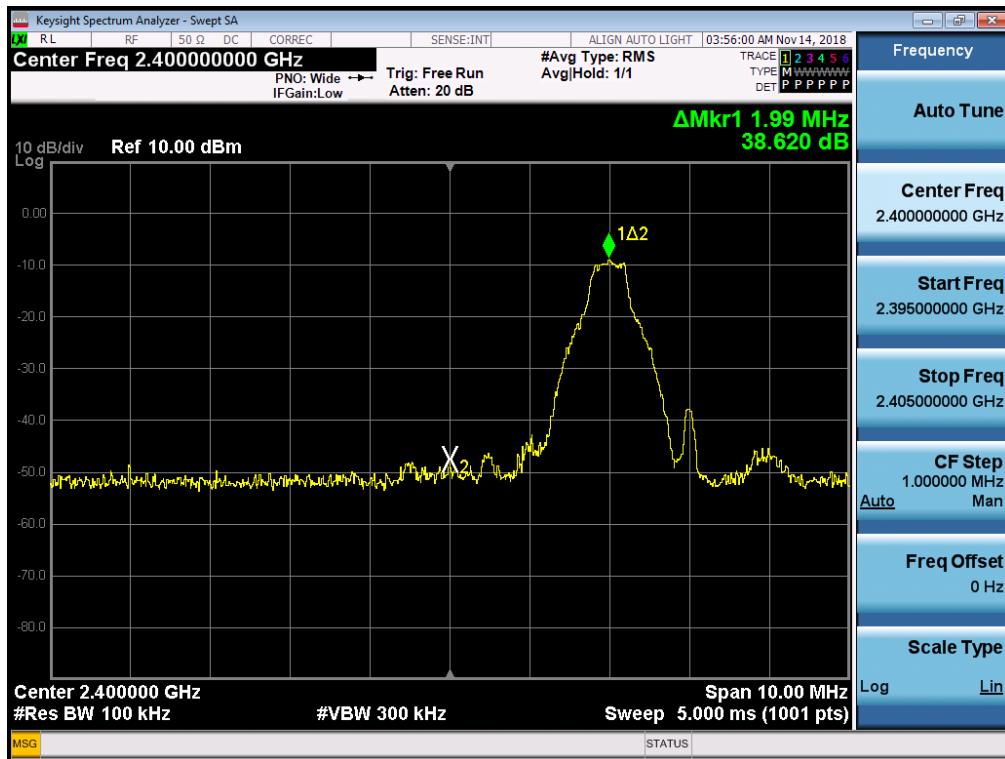

Test Plots without hopping (GFSK)
Band Edges (CH.78)

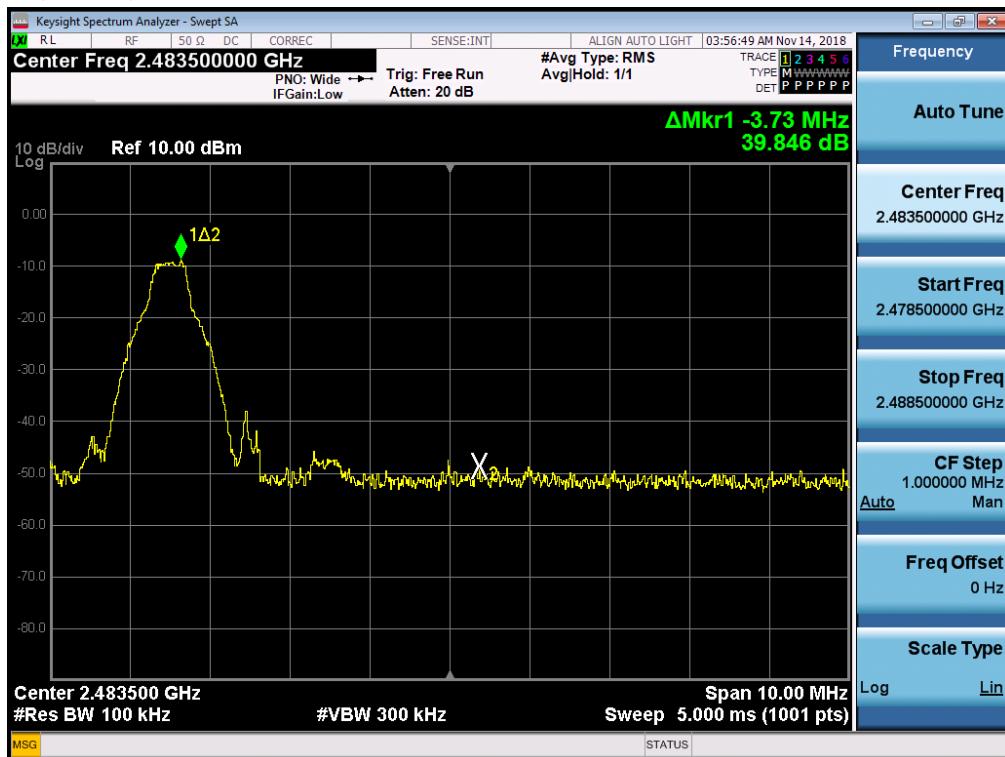

Test Plots without hopping (8DPSK)
Band Edges (CH.0)

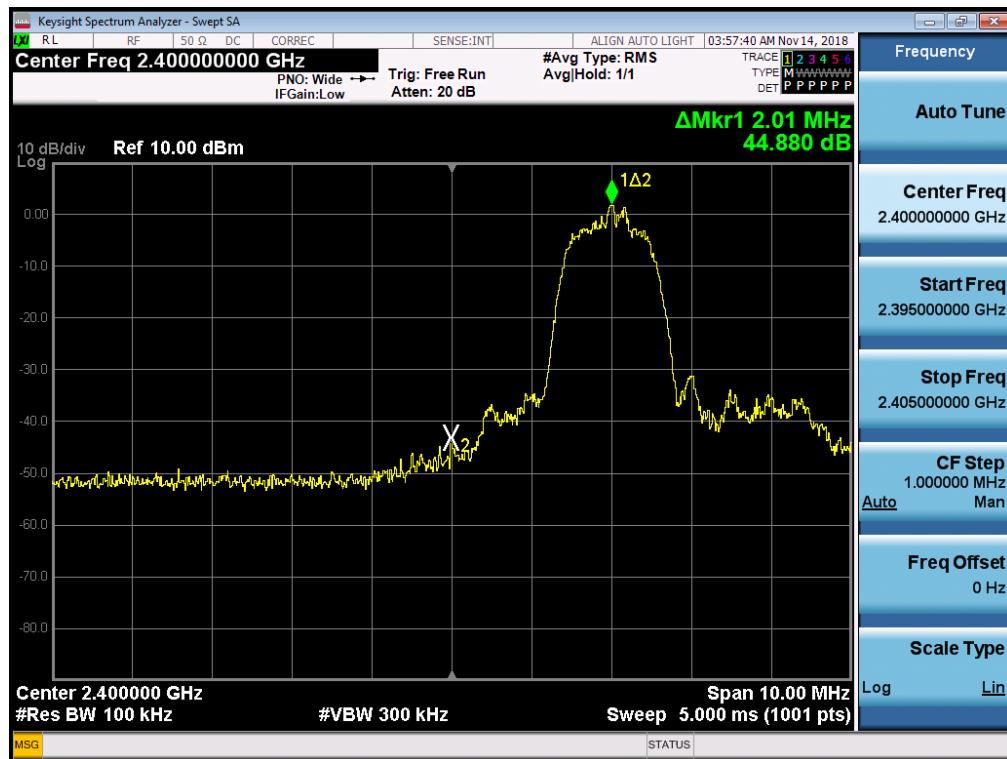


Test Plots without hopping (8DPSK)
Band Edges (CH.78)



Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)

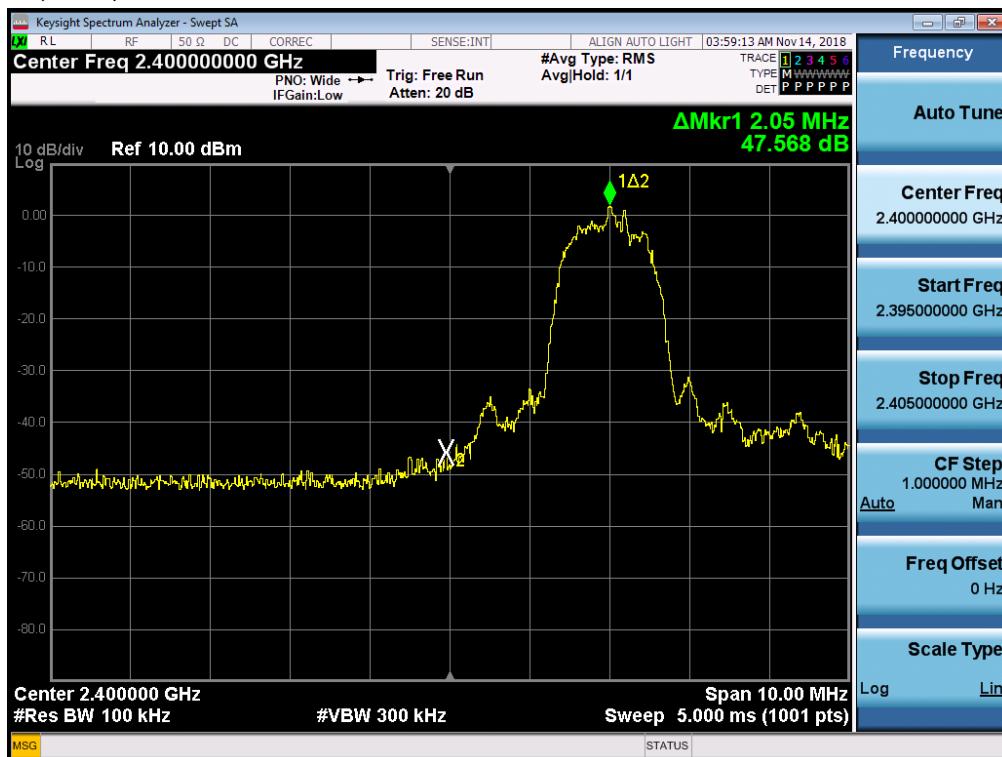


Test Plots without hopping ($\pi/4$ DQPSK)


Band Edges (CH.78)



Test Plots with hopping (GFSK)
Band Edges (CH.0)

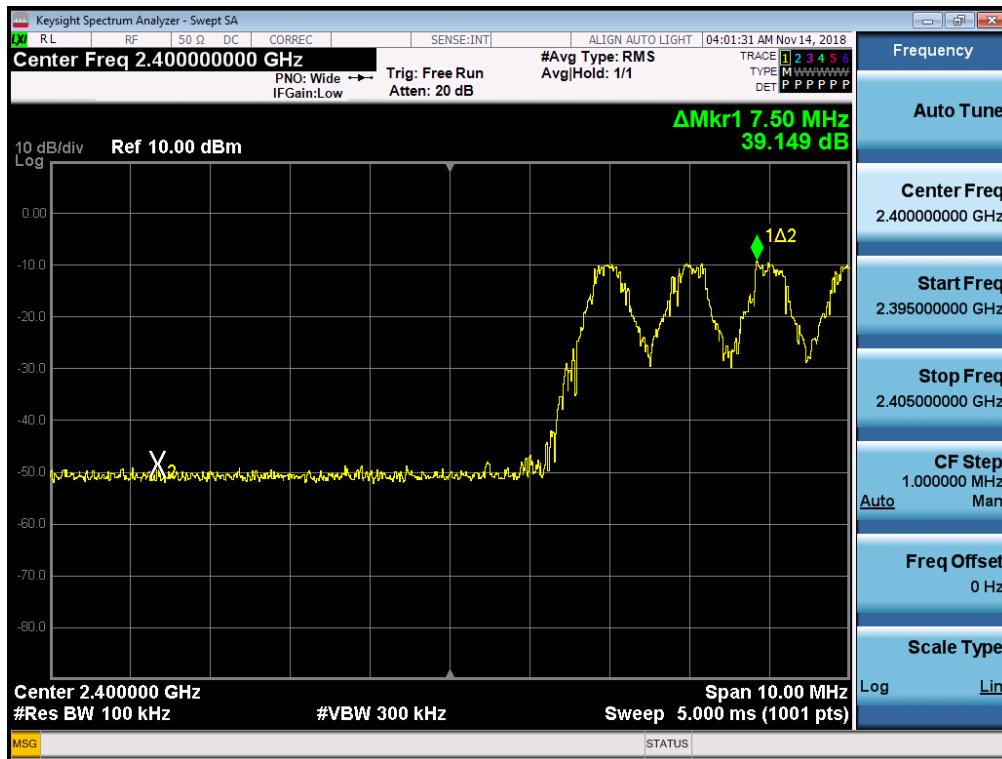


Test Plots with hopping (GFSK)
Band Edges (CH.78)

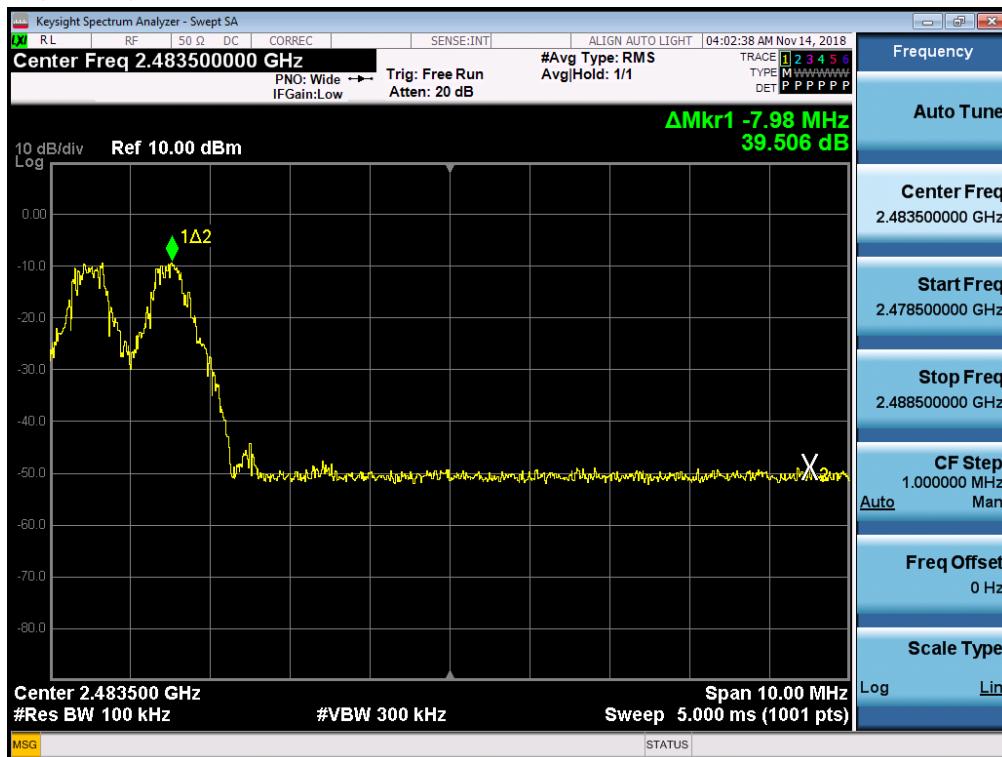

Test Plots with hopping (8DPSK)

Band Edges (CH.0)

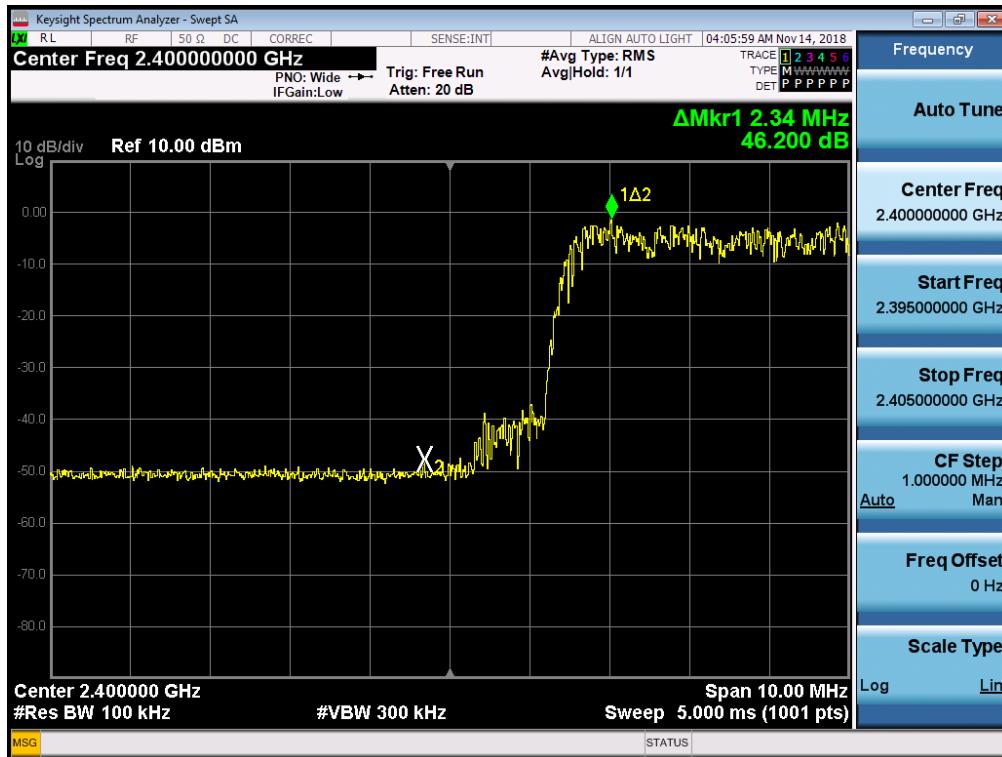

Test Plots with hopping (8DPSK)

Band Edges (CH.78)



Test Plots with hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)



Test Plots with hopping ($\pi/4$ DQPSK)

Band Edges (CH.78)




9.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

LIMIT

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

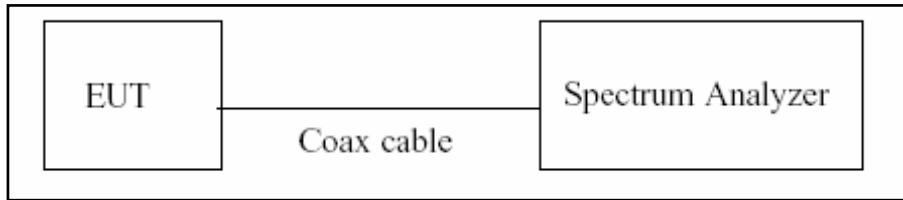

TEST PROCEDURE

The Channel Separation test is performed with hopping on. And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

TEST RESULTS

No non-compliance noted

Test Data

Channel Separation (kHz)			20dB Bandwidth (kHz)				Limit (kHz)	Result
GFSK	8DPSK	$\pi/4$ DQPSK	Channel	GFSK	8DPSK	$\pi/4$ DQPSK		
974	998	994	Low CH	944.13	1259.38	1237.98	640.22	Pass
			Middle CH	937.34	1255.30	1244.13	839.59	
			High CH	960.33	1258.29	1233.56	829.42	

Occupied Bandwidth (99% BW)

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	893.22	1181.02	1186.08
CH.39	891.57	1185.05	1181.45
CH.78	902.88	1181.07	1178.34

Note : The device Doesn't support AFH Mode. Device Internal system prevents to AFH Mode.


Test Plots (GFSK)

Channel Separation



Test Plots (8DPSK)

Channel Separation

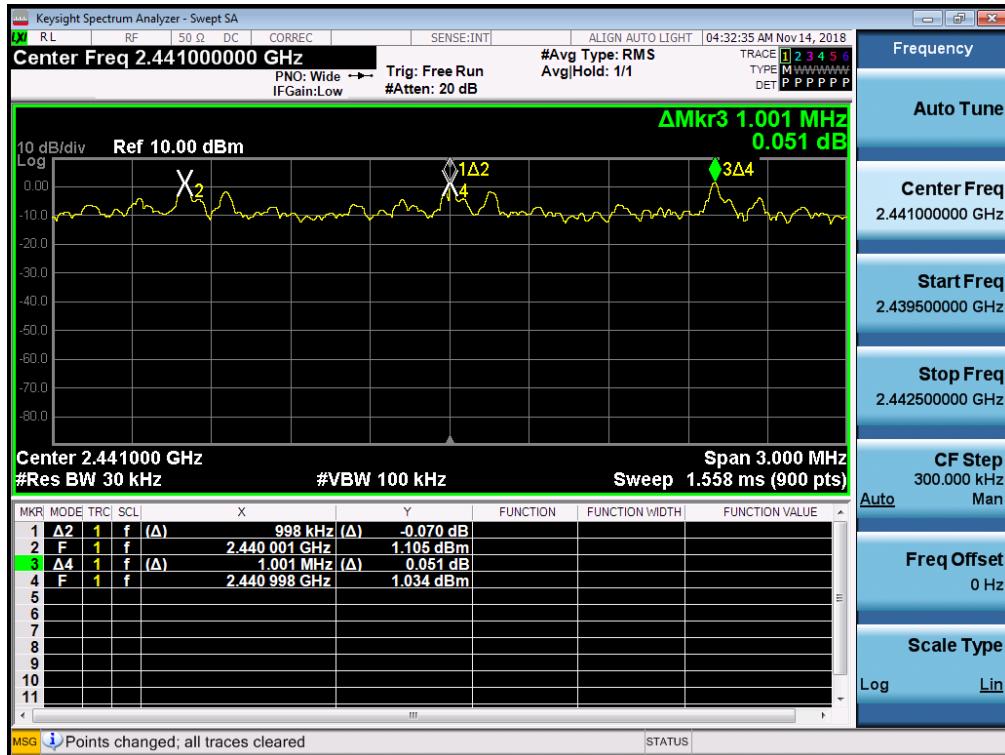


Test Plots ($\pi/4$ DQPSK)

Channel Separation




Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

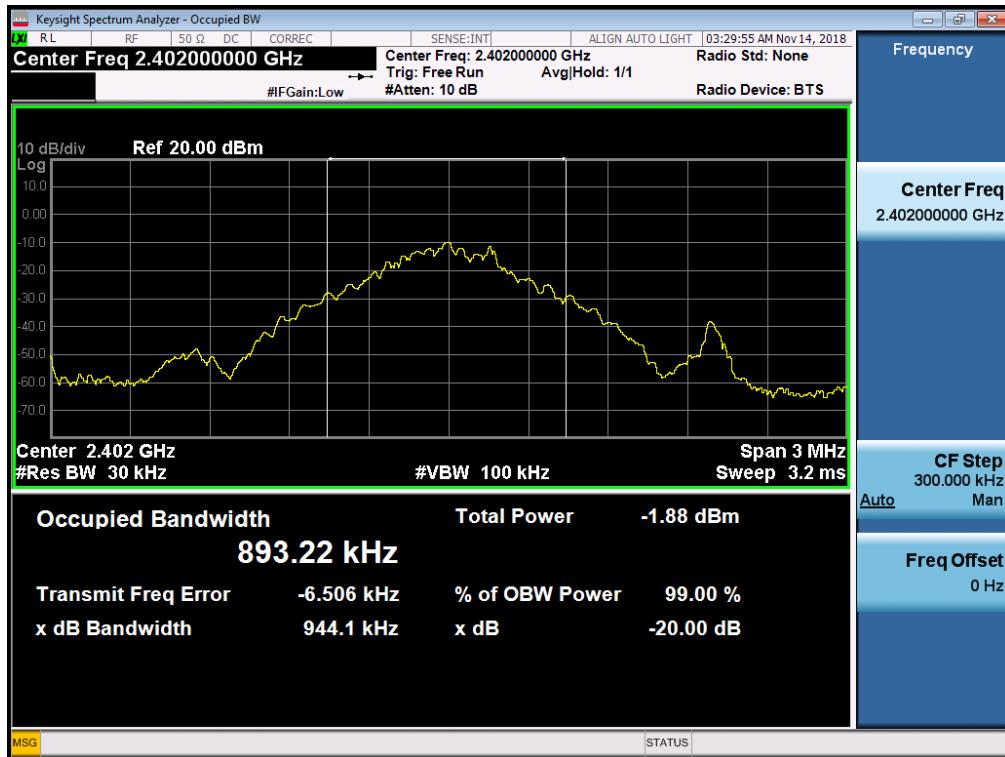


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

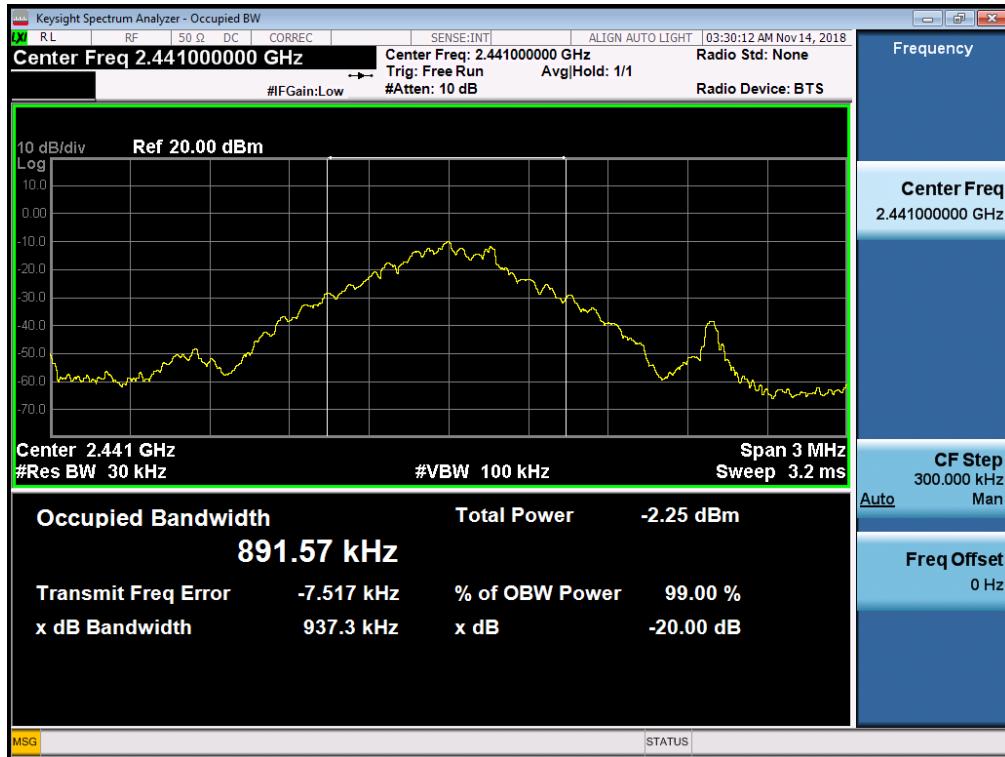

Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

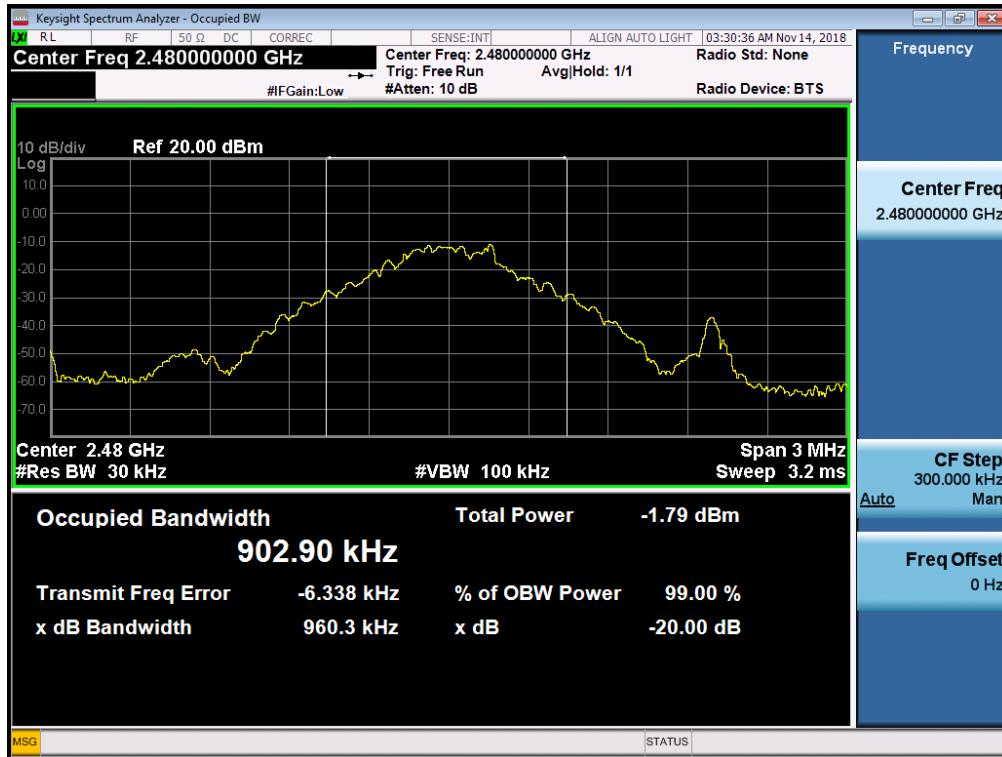


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)




Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

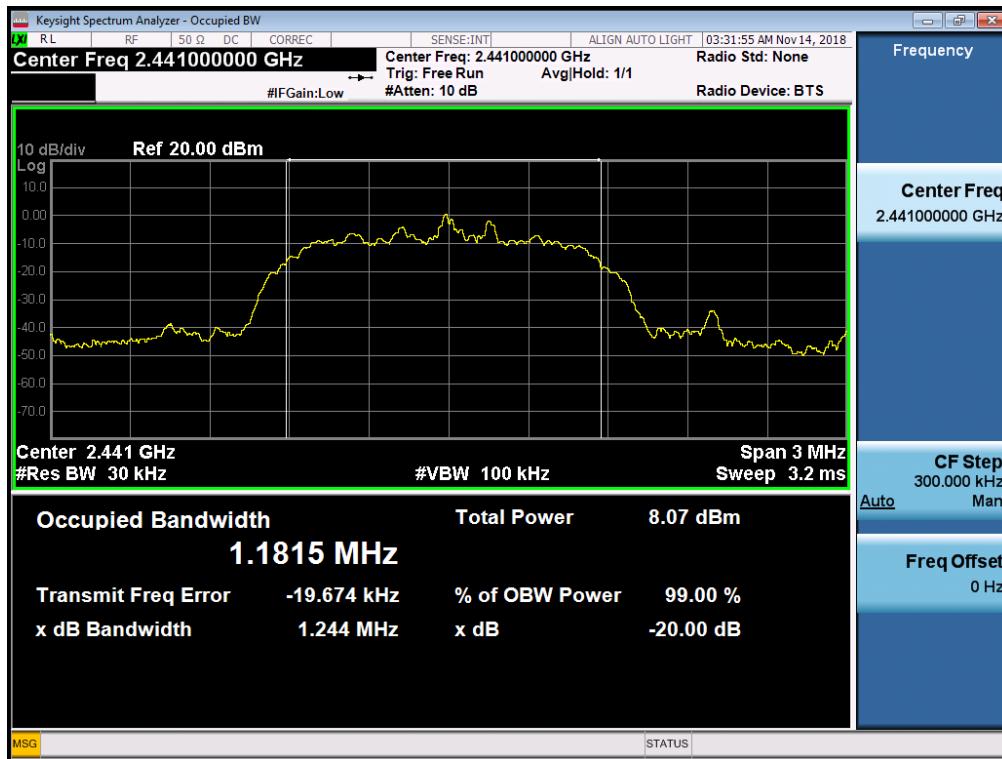


Test Plots (8DPSK)


20 dB Bandwidth & Occupied Bandwidth (CH.78)

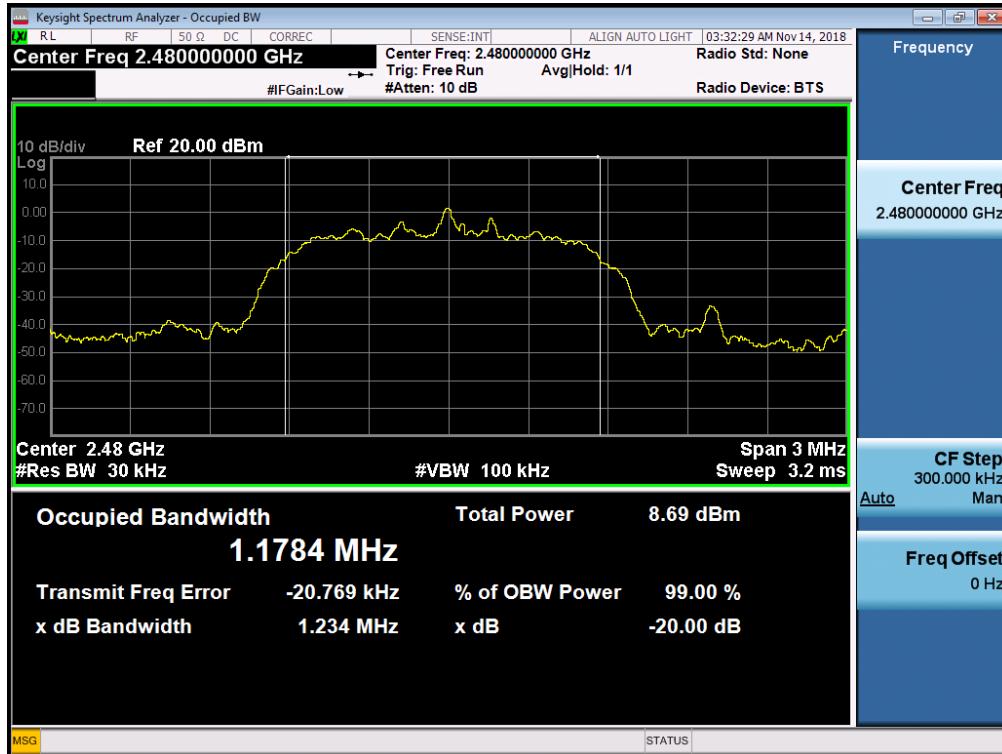


Test Plots ($\pi/4$ DQPSK)
20 dB Bandwidth & Occupied Bandwidth (CH.0)

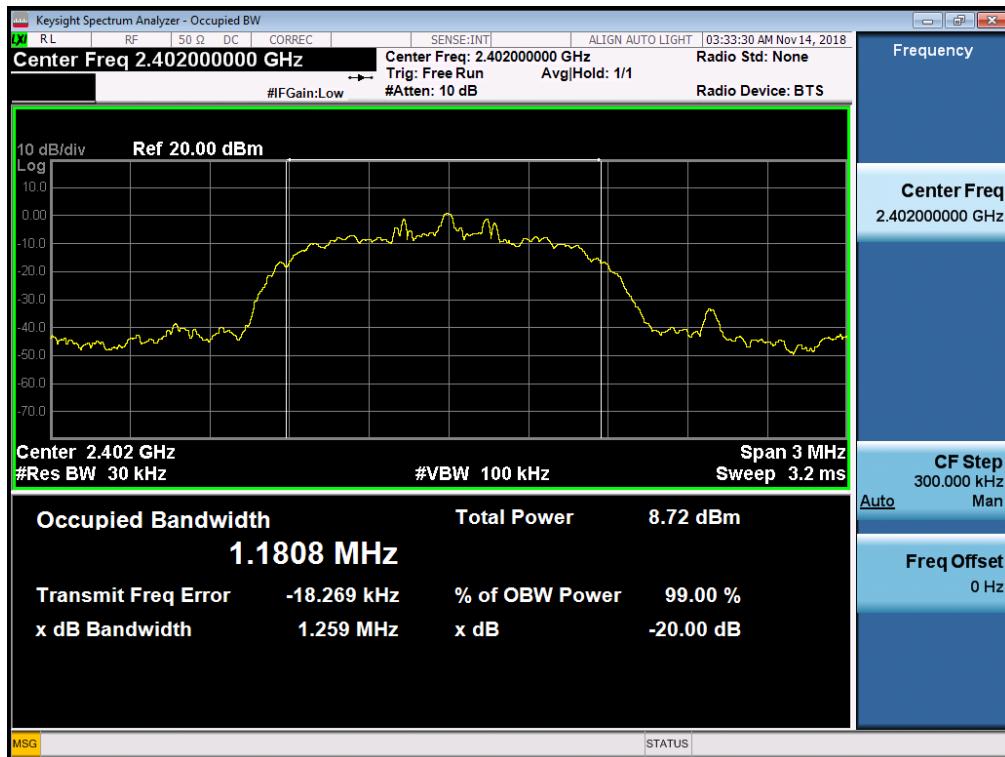

Test Plots ($\pi/4$ DQPSK)
20 dB Bandwidth & Occupied Bandwidth (CH.39)

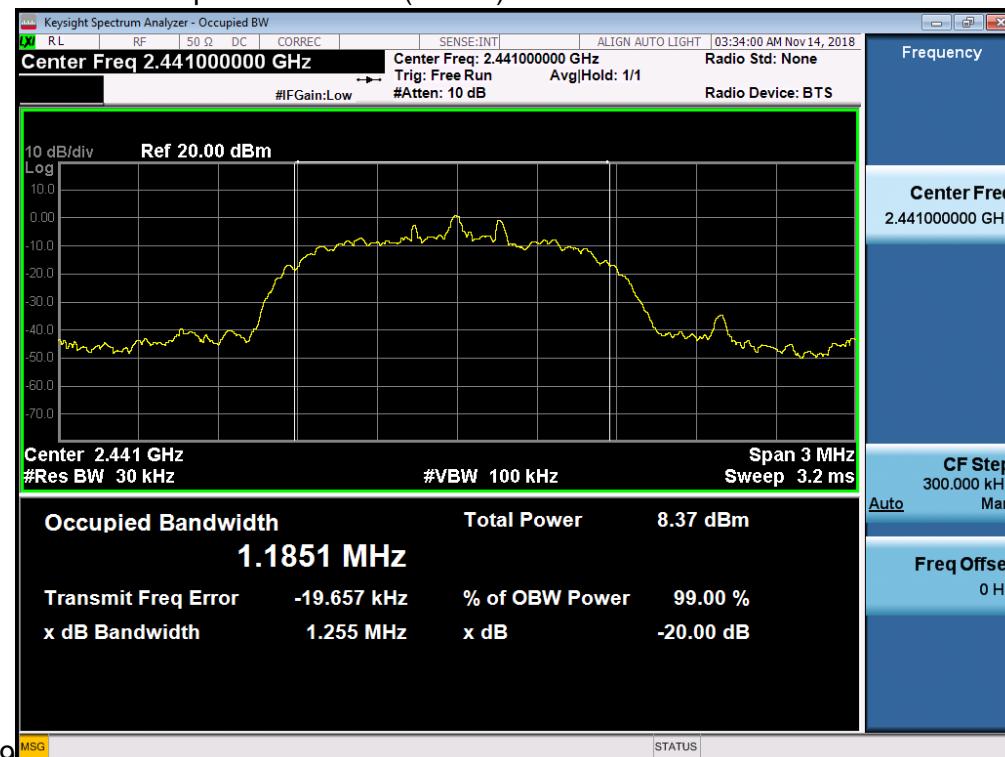

Test Plots ($\pi/4$ DQPSK)
20 dB Bandwidth & Occupied Bandwidth (CH.78)

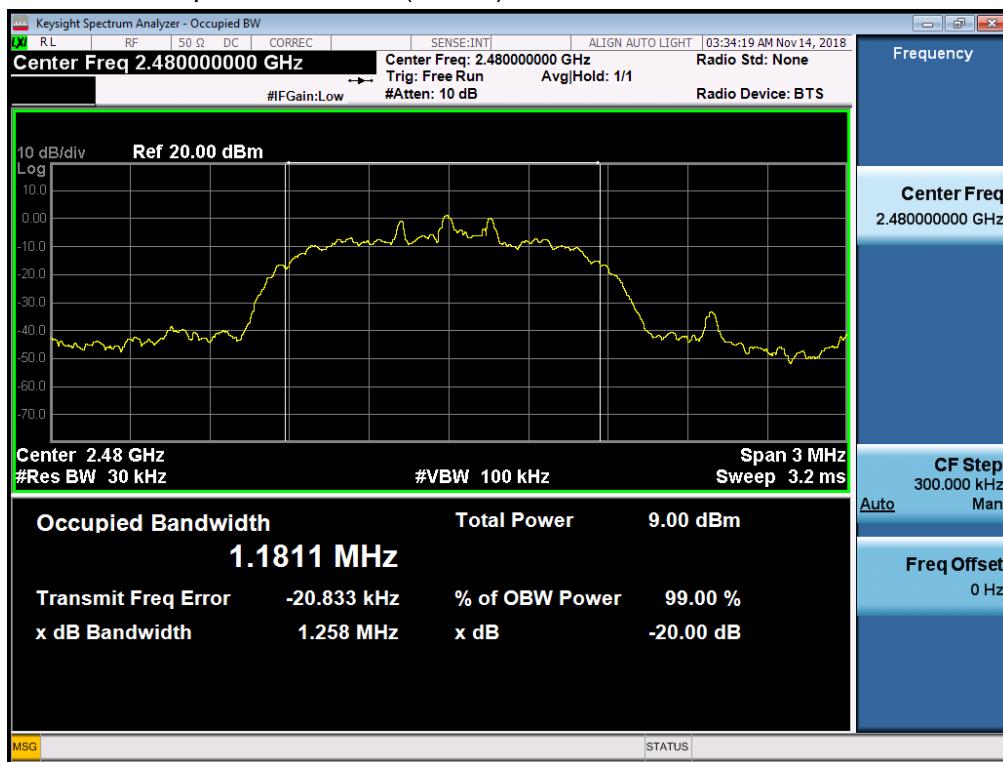


9.4 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

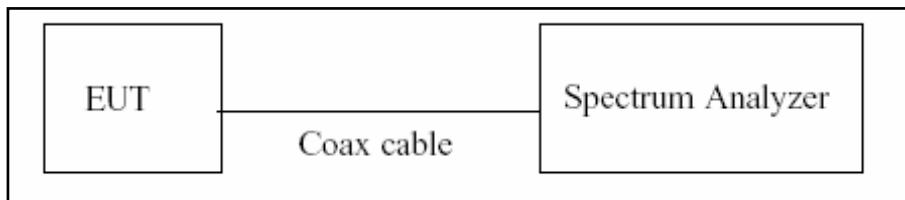

TEST PROCEDURE

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013)

- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

TEST RESULTS


No non-compliance noted

Test Data


Result (No. of CH)			Limit	Result
GFSK	8DPSK	$\pi/4$ DQPSK		
79	79	79	>15	Pass

Note : In case of AFH mode, Doesn't support.


Test Plots (GFSK)

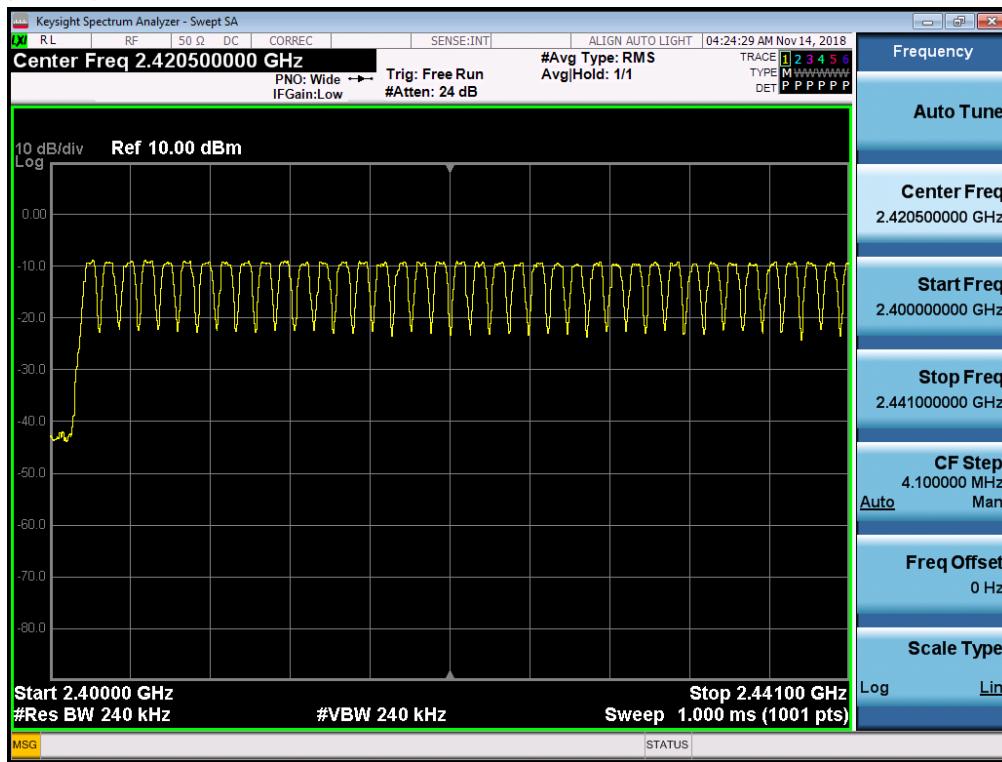


Test Plots (GFSK)

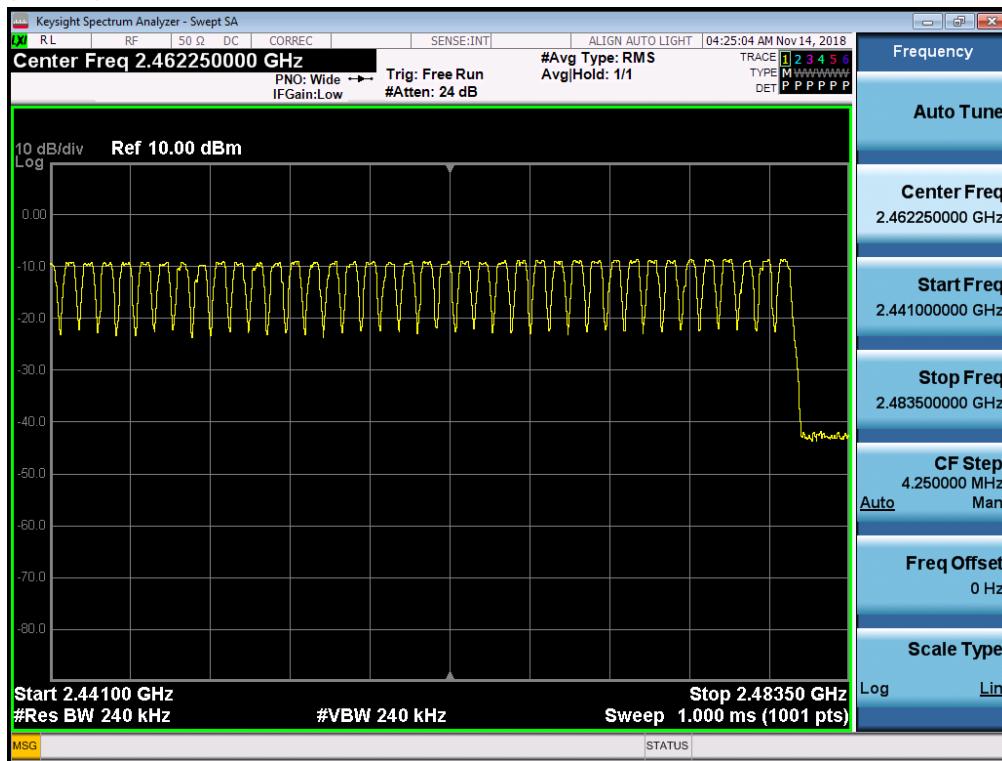


Test Plots (8DPSK)

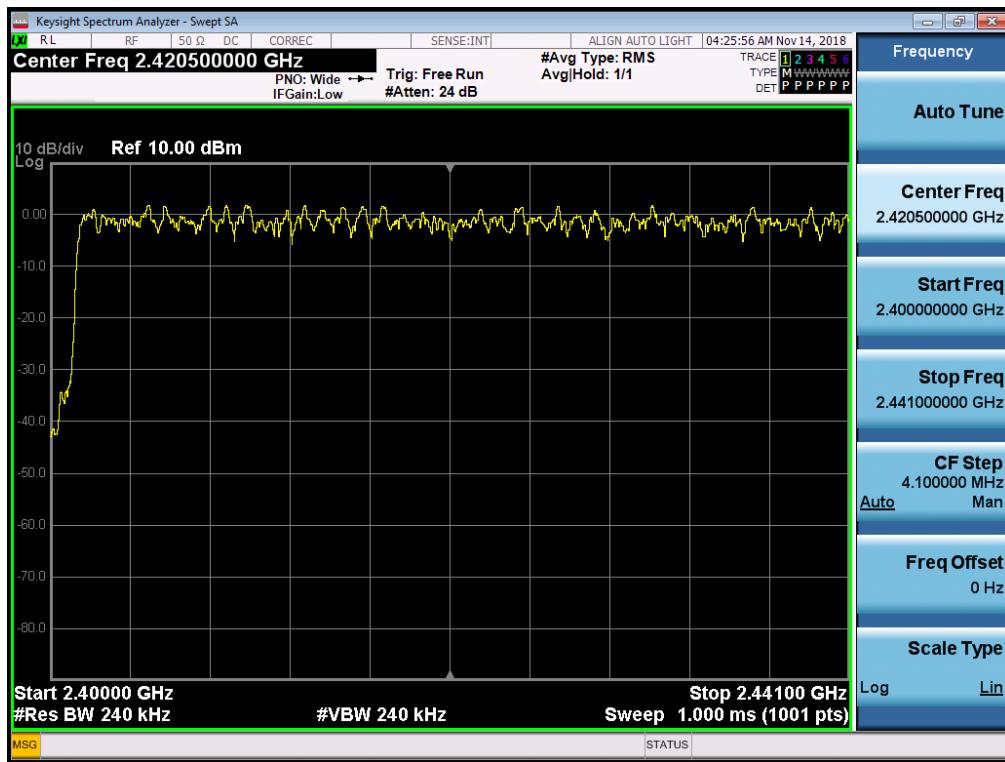


Test Plots (8DPSK)

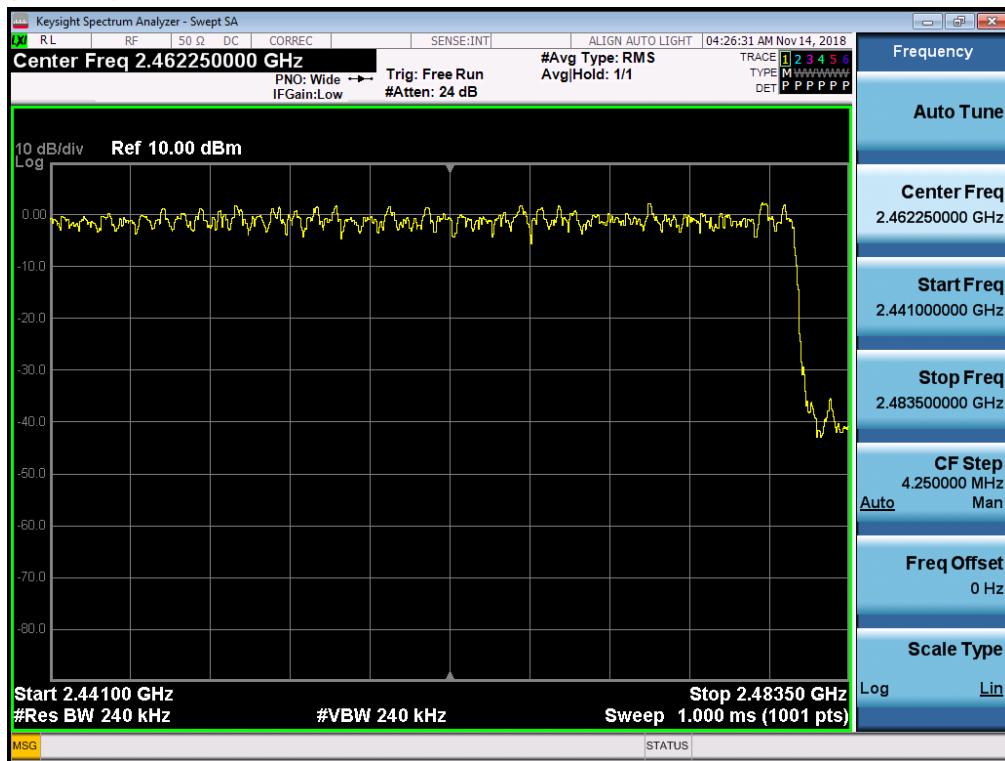

Test Plots ($\pi/4$ DQPSK)

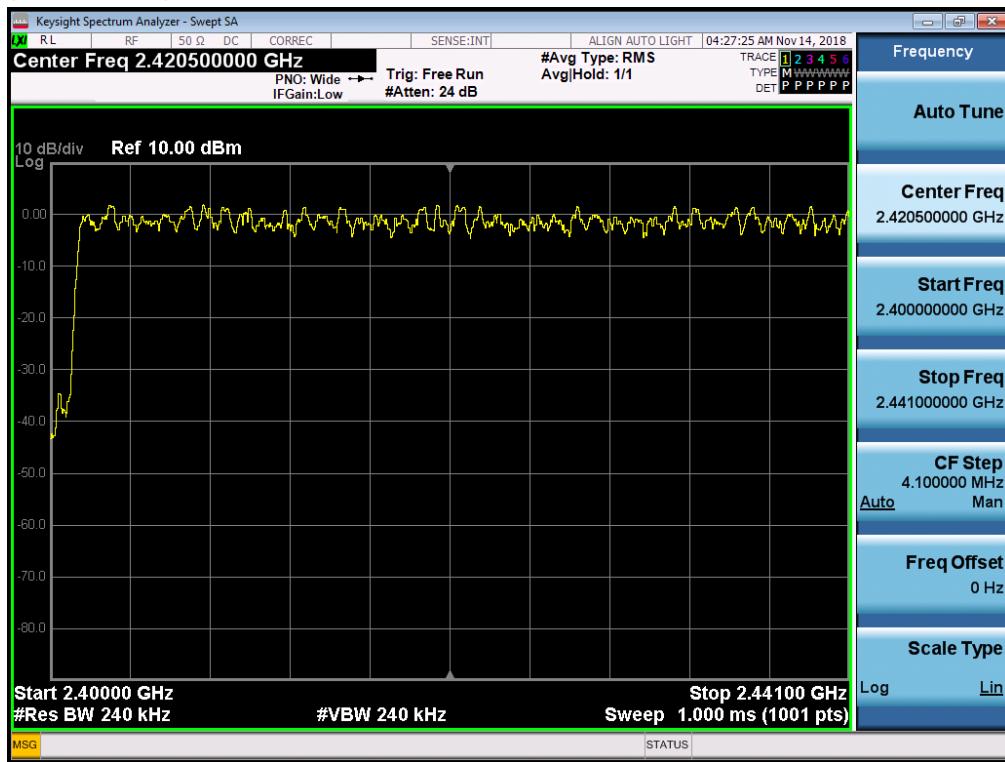

Test Plots ($\pi/4$ DQPSK)

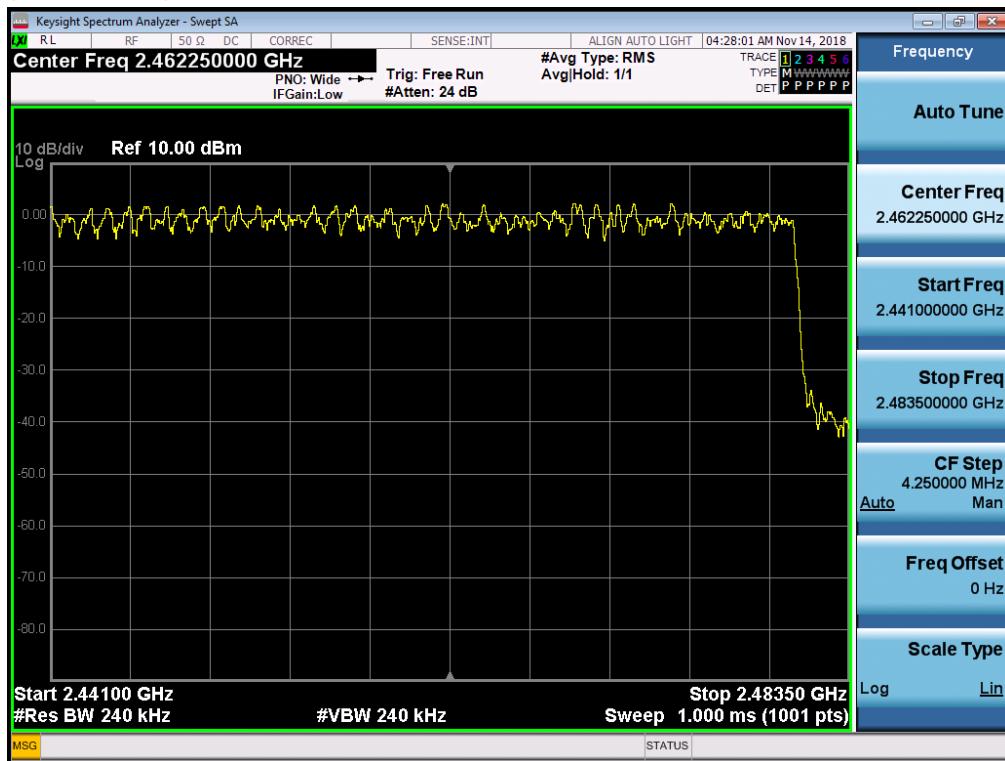


9.5 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

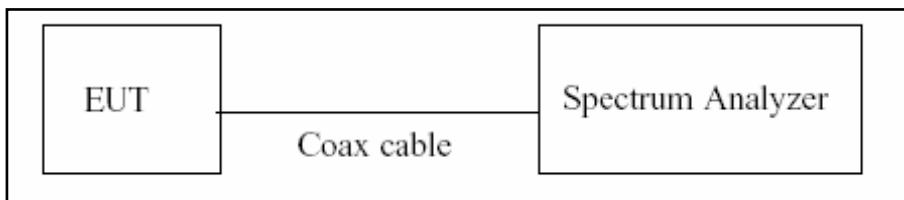

TEST PROCEDURE

This test is performed with hopping off.

EUT was set to transmit the longest packet type (DH5)

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

□ Sample Calculation

Normal Mode / EDR Mode

DH 5(The longest packet type for GFSK)

CH Mid : $2.900 * (1600/6)/79 * 31.6 = 309.33$ (ms)

2-DH 5(The longest packet type for $\pi/4$ DQPSK)

CH Mid : $2.900 * (1600/6)/79 * 31.6 = 309.33$ (ms)

3-DH 5(The longest packet type for 8DPSK)

CH Mid : $2.910 * (1600/6)/79 * 31.6 = 310.40$ (ms)

Note :

A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.900 ms.

Dwell time = Tx-time * 106.667 = 309.33 (ms)

TEST RESULTS

See the table.

TEST RESULTS


	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.900	2.900	2.910
	Mid	2.900	2.900	2.910
	High	2.900	2.900	2.910

Normal Mode / EDR Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)	Result
Total of Dwell (ms)	Low	309.33	309.33	310.40	31.6	400	PASS
	Mid	309.33	309.33	310.40	31.6		PASS
	High	309.33	309.33	310.40	31.6		PASS


Test Plots (GFSK)

Dwell Time (CH.0)

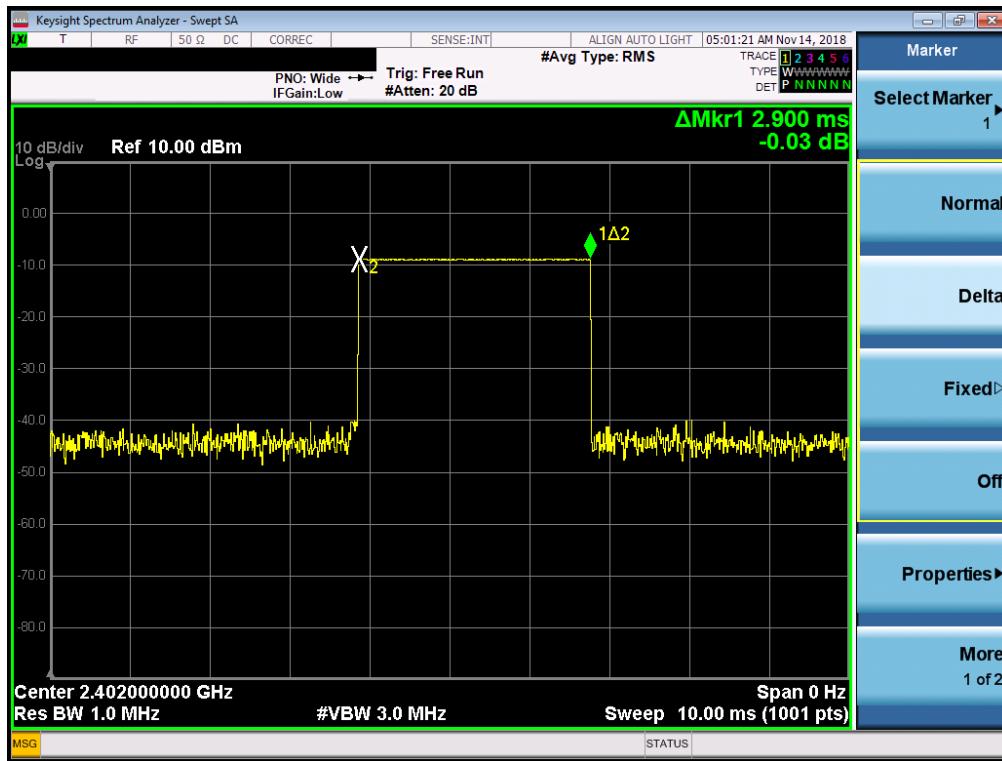


Test Plots (GFSK)

Dwell Time (CH.39)

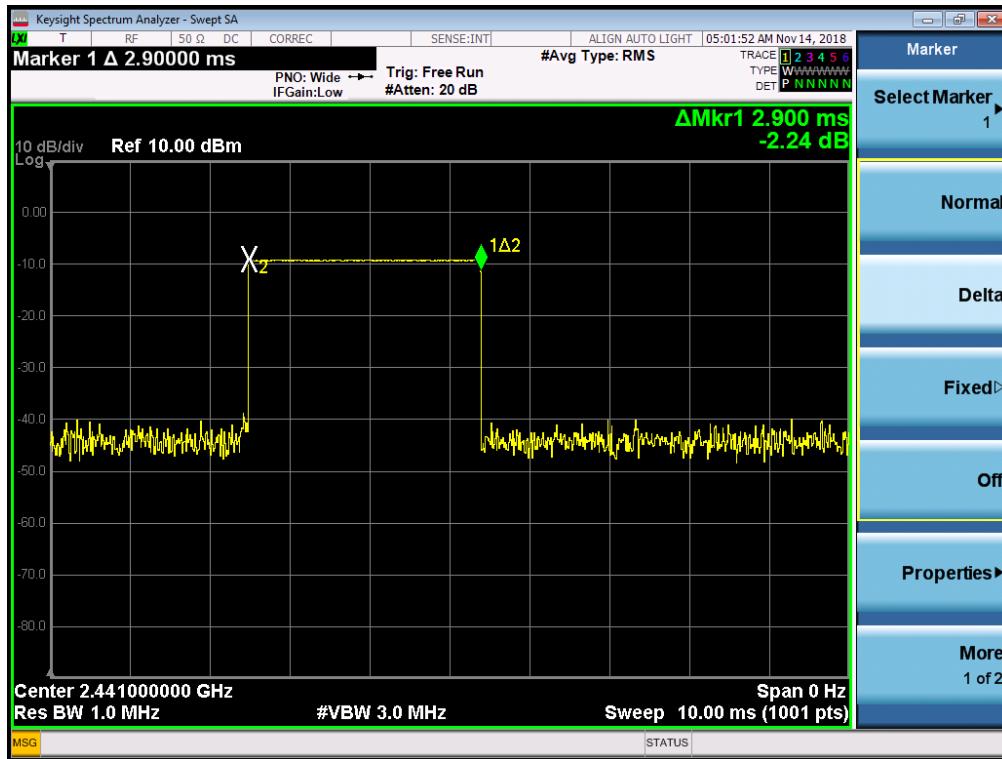


Test Plots (GFSK)

Dwell Time (CH.78)

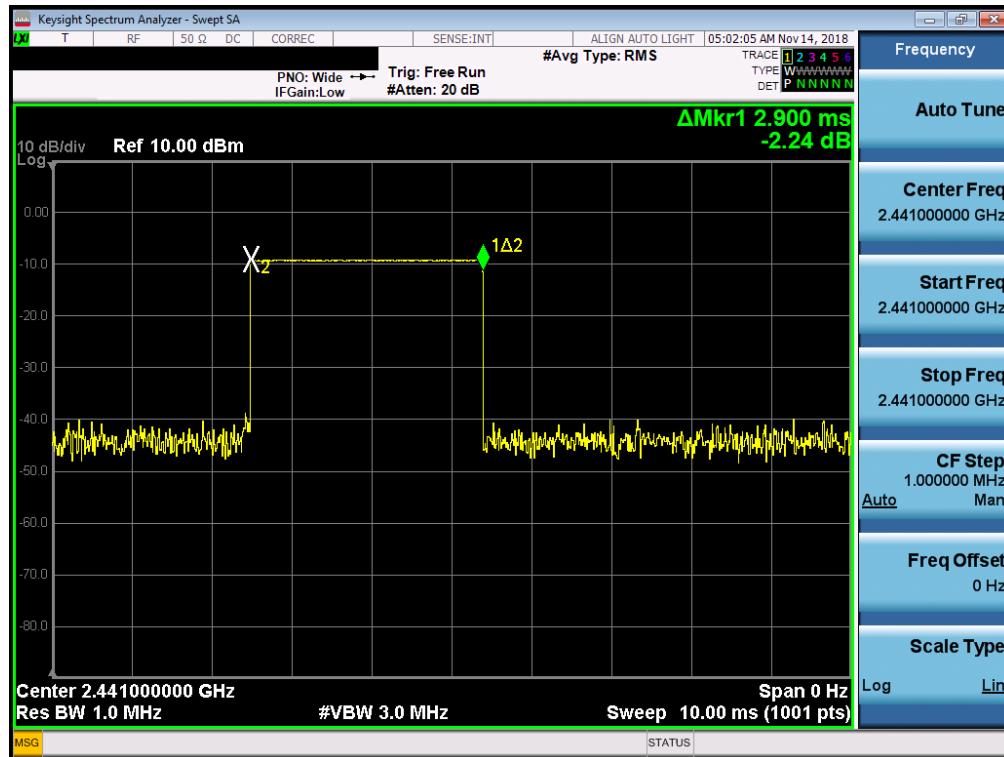


Test Plots (8DPSK)

Dwell Time (CH.0)

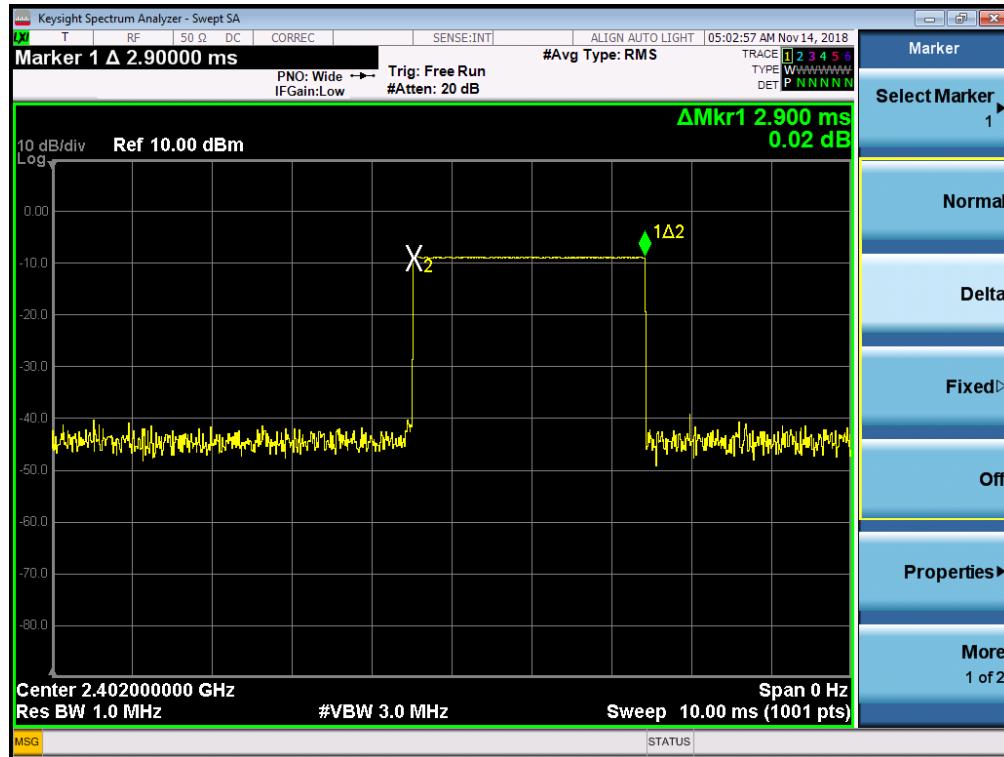


Test Plots (8DPSK)

Dwell Time (CH.39)

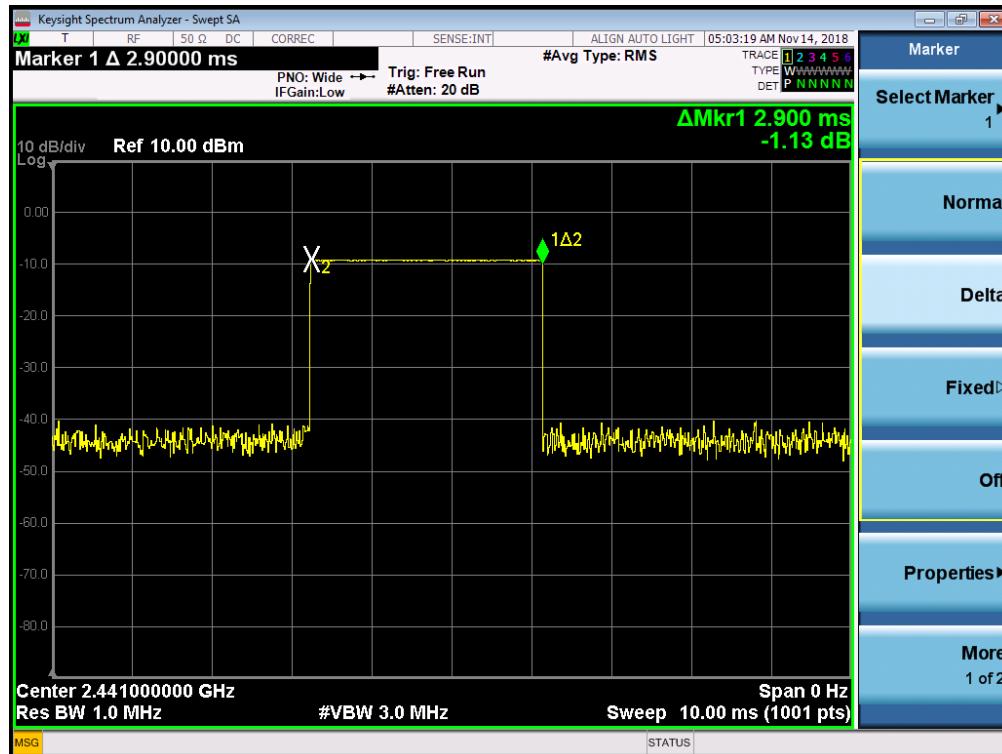


Test Plots (8DPSK)

Dwell Time (CH.78)

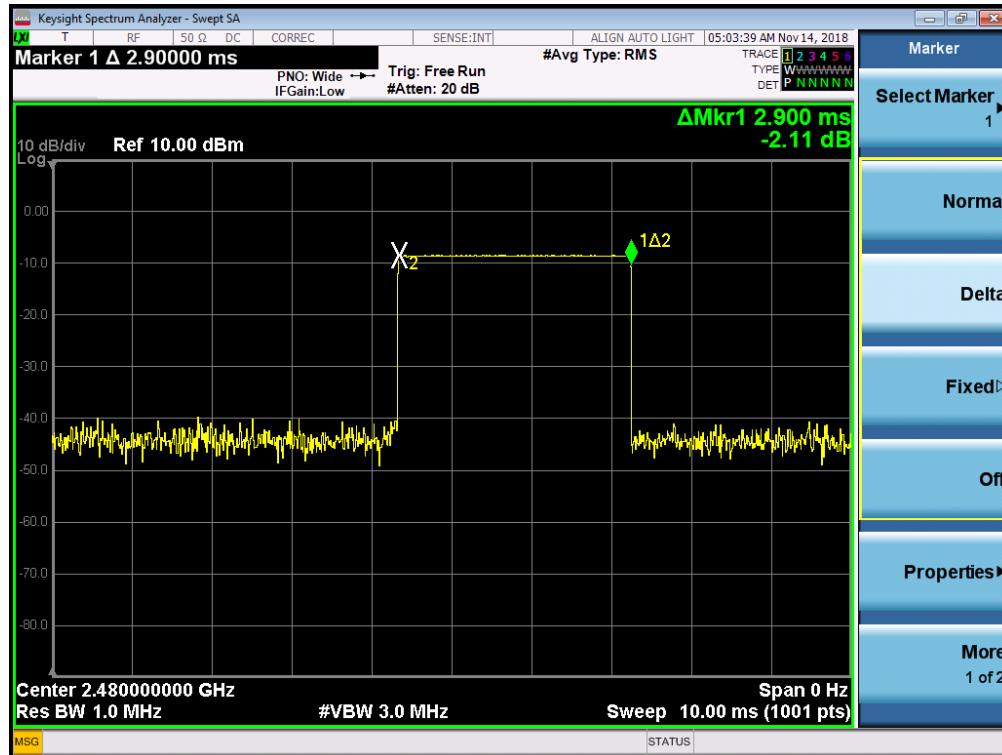


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

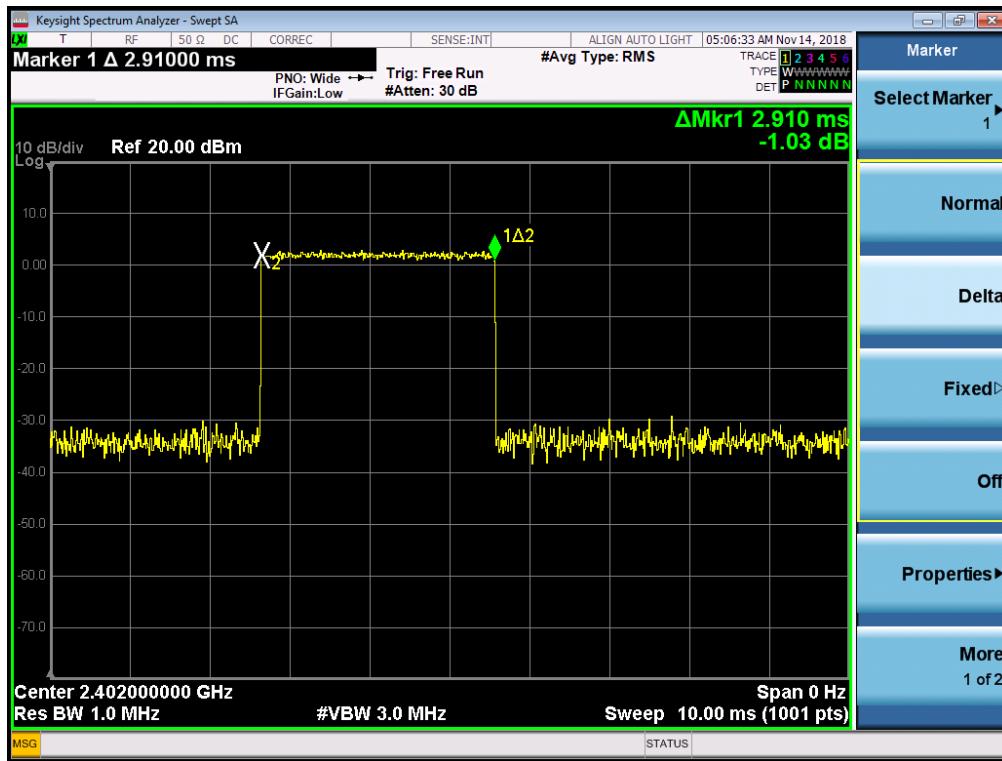


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

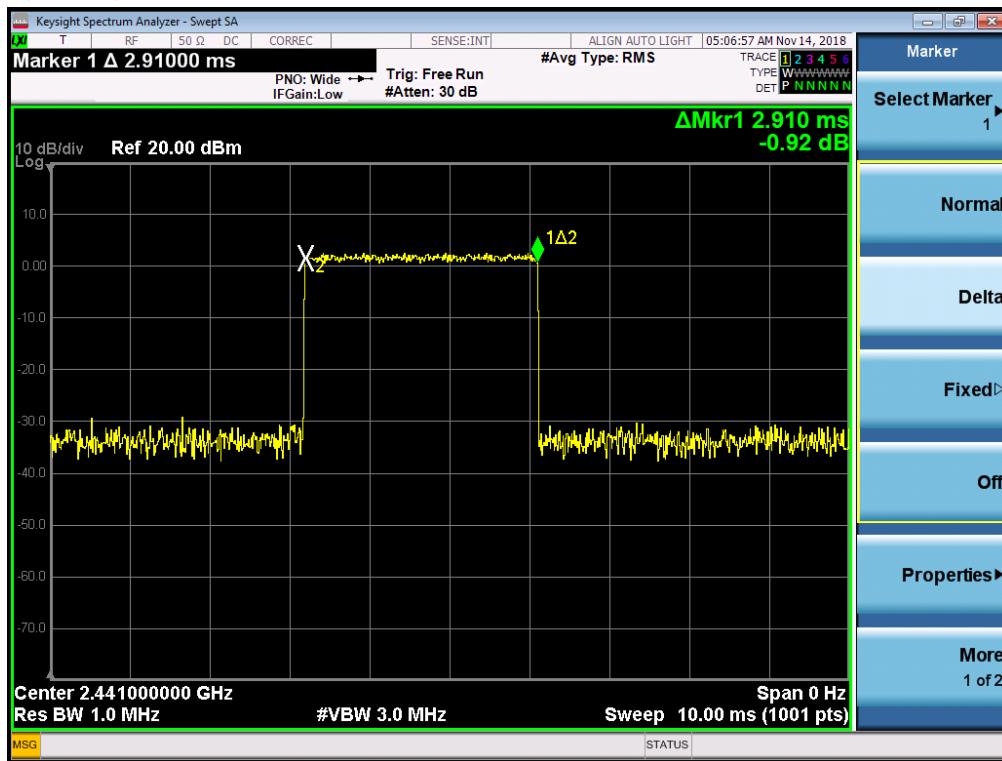

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

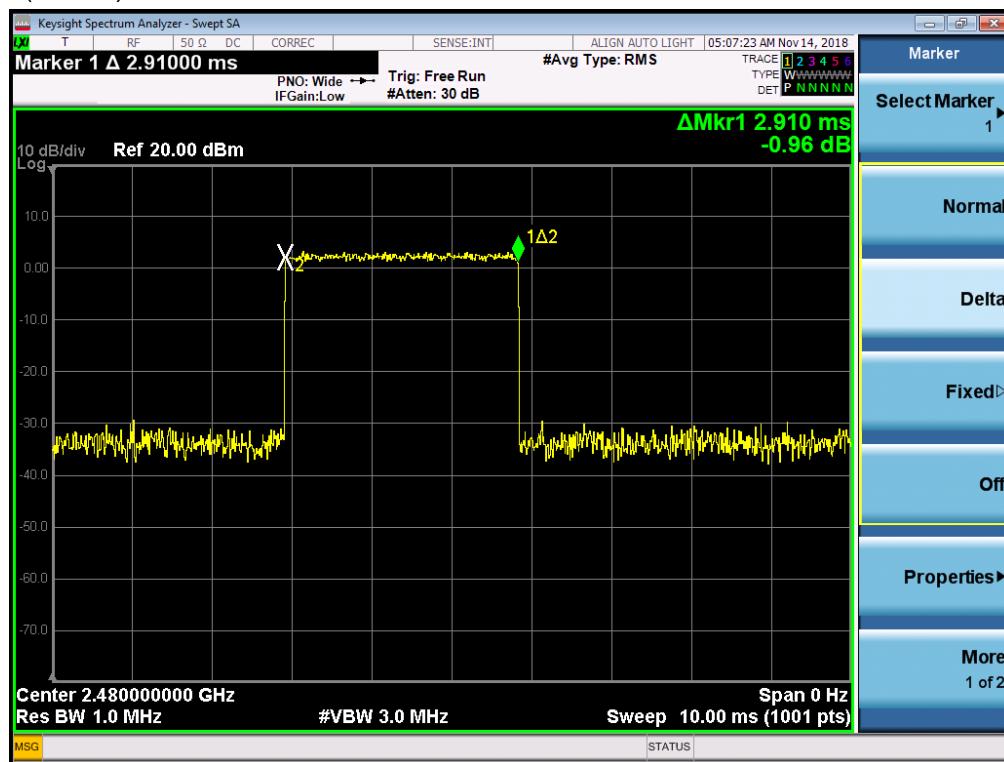

9.6 SPURIOUS EMISSIONS


9.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

Test Configuration

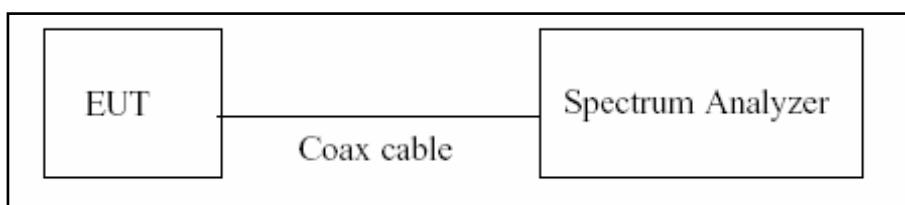

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

TEST RESULTS

No non-compliance noted.


Note : In order to simplify the report, attached plots were only the worst case channel and data rate.

Freq(MHz)	Factor(dB)	Freq(MHz)	Factor(dB)
30	20.53	11000	21.59
100	20.71	12000	21.72
200	20.61	13000	21.84
300	20.56	14000	21.79
400	20.62	15000	21.91
500	20.55	16000	22.06
600	20.66	17000	22.12
700	20.57	18000	22.28
800	20.63	19000	22.32
900	20.61	20000	22.44
1000	20.59	21000	22.57
2000	20.78	22000	22.71
2400*	20.82	23000	22.97
2500*	20.91	24000	22.81
3000	20.93	25000	22.93
4000	21.01		
5000	21.37		
6000	21.13		
7000	21.41		
8000	21.28		
9000	21.51		
10000	21.61		


Note : 1. '*' is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss + Spectrum loss + EUT Cable loss

Test Plots (GFSK)- 30 MHz - 1 GHz
Spurious Emission (CH.78)

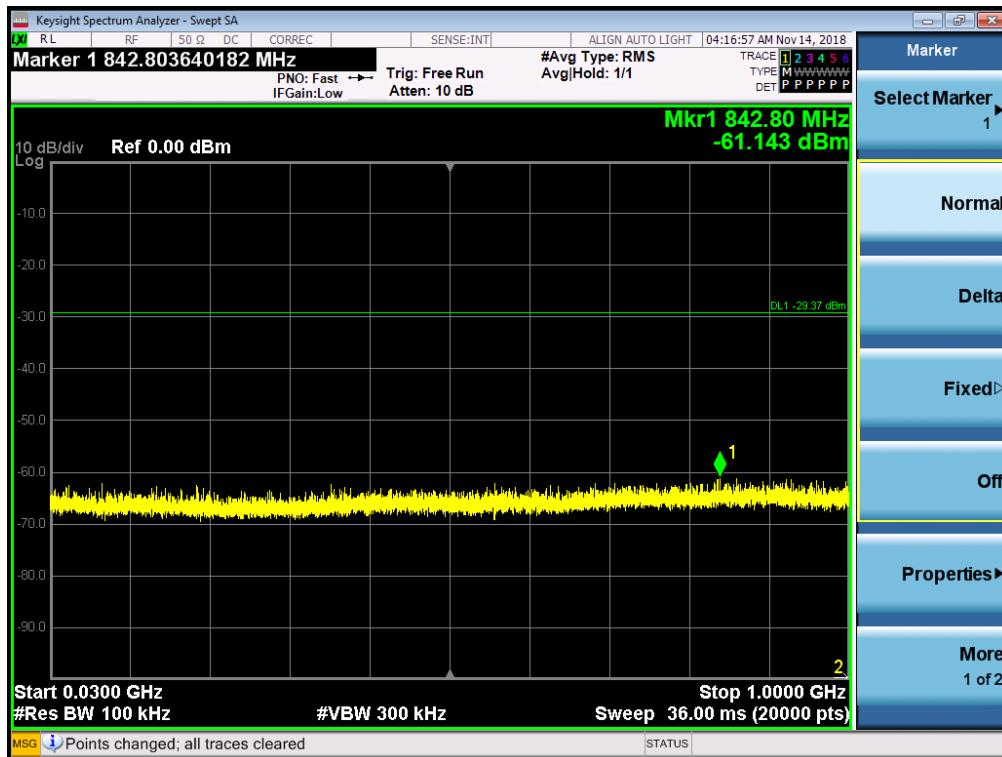

Test Plots (GFSK)- 1 GHz – 3 GHz
Spurious Emission (CH.78)

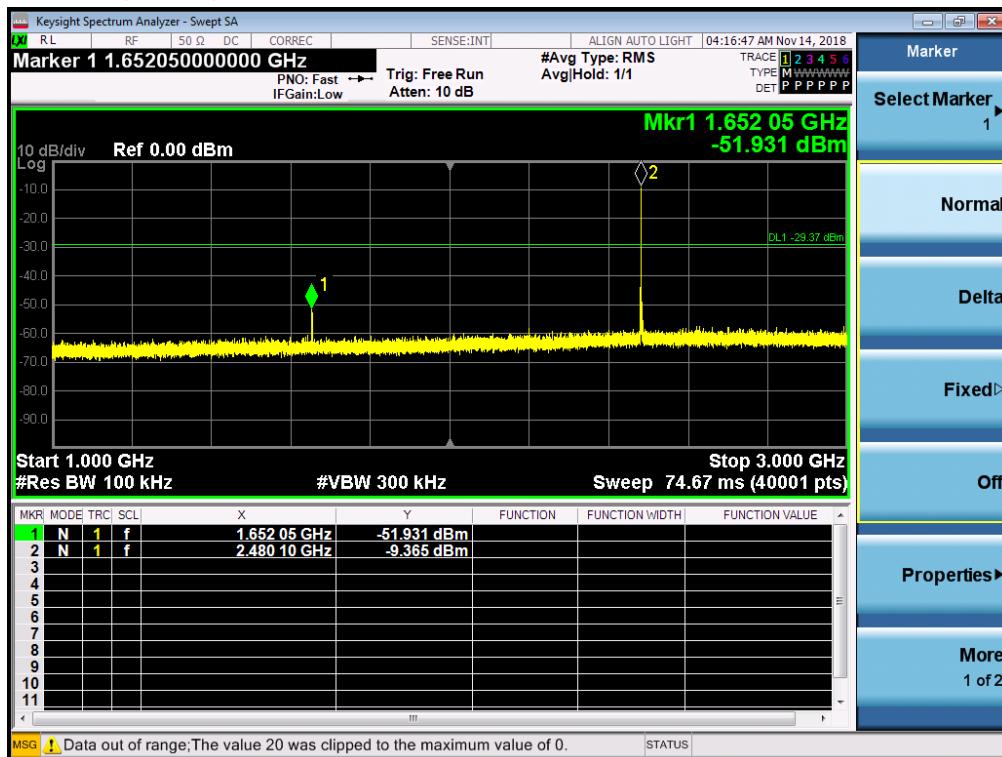

Test Plots(GFSK)- 3 GHz - 5 GHz
Spurious Emission (CH.78)




Test Plots (GFSK)- 5 GHz - 7 GHz
Spurious Emission (CH.78)




Test Plots(GFSK)- 7 GHz - 9 GHz
Spurious Emission (CH.78)




Test Plots(GFSK)- 9 GHz - 11 GHz
Spurious Emission (CH.78)

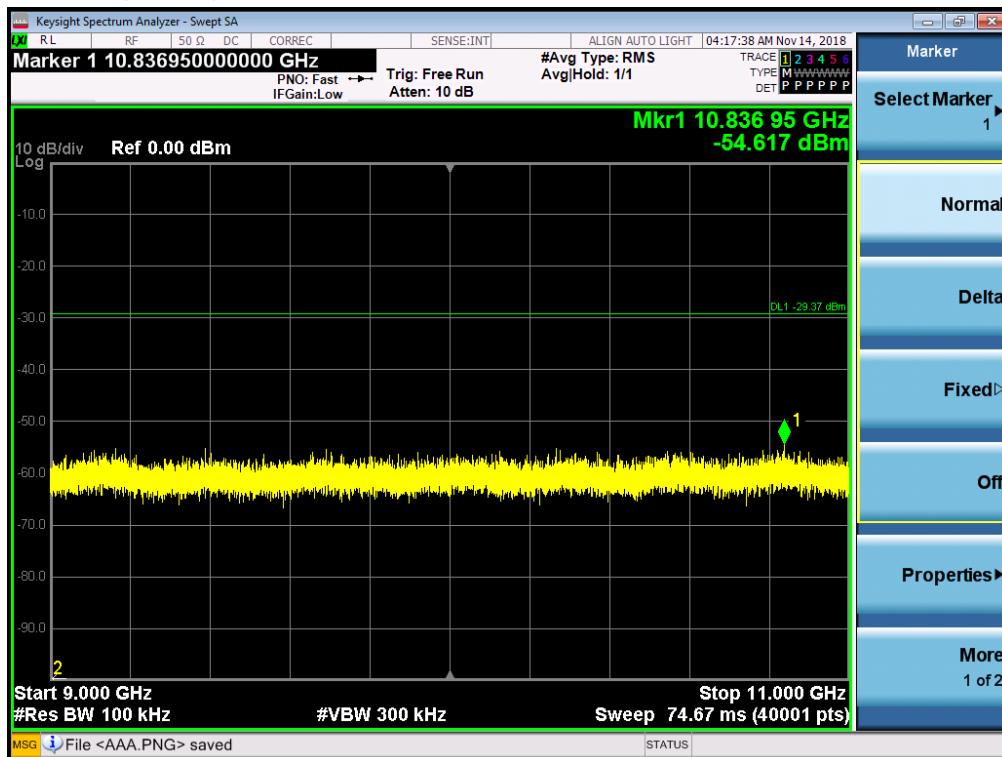


Test Plots(GFSK) 11 GHz - 13 GHz
Spurious Emission (CH.78)

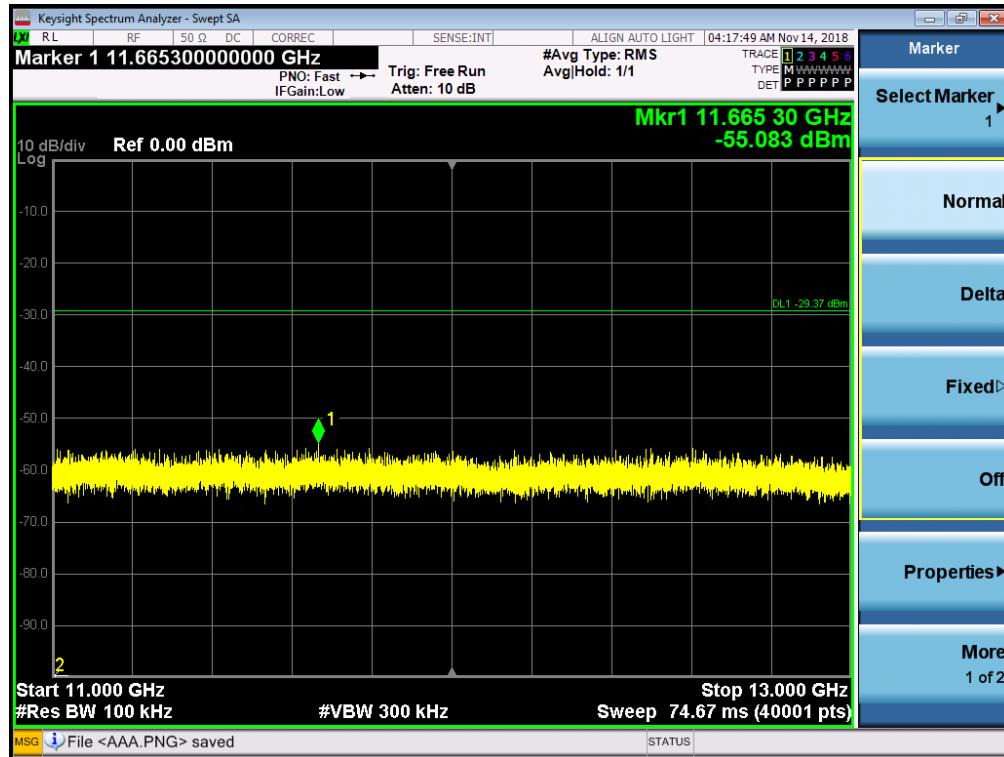


Test Plots (GFSK)- 13 GHz – 15 GHz
Spurious Emission (CH.78)

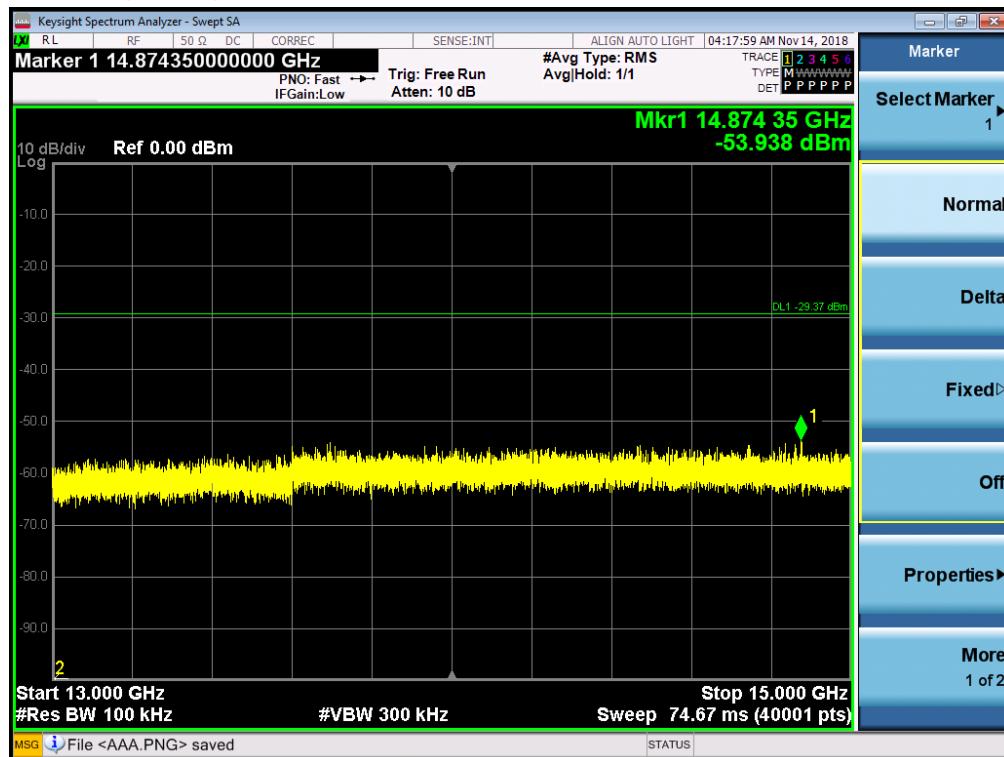


Test Plots(GFSK)- 15 GHz - 17 GHz
Spurious Emission (CH.78)

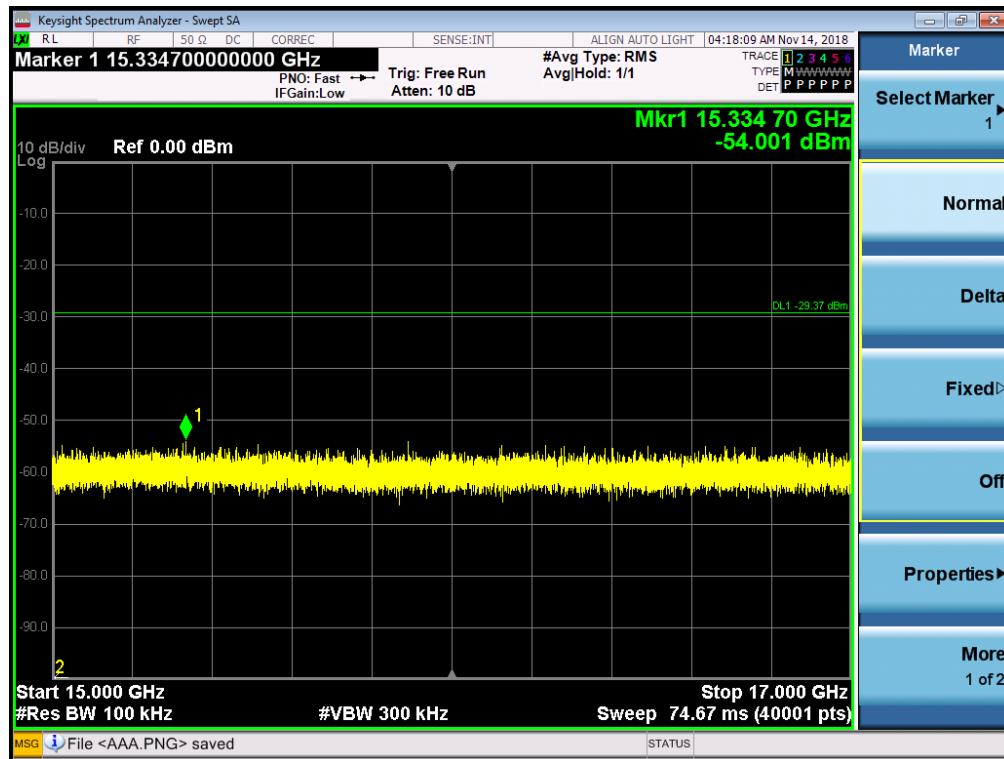


Test Plots(GFSK)- 17 GHz - 19 GHz
Spurious Emission (CH.78)

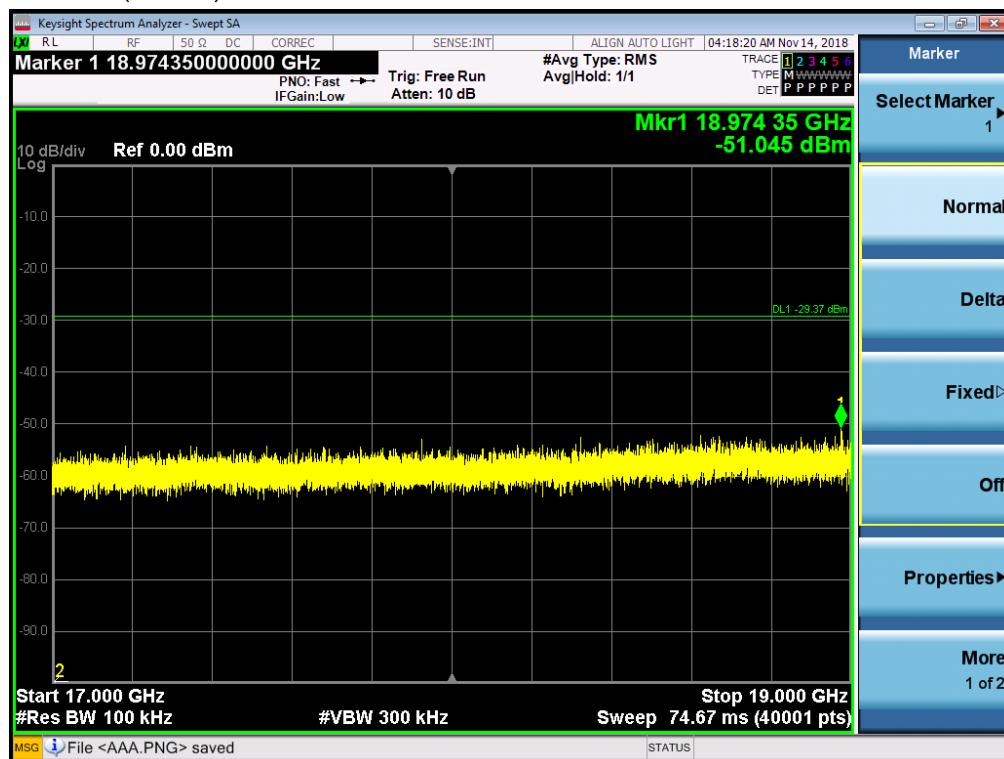


Test Plots (GFSK)- 19 GHz - 21 GHz
Spurious Emission (CH.78)

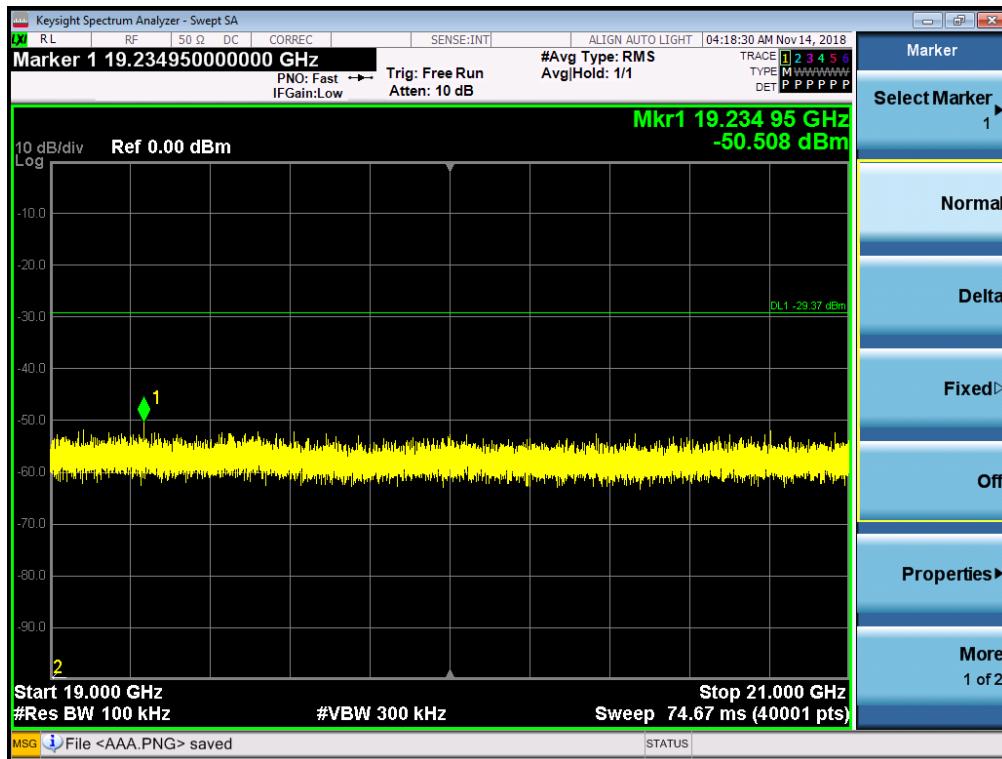

Test Plots (GFSK)- 21 GHz - 23 GHz
Spurious Emission (CH.78)

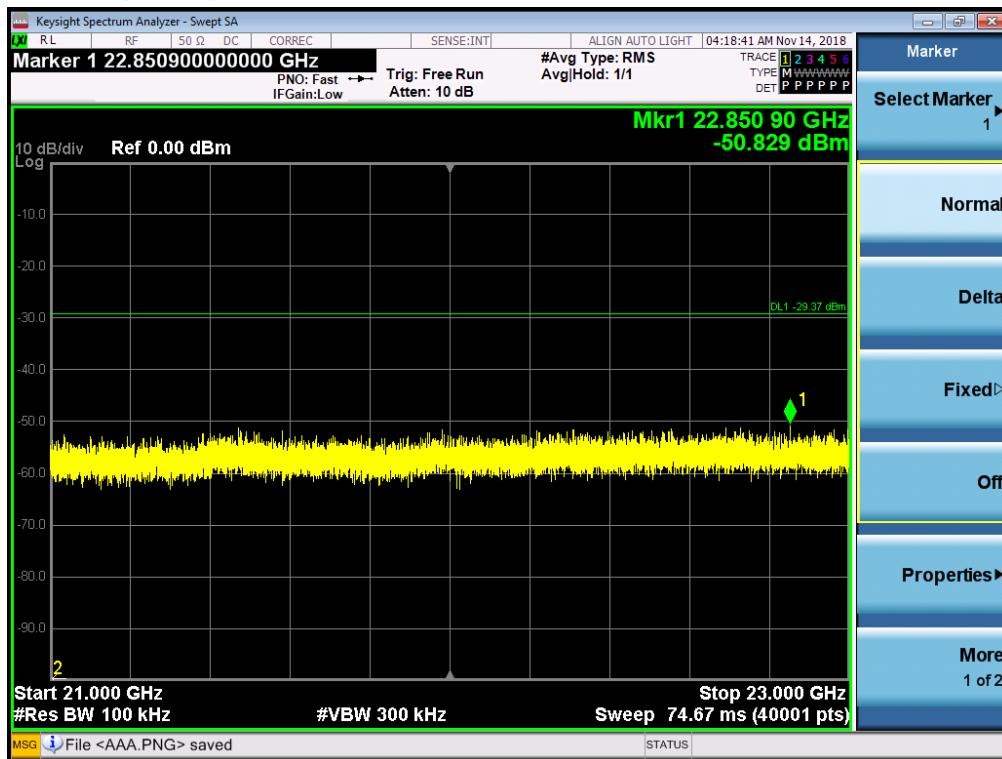

Test Plots (GFSK)- 23 GHz - 25 GHz
Spurious Emission (CH.78)

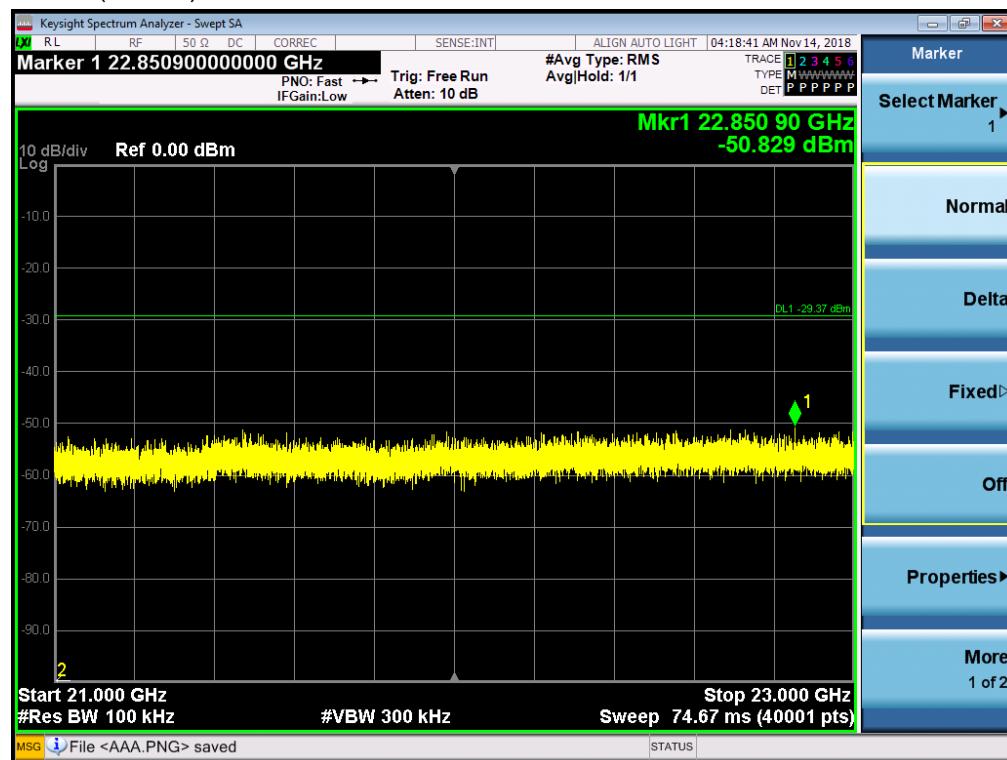

9.6.2 RADIATED SPURIOUS EMISSIONS

LIMIT : §15.247(d), §15.205, §15.209

20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.


Frequency (MHz)	Field Strength Limit (uV/m)	Measurement Distance (m)	Field Strength Limit (dBuV/m)
0.009 – 0.490	2400/F(kHz)	300	(48.5 – 13.8) + 80
0.490 – 1.705	24000/F(kHz)	30	(33.8 – 23.0) + 40
1.705 – 30	30	30	69.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54

Note.


1. 0.009 ~ 30 MHz measurement distance is 3 meter.
2. 0.009 ~ 30 MHz Limit line = specific Limits (dBuV) + Distance extrapolation factor
3. Used conversion factor : Limit (uV/m) = 20 log(Limit (uV/m)/1 uV/m)

Test Configuration


Below 30 MHz

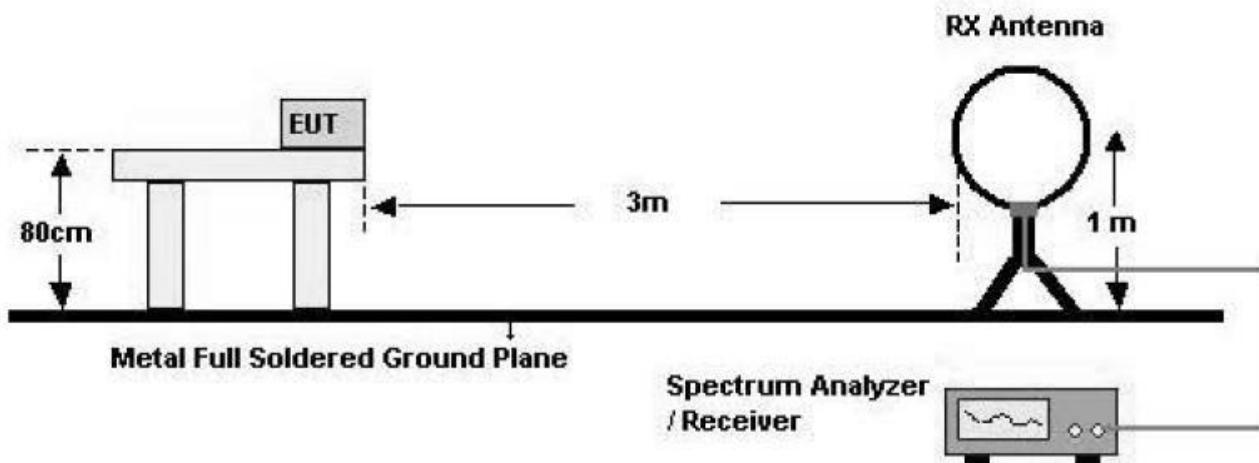

30 MHz - 1 GHz

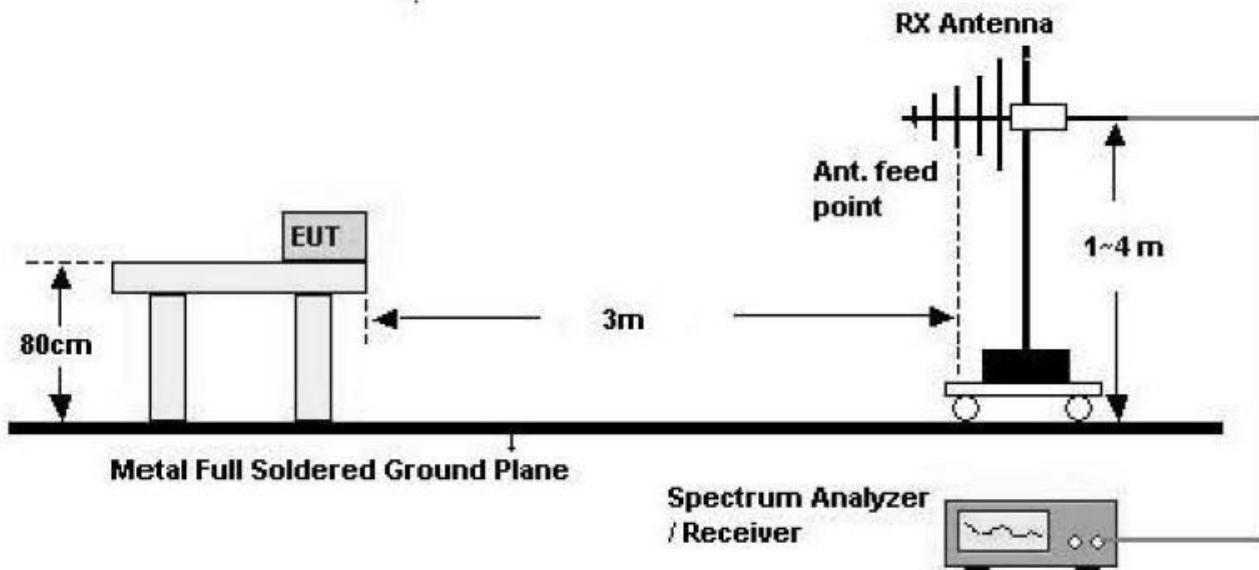

Above 1 GHz

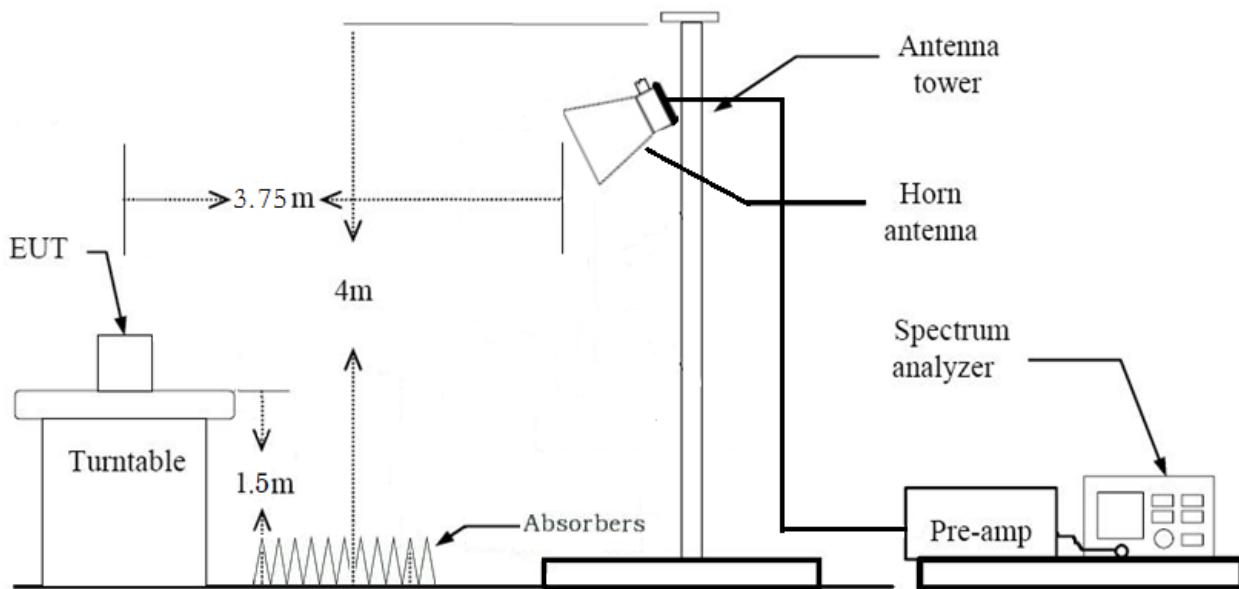

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
 - a. Peak: 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 3 \times$ RBW
 - b. Average: 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method.
2. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
3. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. The measurement distance is 3 meter.
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. Limit line = specific Limits (dBuV) + Distance extrapolation factor
6. Corrected reading : Antenna Factor + Cable loss + Read Level
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. Corrected reading : Antenna Factor + Cable loss - Amplifier gain + Read Level
4. This test is performed with hopping off.
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

S700_[Charging Mode]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.5	-2.36	H	49.1	53.98	4.88	AV
4804	53.0	-2.36	V	50.6	53.98	3.38	AV
4804	65.7	-2.36	H	63.3	73.98	10.68	PK
4804	68.7	-2.36	V	66.3	73.98	7.68	PK

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	53.1	-2.36	H	50.7	53.98	3.28	AV
4882	54.7	-2.36	V	52.3	53.98	1.68	AV
4882	69.2	-2.36	H	66.8	73.98	7.18	PK
4882	69.6	-2.36	V	67.2	73.98	6.78	PK

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.6	-2.36	V	48.2	53.98	5.78	AV
4960	51.6	-2.36	H	49.2	53.98	4.78	AV
4960	67.1	-2.36	V	64.7	73.98	9.28	PK
4960	65.3	-2.36	H	62.9	73.98	11.08	PK

[Battery Mode]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.8	-2.36	H	48.4	53.98	5.58	AV
4804	53.1	-2.36	V	50.7	53.98	3.28	AV
4804	68.1	-2.36	H	65.7	73.98	8.28	PK
4804	67.2	-2.36	V	64.8	73.98	9.18	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S700_[Charging Mode]

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	41.3	-2.36	H	38.9	53.98	15.08	AV
4804	42.1	-2.36	V	39.7	53.98	14.28	AV
4804	63.1	-2.36	H	60.7	73.98	13.28	PK
4804	62.5	-2.36	V	60.1	73.98	13.88	PK

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.3	-2.36	V	37.9	53.98	16.08	AV
4882	41.9	-2.36	H	39.5	53.98	14.48	AV
4882	60.5	-2.36	V	58.1	73.98	15.88	PK
4882	65.1	-2.36	H	62.7	73.98	11.28	PK

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	39.2	-2.36	V	36.8	53.98	17.18	AV
4960	39.8	-2.36	H	37.4	53.98	16.58	AV
4960	52.4	-2.36	V	50.0	73.98	23.98	PK
4960	58.4	-2.36	H	56.0	73.98	17.98	PK

[Battery Mode]

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	39.8	-2.36	H	37.4	53.98	16.58	AV
4804	42.0	-2.36	V	39.6	53.98	14.38	AV
4804	58.9	-2.36	H	56.5	73.98	17.44	PK
4804	61.7	-2.36	V	59.3	73.98	14.64	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S700_[Charging Mode]

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	40.8	-2.36	H	38.4	53.98	15.54	AV
4804	43.2	-2.36	V	40.8	53.98	13.14	AV
4804	62.9	-2.36	H	60.5	73.98	13.44	PK
4804	62.3	-2.36	V	59.9	73.98	14.04	PK

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.1	-2.36	H	37.7	53.98	16.24	AV
4882	42.2	-2.36	V	39.8	53.98	14.14	AV
4882	61.1	-2.36	H	58.7	73.98	15.24	PK
4882	64.9	-2.36	V	62.5	73.98	11.44	PK

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	39.8	-2.36	H	37.4	53.98	16.54	AV
4960	40.1	-2.36	V	37.7	53.98	16.24	AV
4960	62.2	-2.36	H	59.8	73.98	14.14	PK
4960	58.1	-2.36	V	55.7	73.98	18.24	PK

[Battery Mode]

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	39.7	-2.36	H	37.3	53.98	16.64	AV
4960	40.2	-2.36	V	37.8	53.98	16.14	AV
4960	58.3	-2.36	H	55.9	73.98	18.04	PK
4960	60.1	-2.36	V	57.7	73.98	16.24	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S730_[Charging Mode]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.4	-2.36	H	48.0	53.98	5.98	AV
4804	53.4	-2.36	V	51.0	53.98	2.98	AV
4804	64.6	-2.36	H	62.2	73.98	11.78	PK
4804	69.2	-2.36	V	66.8	73.98	7.18	PK

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	49.4	-2.36	H	47.0	53.98	6.98	AV
4882	49.1	-2.36	V	46.7	53.98	7.28	AV
4882	66.9	-2.36	H	64.5	73.98	9.48	PK
4882	64.7	-2.36	V	62.3	73.98	11.68	PK

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	54.7	-2.36	V	52.3	53.98	1.68	AV
4960	53.6	-2.36	H	51.2	53.98	2.78	AV
4960	70.7	-2.36	V	68.3	73.98	5.68	PK
4960	64.7	-2.36	H	62.3	73.98	11.68	PK

[Battery Mode]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	52.8	-2.36	V	50.4	53.98	3.58	AV
4804	47.7	-2.36	H	45.3	53.98	8.68	AV
4804	66.7	-2.36	V	64.3	73.98	9.68	PK
4804	65.1	-2.36	H	62.7	73.98	11.28	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S730_[Charging Mode]

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	40.6	-2.36	H	38.2	53.98	15.8	AV
4804	41.8	-2.36	V	39.4	53.98	14.6	AV
4804	59.5	-2.36	H	57.1	73.98	16.9	PK
4804	65.2	-2.36	V	62.8	73.98	11.2	PK

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	38.8	-2.36	V	36.4	53.98	17.6	AV
4882	39.5	-2.36	H	37.1	53.98	16.9	AV
4882	58.2	-2.36	V	55.8	73.98	18.2	PK
4882	62.7	-2.36	H	60.3	73.98	13.7	PK

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	39.3	-2.36	V	36.9	53.98	17.08	AV
4960	39.3	-2.36	H	36.9	53.98	17.08	AV
4960	57.3	-2.36	V	54.9	73.98	19.08	PK
4960	62.3	-2.36	H	59.9	73.98	14.08	PK

[Battery Mode]

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	39.3	-2.36	H	36.9	53.98	17.08	AV
4804	39.7	-2.36	V	37.3	53.98	16.68	AV
4804	52.8	-2.36	H	50.4	73.98	23.58	PK
4804	62.5	-2.36	V	60.1	73.98	13.88	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S730_[Charging Mode]

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	41.1	-2.36	H	38.7	53.98	15.28	AV
4804	41.8	-2.36	V	39.4	53.98	14.58	AV
4804	61.3	-2.36	H	58.9	73.98	15.08	PK
4804	64.2	-2.36	V	61.8	73.98	12.18	PK

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	39.0	-2.36	H	36.6	53.98	17.38	AV
4882	39.1	-2.36	V	36.7	53.98	17.28	AV
4882	62.5	-2.36	H	60.1	73.98	13.88	PK
4882	62.0	-2.36	V	59.6	73.98	14.38	PK

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	38.8	-2.36	H	36.4	53.98	17.58	AV
4960	39.0	-2.36	V	36.6	53.98	17.38	AV
4960	62.1	-2.36	H	59.7	73.98	14.28	PK
4960	62.2	-2.36	V	59.8	73.98	14.18	PK

[Battery Mode]

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.2	-2.36	H	37.84	53.98	16.14	AV
4882	38.9	-2.36	V	36.54	53.98	17.44	AV
4882	61.8	-2.36	H	59.44	73.98	14.54	PK
4882	61.7	-2.36	V	59.34	73.98	14.64	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S740_[Charging Mode]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	54.8	-2.36	V	52.4	53.98	1.58	AV
4804	50.1	-2.36	H	47.7	53.98	6.28	AV
4804	70.8	-2.36	V	68.4	73.98	5.58	PK
4804	66.2	-2.36	H	63.8	73.98	10.18	PK

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.0	-2.36	V	47.6	53.98	6.38	AV
4882	48.8	-2.36	H	46.4	53.98	7.58	AV
4882	67.5	-2.36	V	65.1	73.98	8.88	PK
4882	63.5	-2.36	H	61.1	73.98	12.88	PK

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	55.3	-2.36	V	52.9	53.98	1.08	AV
4960	53.0	-2.36	H	50.6	53.98	3.38	AV
4960	71.2	-2.36	V	68.8	73.98	5.18	PK
4960	68.5	-2.36	H	66.1	73.98	7.88	PK

[Battery Mode]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	46.2	-2.36	H	43.8	53.98	10.18	AV
4960	54.2	-2.36	V	51.8	53.98	2.18	AV
4960	63.4	-2.36	H	61.0	73.98	12.98	PK
4960	71.3	-2.36	V	68.9	73.98	5.08	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S740_[Charging Mode]

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	39.8	-2.36	H	37.4	53.98	16.58	AV
4804	39.7	-2.36	V	37.3	53.98	16.68	AV
4804	53.2	-2.36	H	50.8	73.98	23.18	PK
4804	62.9	-2.36	V	60.5	73.98	13.48	PK

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	39.3	-2.36	H	36.9	53.98	17.08	AV
4882	39.6	-2.36	V	37.2	53.98	16.78	AV
4882	52.6	-2.36	H	50.2	73.98	23.78	PK
4882	62.9	-2.36	V	60.5	73.98	13.48	PK

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	39.6	-2.36	H	37.2	53.98	16.78	AV
4960	43.0	-2.36	V	40.6	53.98	13.38	AV
4960	52.5	-2.36	H	50.1	73.98	23.88	PK
4960	64.8	-2.36	V	62.4	73.98	11.58	PK

[Battery Mode]

Operation Mode: CH High (8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	38.9	-2.36	H	36.5	53.98	17.48	AV
4960	43.2	-2.36	V	40.8	53.98	13.18	AV
4960	52.1	-2.36	H	49.7	73.98	24.28	PK
4960	66.2	-2.36	V	63.8	73.98	10.18	PK

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S740_[Charging Mode]

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	39.6	-2.36	H	37.2	53.98	16.78	AV
4804	39.7	-2.36	V	37.3	53.98	16.68	AV
4804	62.8	-2.36	H	60.4	73.98	13.58	PK
4804	62.9	-2.36	V	60.5	73.98	13.48	PK

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	39.7	-2.36	H	37.3	53.98	16.68	AV
4882	39.5	-2.36	V	37.1	53.98	16.88	AV
4882	63.8	-2.36	H	61.4	73.98	12.58	PK
4882	62.9	-2.36	V	60.5	73.98	13.48	PK

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	40.9	-2.36	H	38.5	53.98	15.48	AV
4960	42.1	-2.36	V	39.7	53.98	14.28	AV
4960	60.6	-2.36	H	58.2	73.98	15.78	PK
4960	61.2	-2.36	V	58.8	73.98	15.18	PK

[Battery Mode]

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	41.3	-2.36	H	38.9	53.98	15.08	AV
4882	43.7	-2.36	V	41.3	53.98	12.68	AV
4882	61.0	-2.36	H	58.6	73.98	15.38	PK
4882	68.1	-2.36	V	65.7	73.98	8.28	PK


Note. In order to simplify the report, attached battery mode result were only the worst case channel.

Notes:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
6. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. We have done Normal Mode and EDR Mode test.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
10. A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

RESULT PLOTS (Worst case : X-V)

Radiated Spurious Emissions plot – (S740_ Charging Mode GFSK, 2nd Harmonic)

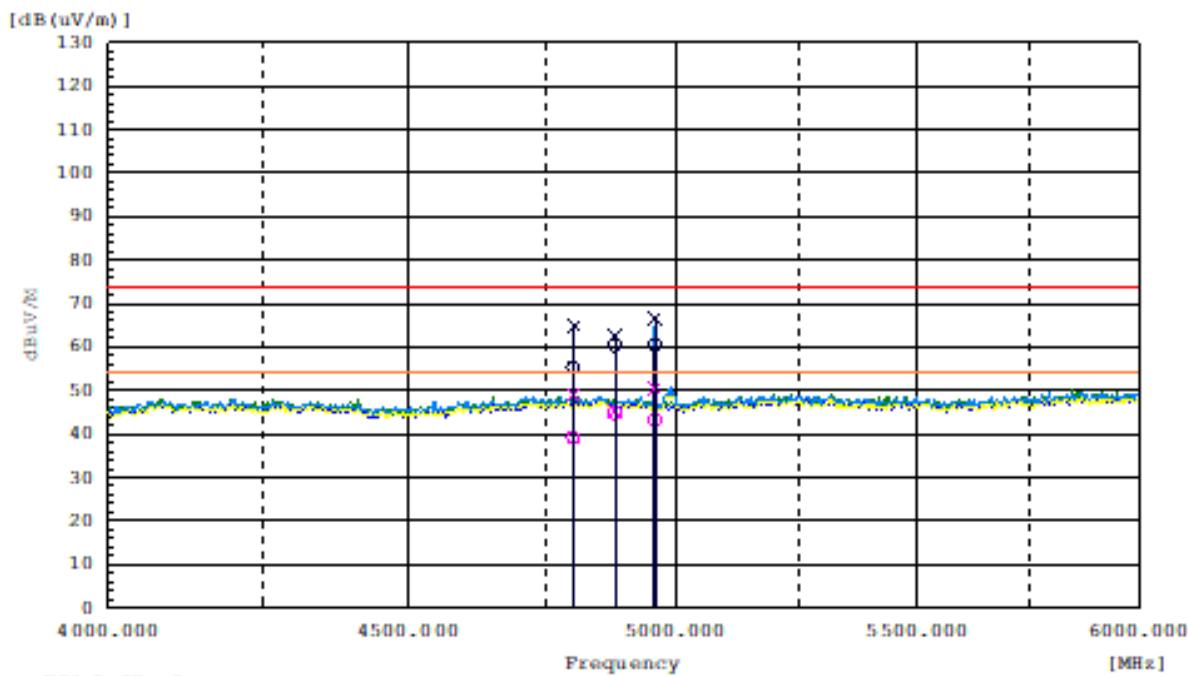

Radiated Spurious Emissions plot – (S740_ Battery Mode GFSK, 2nd Harmonic)

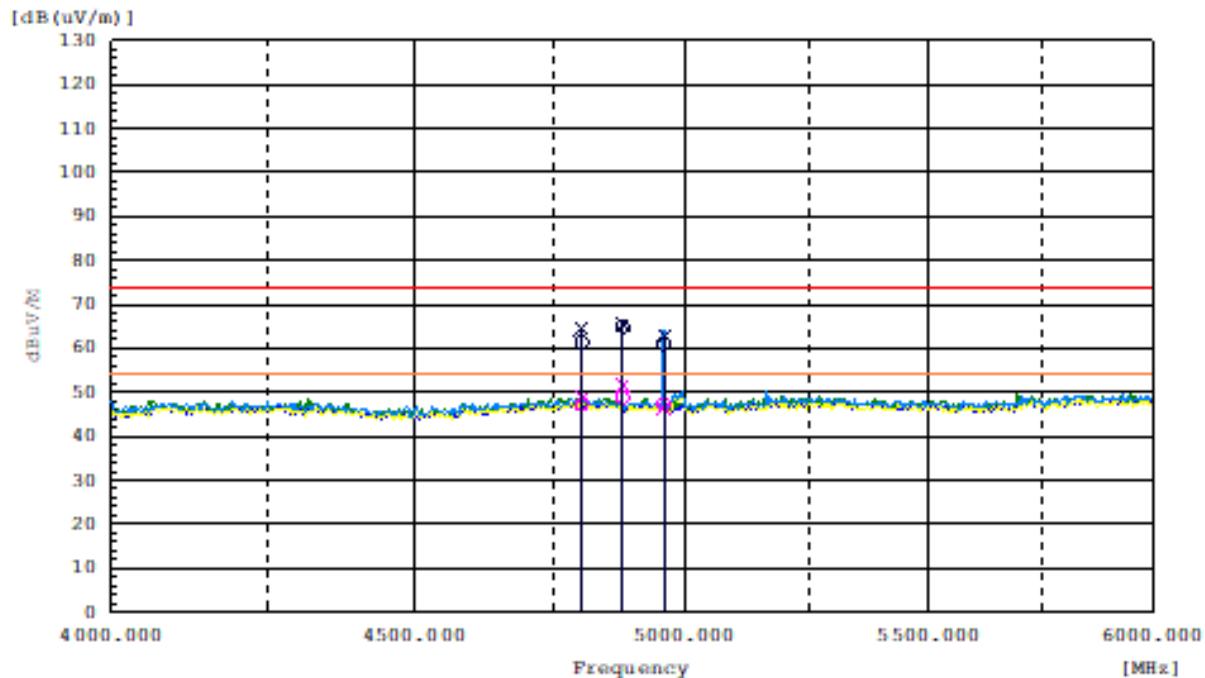

Note : Only the worst case plots for Radiated Spurious Emissions.

9.6.3 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

S700_[Charging Mode]

Operation Mode	Normal(GFSK)						
Operating Frequency	2402 MHz, 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.7	-12.36	H	43.34	73.98	30.64	PK
2390.0	42.4	-12.36	H	30.04	53.98	23.94	AV
2390.0	55.3	-12.36	V	42.94	73.98	31.04	PK
2390.0	42.3	-12.36	V	29.94	53.98	24.04	AV
2483.5	58.1	-11.56	H	46.54	73.98	27.44	PK
2483.5	43.2	-11.56	H	31.64	53.98	22.34	AV
2483.5	56.7	-11.56	V	45.14	73.98	28.84	PK
2483.5	42.9	-11.56	V	31.34	53.98	22.64	AV

Operation Mode	EDR(8DPSK)						
Operating Frequency	2402 MHz, 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.6	-12.36	H	44.24	73.98	29.74	PK
2390.0	42.9	-12.36	H	30.54	53.98	23.44	AV
2390.0	56.8	-12.36	V	44.44	73.98	29.54	PK
2390.0	43.4	-12.36	V	31.04	53.98	22.94	AV
2483.5	68.3	-11.56	H	56.74	73.98	17.24	PK
2483.5	46.4	-11.56	H	34.84	53.98	19.14	AV
2483.5	65.5	-11.56	V	53.94	73.98	20.04	PK
2483.5	45.3	-11.56	V	33.74	53.98	20.24	AV

Operation Mode	EDR($\pi/4$ DQPSK)						
Operating Frequency	2402 MHz , 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.2	-12.36	H	43.84	73.98	30.14	PK
2390.0	43.0	-12.36	H	30.64	53.98	23.34	AV
2390.0	58.1	-12.36	V	45.74	73.98	28.24	PK
2390.0	44.0	-12.36	V	31.64	53.98	22.34	AV
2483.5	69.4	-11.56	H	57.84	73.98	16.14	PK
2483.5	48.9	-11.56	H	37.34	53.98	16.64	AV
2483.5	66.9	-11.56	V	55.34	73.98	18.64	PK
2483.5	49.2	-11.56	V	37.64	53.98	16.34	AV

S700_[Battery Mode]

Operation Mode	EDR($\pi/4$ DQPSK)						
Operating Frequency	2402 MHz , 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.6	-12.36	H	44.24	73.98	29.74	PK
2390.0	42.9	-12.36	H	30.54	53.98	23.44	AV
2390.0	56.8	-12.36	V	44.44	73.98	29.54	PK
2390.0	43.4	-12.36	V	31.04	53.98	22.94	AV
2483.5	54.0	-11.56	H	42.44	73.98	31.54	PK
2483.5	34.7	-11.56	H	23.14	53.98	30.84	AV
2483.5	51.5	-11.56	V	39.94	73.98	34.04	PK
2483.5	33.0	-11.56	V	21.44	53.98	32.54	AV

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S730_[Charging Mode]

Operation Mode	Normal(GFSK)						
Operating Frequency	2402 MHz, 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	* A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.4	-12.36	H	43.04	73.98	30.94	PK
2390.0	42.5	-12.36	H	30.14	53.98	23.84	AV
2390.0	57.5	-12.36	V	45.14	73.98	28.84	PK
2390.0	43.2	-12.36	V	30.84	53.98	23.14	AV
2483.5	62.1	-11.56	H	50.54	73.98	23.44	PK
2483.5	43.8	-11.56	H	32.24	53.98	21.74	AV
2483.5	59.8	-11.56	V	48.24	73.98	25.74	PK
2483.5	43.8	-11.56	V	32.24	53.98	21.74	AV

Operation Mode	EDR(8DPSK)						
Operating Frequency	2402 MHz, 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	* A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.8	-12.36	H	43.44	73.98	30.54	PK
2390.0	42.5	-12.36	H	30.14	53.98	23.84	AV
2390.0	57.3	-12.36	V	44.94	73.98	29.04	PK
2390.0	43.4	-12.36	V	31.04	53.98	22.94	AV
2483.5	67.0	-11.56	H	55.44	73.98	18.54	PK
2483.5	48.0	-11.56	H	36.44	53.98	17.54	AV
2483.5	68.2	-11.56	V	56.64	73.98	17.34	PK
2483.5	48.5	-11.56	V	36.94	53.98	17.04	AV

Operation Mode

EDR($\pi/4$ DQPSK)

Operating Frequency

2402 MHz , 2480 MHz

Channel No

CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.3	-12.36	H	43.94	73.98	30.04	PK
2390.0	42.5	-12.36	H	30.14	53.98	23.84	AV
2390.0	57.6	-12.36	V	45.24	73.98	28.74	PK
2390.0	43.2	-12.36	V	30.84	53.98	23.14	AV
2483.5	68.8	-11.56	H	57.24	73.98	16.74	PK
2483.5	48.3	-11.56	H	36.74	53.98	17.24	AV
2483.5	68.6	-11.56	V	57.04	73.98	16.94	PK
2483.5	48.2	-11.56	V	36.64	53.98	17.34	AV

S730_[Battery Mode]

Operation Mode

EDR($\pi/4$ DQPSK)

Operating Frequency

2402 MHz , 2480 MHz

Channel No

CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.2	-12.36	H	43.84	73.98	30.14	PK
2390.0	42.7	-12.36	H	30.34	53.98	23.64	AV
2390.0	56.6	-12.36	V	44.24	73.98	29.74	PK
2390.0	43	-12.36	V	30.64	53.98	23.34	AV
2483.5	54.7	-11.56	H	43.14	73.98	30.84	PK
2483.5	35.1	-11.56	H	23.54	53.98	30.44	AV
2483.5	53.6	-11.56	V	42.04	73.98	31.94	PK
2483.5	34.1	-11.56	V	22.54	53.98	31.44	AV

Note. In order to simplify the report, attached battery mode result were only the worst case channel.

S740

Operation Mode	Normal(GFSK)						
Operating Frequency	2402 MHz, 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.6	-12.36	H	43.24	73.98	30.74	PK
2390.0	42.4	-12.36	H	30.04	53.98	23.94	AV
2390.0	56.7	-12.36	V	44.34	73.98	29.64	PK
2390.0	42.7	-12.36	V	30.34	53.98	23.64	AV
2483.5	59.0	-11.56	H	47.44	73.98	26.54	PK
2483.5	44.1	-11.56	H	32.54	53.98	21.44	AV
2483.5	57.1	-11.56	V	45.54	73.98	28.44	PK
2483.5	43.7	-11.56	V	32.14	53.98	21.84	AV

Operation Mode	EDR(8DPSK)						
Operating Frequency	2402 MHz , 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	58.4	-12.36	H	46.04	73.98	27.94	PK
2390.0	43.8	-12.36	H	31.44	53.98	22.54	AV
2390.0	55.8	-12.36	V	43.44	73.98	30.54	PK
2390.0	42.4	-12.36	V	30.04	53.98	23.94	AV
2483.5	68.6	-11.56	H	57.04	73.98	16.94	PK
2483.5	48.3	-11.56	H	36.74	53.98	17.24	AV
2483.5	65.7	-11.56	V	54.14	73.98	19.84	PK
2483.5	46.6	-11.56	V	35.04	53.98	18.94	AV

Operation Mode	EDR($\pi/4$ DQPSK)						
Operating Frequency	2402 MHz , 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.1	-12.36	H	43.74	73.98	30.24	PK
2390.0	43.1	-12.36	H	30.74	53.98	23.24	AV
2390.0	58.1	-12.36	V	45.74	73.98	28.24	PK
2390.0	44.1	-12.36	V	31.74	53.98	22.24	AV
2483.5	69.6	-11.56	H	58.04	73.98	15.94	PK
2483.5	49.2	-11.56	H	37.64	53.98	16.34	AV
2483.5	65.0	-11.56	V	53.44	73.98	20.54	PK
2483.5	46.5	-11.56	V	34.94	53.98	19.04	AV

S740_[Battery Mode]

Operation Mode	EDR($\pi/4$ DQPSK)						
Operating Frequency	2402 MHz , 2480 MHz						
Channel No	CH 0, CH 78						

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.7	-12.36	H	43.34	73.98	30.64	PK
2390.0	42.4	-12.36	H	30.04	53.98	23.94	AV
2390.0	56.8	-12.36	V	44.44	73.98	29.54	PK
2390.0	43	-12.36	V	30.64	53.98	23.34	AV
2483.5	53.9	-11.56	H	42.34	73.98	31.64	PK
2483.5	36.1	-11.56	H	24.54	53.98	29.44	AV
2483.5	53.9	-11.56	V	42.34	73.98	31.64	PK
2483.5	35.2	-11.56	V	23.64	53.98	30.34	AV


Note. In order to simplify the report, attached battery mode result were only the worst case channel.

Notes:


1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor +Amp Gain
3. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
5. We have done Normal Mode, EDR Mode.
6. This test is performed with hopping off.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
8. Corrected reading : Antenna Factor + Cable loss - Amplifier gain + Distance Factor +Read Level

RESULT PLOTS (Worst case : X-V)

Radiated Restricted Band Edges plot – ($\pi/4$ DQPSK, Ch.0)

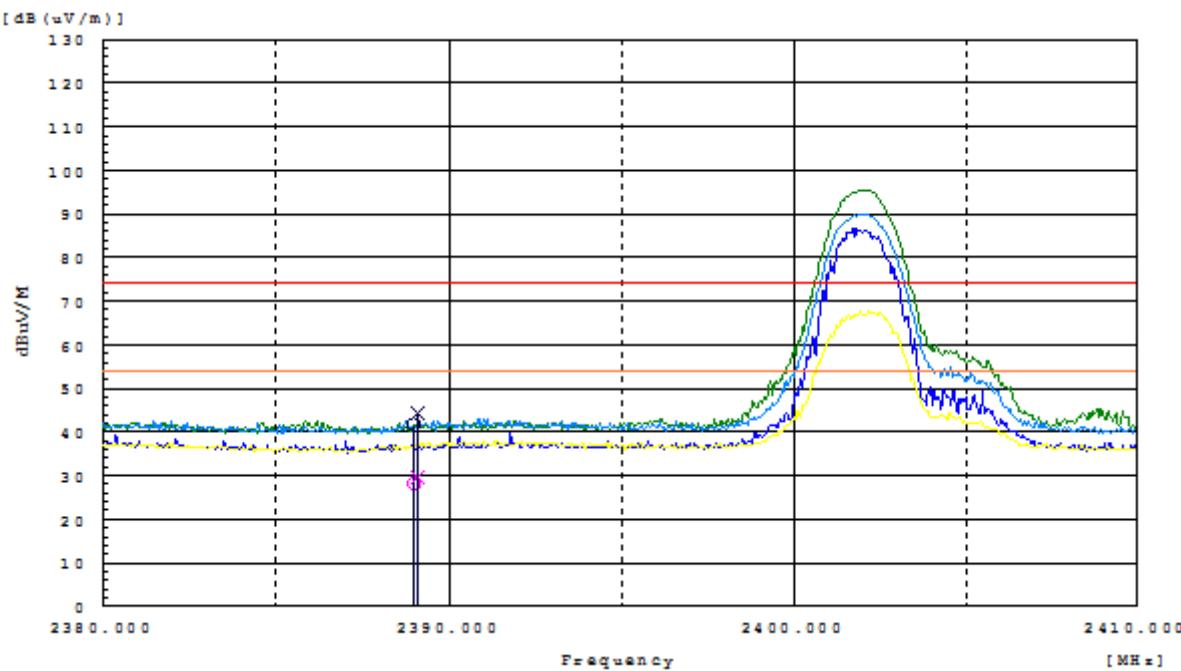

Radiated Restricted Band Edges plot – ($\pi/4$ DQPSK, Ch.78)

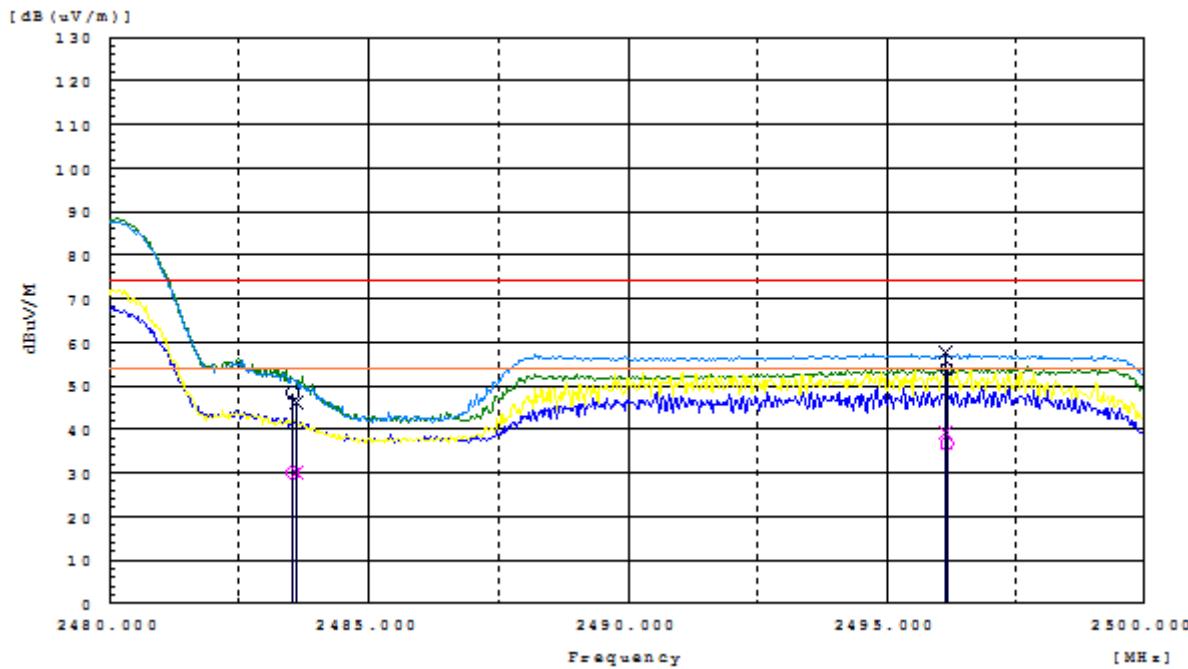

Note : Only the worst case plots for Radiated Restricted Band Edges.

9.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.


Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

Note : We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

S700


[AC Mains (L1)]

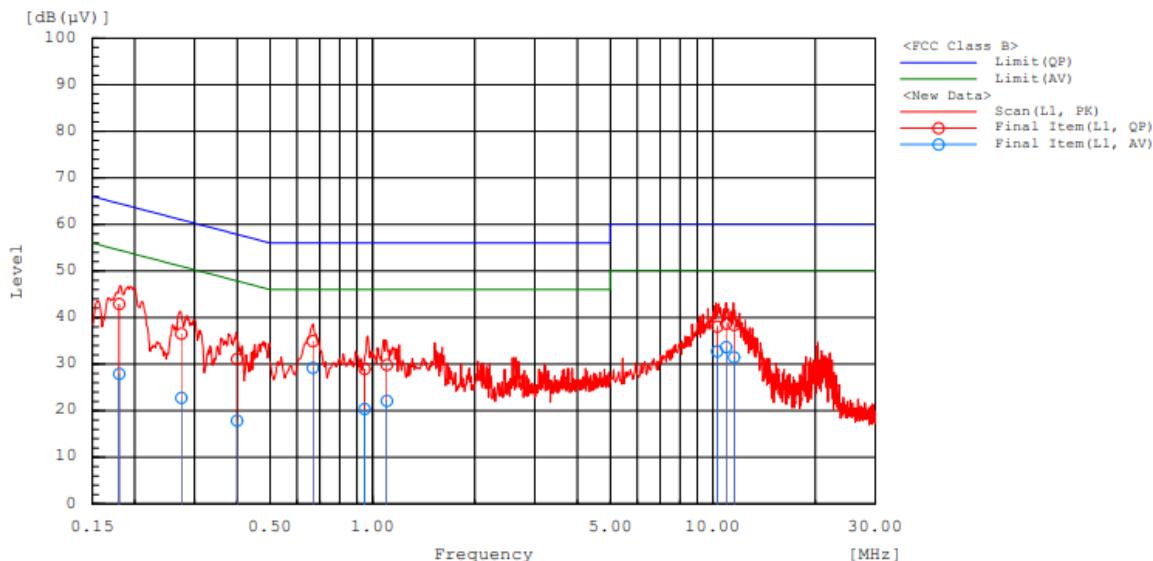

Final Results (L1)

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.18	L1	33.3	18.3	9.6	42.9	27.9	64.5	54.5	21.6	26.6
0.274	L1	27	13.2	9.6	36.6	22.8	61	51	24.4	28.2
0.399	L1	21.5	8.3	9.6	31.1	17.9	57.9	47.9	26.8	30
0.667	L1	25.4	19.6	9.6	35	29.2	56	46	21	16.8
0.947	L1	19.3	10.7	9.7	29	20.4	56	46	27	25.6
1.1	L1	20.2	12.4	9.7	29.9	22.1	56	46	26.1	23.9
10.291	L1	28.1	22.8	10	38.1	32.8	60	50	21.9	17.2
10.94	L1	28.7	23.7	10	38.7	33.7	60	50	21.3	16.3
11.527	L1	28.3	21.4	10.1	38.4	31.5	60	50	21.6	18.5

[AC Mains (N)]

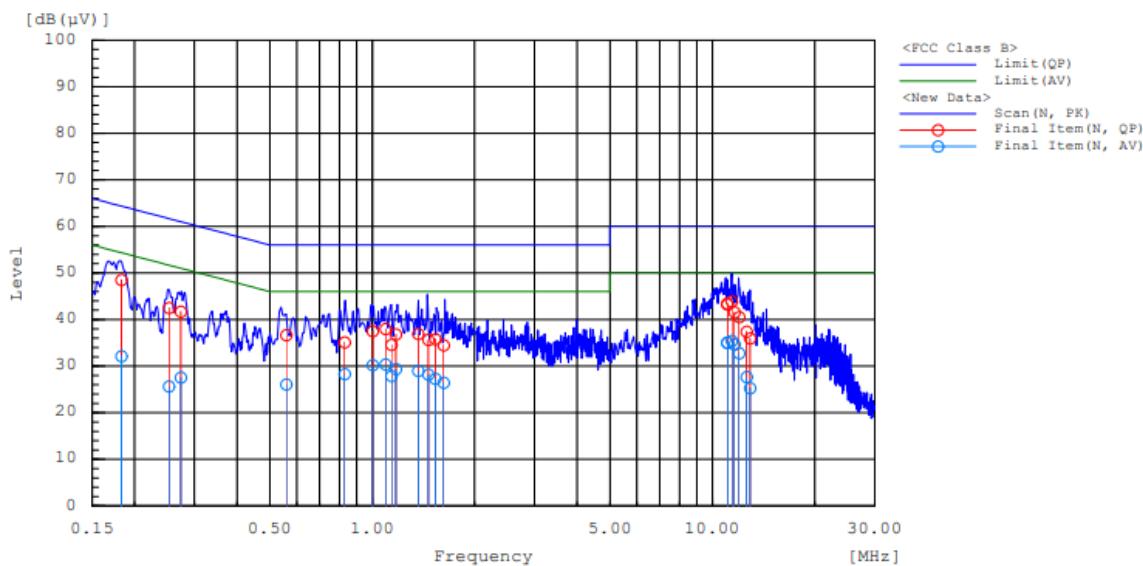


Final Results (N)

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.183	N	38.9	22.5	9.6	48.5	32.1	64.4	54.4	15.9	22.3
0.252	N	32.9	16	9.6	42.5	25.6	61.7	51.7	19.2	26.1
0.273	N	32.1	17.9	9.6	41.7	27.5	61	51	19.3	23.5
0.558	N	27.1	16.5	9.6	36.7	26.1	56	46	19.3	19.9
0.829	N	25.5	18.7	9.6	35.1	28.3	56	46	20.9	17.7
1.002	N	27.8	20.5	9.7	37.5	30.2	56	46	18.5	15.8
1.093	N	28.3	20.7	9.7	38	30.4	56	46	18	15.6
1.138	N	24.9	18.2	9.7	34.6	27.9	56	46	21.4	18.1
1.173	N	27.1	19.7	9.7	36.8	29.4	56	46	19.2	16.6
1.365	N	27.2	19.3	9.7	36.9	29	56	46	19.1	17
1.46	N	25.9	18.5	9.7	35.6	28.2	56	46	20.4	17.8
1.532	N	26.1	17.6	9.7	35.8	27.3	56	46	20.2	18.7
1.622	N	24.9	16.9	9.6	34.5	26.5	56	46	21.5	19.5
11.033	N	33.5	25.1	10	43.5	35.1	60	50	16.5	14.9
11.051	N	33.1	24.9	10.1	43.2	35	60	50	16.8	15
11.404	N	33.8	25.4	10.1	43.9	35.5	60	50	16.1	14.5
11.606	N	31.4	24.5	10.1	41.5	34.6	60	50	18.5	15.4
11.996	N	30.4	22.7	10.1	40.5	32.8	60	50	19.5	17.2
12.598	N	27.3	17.6	10.1	37.4	27.7	60	50	22.6	22.3
12.896	N	25.9	15.2	10.1	36	25.3	60	50	24	24.7

S730


[AC Mains (L1)]

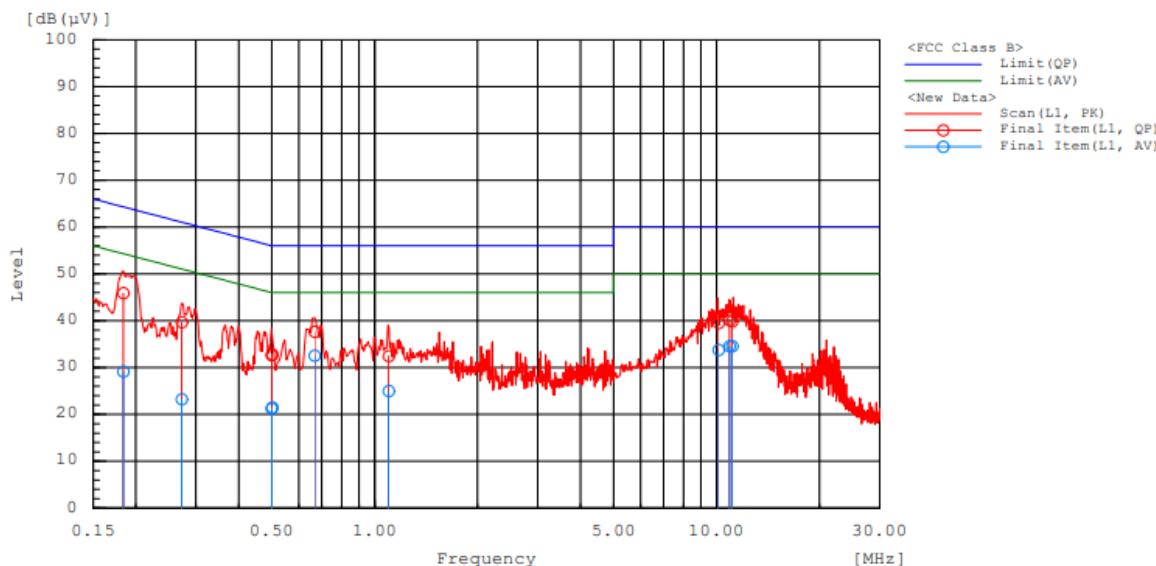

Final Results (L1)

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.184	L1	36.3	19.6	9.6	45.9	29.2	64.3	54.3	18.4	25.1
0.273	L1	30.1	13.6	9.6	39.7	23.2	61	51	21.3	27.8
0.499	L1	23.2	11.7	9.5	32.7	21.2	56	46	23.3	24.8
0.501	L1	23.3	12	9.5	32.8	21.5	56	46	23.2	24.5
0.667	L1	28.1	22.9	9.6	37.7	32.5	56	46	18.3	13.5
1.098	L1	22.8	15.3	9.7	32.5	25	56	46	23.5	21
10.135	L1	29.5	23.8	10	39.5	33.8	60	50	20.5	16.2
10.912	L1	30.1	24.6	10	40.1	34.6	60	50	19.9	15.4
11.107	L1	29.8	24.5	10.1	39.9	34.6	60	50	20.1	15.4

[AC Mains (N)]

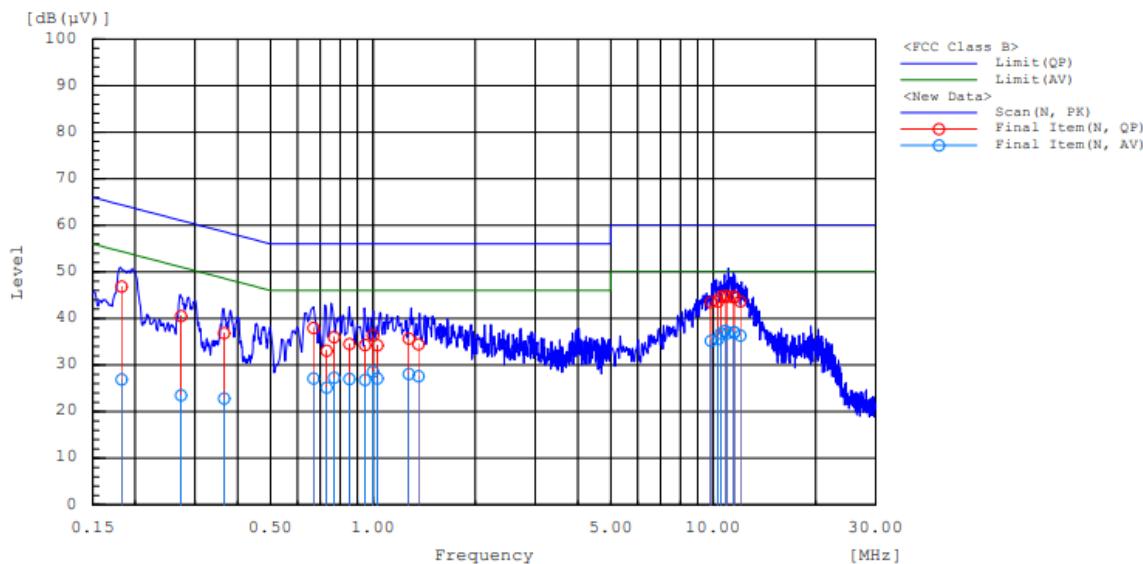


Final Results (N)

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.182	N	37.2	17.3	9.6	46.8	26.9	64.4	54.4	17.6	27.5
0.273	N	31	13.9	9.6	40.6	23.5	61	51	20.4	27.5
0.365	N	27.2	13.2	9.6	36.8	22.8	58.6	48.6	21.8	25.8
0.668	N	28.4	17.5	9.6	38	27.1	56	46	18	18.9
0.73	N	23.5	15.6	9.6	33.1	25.2	56	46	22.9	20.8
0.768	N	26.4	17.7	9.6	36	27.3	56	46	20	18.7
0.852	N	24.8	17.3	9.7	34.5	27	56	46	21.5	19
0.947	N	24.6	17.1	9.7	34.3	26.8	56	46	21.7	19.2
0.999	N	26.7	18.9	9.7	36.4	28.6	56	46	19.6	17.4
1.029	N	24.6	17.4	9.7	34.3	27.1	56	46	21.7	18.9
1.273	N	26	18.4	9.7	35.7	28.1	56	46	20.3	17.9
1.36	N	24.8	17.9	9.7	34.5	27.6	56	46	21.5	18.4
9.84	N	33.5	25.2	10	43.5	35.2	60	50	16.5	14.8
10.327	N	33.7	25.6	10	43.7	35.6	60	50	16.3	14.4
10.526	N	34.7	26.8	10	44.7	36.8	60	50	15.3	13.2
10.826	N	34.9	27.3	10	44.9	37.3	60	50	15.1	12.7
11.02	N	34.7	26.9	10	44.7	36.9	60	50	15.3	13.1
11.487	N	34.6	27	10.1	44.7	37.1	60	50	15.3	12.9
11.511	N	34.4	27	10.1	44.5	37.1	60	50	15.5	12.9
12.002	N	33.6	26.3	10.1	43.7	36.4	60	50	16.3	13.6

S740


[AC Mains (L1)]

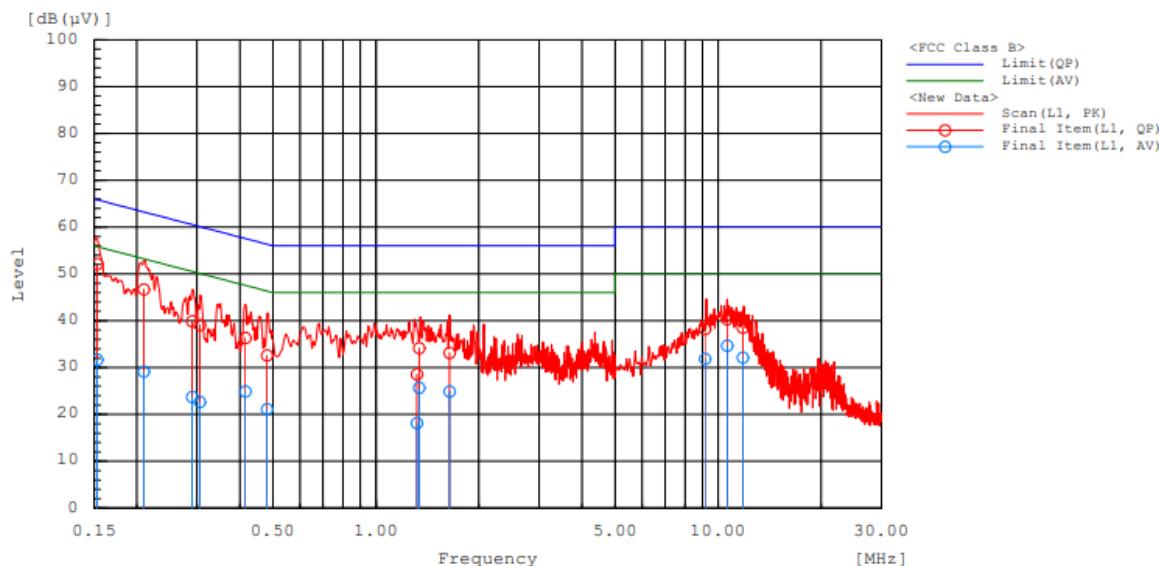

Final Results (L1)

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.153	L1	42.5	22.1	9.6	52.1	31.7	65.8	55.8	13.7	24.1
0.21	L1	37.1	19.5	9.6	46.7	29.1	63.2	53.2	16.5	24.1
0.29	L1	30.3	14.1	9.6	39.9	23.7	60.5	50.5	20.6	26.8
0.306	L1	29.5	13.1	9.6	39.1	22.7	60.1	50.1	21	27.4
0.415	L1	26.7	15.3	9.6	36.3	24.9	57.5	47.5	21.2	22.6
0.481	L1	23.1	11.6	9.5	32.6	21.1	56.3	46.3	23.7	25.2
1.316	L1	18.9	8.5	9.7	28.6	18.2	56	46	27.4	27.8
1.336	L1	24.5	16	9.7	34.2	25.7	56	46	21.8	20.3
1.64	L1	23.6	15.3	9.6	33.2	24.9	56	46	22.8	21.1
9.145	L1	28.3	21.8	10	38.3	31.8	60	50	21.7	18.2
10.632	L1	30.3	24.7	10	40.3	34.7	60	50	19.7	15.3
11.811	L1	28.4	22	10.1	38.5	32.1	60	50	21.5	17.9

[AC Mains (N)]

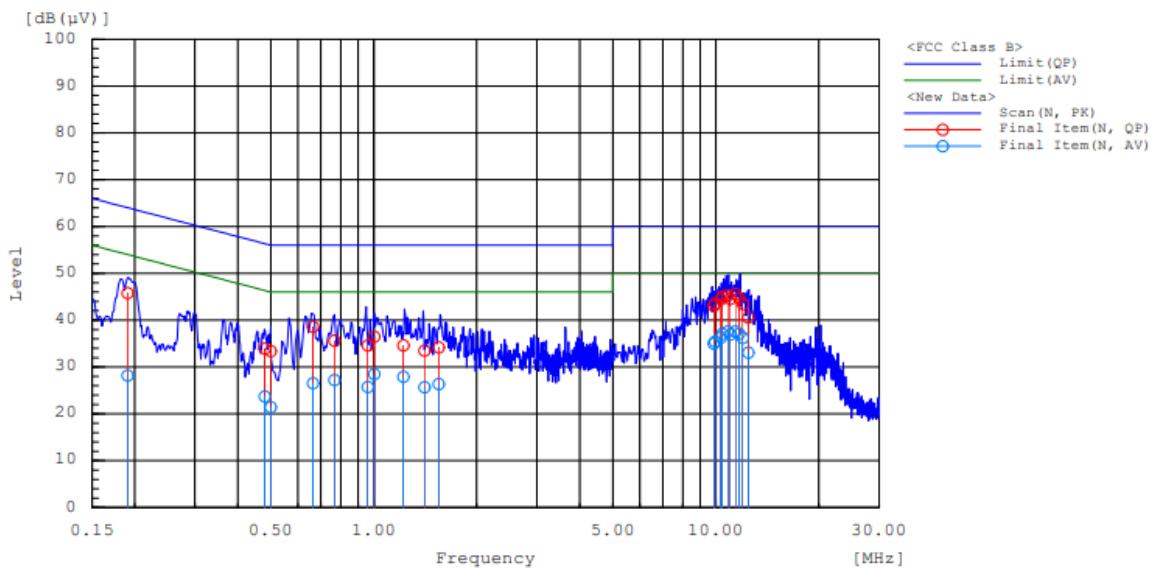

Final Results (N)

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.191	N	36.2	18.6	9.6	45.8	28.2	64	54	18.2	25.8
0.48	N	24.4	14.1	9.6	34	23.7	56.3	46.3	22.3	22.6
0.499	N	23.8	11.8	9.6	33.4	21.4	56	46	22.6	24.6
0.664	N	29	16.9	9.6	38.6	26.5	56	46	17.4	19.5
0.766	N	26	17.7	9.6	35.6	27.3	56	46	20.4	18.7
0.96	N	24.9	16.1	9.7	34.6	25.8	56	46	21.4	20.2
1.002	N	26.8	18.8	9.7	36.5	28.5	56	46	19.5	17.5
1.218	N	24.9	18.3	9.7	34.6	28	56	46	21.4	18
1.405	N	23.8	16	9.7	33.5	25.7	56	46	22.5	20.3
1.546	N	24.6	16.8	9.6	34.2	26.4	56	46	21.8	19.6
9.848	N	33.1	25	10	43.1	35	60	50	16.9	15
9.941	N	33.6	25.4	10	43.6	35.4	60	50	16.4	14.6
10.341	N	34.5	26.3	10	44.5	36.3	60	50	15.5	13.7
10.433	N	35.1	27.1	10	45.1	37.1	60	50	14.9	12.9
10.823	N	35.3	27.6	10	45.3	37.6	60	50	14.7	12.4
11.029	N	34.6	27	10	44.6	37	60	50	15.4	13
11.404	N	35.5	27.5	10.1	45.6	37.6	60	50	14.4	12.4
11.698	N	34.7	27	10.1	44.8	37.1	60	50	15.2	12.9
11.985	N	33.4	26.1	10.1	43.5	36.2	60	50	16.5	13.8
12.44	N	30.5	23	10.1	40.6	33.1	60	50	19.4	16.9

10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Due to Calibration	Manufacture	Serial No.
<input checked="" type="checkbox"/>	Signal Analyzer (20 Hz ~ 40.0 GHz)	ESU40	2018-12-20	ROHDE & SCHWARZ	100529
<input checked="" type="checkbox"/>	Signal Analyzer (3 Hz ~ 40 GHz)	N9030A	2019-02-05	AGILENT	MY53311083
<input checked="" type="checkbox"/>	Power Meter	N1914A	2019-02-05	AGILENT	MY56500009
<input checked="" type="checkbox"/>	Power Sensor	E9304A	2019-02-05	AGILENT	MY55320010
<input checked="" type="checkbox"/>	BI-LOG Antenna (30 MHz ~ 1 GHz)	JB6	2019-06-27	Schwarzbeck	A060916
<input checked="" type="checkbox"/>	Attenuator (20 dB, DC ~ 26.5 GHz)	8493C	2018-12-19	HP	09072
<input checked="" type="checkbox"/>	DC power supply	6655A	2019-02-06	HP	KR94907553
<input checked="" type="checkbox"/>	POWER AMP (1 GHz ~ 18 GHz)	CBL18405045-01	2019-02-05	CERNEX	27973
<input checked="" type="checkbox"/>	POWER AMP (0.3GHz ~ 1GHz)	PAM-103A	2019-02-05	Com-Power Corporation	18020005
<input checked="" type="checkbox"/>	Horn Antenna (1 GHz ~ 18 GHz)	DRH-118	2020-05-24	Sunol	A070516
<input checked="" type="checkbox"/>	Power Divider-2way (DC ~ 26.5 GHz)	11636B	2018-12-19	HP	50820
<input checked="" type="checkbox"/>	Loop Antenna (0.009 ~ 30 MHz)	HLA 6121	2020-08-27	Teseq	43964
<input checked="" type="checkbox"/>	Horn Antenna (18 GHz ~ 40 GHz)	DRH-1840	2019-03-13	Sunol	17120
<input checked="" type="checkbox"/>	POWER AMP (18 GHz ~ 40 GHz)	CBL184050-45-01	2019-02-05	CERNEX, Inc.	43964

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	EMCE-R-1811-F001-P