



element

Emerson Location Awareness Anchor

Model GEO20

**FCC 15.247:2019
2.4GHz Radio
Location Awareness Radio**

Report # EMPM0080.4 Rev. 1



NVLAP[®]
TESTING

NVLAP LAB CODE: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



Last Date of Test: November 15, 2019
Emerson
EUT: GEO20

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2019	ANSI C63.10:2013

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Eric Brandon, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		
01	Antenna Gain value updated	2020-08-11	25-27

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE


For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120th Ave NE Bothell, WA 98011 (425) 984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

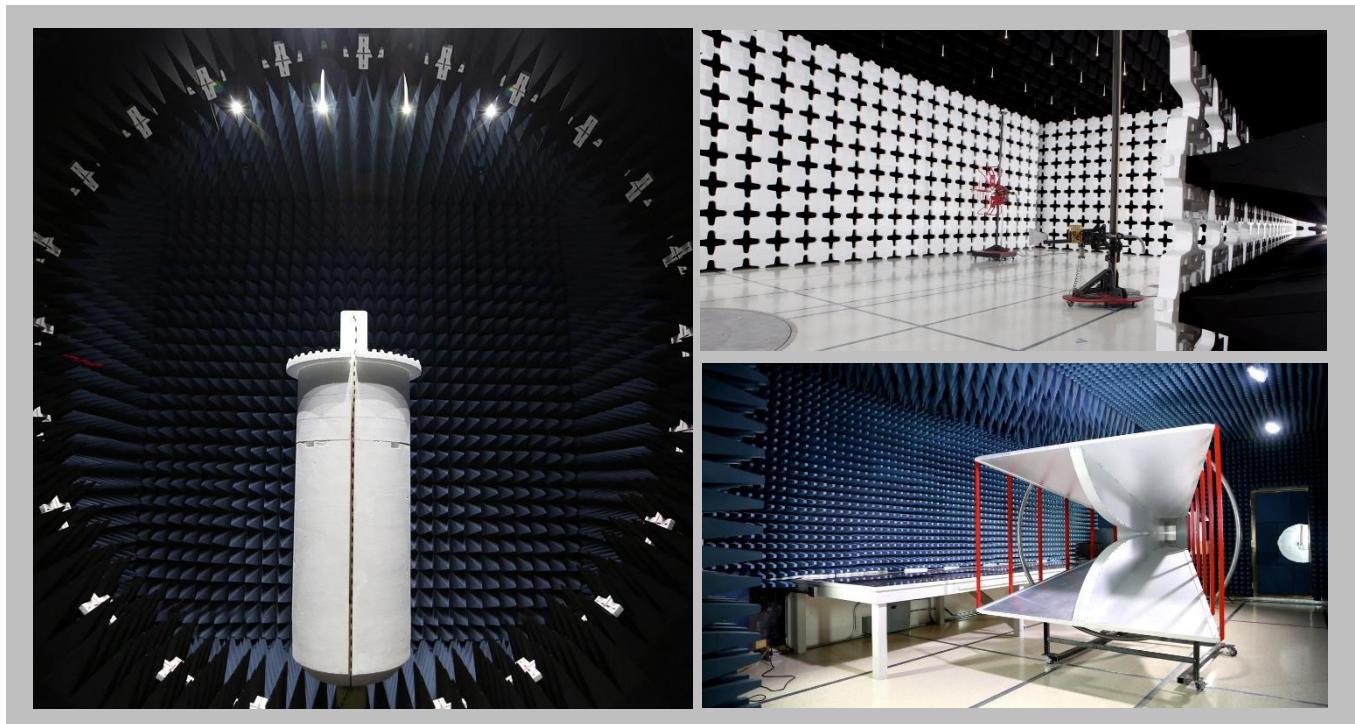

EMISSIONS MEASUREMENTS



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

Sample Calculations

Radiated Emissions:


$$\begin{array}{ccccccccccccc} \text{Field} & & \text{Measured} & & \text{Antenna} & & \text{Cable} & & \text{Amplifier} & & \text{Distance} & & \text{External} \\ \text{Strength} & = & \text{Level} & + & \text{Factor} & + & \text{Factor} & - & \text{Gain} & + & \text{Adjustment} & + & \text{Attenuation} \\ 33.5 & = & 42.6 & + & 28.6 & + & 3.1 & - & 40.8 & + & 0.0 & + & 0.0 \end{array}$$

Conducted Emissions:

$$\begin{array}{ccccccccc} \text{Adjusted} & & \text{Measured} & & \text{Transducer} & & \text{Cable} & & \text{External} \\ \text{Level} & = & \text{Level} & + & \text{Factor} & + & \text{Factor} & + & \text{Attenuation} \\ 47.1 & = & 26.7 & + & 0.3 & + & 0.1 & + & 20.0 \end{array}$$

Test Setup Block Diagrams


Antenna Port Conducted Measurements

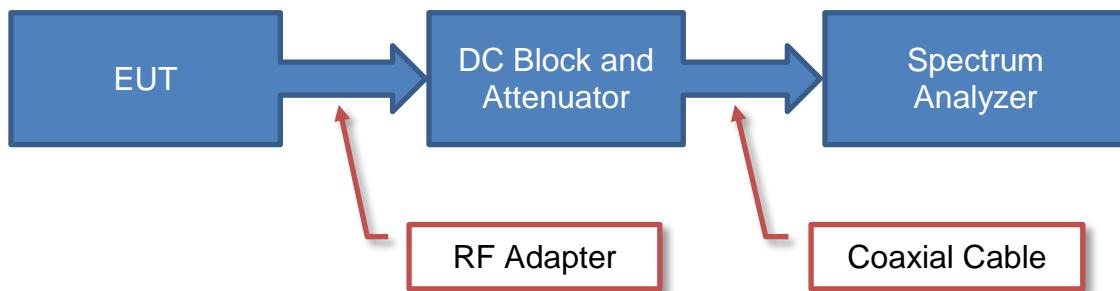

Near Field Test Fixture Measurements



Spurious Radiated Emissions

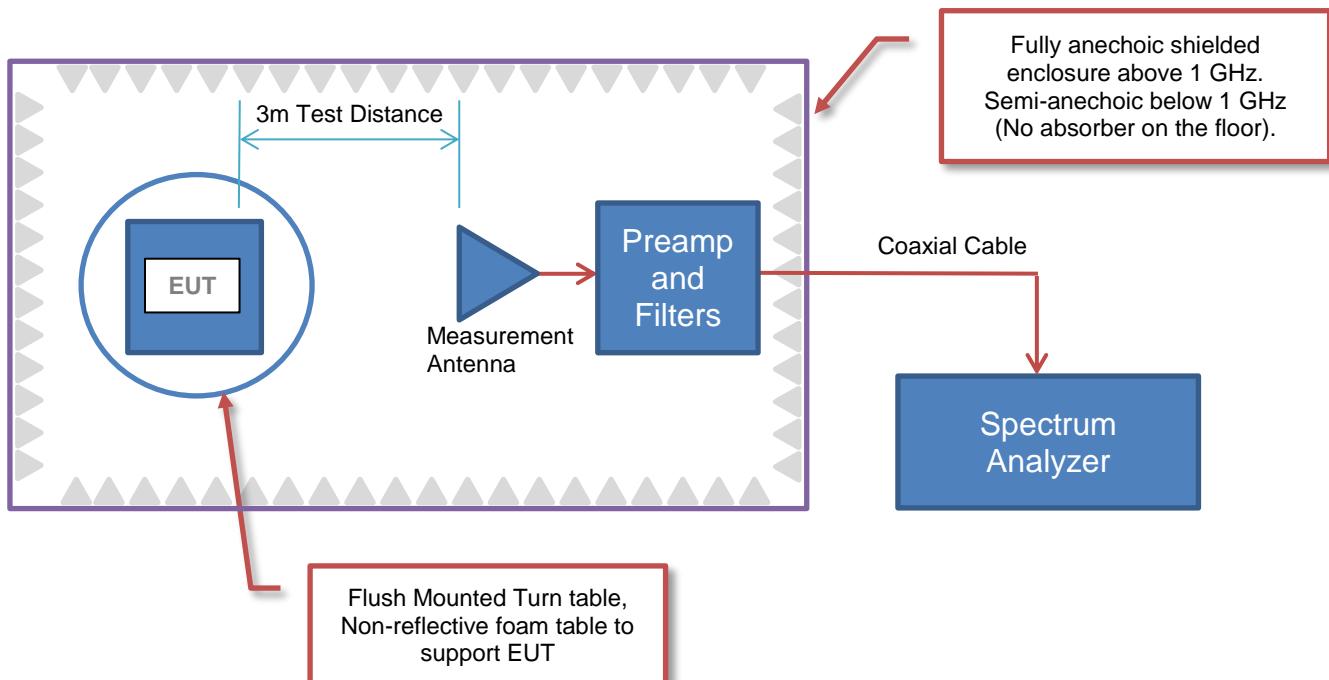

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Emerson
Address:	6021 Innovation Boulevard
City, State, Zip:	Shakopee, MN 55379
Test Requested By:	Merritt Pulkrabek
EUT:	GEO20
First Date of Test:	November 13, 2019
Last Date of Test:	November 15, 2019
Receipt Date of Samples:	November 11, 2019
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

The GEO20 (Anchor) is a fixed low power wireless device that communicates with 2 devices using 2 different radios.

Testing Objective:

To demonstrate compliance of the 2.4GHz Location Awareness Radio to FCC 15.247 requirements.

CONFIGURATIONS



Configuration EMPM0080- 1

EUT				
Description	Manufacturer	Model/Part Number	Serial Number	
Wireless Location Anchor	Emerson	GEO20	2400F	

Remote Equipment Outside of Test Setup Boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
Laptop 2	Acer	Aspire One	LUSAL0B137011502C81601	
Power Supply (Laptop 2)	Delta Electronics, Inc.	ADP-40TH A	AP0400100201107459P101	

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB-HART Interface Cable	Yes	2.2 m	No	Wireless Location Anchor	Laptop
DC Cable (Laptop 2)	No	2.5 m	Yes	Power Supply (Laptop 2)	Laptop 2

Configuration EMPM0080- 2

EUT				
Description	Manufacturer	Model/Part Number	Serial Number	
Wireless Location Anchor	Emerson	GEO20	2402C	

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2019-11-13	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2019-11-15	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2019-11-15	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2019-11-15	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2019-11-15	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2019-11-15	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2019-11-15	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2019-11-15	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting Geo - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

EMPM0080 - 2

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26500 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - High Pass	Micro-Tronics	HPM50111	LFN	12-Sep-2019	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	17-Sep-2019	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	17-Sep-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	11-Sep-2019	12 mo
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNP	11-Sep-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	8-Mar-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	8-Feb-2019	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	17-Sep-2019	12 mo
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	16-Jan-2019	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	18-Oct-2019	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	18-Oct-2019	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	24 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	13-Dec-2018	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10 \times \text{LOG}(\text{dc})$.

SPURIOUS RADIATED EMISSIONS




EmiR5 2019.08.15.1

PSA-ESCI 2019.05.10

Work Order:	EMPM0080	Date:	13-Nov-2019	
Project:	None	Temperature:	20.3 °C	
Job Site:	MN05	Humidity:	19.6% RH	
Serial Number:	2402C	Barometric Pres.:	1015 mbar	Tested by: Dustin Sparks
EUT:	GEO20			
Configuration:	2			
Customer:	Emerson			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Transmitting Geo - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated			
Deviations:	None			
Comments:	Duty cycle correction factor (DCCF) of 3.7 dB added to all RMS average measurements. Based on a measured duty cycle of 42.5% and the following formula: DCCF = 10 * log(1/0.425)			

Test Specifications	Test Method
FCC 15.247:2019	ANSI C63.10:2013

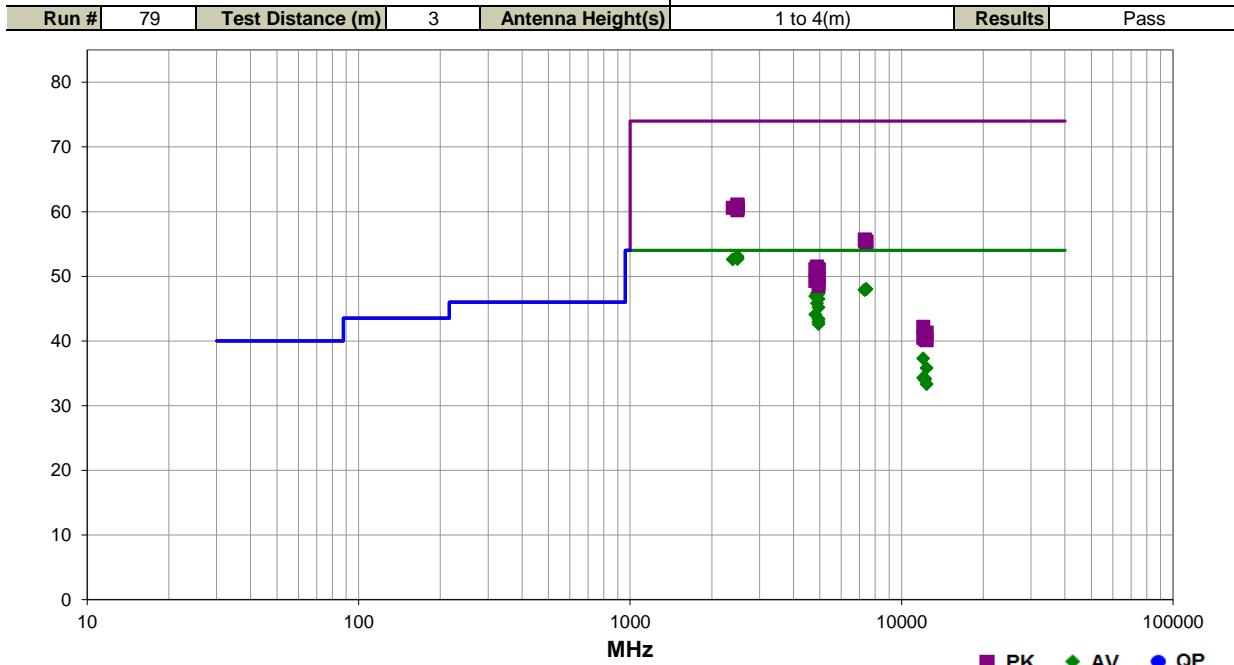

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.600	33.2	-3.8	2.6	135.9	3.7	20.0	Horz	AV	0.0	53.1	54.0	-0.9	High ch, EUT on side
2483.575	33.0	-3.8	1.5	73.9	3.7	20.0	Horz	AV	0.0	52.9	54.0	-1.1	High ch, EUT horizontal
2483.850	33.0	-3.8	1.5	81.0	3.7	20.0	Vert	AV	0.0	52.9	54.0	-1.1	High ch, EUT vertical
2488.242	32.7	-3.7	1.5	325.9	3.7	20.0	Vert	AV	0.0	52.7	54.0	-1.3	High ch, EUT horizontal
2483.725	32.8	-3.8	1.5	333.8	3.7	20.0	Vert	AV	0.0	52.7	54.0	-1.3	High ch, EUT on side
2488.400	32.7	-3.7	1.5	15.0	3.7	20.0	Horz	AV	0.0	52.7	54.0	-1.3	High ch, EUT vertical
2389.833	32.5	-3.6	1.5	25.0	3.7	20.0	Horz	AV	0.0	52.6	54.0	-1.4	Low ch, EUT on side
7426.825	31.0	13.3	1.5	47.0	3.7	0.0	Horz	AV	0.0	48.0	54.0	-6.0	High ch, EUT vertical
7427.442	31.0	13.3	2.3	16.9	3.7	0.0	Vert	AV	0.0	48.0	54.0	-6.0	High ch, EUT horizontal
7318.317	30.7	13.5	1.5	286.0	3.7	0.0	Horz	AV	0.0	47.9	54.0	-6.1	Mid ch, EUT vertical
7318.550	30.7	13.5	1.5	314.0	3.7	0.0	Vert	AV	0.0	47.9	54.0	-6.1	Mid ch, EUT horizontal
4881.067	39.0	4.7	2.2	45.0	3.7	0.0	Horz	AV	0.0	47.4	54.0	-6.6	Mid ch, EUT vertical
4950.942	38.8	4.8	2.4	228.9	3.7	0.0	Horz	AV	0.0	47.3	54.0	-6.7	High ch, EUT vertical
4811.042	38.6	4.6	2.2	31.9	3.7	0.0	Horz	AV	0.0	46.9	54.0	-7.1	Low ch, EUT vertical
4950.958	38.0	4.8	2.6	152.0	3.7	0.0	Vert	AV	0.0	46.5	54.0	-7.5	High ch, EUT horizontal
4880.917	37.4	4.7	2.2	209.0	3.7	0.0	Vert	AV	0.0	45.8	54.0	-8.2	Mid ch, EUT horizontal
4950.958	36.7	4.8	1.5	340.9	3.7	0.0	Vert	AV	0.0	45.2	54.0	-8.8	High ch, EUT on side
4811.075	35.8	4.6	1.5	216.0	3.7	0.0	Vert	AV	0.0	44.1	54.0	-9.9	Low ch, EUT horizontal

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4950.917	34.9	4.8	1.3	219.9	3.7	0.0	Horz	AV	0.0	43.4	54.0	-10.6	High ch, EUT horizontal
4950.950	34.5	4.8	1.5	27.9	3.7	0.0	Vert	AV	0.0	43.0	54.0	-11.0	High ch, EUT vertical
4951.008	34.1	4.8	1.4	278.9	3.7	0.0	Horz	AV	0.0	42.6	54.0	-11.4	High ch, EUT on side
2484.417	44.9	-3.8	2.6	135.9	0.0	20.0	Horz	PK	0.0	61.1	74.0	-12.9	High ch, EUT on side
2486.992	44.7	-3.7	1.5	333.8	0.0	20.0	Vert	PK	0.0	61.0	74.0	-13.0	High ch, EUT on side
2486.142	44.3	-3.7	1.5	73.9	0.0	20.0	Horz	PK	0.0	60.6	74.0	-13.4	High ch, EUT horizontal
2483.558	44.4	-3.8	1.5	325.9	0.0	20.0	Vert	PK	0.0	60.6	74.0	-13.4	High ch, EUT horizontal
2389.117	44.2	-3.6	1.5	25.0	0.0	20.0	Horz	PK	0.0	60.6	74.0	-13.4	Low ch, EUT on side
2488.225	44.2	-3.7	1.5	81.0	0.0	20.0	Vert	PK	0.0	60.5	74.0	-13.5	High ch, EUT vertical
2484.200	44.0	-3.8	1.5	15.0	0.0	20.0	Horz	PK	0.0	60.2	74.0	-13.8	High ch, EUT vertical
12027.500	35.7	-2.1	2.3	336.0	3.7	0.0	Vert	AV	0.0	37.3	54.0	-16.7	Low ch, EUT horizontal
12377.320	32.8	-0.7	1.5	260.0	3.7	0.0	Vert	AV	0.0	35.8	54.0	-18.2	High ch, EUT horizontal
7321.575	42.2	13.5	1.5	314.0	0.0	0.0	Vert	PK	0.0	55.7	74.0	-18.3	Mid ch, EUT horizontal
7321.675	42.0	13.5	1.5	286.0	0.0	0.0	Horz	PK	0.0	55.5	74.0	-18.5	Mid ch, EUT vertical
7426.108	42.1	13.3	1.5	47.0	0.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	High ch, EUT vertical
7427.200	42.0	13.3	2.3	16.9	0.0	0.0	Vert	PK	0.0	55.3	74.0	-18.7	High ch, EUT horizontal
12027.430	32.7	-2.1	1.7	78.9	3.7	0.0	Horz	AV	0.0	34.3	54.0	-19.7	Low ch, EUT vertical
12202.440	32.3	-1.8	1.5	31.8	3.7	0.0	Vert	AV	0.0	34.2	54.0	-19.8	Mid ch, EUT horizontal
12202.450	32.1	-1.8	1.8	21.0	3.7	0.0	Horz	AV	0.0	34.0	54.0	-20.0	Mid ch, EUT vertical
12377.490	30.3	-0.7	1.5	339.0	3.7	0.0	Horz	AV	0.0	33.3	54.0	-20.7	High ch, EUT vertical
4878.783	46.8	4.7	2.2	45.0	0.0	0.0	Horz	PK	0.0	51.5	74.0	-22.5	Mid ch, EUT vertical
4949.175	46.3	4.8	2.4	228.9	0.0	0.0	Horz	PK	0.0	51.1	74.0	-22.9	High ch, EUT vertical
4810.925	46.5	4.6	2.2	31.9	0.0	0.0	Horz	PK	0.0	51.1	74.0	-22.9	Low ch, EUT vertical
4949.133	46.2	4.8	2.6	152.0	0.0	0.0	Vert	PK	0.0	51.0	74.0	-23.0	High ch, EUT horizontal
4880.742	46.0	4.7	2.2	209.0	0.0	0.0	Vert	PK	0.0	50.7	74.0	-23.3	Mid ch, EUT horizontal
4950.783	45.0	4.8	1.5	340.9	0.0	0.0	Vert	PK	0.0	49.8	74.0	-24.2	High ch, EUT on side
4950.725	44.9	4.8	1.3	219.9	0.0	0.0	Horz	PK	0.0	49.7	74.0	-24.3	High ch, EUT horizontal
4811.183	44.7	4.6	1.5	216.0	0.0	0.0	Vert	PK	0.0	49.3	74.0	-24.7	Low ch, EUT horizontal
4949.117	44.3	4.8	1.4	278.9	0.0	0.0	Horz	PK	0.0	49.1	74.0	-24.9	High ch, EUT on side
4951.000	43.7	4.8	1.5	27.9	0.0	0.0	Vert	PK	0.0	48.5	74.0	-25.5	High ch, EUT vertical
12027.410	44.3	-2.1	2.3	336.0	0.0	0.0	Vert	PK	0.0	42.2	74.0	-31.8	Low ch, EUT horizontal
12373.130	42.0	-0.7	1.5	260.0	0.0	0.0	Vert	PK	0.0	41.3	74.0	-32.7	High ch, EUT horizontal
12022.770	42.7	-2.2	1.7	78.9	0.0	0.0	Horz	PK	0.0	40.5	74.0	-33.5	Low ch, EUT vertical
12197.520	42.3	-1.8	1.8	21.0	0.0	0.0	Horz	PK	0.0	40.5	74.0	-33.5	Mid ch, EUT vertical
12197.630	42.1	-1.8	1.5	31.8	0.0	0.0	Vert	PK	0.0	40.3	74.0	-33.7	Mid ch, EUT horizontal
12377.390	40.8	-0.7	1.5	339.0	0.0	0.0	Horz	PK	0.0	40.1	74.0	-33.9	High ch, EUT vertical

DUTY CYCLE



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE



TbTx 2019.08.30.0

XMI 2019.08.05


EUT:	GEO20		Work Order:	EMPM0080	
Serial Number:	2400F		Date:	15-Nov-19	
Customer:	Emerson		Temperature:	23.1 °C	
Attendees:	None		Humidity:	24.2% RH	
Project:	None		Barometric Pres.:	1030 mbar	
Tested by:	Dustin Sparks		Power:	Battery	
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2019			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Dustin Sparks</i>		
			Pulse Width	Period	Number of Pulses
Geo, Low Channel (2405 MHz)			4.26 ms	10.011 ms	1
Geo, Low Channel (2405 MHz)			N/A	N/A	5
Geo, Mid Channel (2440 MHz)			4.26 ms	10.011 ms	1
Geo, Mid Channel (2440 MHz)			N/A	N/A	5
Geo, High Channel (2475 MHz)			4.258 ms	10.009 ms	1
Geo, High Channel (2475 MHz)			N/A	N/A	5
					Value (%)
					Limit (%)
					Results

DUTY CYCLE




TbtTx 2019.08.30.0 XMT 2019.09.05

Geo, Low Channel (2405 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
4.26 ms	10.011 ms	1	42.6	N/A	N/A	N/A

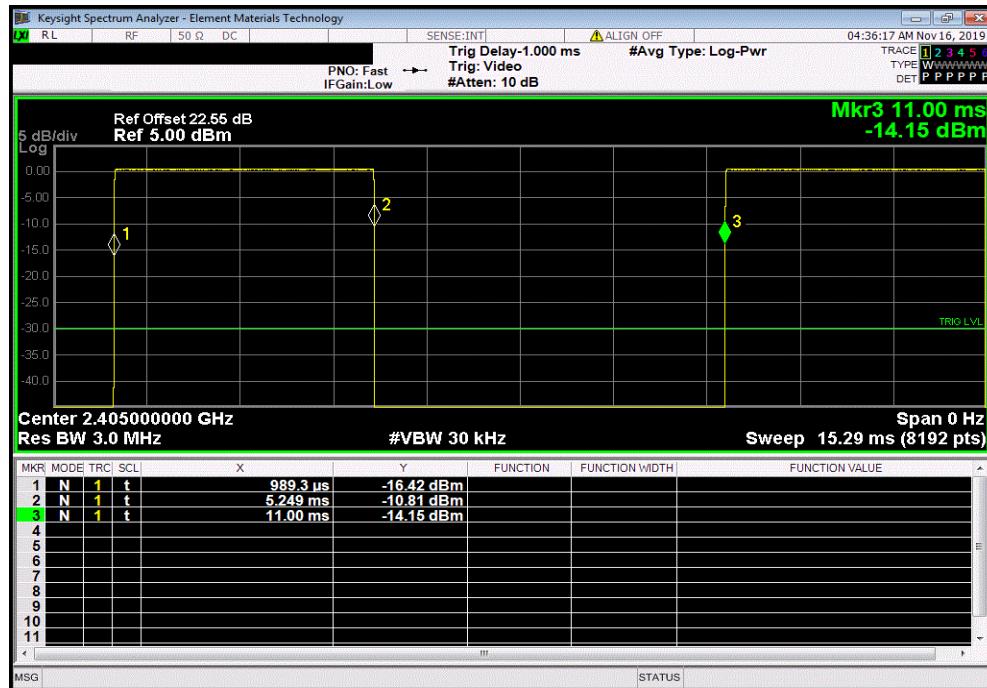

Geo, Low Channel (2405 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	N/A

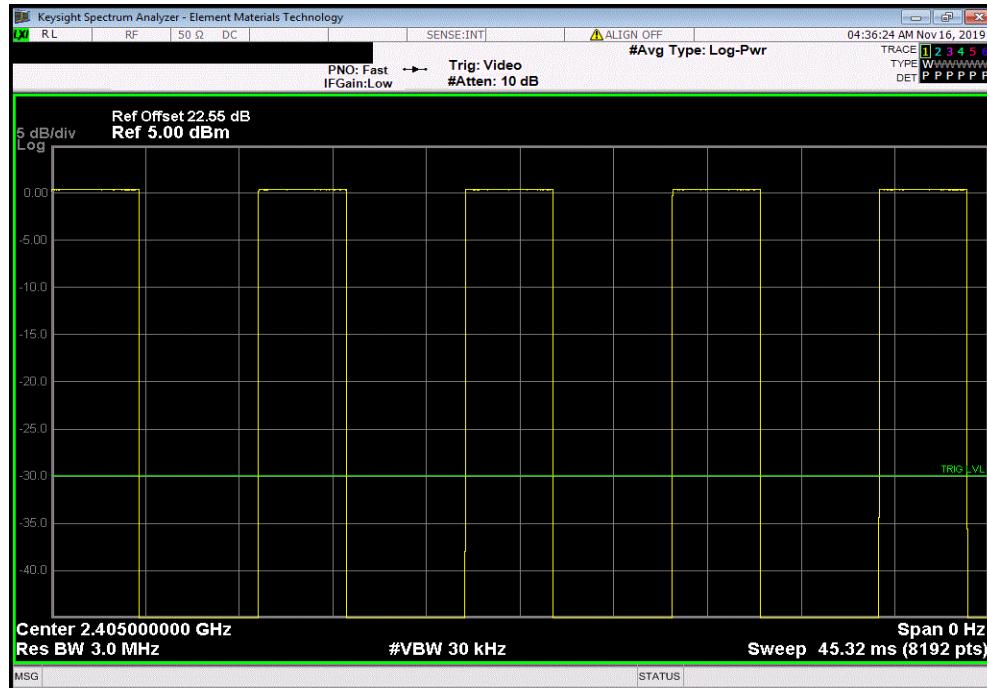


DUTY CYCLE




TbtTx 2019.08.30.0 XMT 2019.09.05

Geo, Mid Channel (2440 MHz)						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	4.26 ms	10.011 ms	1	42.6	N/A	N/A

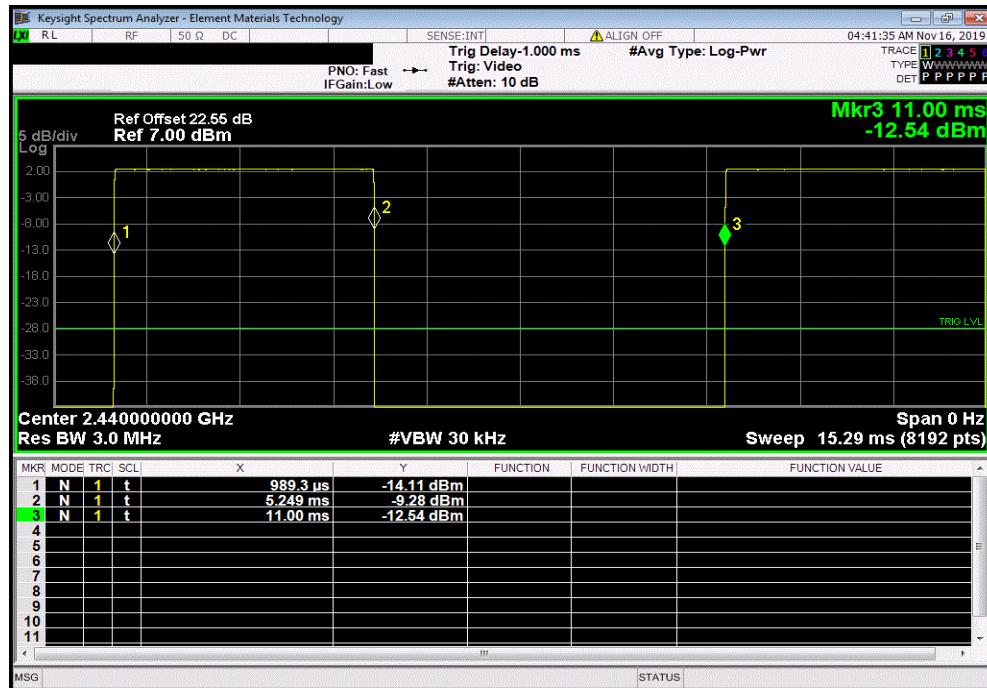

Geo, Mid Channel (2440 MHz)						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	N/A	N/A	5	N/A	N/A	N/A

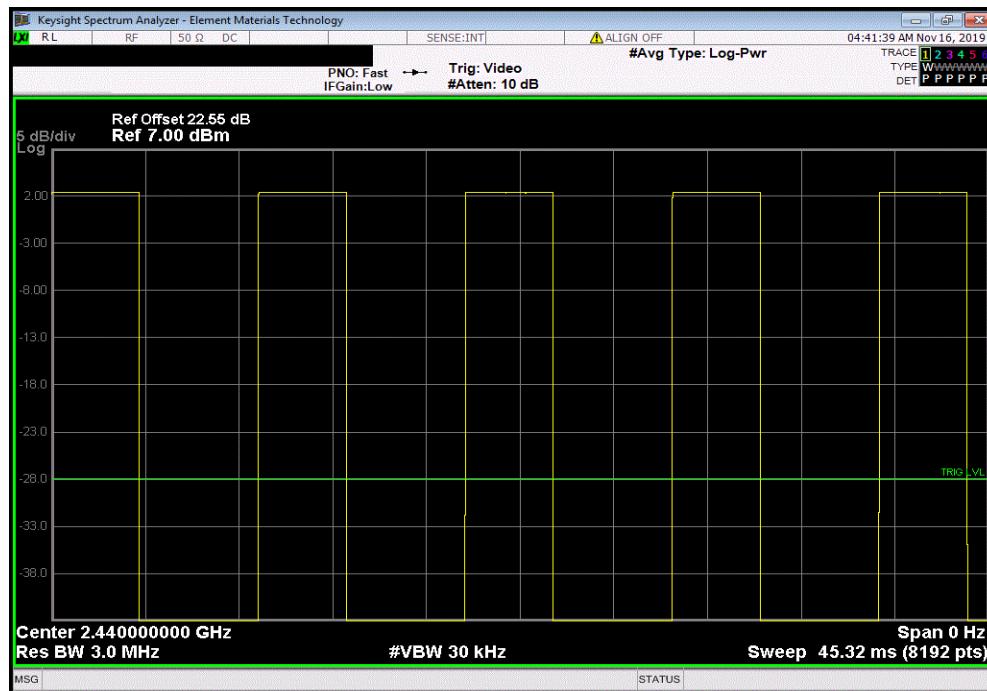


DUTY CYCLE




TbtTx 2019.08.30.0 XMT 2019.09.05

Geo, High Channel (2475 MHz)						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	4.258 ms	10.009 ms	1	42.5	N/A	N/A

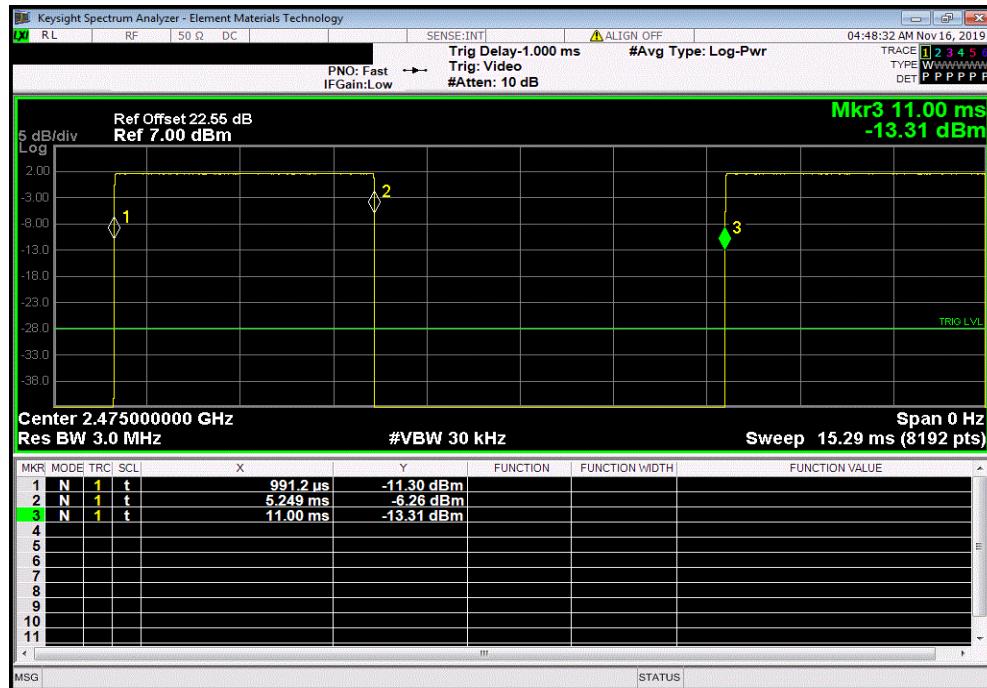

Geo, High Channel (2475 MHz)						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	N/A	N/A	5	N/A	N/A	N/A

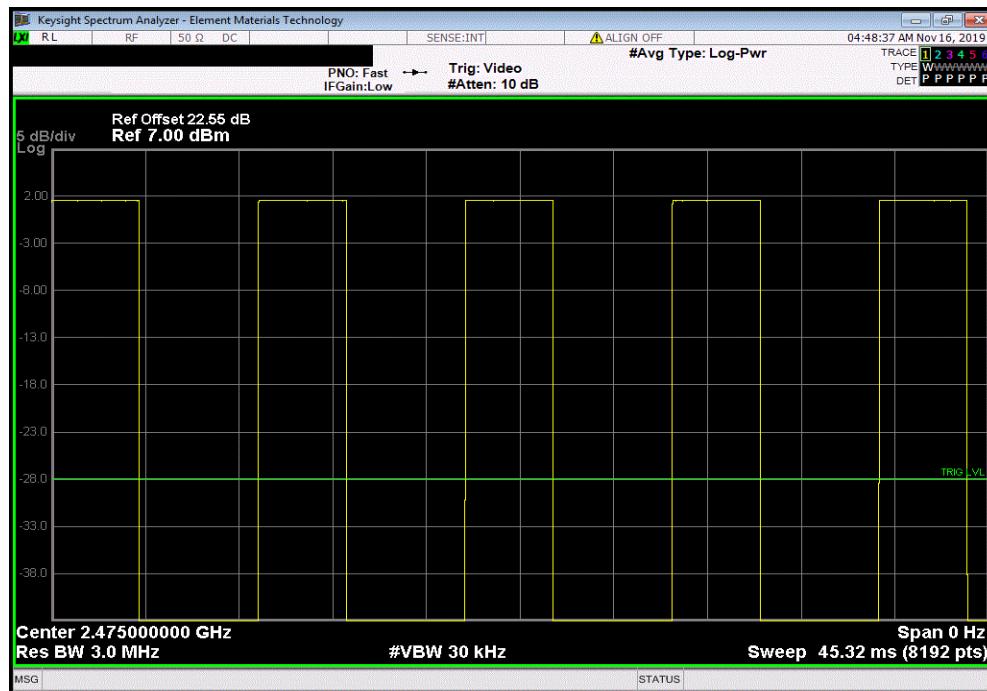

OUTPUT POWER



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

OUTPUT POWER



ThiTx 2019.08.30 C

XM1 2019.09.05

EUT: GEO20	Work Order: EMPM0080	TDx: 2019.08.30.0
Serial Number: 2400F	Date: 15-Nov-19	XMM: 2019.09.05
Customer: Emerson	Temperature: 23.1 °C	
Attendees: None	Humidity: 24.3% RH	
Project: None	Barometric Pres.: 1030 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08
TEST SPECIFICATIONS		
Test Method		
FCC 15.247:2019	ANSI C63.10:2013	
COMMENTS		
None		
DEVIATIONS FROM TEST STANDARD		
None		
Configuration #	1	 Signature
Out Pwr (dBm) Limit (dBm) Result Geo, Low Channel (2405 MHz) 0.787 30 Pass Geo, Mid Channel (2440 MHz) 3.061 30 Pass Geo, High Channel (2475 MHz) 2.245 20 Pass		

OUTPUT POWER



TbtTx 2019.08.30.0 XMT 2019.09.05

Geo, Low Channel (2405 MHz)			
	Out Pwr (dBm)	Limit (dBm)	Result
	0.787	30	Pass



Geo, Mid Channel (2440 MHz)			
	Out Pwr (dBm)	Limit (dBm)	Result
	3.061	30	Pass




OUTPUT POWER



TbtTx 2019.08.30.0 XM1 2019.09.05

Geo, High Channel (2475 MHz)			Out Pwr (dBm)	Limit (dBm)	Result
			2.345	30	Pass

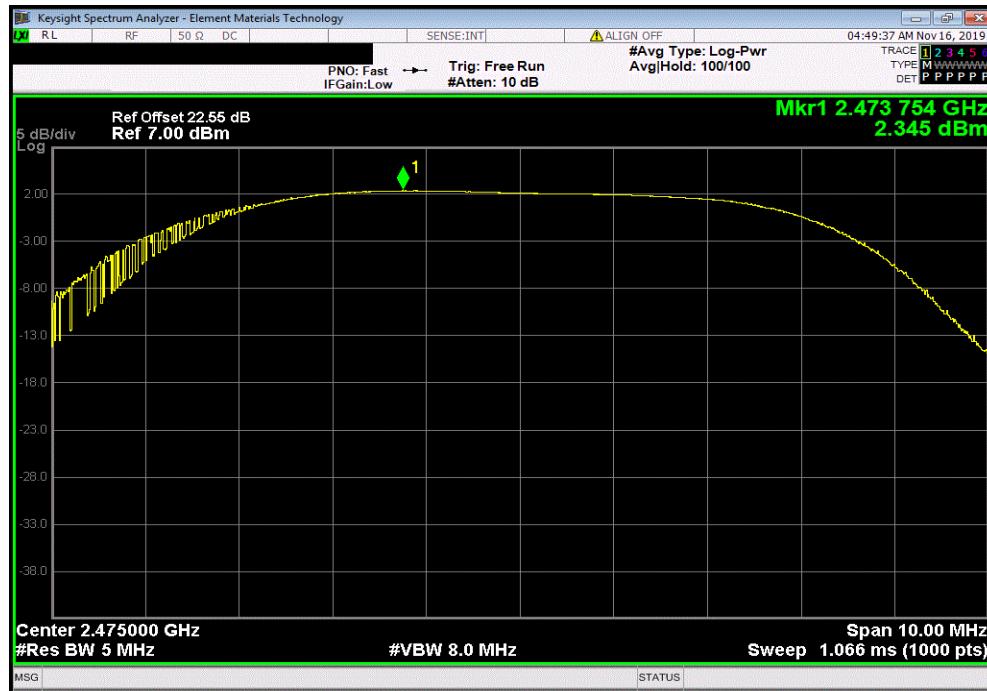

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

The antenna gain of the EUT was added to the output power to get the EIRP.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2019.08.30.0

XMI 2019.08.05

EUT:	GEO20		Work Order:	EMPM0080			
Serial Number:	2400F		Date:	15-Nov-19			
Customer:	Emerson		Temperature:	23.1 °C			
Attendees:	None		Humidity:	24.5% RH			
Project:	None		Barometric Pres.:	1030 mbar			
Tested by:	Dustin Sparks		Power:	Battery			
TEST SPECIFICATIONS			Test Method				
FCC 15.247:2019			ANSI C63.10:2013				
COMMENTS							
None							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature					
			Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)		
Geo, Low Channel (2405 MHz)			0.787	0.92	1.707	36	Pass
Geo, Mid Channel (2440 MHz)			3.061	0.92	3.981	36	Pass
Geo, High Channel (2475 MHz)			2.345	0.92	3.265	36	Pass

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbtTx 2019.08.30.0 XM1 2019.09.05

Geo, Low Channel (2405 MHz)					
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
0.787	0.92	1.707	36	Pass	



Geo, Mid Channel (2440 MHz)					
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
3.061	0.92	3.981	36	Pass	

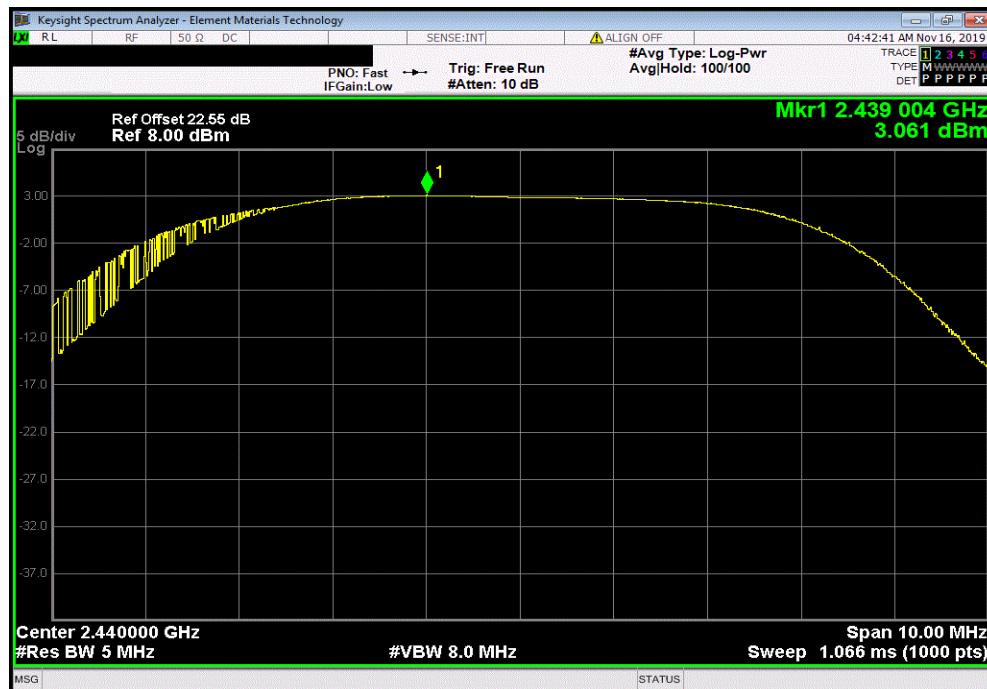


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbtTx 2019.08.30.0 XM1 2019.09.05

Geo, High Channel (2475 MHz)					
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
2.345	0.92	3.265	36	Pass	

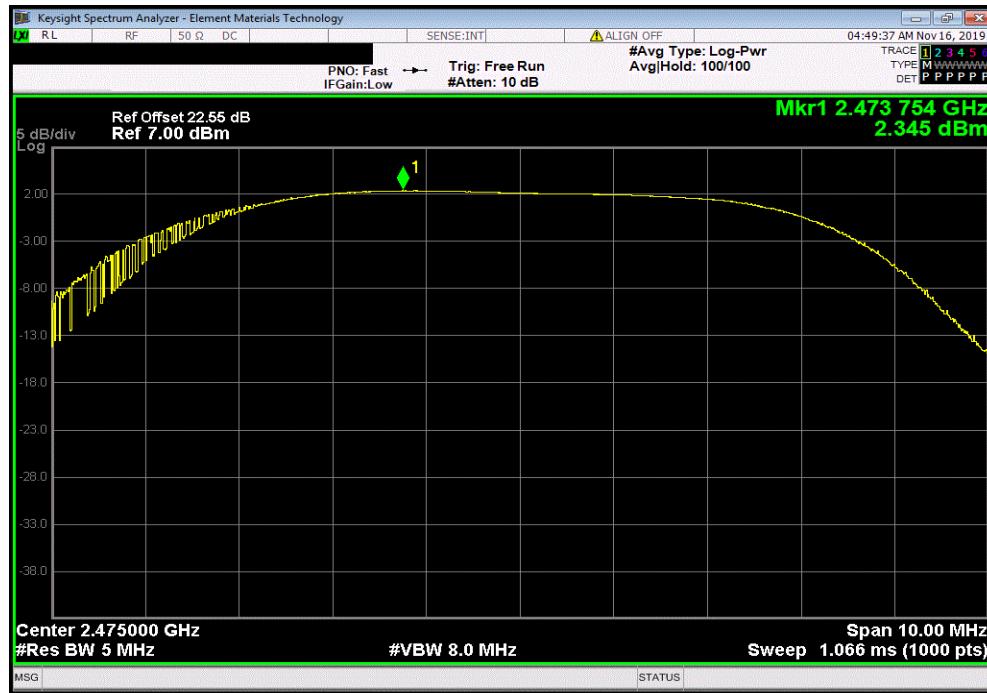

BAND EDGE COMPLIANCE



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



ThiTx 2019.08.30 C

XMI 2019.09.05

EUT: GEO20	Work Order: EMPM0080	Tdtx 2019.08.30.0	
Serial Number: 2400F	Date: 15-Nov-19	XMII 2019.09.05	
Customer: Emerson	Temperature: 23.1 °C		
Attendees: None	Humidity: 24.4% RH		
Project: None	Barometric Pres.: 1030 mbar		
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08	
TEST SPECIFICATIONS			
FCC 15.247:2019	Test Method		
	ANSI C63.10:2013		
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	 Dustin Sparks	
		Value (dBc)	Limit ≤ (dBc)
Geo, Low Channel (2405 MHz)		-40.13	-20
Geo, High Channel (2475 MHz)		-49.36	-20
		Pass	Pass

BAND EDGE COMPLIANCE




TbtTx 2019.08.30.0

XMit 2019.09.05

Geo, Low Channel (2405 MHz)						
	Value (dBc)	Limit ≤ (dBc)	Result			
	-40.13	-20	Pass			



Geo, High Channel (2475 MHz)						
		Value (dBc)		Limit ≤ (dBc)	Result	
		-49.36		-20	Pass	

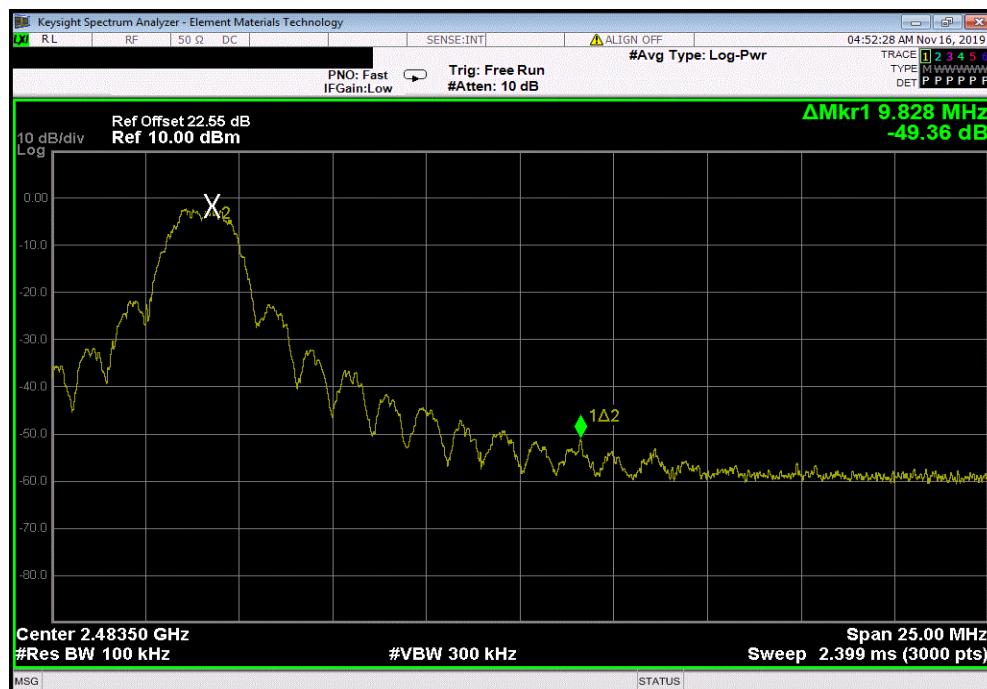

OCCUPIED BANDWIDTH



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TbTx 2019.08.30.0

XMI 2019.08.05

EUT:	GEO20		Work Order:	EMPM0080	
Serial Number:	2400F		Date:	15-Nov-19	
Customer:	Emerson		Temperature:	23.1 °C	
Attendees:	None		Humidity:	24.3% RH	
Project:	None		Barometric Pres.:	1030 mbar	
Tested by:	Dustin Sparks		Power:	Battery	
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2019			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Dustin Sparks</i>	Value	Limit (>)
			1.547 MHz	500 kHz	Pass
			1.637 MHz	500 kHz	Pass
			1.722 MHz	500 kHz	Pass


Geo, Low Channel (2405 MHz)
Geo, Mid Channel (2440 MHz)
Geo, High Channel (2475 MHz)

OCCUPIED BANDWIDTH




TbtTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)			Value	Limit (>)	Result
			1.547 MHz	500 kHz	Pass

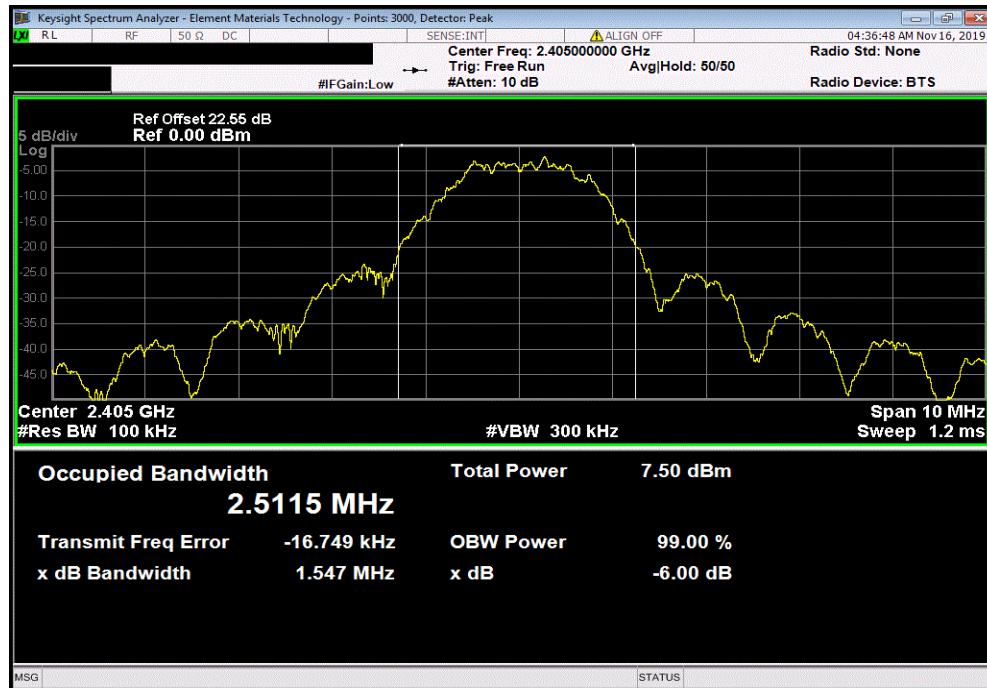


Geo, Mid Channel (2440 MHz)			Value	Limit (>)	Result
			1.637 MHz	500 kHz	Pass

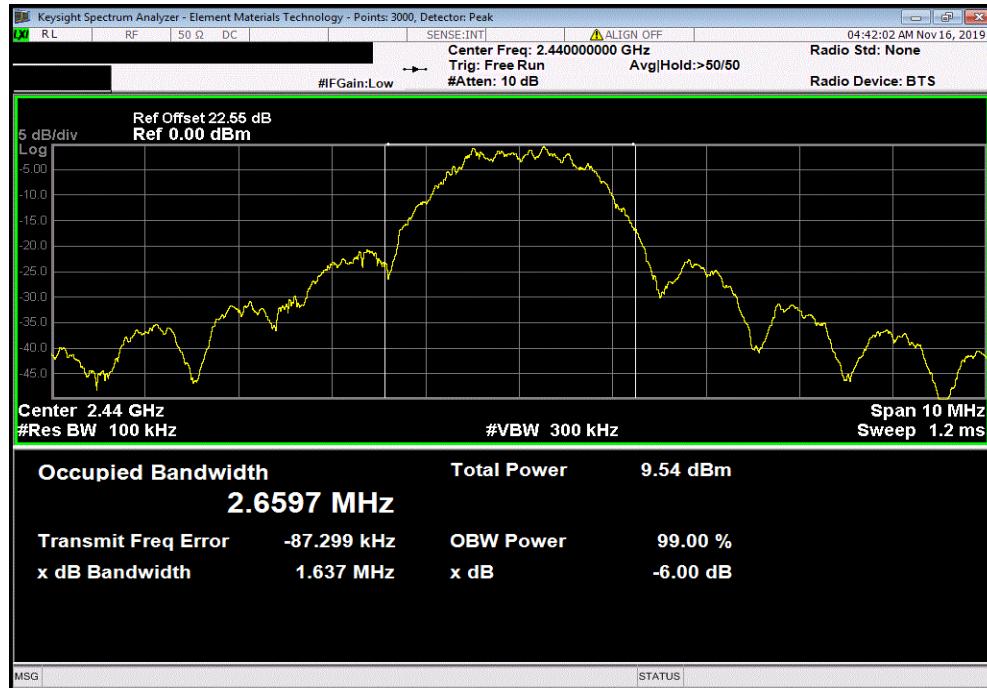

OCCUPIED BANDWIDTH



TbtTx 2019.08.30.0 XMI 2019.09.05

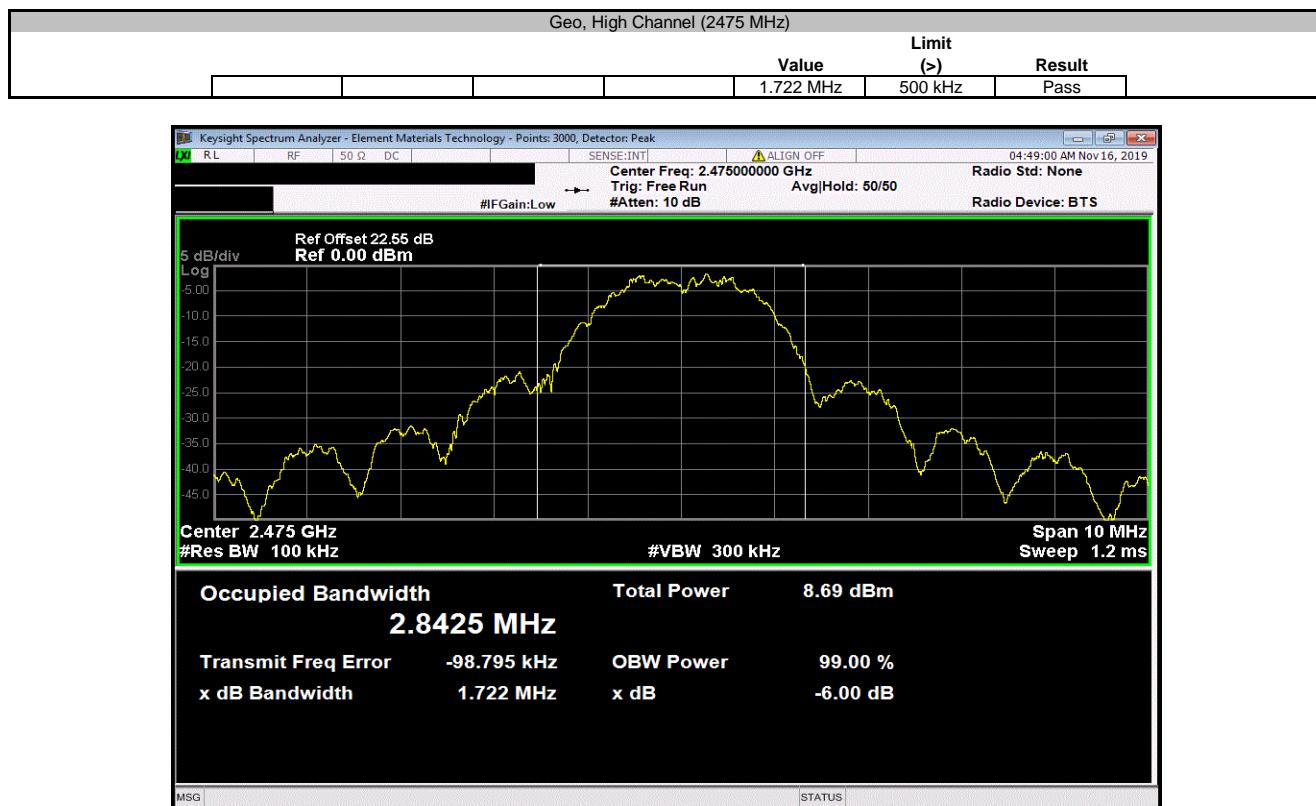

SPURIOUS CONDUCTED EMISSIONS



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS



TbTx 2019.08.30.0

XMI 2019.08.05


EUT:	GEO20		Work Order:	EMPM0080	
Serial Number:	2400F		Date:	15-Nov-19	
Customer:	Emerson		Temperature:	23.1 °C	
Attendees:	None		Humidity:	24.3% RH	
Project:	None		Barometric Pres.:	1030 mbar	
Tested by:	Dustin Sparks	Power:	Battery	Job Site:	MN08
TEST SPECIFICATIONS		Test Method			
FCC 15.247:2019		ANSI C63.10:2013			
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	Frequency Range	Measured Freq (MHz)	Max Value (dBc)
Geo, Low Channel (2405 MHz)		<i>Dustin Sparks</i>	Fundamental	2405.28	N/A
Geo, Low Channel (2405 MHz)			30 MHz - 12.5 GHz	3915.17	-50.34
Geo, Low Channel (2405 MHz)			12.5 GHz - 25 GHz	24026.37	-47.99
Geo, Mid Channel (2440 MHz)			Fundamental	2440.27	N/A
Geo, Mid Channel (2440 MHz)			30 MHz - 12.5 GHz	3775.11	-51.68
Geo, Mid Channel (2440 MHz)			12.5 GHz - 25 GHz	24552.86	-49.6
Geo, High Channel (2475 MHz)			Fundamental	2475.28	N/A
Geo, High Channel (2475 MHz)			30 MHz - 12.5 GHz	3866.45	-50.73
Geo, High Channel (2475 MHz)			12.5 GHz - 25 GHz	24153.03	-48.14

SPURIOUS CONDUCTED EMISSIONS




TbtTx 2019.08.30.0 XM1 2019.09.05

Geo, Low Channel (2405 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result	
Fundamental	2405.28	N/A	N/A	N/A	

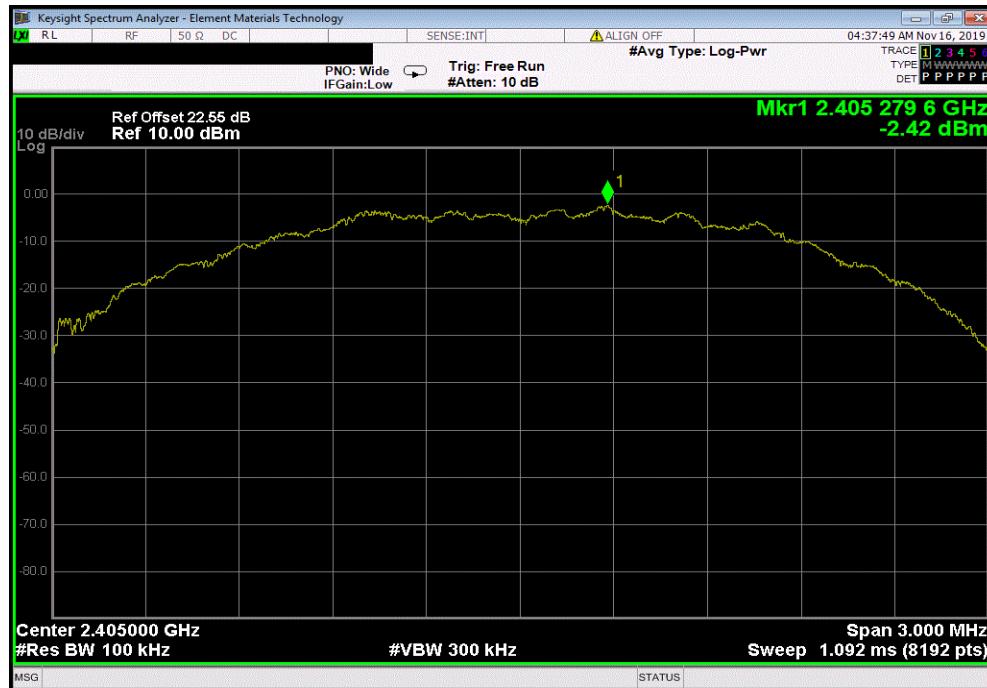

Geo, Low Channel (2405 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result	
30 MHz - 12.5 GHz	3915.17	-50.34	-20	Pass	

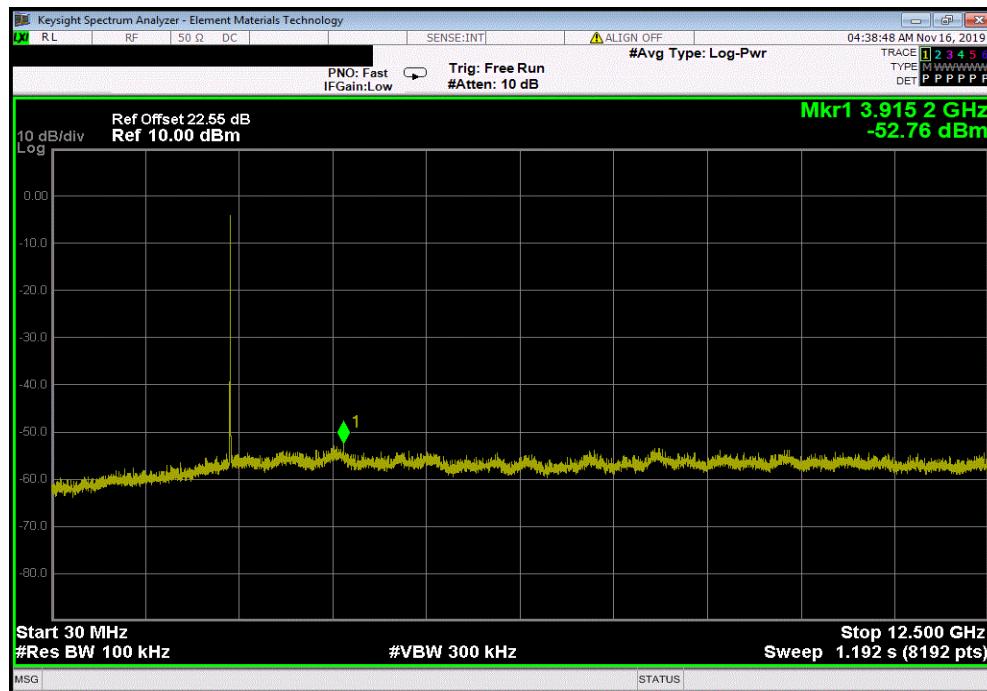


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24026.37	-47.99	-20	Pass	

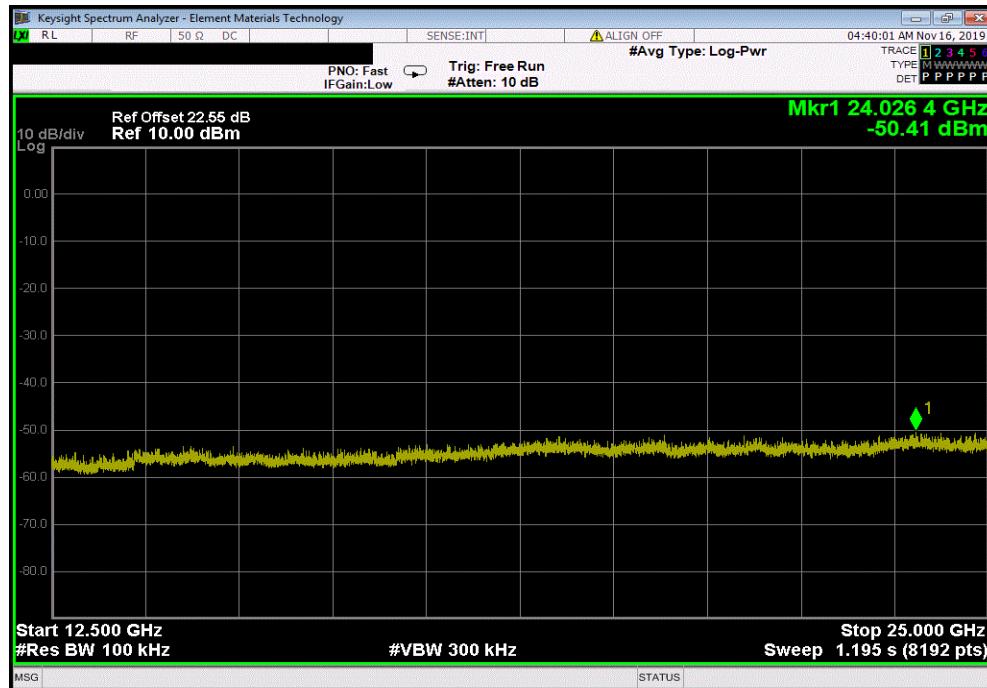

Geo, Mid Channel (2440 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2440.27	N/A	N/A	N/A	

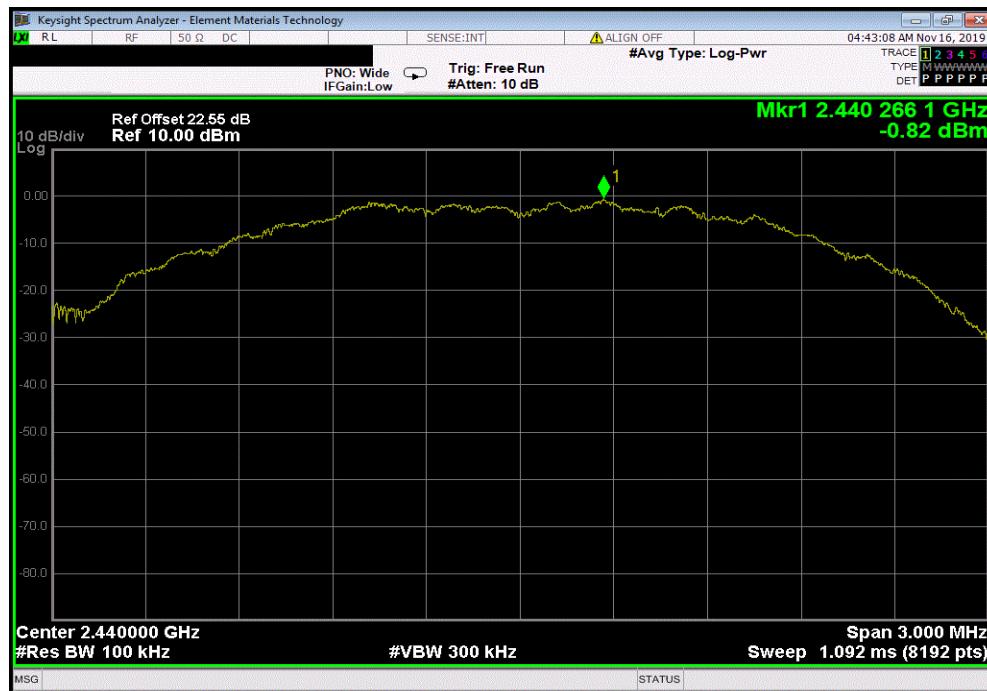


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2019.08.30.0 XM1 2019.09.05

Geo, Mid Channel (2440 MHz)				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result
30 MHz - 12.5 GHz	3775.11	-51.68	-20	Pass

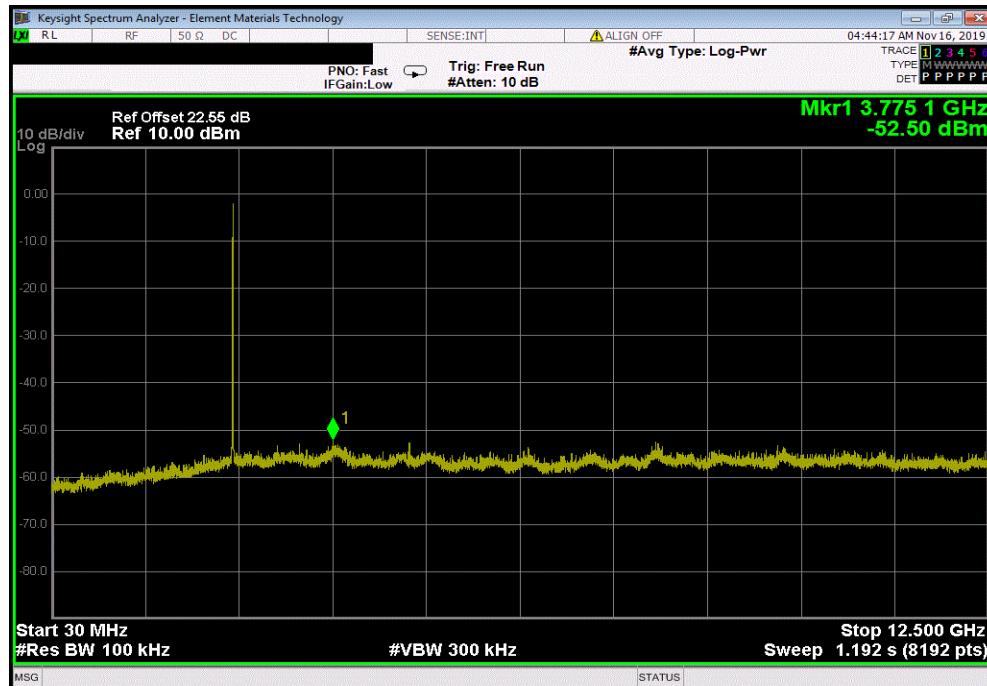

Geo, Mid Channel (2440 MHz)				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result
12.5 GHz - 25 GHz	24552.86	-49.6	-20	Pass

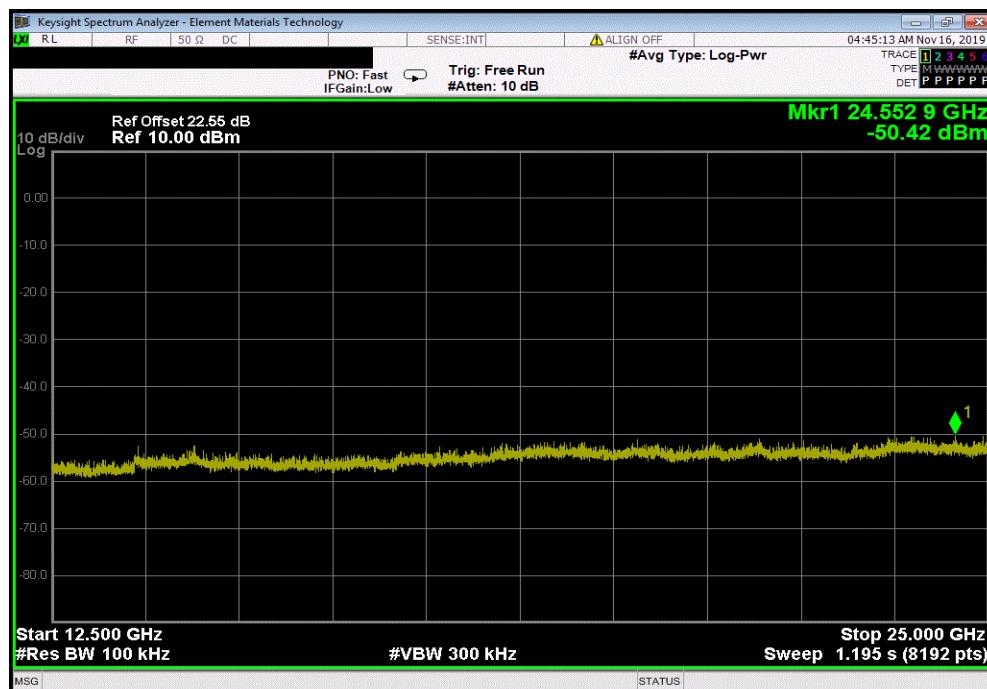

SPURIOUS CONDUCTED EMISSIONS




TbtTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result	
Fundamental	2475.28	N/A	N/A	N/A	



Geo, High Channel (2475 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result	
30 MHz - 12.5 GHz	3866.45	-50.73	-20	Pass	

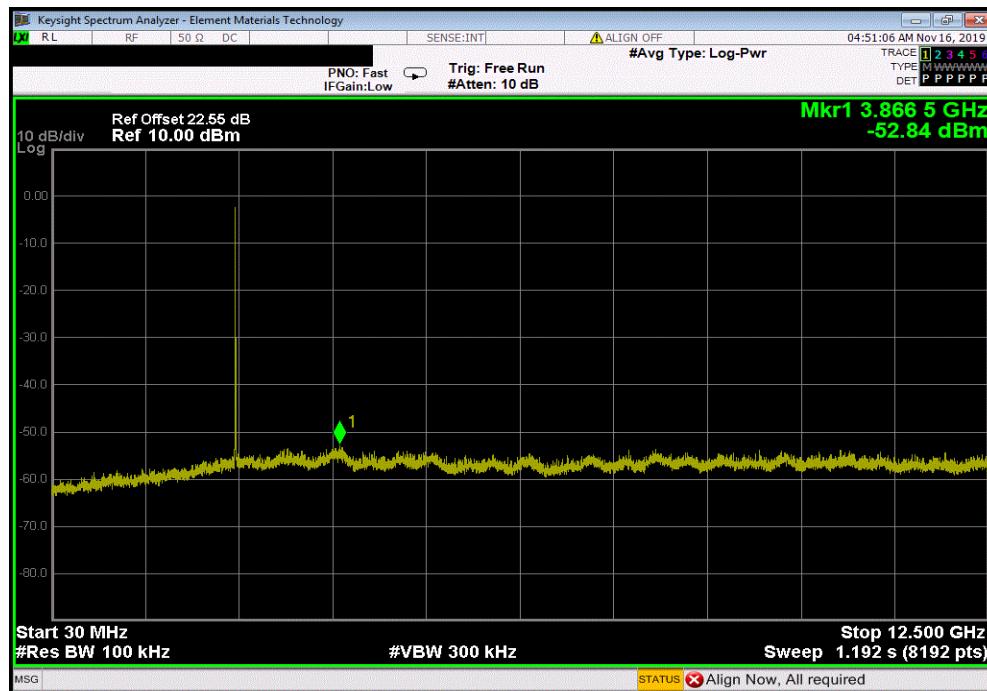


SPURIOUS CONDUCTED EMISSIONS



TbtTx 2019.08.30.0 XM1 2019.09.05

Geo, High Channel (2475 MHz)				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit \leq (dBc)	Result
12.5 GHz - 25 GHz	24153.03	-48.14	-20	Pass

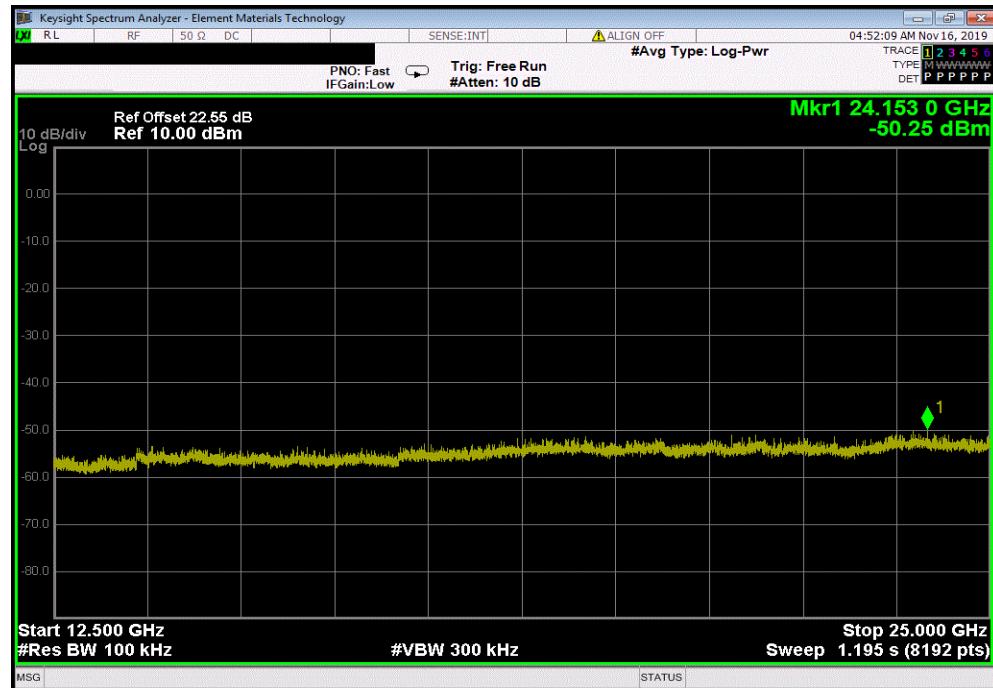

POWER SPECTRAL DENSITY



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TbTx 2019.08.30.0

XMI 2019.08.05

EUT:	GEO20		Work Order:	EMPM0080		
Serial Number:	2400F		Date:	15-Nov-19		
Customer:	Emerson		Temperature:	23.1 °C		
Attendees:	None		Humidity:	24.4% RH		
Project:	None		Barometric Pres.:	1030 mbar		
Tested by:	Dustin Sparks		Power:	Battery		
TEST SPECIFICATIONS			Test Method			
FCC 15.247:2019			ANSI C63.10:2013			
COMMENTS						
None						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature	<i>Dustin Sparks</i>	Value	Limit	
				dBm/3kHz	< dBm/3kHz	
				-11.026	8	Pass
				-9.062	8	Pass
				-10.059	8	Pass

Geo, Low Channel (2405 MHz)
Geo, Mid Channel (2440 MHz)
Geo, High Channel (2475 MHz)

POWER SPECTRAL DENSITY




TbtTx 2019.08.30.0

XMit 2019.09.05


Geo, Low Channel (2405 MHz)

Value	Limit	
dBm/3kHz	< dBm/3kHz	Results
-11.026	8	Pass

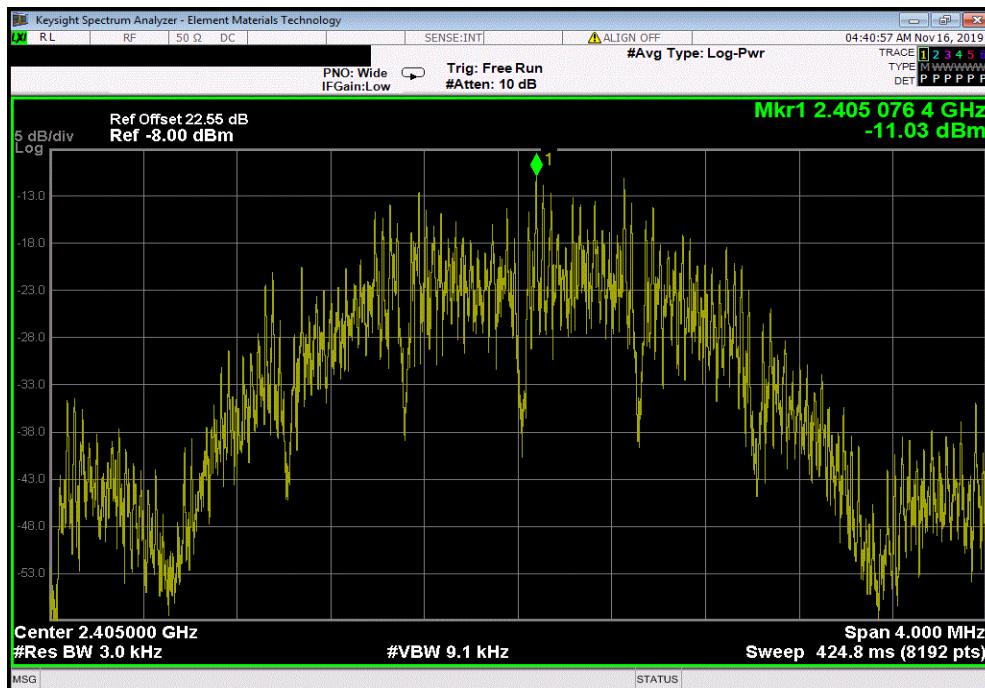

Geo, Mid Channel (2440 MHz)

Value	Limit	Results
dBm/3kHz	< dBm/3kHz	

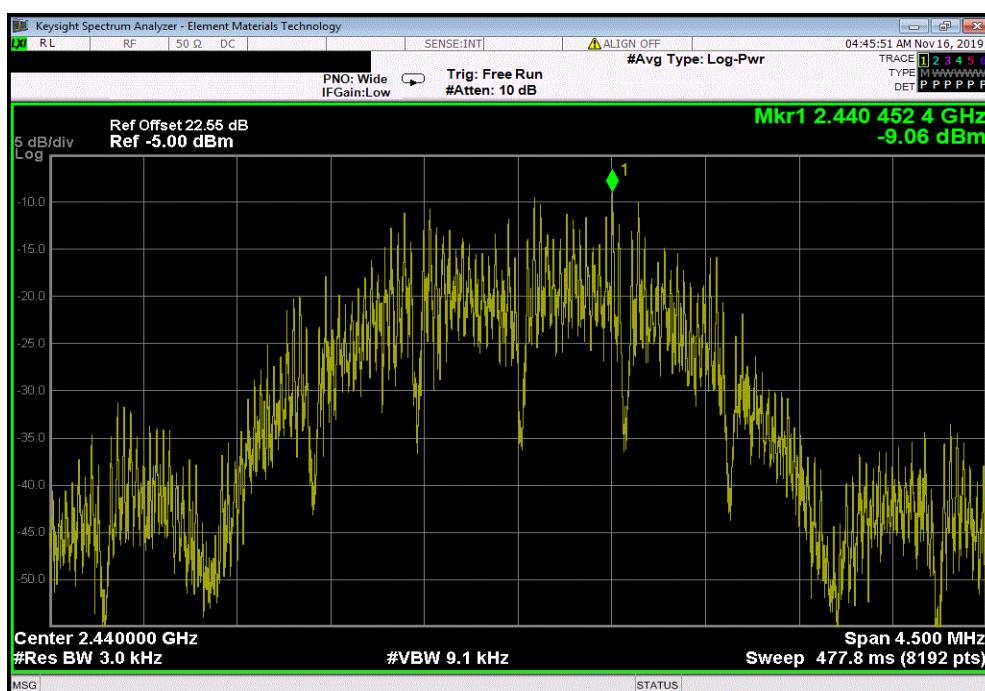

POWER SPECTRAL DENSITY



TbtTx 2019.08.30.0 XMII 2019.09.05

Geo, High Channel (2475 MHz)			Value	Limit	Results
	dBm/3kHz	< dBm/3kHz			
	-10.059	8	Pass		

