

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: Pretec SD BT Card

Brand Name: Pretec Electronics Corp.

Model Name: OS-BTSW-A

FCC ID: LXL-OS-BTSW-A

Report No.: ER/2005/30003

Issue Date: Mar. 18, 2005

FCC Rule Part: §15.247

Prepared for C-ONE Technology Corp.

B1, No. 57, Dong Guang Rd., Hsin-Chu
City 300, Taiwan, R.O.C.

Prepared by SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial
Zone, Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. | 台北市新北市五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

VERIFICATION OF COMPLIANCE

Applicant: C-ONE Technology Corp.
B1, No. 57, Dong Guang Rd., Hsin-Chu City 300, Taiwan, R.O.C.

Equipment Under Test: Pretec SD BT Card

Brand Name: Pretec Electronics Corp.

FCC ID Number: LXL-OS-BTSW-A

Model No.: OS-BTSW-A

Model Difference: N/A

File Number: ER/2005/30003

Date of test: Mar. 04, 2005 ~ Mar. 16, 2005

EUT Receive: Mar. 04, 2005

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Test By:



Date

Mar. 18, 2005

Alex Hsieh

Approved By



Date

Mar. 18, 2005

Vincent Su

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

Version

Version No.	Date
00	Mar. 18, 2005
01	Apr. 12, 2005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北縣五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

Table of Contents

1. GENERAL INFORMATION	7
1.1 Product Description	7
1.2 Related Submittal(s) / Grant (s)	7
1.3 Test Methodology	7
1.4 Test Facility.....	7
1.5 Special Accessories	7
1.6 Equipment Modifications.....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 Test Procedure.....	8
2.4 Configuration of Tested System.....	9
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	10
5. CONDUCTED EMISSION TEST (Not applicable in this report).....	11
5.1 Standard Applicable	11
5.2 EUT Setup.....	11
5.3 Measurement Procedure.....	11
5.4 Measurement Equipment Used:.....	12
5.5 Measurement Result.....	12
6. PEAK OUTPUT POWER MEASUREMENT.....	15
6.1 Standard Applicable	15
6.2 Measurement Procedure.....	15
6.3 Measurement Result.....	15
6.4 Measurement Equipment Used:.....	15
7. 20dB BAND WIDTH	18
7.1 Standard Applicable	18
7.2 Measurement Procedure.....	18
7.3 Measurement Result.....	18
7.4 Measurement Equipment Used:.....	18

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT.....	21
8.1 Standard Applicable	21
8.2 Measurement Procedure.....	21
8.3 Measurement Result.....	21
8.4 Measurement Equipment Used:	21
9. SPURIOUS RADIATED EMISSION TEST.....	25
9.1 Standard Applicable	25
9.2 EUT Setup.....	25
9.3 Measurement Procedure.....	25
9.4 Test SET-UP (Block Diagram of Configuration)	26
9.5 Measurement Equipment Used:	27
9.6 Field Strength Calculation	27
9.7 Measurement Result.....	27
10. FREQUENCY SEPARATION.....	40
10.1 Standard Applicable	40
10.2 Measurement Procedure.....	40
10.3 Measurement Result.....	40
10.4 Measurement Equipment Used:	40
11. NUMBER OF HOPPING FREQUENCY	42
11.1. Standard Applicable	42
11.2. Measurement Procedure.....	42
11.3. Measurement Result.....	42
11.4. Measurement Equipment Used:	42
12. TIME OF OCCUPANCY (DWELL TIME)	44
12.1. Standard Applicable	44
12.2. Measurement Procedure.....	44
12.3. Measurement Result.....	44
12.4. Measurement Equipment Used:	45
13. Peak Power Spectral Density	50
13.1 Standard Applicable	50
13.2 Measurement Procedure.....	50
13.3 Measurement Result.....	50
13.4 Measurement Equipment Used:	50

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

14. ANTENNA REQUIREMENT	53
14.1 Standard Applicable	53
14.2 Antenna Connected Construction	53
15. RF EXPOSURE	54
15.1 Standard Applicable	54
15.1. Measurement Result:	54
PHOTOGRPHS OF SET UP.....	55
PHOTOGRPHS OF EUT.....	57

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北縣五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

1. GENERAL INFORMATION

1.1 Product Description

The C-ONE Technology Corp., Model: OS-BTSW-A (referred to as the EUT in this report) is Pretec SD BT Card.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402 – 2480MHz, 79 channels
- B). Rated output power: -5 dBm
- C). Modulation type: Frequency Hopping Spread Spectrum (GFSK)
- D). Antenna Designation: Micro-strip Antenna, 0dBi, Non-User Replaceable (Fixed)
- E). Power Supply: 3.3V dc.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **LXL-OS-BTSW-A** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a Doc procedure.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 & 10 meters) Registration Number: 94644, Anechoic chamber (3 meters) Registration Number: 573967

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 & 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 & 13 of ANSI C63.4-2003.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

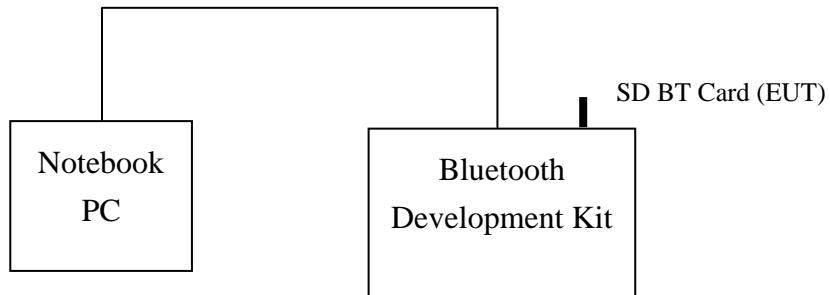


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	FCC ID	Series No.
1.	BT Development Kit	I.T.E.	MU03-7050020-A1	N/A	N/A
2.	Notebook PC	Notebook	Toshiiba	PSA10L-3V1JDP	Z3062680P

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	Compliant
§15.247(c)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203, §15.247(b)(4)(i)	Antenna Requirement	Compliant
§1.1310	RF Exposure	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz)、mid (2441MHz) and high (2480MHz) with 741k highest data rate are chosen for full testing with DC/DC power adaptor, which was the worse condition.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. CONDUCTED EMISSION TEST (Not applicable in this report)

5.1 Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The EUT was plug-in the AC/DC power adaptor. The EUT was placed on the center of the back edge on the test table. The rear of the EUT was placed flushed with the rear of the tabletop.
3. The spacing between the peripherals was 10 centimeters.
4. External I/O cables were draped along the edge of the test table and bundle when necessary.

5.3 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMC Analyzer	HP	8594EM	3624A00203	12/31/2004	12/30/2005
EMI Test Receiver	R&S	ESCS30	828985/004	01/15/2005	01/14/2006
LISN	Rolf-Heine	NNB-2/16Z	99012	12/30/2004	12/29/2005
LISN	Rolf-Heine	NNB-2/16Z	99013	11/06/2004	11/05/2005

5.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Normal Operating			Test Date :	Mar. 11, 2005	
Temperature:	25	Humidity:		62%	Test By:	Sky



FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.20	51.74	48.76	63.61	53.61	-11.87	-4.85	L1
0.31	46.33	---	59.97	49.97	-13.64	---	L1
0.41	42.59	---	57.65	47.65	-15.06	---	L1
0.46	46.93	43.62	56.69	46.69	-9.76	-3.07	L1
0.52	40.27	---	56.00	46.00	-15.73	---	L1
0.62	38.01	---	56.00	46.00	-17.99	---	L1
0.20	50.79	---	63.61	53.61	-12.82	---	L2
0.31	46.66	---	59.97	49.97	-13.31	---	L2
0.42	42.38	---	57.45	47.45	-15.07	---	L2
0.47	47.21	42.07	56.51	46.51	-9.30	-4.44	L2
0.51	39.80	---	56.00	46.00	-16.20	---	L2
0.62	37.76	---	56.00	46.00	-18.24	---	L2

Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz.
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

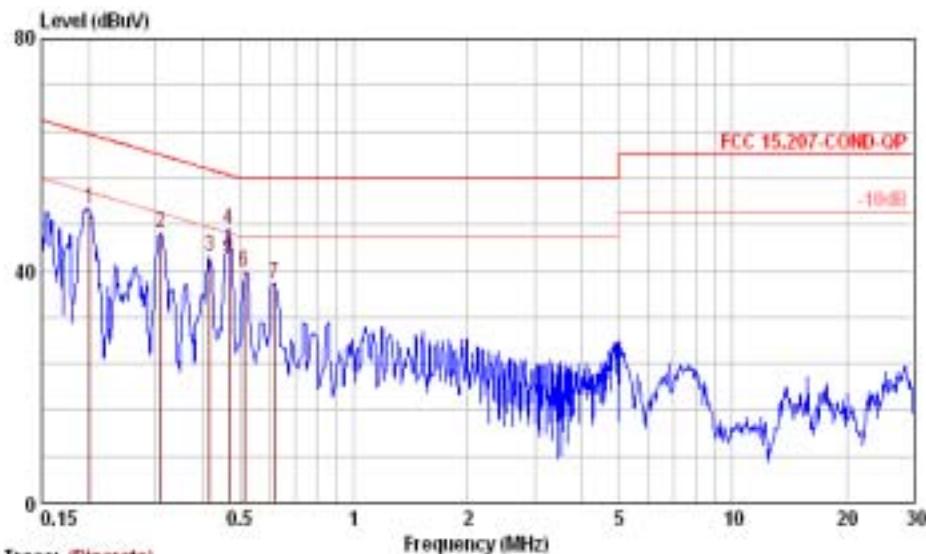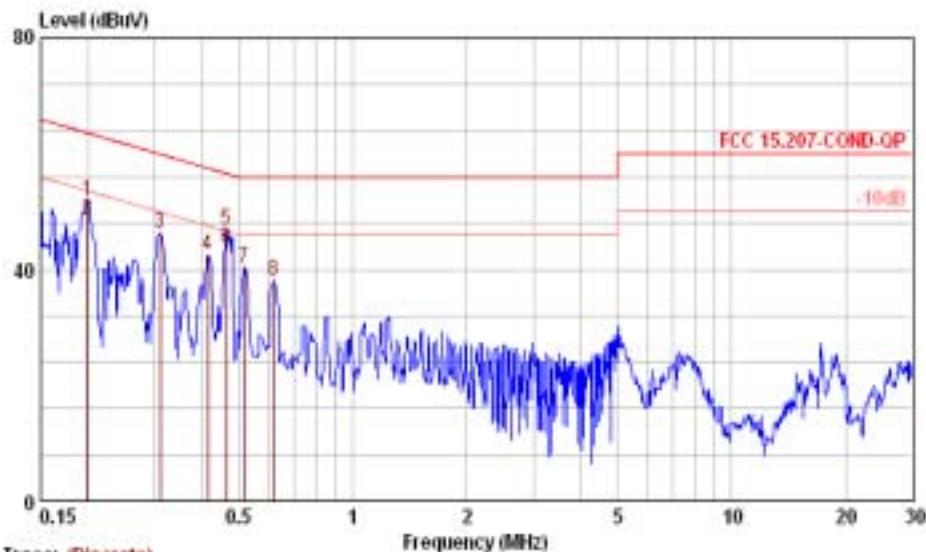Conducted Emission Test Plot



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable

For frequency hopping systems operating in the band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

6.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.3 Measurement Result


CH	Frequency (MHz)	Reading Power dBm	Cable Loss	Output Power dBm	Output Power W	Limit (W)
LOW	2402.00	-5.04	0.10	-4.94	0.00032	1
MID	2441.00	-4.87	0.10	-4.77	0.00033	1
HIGH	2480.00	-5.02	0.10	-4.92	0.00032	1

6.4 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2004	10/06/2005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

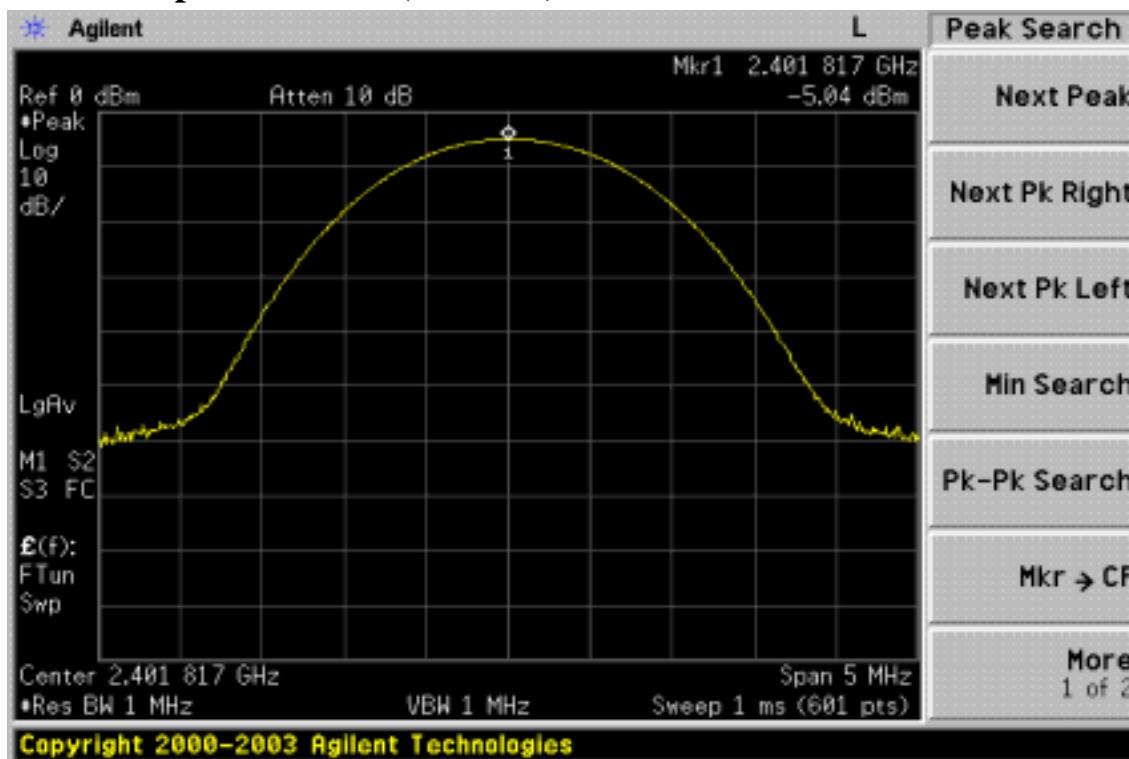Peak Power Output Data Plot (CH Low)




Peak Power Output Data Plot (CH Mid)

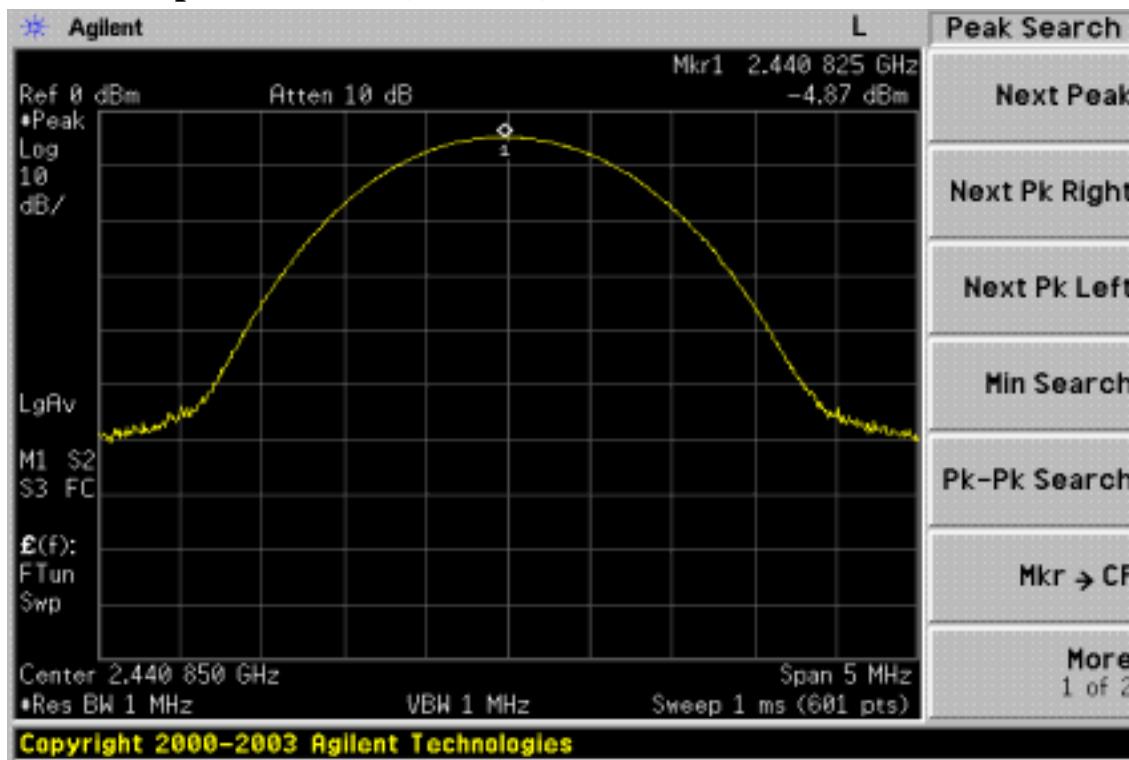

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

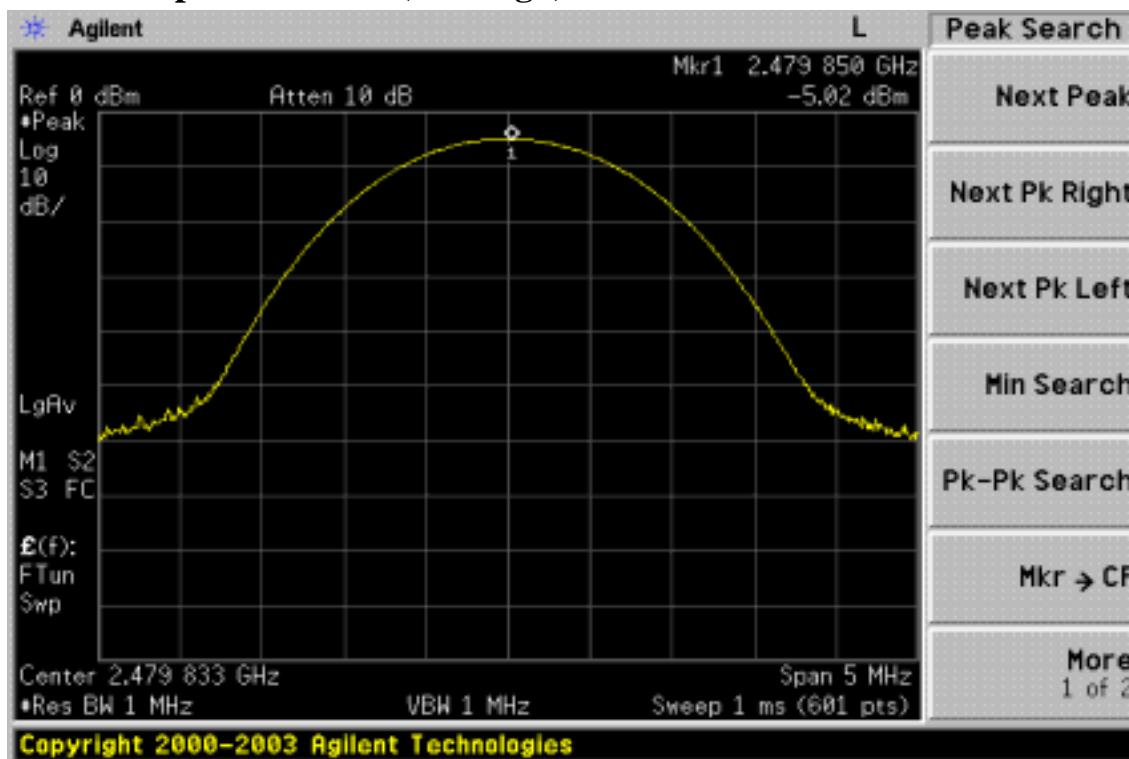Peak Power Output Data Plot (CH High)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

7. 20dB BAND WIDTH

7.1 Standard Applicable

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz and 5725MHz – 5850MHz bands. The Maximum 20dB bandwidth of the hopping channel is 1MHz.

7.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
4. Mark the peak frequency and –20dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.



7.3 Measurement Result

CH	Bandwidth (MHz)
Lower	0.925
Mid	0.920
Higher	0.925


7.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	05/27/2004	05/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2004	10/06/2005

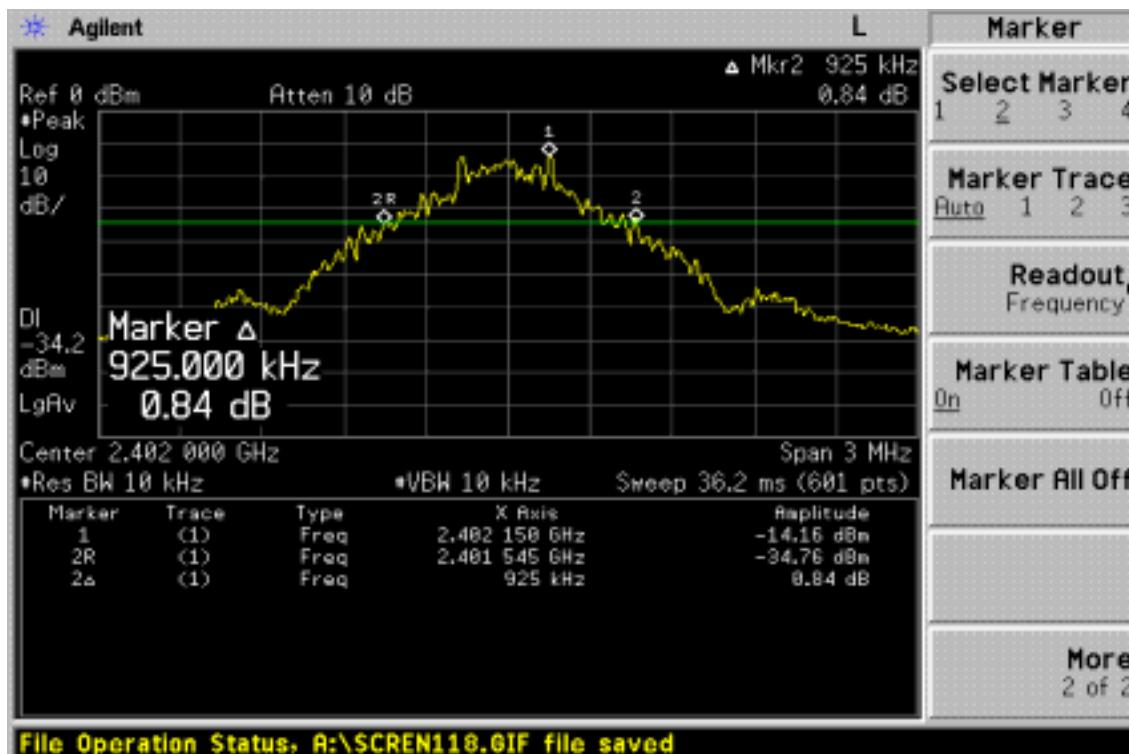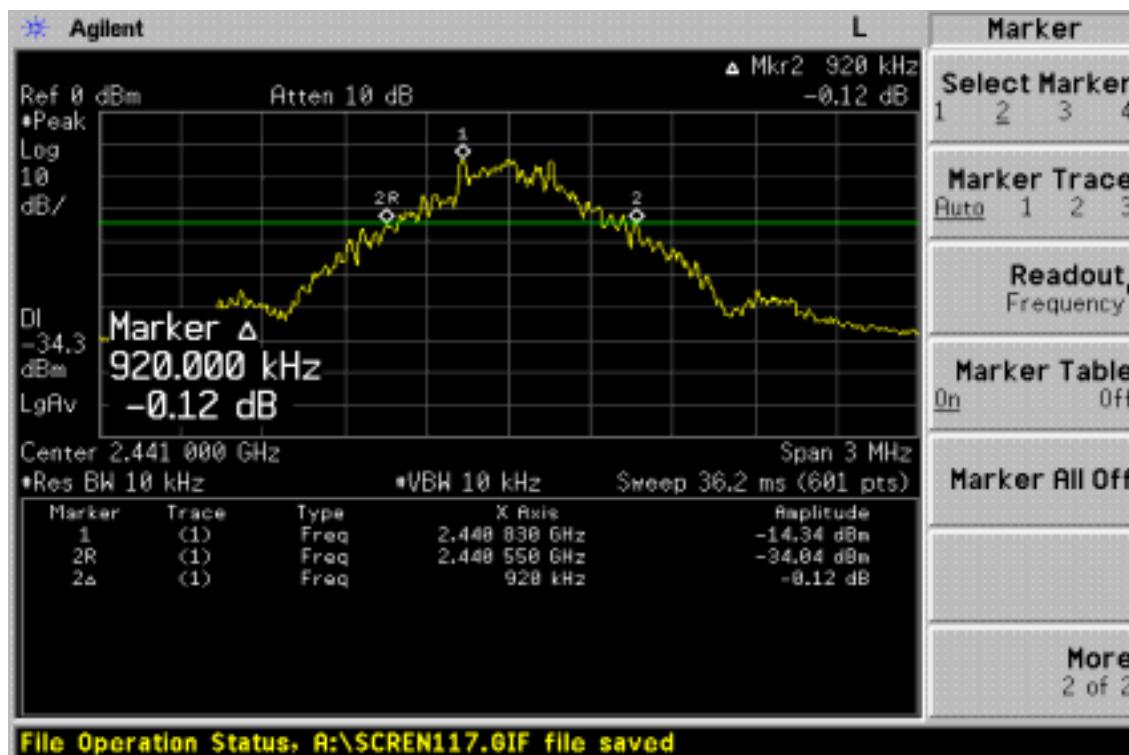The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

20dB Band Width Test Data CH-Low**20dB Band Width Test Data CH-Mid**

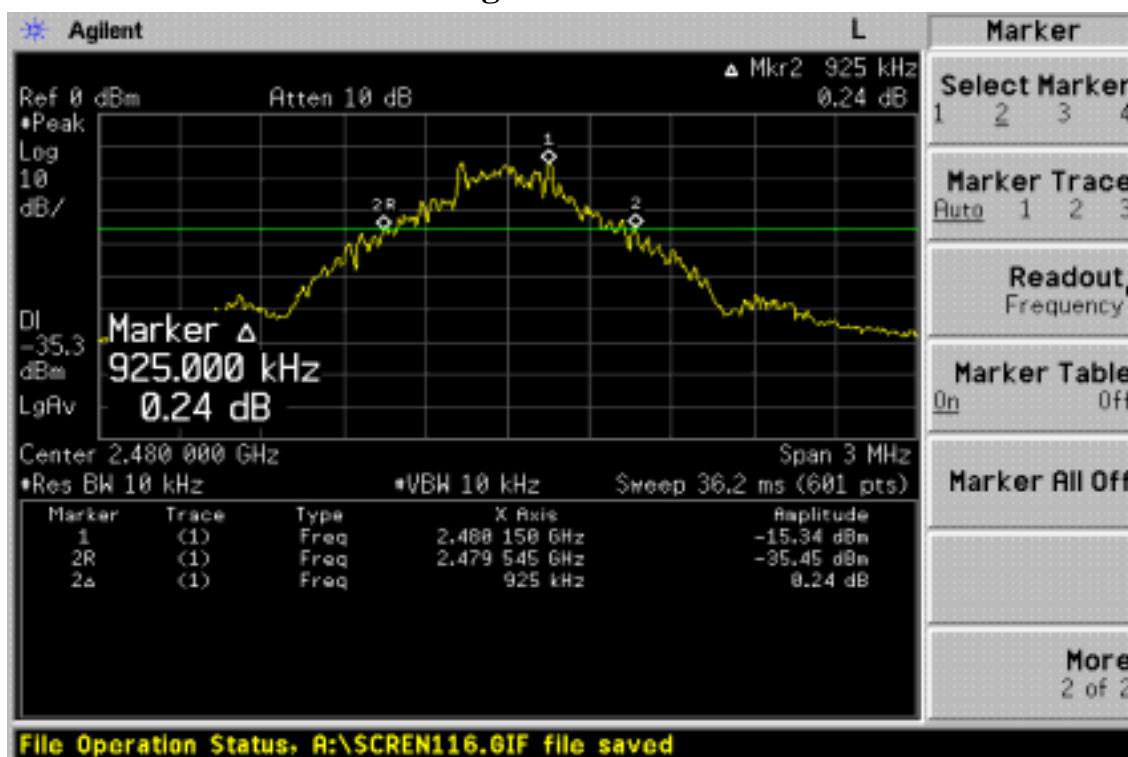The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

20dB Band Width Test Data CH-High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25 MHz / 70 MHz, Sweep = auto
5. Mark Peak, 2.402GHz and 2.480GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.
7. Radiated Emission refer to section 9.

8.3 Measurement Result



Refer to attach spectrum analyzer data chart.

8.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	05/27/2004	05/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2004	10/06/2005

Note: Measurement Equipment for radiated emission refer to section 9.

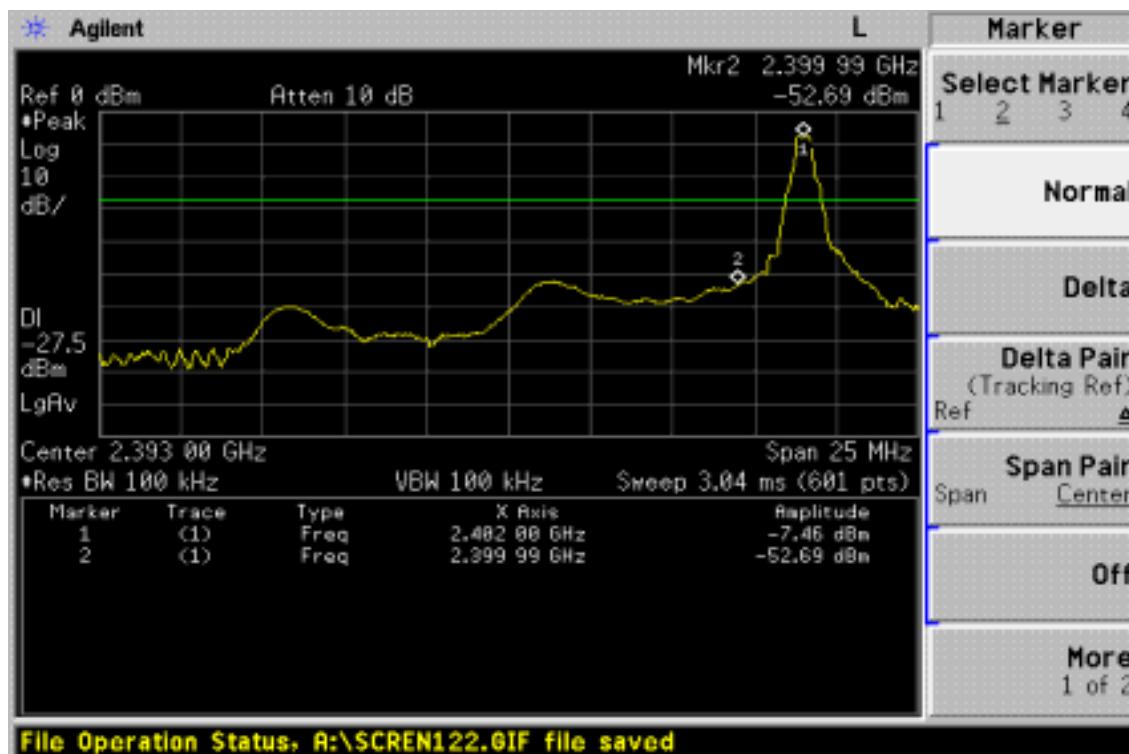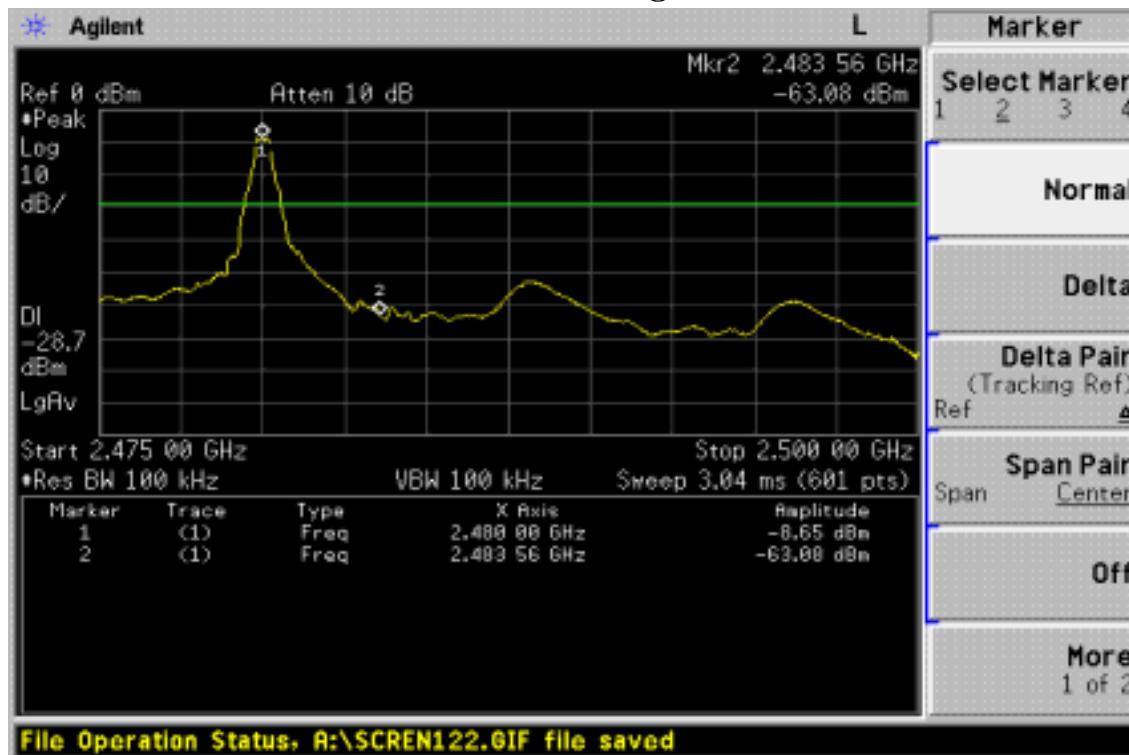The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission: Test Data CH-Low**Conducted Emission: Test Data CH-High**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市錦5股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

Radiated Emission:

Operation Mode TX CH Low
 Fundamental Frequency 2402 MHz
 Temperature 25
 Humidity 65 %

Test Date Mar. 10, 2005
 Test By Alex
 Pol Ver.

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin (dB)	Remark	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)			
2399.99	---	---	---	---	---	74.00	54.00	---	Peak

Operation Mode TX CH Low
 Fundamental Frequency 2402 MHz
 Temperature 25
 Humidity 65 %

Test Date Mar. 10, 2005
 Test By Alex
 Pol Hor.

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin (dB)	Remark	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)			
2399.99	---	---	---	---	---	74.00	54.00	---	Peak

Remark :

- (1) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Emission:

Operation Mode TX CH High
 Fundamental Frequency 2480 MHz
 Temperature 25
 Humidity 65 %

Test Date Mar. 10, 2005
 Test By Alex
 Pol Ver.

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin (dB)	Remark	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)			
2483.56	---	---	---	---	---	74.00	54.00	---	Peak

Operation Mode TX CH High
 Fundamental Frequency 2480 MHz
 Temperature 25
 Humidity 65 %

Test Date Mar. 10, 2005
 Test By Alex
 Pol Hor.

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin (dB)	Remark	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)			
2483.56	---	---	---	---	---	74.00	54.00	---	Peak

Remark :

- (1) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9. SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The EUT was plug-in the AC/DC power adaptor. The EUT was placed on the center of the back edge on the test table. The rear of the EUT was placed flushed with the rear of the tabletop.
3. The spacing between the peripherals was 10 centimeters.
4. External I/O cables were draped along the edge of the test table and bundle when necessary.

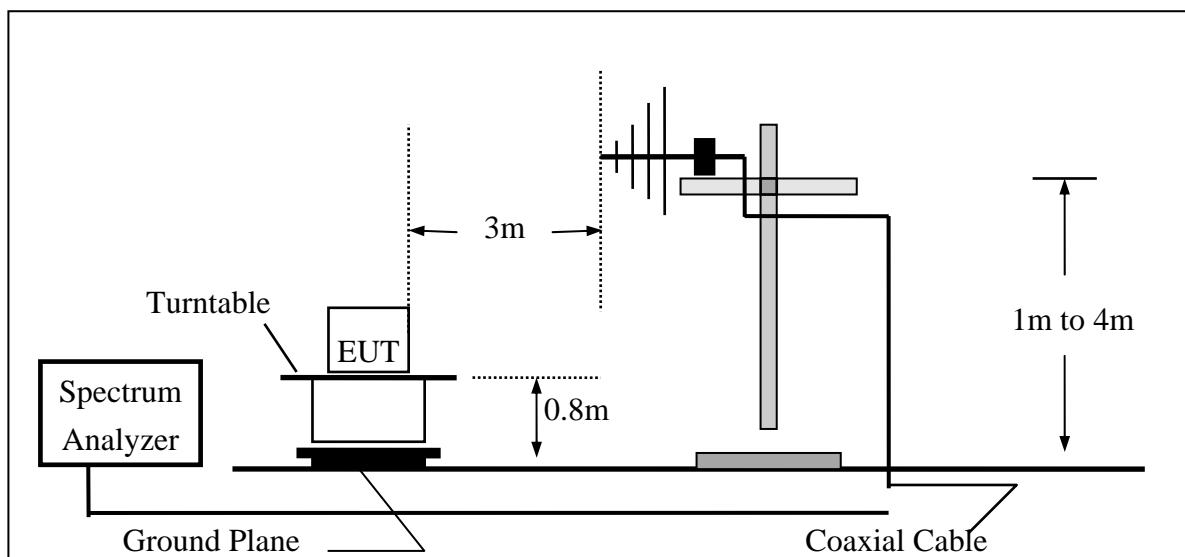
9.3 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9.4 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz



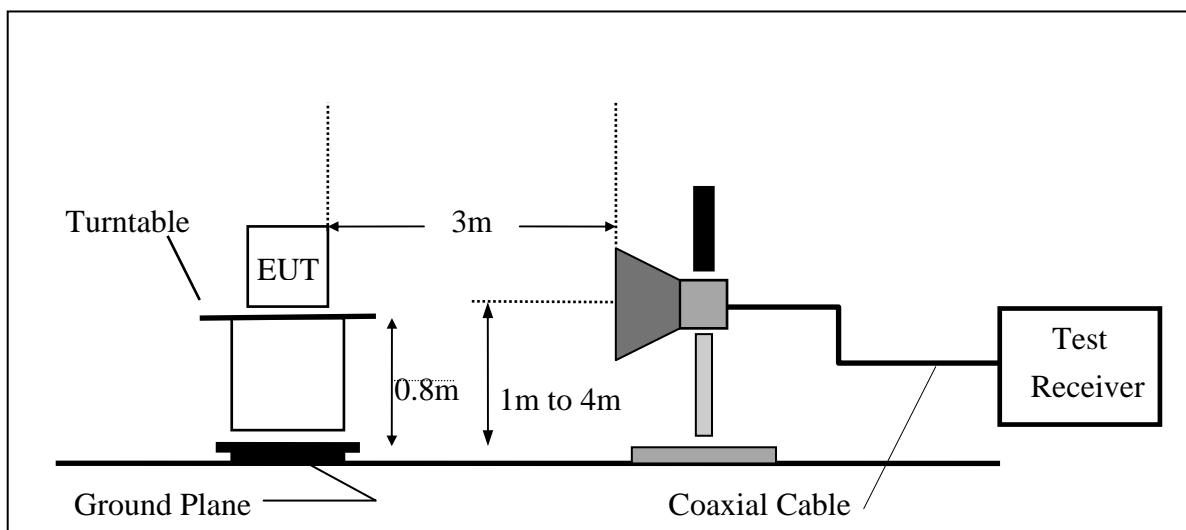(B) Radiated Emission Test Set-UP Frequency Over 1 GHz



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9.5 Measurement Equipment Used:

966 Chamber					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2004	08/27/2005
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2004	06/02/2005
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2004	08/15/2005
Horn antenna	Schwarzbeck	BBHA 9170	184/185	07/04/2004	07/03/2005
Pre-Amplifier	HP	8447D	2944A09469	07/19/2004	07/18/2005
Pre-Amplifier	HP	8494B	3008A00578	02/26/2005	02/25/2006
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2004	10/08/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2004	10/08/2005
Site NSA	SGS	966 chamber	N/A	11/17/2004	11/16/2005

9.6 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.7 Measurement Result


Refer to attach tabular data sheets.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


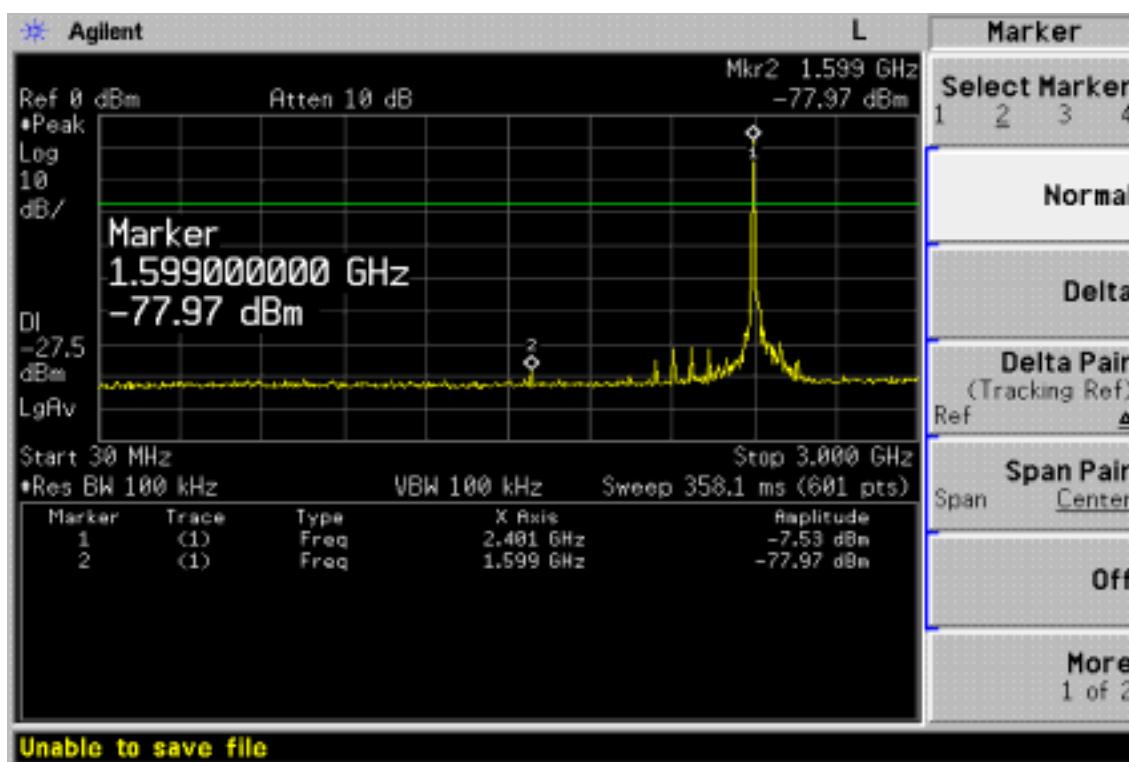
Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz





Ch Low 3GHz = 26.5GHz

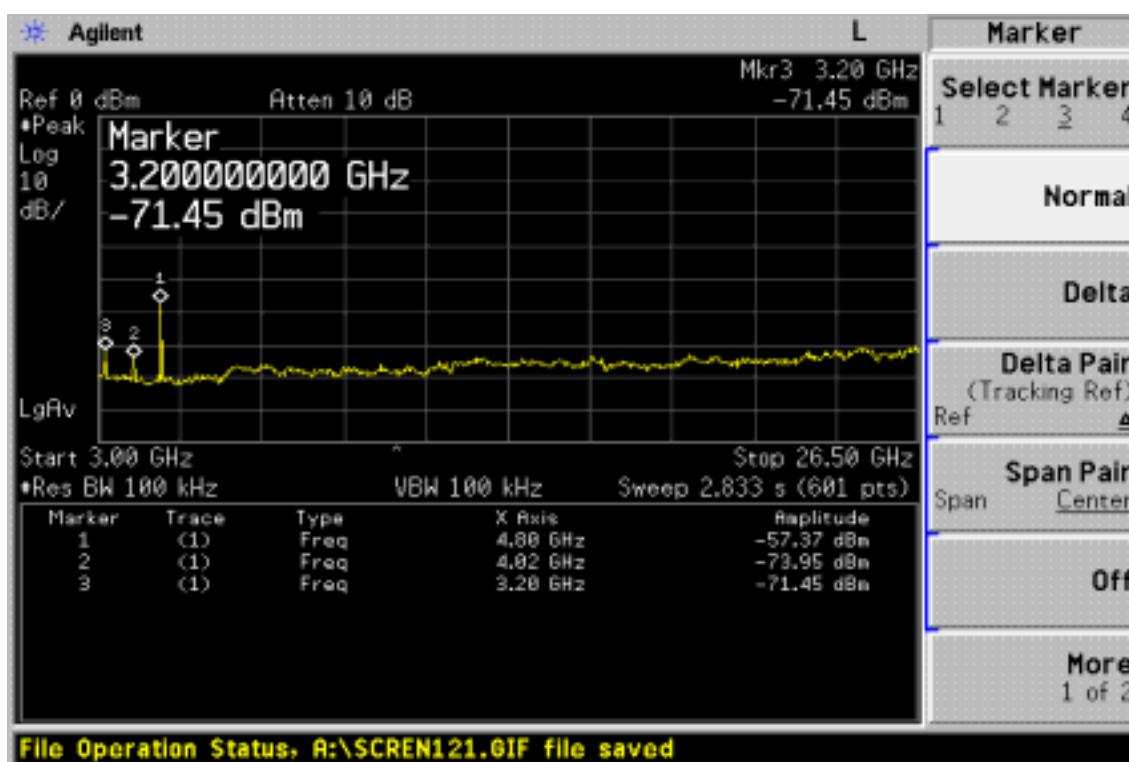

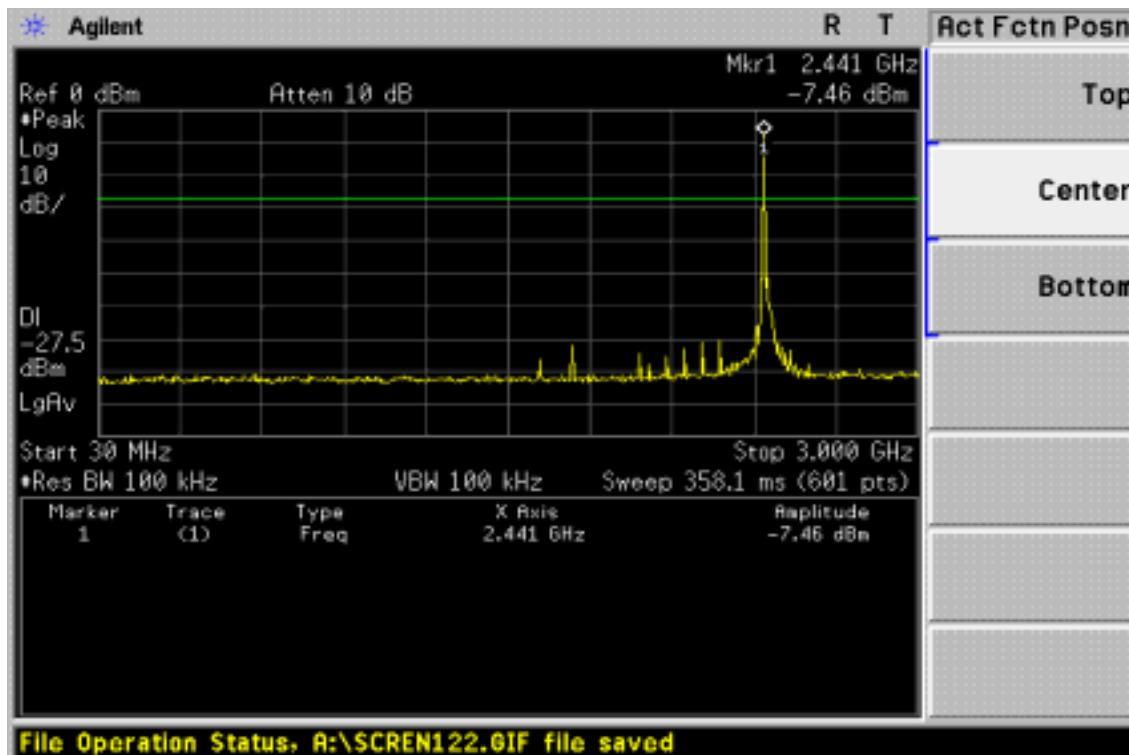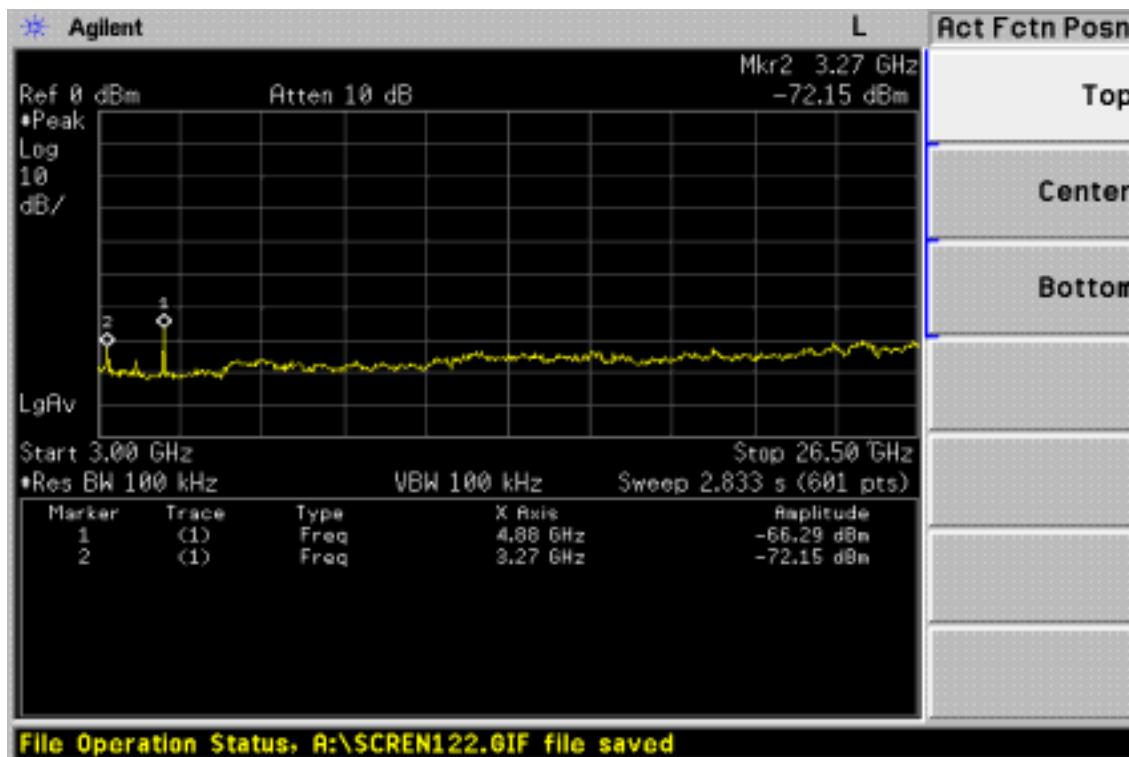The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Ch Mid 30MHz – 3GHz**Ch Mid 3GHz – 26.5GHz**

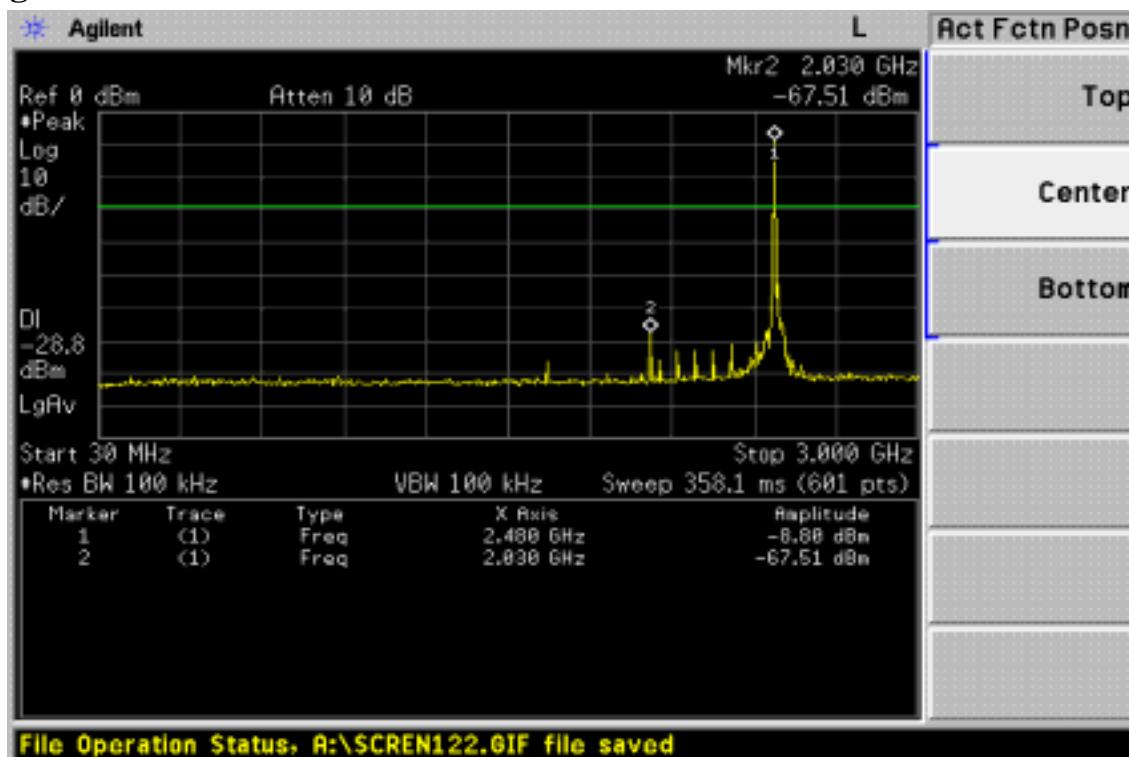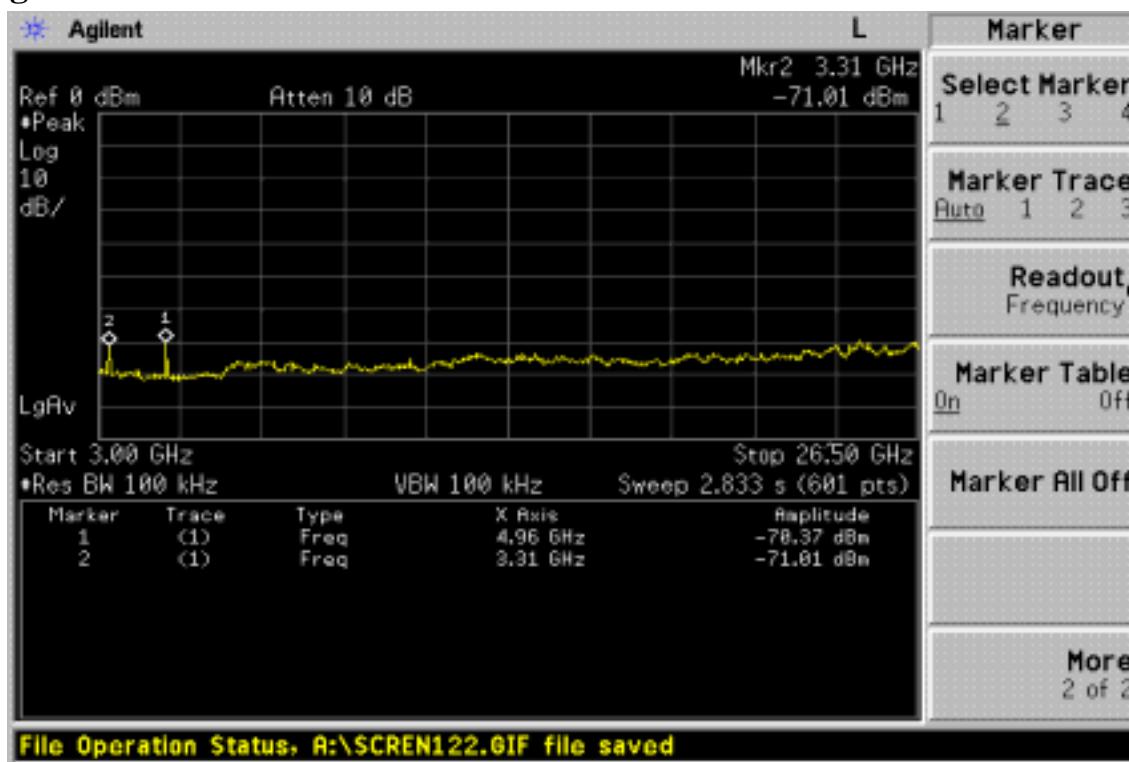The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Ch High 30MHz – 3GHz**Ch High 3GHz – 26.5GHz**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Low	Test Date	Mar. 10, 2005
Fundamental Frequency	2402MHz	Test By	Alex
Temperature	25	Pol	Ver./Hor.
Humidity	65 %		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
53.28	V	Peak	52.17	-14.91	37.26	40.0	-2.74
148.34	V	Peak	51.51	-13.43	38.08	43.5	-5.42
191.99	V	Peak	57.68	-16.08	41.60	43.5	-1.90
339.43	V	Peak	48.73	-12.25	36.48	46.0	-9.52
426.73	V	Peak	49.25	-10.12	39.13	46.0	-6.87
640.13	V	Peak	45.75	-6.73	39.02	46.0	-6.98
53.28	H	Peak	53.63	-14.91	38.72	40.0	-1.28
148.34	H	Peak	54.22	-13.43	40.79	43.5	-2.71
191.99	H	Peak	57.99	-16.08	41.91	43.5	-1.59
221.09	H	Peak	56.34	-16.09	40.25	46.0	-5.75
426.73	H	Peak	51.25	-10.12	41.13	46.0	-4.87
455.83	H	Peak	49.42	-9.73	39.69	46.0	-6.31

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	Mar. 10, 2005
Fundamental Frequency	2441MHz	Test By	Alex
Temperature	25	Pol	Ver./Hor.
Humidity	65 %		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
72.68	V	Peak	55.51	-17.04	38.47	40.00	-1.53
148.34	V	Peak	52.82	-13.43	39.39	43.50	-4.11
191.99	V	Peak	58.15	-16.08	42.07	43.50	-1.43
339.43	V	Peak	47.15	-12.25	34.9	46.00	-11.1
426.73	V	Peak	47.7	-10.12	37.58	46.00	-8.42
664.38	V	Peak	41.72	-6.18	35.54	46.00	-10.46
72.68	H	Peak	55.08	-17.04	38.04	40.00	-1.96
148.34	H	Peak	55.78	-13.43	42.35	43.50	-1.15
191.99	H	Peak	58.1	-16.08	42.02	43.50	-1.48
221.09	H	Peak	55.44	-16.09	39.35	46.00	-6.65
426.73	H	Peak	50.99	-10.12	40.87	46.00	-5.13
455.83	H	Peak	49.05	-9.73	39.32	46.00	-6.68

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH High	Test Date	Mar. 10, 2005
Fundamental Frequency	2480MHz	Test By	Alex
Temperature	25	Pol	Ver./Hor.
Humidity	65 %		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
72.68	V	Peak	55.16	-17.04	38.12	40.00	-1.88
148.34	V	Peak	53.7	-13.43	40.27	43.50	-3.23
191.99	V	Peak	58.64	-16.08	42.56	43.50	-0.94
221.09	V	Peak	51.92	-16.09	35.83	46.00	-10.17
339.43	V	Peak	49.13	-12.25	36.88	46.00	-9.12
426.73	V	Peak	48.8	-10.12	38.68	46.00	-7.32
72.68	H	Peak	55.54	-17.04	38.5	40.00	-1.5
148.34	H	Peak	54.94	-13.43	41.51	43.50	-1.99
191.99	H	Peak	58.22	-16.08	42.14	43.50	-1.36
221.09	H	Peak	55.49	-16.09	39.4	46.00	-6.6
426.73	H	Peak	51.21	-10.12	41.09	46.00	-4.91
455.83	H	Peak	49.34	-9.73	39.61	46.00	-6.39

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	Mar. 10, 2005
Fundamental Frequency	2402 MHz	Test By	Alex
Temperature	25	Pol	Ver.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	
1013.0	45.37	--	-9.38	35.99	--	74.00	54.00	-18.01
1091.0	44.25	--	-9.04	35.21	--	74.00	54.00	-18.79
1500.5	42.70	--	-7.17	35.53	--	74.00	54.00	-18.47
4804.0	----							
7206.0	----							
9608.0	----							
12010.0	----							
14412.0	----							
16814.0	----							
19216.0	----							
21618.0	----							
24020.0	----							

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	Mar. 10, 2005
Fundamental Frequency	2402 MHz	Test By	Alex
Temperature	25	Pol	Hor.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	AV		Margin (dB)
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
1351.0	46.03	--	-7.85	38.18	--	74.00	54.00	-15.82	
1500.5	47.69	--	-7.17	40.52	--	74.00	54.00	-13.48	
2586.0	42.82	--	-2.80	40.02	--	74.00	54.00	-13.98	
4804.0	----								
7206.0	----								
9608.0	----								
12010.0	----								
14412.0	----								
16814.0	----								
19216.0	----								
21618.0	----								
24020.0	----								

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	Mar. 10, 2005
Fundamental Frequency	2441 MHz	Test By	Alex
Temperature	25	Pol	Ver.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	
1091.0	43.89	--	-9.04	34.85	--	74.00	54.00	-19.15
4861.0	43.58	--	3.12	46.70	--	74.00	54.00	-7.30
4882.0	----							
7323.0	----							
9764.0	----							
12205.0	----							
14646.0	----							
17087.0	----							
19528.0	----							
21969.0	----							
24410.0	----							

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	Mar. 10, 2005
Fundamental Frequency	2441 MHz	Test By	Alex
Temperature	25	Pol	Hor.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	
1500.5	46.51	--	-7.17	39.34	--	74.00	54.00	-14.66
4861.0	41.42	--	3.12	44.54	--	74.00	54.00	-9.46
4882.0	----							
7323.0	----							
9764.0	----							
12205.0	----							
14646.0	----							
17087.0	----							
19528.0	----							
21969.0	----							
24410.0	----							

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	Mar. 10, 2005
Fundamental Frequency	2480 MHz	Test By	Alex
Temperature	25	Pol	Ver.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin	
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	(dB)
2033.5	40.97	--	-4.99	35.98	--	74.00	54.00	-18.02
4945.5	42.01	--	3.37	45.38	--	74.00	54.00	-8.62
4960.0	----							
7440.0	----							
9920.0	----							
12400.0	----							
14880.0	----							
17360.0	----							
19840.0	----							
22320.0	----							
24800.0	----							

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	Mar. 10, 2005
Fundamental Frequency	2480 MHz	Test By	Alex
Temperature	25	Pol	Hor.
Humidity	65 %		

Freq. (MHz)	Peak	AV	Actual FS		Peak	AV	Margin
	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dB)
1500.5	46.57	--	-7.17	39.40	--	74.00	54.00 -14.60
4945.5	38.29	--	3.37	41.66	--	74.00	54.00 -12.34
4960.0	----						
7440.0	----						
9920.0	----						
12400.0	----						
14880.0	----						
17360.0	----						
19840.0	----						
22320.0	----						
24800.0	----						

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10. FREQUENCY SEPARATION

10.1 Standard Applicable

According to §15.247(a), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

10.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel .
4. Set the spectrum analyzer as RBW,VBW=100KHz, Adjust Span to 5 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.3 Measurement Result


Channel separation	Limit	Result
MHz	kHz	
1.013	>=25KHz/ 20 dB bandwidth	PASS

10.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	05/27/2004	05/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2004	10/06/2005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

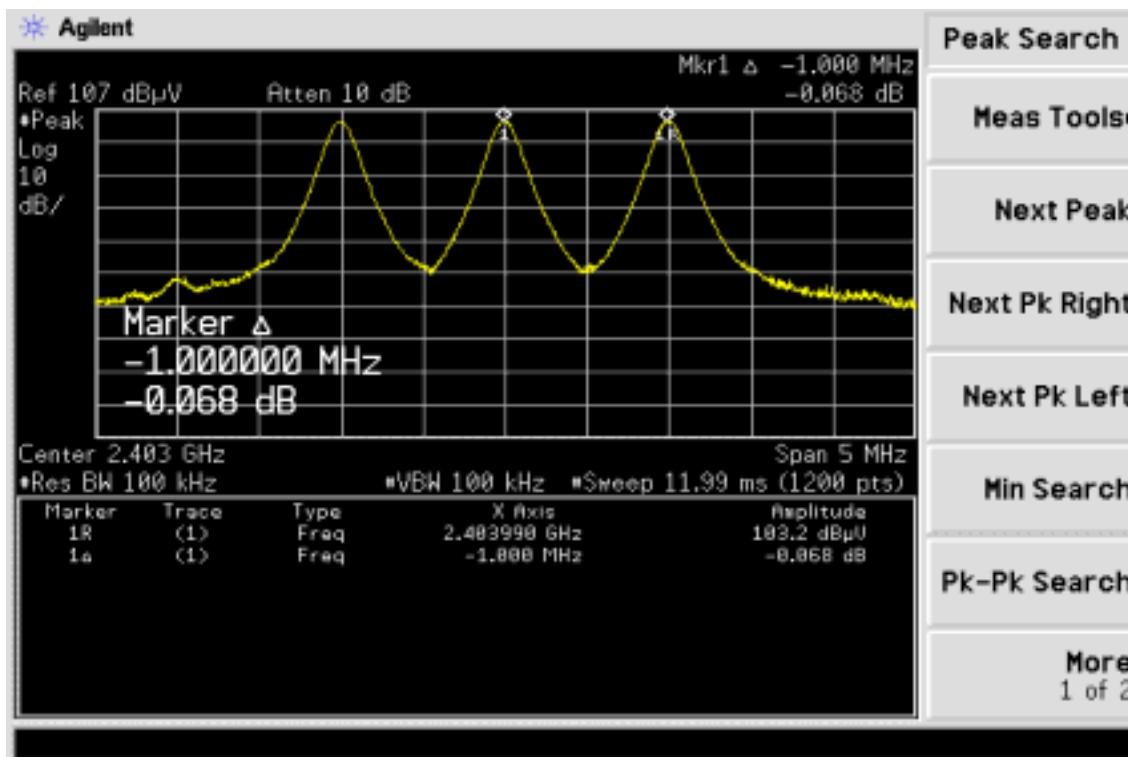Frequency Separation Test Data



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz and 5725MHz – 5850MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW,VBW=100KHz,
5. Max hold, view and count how many channel in the band.

Note: the calibration dates for the attenuator are out of date.



11.3. Measurement Result

Total No of hopping channel	Limit (CH)	Measurement result (CH)	Result
	15	79	Pass

11.4. Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2004	08/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2004	10/06/2005

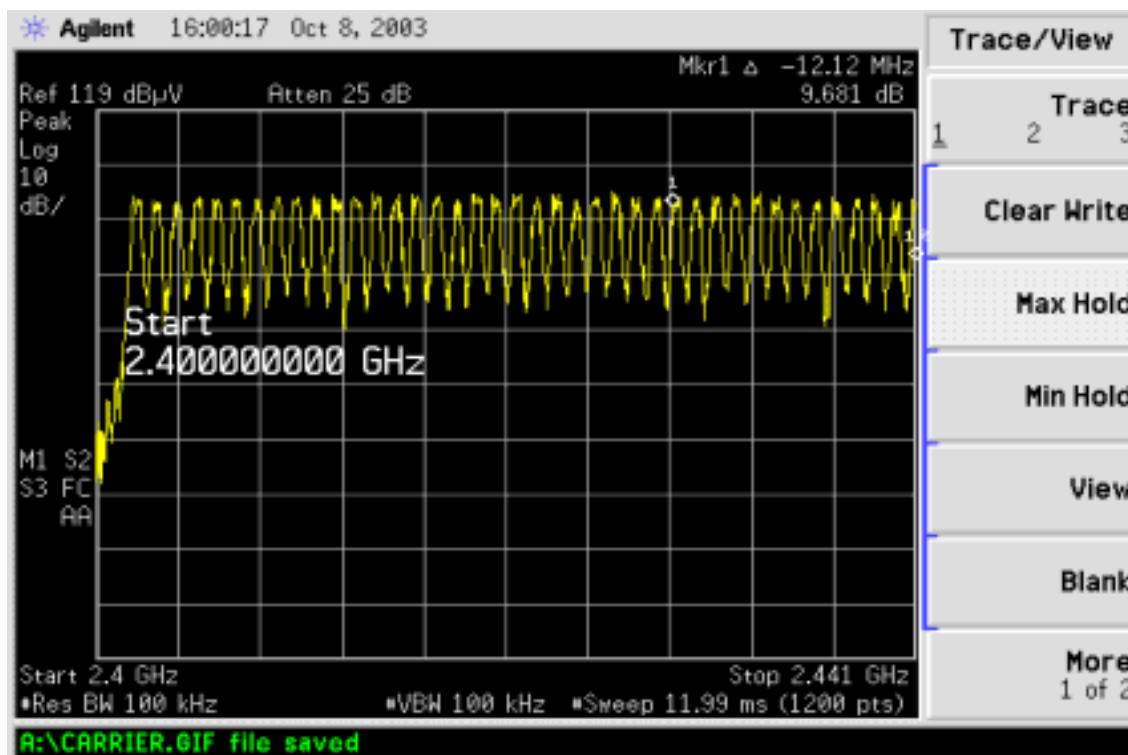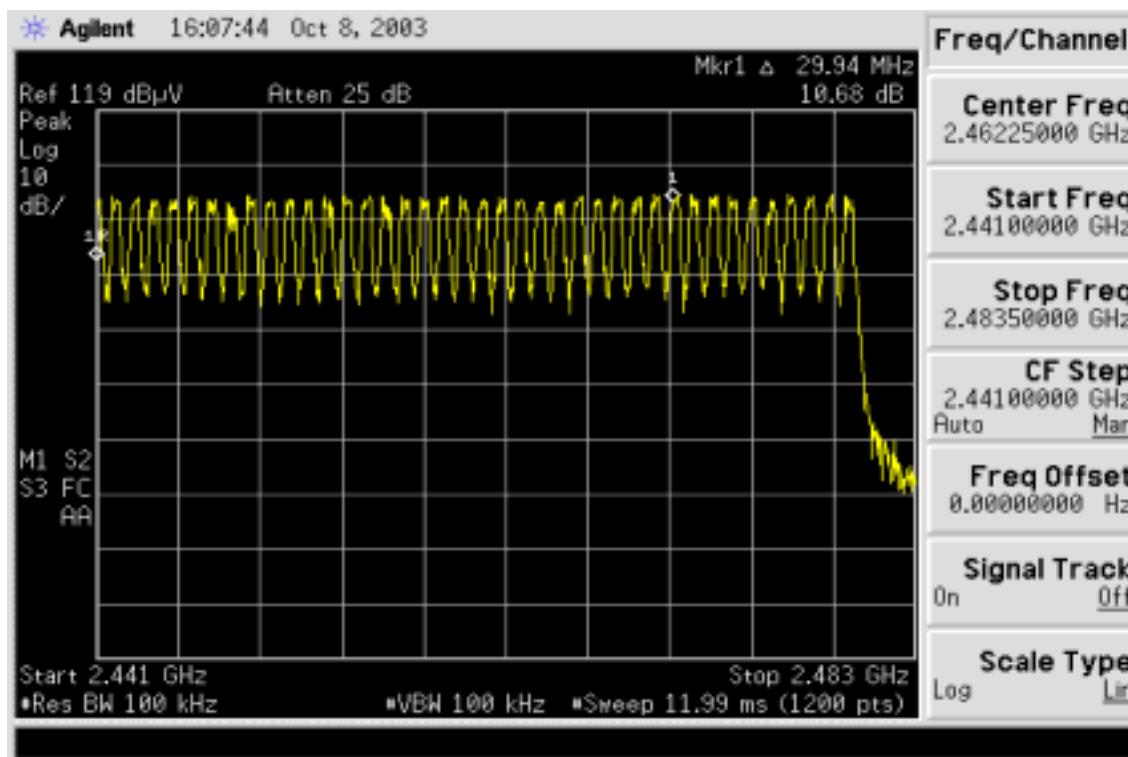The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Channel Number**2.4 GHz – 2.441GHz****2.441 GHz – 2.4835GHz****Note: the calibration dates for the attenuator are out of date.**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW,VBW=100KHz, Span = 0Hz , Adjust Sweep = 30s.
5. Repeat above procedures until all frequency measured were complete.

12.3. Measurement Result

A period time = $0.4 \text{ (ms)} * 79 = 31.6 \text{ (s)}$

CH Low: DH1 time slot = $0.405 \text{ (ms)} * (1600/(2*79)) * 31.6 = 129.6 \text{ (ms)}$
DH3 time slot = $1.675 \text{ (ms)} * (1600/(4*79)) * 31.6 = 268 \text{ (ms)}$
DH5 time slot = $2.925 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312 \text{ (ms)}$

CH Mid: DH1 time slot = $0.405 \text{ (ms)} * (1600/(2*79)) * 31.6 = 129.6 \text{ (ms)}$
DH3 time slot = $1.675 \text{ (ms)} * (1600/(4*79)) * 31.6 = 268 \text{ (ms)}$
DH5 time slot = $2.906 \text{ (ms)} * (1600/(6*79)) * 31.6 = 309.97 \text{ (ms)}$

CH High: DH1 time slot = $0.416 \text{ (ms)} * (1600/(2*79)) * 31.6 = 129.6 \text{ (ms)}$
DH3 time slot = $1.662 \text{ (ms)} * (1600/(4*79)) * 31.6 = 265.92 \text{ (ms)}$
DH5 time slot = $2.906 \text{ (ms)} * (1600/(6*79)) * 31.6 = 309.97 \text{ (ms)}$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


12.4. Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2004	08/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2004	10/06/2005



Dwell Time Test Data

CH-Low

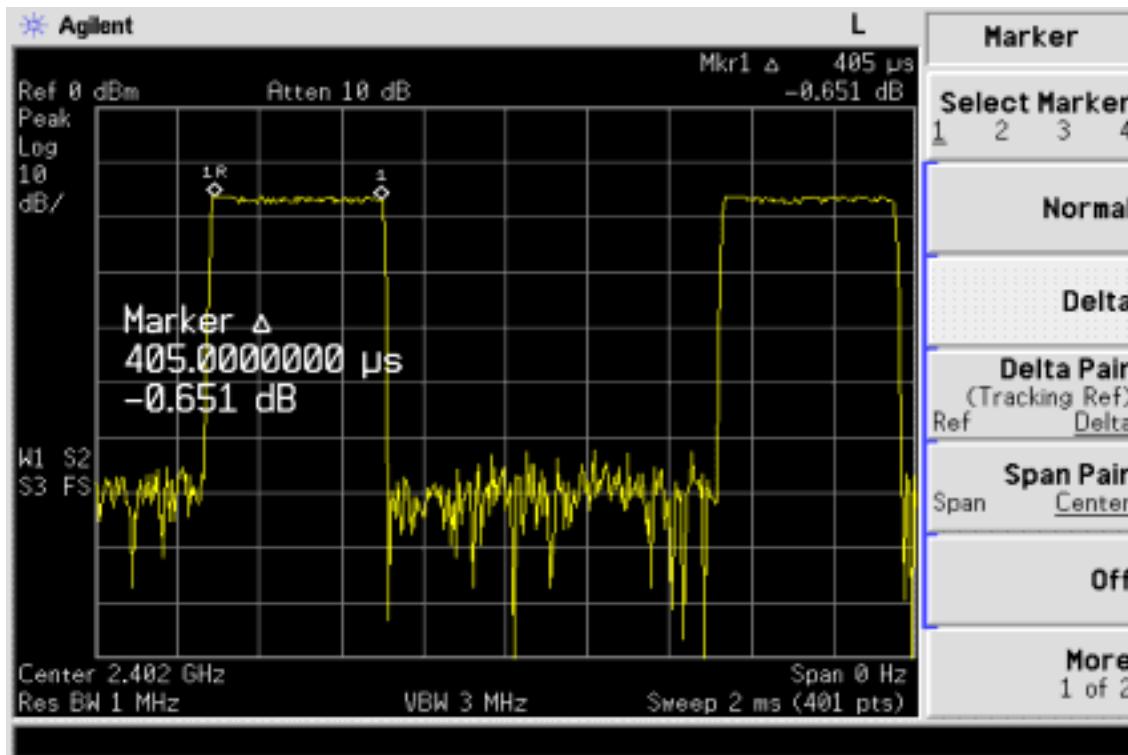DH1





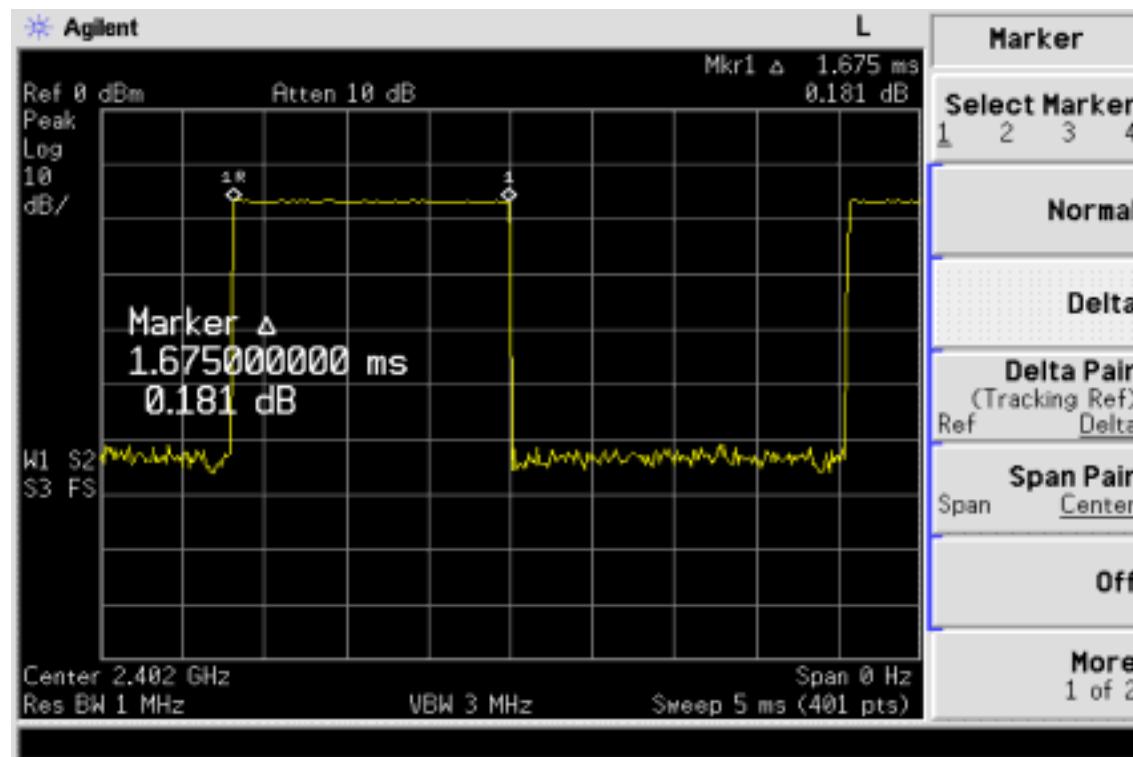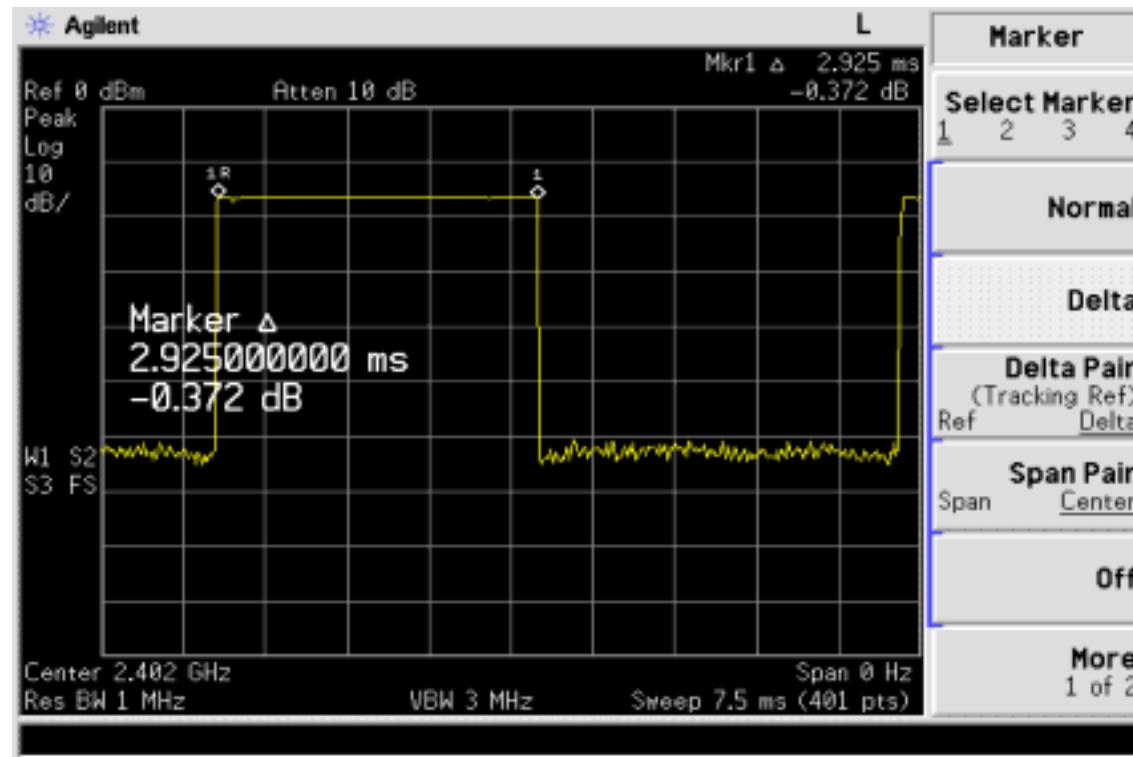The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

DH3**DH5**



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市五權西路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

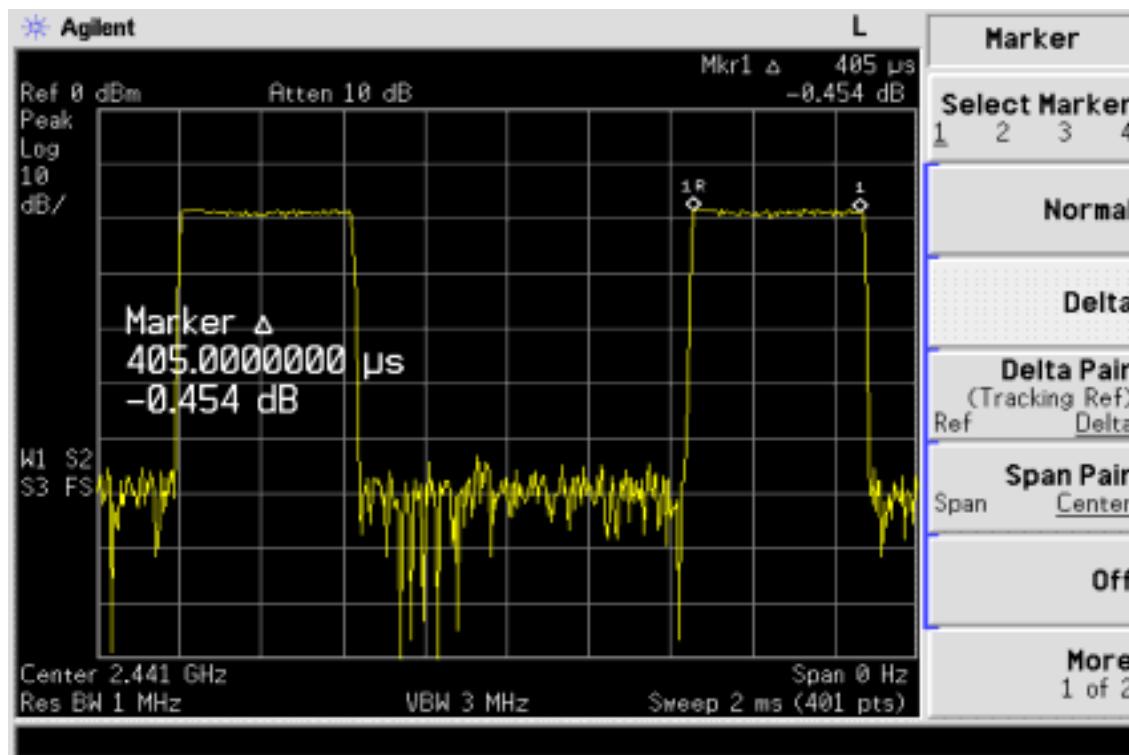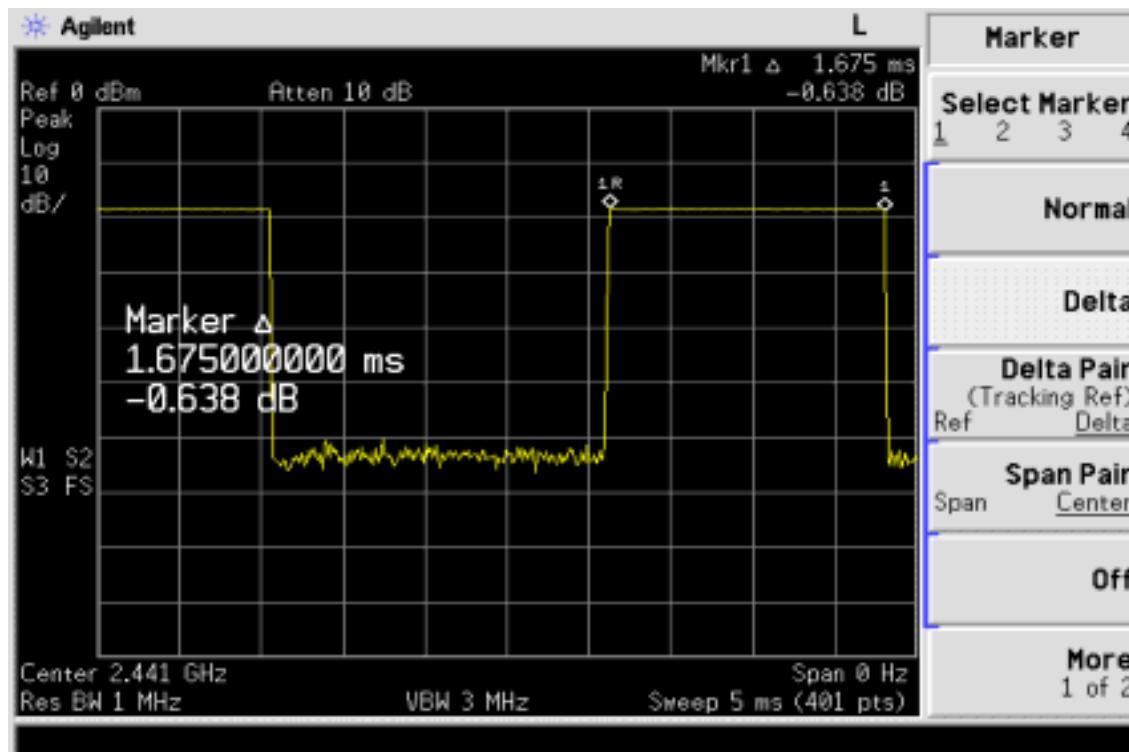
CH-Mid**DH1****DH3**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市錦五路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

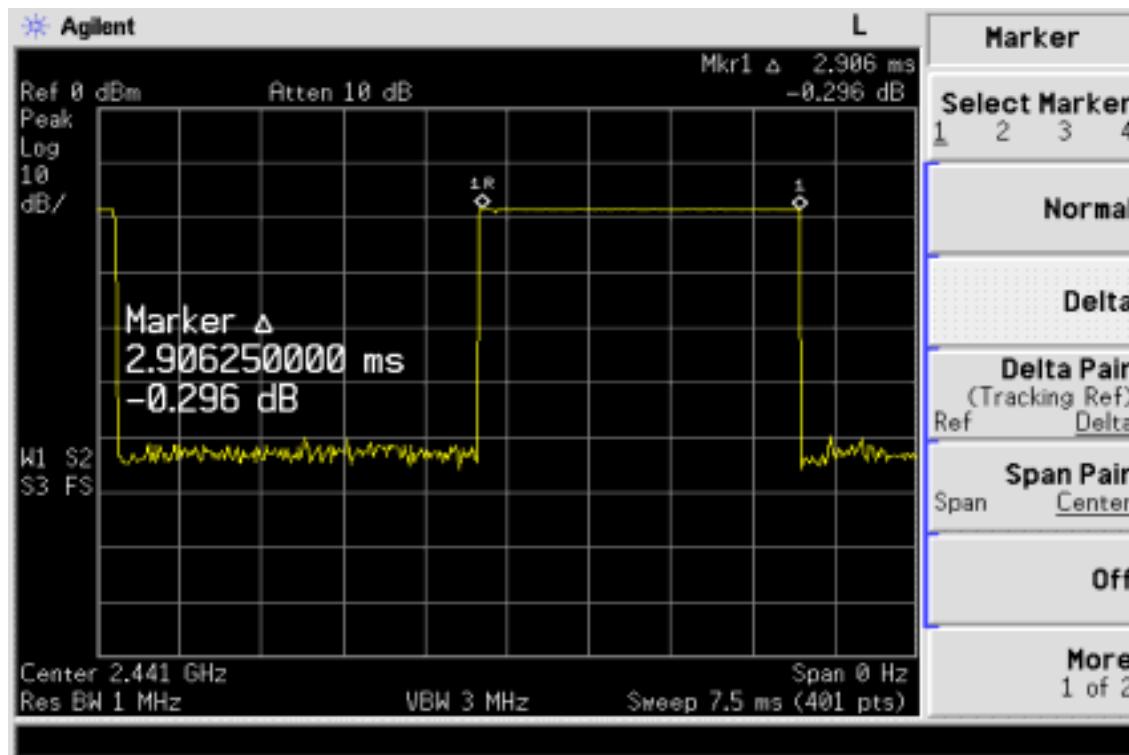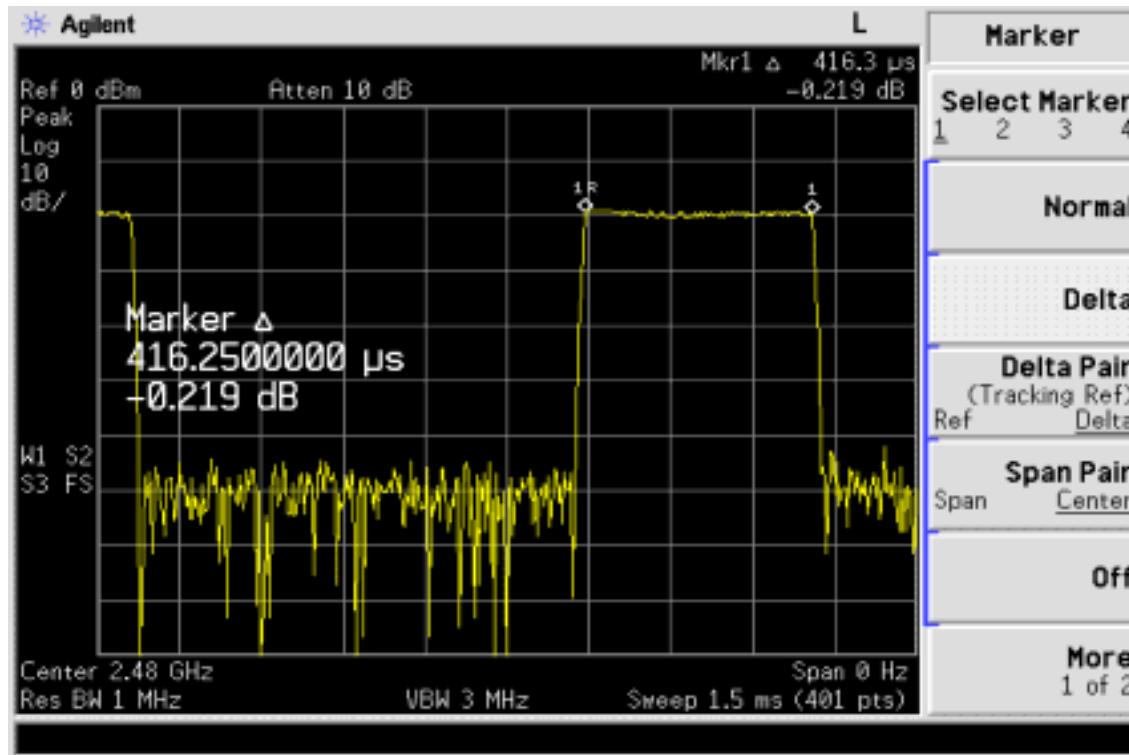DH5**CH-High****DH1****DH3**

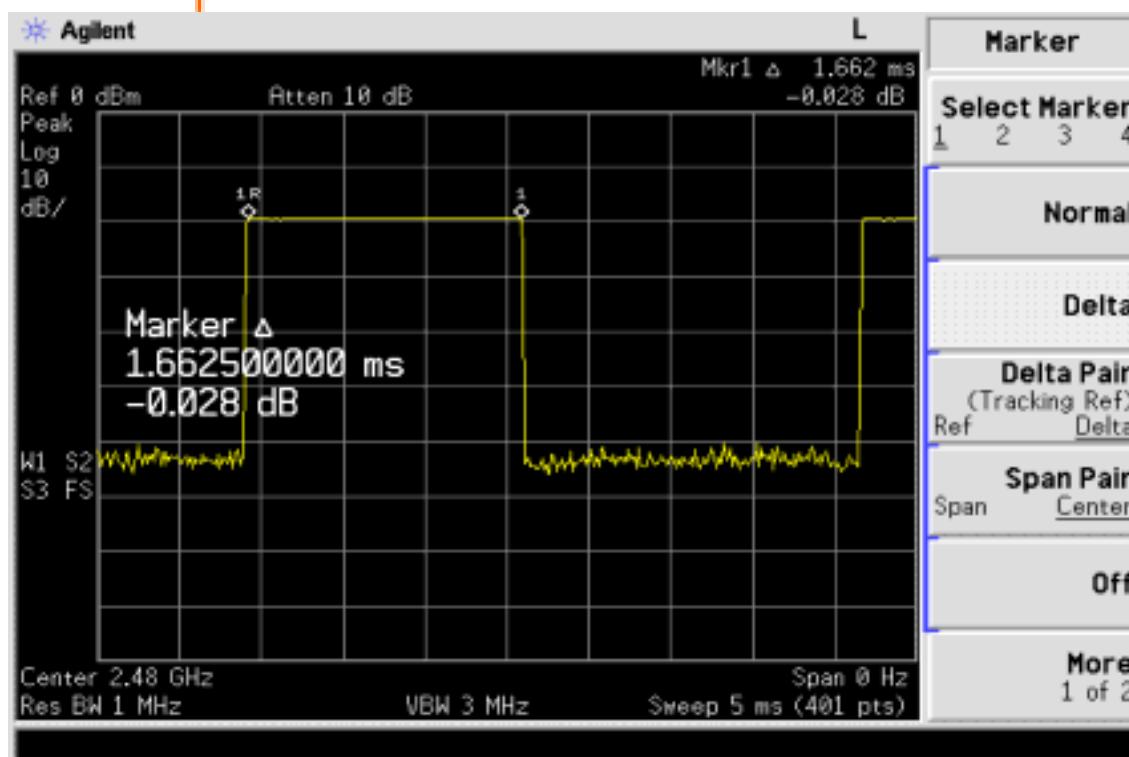The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



DH5

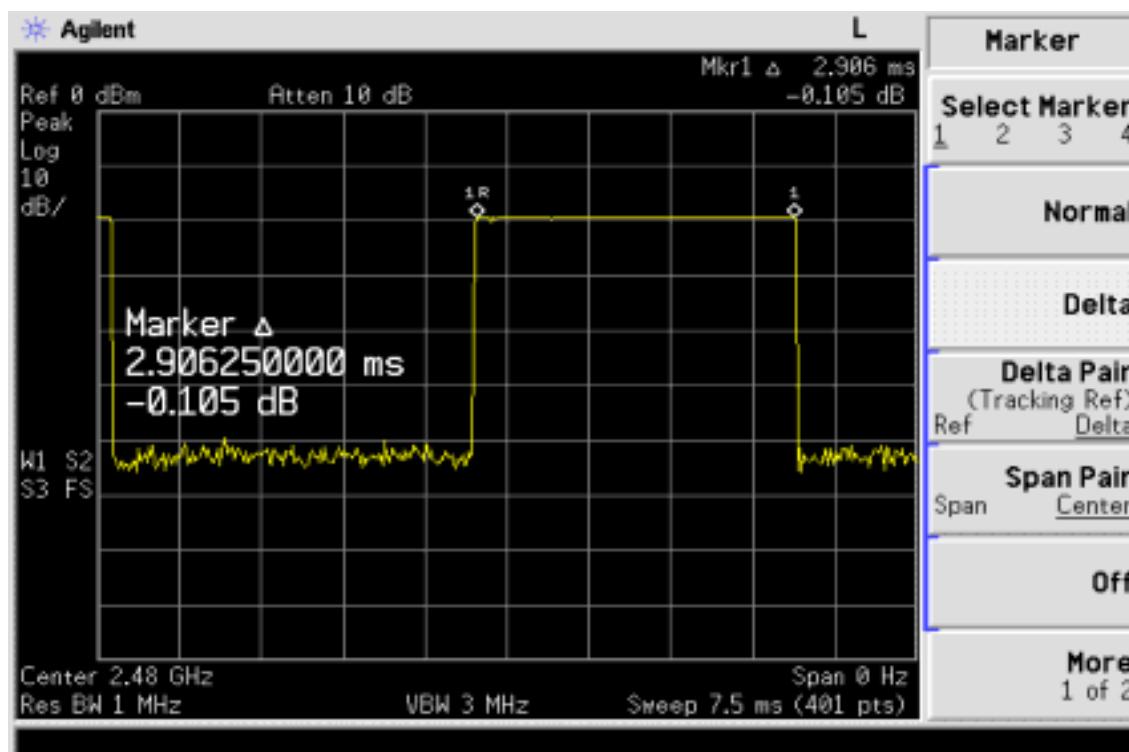

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

13. Peak Power Spectral Density

13.1 Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300KHz, Sweep=100s
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.

13.3 Measurement Result


CH	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
Low	-4.89	0.10	-4.79	8
Mid	-4.74	0.10	-4.64	8
High	-5.01	0.10	-4.91	8

13.4 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2004	05/26/2005
Spectrum Analyzer	Agilent	E7405A	US41160416	05/27/2004	05/26/2005
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2004	10/06/2005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

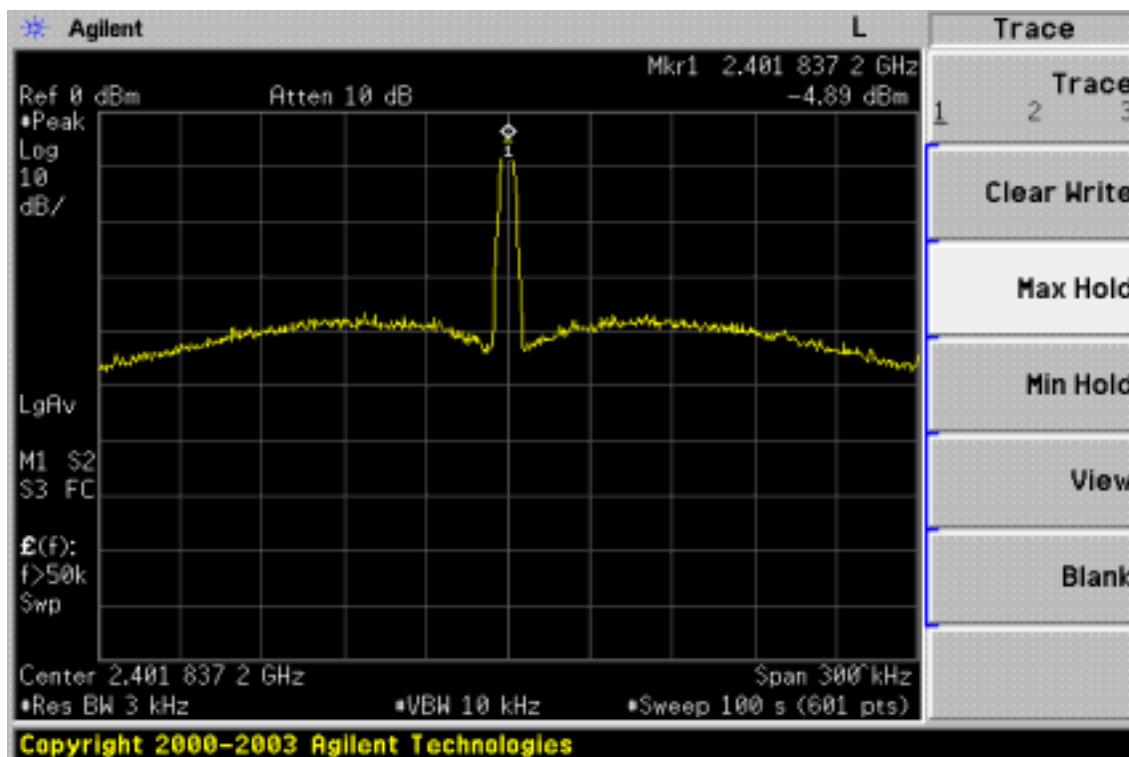
Power Spectral Density Test Plot (CH-Low)



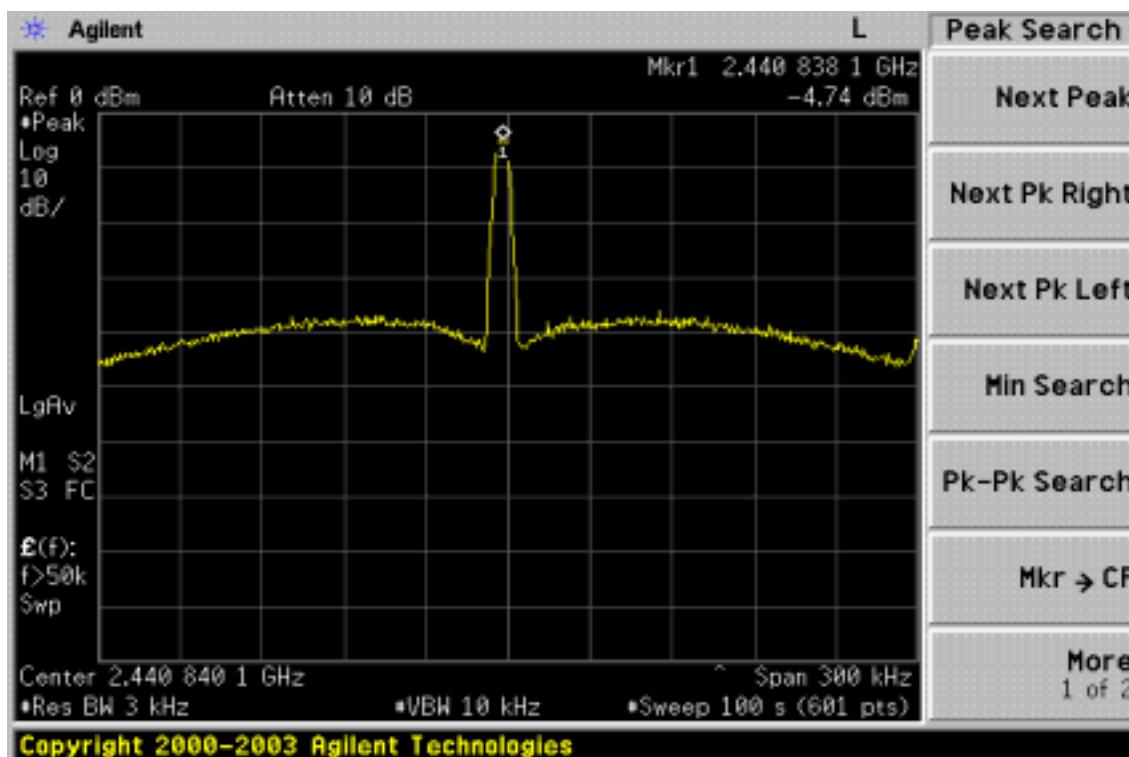Power Spectral Density Test Plot (CH-Mid)



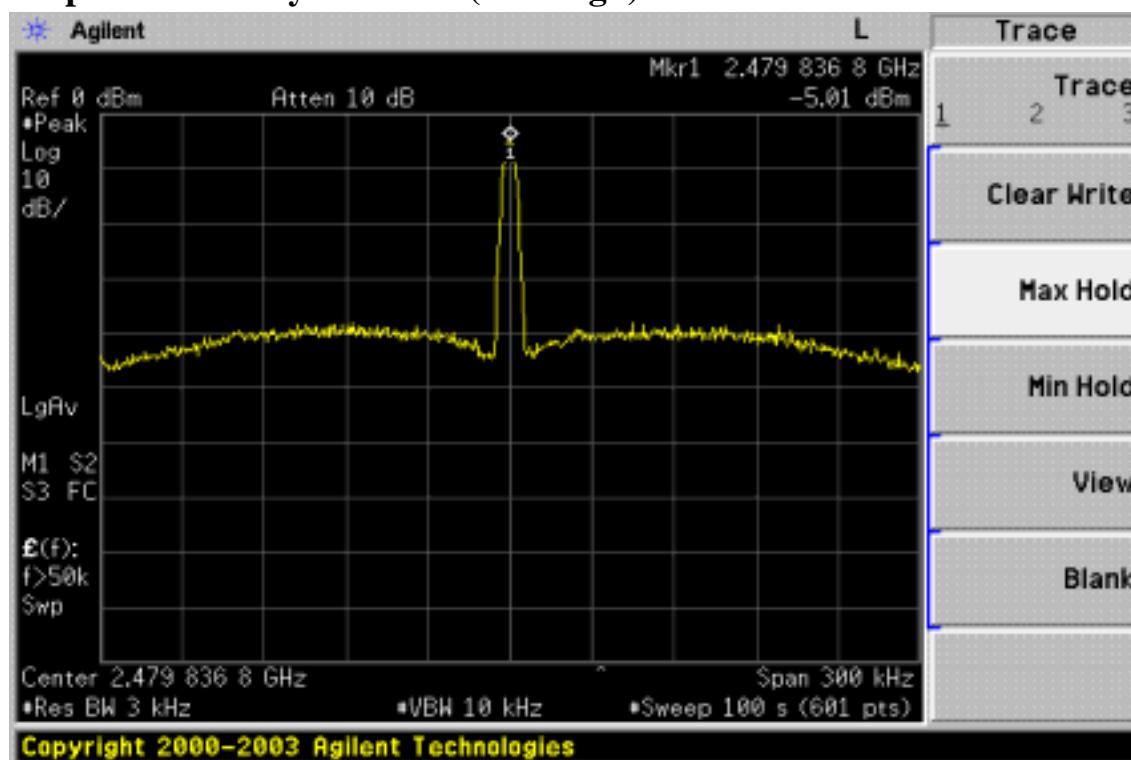The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Power Spectral Density Test Plot (CH-High)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市五股工業區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

14. ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The directional gins of antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

15. RF EXPOSURE

15.1 Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Portable device.

15.1. Measurement Result:

This is a portable device and the Max peak output power is -4.77dBm (0.00033W) lower than low threshold 60/fGHz mW (24.43mW), d<2.5cm in general population category ;

The SAR measurement is not necessary.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.