

FCC RADIO TEST REPORT

Applicant's company	Z-Com, Inc.
Applicant Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan
FCC ID	M4Y-AG623G2
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan

Product Name	IEEE 802.11 a/b/g Wireless Network Mini PCI
Brand Name	ZCOM
Model Name	AG-623G2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Jan. 20, 2010
Final Test Date	Jan. 29, 2010
Submission Type	Original Equipment



Statement

Test result included is only for the 802.11b/g part and 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	7
3.9. Test Configurations	10
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Maximum Conducted Output Power Measurement.....	26
4.3. Power Spectral Density Measurement	36
4.4. 6dB Spectrum Bandwidth Measurement	46
4.5. Radiated Emissions Measurement	56
4.6. Band Edge Emissions Measurement	140
4.7. Antenna Requirements	151
5. LIST OF MEASURING EQUIPMENTS	152
6. TEST LOCATION.....	153
7. TAF CERTIFICATE OF ACCREDITATION	154
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A16
APPENDIX B. TEST PHOTOS.....	B1 ~ B15
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C3

History of This Test Report

Original Issue Date: Feb. 03, 2010

Report No.: FR011919AB

- ☒ No additional attachment.
- ☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : IEEE 802.11 a/b/g Wireless Network Mini PCI
Brand Name : ZCOM
Model Name : AG-623G2
Applicant : Z-Com, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 20, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	17.92 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	11.74 dB
4.3	15.247(e)	Power Spectral Density	Complies	10.31 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.49 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.07 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11a/b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54/108)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11+1 ; 11a: 7+2
Channel Band Width (99%)	11b: 15.68 MHz ; 11g: 16.56 MHz ; 11g Turbo: 32.96 MHz ; 11a: 16.56 MHz ; 11a Turbo: 32.96 MHz ;
Conducted Output Power	11b: 18.17 dBm ; 11g: 18.26 dBm ; 11g Turbo: 18.07 dBm 11a: 16.83 dBm ; 11a Turbo: 16.55 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)		Loss of External Cable (dB)	Antenna Total Gain (dBi)
1	WHA YU	C034-510656-A	Dipole Antenna	I-PEX	2.4GHz	3.66	1.10	2.56
	WHA YU	C034-510656-A	Dipole Antenna	I-PEX	5GHz	3.35	1.80	1.55
2	SMARTANT	ZXL04-050280	Omni Directional	N Jack	2.4GHz	8.00	4.10	3.90
3	SMARTANT	ZXL05-200920	Omni Directional	N female	5GHz	8.00	2.10	5.90
4	WHA YU	C034-510580-A	Dipole Antenna	SMA Jack Reverse	2.4GHz	3.66	1.10	2.56
	WHA YU	C034-510580-A	Dipole Antenna	SMA Jack Reverse	5GHz	3.35	1.80	1.55
5	WHA YU	C034-510604-A	PIFA Antenna	Hirose	2.4GHz	1.80	0	1.80
	WHA YU	C034-510604-A	PIFA Antenna	Hirose	5GHz	1.80	0	1.80
6	WHA YU	C034-510591-A	Dipole Antenna	SMA Jack Reverse	2.4GHz	3.66	1.30	2.36
	WHA YU	C034-510591-A	Dipole Antenna	SMA Jack Reverse	5GHz	3.35	2.00	1.35
7	WHA YU	C034-510506-A	Dipole Antenna	Reversed-SMA	2.4GHz	2.00	2.00	0
	WHA YU	C034-510506-A	Dipole Antenna	Reversed-SMA	5GHz	3.00	2.00	1.00


Note:

The EUT has two antennas (1TX/1RX), and the connector 1(J3) supports the antenna with TX/RX function.

There are seven sets of antenna provided to this EUT and all of them can be used as transmitting and receiving antenna.

Due to Ant. 4 is the highest gain value among all dipole antennas, so Ant. 2, Ant. 3, Ant. 4 and Ant. 5 were tested and recorded in this test report.

Connector 1(J3): TX/RX

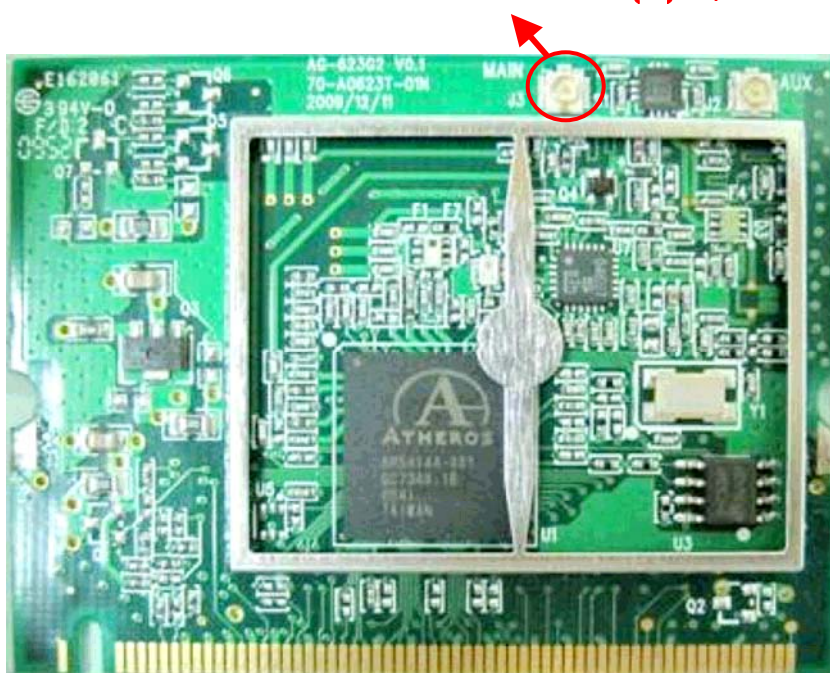

3.4. Table for Carrier Frequencies

<For 2.4GHz Band>:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	Turbo 6	2437 MHz

<For 5GHz Band>:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz (USA/Canada/Taiwan)	149	5745 MHz	161	5805 MHz
	151	5755 MHz	165	5825 MHz
	153	5765 MHz	Turbo 152	5760 MHz
	157	5785 MHz	Turbo 160	5800 MHz
	159	5795 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	2/3/4/5
Max. Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	2/4/5
	11g/BPSK	6 Mbps	1/6/11	2/4/5
	11g/BPSK Turbo	12 Mbps	6	2/4/5
	11a/BPSK	6 Mbps	149/157/165	3/4/5
	11a/BPSK Turbo	12 Mbps	152/160	3/4/5
Radiated Emissions Below 1GHz	Normal Link	Auto	-	2/3/4/5
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	2/4/5
	11g/BPSK	6 Mbps	1/6/11	2/4/5
	11g/BPSK Turbo	12 Mbps	6	2/4/5
	11a/BPSK	6 Mbps	149/157/165	3/4/5
	11a/BPSK Turbo	12 Mbps	152/160	3/4/5
Band Edge Emissions	11b/CCK	1 Mbps	1/11	2/4/5
	11g/BPSK	6 Mbps	1/11	2/4/5
	11g/BPSK Turbo	12 Mbps	6	2/4/5
	11a/BPSK	6 Mbps	149/165	3/4/5
	11a/BPSK Turbo	12 Mbps	152/160	3/4/5

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	E2K24GBRL
Mouse	iCooky	AMS0706W	DoC
Modem	ACEEX	DM1414	IFAXDM1414
Wireless AP	Planex	GW-AP54SGX	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For 2.4GHz Band / Antenna 2>:

Power Parameters of IEEE 802.11b/g Ant. 2

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15	17.5	15
IEEE 802.11g	12.5	16	12.5
IEEE 802.11g Turbo	-	16	-

<For 5GHz Band / Antenna 3>:

Power Parameters of IEEE 802.11a Ant. 3

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	16	16	16
Frequency	5760 MHz	5800 MHz	-
IEEE 802.11a Turbo	16	16	-

<For 2.4GHz Band / Antenna 4>:

Power Parameters of IEEE 802.11b/g Ant. 4

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15	17.5	15
IEEE 802.11g	12.5	16	12.5
IEEE 802.11g Turbo	-	16	-

<For 5GHz Band / Antenna 4>:

Power Parameters of IEEE 802.11a Ant. 4

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	16	16	16
Frequency	5760 MHz	5800 MHz	-
IEEE 802.11a Turbo	16	16	-

<For 2.4GHz Band / Antenna 5>:

Power Parameters of IEEE 802.11b/g Ant. 5

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15	17.5	15
IEEE 802.11g	12.5	16	12.5
IEEE 802.11g Turbo	-	16	-

<For 5GHz Band / Antenna 5>:

Power Parameters of IEEE 802.11a Ant. 5

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	16	16	16
Frequency	5760 MHz	5800 MHz	-
IEEE 802.11a Turbo	16	16	-

Note 1:

Ant. 2, Ant. 3, Ant. 4 and Ant. 5 have been tested. However since the power setting for each antenna is exactly the same, so there is only one data recorded for Maximum Conducted Output Power, Power Spectral Density, 6dB Spectrum Bandwidth Measurements in this report.

Note 2:

During the test, the following programs under WIN XP were executed:


Executed " ART Revision 5.4 BUILD #7" to control the EUT continuously transmit RF signal.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz


<For Antenna 2>: For 2.4GHz Band

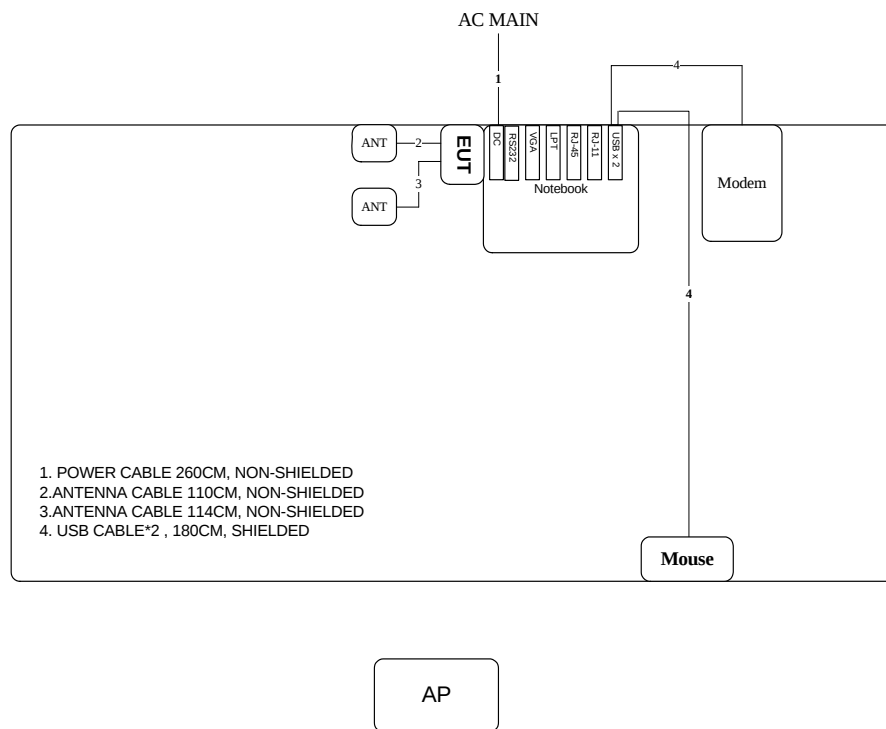

<For Antenna 3>: For 5GHz Band

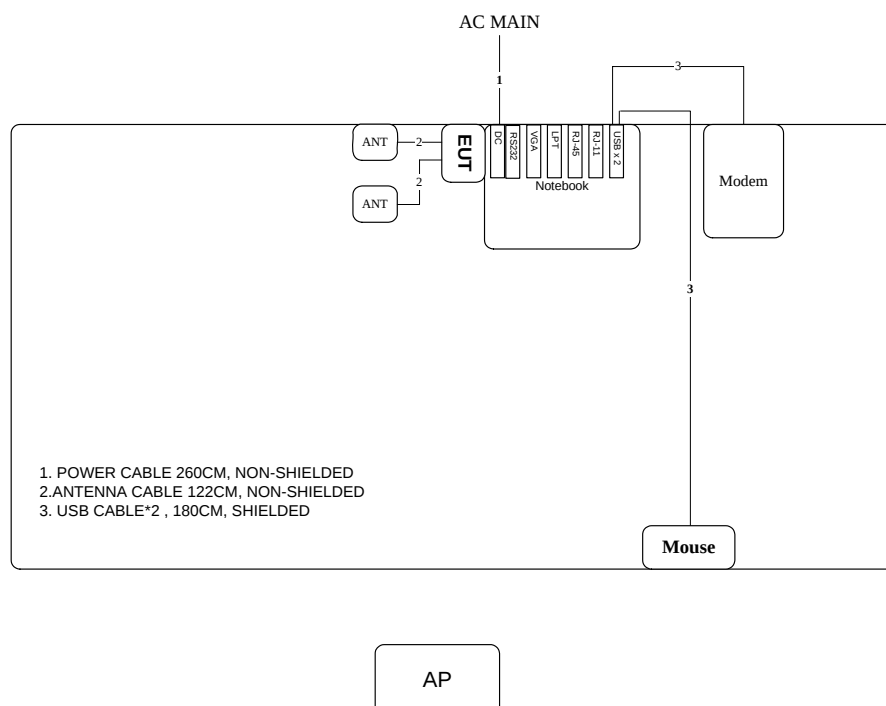


<For Antenna 4>: For 2.4GHz / 5GHz Band

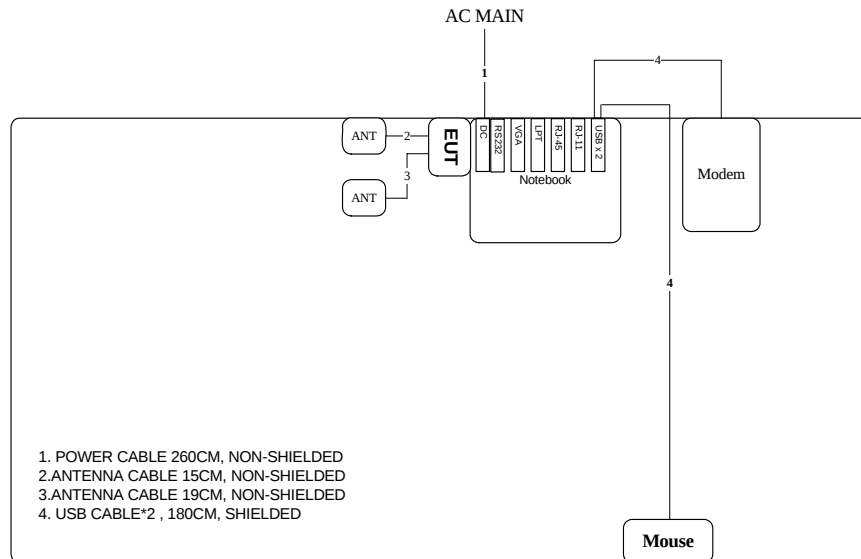

AP


<For Antenna 5>: For 2.4GHz / 5GHz Band

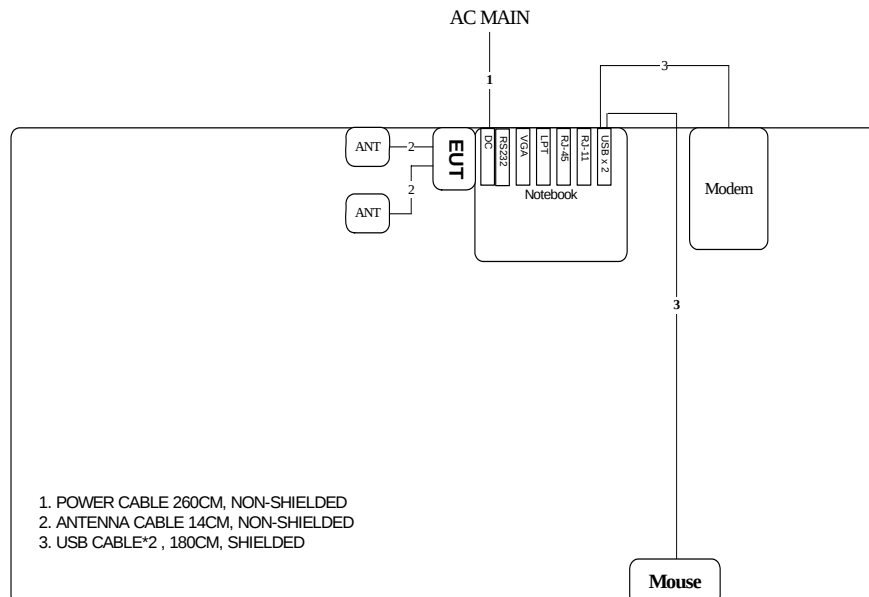


AP

Test Configuration: Above 1GHz


<For Antenna 2>: For 2.4GHz Band

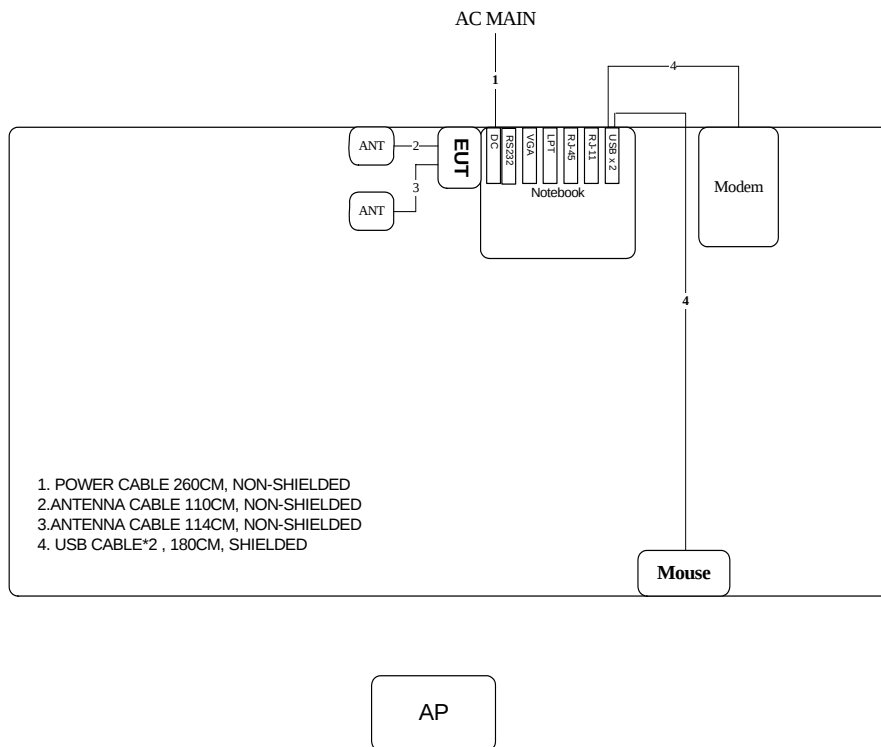


<For Antenna 3>: For 5GHz Band

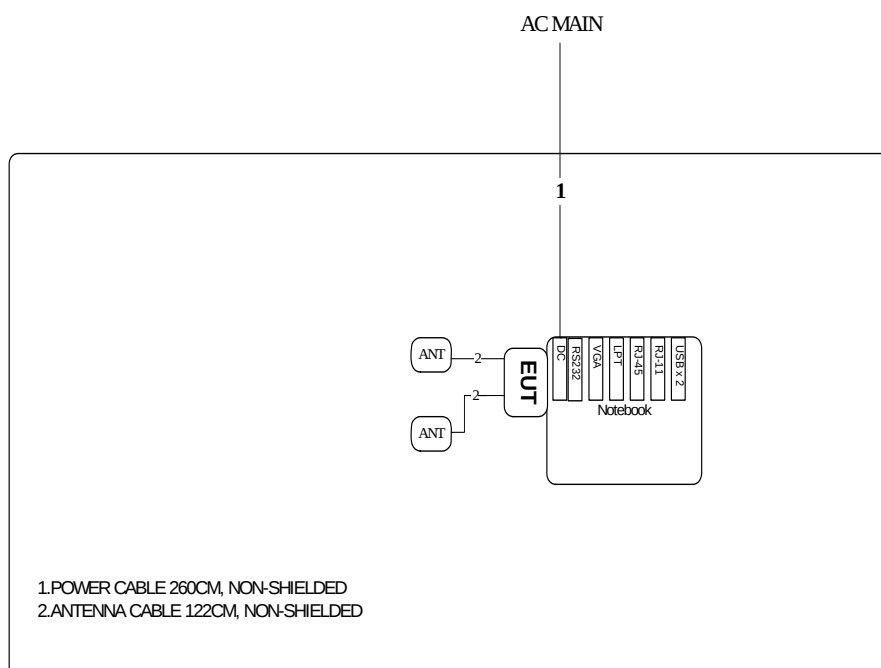

<For Antenna 4>: For 2.4GHz / 5GHz Band

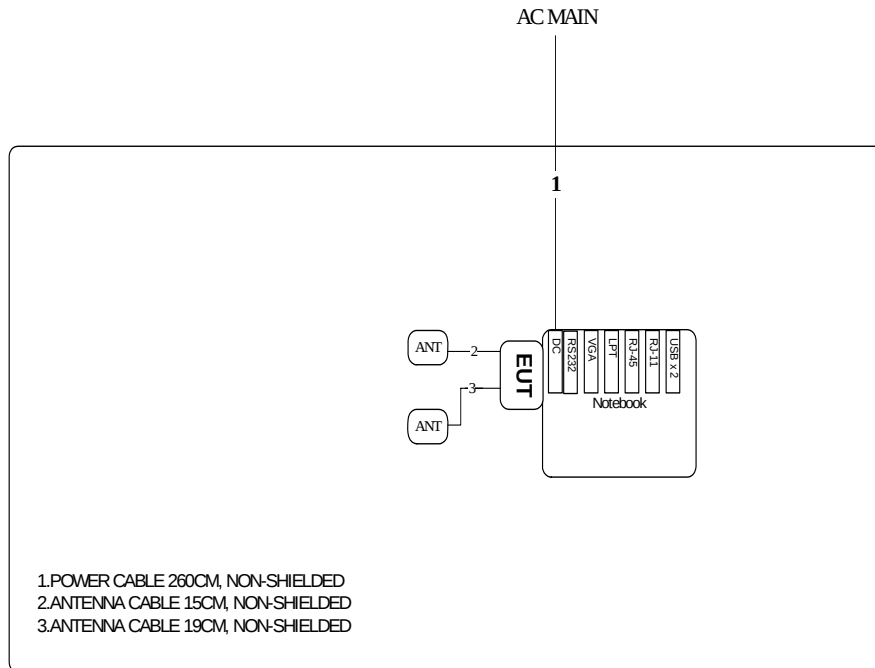


<For Antenna 5>: For 2.4GHz / 5GHz Band

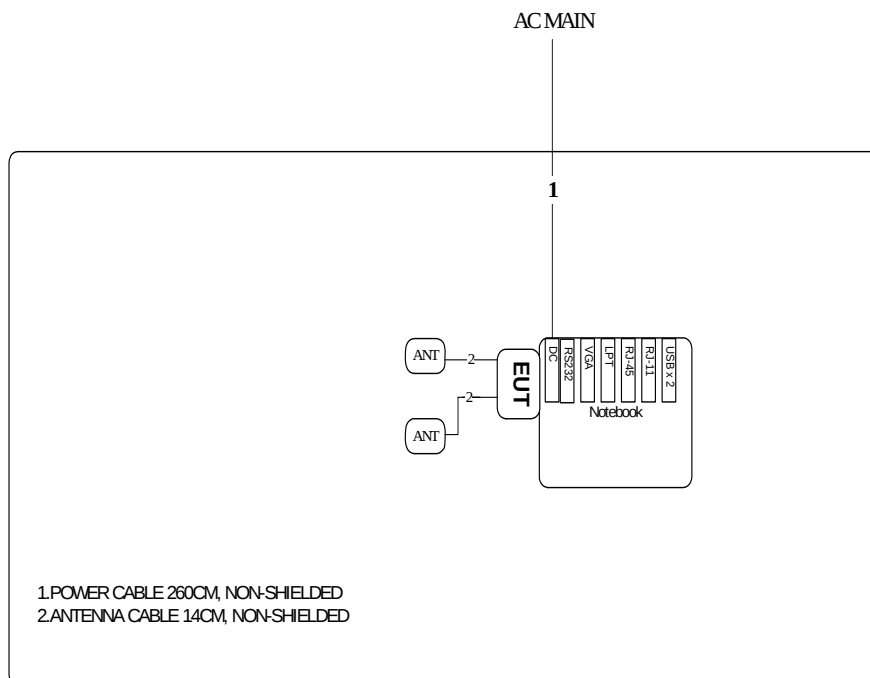


3.9.2. AC Power Line Conduction Emissions Test Configuration


<For Antenna 2>: For 2.4GHz Band

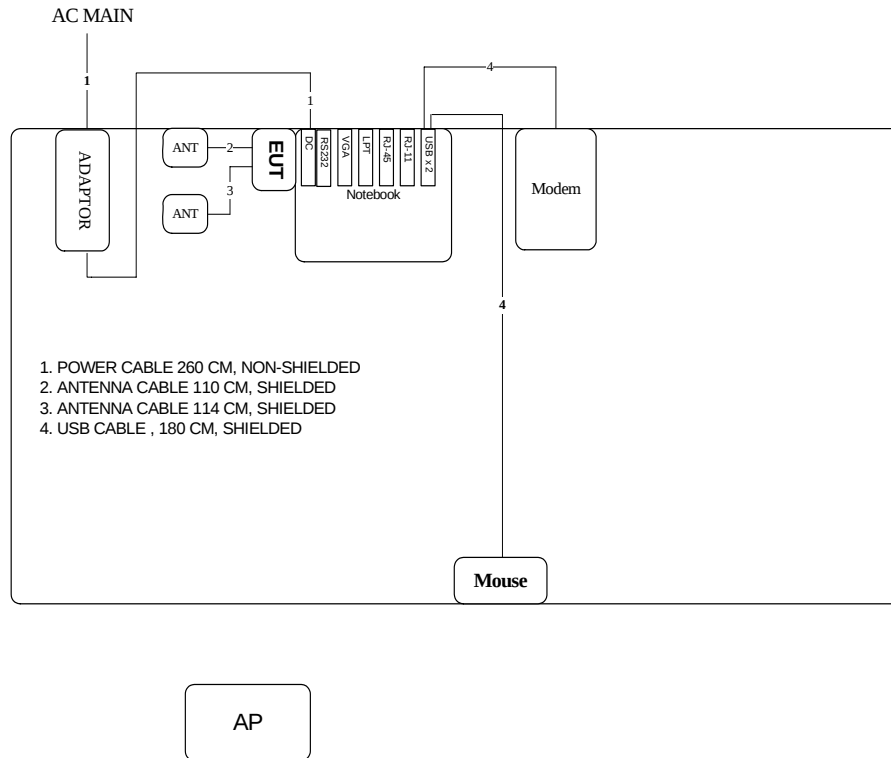

<For Antenna 3>: For 5GHz Band

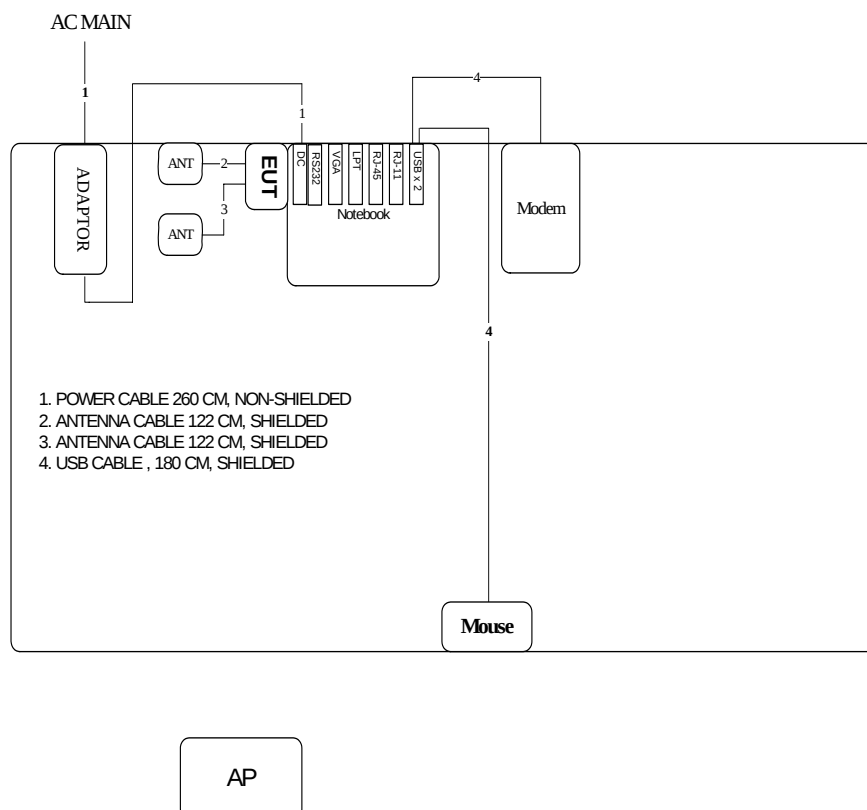


<For Antenna 4>: For 2.4GHz / 5GHz Band

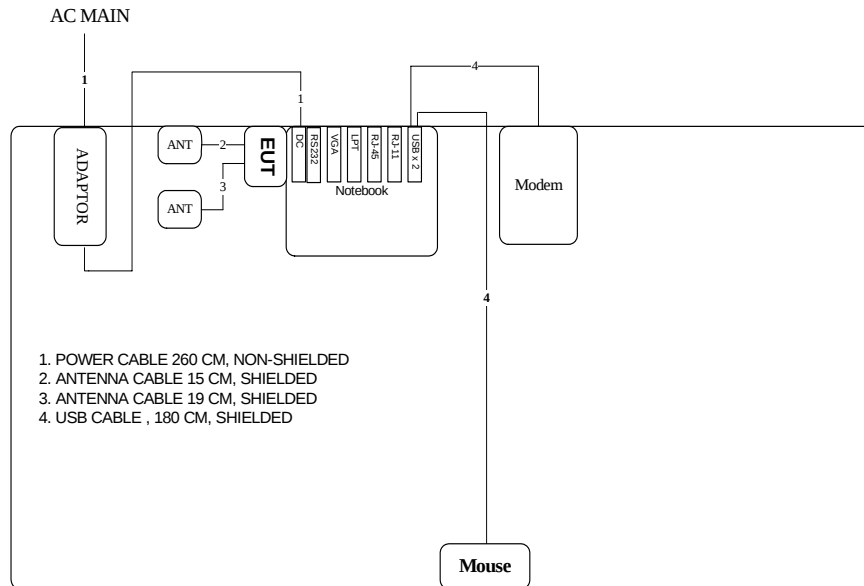

AP

<For Antenna 5>: For 2.4GHz / 5GHz Band

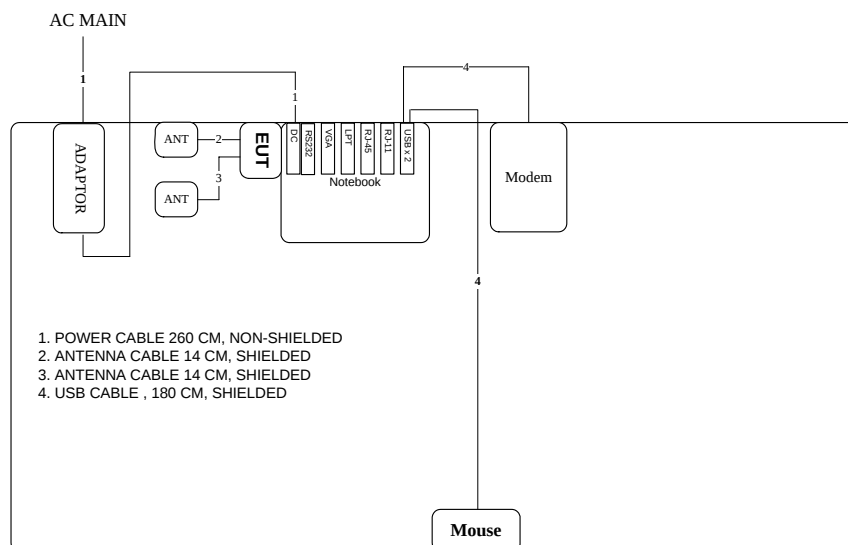

AP

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

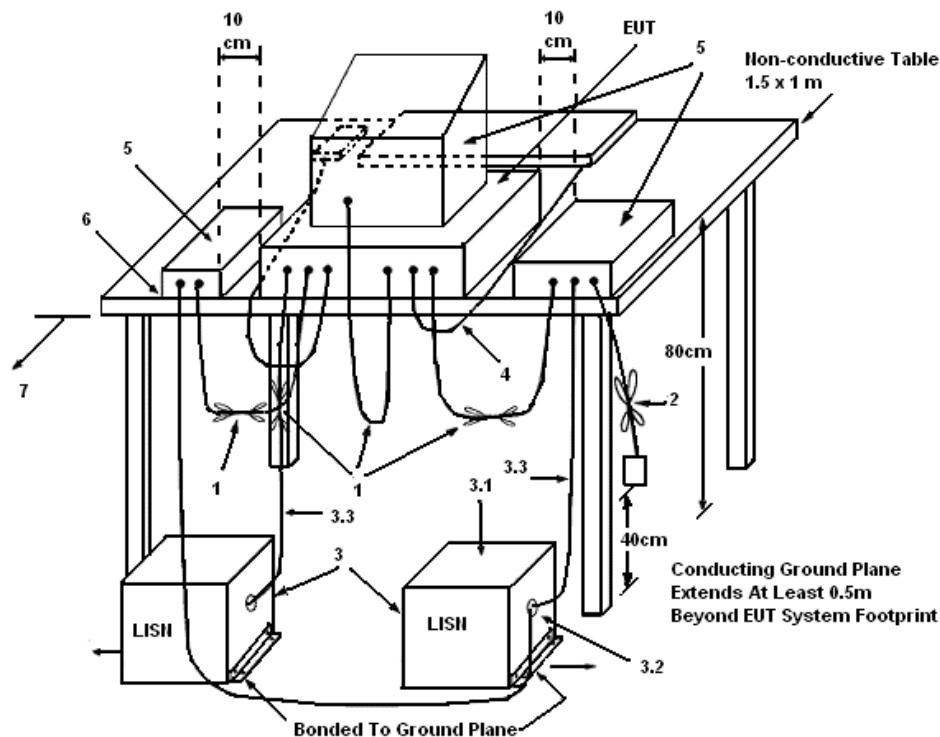

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation

There is no deviation with the original standard.


4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


<For Antenna 2>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

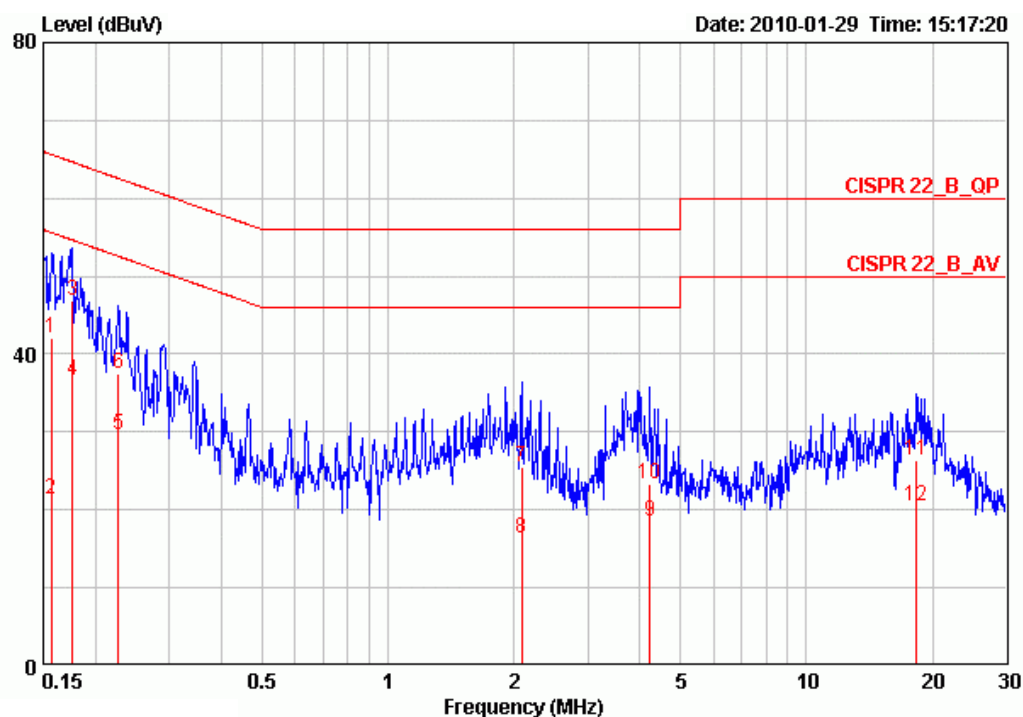

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15650	42.16	-23.49	65.65	41.89	0.07	0.20	QP
2	0.15650	21.27	-34.38	55.65	21.00	0.07	0.20	AVERAGE
3	0.17584	46.76	-17.92	64.68	46.50	0.06	0.20	QP
4	0.17584	36.71	-17.97	54.68	36.45	0.06	0.20	AVERAGE
5	0.22676	29.60	-22.97	52.57	29.35	0.05	0.20	AVERAGE
6	0.22676	37.45	-25.12	62.57	37.20	0.05	0.20	QP
7	2.088	25.61	-30.39	56.00	25.36	0.05	0.20	QP
8	2.088	16.42	-29.58	46.00	16.17	0.05	0.20	AVERAGE
9	4.224	18.48	-27.52	46.00	18.06	0.12	0.30	AVERAGE
10	4.224	23.41	-32.59	56.00	22.99	0.12	0.30	QP
11	18.328	26.46	-33.54	60.00	25.22	0.74	0.50	QP
12	18.328	20.55	-29.45	50.00	19.31	0.74	0.50	AVERAGE

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

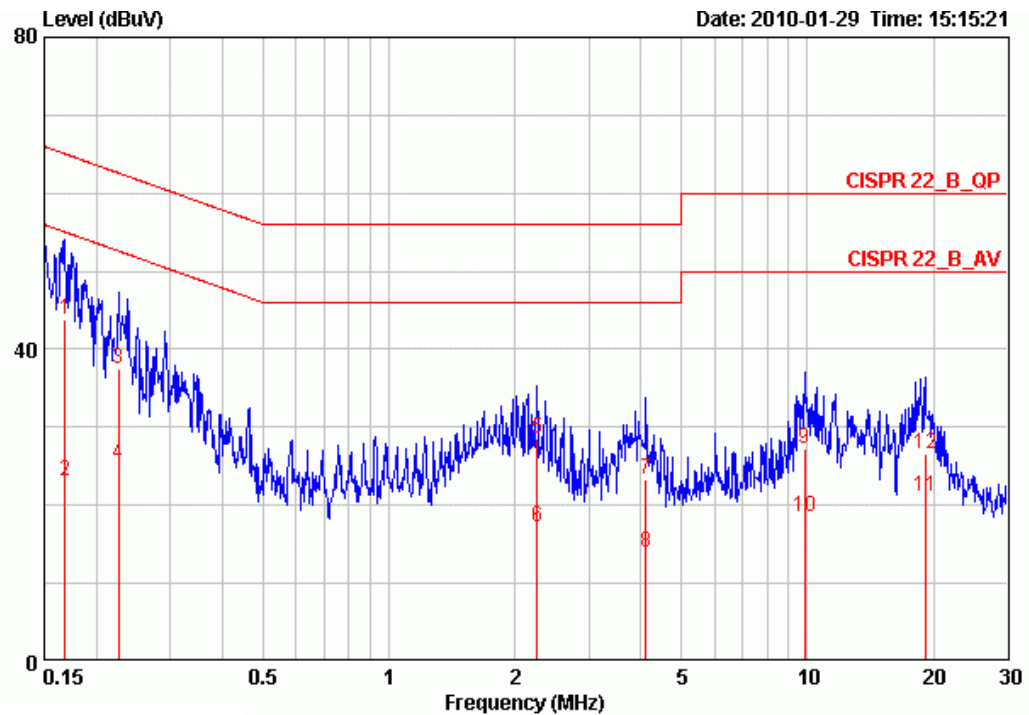


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16854	43.71	-21.32	65.03	43.42	0.09	0.20	QP
2	0.16854	23.02	-32.01	55.03	22.73	0.09	0.20	AVERAGE
3	0.22556	37.46	-25.15	62.61	37.18	0.08	0.20	QP
4	0.22556	25.30	-27.31	52.61	25.02	0.08	0.20	AVERAGE
5	2.261	28.55	-27.45	56.00	28.25	0.10	0.20	QP
6	2.261	17.13	-28.87	46.00	16.83	0.10	0.20	AVERAGE
7	4.114	23.26	-32.74	56.00	22.81	0.15	0.30	QP
8	4.114	13.97	-32.03	46.00	13.52	0.15	0.30	AVERAGE
9	9.861	27.29	-32.71	60.00	26.60	0.39	0.30	QP
10	9.861	18.59	-31.41	50.00	17.90	0.39	0.30	AVERAGE
11	19.122	21.25	-28.75	50.00	19.98	0.77	0.50	AVERAGE
12	19.122	26.52	-33.48	60.00	25.25	0.77	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.


<For Antenna 3>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

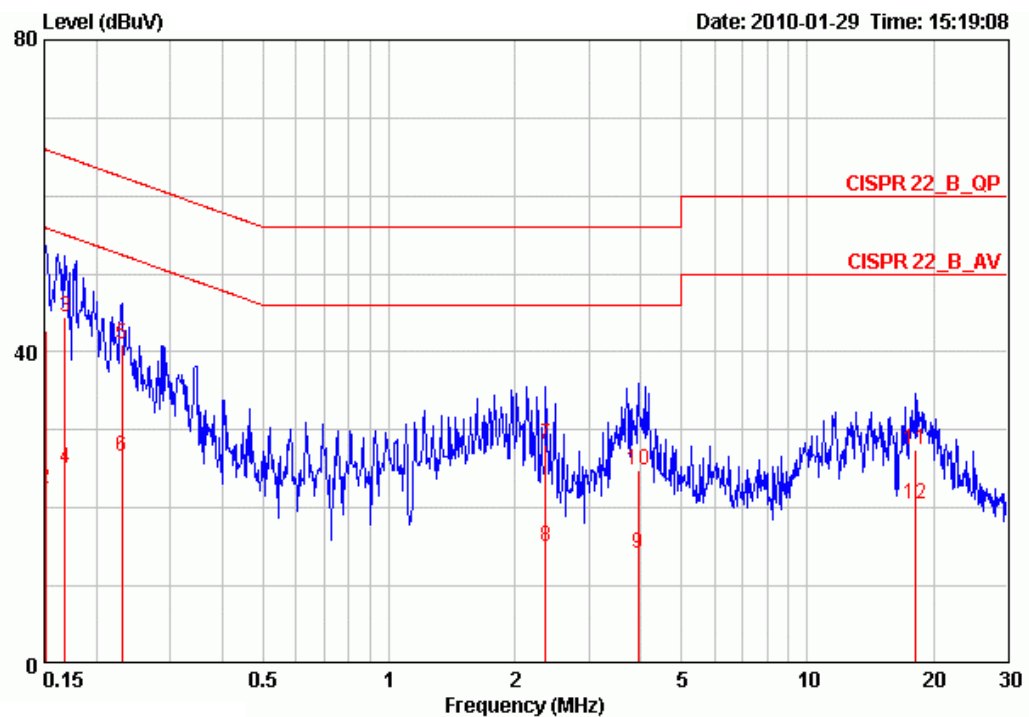

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15080	42.70	-23.25	65.96	42.43	0.07	0.20	QP
2	0.15080	22.51	-33.44	55.96	22.24	0.07	0.20	AVERAGE
3	0.16854	44.38	-20.65	65.03	44.12	0.06	0.20	QP
4	0.16854	25.17	-29.86	55.03	24.91	0.06	0.20	AVERAGE
5	0.23040	41.05	-21.39	62.44	40.80	0.05	0.20	QP
6	0.23040	26.63	-25.81	52.44	26.38	0.05	0.20	AVERAGE
7	2.371	28.13	-27.87	56.00	27.87	0.06	0.20	QP
8	2.371	15.06	-30.94	46.00	14.80	0.06	0.20	AVERAGE
9	3.943	14.20	-31.80	46.00	13.80	0.10	0.30	AVERAGE
10	3.943	24.75	-31.25	56.00	24.35	0.10	0.30	QP
11	18.135	27.44	-32.56	60.00	26.21	0.73	0.50	QP
12	18.135	20.52	-29.48	50.00	19.29	0.73	0.50	AVERAGE

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

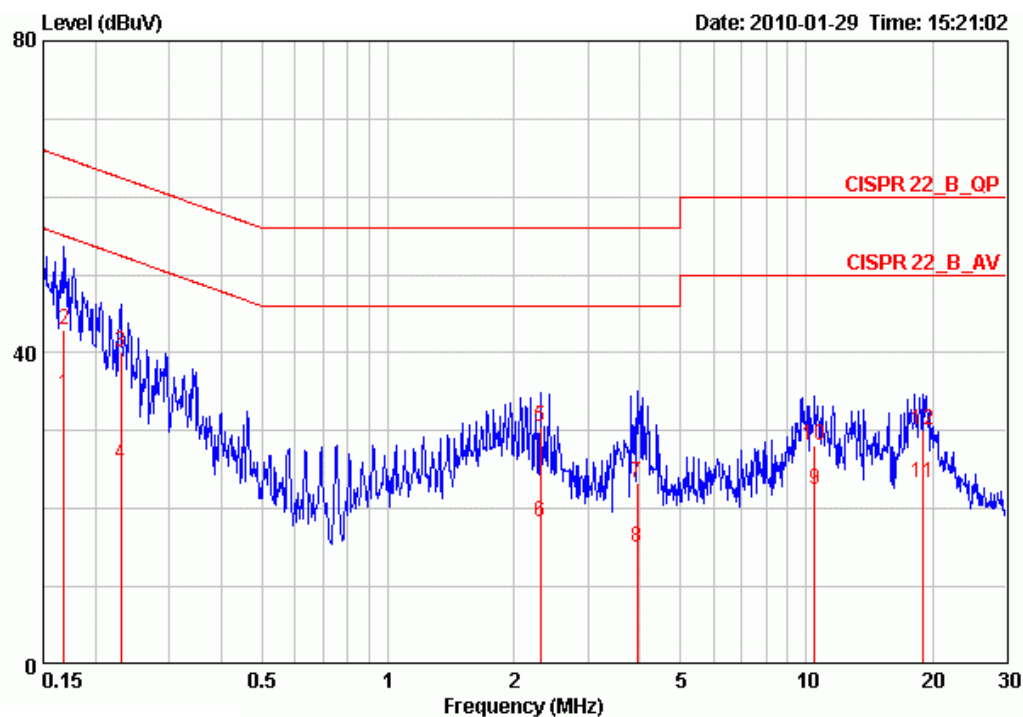


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16854	34.74	-20.29	55.03	34.45	0.09	0.20	AVERAGE
2	0.16854	43.04	-21.99	65.03	42.75	0.09	0.20	QP
3	0.23040	40.19	-22.25	62.44	39.91	0.08	0.20	QP
4	0.23040	25.80	-26.64	52.44	25.52	0.08	0.20	AVERAGE
5	2.309	30.53	-25.47	56.00	30.23	0.10	0.20	QP
6	2.309	18.29	-27.71	46.00	17.99	0.10	0.20	AVERAGE
7	3.943	23.23	-32.77	56.00	22.79	0.14	0.30	QP
8	3.943	15.06	-30.94	46.00	14.62	0.14	0.30	AVERAGE
9	10.452	22.53	-27.47	50.00	21.73	0.41	0.39	AVERAGE
10	10.452	28.21	-31.79	60.00	27.41	0.41	0.39	QP
11	18.920	23.33	-26.67	50.00	22.07	0.76	0.50	AVERAGE
12	18.920	30.19	-29.81	60.00	28.93	0.76	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.


<For Antenna 4>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

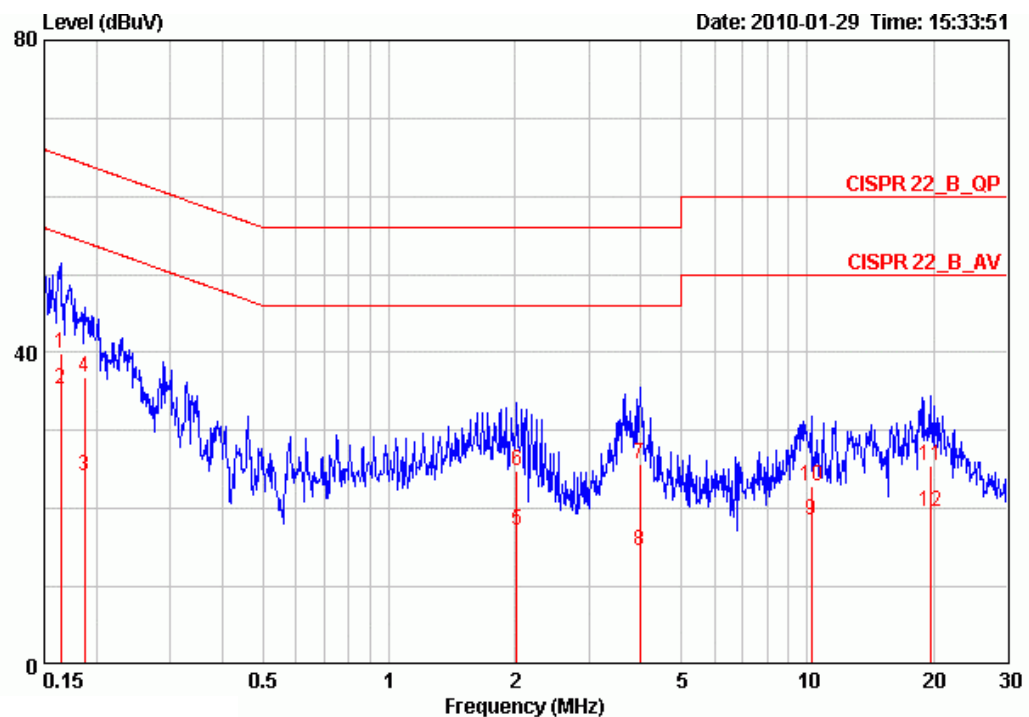

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16414	39.93	-25.32	65.25	39.66	0.07	0.20	QP
2	0.16414	35.35	-19.90	55.25	35.08	0.07	0.20	AVERAGE
3	0.18739	24.28	-29.88	54.15	24.02	0.06	0.20	AVERAGE
4	0.18739	36.76	-27.40	64.15	36.50	0.06	0.20	QP
5	2.023	17.18	-28.82	46.00	16.93	0.05	0.20	AVERAGE
6	2.023	24.95	-31.05	56.00	24.70	0.05	0.20	QP
7	3.985	25.64	-30.36	56.00	25.24	0.10	0.30	QP
8	3.985	14.65	-31.35	46.00	14.25	0.10	0.30	AVERAGE
9	10.233	18.47	-31.53	50.00	17.76	0.36	0.34	AVERAGE
10	10.233	22.97	-37.03	60.00	22.26	0.36	0.34	QP
11	19.635	25.50	-34.51	60.00	24.19	0.80	0.50	QP
12	19.635	19.65	-30.36	50.00	18.34	0.80	0.50	AVERAGE

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

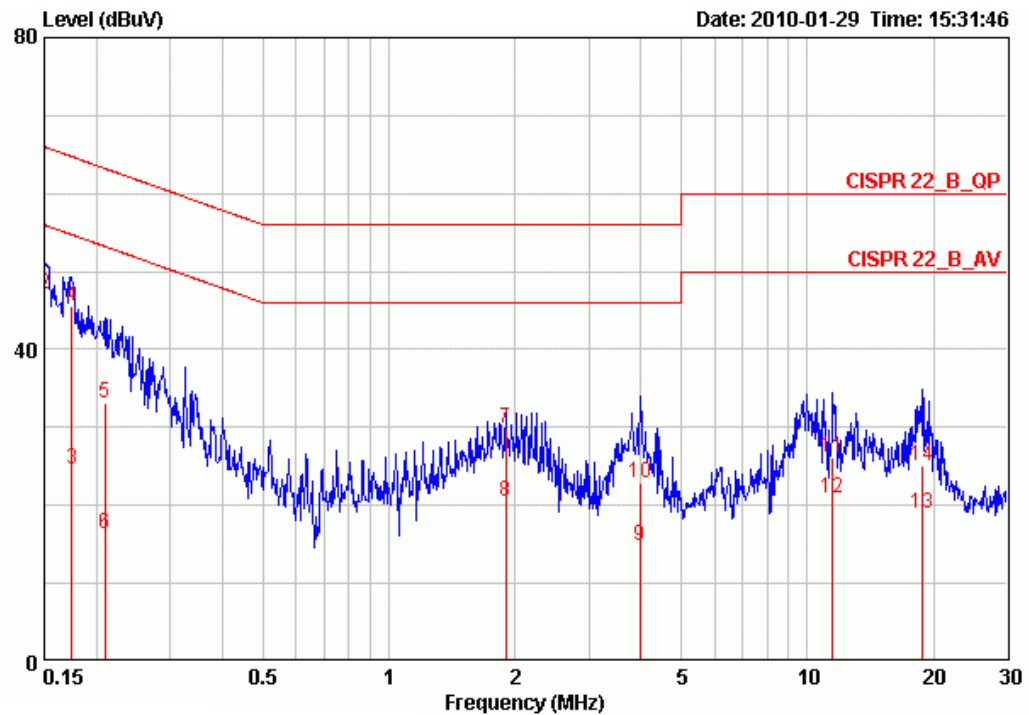


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 @	0.15000	32.23	-23.77	56.00	31.92	0.11	0.20	AVERAGE
2 @	0.15000	47.05	-18.95	66.00	46.74	0.11	0.20	QP
3	0.17491	24.61	-30.11	54.72	24.32	0.09	0.20	AVERAGE
4 @	0.17491	45.46	-19.26	64.72	45.17	0.09	0.20	QP
5	0.20944	33.20	-30.03	63.23	32.92	0.08	0.20	QP
6	0.20944	16.33	-36.90	53.23	16.05	0.08	0.20	AVERAGE
7	1.898	29.87	-26.13	56.00	29.60	0.09	0.18	QP
8	1.898	20.58	-25.42	46.00	20.31	0.09	0.18	AVERAGE
9	3.985	14.77	-31.23	46.00	14.33	0.14	0.30	AVERAGE
10	3.985	22.95	-33.05	56.00	22.51	0.14	0.30	QP
11	11.498	26.19	-33.81	60.00	25.34	0.45	0.40	QP
12	11.498	21.00	-29.00	50.00	20.15	0.45	0.40	AVERAGE
13	18.721	18.92	-31.08	50.00	17.67	0.75	0.50	AVERAGE
14	18.721	25.06	-34.94	60.00	23.81	0.75	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.


<For Antenna 5>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

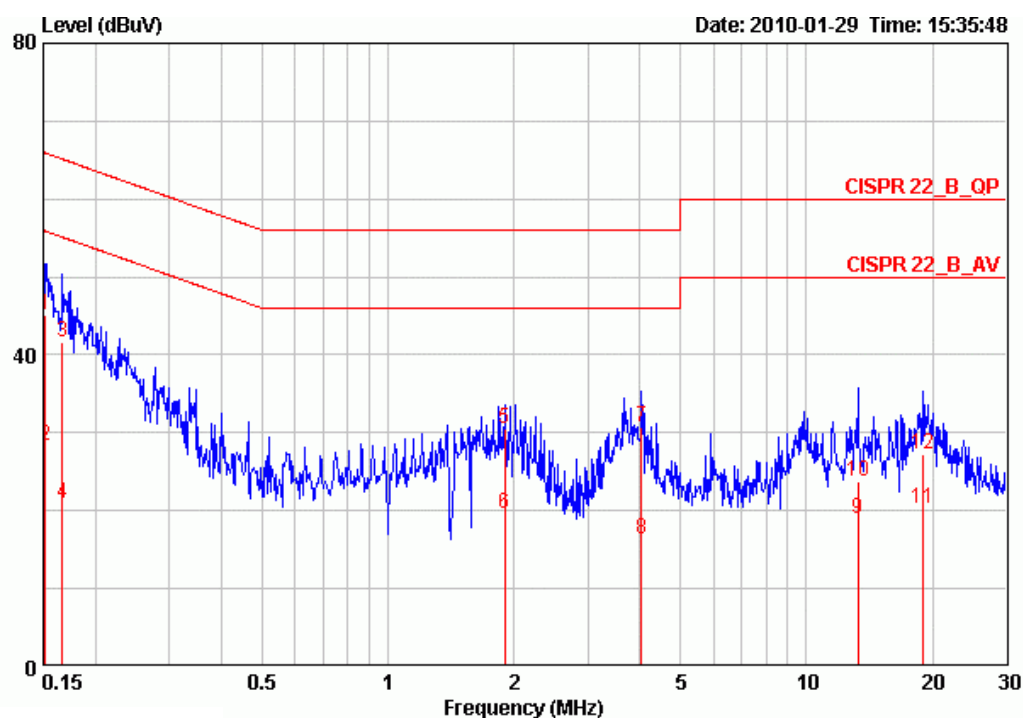

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	45.08	-20.83	65.91	44.81	0.07	0.20	QP
2	0.15160	28.37	-27.54	55.91	28.10	0.07	0.20	AVERAGE
3	0.16677	41.62	-23.50	65.12	41.35	0.07	0.20	QP
4	0.16677	20.97	-34.15	55.12	20.70	0.07	0.20	AVERAGE
5	1.898	30.50	-25.50	56.00	30.27	0.05	0.18	QP
6	1.898	19.59	-26.41	46.00	19.36	0.05	0.18	AVERAGE
7	4.027	30.82	-25.18	56.00	30.42	0.10	0.30	QP
8	4.027	16.44	-29.56	46.00	16.04	0.10	0.30	AVERAGE
9	13.267	18.89	-31.11	50.00	18.00	0.49	0.40	AVERAGE
10	13.267	23.82	-36.18	60.00	22.93	0.49	0.40	QP
11	18.920	20.38	-29.62	50.00	19.11	0.77	0.50	AVERAGE
12	18.920	27.27	-32.73	60.00	26.00	0.77	0.50	QP

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

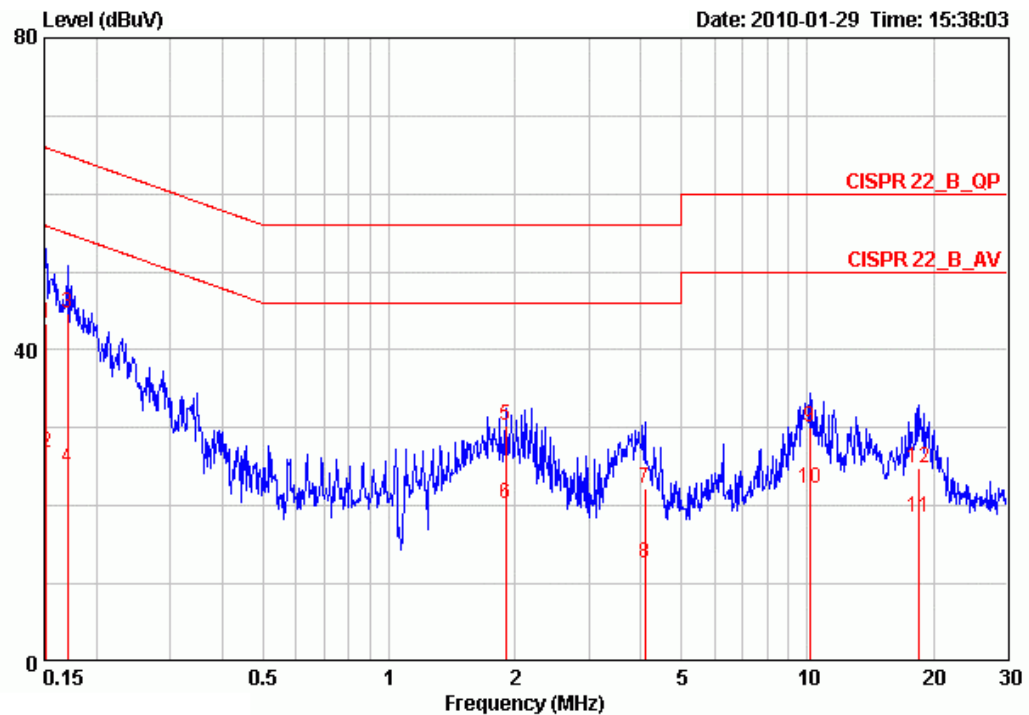

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	43.27	-22.64	65.91	42.97	0.10	0.20	QP
2	0.15160	26.88	-29.03	55.91	26.58	0.10	0.20	AVERAGE
3	0.17034	44.67	-20.27	64.94	44.38	0.09	0.20	QP
4	0.17034	24.88	-30.06	54.94	24.59	0.09	0.20	AVERAGE
5	1.898	30.27	-25.73	56.00	30.00	0.09	0.18	QP
6	1.898	20.28	-25.72	46.00	20.01	0.09	0.18	AVERAGE
7	4.092	22.23	-33.77	56.00	21.78	0.15	0.30	QP
8	4.092	12.68	-33.32	46.00	12.23	0.15	0.30	AVERAGE
9	10.125	30.12	-29.88	60.00	29.40	0.39	0.32	QP
10	10.125	22.34	-27.66	50.00	21.62	0.39	0.32	AVERAGE
11	18.426	18.47	-31.53	50.00	17.23	0.74	0.50	AVERAGE
12	18.426	24.83	-35.17	60.00	23.59	0.74	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz
VB	3MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

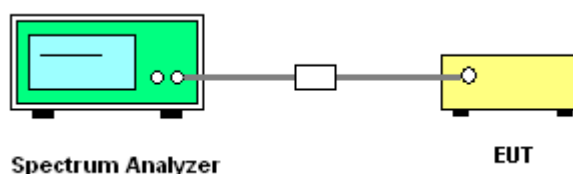

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	21°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	IEEE 802.11a/b/g, IEEE 802.11a/g Turbo

<For 2.4GHz Band>:

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.78	30.00	Complies
6	2437 MHz	18.17	30.00	Complies
11	2462 MHz	16.02	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.86	30.00	Complies
6	2437 MHz	18.26	30.00	Complies
11	2462 MHz	15.00	30.00	Complies

Configuration IEEE 802.11g Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
6	2437 MHz	18.07	30.00	Complies

<For 5GHz Band>:

Configuration IEEE 802.11a


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	16.74	30.00	Complies
157	5785 MHz	16.68	30.00	Complies
165	5825 MHz	16.83	30.00	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
152	5760 MHz	16.48	30.00	Complies
160	5800 MHz	16.55	30.00	Complies


<For 2.4GHz Band>:

Conducted Output Power Plot on Configuration IEEE 802.11b / 2412 MHz

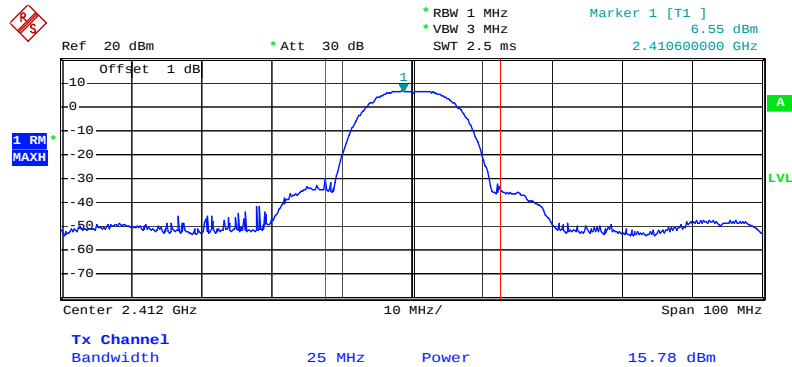


Date: 22.JAN.2010 09:27:44

Conducted Output Power Plot on Configuration IEEE 802.11b / 2437 MHz

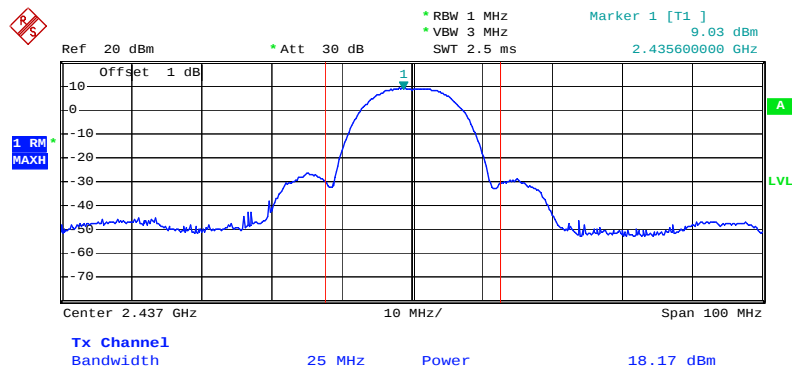


Date: 22.JAN.2010 09:28:37

Conducted Output Power Plot on Configuration IEEE 802.11b / 2462 MHz

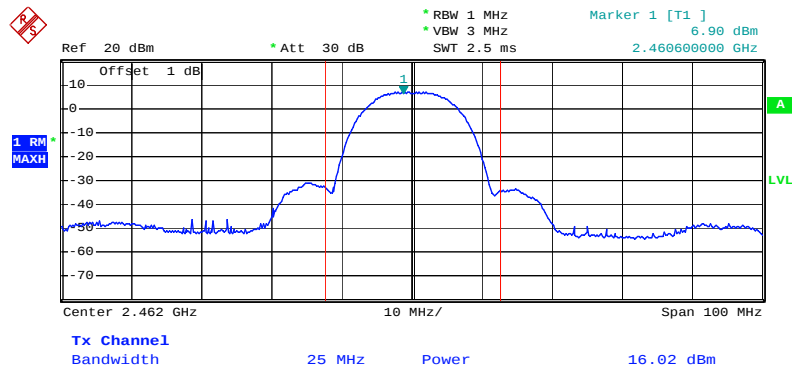

Date: 22.JAN.2010 09:29:20

Conducted Output Power Plot on Configuration IEEE 802.11g / 2412 MHz

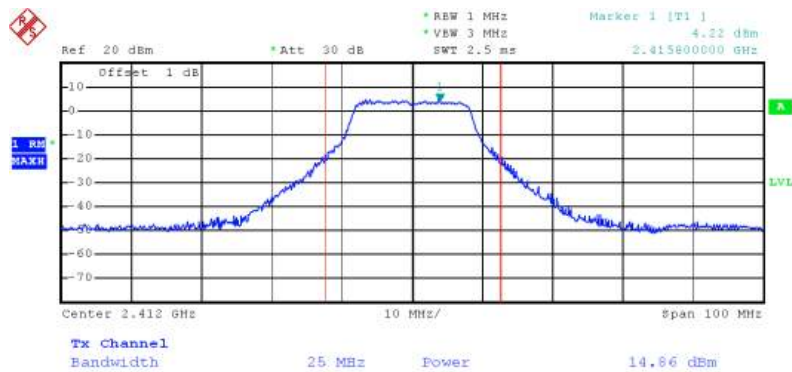


Date: 22.JAN.2010 09:33:36

Conducted Output Power Plot on Configuration IEEE 802.11g / 2437 MHz



Date: 22.JAN.2010 09:32:07

Conducted Output Power Plot on Configuration IEEE 802.11g / 2462 MHz

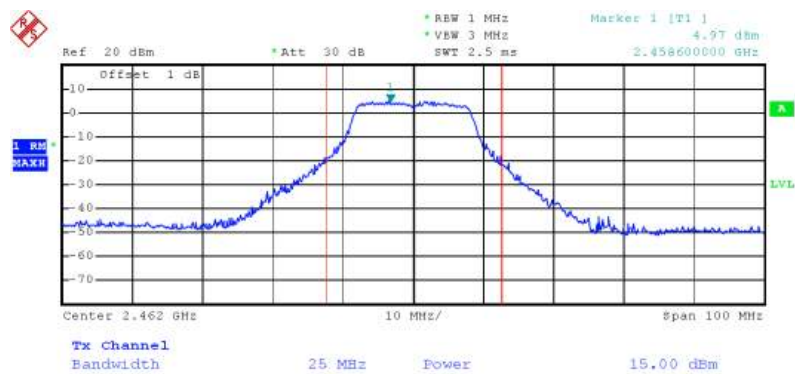

Date: 22.JAN.2010 09:30:42


Conducted Output Power Plot on Configuration IEEE 802.11g Turbo / 2462 MHz



Date: 22.JAN.2010 09:53:54


<For 5GHz Band>:

Conducted Output Power Plot on Configuration IEEE 802.11a / 5745 MHz

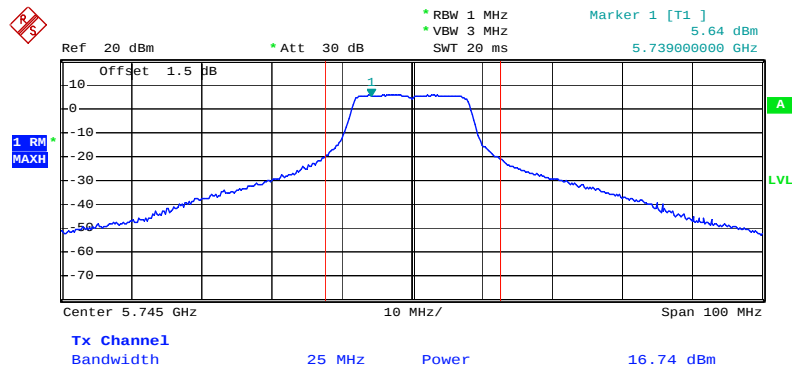


Date: 22.JAN.2010 09:44:32

Conducted Output Power Plot on Configuration IEEE 802.11a / 5785 MHz

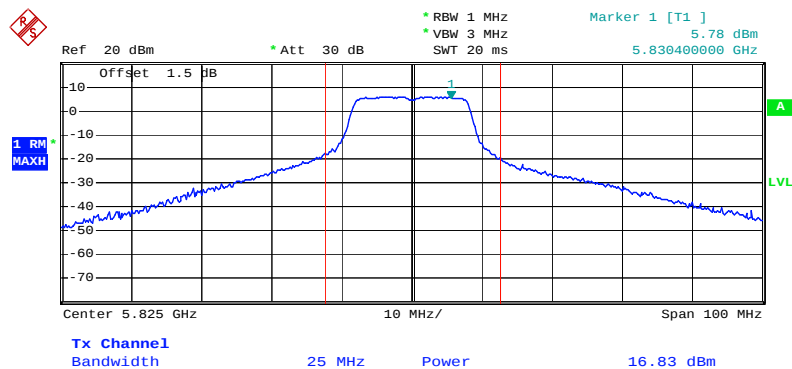


Date: 22.JAN.2010 09:46:44

Conducted Output Power Plot on Configuration IEEE 802.11a / 5825 MHz

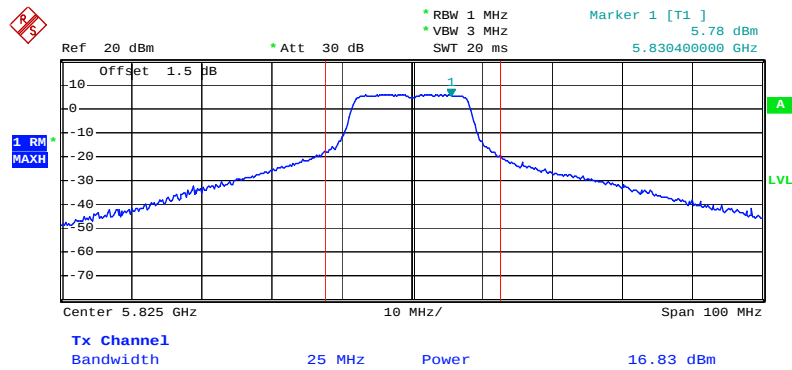


Date: 22.JAN.2010 09:46:44

Conducted Output Power Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

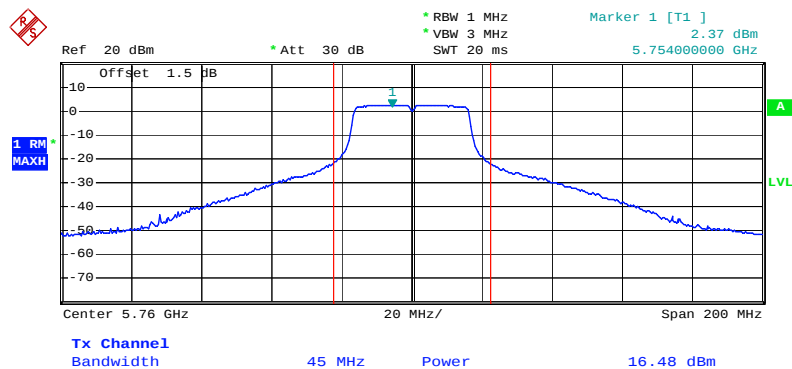

Date: 22.JAN.2010 09:49:29

Conducted Output Power Plot on Configuration IEEE 802.11a Turbo / 5800 MHz

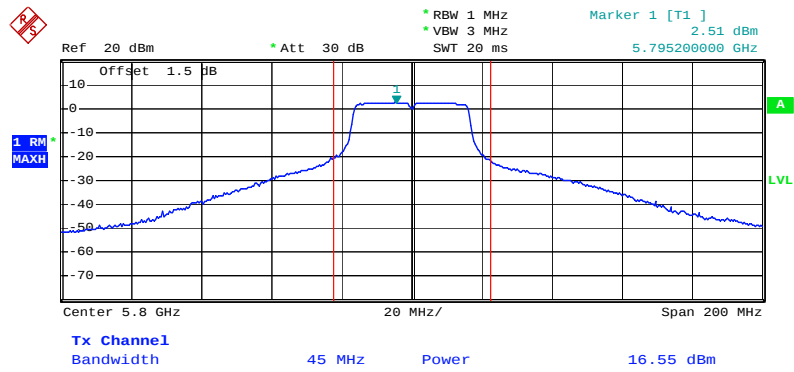

Date: 22.JAN.2010 09:48:04

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.3.4. Test Setup Layout

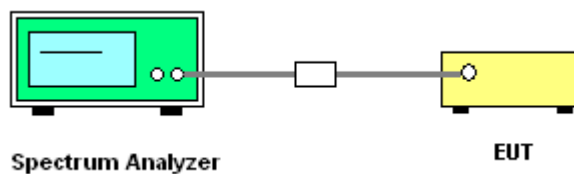

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	21°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	IEEE 802.11a/b/g

<For 2.4GHz Band >:

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.95	8.00	Complies
6	2437 MHz	-3.98	8.00	Complies
11	2462 MHz	-7.77	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-11.53	8.00	Complies
6	2437 MHz	-6.86	8.00	Complies
11	2462 MHz	-2.31	8.00	Complies

Configuration IEEE 802.11g Turbo

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
6	2437 MHz	-5.17	8.00	Complies

<For 5GHz Band >:

Configuration IEEE 802.11a


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-13.17	8.00	Complies
157	5785 MHz	-6.86	8.00	Complies
165	5825 MHz	-7.01	8.00	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
152	5760 MHz	-8.02	8.00	Complies
160	5800 MHz	-6.53	8.00	Complies


<For 2.4GHz Band >:

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

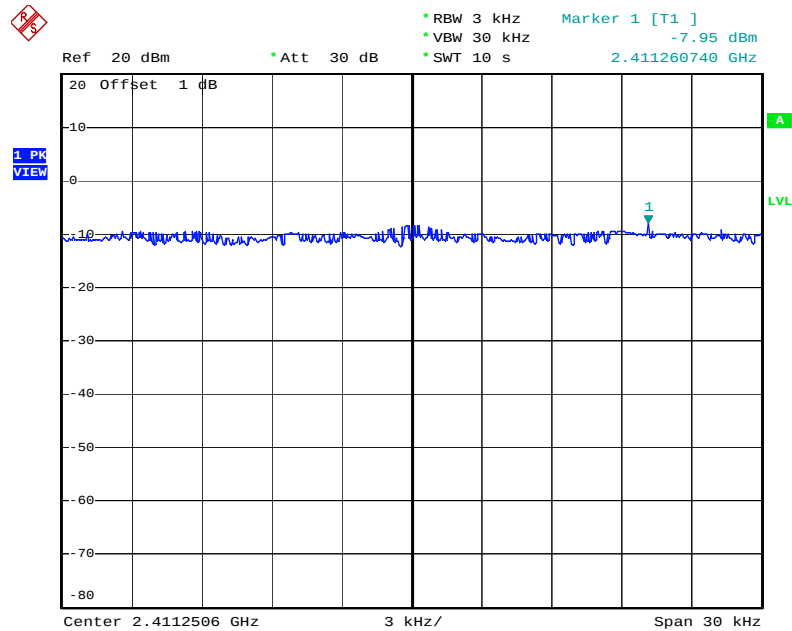


Date: 22.JAN.2010 09:59:32

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

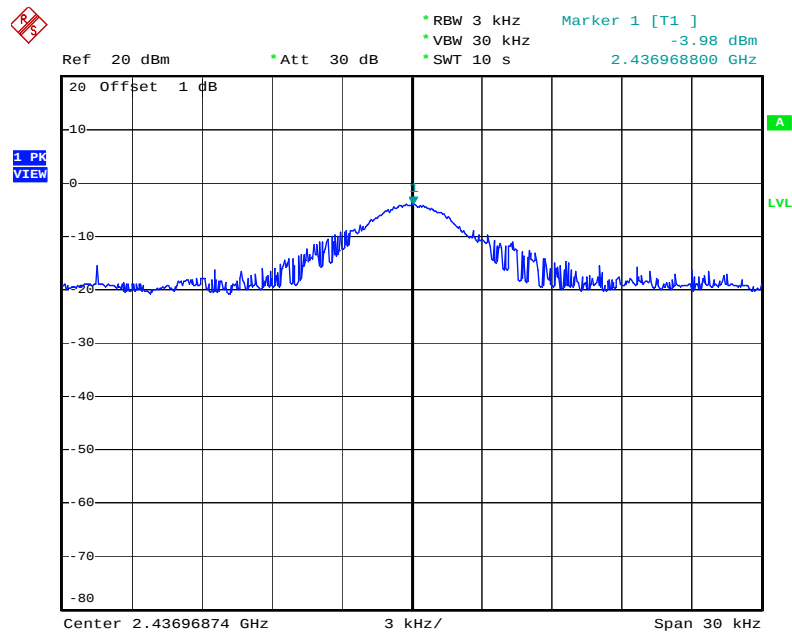


Date: 22.JAN.2010 10:02:52

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

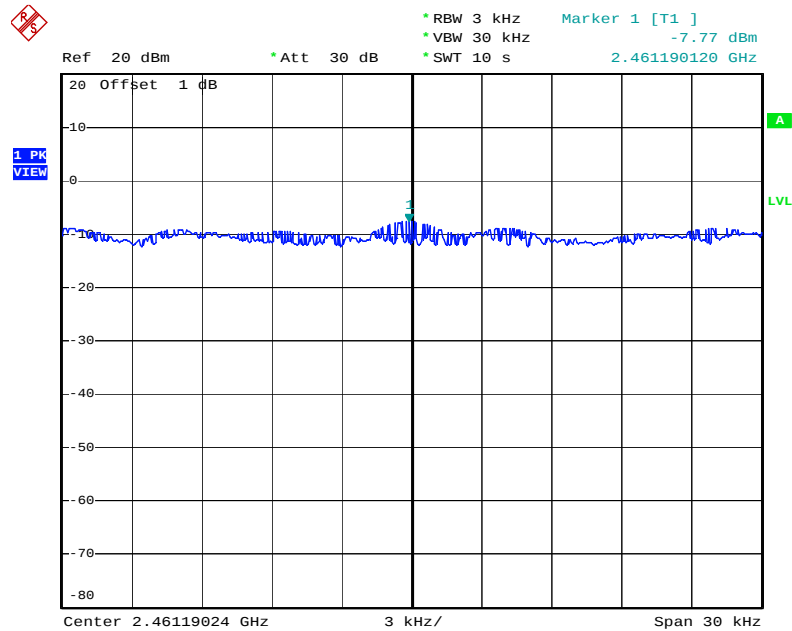


Date: 22.JAN.2010 10:04:58

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

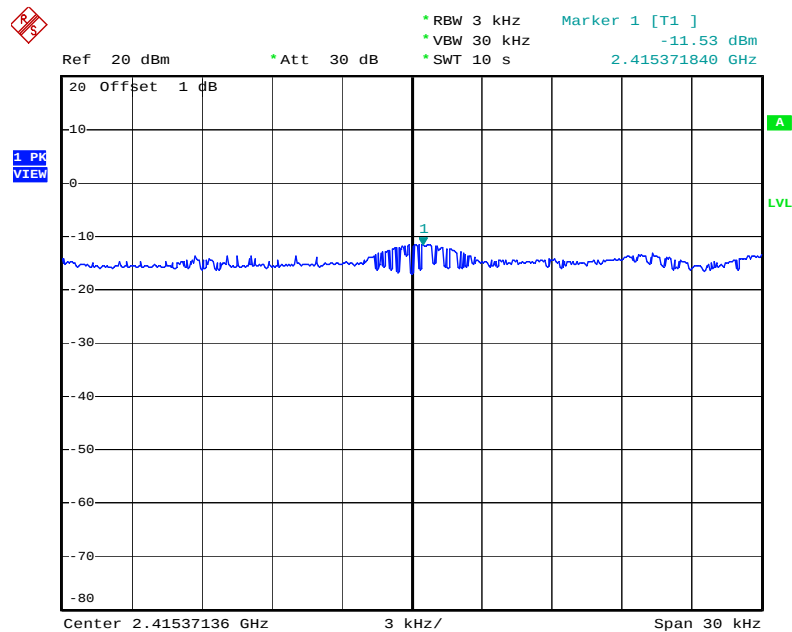


Date: 22.JAN.2010 10:12:37

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

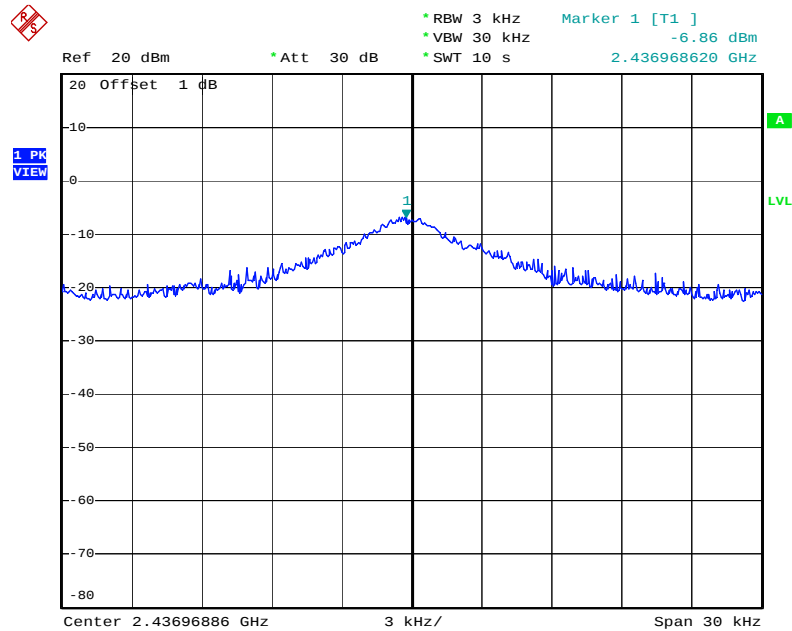


Date: 22.JAN.2010 10:10:23

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

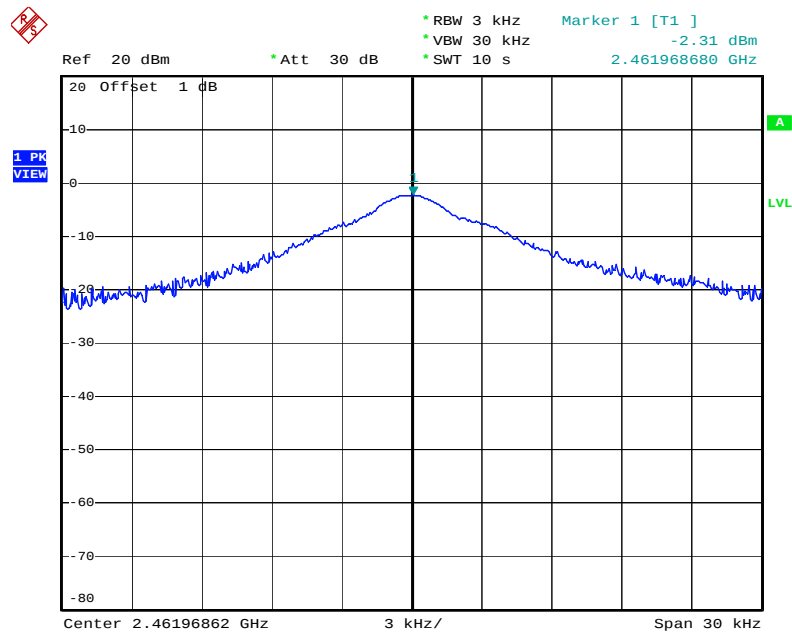

Date: 22.JAN.2010 10:08:20


Power Density Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

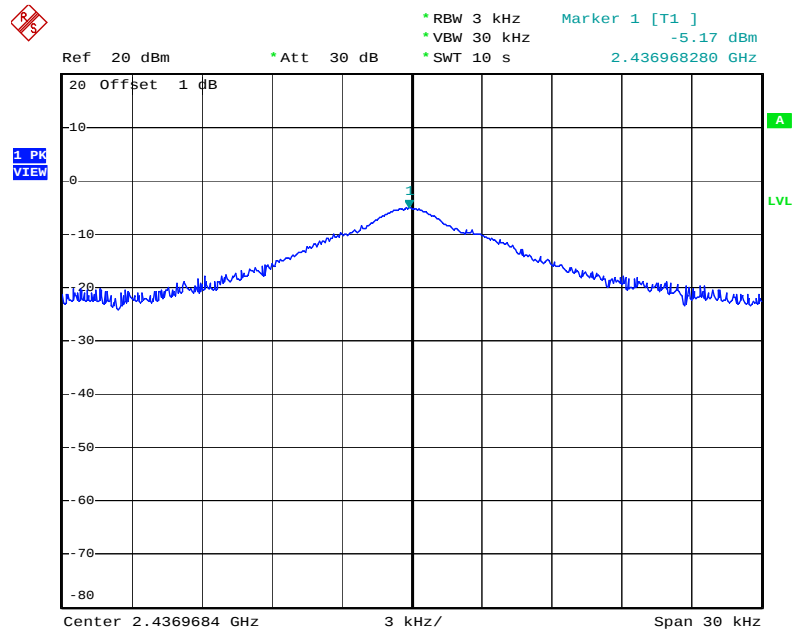

Date: 22.JAN.2010 10:16:10


<For 5GHz Band >:

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz

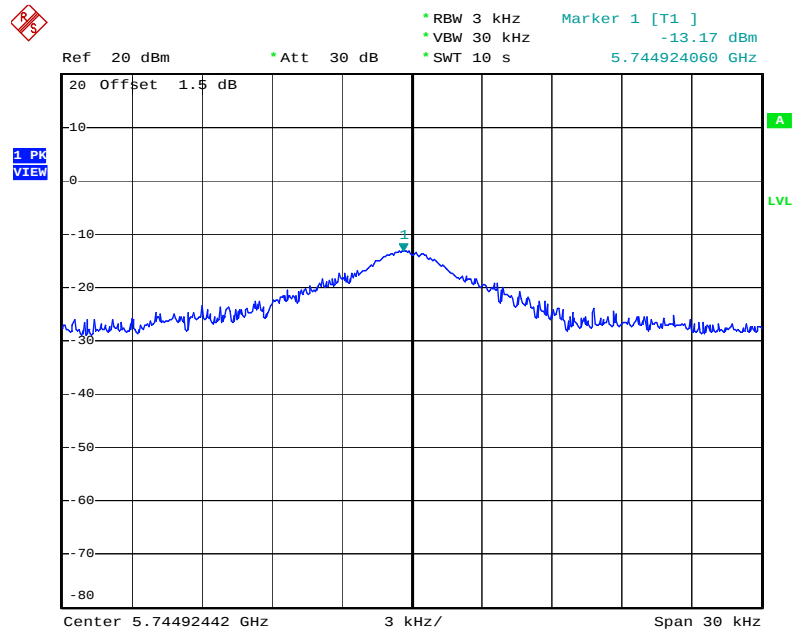


Date: 22.JAN.2010 10:31:21

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz

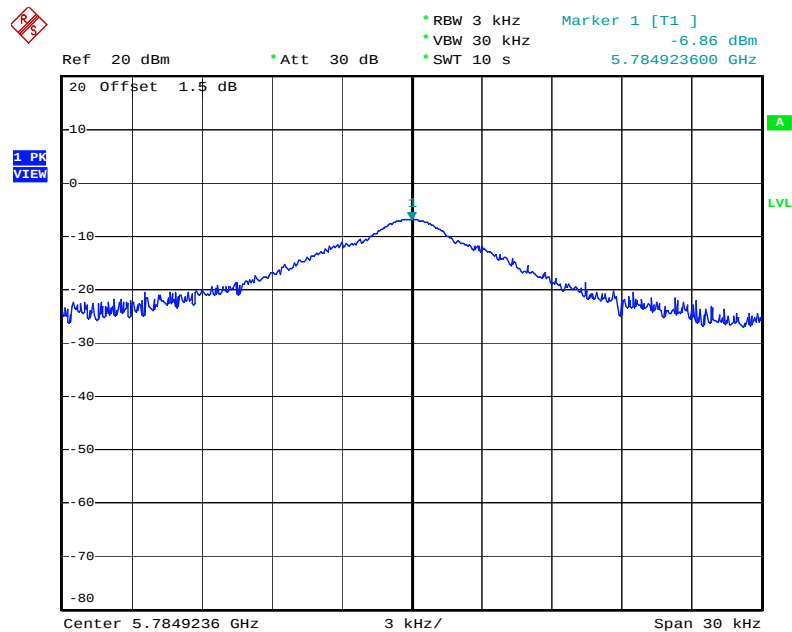


Date: 22.JAN.2010 10:33:14

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz

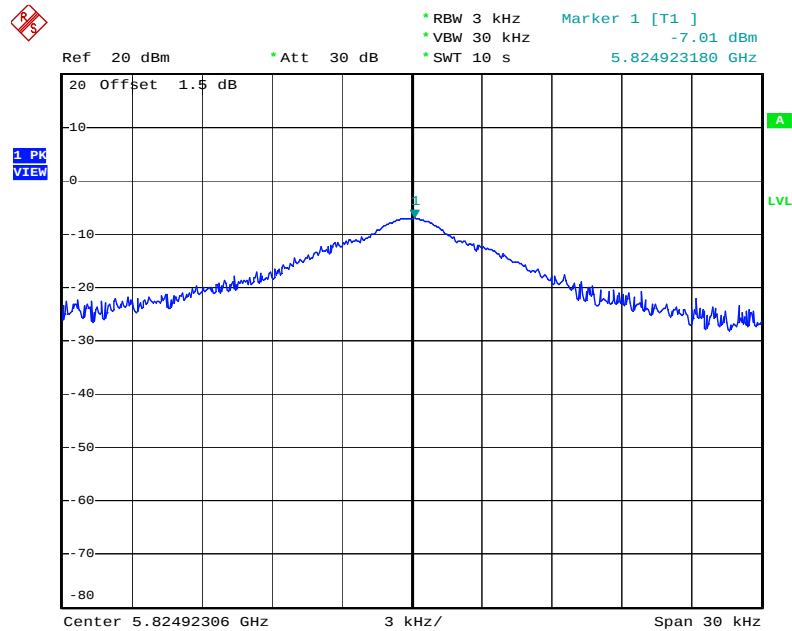


Date: 22.JAN.2010 10:35:07

Power Density Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

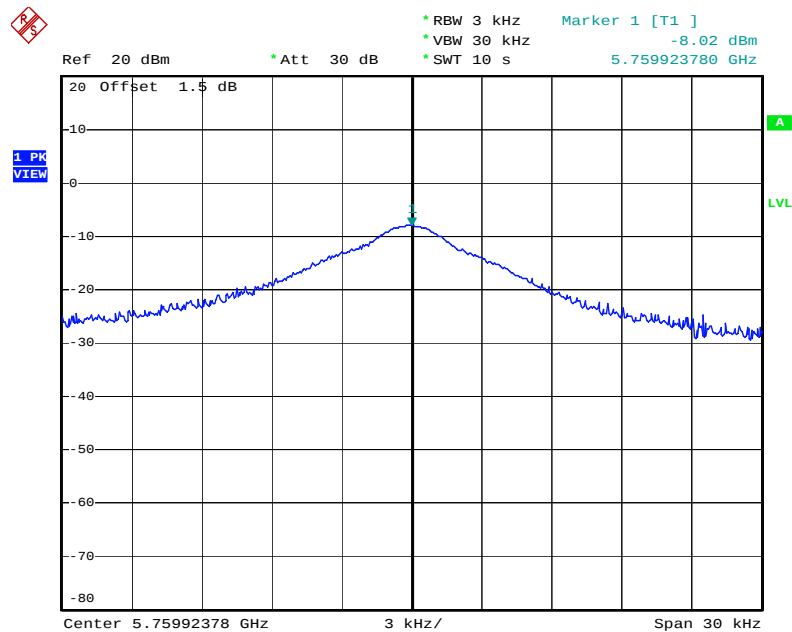

Date: 22.JAN.2010 10:25:37

Power Density Plot on Configuration IEEE 802.11a Turbo / 5800 MHz

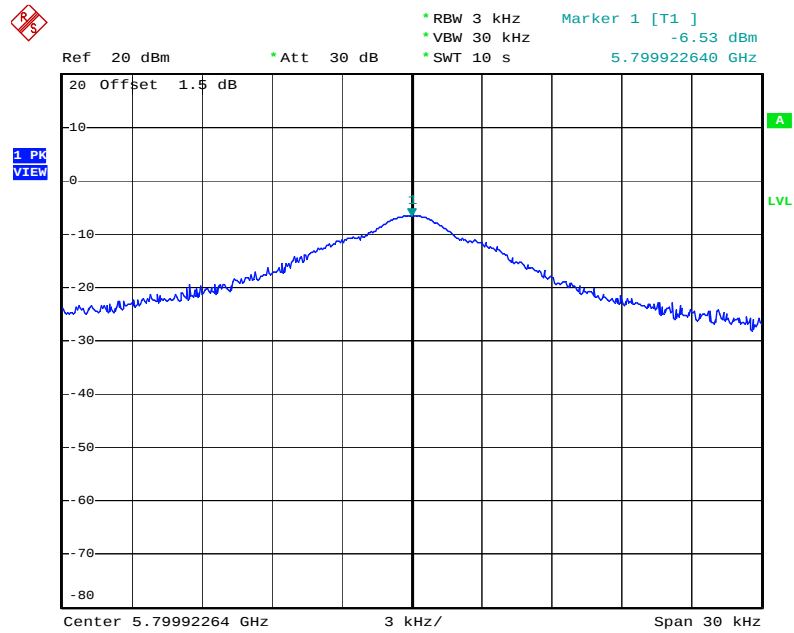

Date: 22.JAN.2010 10:27:41

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

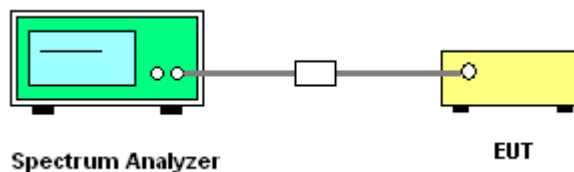

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	21°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11a/b/g, IEEE 802.11a/g Turbo

<For 2.4GHz Band>:

Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	11.08	15.56	500	Complies
6	2437 MHz	12.00	15.68	500	Complies
11	2462 MHz	12.56	15.56	500	Complies

Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.40	16.52	500	Complies
11	2462 MHz	16.44	16.56	500	Complies

Configuration IEEE 802.11g Turbo

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
6	2437 MHz	31.36	32.96	500	Complies

<For 5GHz Band>:

Configuration IEEE 802.11a


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.36	16.56	500	Complies
157	5785 MHz	16.36	16.52	500	Complies
165	5825 MHz	16.36	16.56	500	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
152	5760 MHz	32.56	32.96	500	Complies
160	5800 MHz	32.64	32.96	500	Complies


<For 2.4GHz Band >:

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

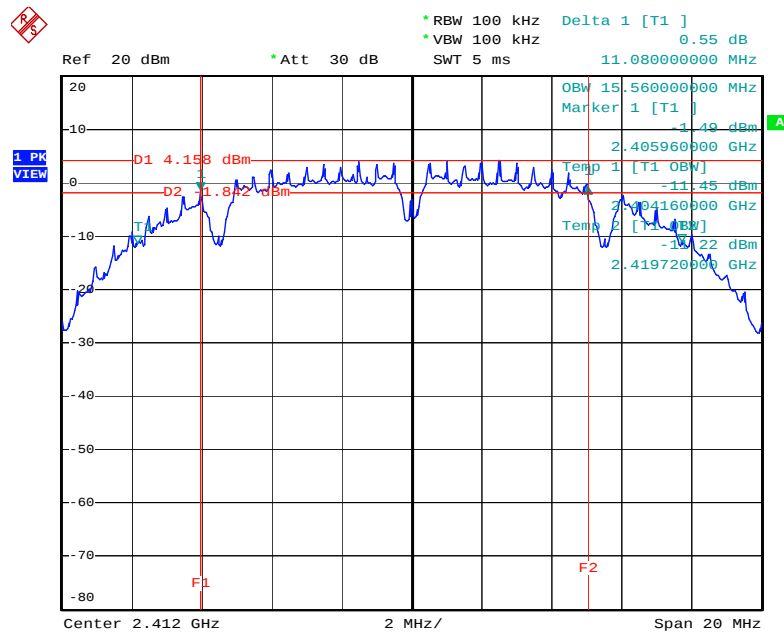


Date: 22.JAN.2010 09:58:05

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

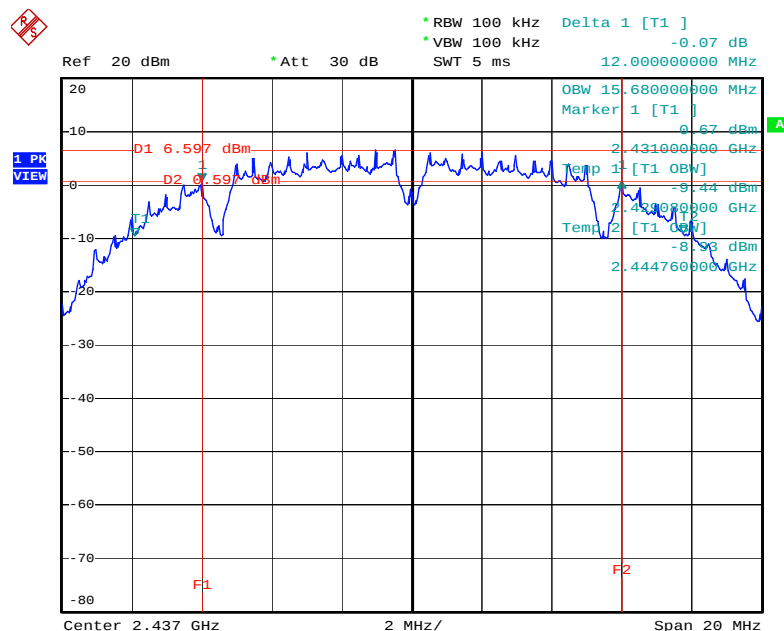


Date: 22.JAN.2010 10:01:24

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

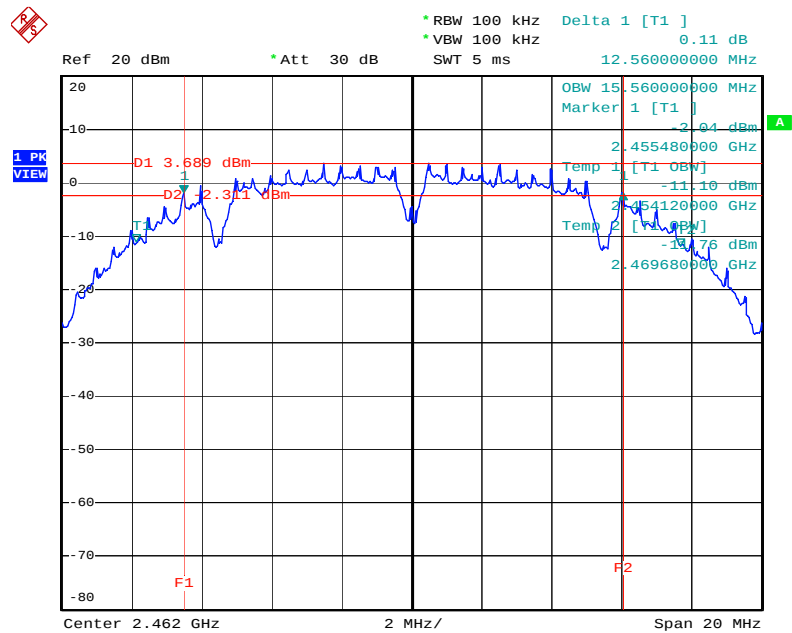


Date: 22.JAN.2010 10:03:31

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

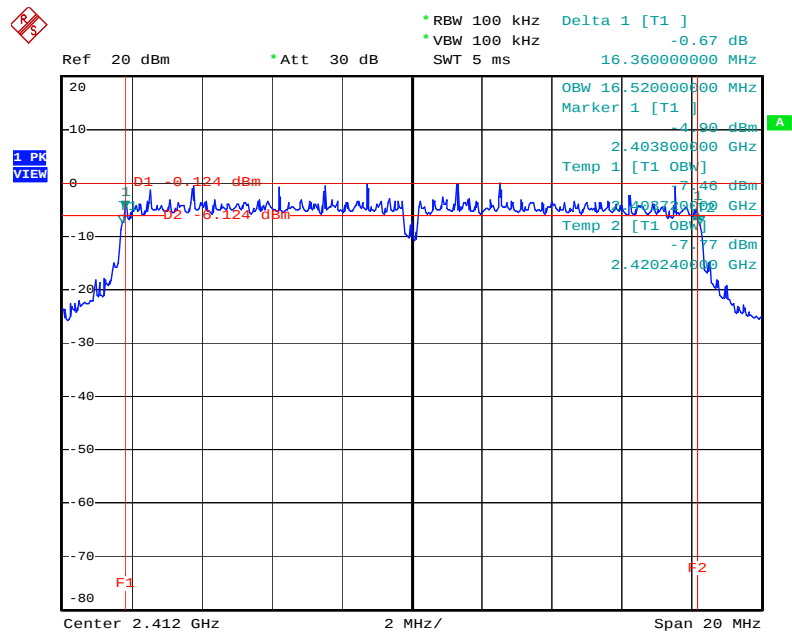


Date: 22.JAN.2010 10:11:10

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

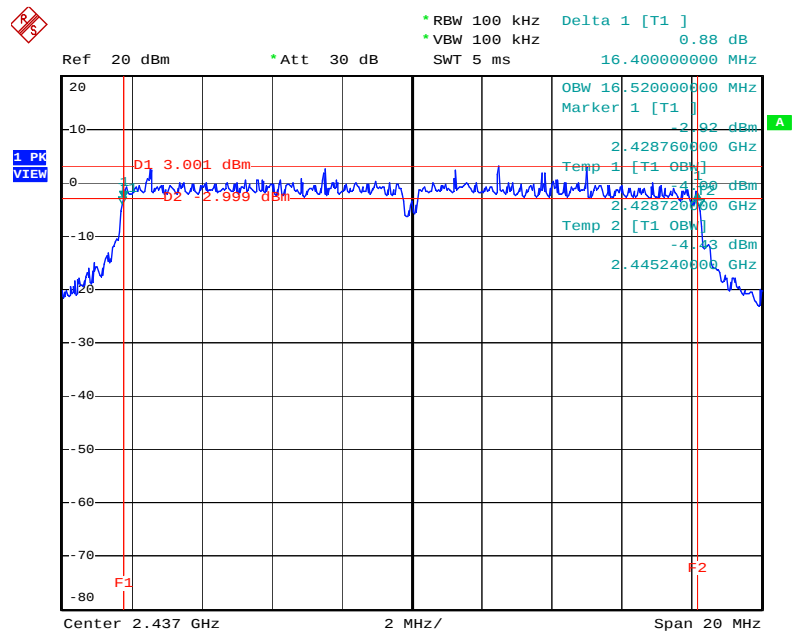


Date: 22.JAN.2010 10:08:55

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

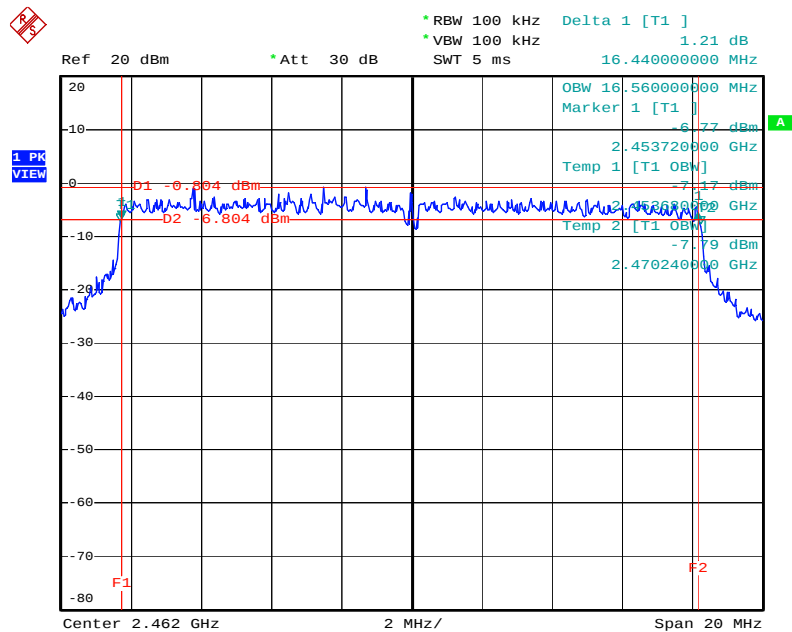

Date: 22.JAN.2010 10:06:52


6 dB Bandwidth Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

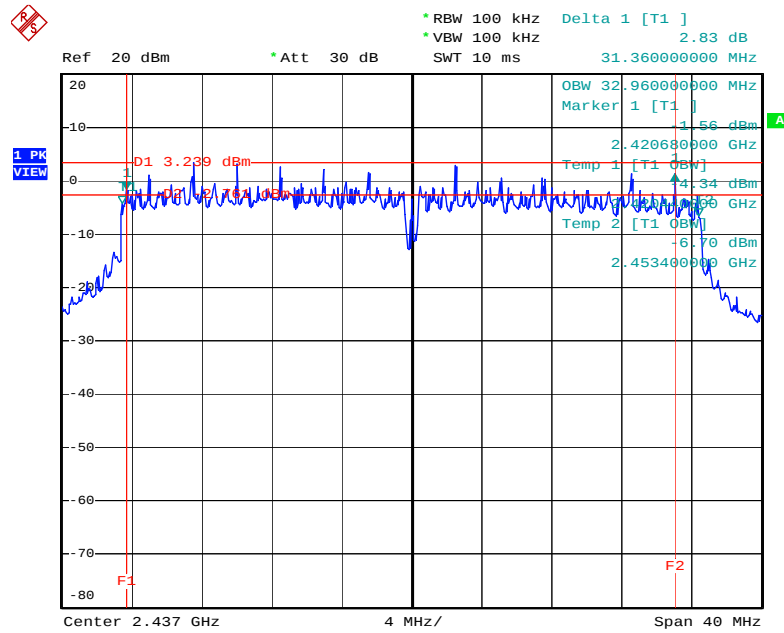

Date: 22.JAN.2010 10:14:43


<For 5GHz Band >:

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz

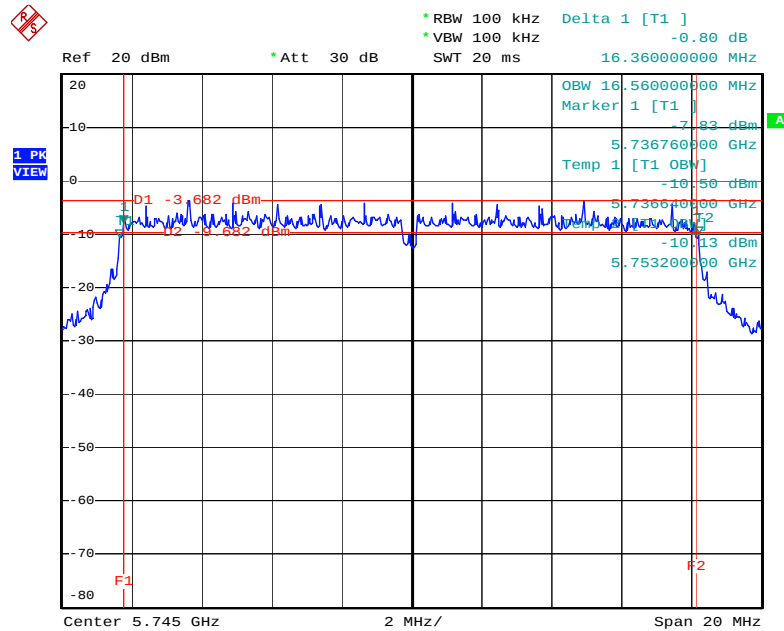


Date: 22.JAN.2010 10:29:55

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz

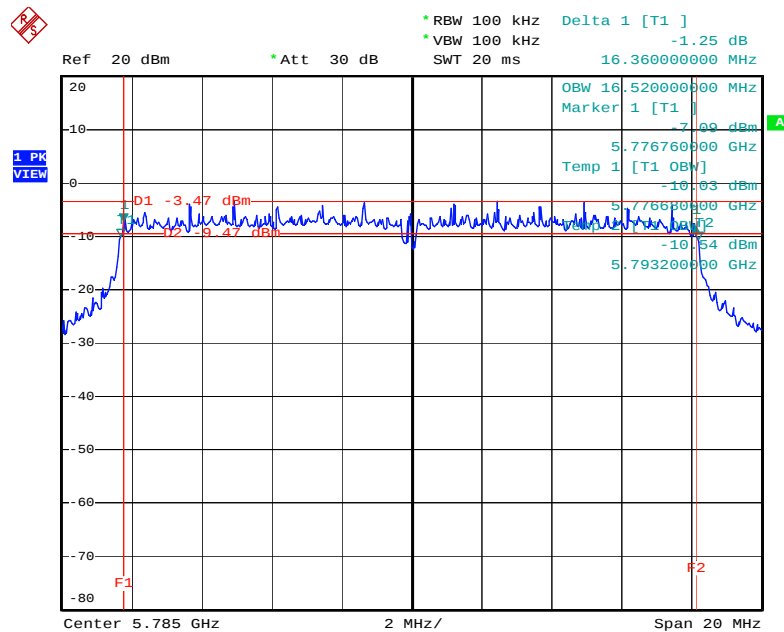


Date: 22.JAN.2010 10:31:46

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz

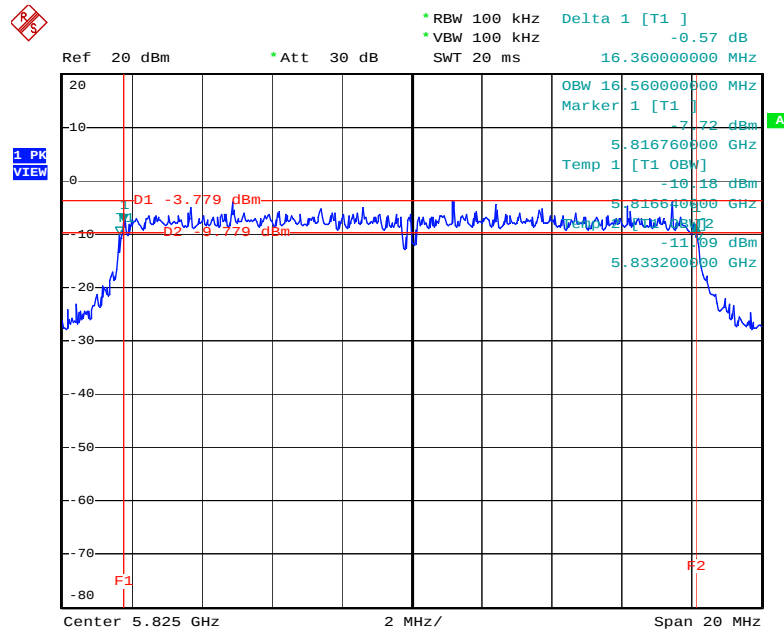

Date: 22.JAN.2010 10:33:40

6 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

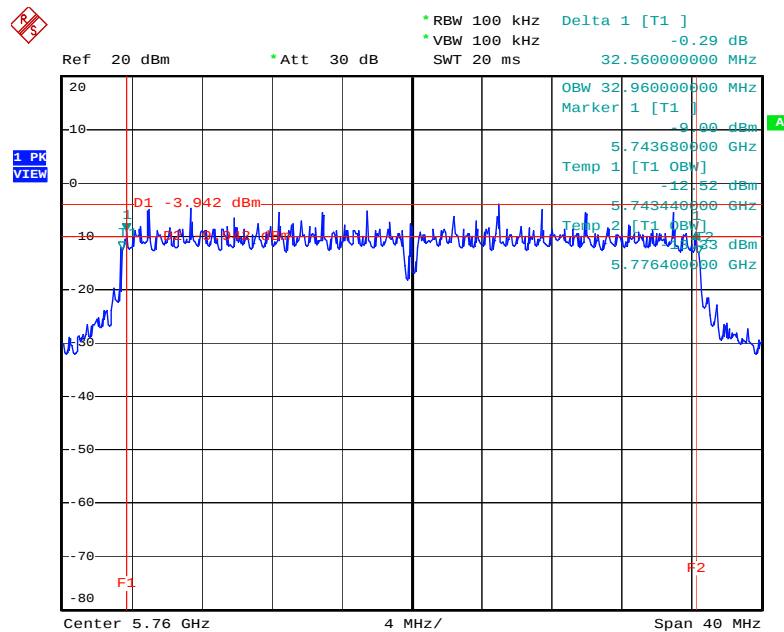

Date: 22.JAN.2010 10:24:10



1 PK VIEW

Ref 20 dBm Att 30 dB SWT 20 ms

Center 5.8 GHz 4 MHz/ Span 40 MHz

OBW 32.96000000 MHz
Marker 1 [T1]
-9.70 dBm
5.783600000 GHz
Temp 1 [T1 OBW]
-11.50 dBm
5.783440000 GHz
Temp 2 [T1 OBW]
-12.00 dBm
5.816400000 GHz

D1 -4.188 dBm

F1 F2

Date: 22.JAN.2010 10:26:14

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

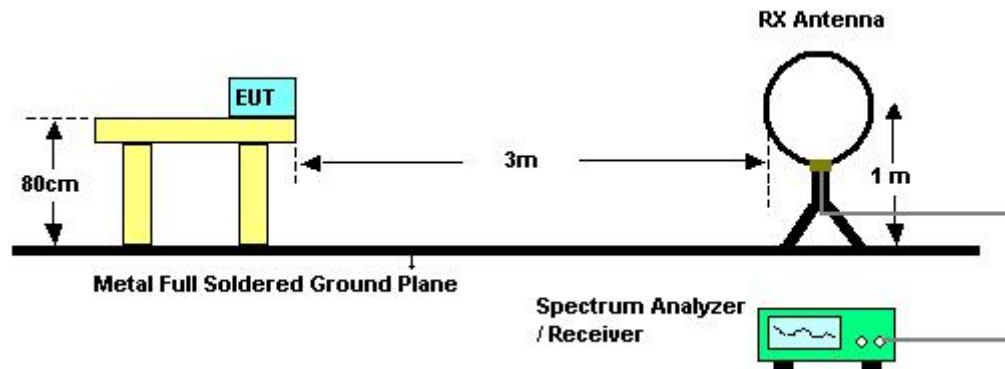

For radiated emissions above 30MHz

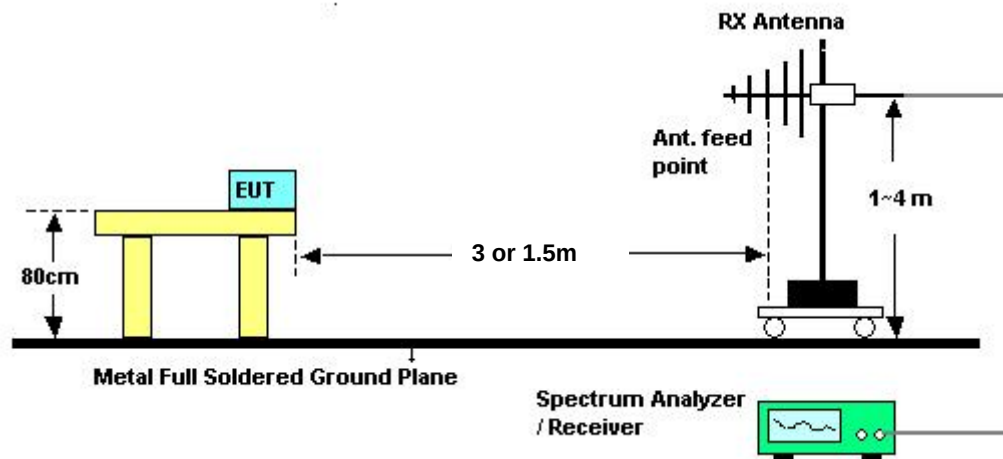

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang		
Evaluating Date	Jan. 22, 2010		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

<For Antenna 2>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

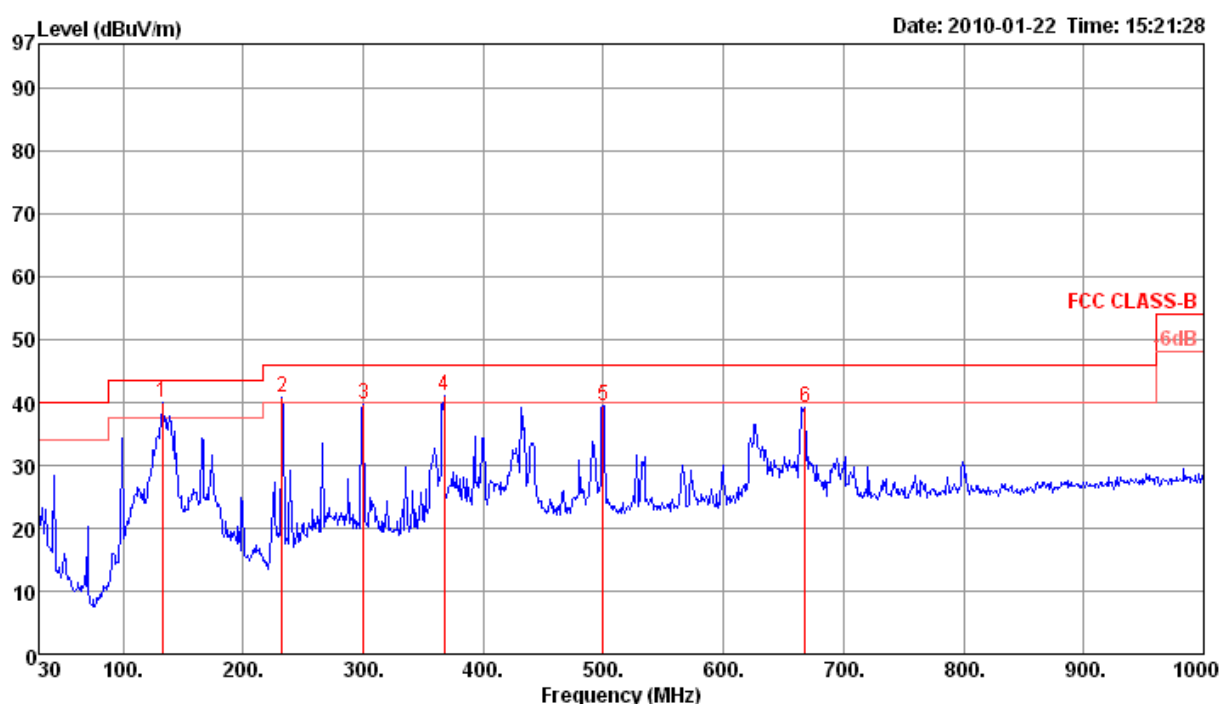

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	132.82	39.97	43.50	-3.53	53.79	1.33	27.43	12.28	0	100	Peak	HORIZONTAL
2 !	232.73	40.79	46.00	-5.21	54.51	1.83	27.03	11.48	0	100	Peak	HORIZONTAL
3	300.63	39.75	46.00	-6.25	51.16	2.10	26.90	13.39	0	100	Peak	HORIZONTAL
4 !	367.56	41.17	46.00	-4.83	51.12	2.24	27.38	15.19	0	100	Peak	HORIZONTAL
5	499.48	39.51	46.00	-6.49	47.29	2.70	28.09	17.61	0	100	Peak	HORIZONTAL
6	668.26	39.16	46.00	-6.84	44.77	3.43	28.03	18.99	0	100	Peak	HORIZONTAL

Vertical

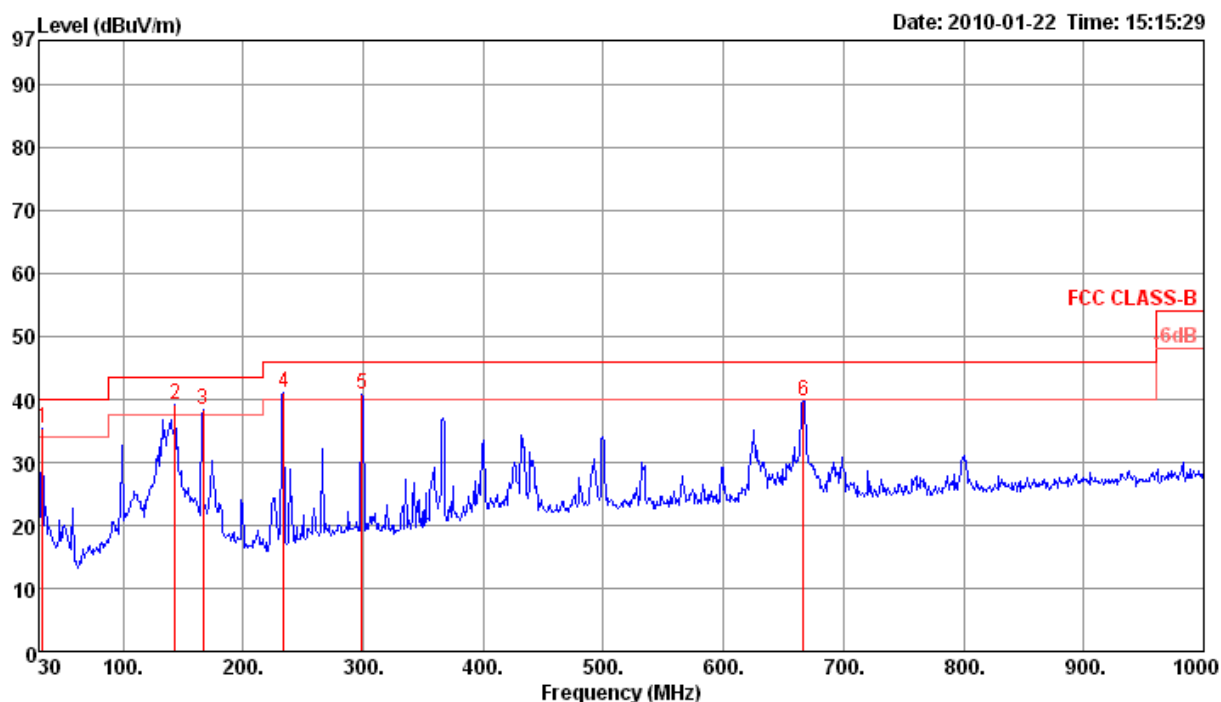

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	32.91	35.47	40.00	-4.53	45.62	0.50	27.80	17.15	0	400	Peak	VERTICAL
2 p	143.49	39.05	43.50	-4.45	52.84	1.42	27.38	12.17	0	400	Peak	VERTICAL
3 !	166.77	38.46	43.50	-5.04	51.66	1.53	27.27	12.54	0	400	Peak	VERTICAL
4 !	233.70	41.17	46.00	-4.83	54.82	1.83	27.03	11.55	0	400	Peak	VERTICAL
5 !	298.69	40.74	46.00	-5.26	52.19	2.10	26.90	13.35	0	400	Peak	VERTICAL
6	666.32	39.77	46.00	-6.23	45.39	3.43	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 3>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

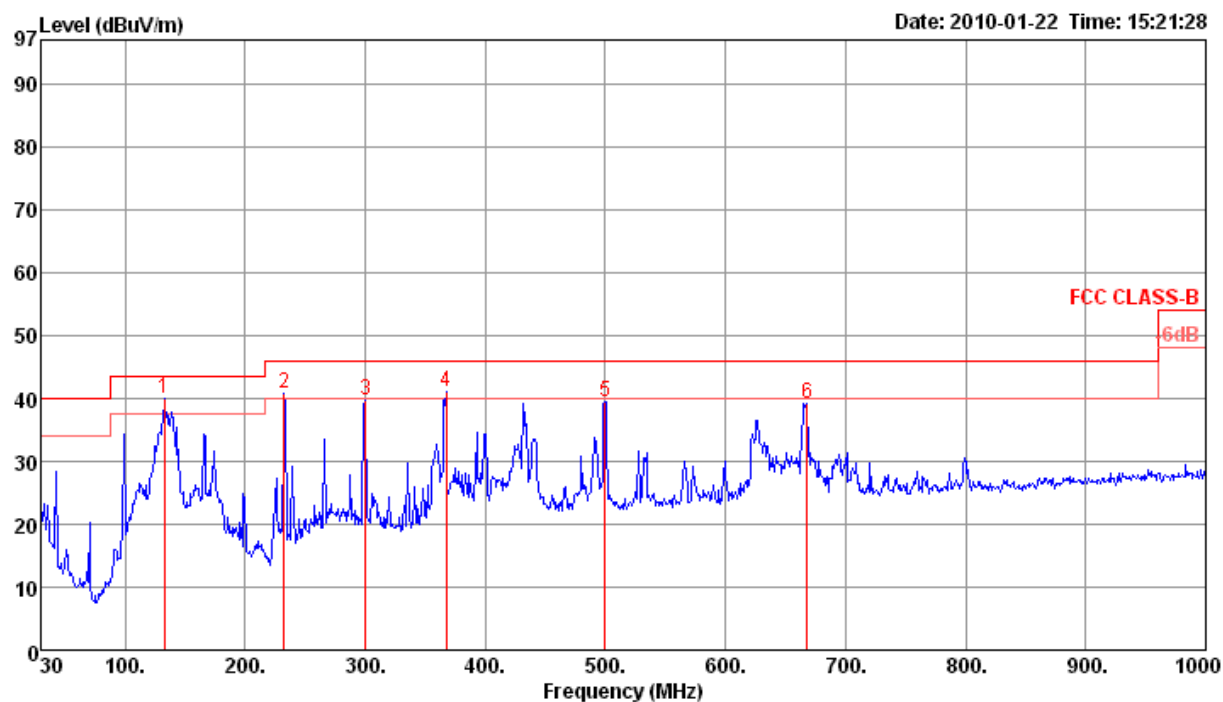

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	132.82	39.97	43.50	-3.53	53.79	1.33	27.43	12.28	0	100	Peak	HORIZONTAL
2 !	232.73	40.79	46.00	-5.21	54.51	1.83	27.03	11.48	0	100	Peak	HORIZONTAL
3	300.63	39.75	46.00	-6.25	51.16	2.10	26.90	13.39	0	100	Peak	HORIZONTAL
4 !	367.56	41.17	46.00	-4.83	51.12	2.24	27.38	15.19	0	100	Peak	HORIZONTAL
5	499.48	39.51	46.00	-6.49	47.29	2.70	28.09	17.61	0	100	Peak	HORIZONTAL
6	668.26	39.16	46.00	-6.84	44.77	3.43	28.03	18.99	0	100	Peak	HORIZONTAL

Vertical

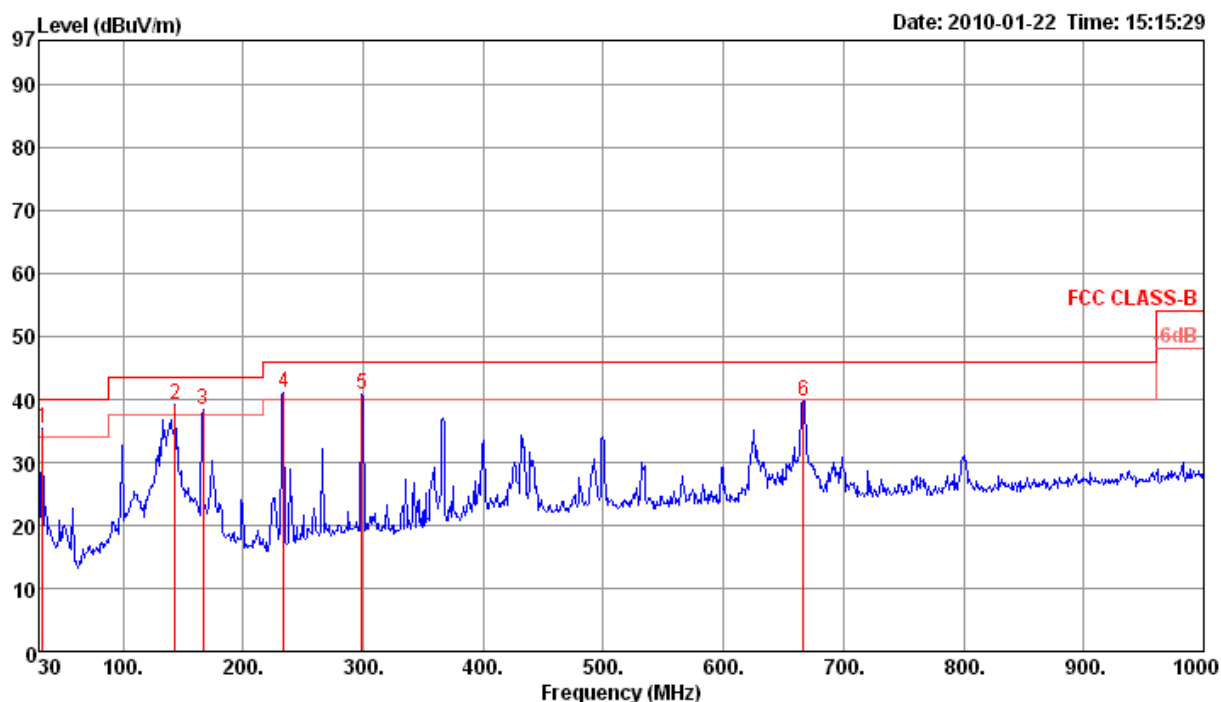

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	32.91	35.47	40.00	-4.53	45.62	0.50	27.80	17.15	0	400	Peak	VERTICAL
2 p	143.49	39.05	43.50	-4.45	52.84	1.42	27.38	12.17	0	400	Peak	VERTICAL
3 !	166.77	38.46	43.50	-5.04	51.66	1.53	27.27	12.54	0	400	Peak	VERTICAL
4 !	233.70	41.17	46.00	-4.83	54.82	1.83	27.03	11.55	0	400	Peak	VERTICAL
5 !	298.69	40.74	46.00	-5.26	52.19	2.10	26.90	13.35	0	400	Peak	VERTICAL
6	666.32	39.77	46.00	-6.23	45.39	3.43	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 4>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

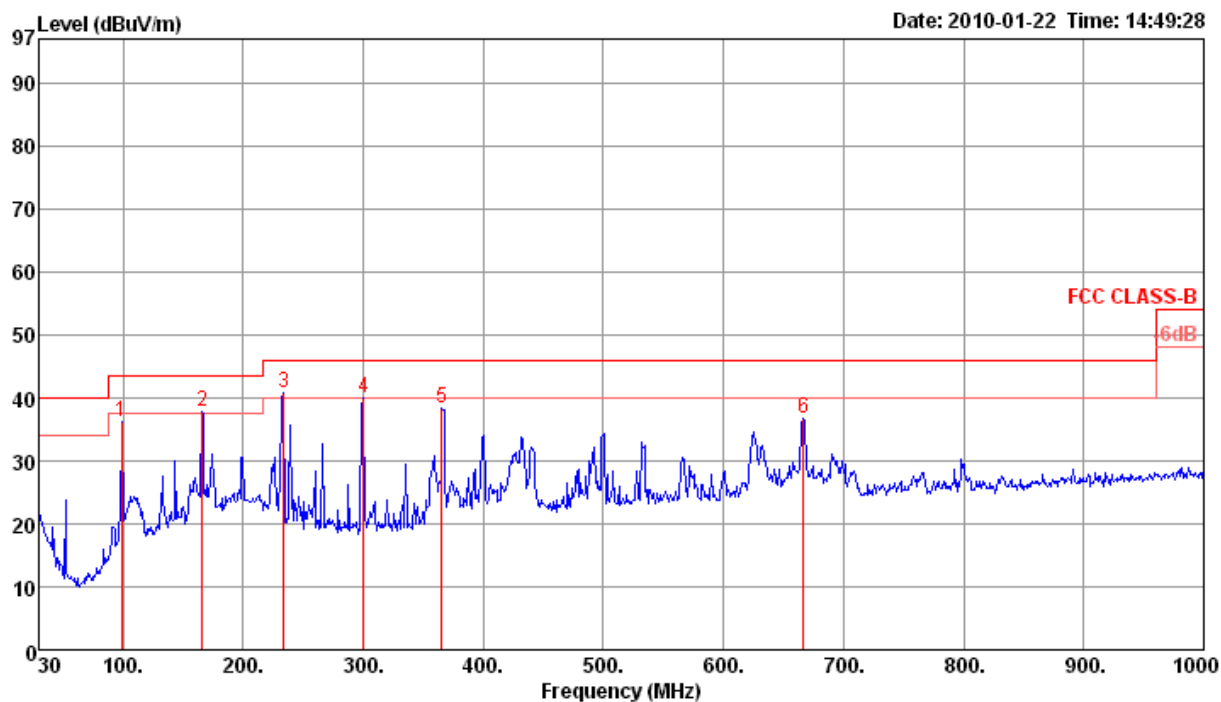

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	98.87	36.20	43.50	-7.30	51.84	1.18	27.61	10.79	0	100	Peak	HORIZONTAL
2	165.80	37.85	43.50	-5.65	51.12	1.53	27.27	12.47	0	100	Peak	HORIZONTAL
3	233.70	40.87	46.00	-5.13	54.52	1.83	27.03	11.55	0	100	Peak	HORIZONTAL
4	300.63	39.89	46.00	-6.11	51.30	2.10	26.90	13.39	0	100	Peak	HORIZONTAL
5	365.62	38.41	46.00	-7.59	48.40	2.23	27.36	15.14	0	100	Peak	HORIZONTAL
6	666.32	36.67	46.00	-9.33	42.29	3.43	28.03	18.98	0	100	Peak	HORIZONTAL

Vertical

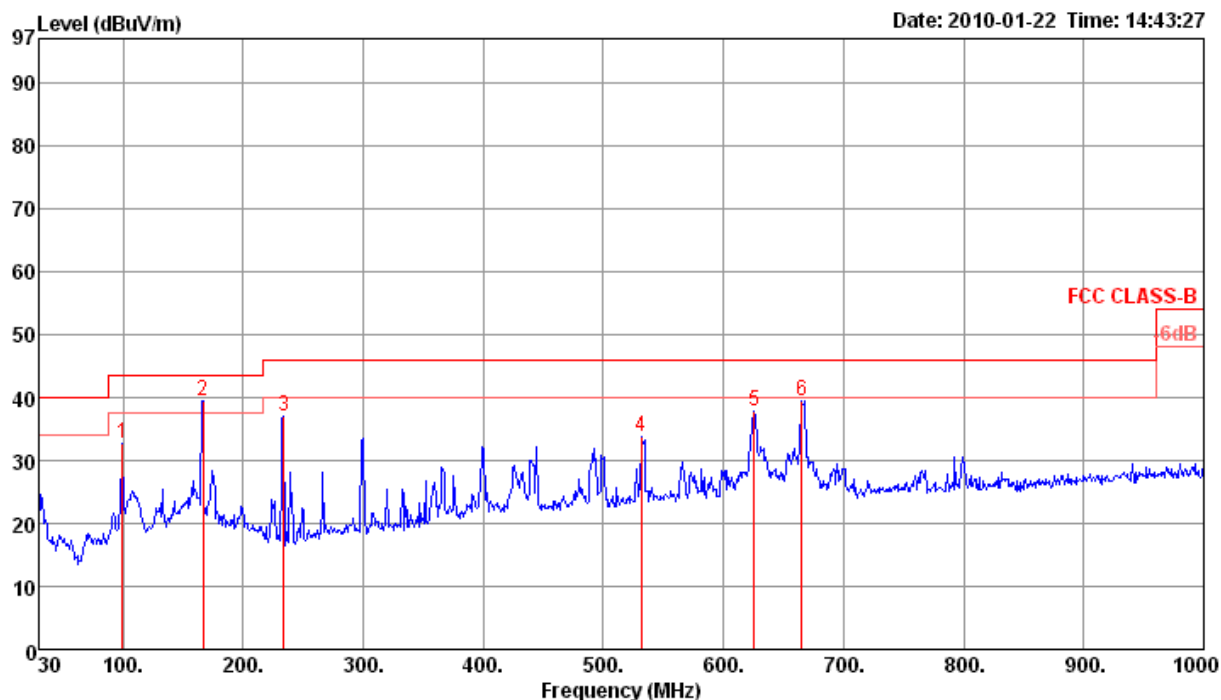

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	99.84	32.56	43.50	-10.94	47.97	1.20	27.60	10.99	0	400	Peak	VERTICAL
2	166.77	39.50	43.50	-4.00	52.70	1.53	27.27	12.54	0	400	Peak	VERTICAL
3	233.70	36.96	46.00	-9.04	50.61	1.83	27.03	11.55	0	400	Peak	VERTICAL
4	531.49	33.75	46.00	-12.25	41.11	2.76	28.10	17.98	0	400	Peak	VERTICAL
5	625.58	37.71	46.00	-8.29	43.88	3.05	28.07	18.85	0	400	Peak	VERTICAL
6	665.35	39.57	46.00	-6.43	45.18	3.44	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 5>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

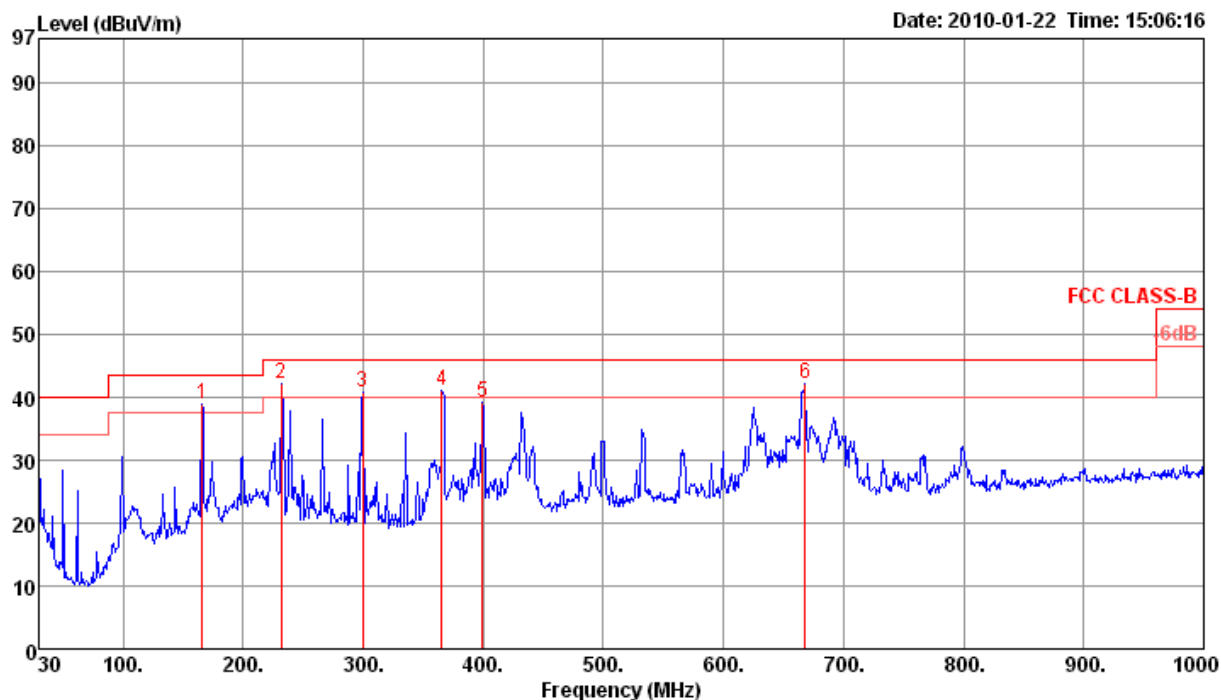

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	165.80	39.01	43.50	-4.49	52.28	1.53	27.27	12.47	0	100	Peak	HORIZONTAL
2 !	231.76	42.04	46.00	-3.96	55.84	1.83	27.04	11.41	0	100	Peak	HORIZONTAL
3 !	299.66	40.68	46.00	-5.32	52.12	2.10	26.90	13.36	0	100	Peak	HORIZONTAL
4 !	365.62	41.19	46.00	-4.81	51.18	2.23	27.36	15.14	0	100	Peak	HORIZONTAL
5	399.57	39.07	46.00	-6.93	48.31	2.30	27.60	16.06	0	100	Peak	HORIZONTAL
6 p	668.26	42.09	46.00	-3.91	47.70	3.43	28.03	18.99	0	100	Peak	HORIZONTAL

Vertical

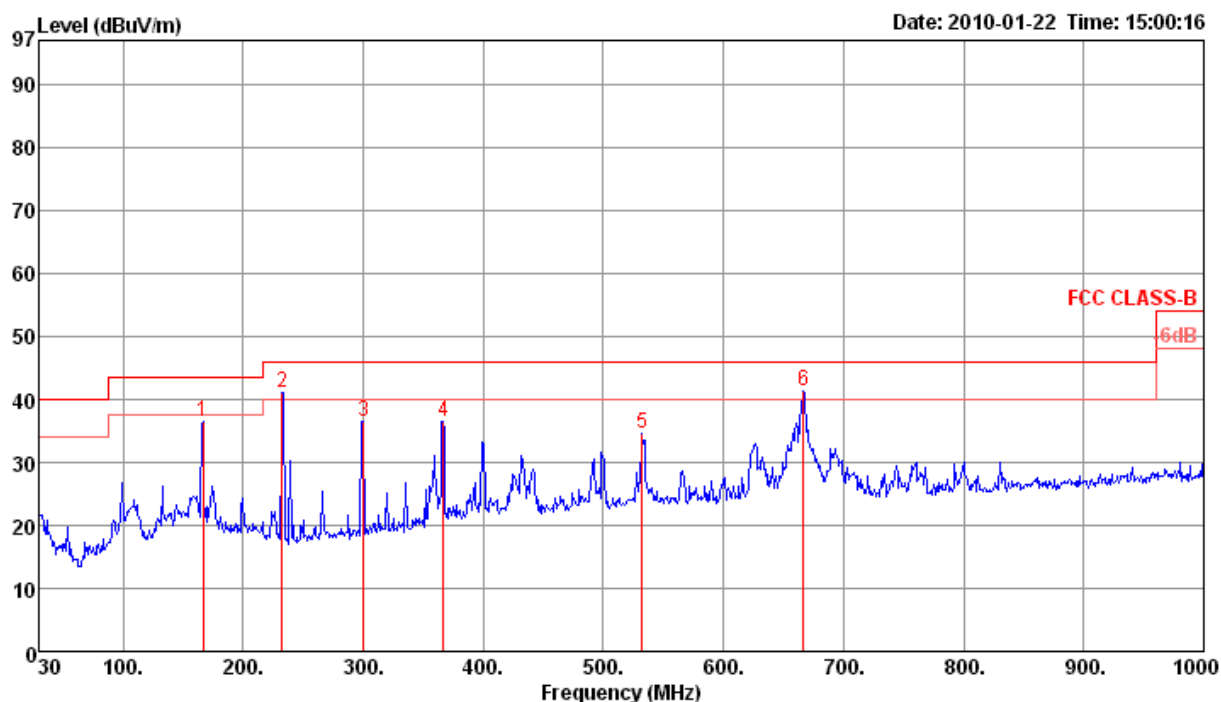

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	166.77	36.52	43.50	-6.98	49.72	1.53	27.27	12.54	0	400	Peak	VERTICAL
2	232.73	41.12	46.00	-4.88	54.84	1.83	27.03	11.48	0	400	Peak	VERTICAL
3	300.63	36.57	46.00	-9.43	47.98	2.10	26.90	13.39	0	400	Peak	VERTICAL
4	366.59	36.42	46.00	-9.58	46.39	2.23	27.37	15.17	0	400	Peak	VERTICAL
5	532.46	34.65	46.00	-11.35	41.99	2.76	28.10	18.00	0	400	Peak	VERTICAL
6	666.32	41.47	46.00	-4.53	47.09	3.43	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Antenna 2 >:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 1 / Ant. 2

Horizontal

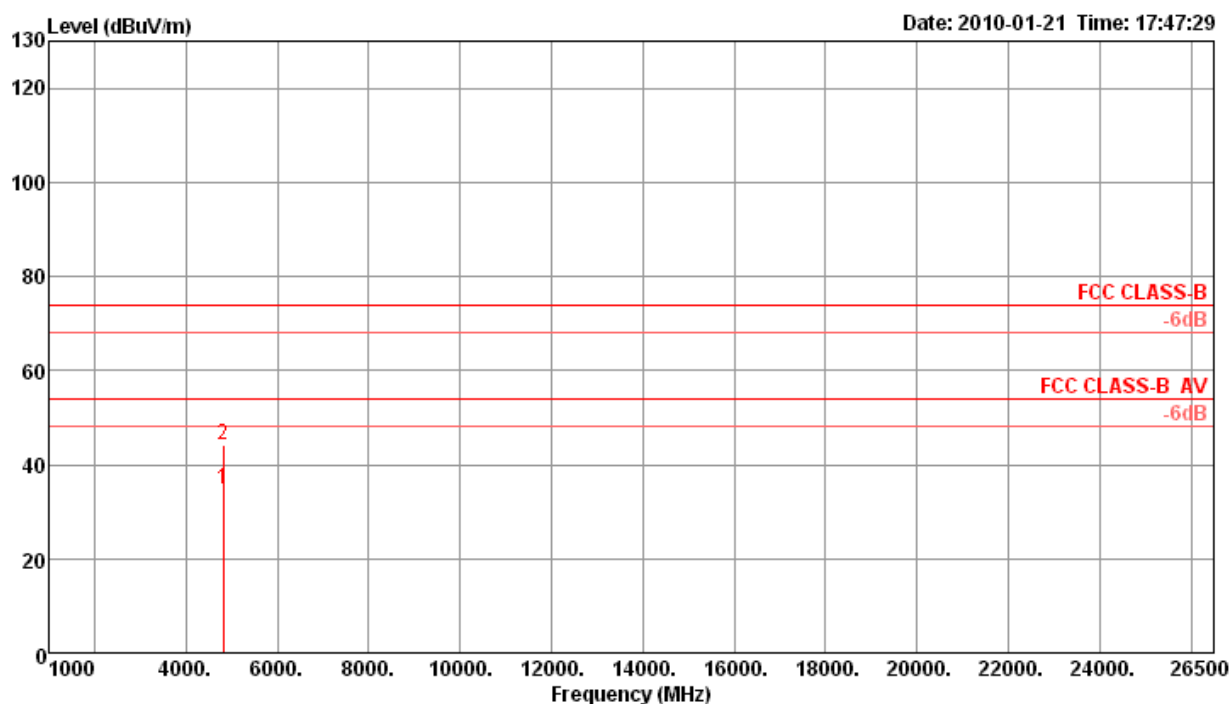

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.91	34.85	54.00	-19.15	34.65	3.00	35.26	32.46	109	100	Average	HORIZONTAL
2 p	4824.05	44.33	74.00	-29.67	44.13	3.00	35.26	32.46	109	100	Peak	HORIZONTAL


Vertical

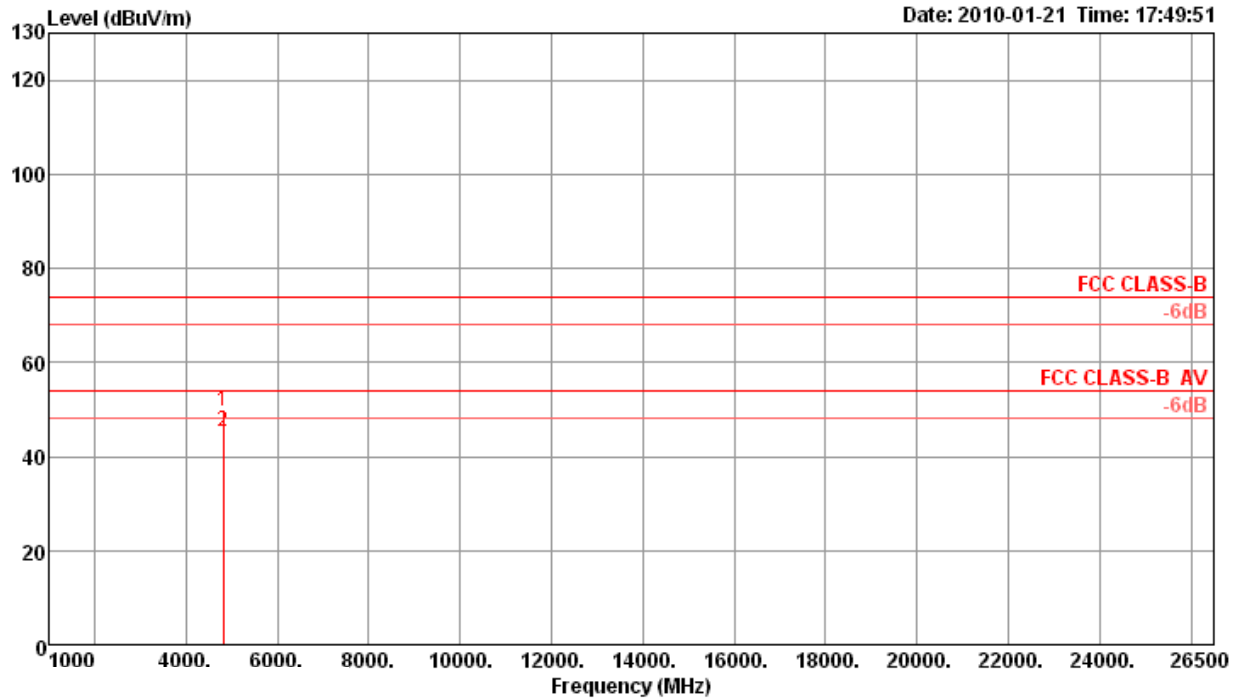

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.76	49.60	74.00	-24.40	49.40	3.00	35.26	32.46	79	111	Peak	VERTICAL
2 a	4823.89	45.44	54.00	-8.56	45.24	3.00	35.26	32.46	79	111	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 6 / Ant. 2

Horizontal

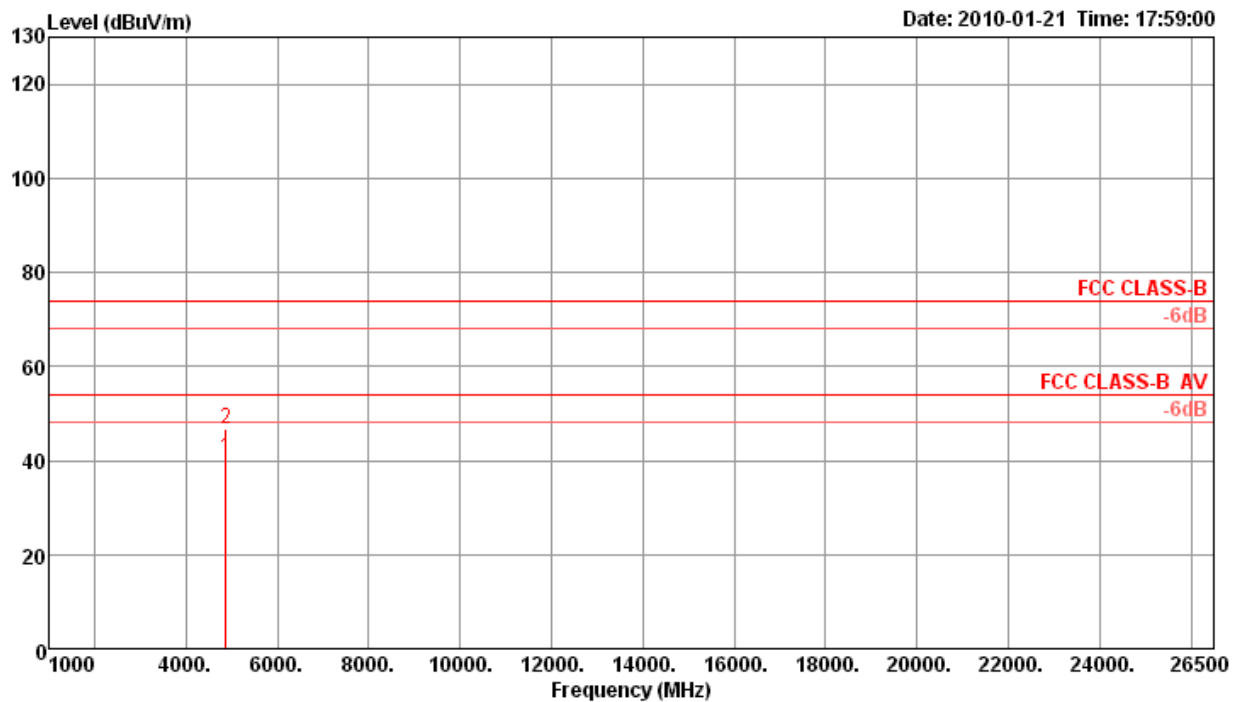

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.92	40.72	54.00	-13.28	40.30	3.01	35.15	32.56	37	100	Average	HORIZONTAL
2 p	4873.93	46.76	74.00	-27.24	46.34	3.01	35.15	32.56	37	100	Peak	HORIZONTAL


Vertical

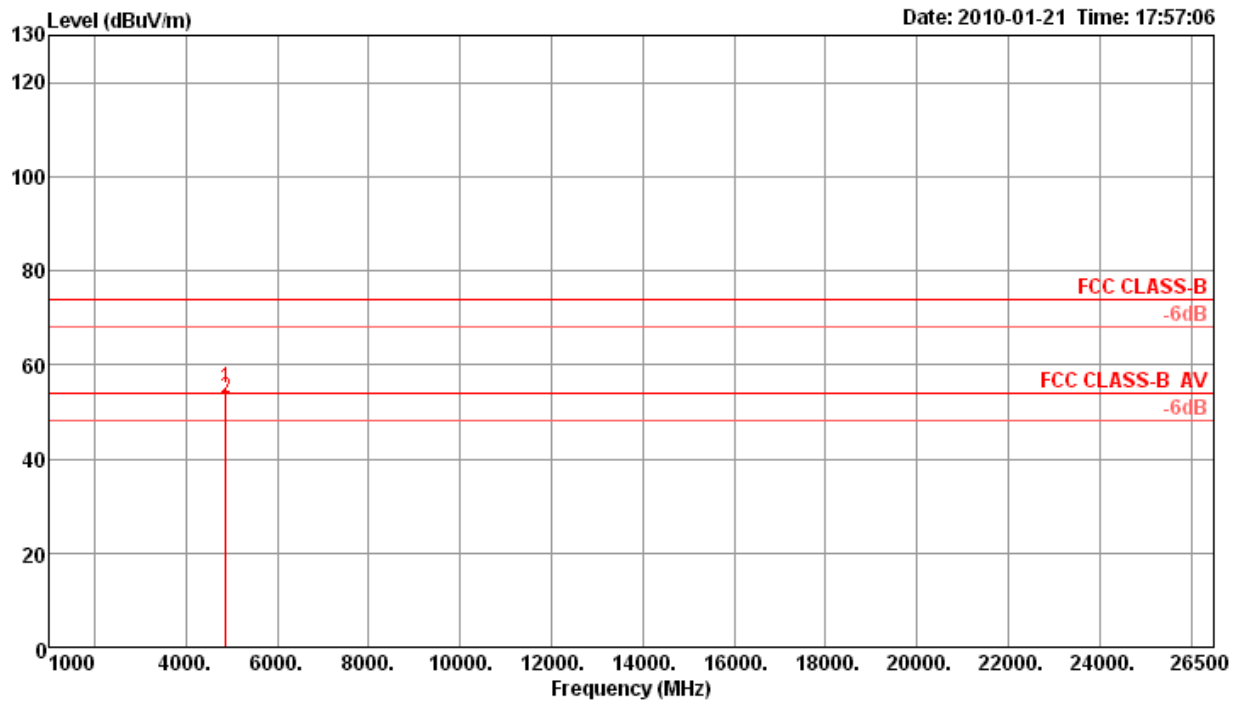

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.86	54.90	74.00	-19.10	54.48	3.01	35.15	32.56	80	100	Peak	VERTICAL
2 a	4873.94	52.72	54.00	-1.28	52.30	3.01	35.15	32.56	80	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 11 / Ant. 2

Horizontal

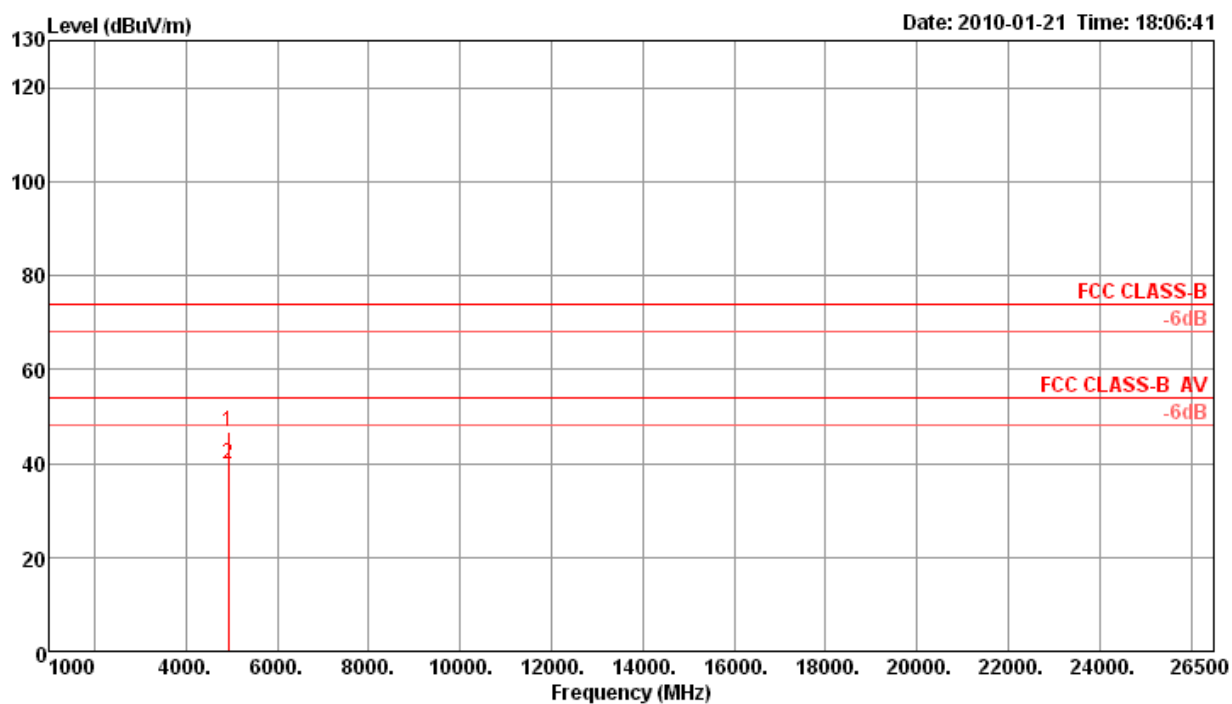

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.91	46.89	74.00	-27.11	46.24	3.02	35.03	32.66	108	100	Peak	HORIZONTAL
2 a	4924.00	39.98	54.00	-14.02	39.33	3.02	35.03	32.66	108	100	Average	HORIZONTAL


Vertical

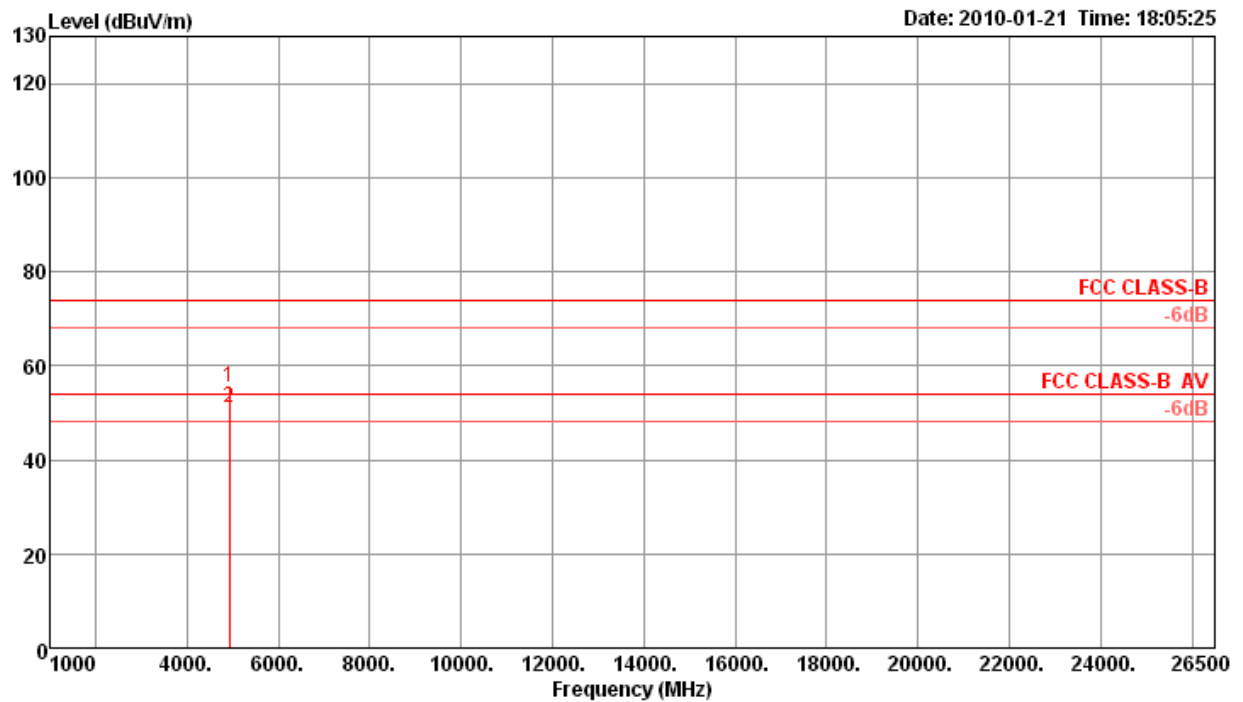

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.74	55.43	74.00	-18.57	54.78	3.02	35.03	32.66	93	101	Peak	VERTICAL
2 a	4923.92	51.13	54.00	-2.87	50.48	3.02	35.03	32.66	93	101	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 1 / Ant. 2

Horizontal

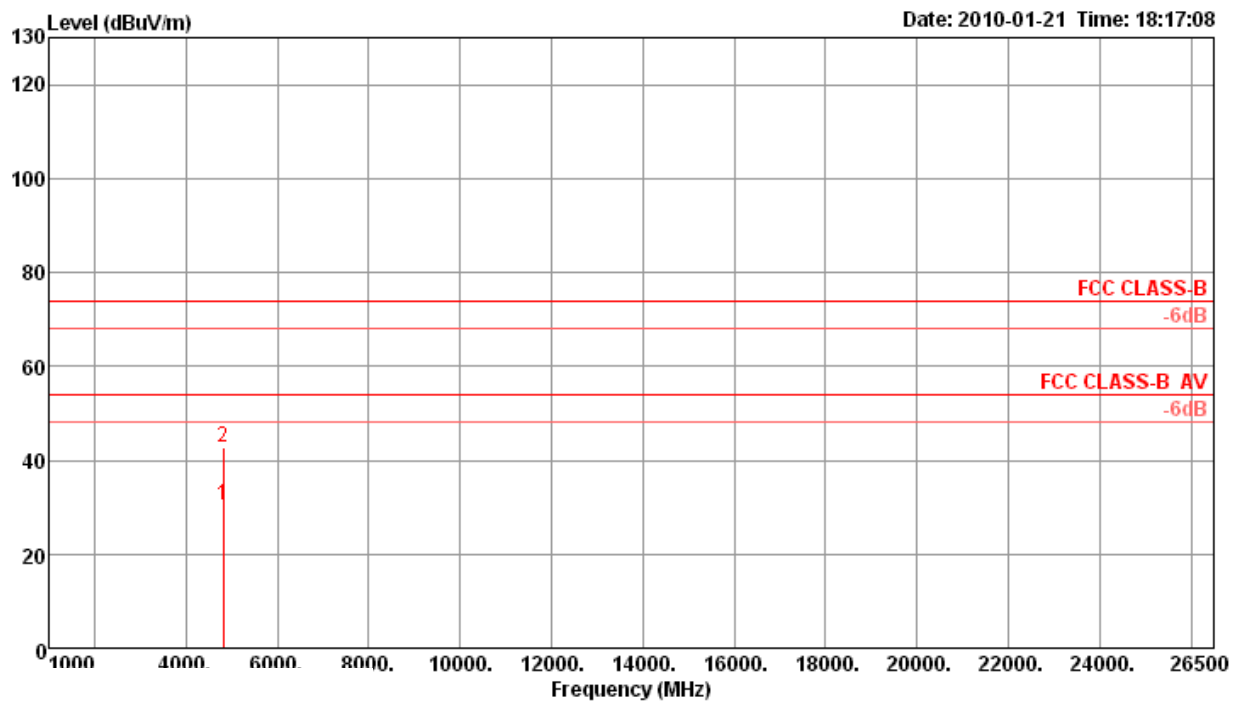

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.99	30.36	54.00	-23.64	30.16	3.00	35.26	32.46	85	100	Average	HORIZONTAL
2 p	4824.02	42.83	74.00	-31.17	42.63	3.00	35.26	32.46	85	100	Peak	HORIZONTAL


Vertical

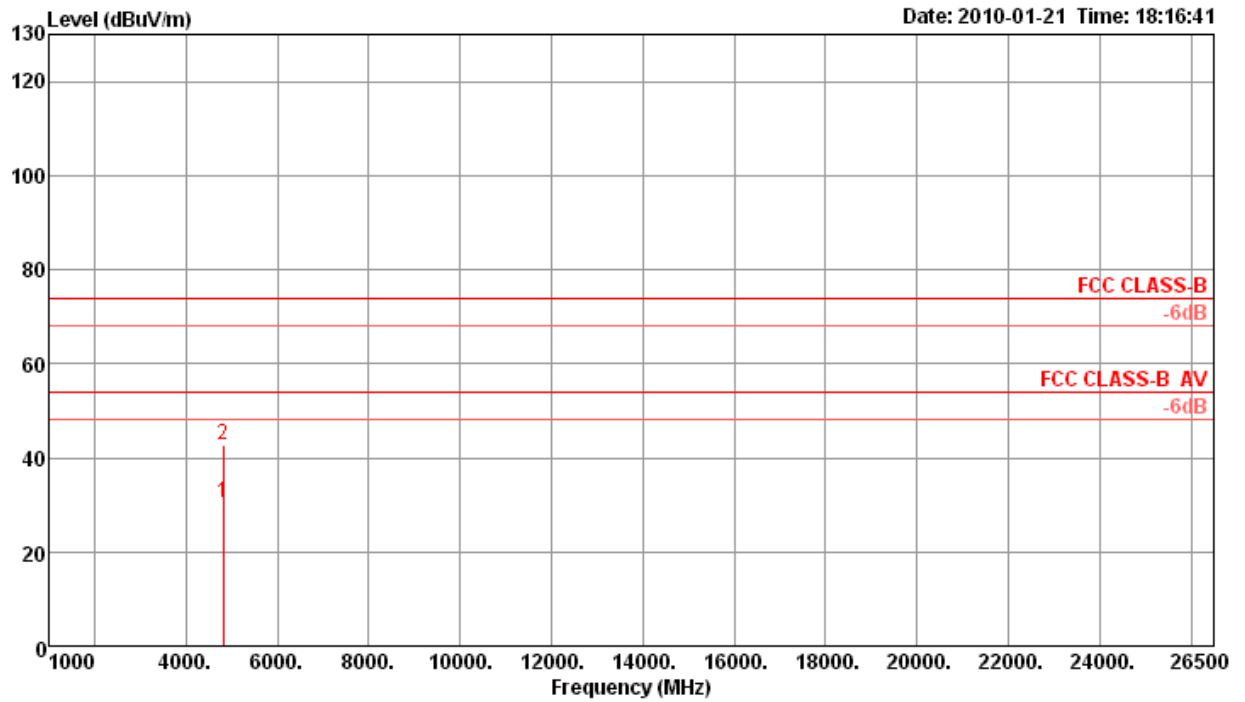

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	a	4823.98	30.58	54.00	-23.42	30.38	3.00	35.26	32.46	32	100	Average	VERTICAL
2	p	4823.98	42.81	74.00	-31.19	42.61	3.00	35.26	32.46	32	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 6 / Ant. 2

Horizontal

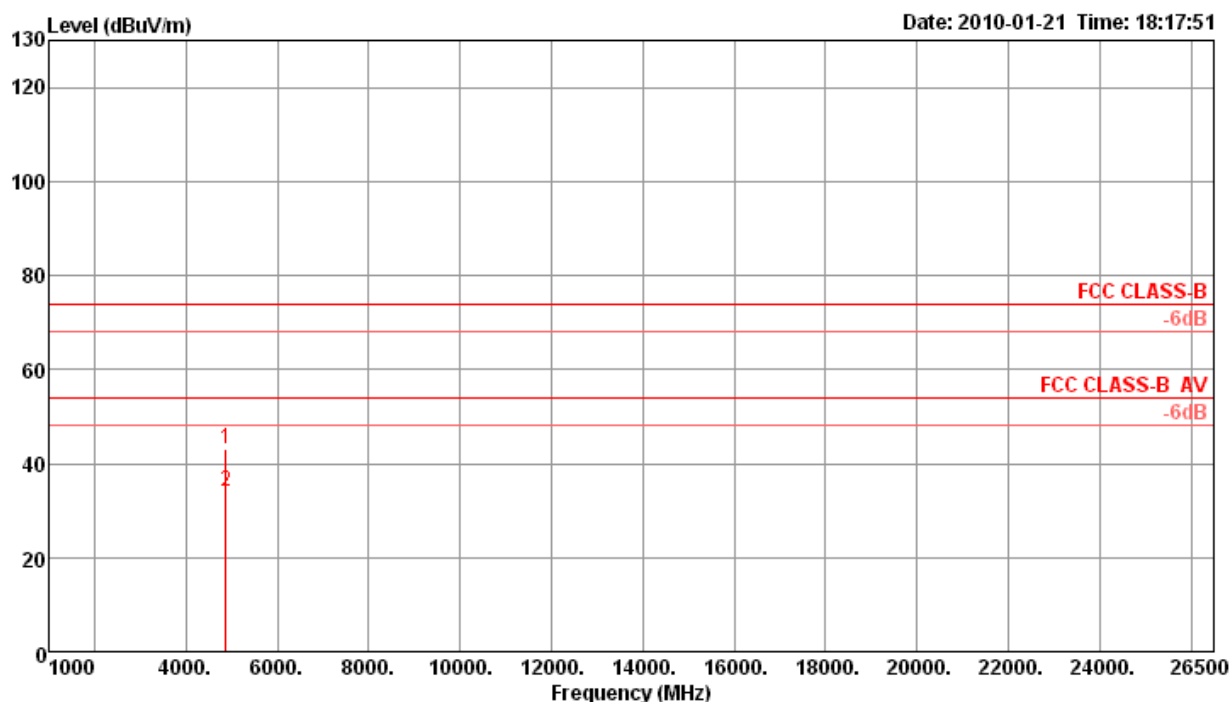

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4874.01	43.10	74.00	-30.90	42.68	3.01	35.15	32.56	146	100	Peak	HORIZONTAL
2 a	4874.03	34.02	54.00	-19.98	33.60	3.01	35.15	32.56	146	100	Average	HORIZONTAL


Vertical

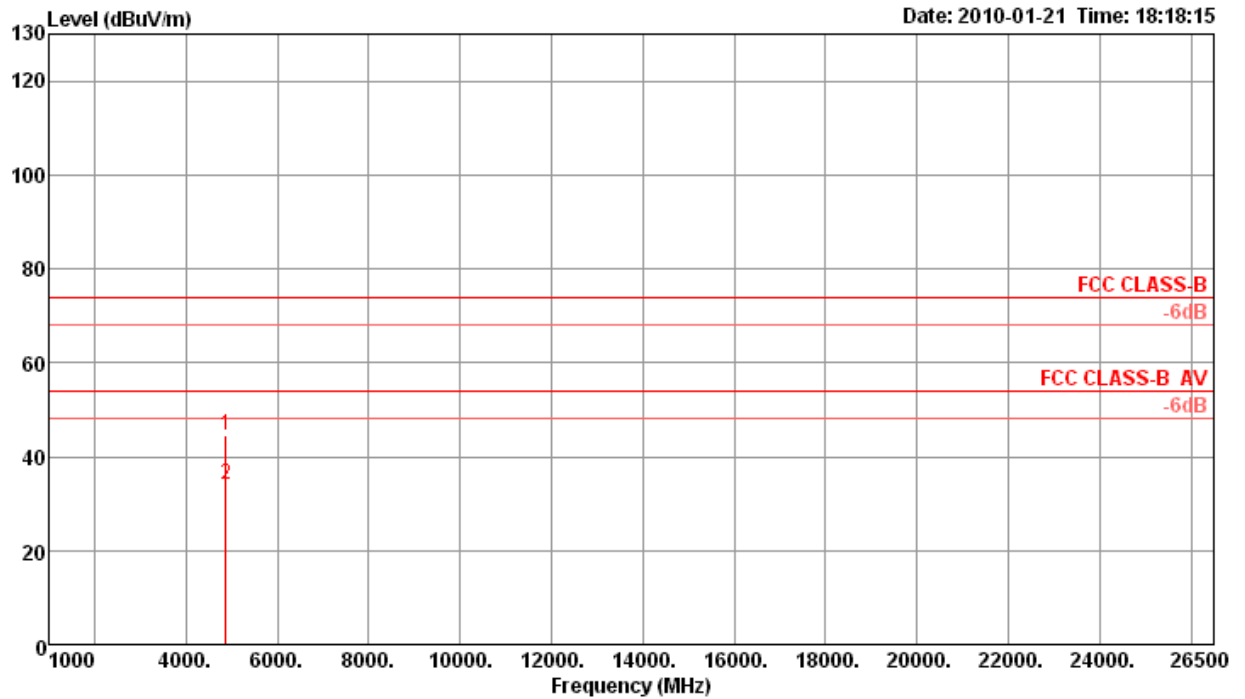

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.98	44.52	74.00	-29.48	44.10	3.01	35.15	32.56	193	100	Peak	VERTICAL
2 a	4874.01	33.88	54.00	-20.12	33.46	3.01	35.15	32.56	193	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 11 / Ant. 2

Horizontal

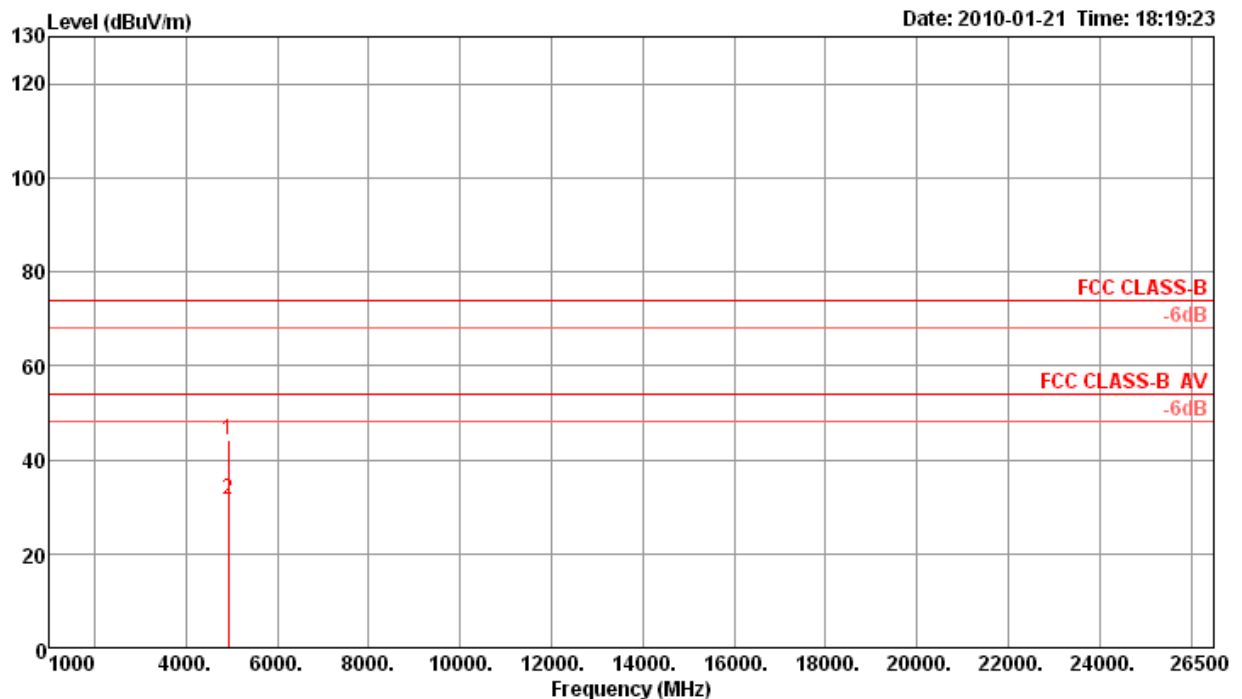

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.99	44.08	74.00	-29.92	43.43	3.02	35.03	32.66	98	100	Peak	HORIZONTAL
2 a	4924.00	31.47	54.00	-22.53	30.82	3.02	35.03	32.66	98	100	Average	HORIZONTAL


Vertical

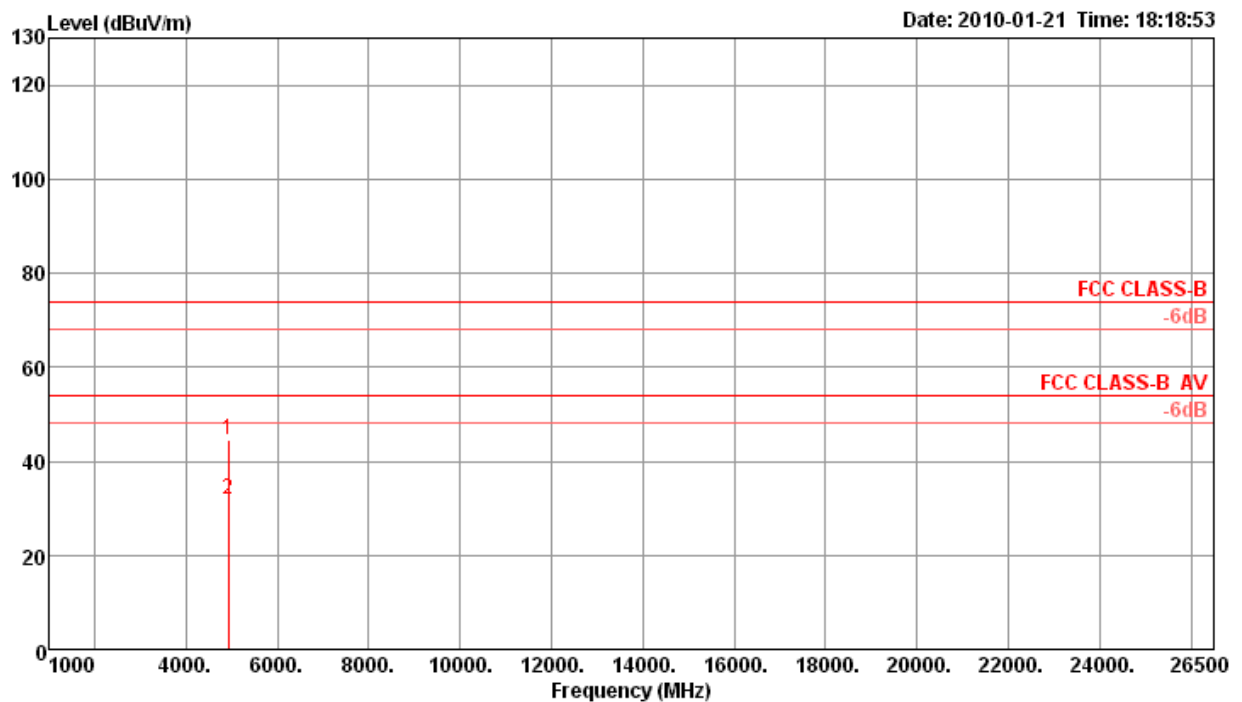

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.98	44.48	74.00	-29.52	43.83	3.02	35.03	32.66	156	100	Peak	VERTICAL
2 a	4924.02	31.95	54.00	-22.05	31.30	3.02	35.03	32.66	156	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g Turbo CH 6 / Ant. 2

Horizontal

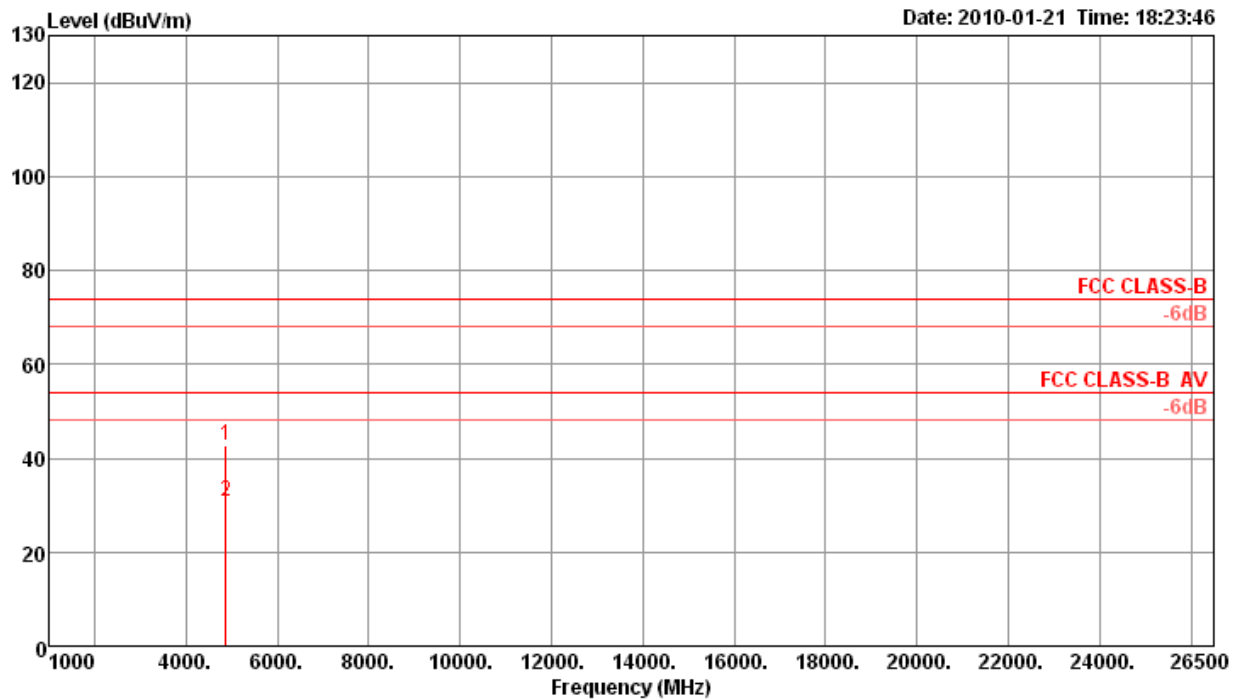

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.99	42.87	74.00	-31.13	42.45	3.01	35.15	32.56	231	100	Peak	HORIZONTAL
2 a	4874.02	30.74	54.00	-23.26	30.32	3.01	35.15	32.56	231	100	Average	HORIZONTAL

Vertical

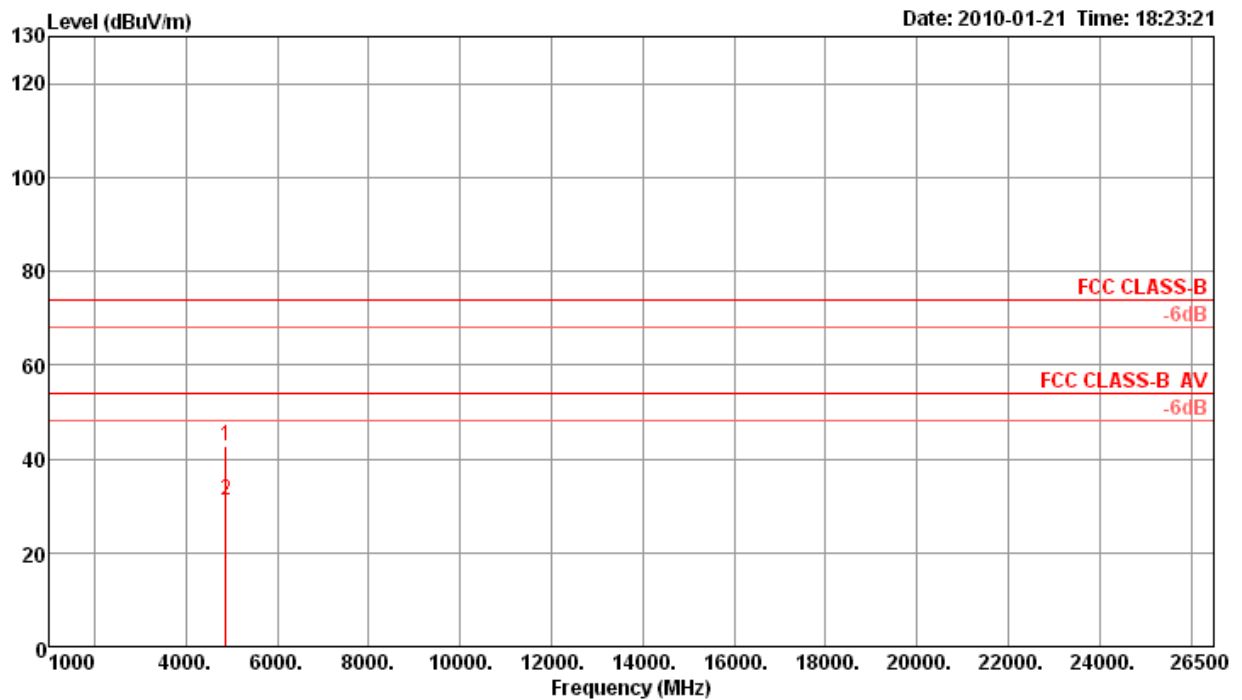


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.99	42.80	74.00	-31.20	42.38	3.01	35.15	32.56	172	100	Peak	VERTICAL
2 a	4874.00	31.10	54.00	-22.90	30.68	3.01	35.15	32.56	172	100	Average	VERTICAL

<For Antenna 3>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 149 / Ant. 3

Horizontal

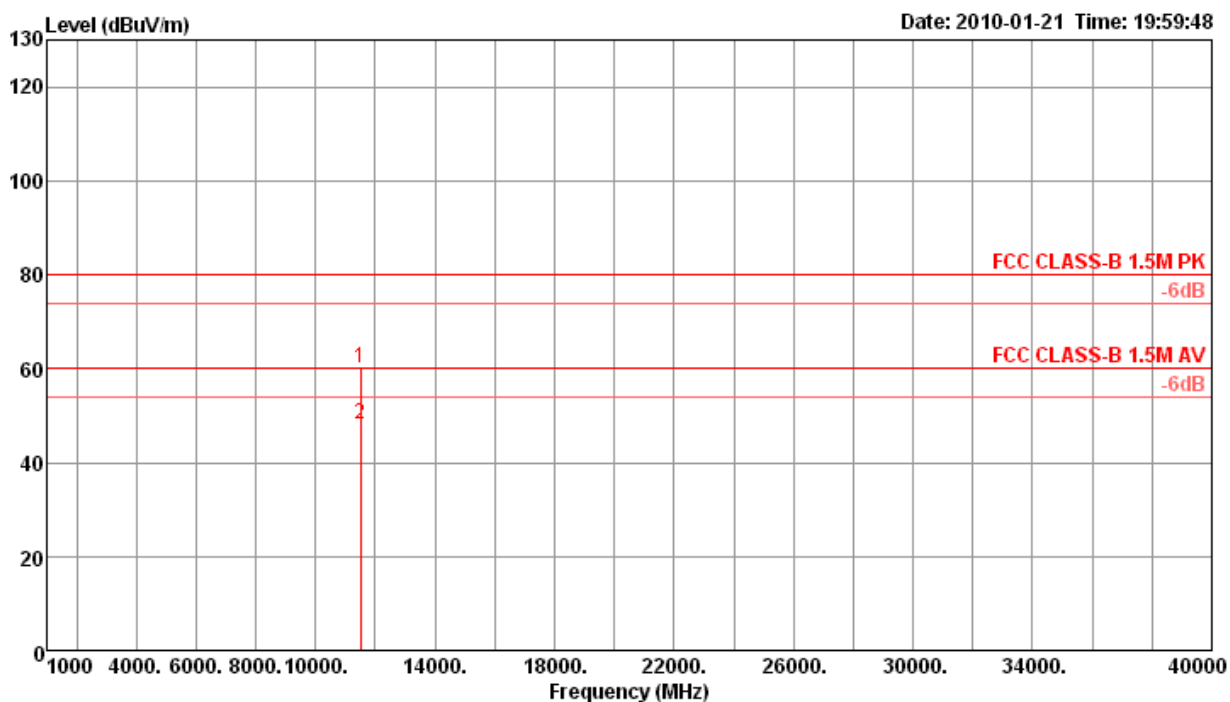

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11490.02	59.96	80.00	-20.04	51.45	4.76	34.75	38.50	164	100	Peak	HORIZONTAL
2 a	11490.02	48.05	60.00	-11.95	39.54	4.76	34.75	38.50	164	100	Average	HORIZONTAL


Vertical

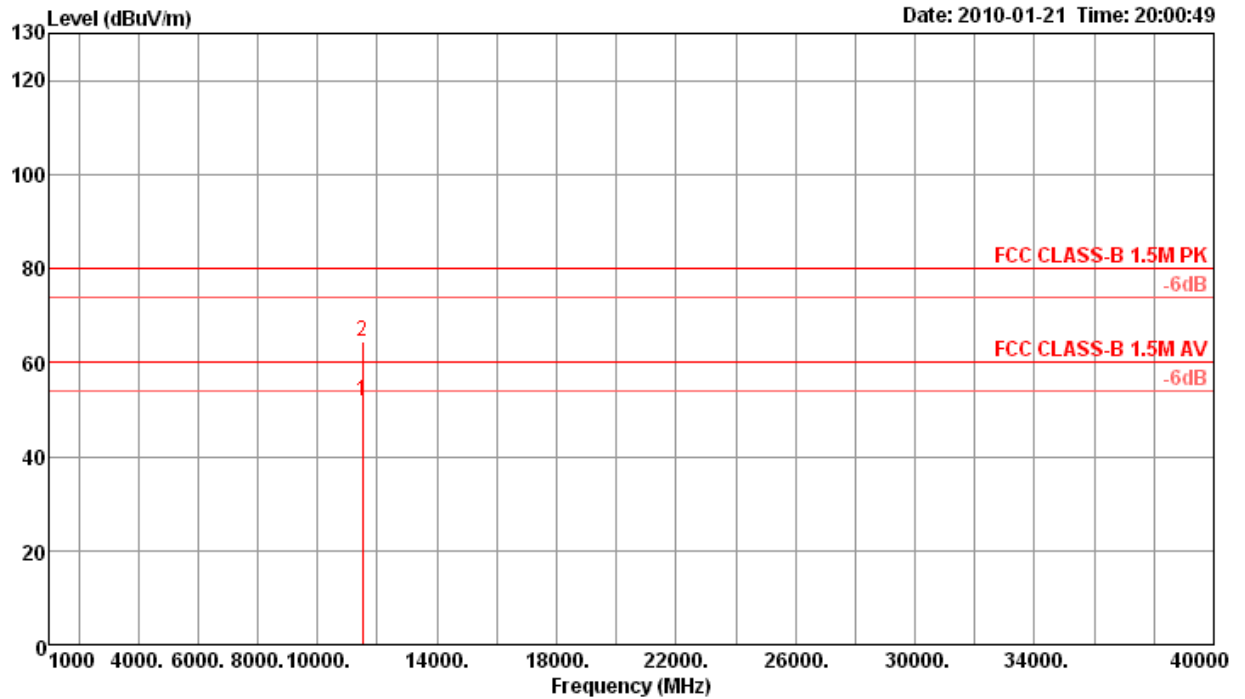

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11489.99	51.90	60.00	-8.10	43.39	4.76	34.75	38.50	179	100	Average	VERTICAL
2 p	11490.01	64.31	80.00	-15.69	55.80	4.76	34.75	38.50	179	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 157 / Ant. 3

Horizontal

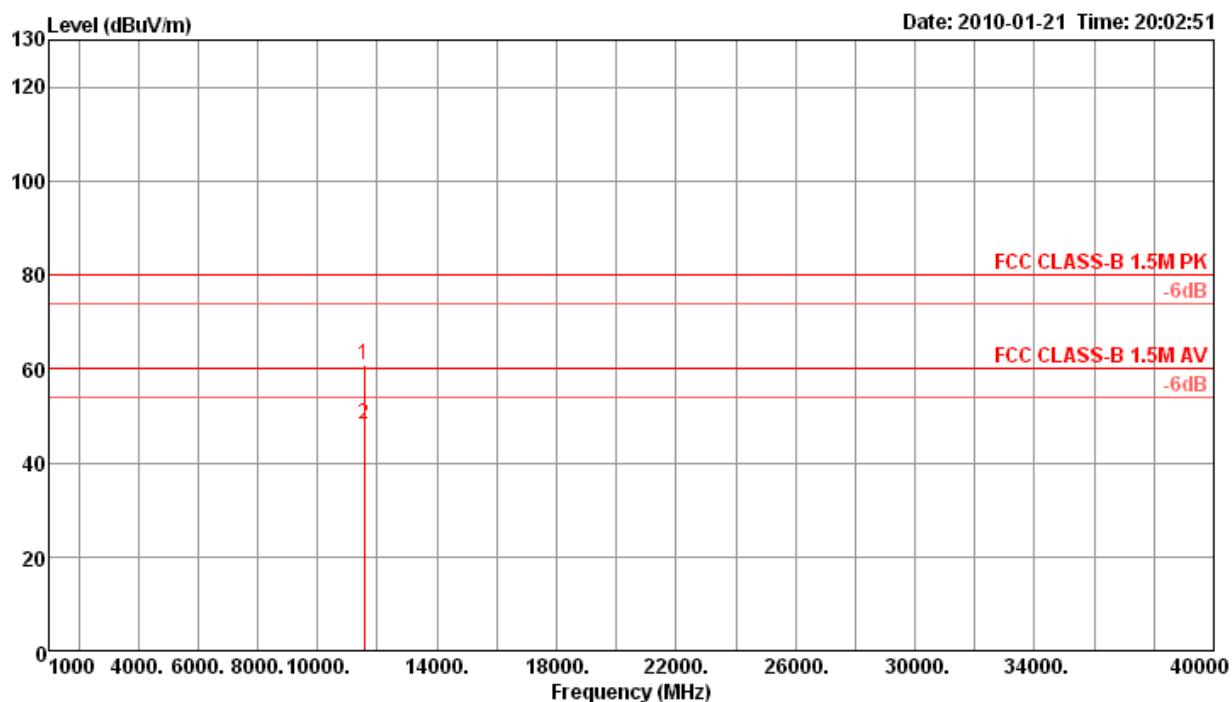

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11569.98	60.97	80.00	-19.03	52.37	4.91	34.82	38.51	209	100	Peak	HORIZONTAL
2 a	11570.02	48.22	60.00	-11.78	39.62	4.91	34.82	38.51	209	100	Average	HORIZONTAL


Vertical

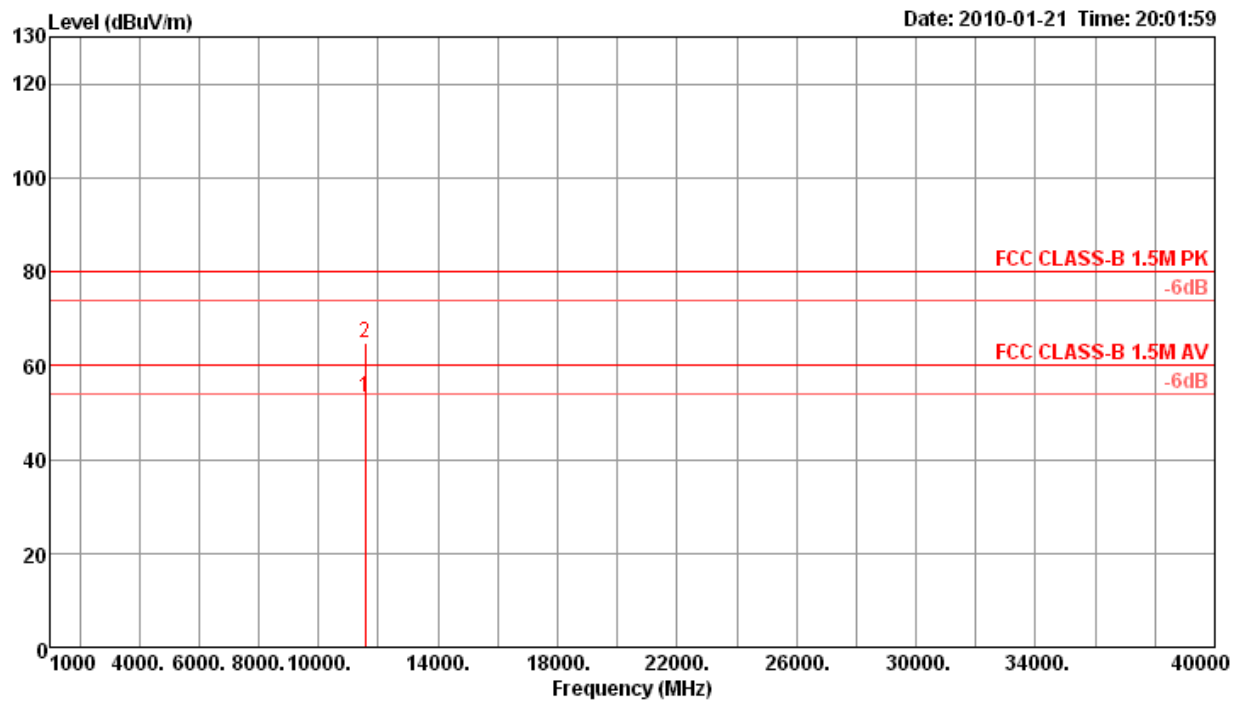

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11570.01	53.21	60.00	-6.79	44.61	4.91	34.82	38.51	130	100	Average	VERTICAL
2 p	11570.02	64.92	80.00	-15.08	56.32	4.91	34.82	38.51	130	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 165 / Ant. 3

Horizontal

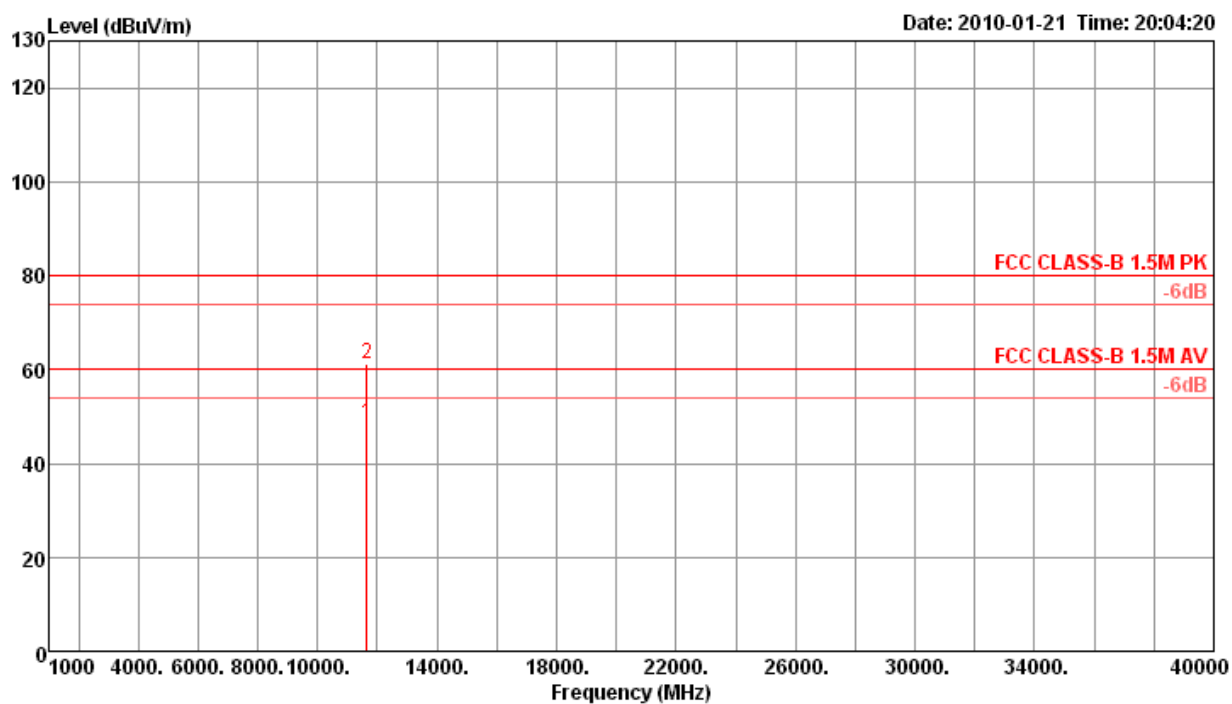

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11649.99	48.51	60.00	-11.49	39.85	5.03	34.90	38.53	163	100	Average	HORIZONTAL
2 p	11649.99	61.28	80.00	-18.72	52.62	5.03	34.90	38.53	163	100	Peak	HORIZONTAL

Vertical

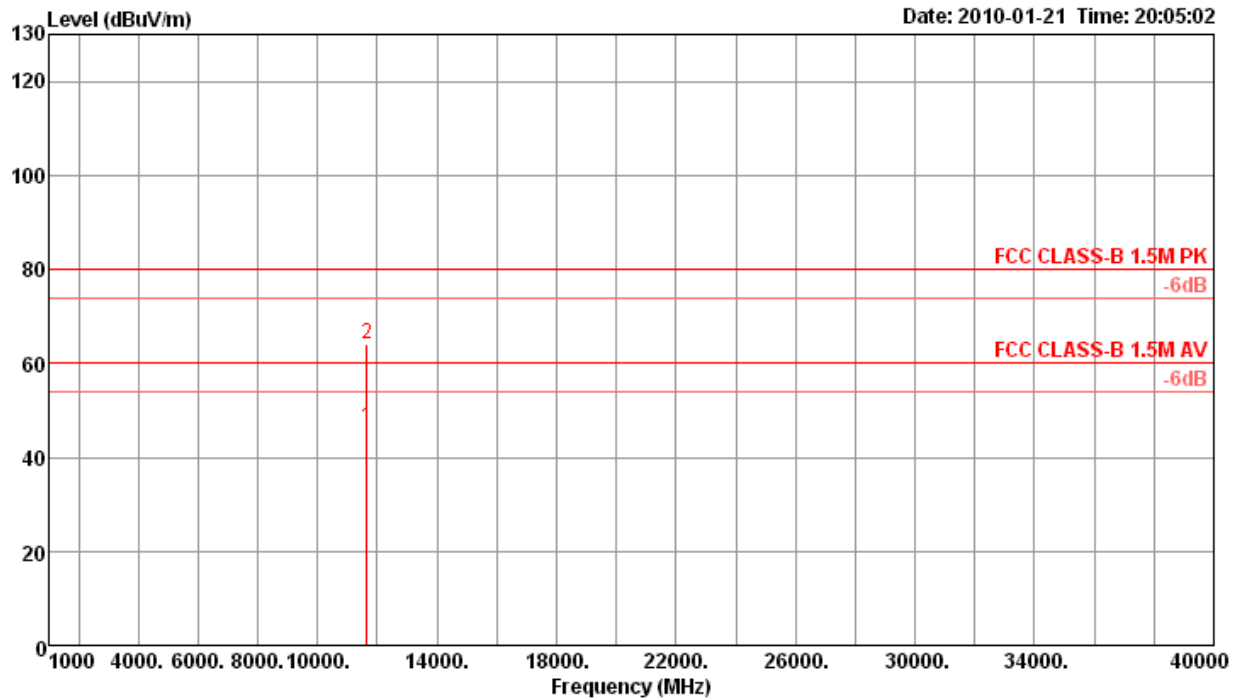

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11650.00	46.28	60.00	-13.72	37.62	5.03	34.90	38.53	82	100	Average	VERTICAL
2 p	11650.00	64.19	80.00	-15.81	55.53	5.03	34.90	38.53	82	100	Peak	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo CH 152 / Ant. 3

Horizontal

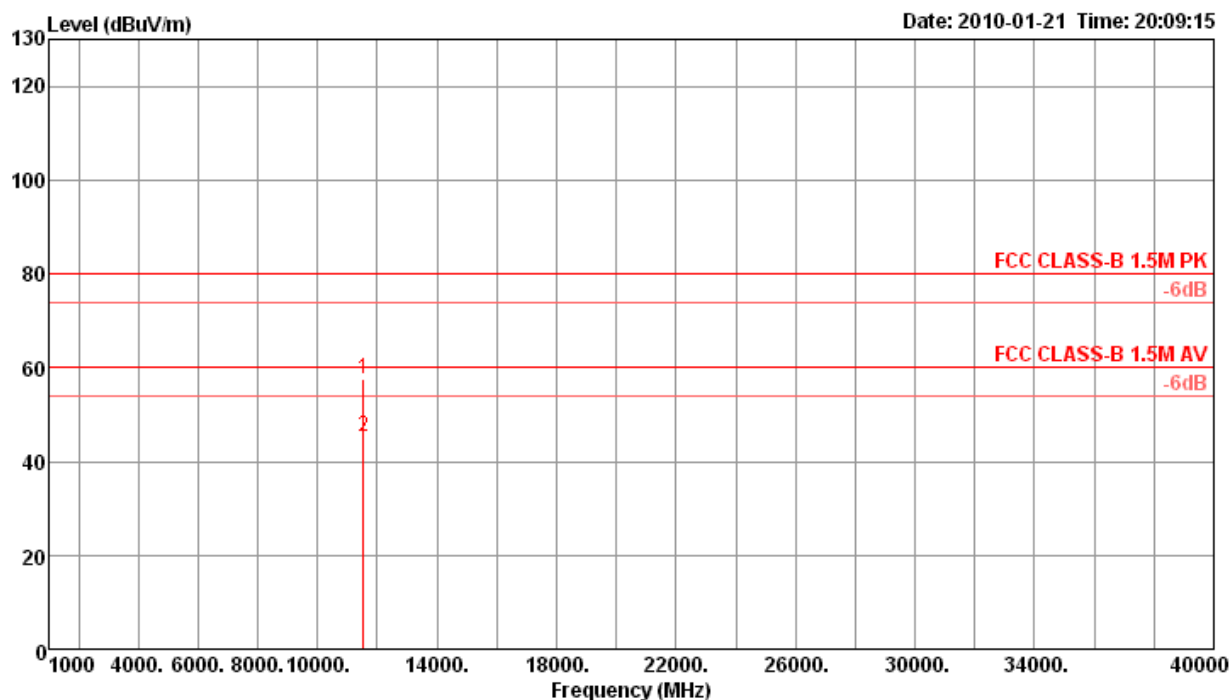

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11520.00	57.57	80.00	-22.43	49.02	4.82	34.77	38.50	85	100	Peak	HORIZONTAL
2 a	11520.00	45.38	60.00	-14.62	36.83	4.82	34.77	38.50	85	100	Average	HORIZONTAL

Vertical

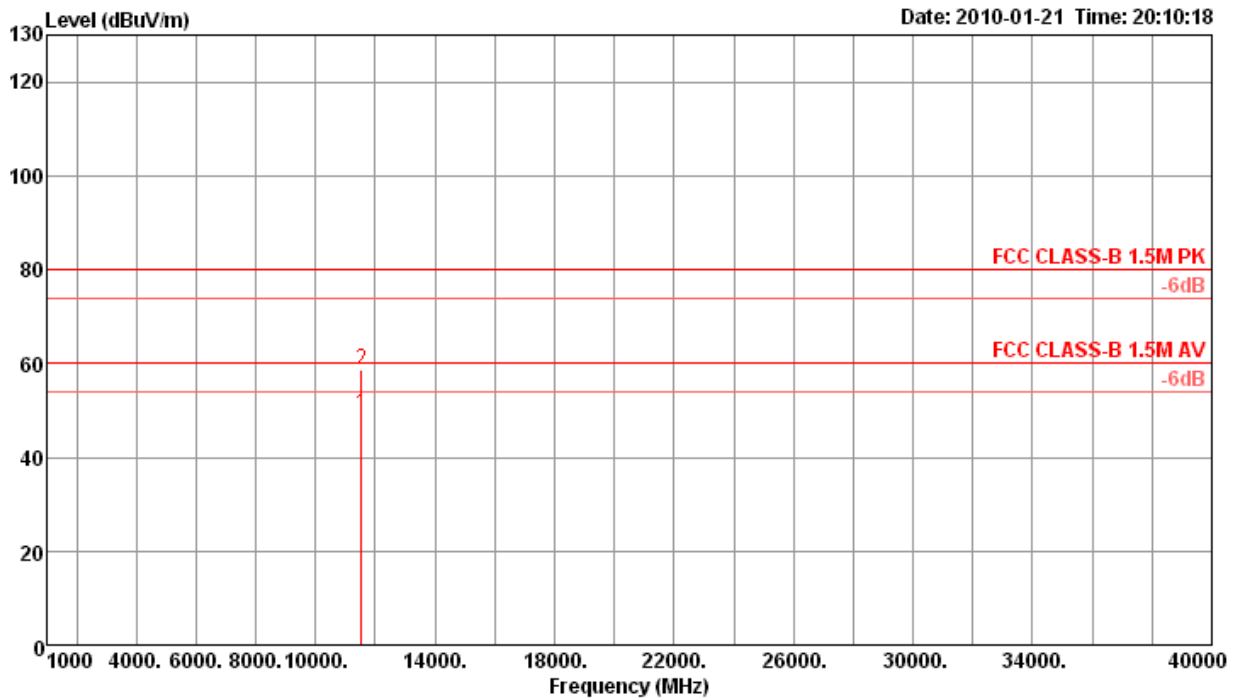

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	a	11520.00	49.25	60.00	-10.75	40.70	4.82	34.77	38.50	316	100	Average	VERTICAL
2	p	11520.00	58.69	80.00	-21.31	50.14	4.82	34.77	38.50	316	100	Peak	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo CH 160 / Ant. 3

Horizontal

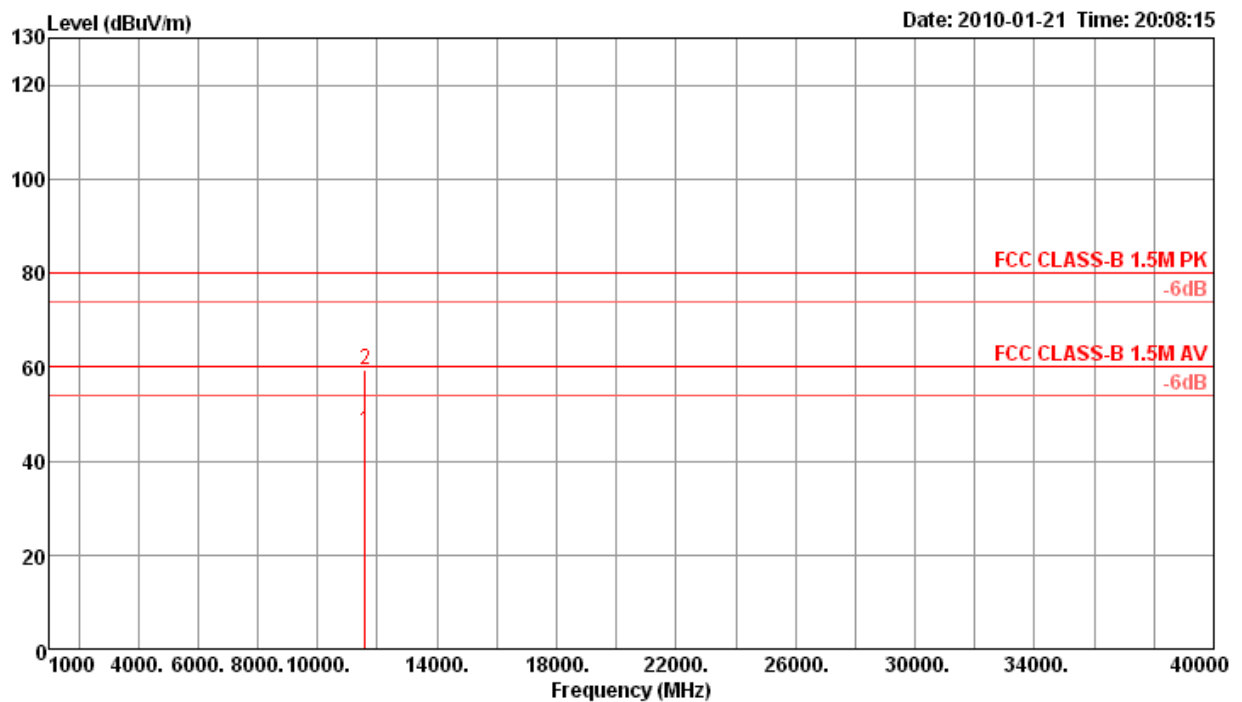

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11599.99	46.18	60.00	-13.82	37.56	4.95	34.85	38.52	208	100	Average	HORIZONTAL
2 p	11599.99	59.43	80.00	-20.57	50.81	4.95	34.85	38.52	208	100	Peak	HORIZONTAL

Vertical

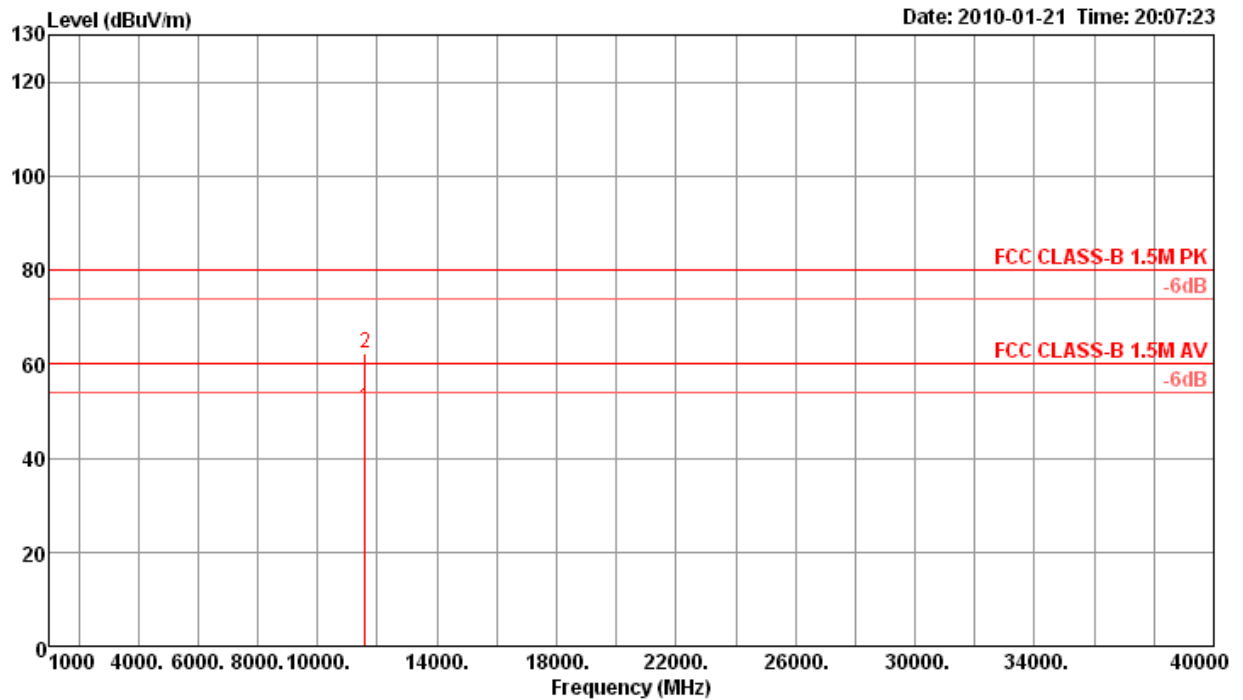

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11600.02	50.61	60.00	-9.39	41.99	4.95	34.85	38.52	129	100	Average	VERTICAL
2 b	11600.02	62.46	80.00	-17.54	53.84	4.95	34.85	38.52	129	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 4>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 1 / Ant. 4

Horizontal

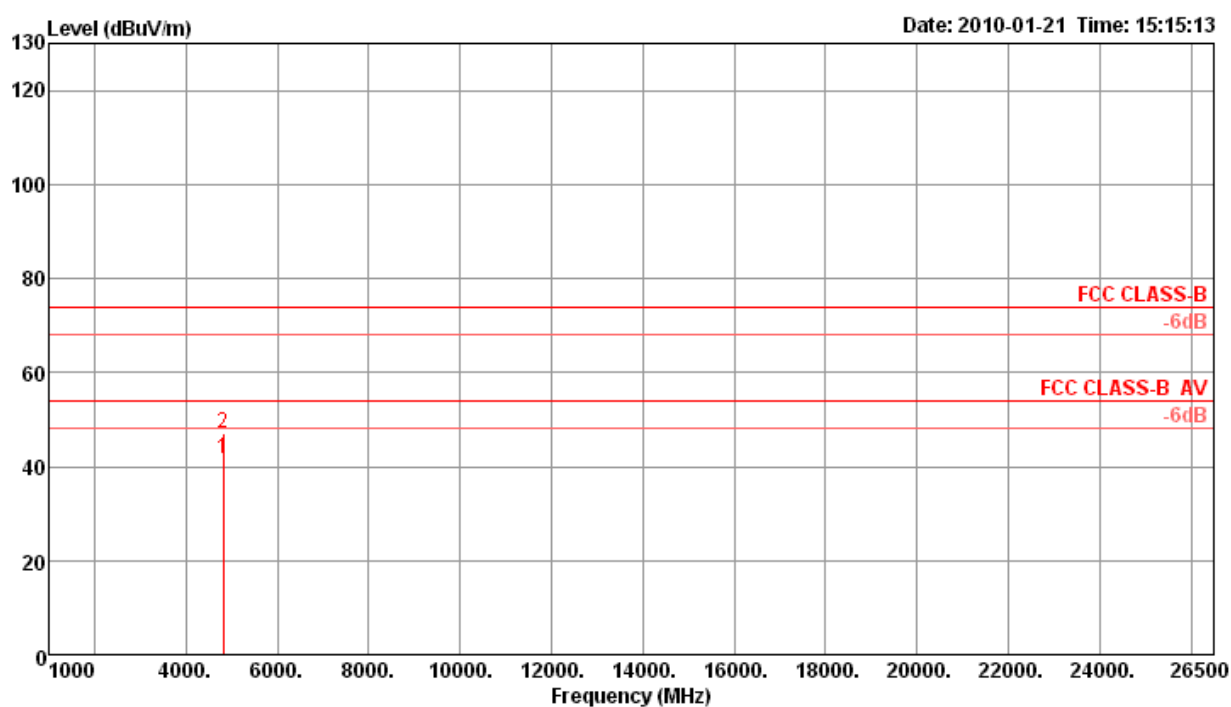

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.95	41.64	54.00	-12.36	41.44	3.00	35.26	32.46	303	100	Average	HORIZONTAL
2 p	4824.01	47.02	74.00	-26.98	46.82	3.00	35.26	32.46	303	100	Peak	HORIZONTAL


Vertical

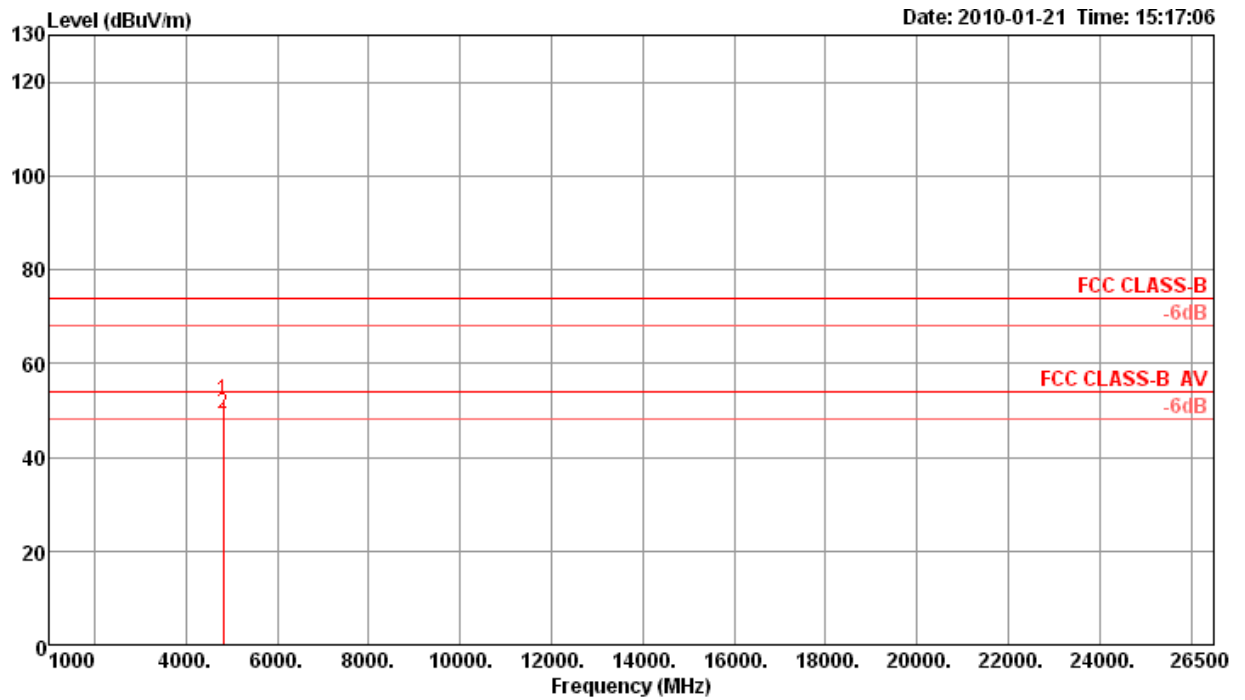

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.78	52.26	74.00	-21.74	52.06	3.00	35.26	32.46	5	137	Peak	VERTICAL
2 a	4823.95	49.23	54.00	-4.77	49.03	3.00	35.26	32.46	5	137	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 6 / Ant. 4

Horizontal

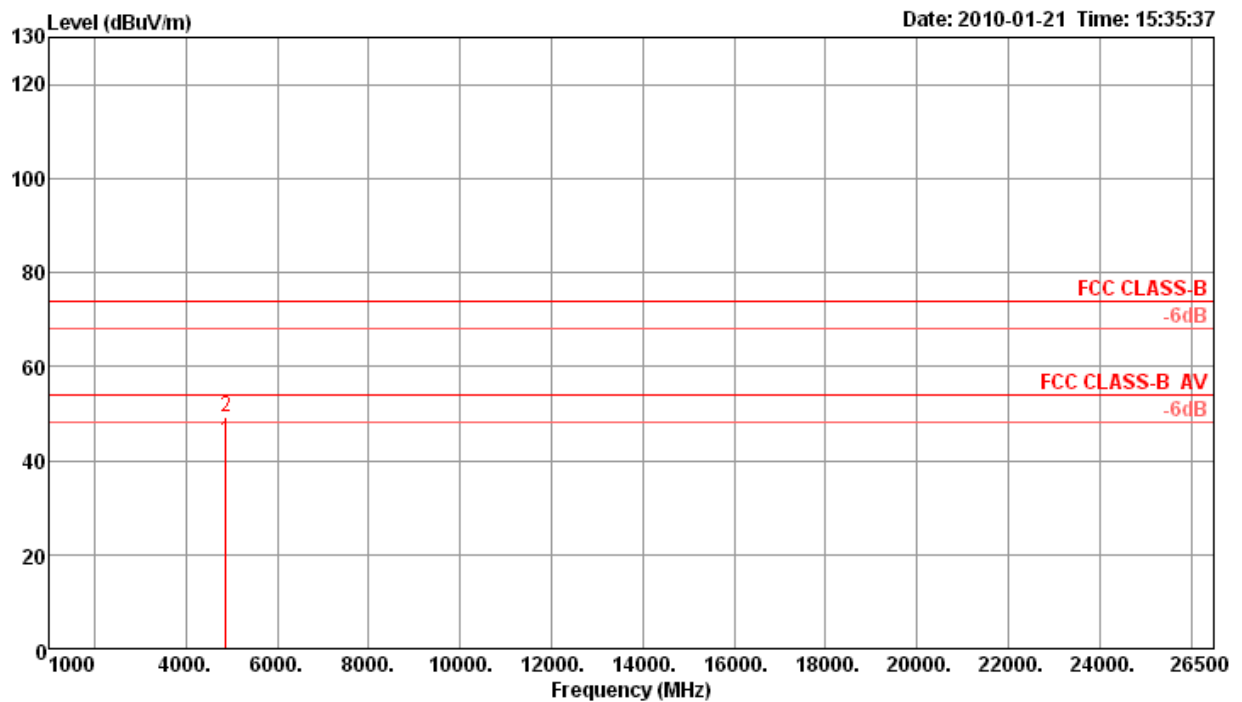

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.93	44.27	54.00	-9.73	43.85	3.01	35.15	32.56	302	170	Average	HORIZONTAL
2 p	4874.00	49.13	74.00	-24.87	48.71	3.01	35.15	32.56	302	170	Peak	HORIZONTAL


Vertical

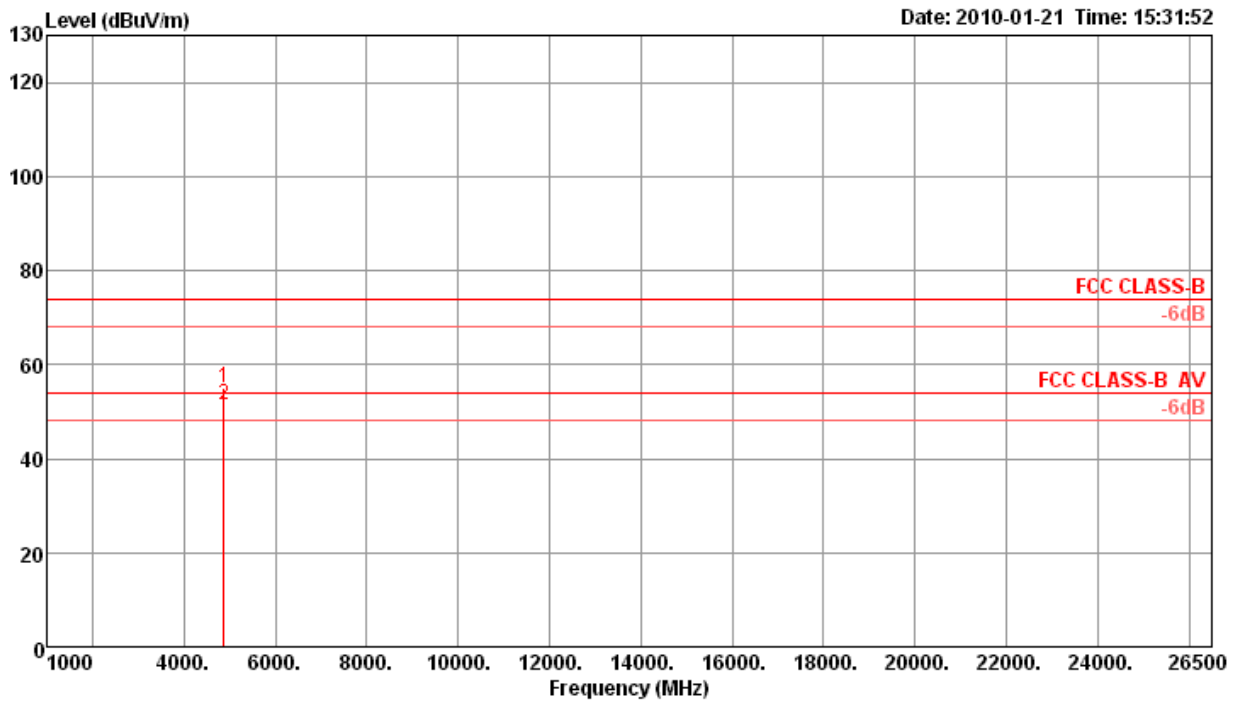

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4874.02	54.97	74.00	-19.03	54.55	3.01	35.15	32.56	346	109	Peak	VERTICAL
2 a	4874.15	51.59	54.00	-2.41	51.17	3.01	35.15	32.56	346	109	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 11 / Ant. 4

Horizontal

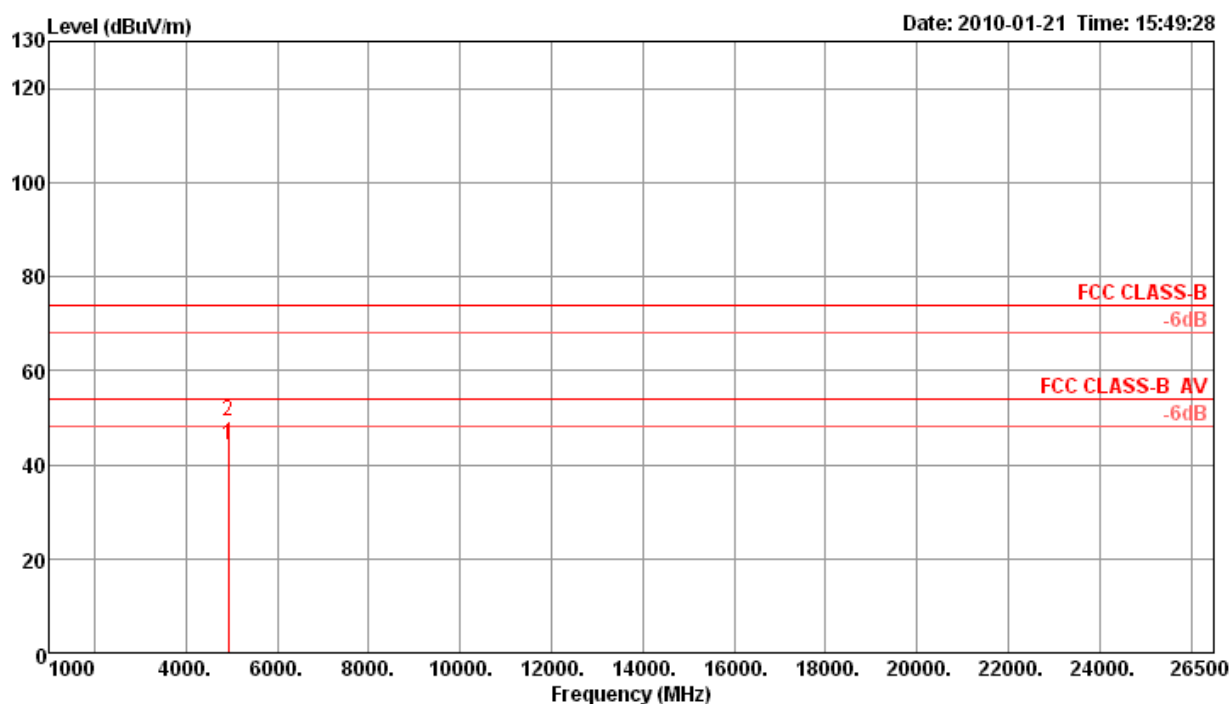

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.93	44.27	54.00	-9.73	43.62	3.02	35.03	32.66	301	183	Average	HORIZONTAL
2 p	4923.96	49.25	74.00	-24.75	48.60	3.02	35.03	32.66	301	183	Peak	HORIZONTAL


Vertical

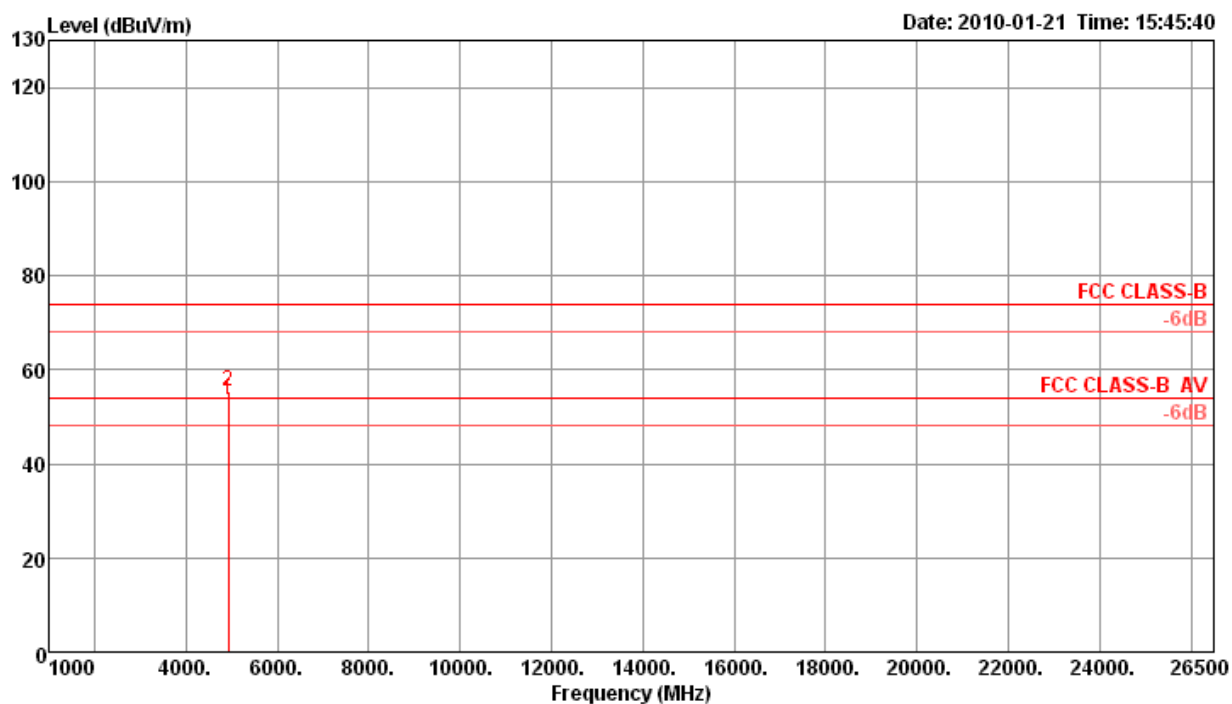

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.93	53.51	54.00	-0.49	52.86	3.02	35.03	32.66	312	149	Average	VERTICAL
2 p	4923.96	55.54	74.00	-18.46	54.89	3.02	35.03	32.66	312	149	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 1 / Ant. 4

Horizontal

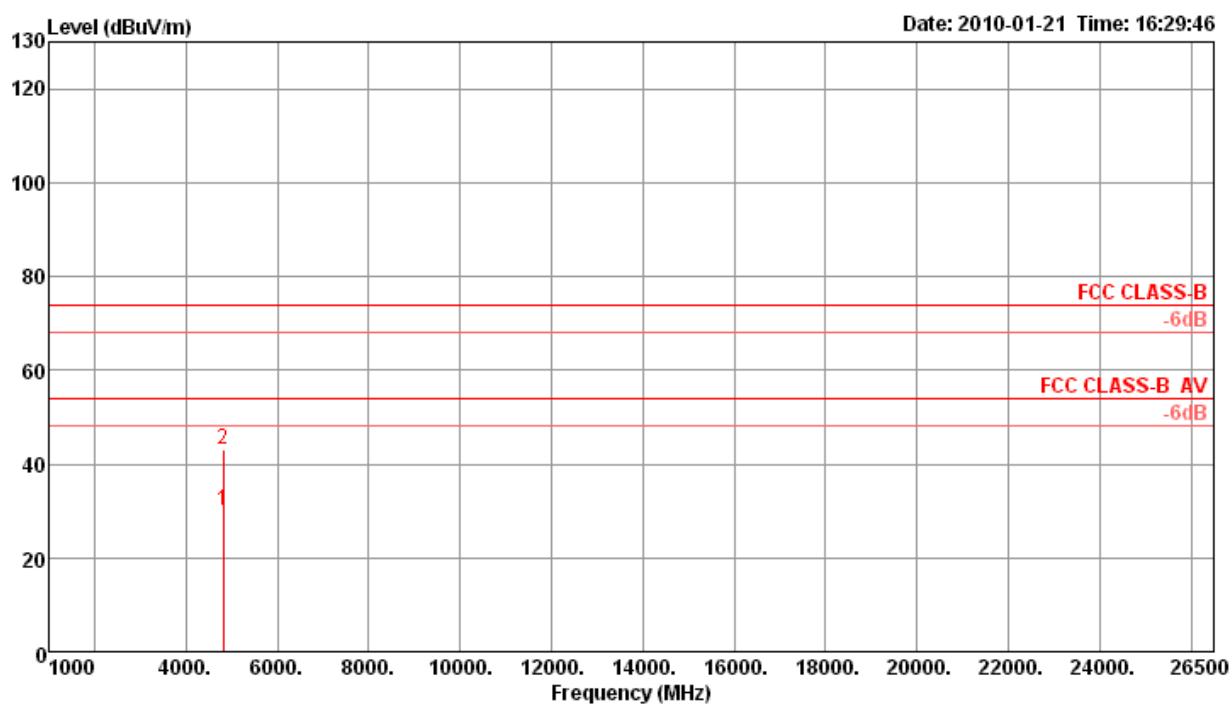

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.98	30.03	54.00	-23.97	29.83	3.00	35.26	32.46	187	100	Average	HORIZONTAL
2 p	4823.98	43.11	74.00	-30.89	42.91	3.00	35.26	32.46	187	100	Peak	HORIZONTAL


Vertical

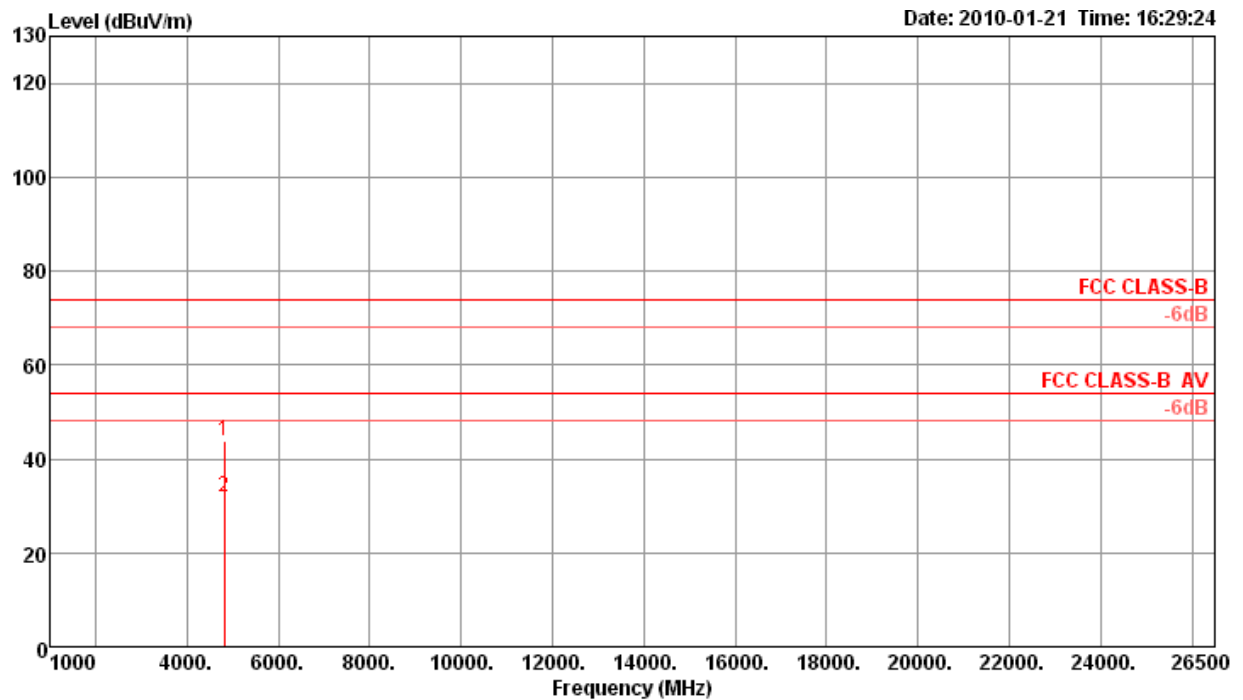

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.99	43.82	74.00	-30.18	43.62	3.00	35.26	32.46	230	100	Peak	VERTICAL
2 a	4824.00	31.80	54.00	-22.20	31.60	3.00	35.26	32.46	230	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 6 / Ant. 4

Horizontal

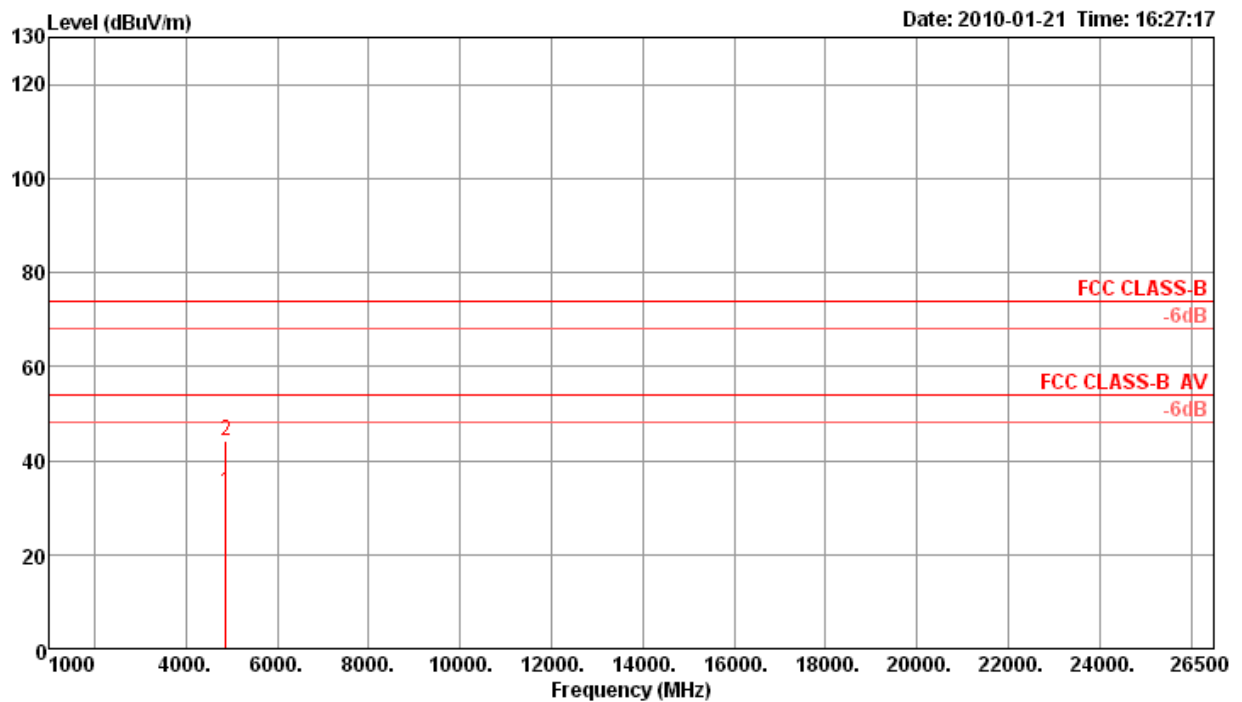

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4874.00	33.17	54.00	-20.83	32.75	3.01	35.15	32.56	77	100	Average	HORIZONTAL
2 p	4874.01	44.32	74.00	-29.68	43.90	3.01	35.15	32.56	77	100	Peak	HORIZONTAL


Vertical

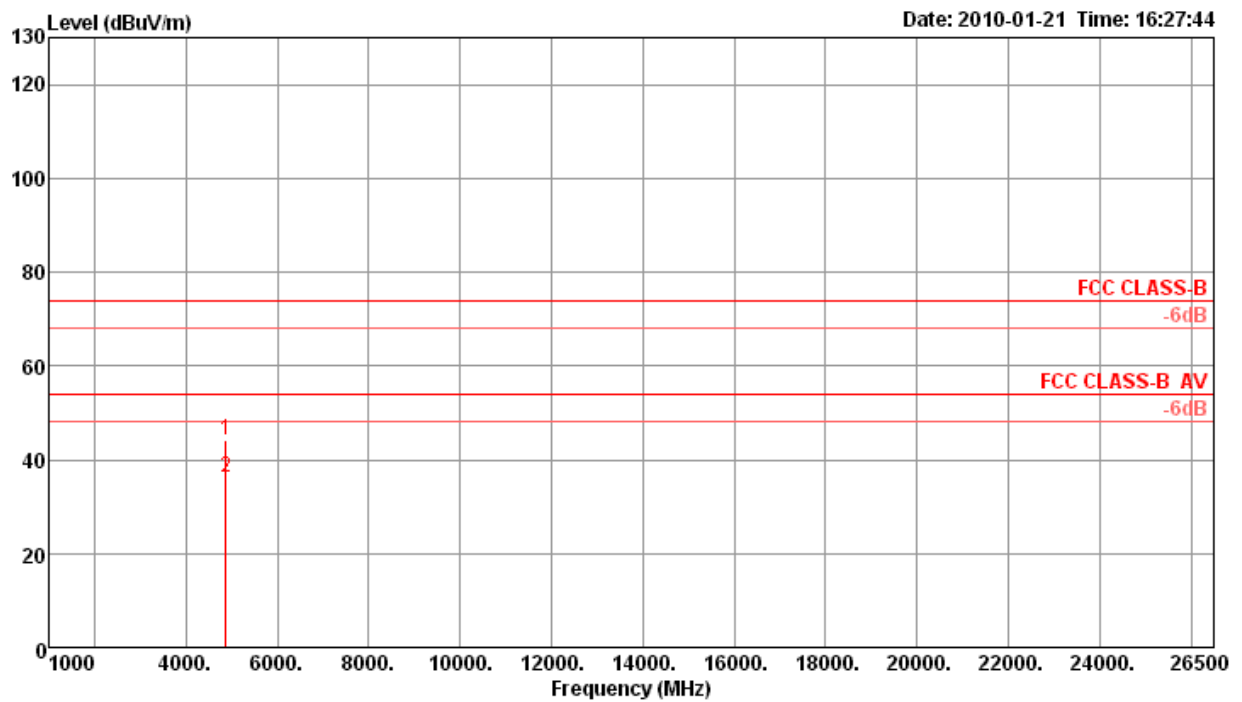

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4874.02	44.34	74.00	-29.66	43.92	3.01	35.15	32.56	134	100	Peak	VERTICAL
2 a	4874.02	36.21	54.00	-17.79	35.79	3.01	35.15	32.56	134	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 11 / Ant. 4

Horizontal

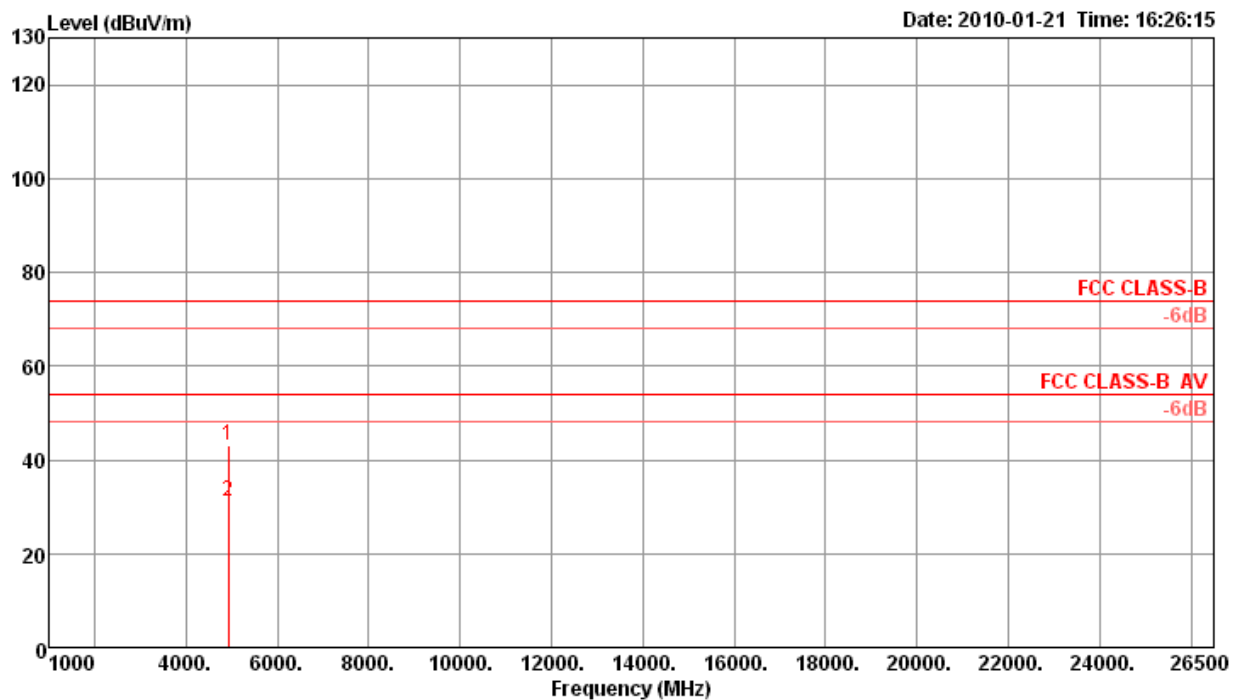

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4924.60	43.00	74.00	-31.00	42.35	3.02	35.03	32.66	159	100	Peak	HORIZONTAL
2 a	4926.00	31.09	54.00	-22.91	30.44	3.02	35.03	32.66	159	100	Average	HORIZONTAL


Vertical

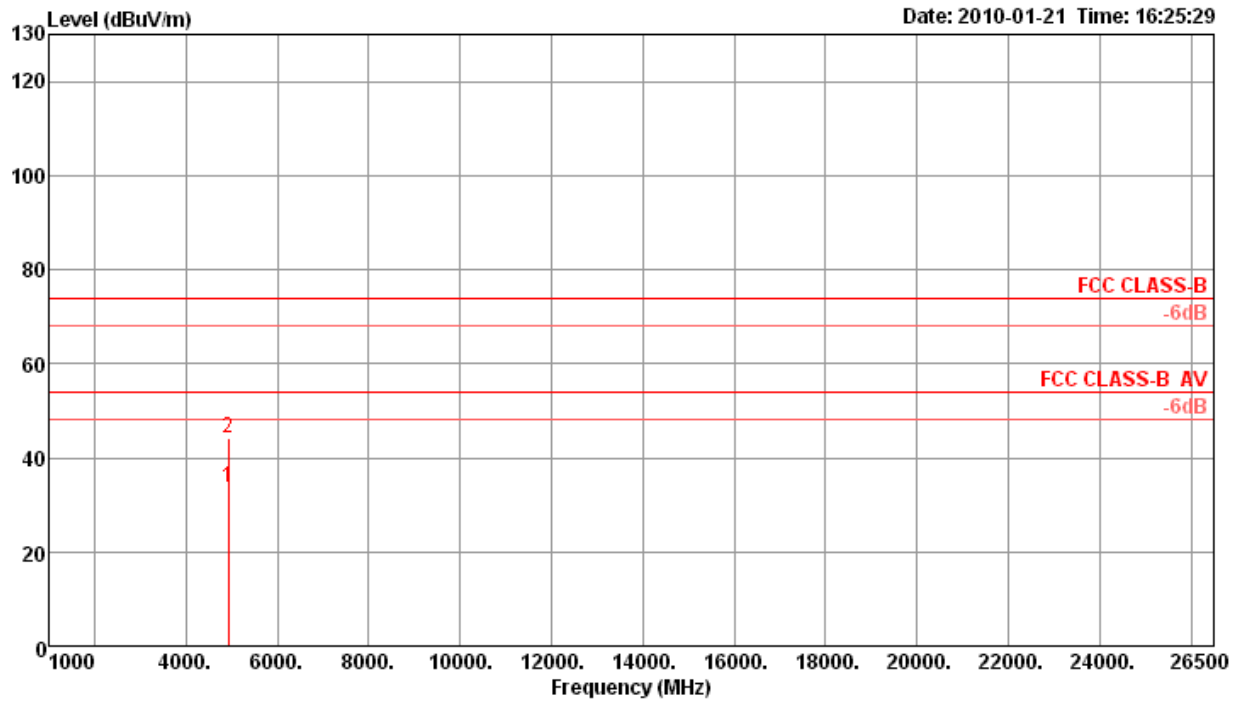

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	a	4923.60	33.82	54.00	-20.18	33.17	3.02	35.03	32.66	103	100	Average	VERTICAL
2	p	4927.40	44.35	74.00	-29.65	43.70	3.02	35.03	32.66	103	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g Turbo CH 6 / Ant. 4

Horizontal

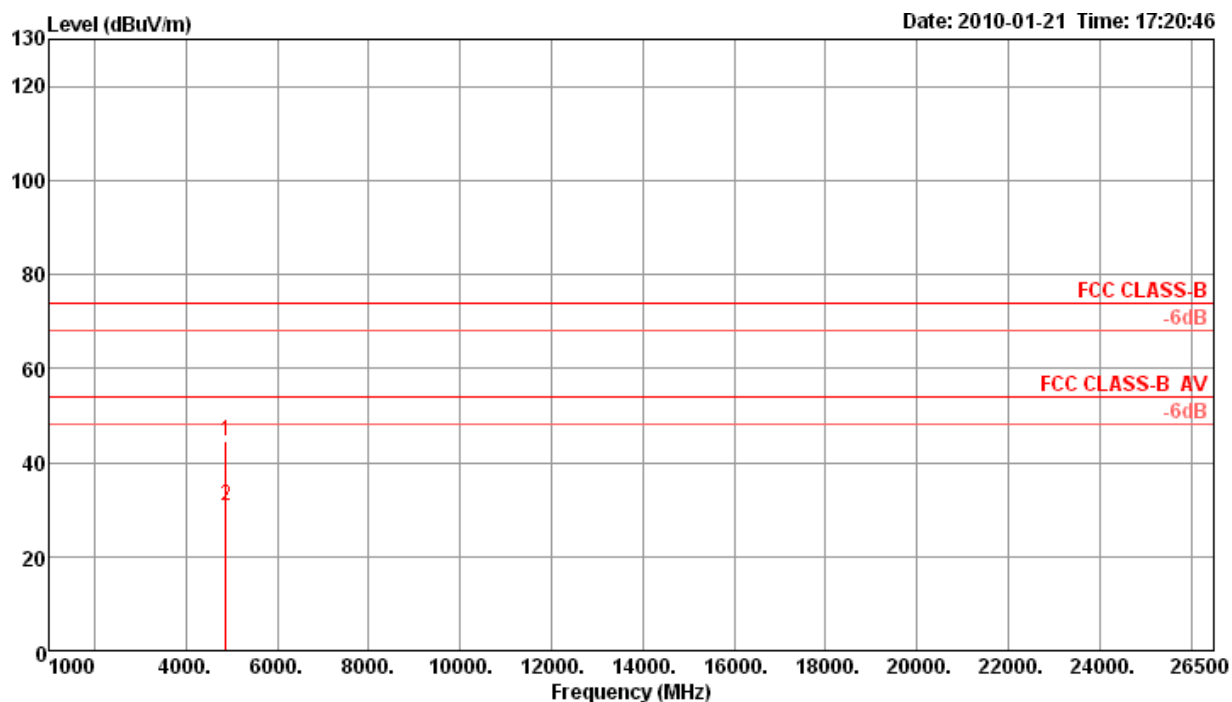

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.99	44.46	74.00	-29.54	44.04	3.01	35.15	32.56	234	100	Peak	HORIZONTAL
2 a	4874.00	30.93	54.00	-23.07	30.51	3.01	35.15	32.56	234	100	Average	HORIZONTAL


Vertical

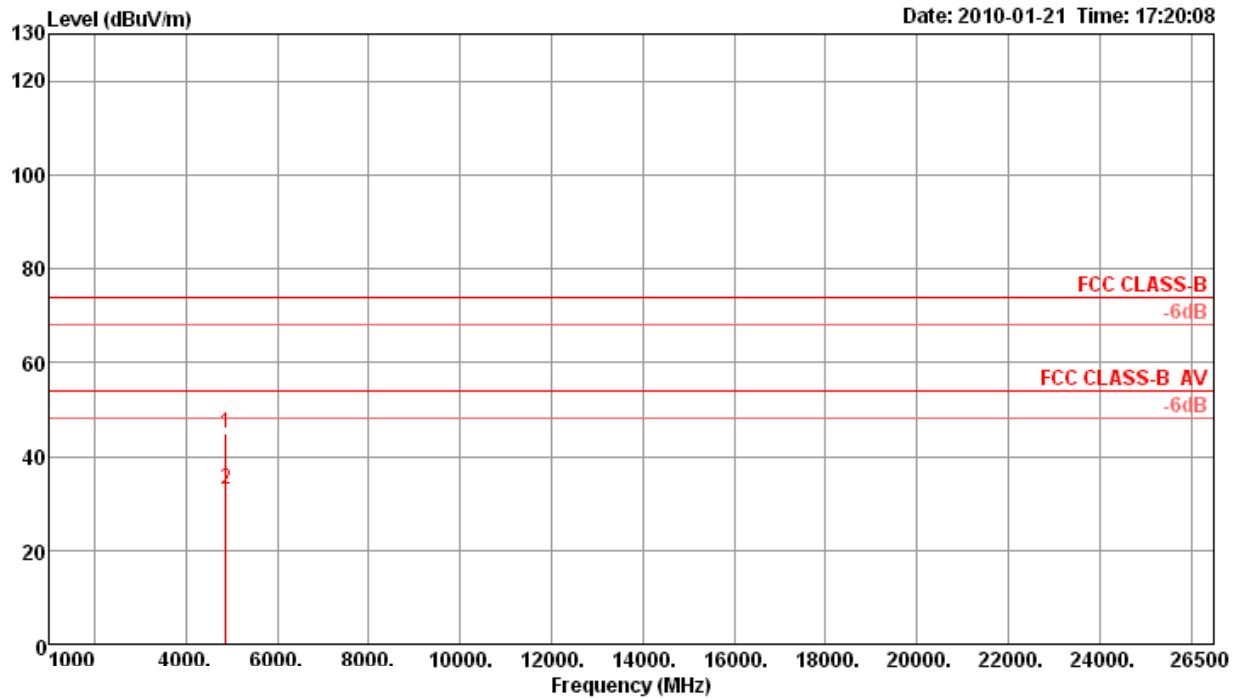

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	p	4874.01	45.00	74.00	-29.00	44.58	3.01	35.15	32.56	307	100	Peak	VERTICAL
2	a	4874.02	32.90	54.00	-21.10	32.48	3.01	35.15	32.56	307	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 149 / Ant. 4

Horizontal

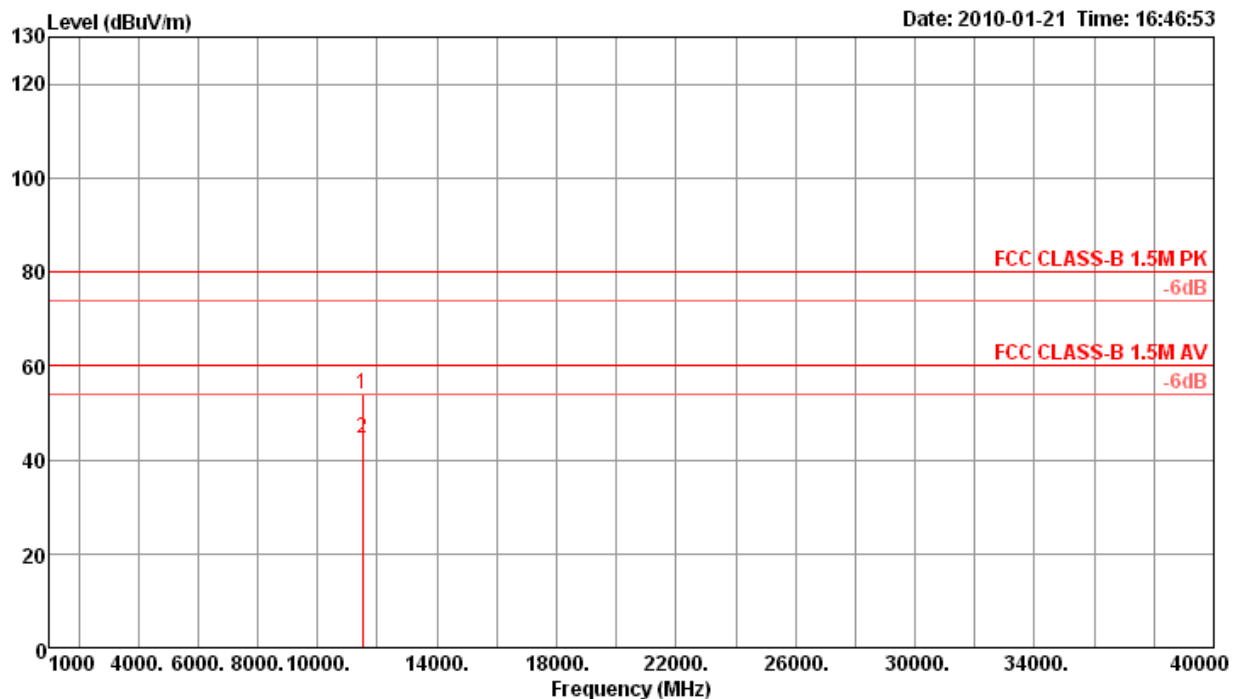

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11489.98	53.99	80.00	-26.01	45.48	4.76	34.75	38.50	109	100	Peak	HORIZONTAL
2 a	11489.99	44.40	60.00	-15.60	35.89	4.76	34.75	38.50	109	100	Average	HORIZONTAL


Vertical

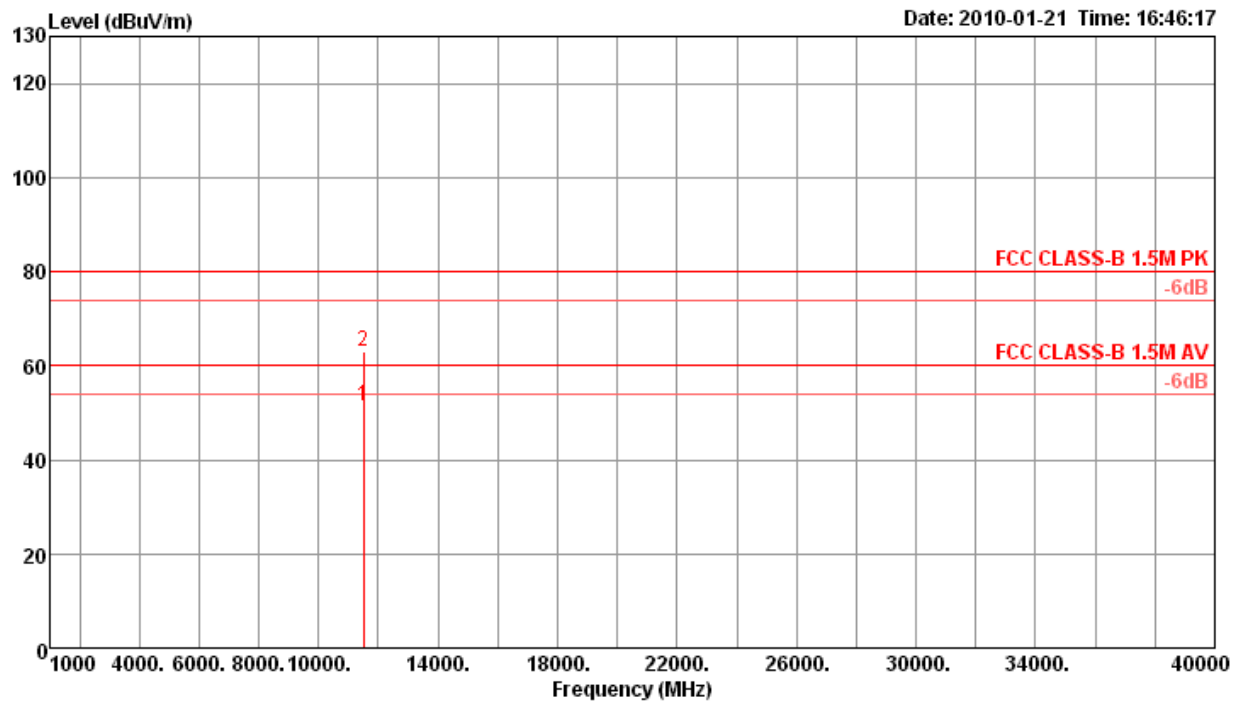

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11490.00	51.44	60.00	-8.56	42.93	4.76	34.75	38.50	242	100	Average	VERTICAL
2 p	11490.00	62.86	80.00	-17.14	54.35	4.76	34.75	38.50	242	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 157 / Ant. 4

Horizontal

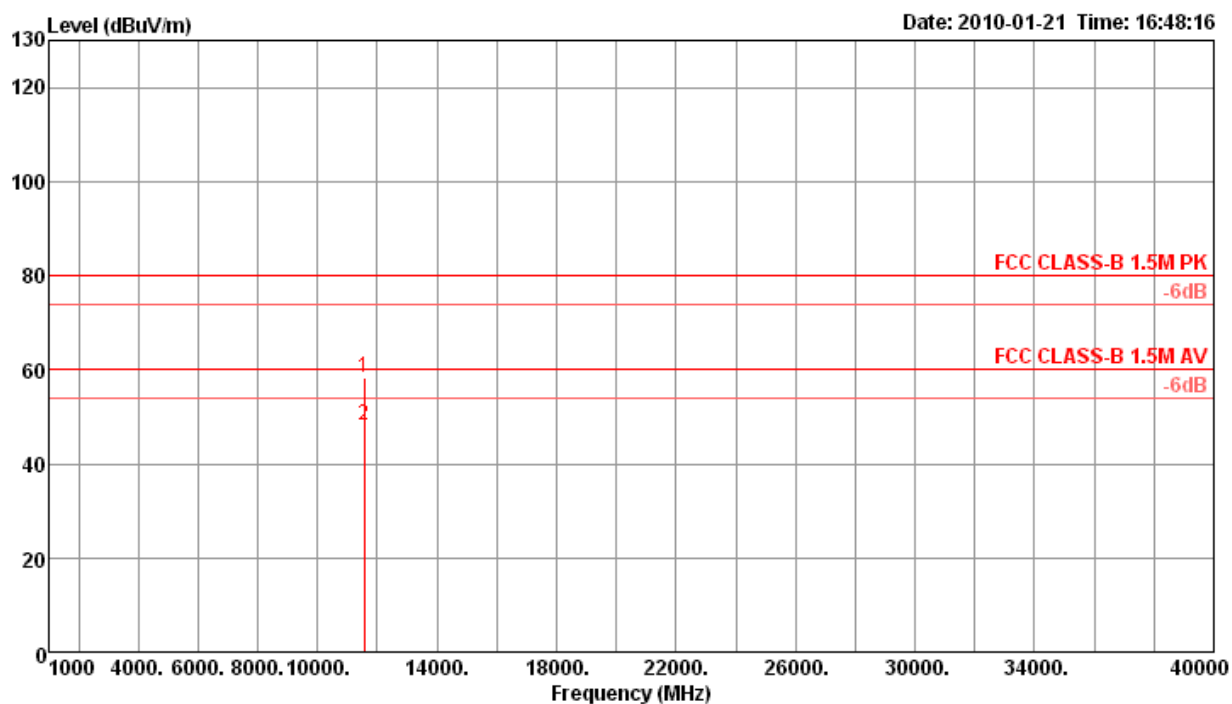

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11569.98	58.42	80.00	-21.58	49.82	4.91	34.82	38.51	220	100	Peak	HORIZONTAL
2 a	11570.01	48.02	60.00	-11.98	39.42	4.91	34.82	38.51	220	100	Average	HORIZONTAL


Vertical

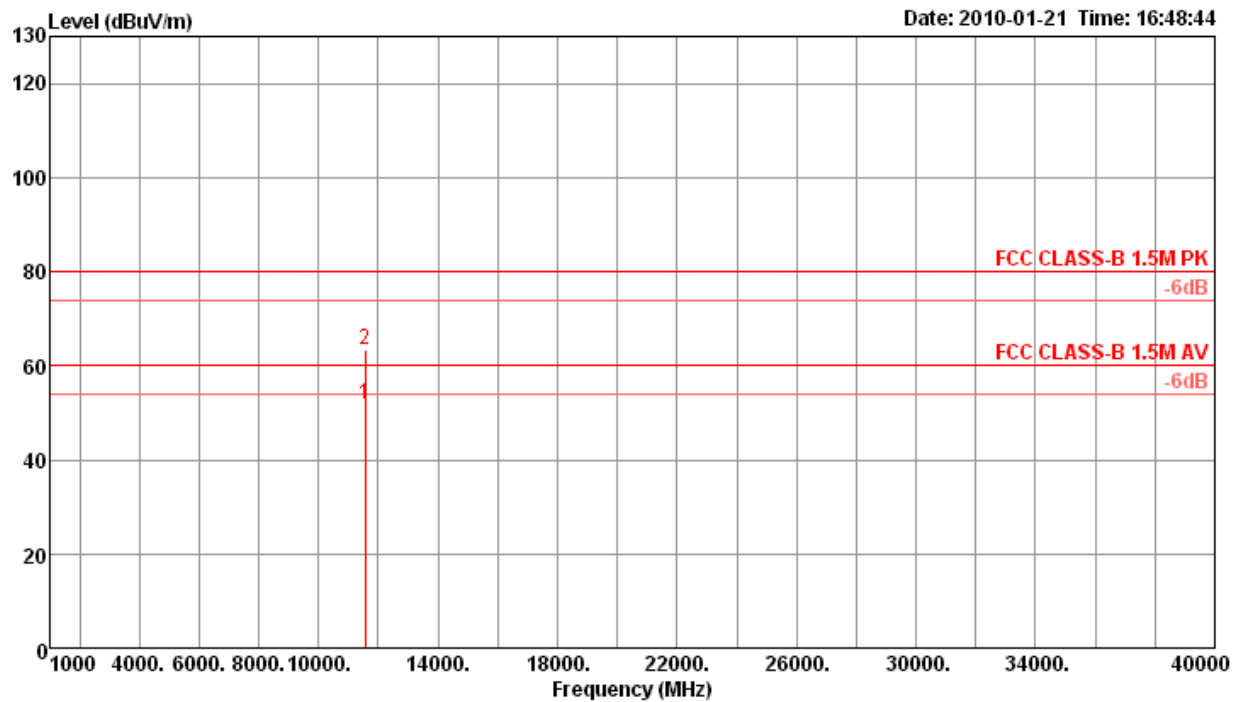

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11569.98	51.90	60.00	-8.10	43.30	4.91	34.82	38.51	147	100	Average	VERTICAL
2 p	11569.98	63.40	80.00	-16.60	54.80	4.91	34.82	38.51	147	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 165 / Ant. 4

Horizontal

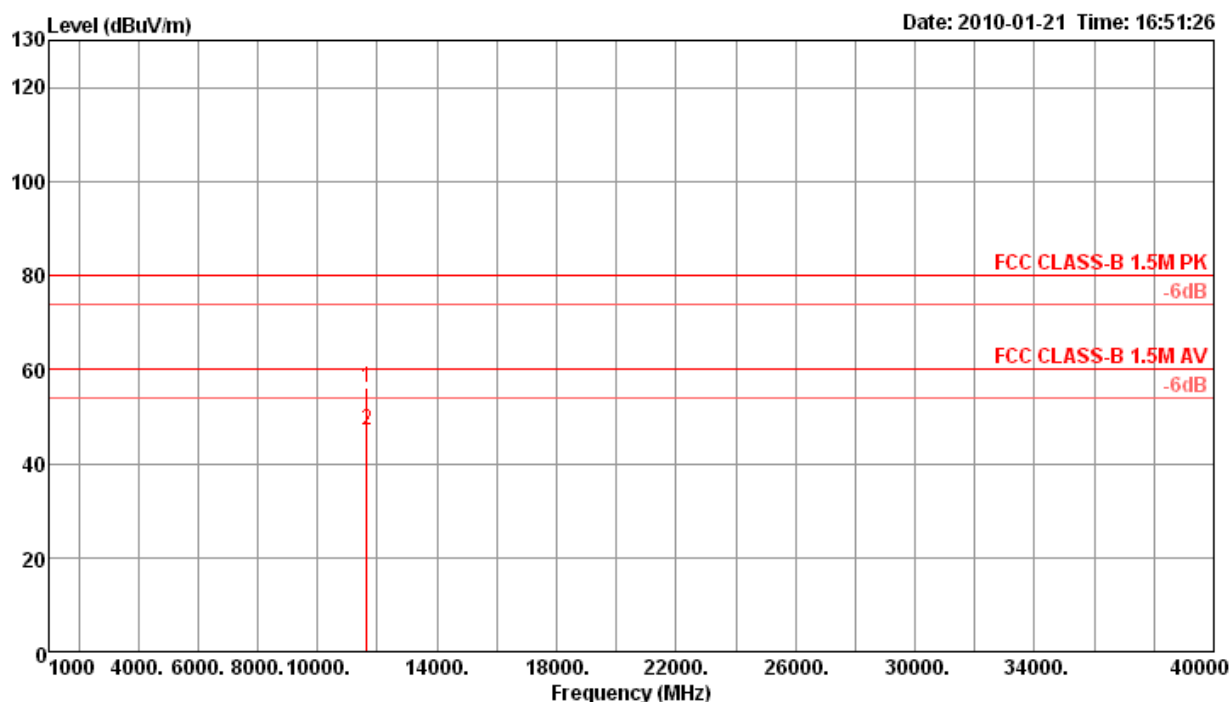

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11649.99	56.01	80.00	-23.99	47.35	5.03	34.90	38.53	46	100	Peak	HORIZONTAL
2 a	11650.01	47.02	60.00	-12.98	38.36	5.03	34.90	38.53	46	100	Average	HORIZONTAL

Vertical

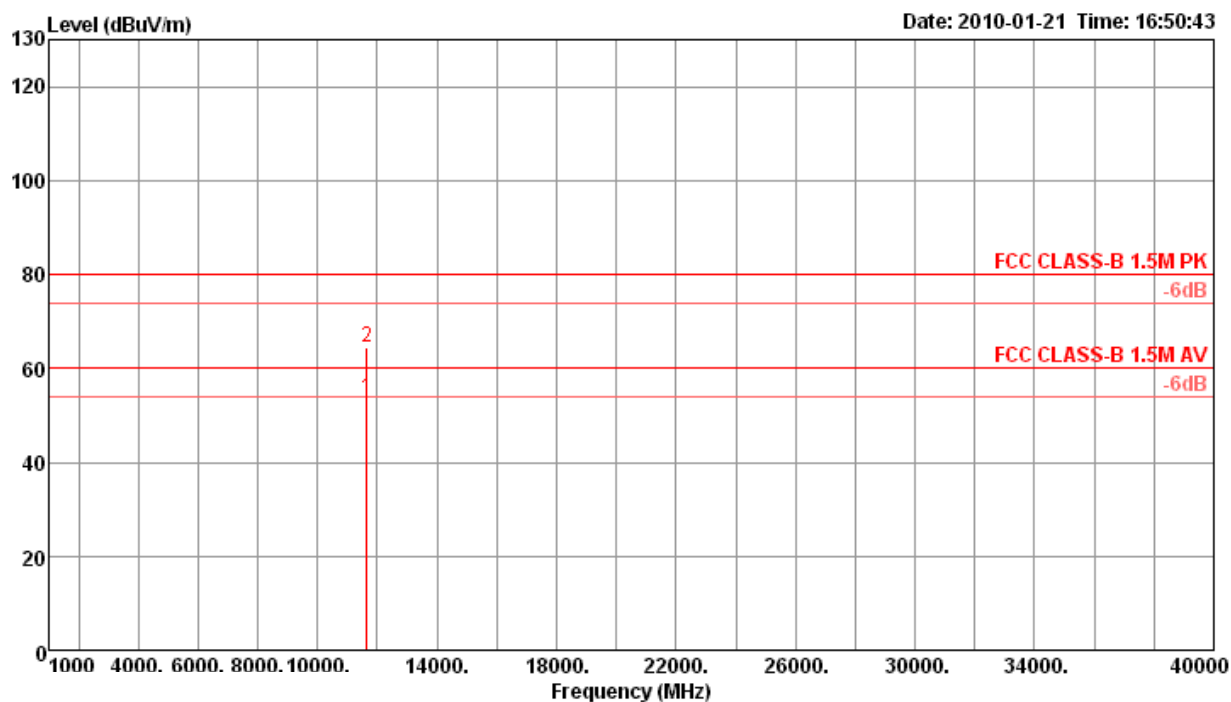

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11650.01	53.60	60.00	-6.40	44.94	5.03	34.90	38.53	263	100	Average	VERTICAL
2 p	11650.02	64.55	80.00	-15.45	55.89	5.03	34.90	38.53	263	100	Peak	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo CH 152 / Ant. 4

Horizontal

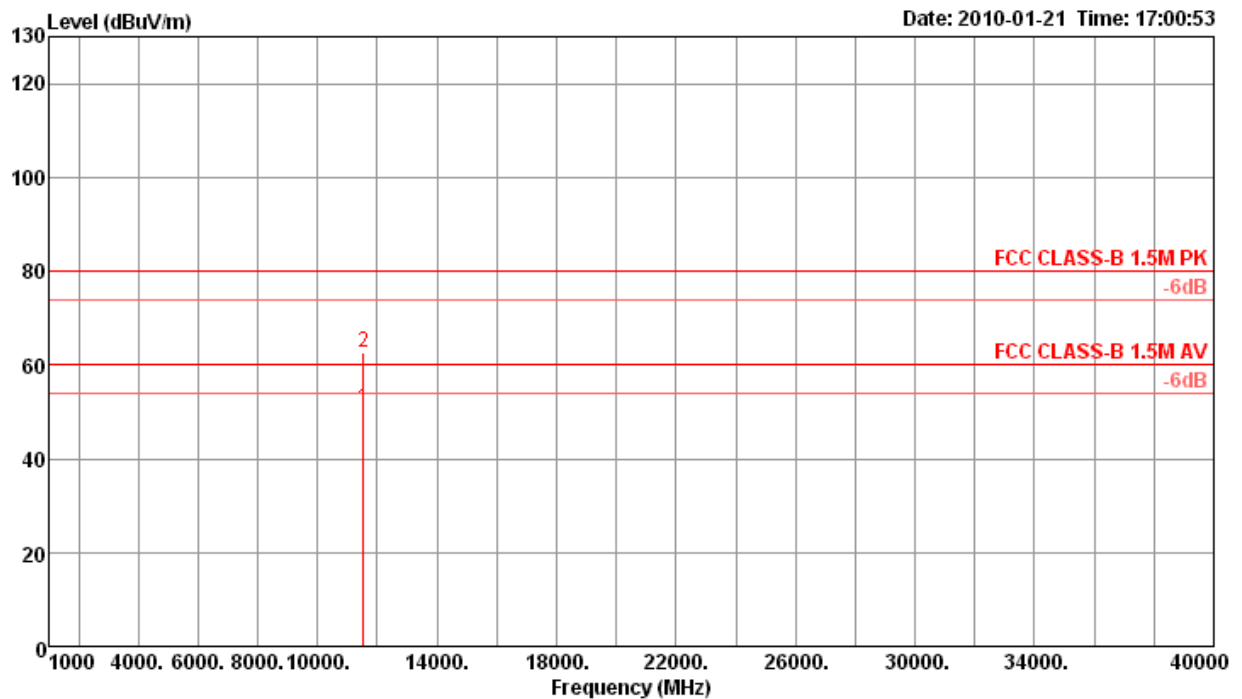

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11520.08	50.62	60.00	-9.38	42.07	4.82	34.77	38.50	341	109	Average	HORIZONTAL
2 b	11521.04	62.71	80.00	-17.29	54.16	4.82	34.77	38.50	341	109	Peak	HORIZONTAL

Vertical

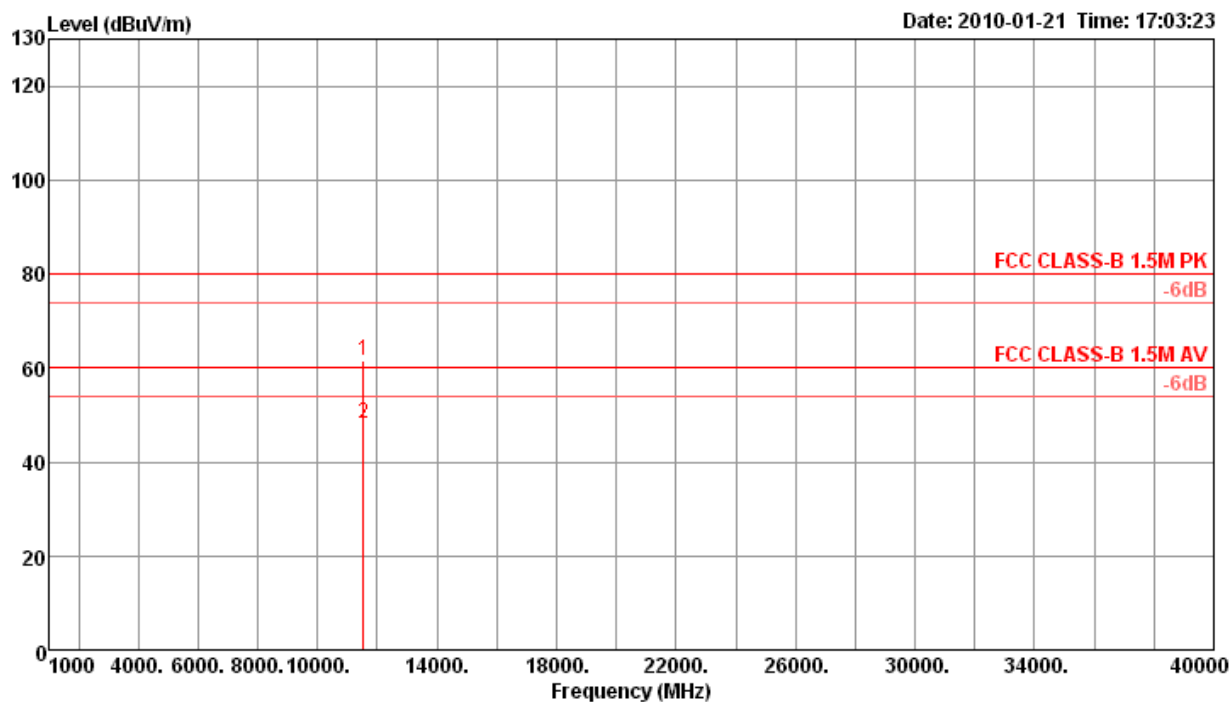

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11519.72	61.61	80.00	-18.39	53.06	4.82	34.77	38.50	360	100	Peak	VERTICAL
2 a	11520.08	48.27	60.00	-11.73	39.72	4.82	34.77	38.50	360	100	Average	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo CH 160 / Ant. 4

Horizontal

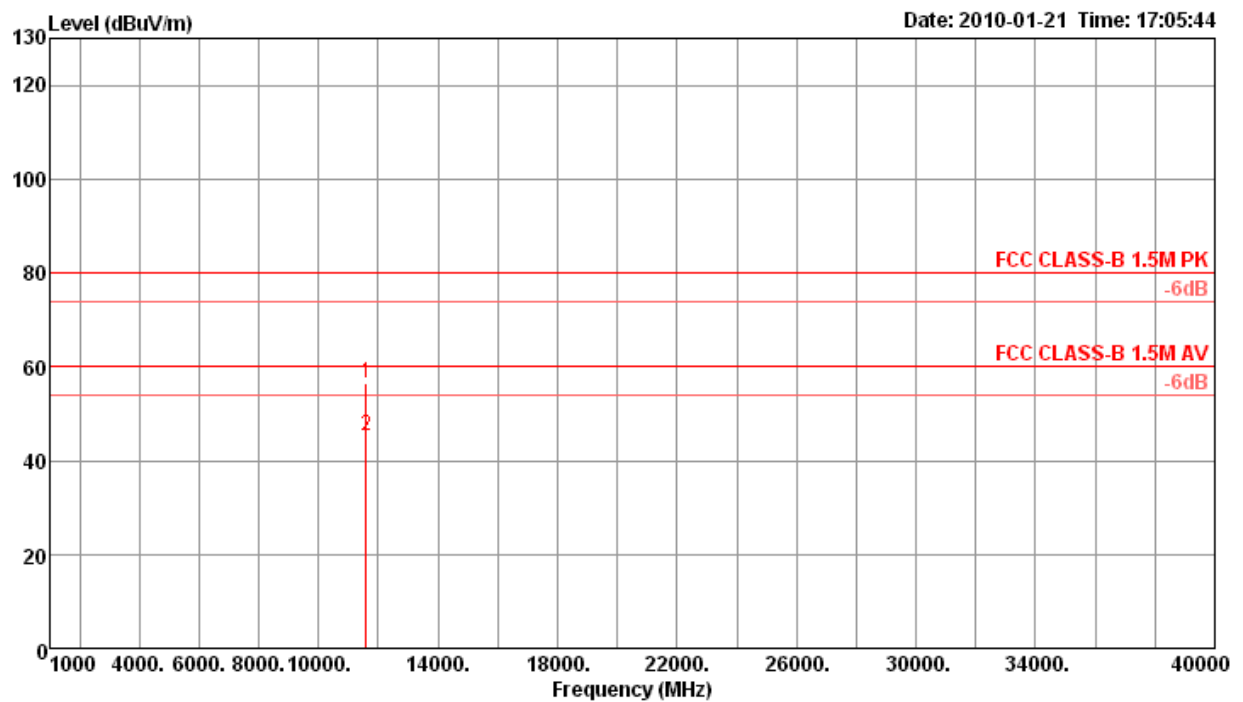

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11599.99	56.38	80.00	-23.62	47.76	4.95	34.85	38.52	143	100	Peak	HORIZONTAL
2 a	11600.02	45.33	60.00	-14.67	36.71	4.95	34.85	38.52	143	100	Average	HORIZONTAL

Vertical

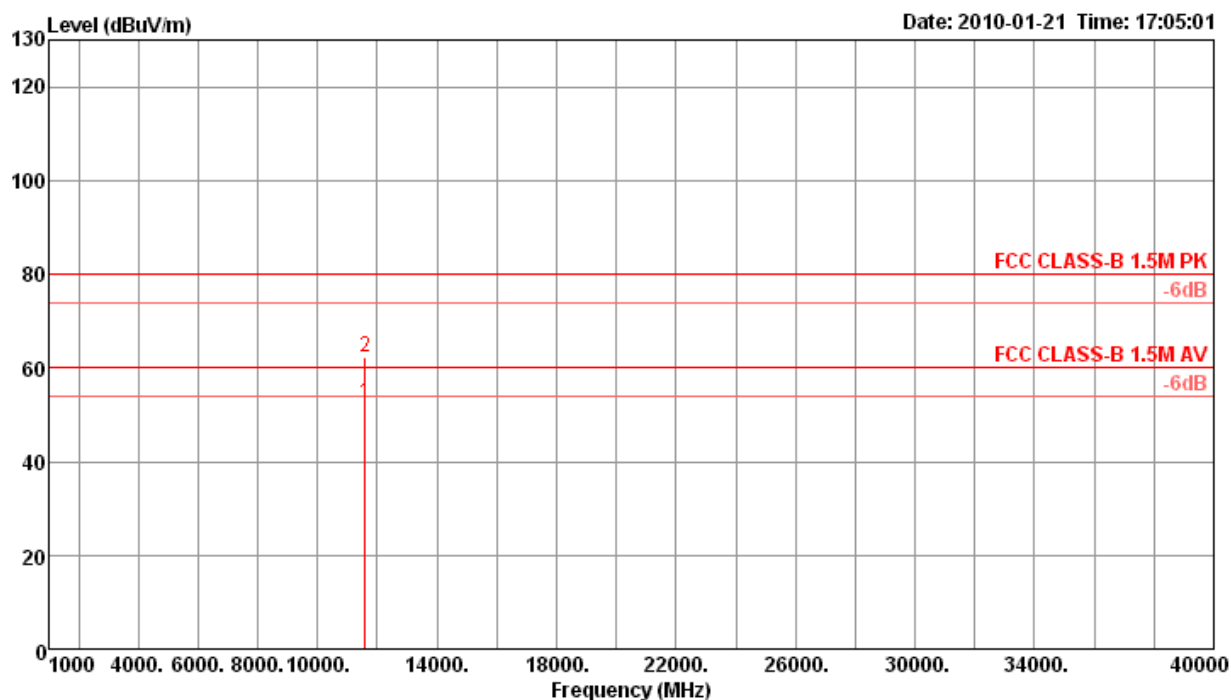

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11599.98	52.33	60.00	-7.67	43.71	4.95	34.85	38.52	264	100	Average	VERTICAL
2 p	11599.99	62.14	80.00	-17.86	53.52	4.95	34.85	38.52	264	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 5>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 1 / Ant. 5

Horizontal

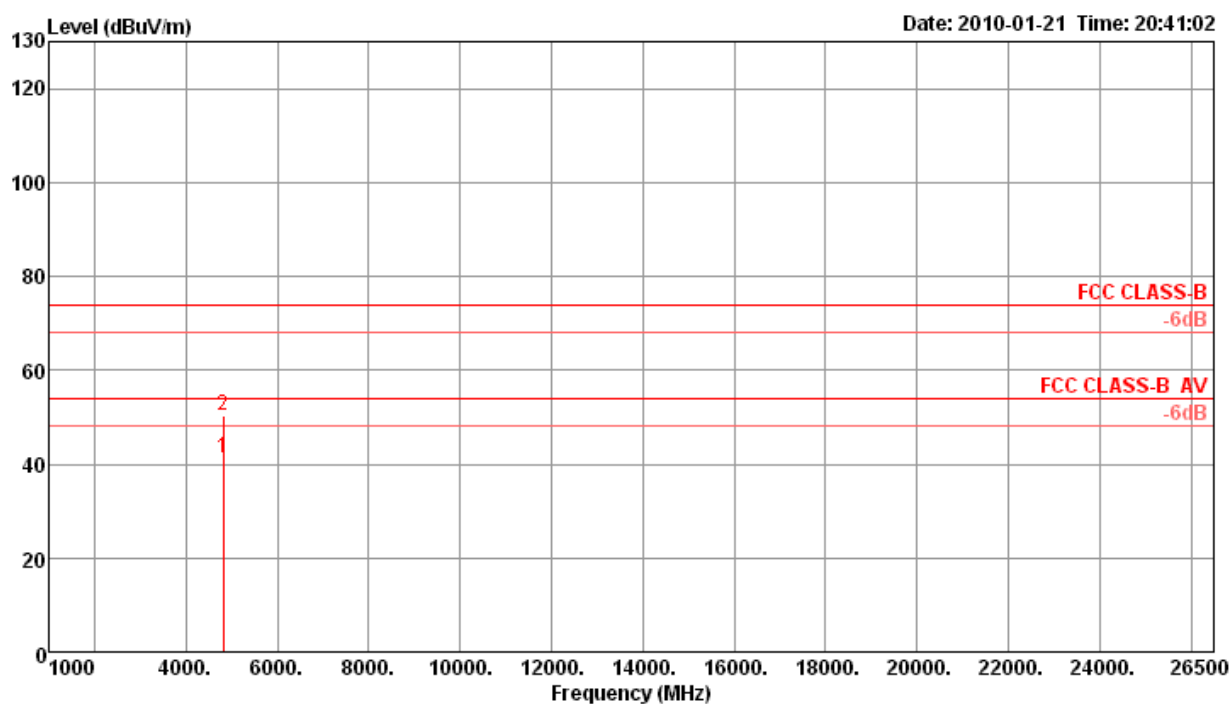

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.91	41.43	54.00	-12.57	41.23	3.00	35.26	32.46	290	100	Average	HORIZONTAL
2 p	4824.04	50.26	74.00	-23.74	50.06	3.00	35.26	32.46	290	100	Peak	HORIZONTAL


Vertical

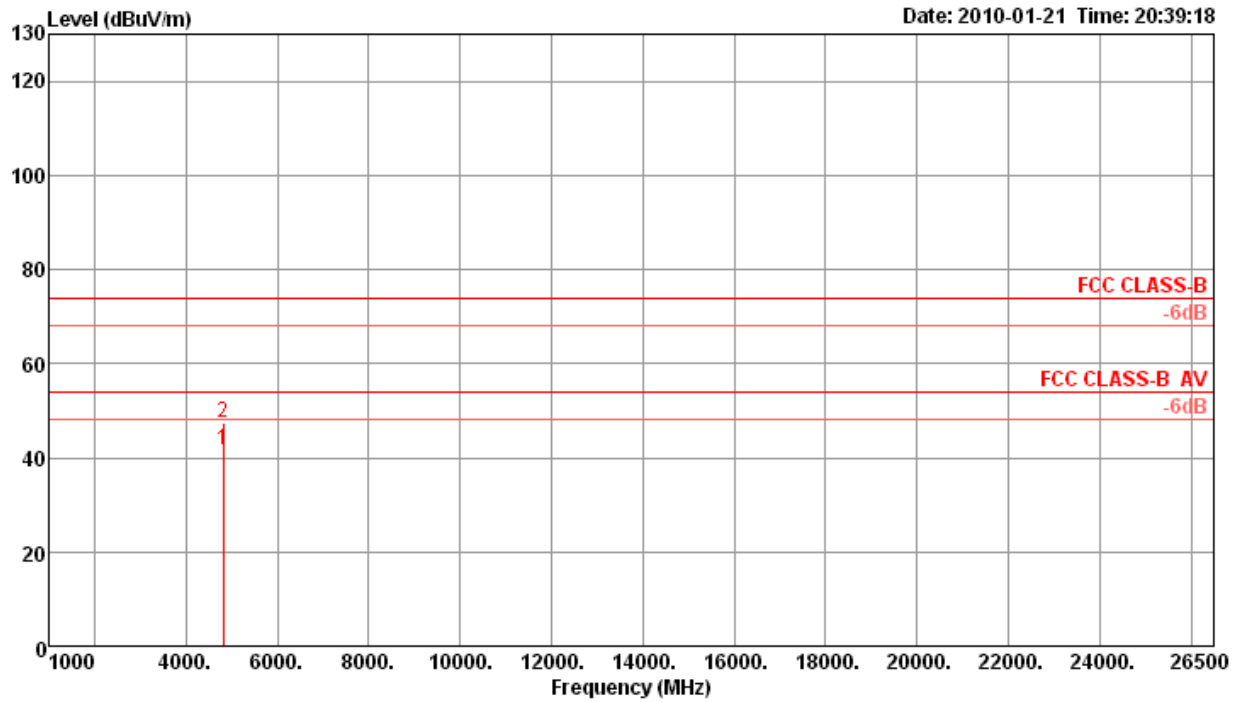

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	a	4823.87	41.54	54.00	-12.46	41.34	3.00	35.26	32.46	99	116	Average	VERTICAL
2	p	4823.87	47.35	74.00	-26.65	47.15	3.00	35.26	32.46	99	116	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 6 / Ant. 5

Horizontal

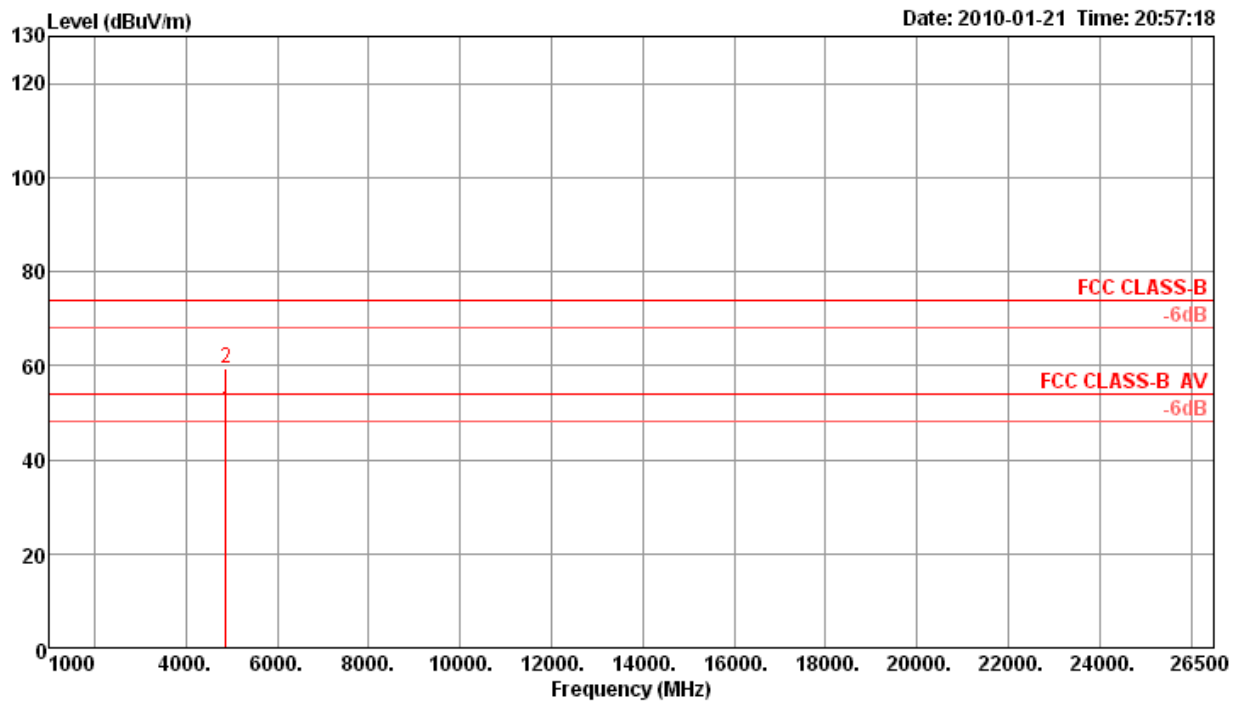

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.89	50.16	54.00	-3.84	49.74	3.01	35.15	32.56	232	154	Average	HORIZONTAL
2 p	4873.96	59.48	74.00	-14.52	59.06	3.01	35.15	32.56	232	154	Peak	HORIZONTAL


Vertical

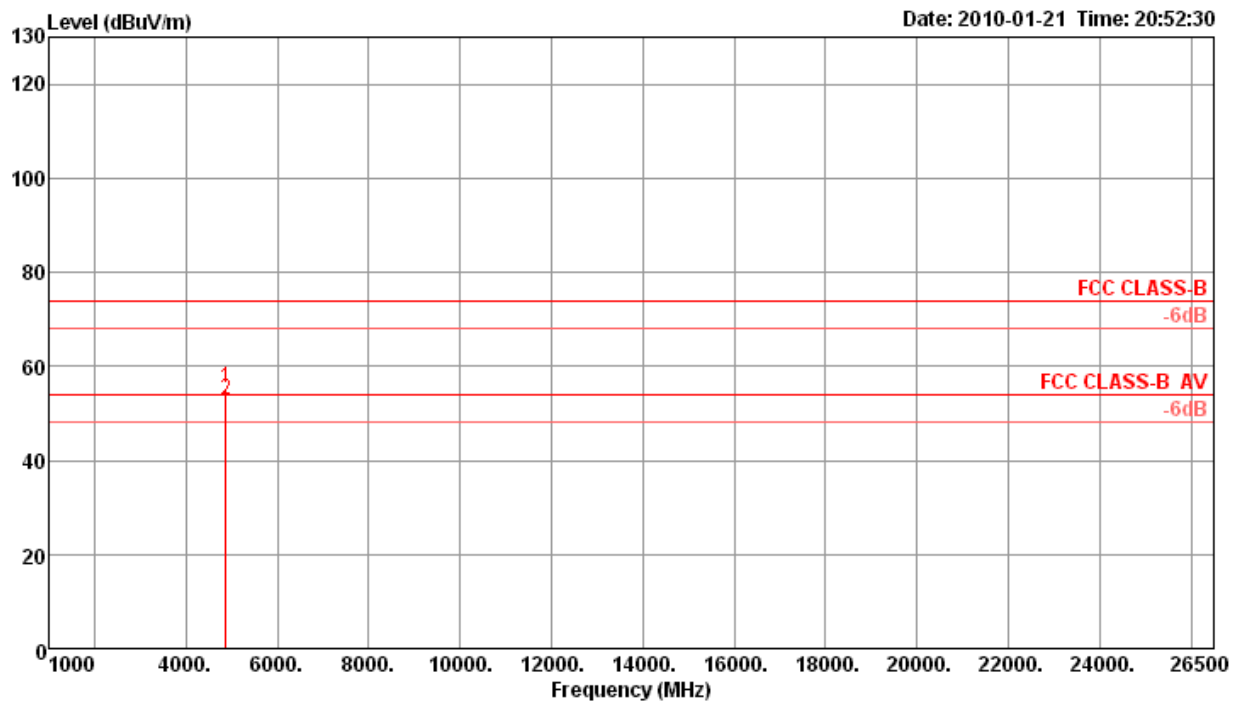

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.88	55.38	74.00	-18.62	54.96	3.01	35.15	32.56	182	100	Peak	VERTICAL
2 a	4873.94	52.76	54.00	-1.24	52.34	3.01	35.15	32.56	182	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 11 / Ant. 5

Horizontal

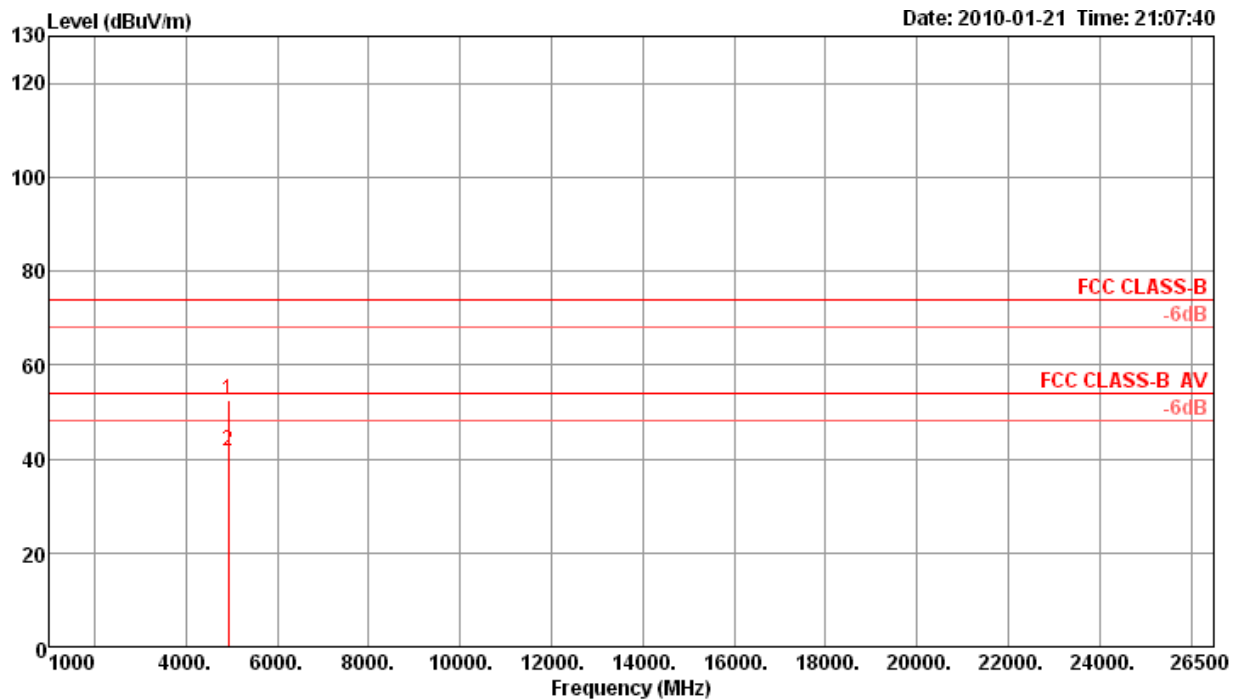

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.88	52.64	74.00	-21.36	51.99	3.02	35.03	32.66	271	175	Peak	HORIZONTAL
2 a	4923.94	41.63	54.00	-12.37	40.98	3.02	35.03	32.66	271	175	Average	HORIZONTAL


Vertical

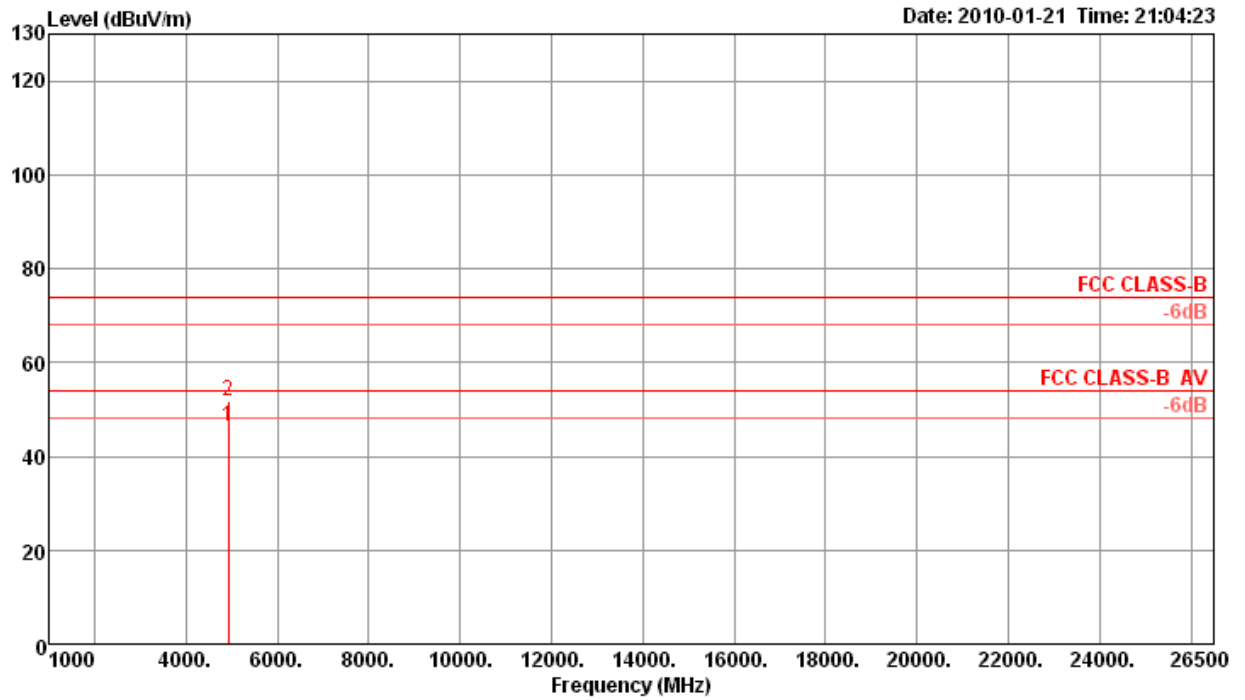

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.93	46.37	54.00	-7.63	45.72	3.02	35.03	32.66	95	163	Average	VERTICAL
2 p	4924.08	51.77	74.00	-22.23	51.12	3.02	35.03	32.66	95	163	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 1 / Ant. 5

Horizontal

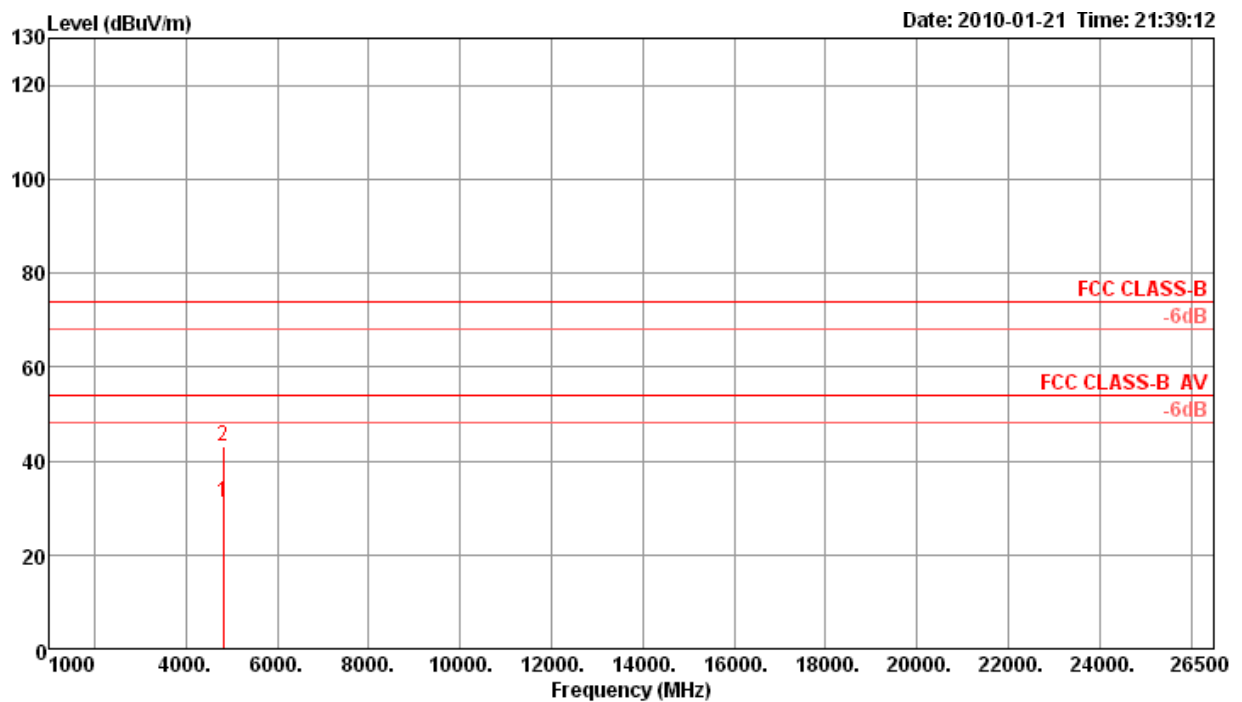

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.98	31.32	54.00	-22.68	31.12	3.00	35.26	32.46	158	100	Average	HORIZONTAL
2 p	4824.01	43.02	74.00	-30.98	42.82	3.00	35.26	32.46	158	100	Peak	HORIZONTAL


Vertical

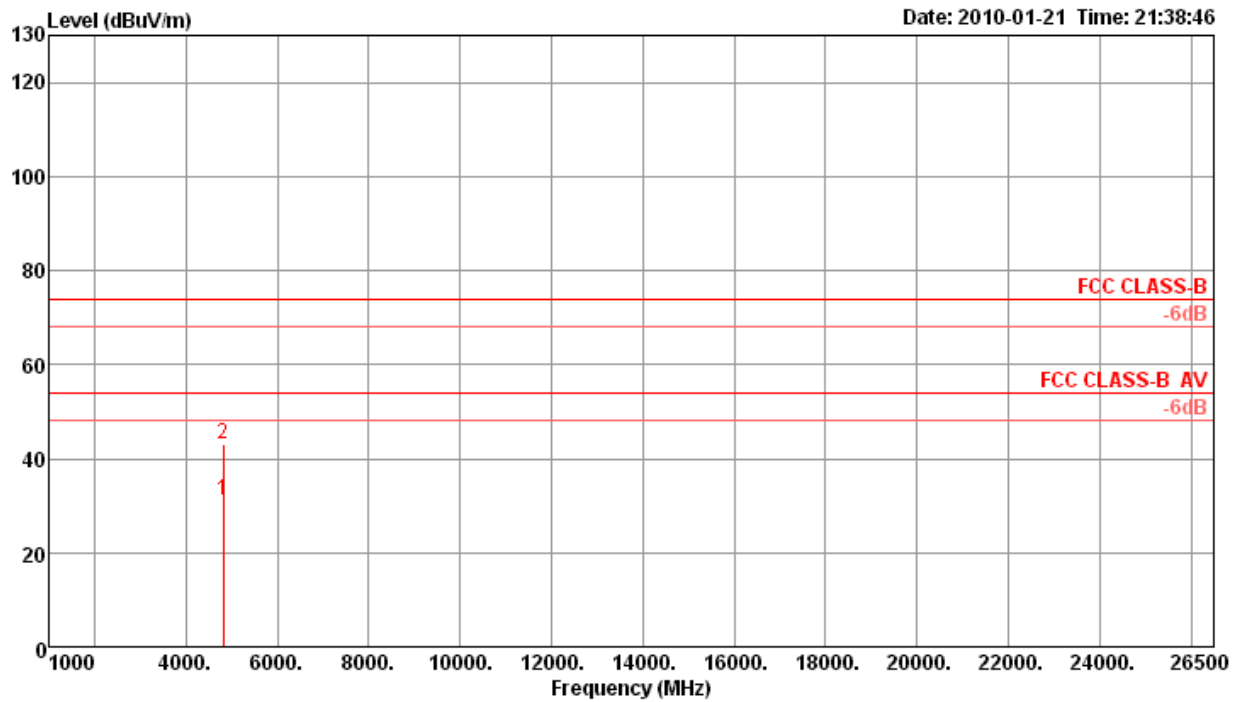

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	a	4823.98	31.26	54.00	-22.74	31.06	3.00	35.26	32.46	245	100	Average	VERTICAL
2	p	4823.98	43.13	74.00	-30.87	42.93	3.00	35.26	32.46	245	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 6 / Ant. 5

Horizontal

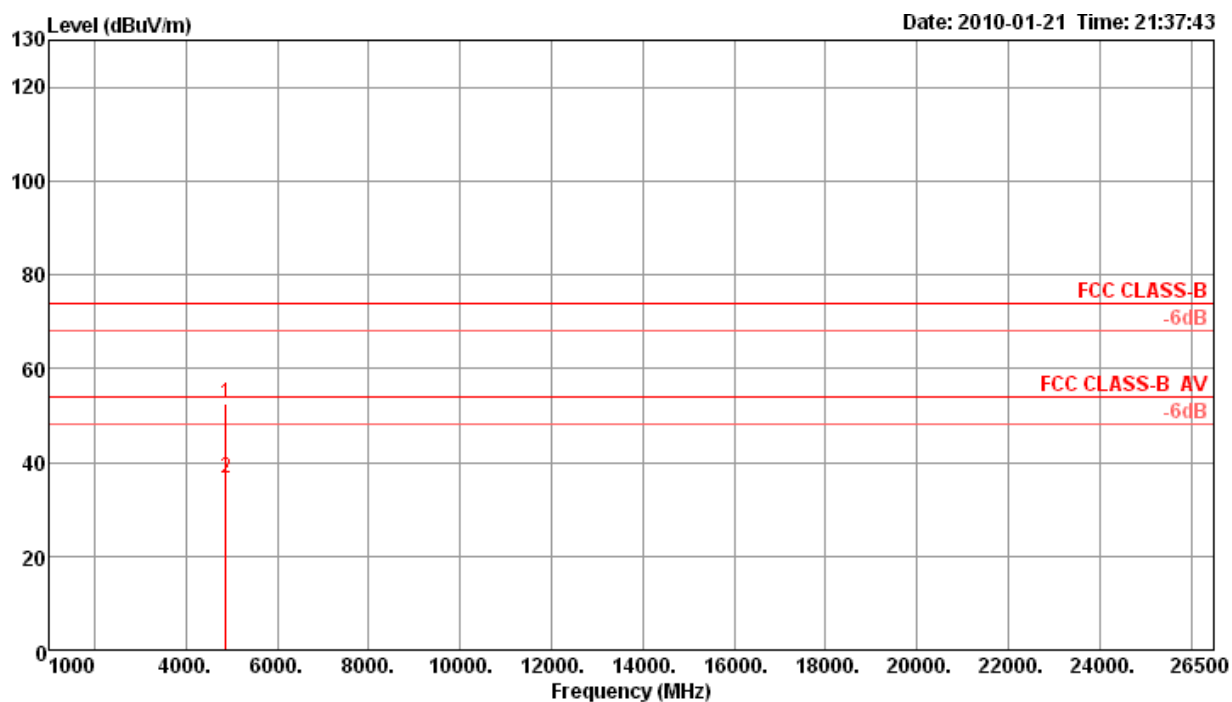

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.99	52.65	74.00	-21.35	52.23	3.01	35.15	32.56	140	100	Peak	HORIZONTAL
2 a	4874.03	36.60	54.00	-17.40	36.18	3.01	35.15	32.56	140	100	Average	HORIZONTAL


Vertical

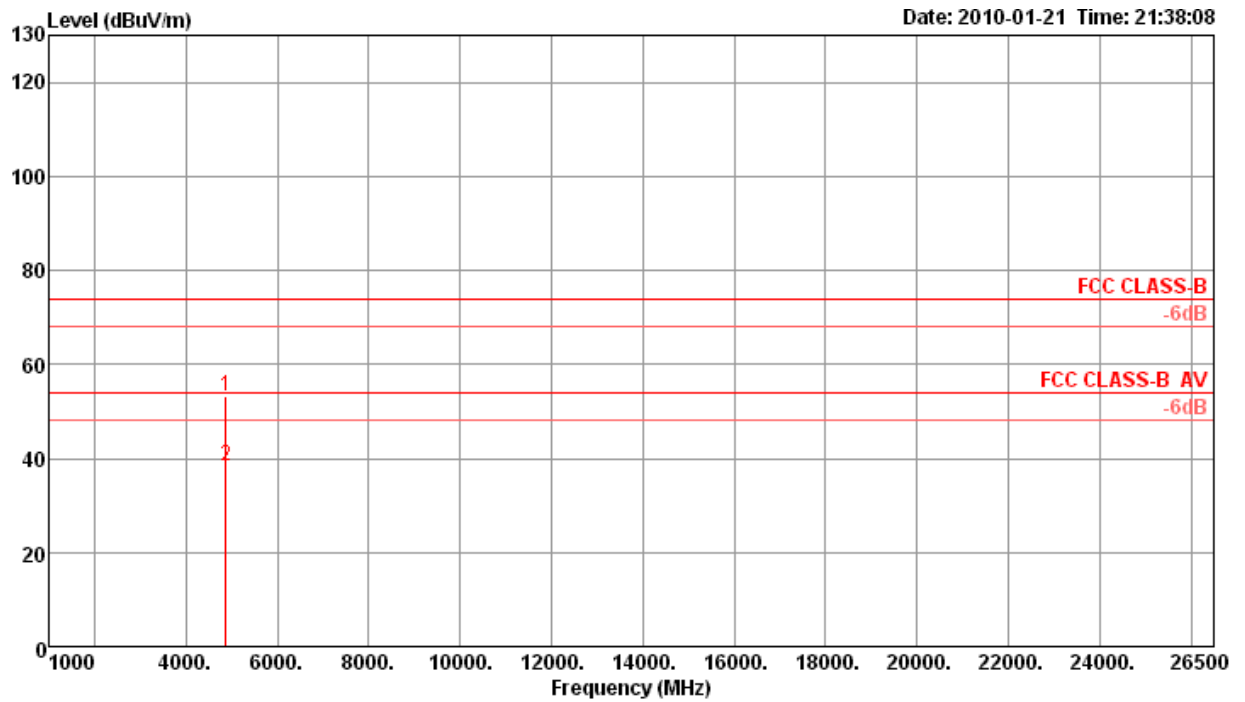

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 p	4873.98	53.10	74.00	-20.90	52.68	3.01	35.15	32.56	190	100	Peak	VERTICAL
2 a	4874.01	38.33	54.00	-15.67	37.91	3.01	35.15	32.56	190	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g CH 11 / Ant. 5

Horizontal

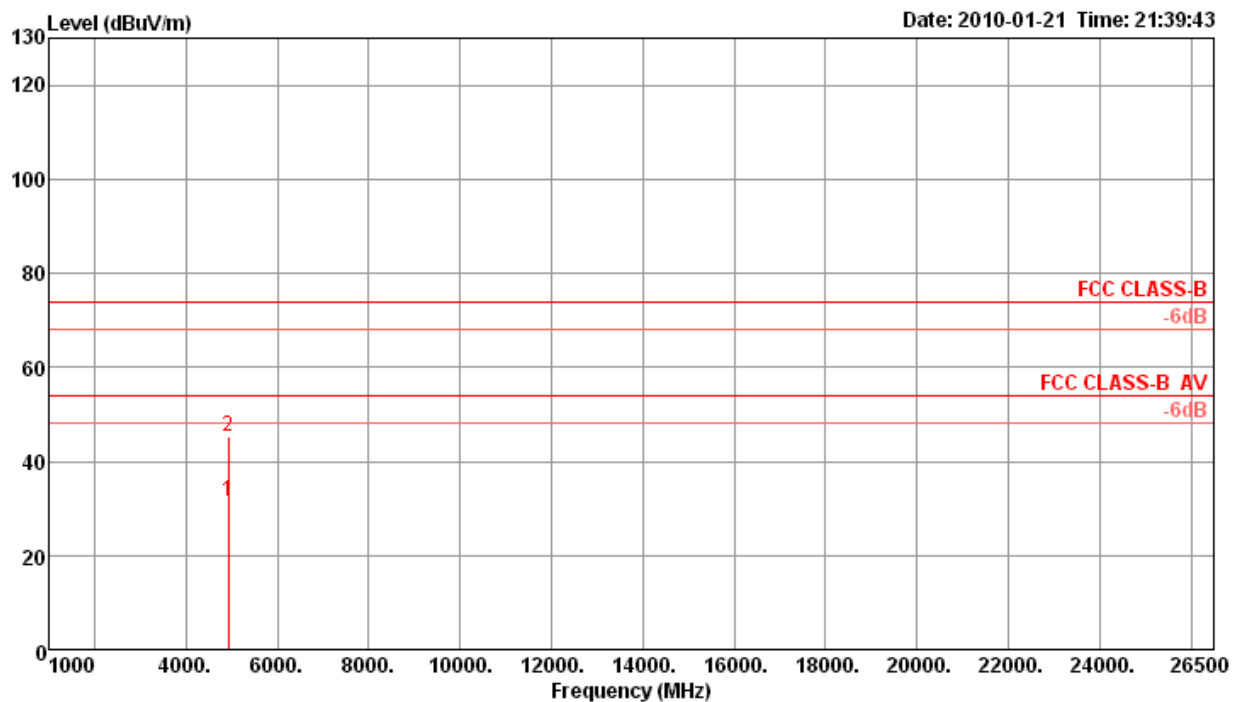

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.98	31.43	54.00	-22.57	30.78	3.02	35.03	32.66	215	100	Average	HORIZONTAL
2 p	4924.02	45.31	74.00	-28.69	44.66	3.02	35.03	32.66	215	100	Peak	HORIZONTAL


Vertical

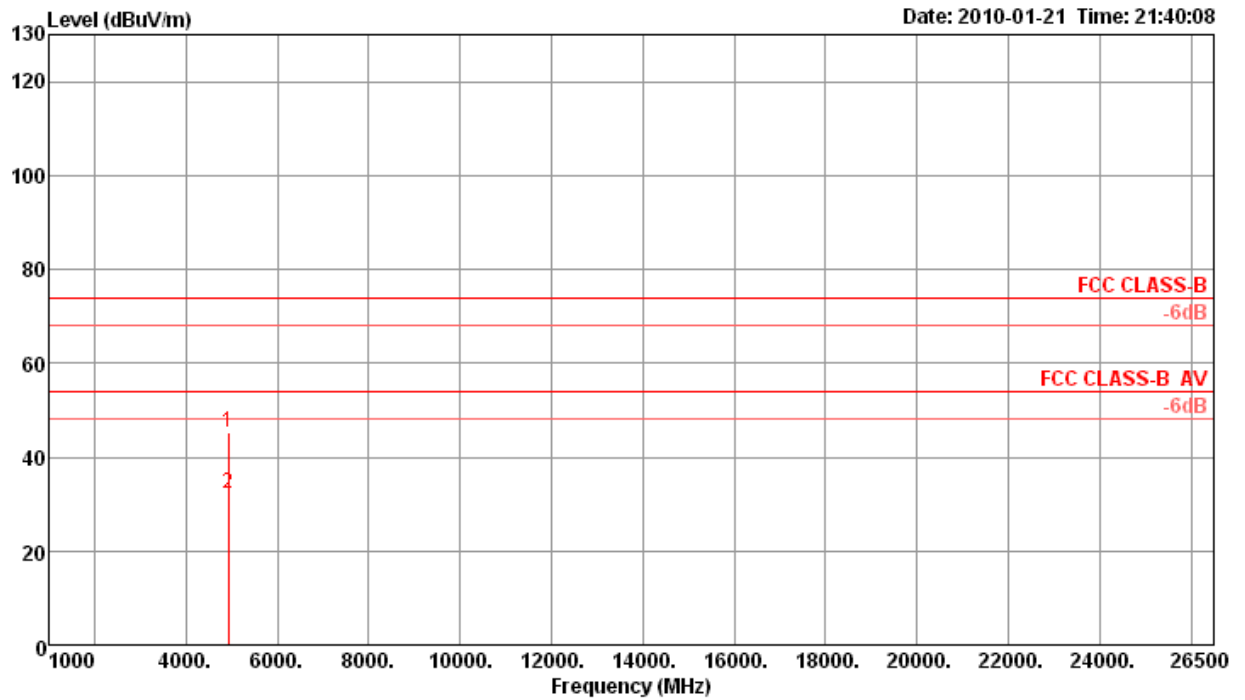

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.99	45.37	74.00	-28.63	44.72	3.02	35.03	32.66	286	100	Peak	VERTICAL
2 a	4924.03	32.10	54.00	-21.90	31.45	3.02	35.03	32.66	286	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11g Turbo CH 6 / Ant. 5

Horizontal

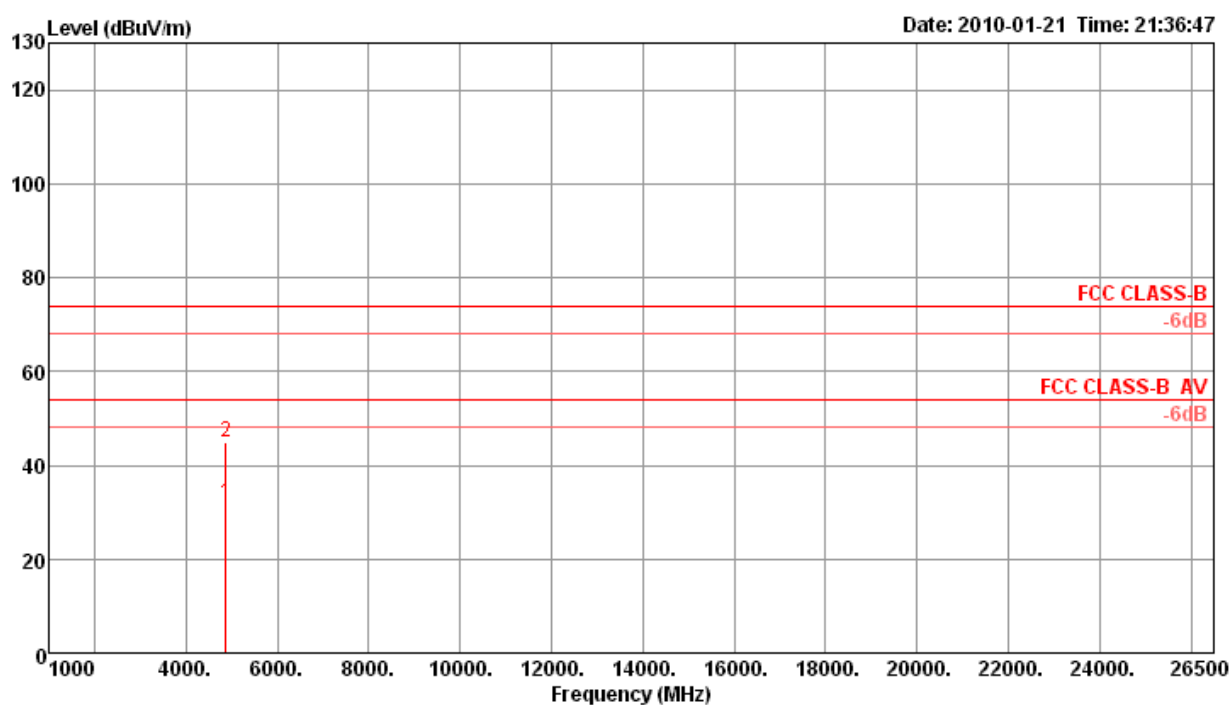

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.98	31.83	54.00	-22.17	31.41	3.01	35.15	32.56	231	100	Average	HORIZONTAL
2 p	4873.99	45.02	74.00	-28.98	44.60	3.01	35.15	32.56	231	100	Peak	HORIZONTAL


Vertical

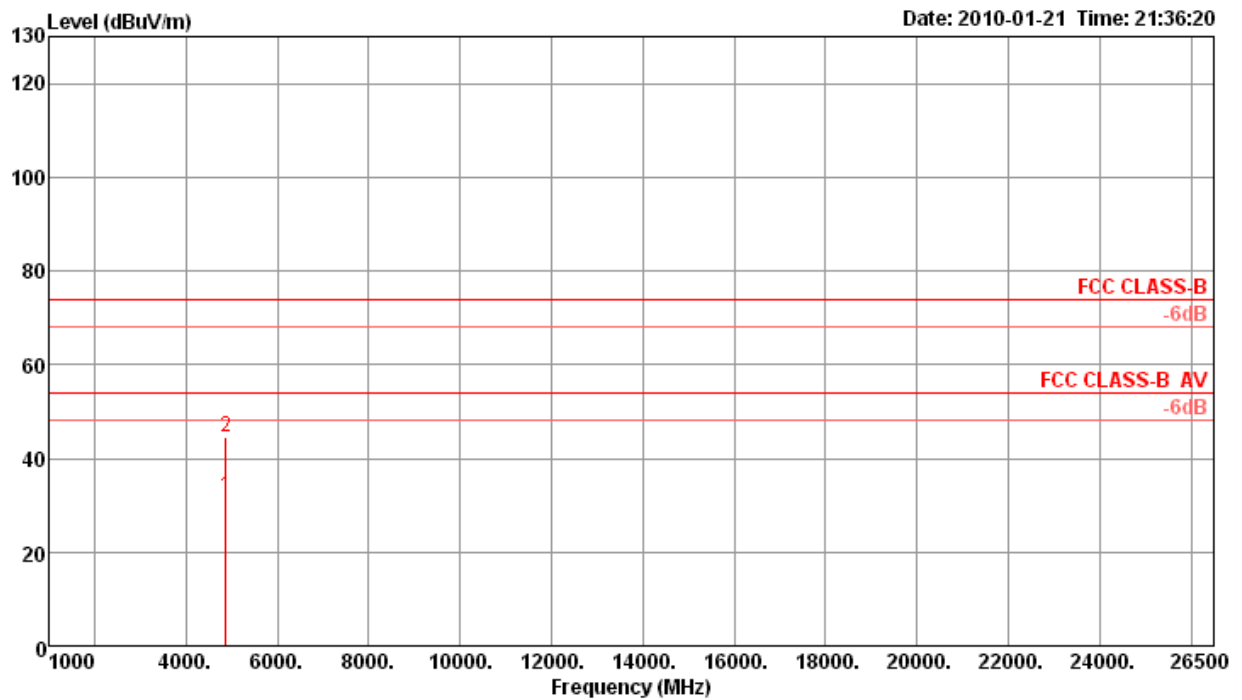

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4874.00	31.86	54.00	-22.14	31.44	3.01	35.15	32.56	274	100	Average	VERTICAL
2 p	4874.00	44.67	74.00	-29.33	44.25	3.01	35.15	32.56	274	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 149 / Ant. 5

Horizontal

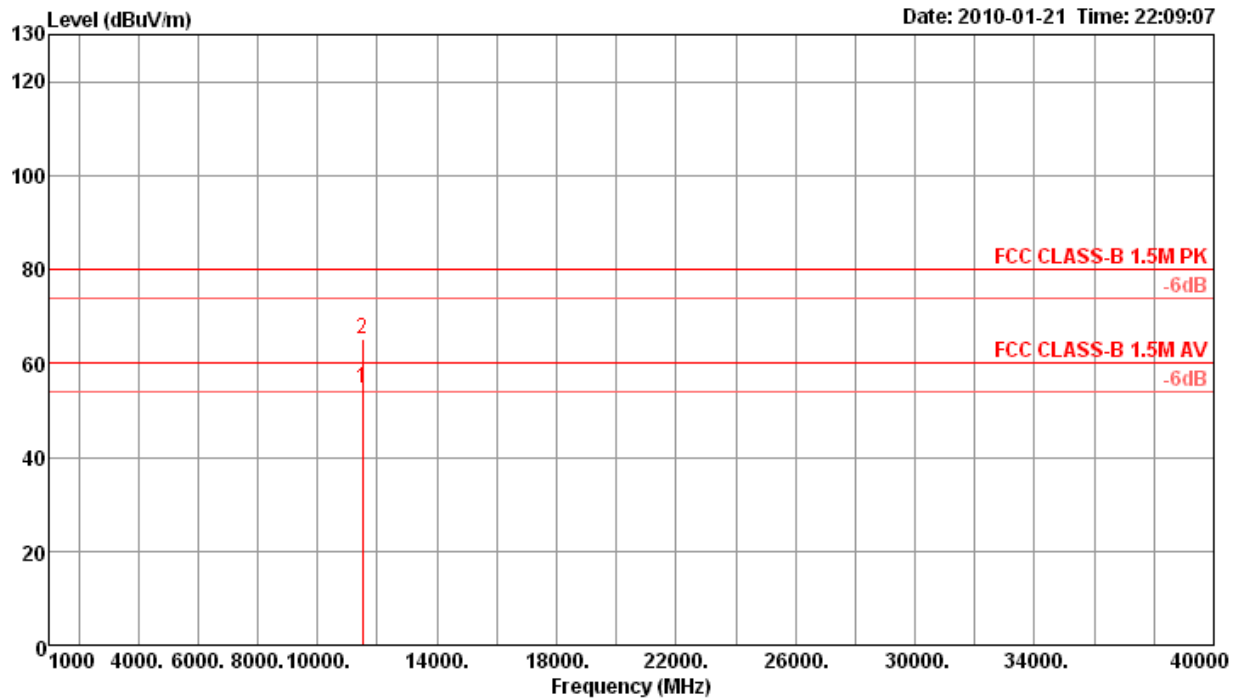

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11489.98	54.66	60.00	-5.34	46.15	4.76	34.75	38.50	251	100	Average	HORIZONTAL
2 p	11490.00	65.20	80.00	-14.80	56.69	4.76	34.75	38.50	251	100	Peak	HORIZONTAL


Vertical

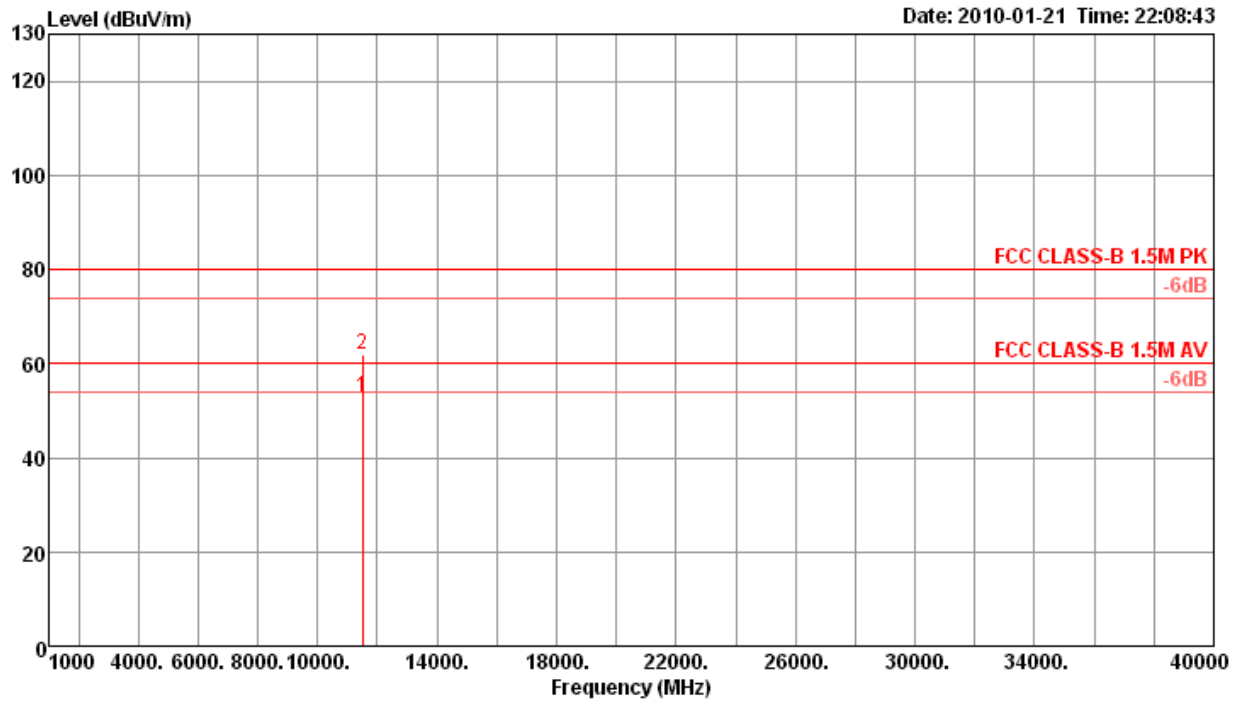

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	a	11490.02	52.77	60.00	-7.23	44.26	4.76	34.75	38.50	284	100	Average	VERTICAL
2	p	11490.02	61.96	80.00	-18.04	53.45	4.76	34.75	38.50	284	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 157 / Ant. 5

Horizontal

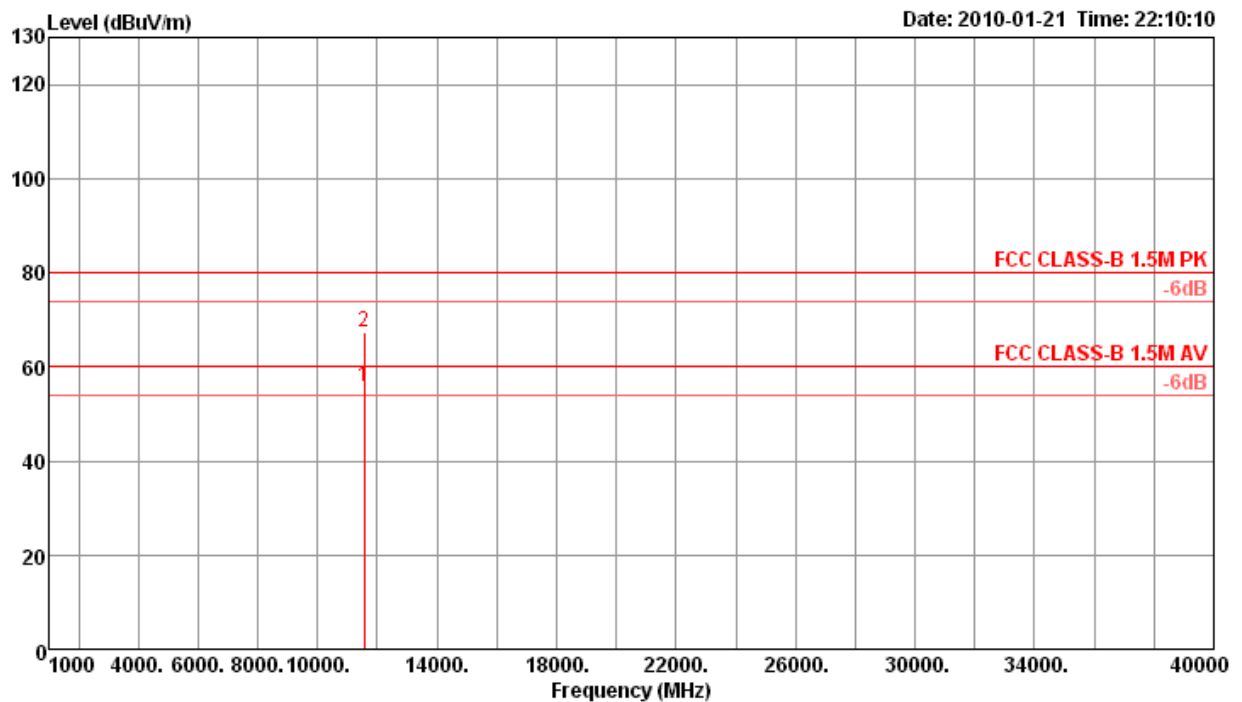

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11570.02	55.62	60.00	-4.38	47.02	4.91	34.82	38.51	225	100	Average	HORIZONTAL
2 p	11570.02	67.52	80.00	-12.48	58.92	4.91	34.82	38.51	225	100	Peak	HORIZONTAL


Vertical

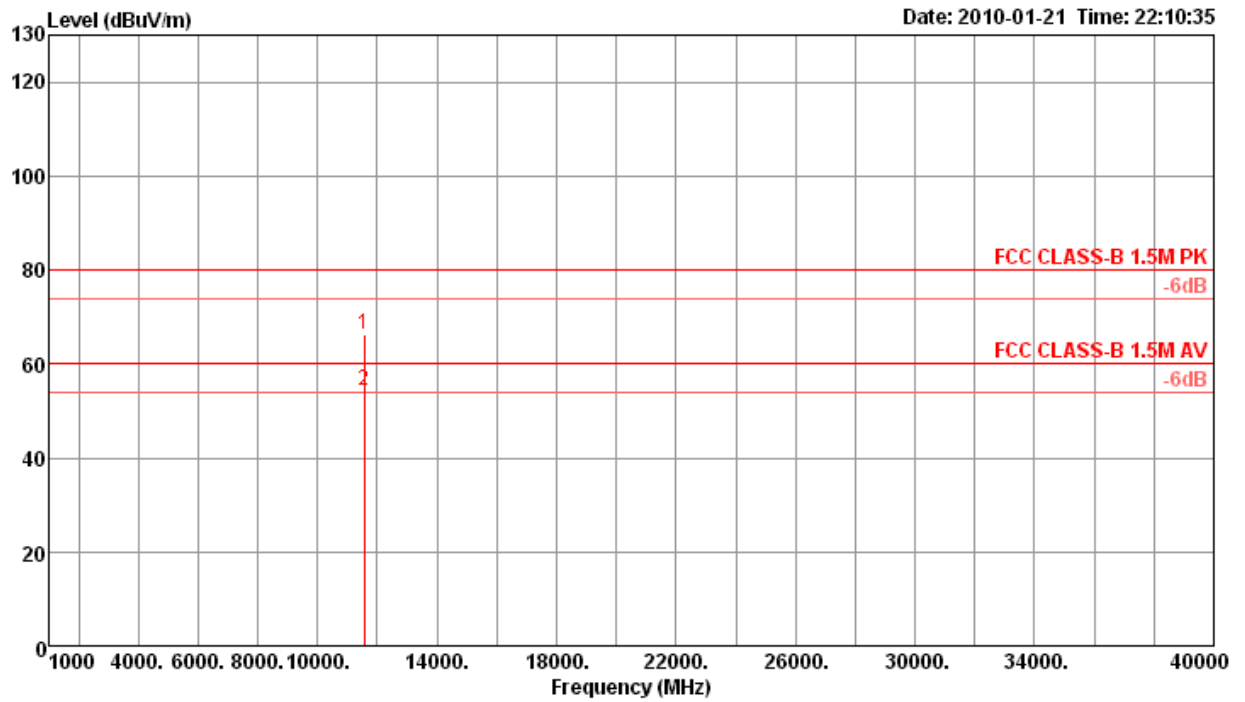

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11569.98	66.25	80.00	-13.75	57.65	4.91	34.82	38.51	165	100	Peak	VERTICAL
2 a	11569.99	54.38	60.00	-5.62	45.78	4.91	34.82	38.51	165	100	Average	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a CH 165 / Ant. 5

Horizontal

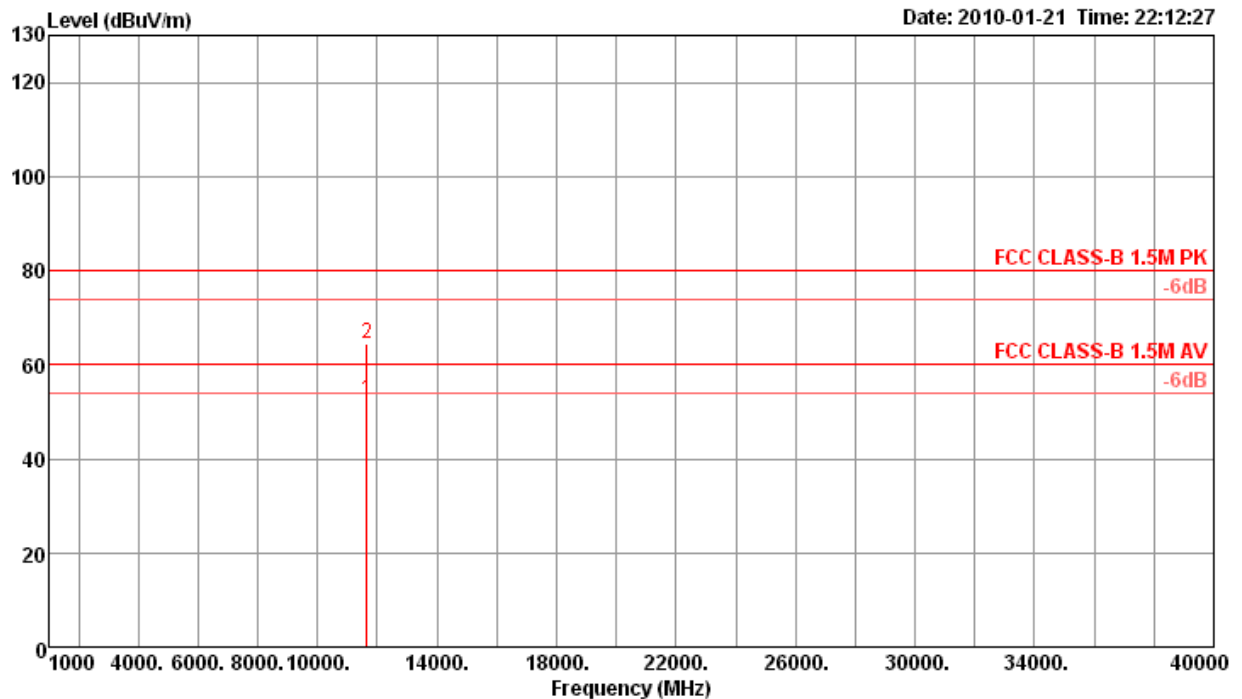

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11650.00	52.50	60.00	-7.50	43.84	5.03	34.90	38.53	255	100	Average	HORIZONTAL
2 p	11650.00	64.32	80.00	-15.68	55.66	5.03	34.90	38.53	255	100	Peak	HORIZONTAL

Vertical

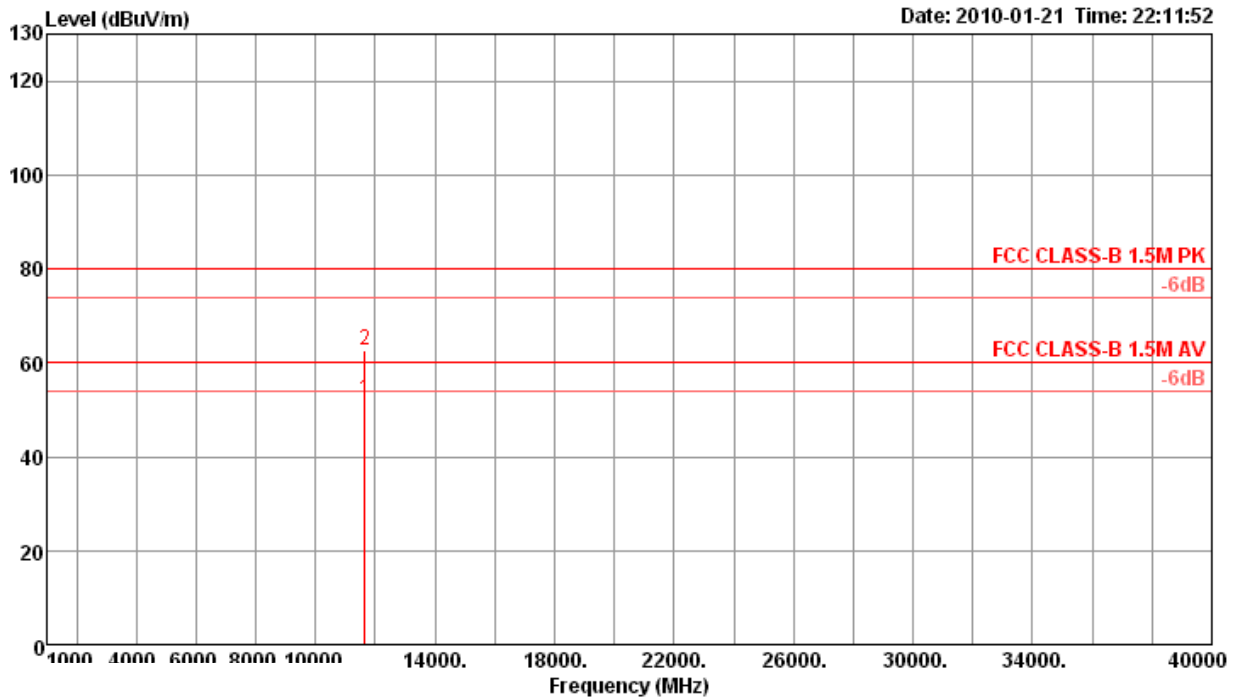

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11650.01	52.12	60.00	-7.88	43.46	5.03	34.90	38.53	336	100	Average	VERTICAL
2 n	11650.01	62.51	80.00	-17.49	53.85	5.03	34.90	38.53	336	100	Peak	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo CH 152 / Ant. 5

Horizontal

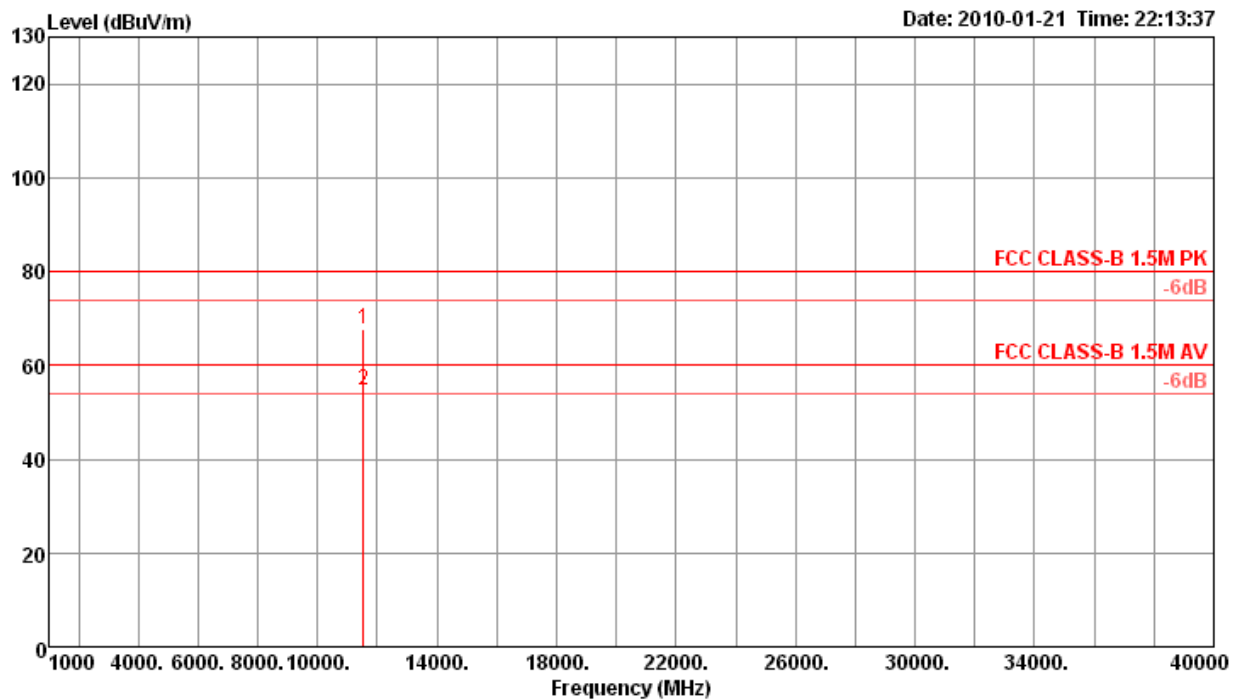

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11520.01	67.84	80.00	-12.16	59.29	4.82	34.77	38.50	205	100	Peak	HORIZONTAL
2 a	11520.02	54.73	60.00	-5.27	46.18	4.82	34.77	38.50	205	100	Average	HORIZONTAL

Vertical

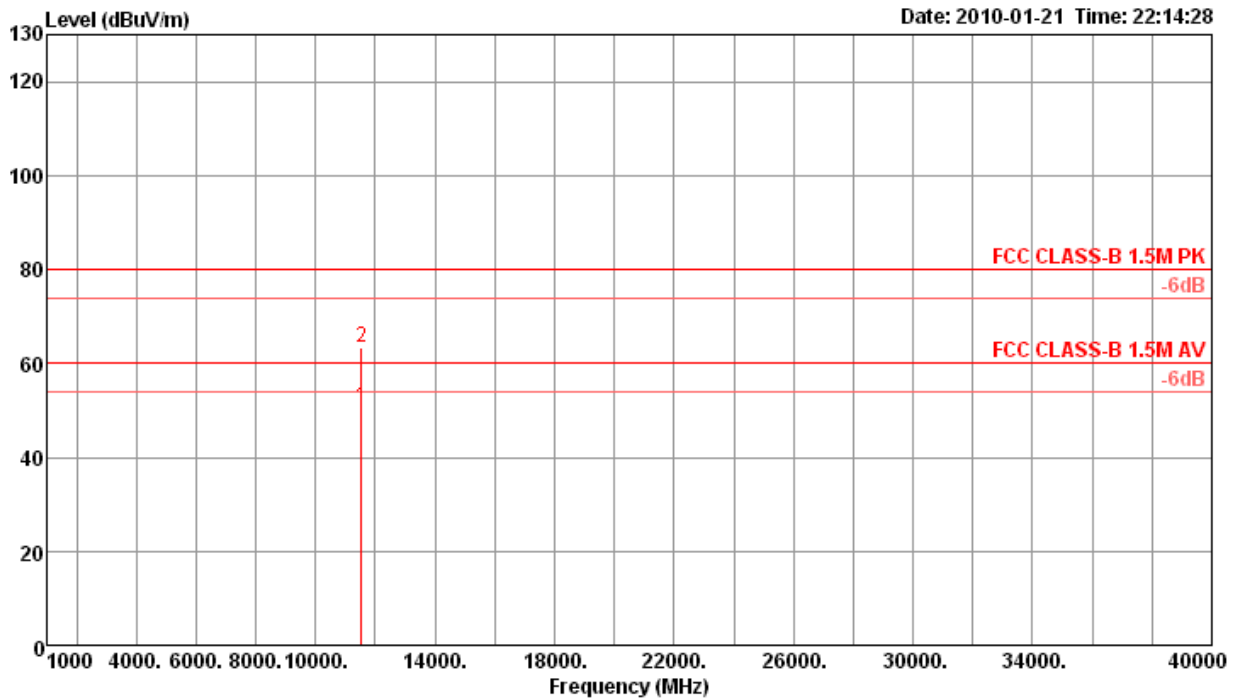

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11519.98	50.75	60.00	-9.25	42.20	4.82	34.77	38.50	167	100	Average	VERTICAL
2 p	11520.01	63.34	80.00	-16.66	54.79	4.82	34.77	38.50	167	100	Peak	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo CH 160 / Ant. 5

Horizontal

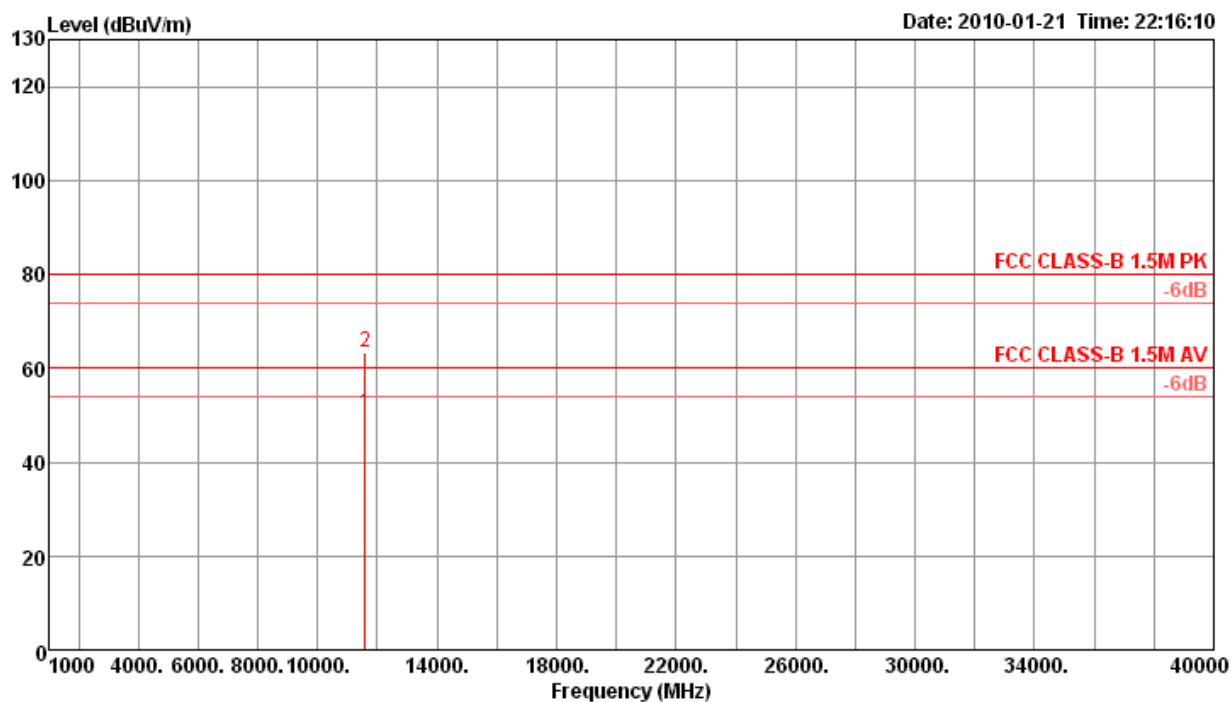

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11600.00	50.37	60.00	-9.63	41.75	4.95	34.85	38.52	255	100	Average	HORIZONTAL
2 p	11600.00	63.26	80.00	-16.74	54.64	4.95	34.85	38.52	255	100	Peak	HORIZONTAL

Vertical

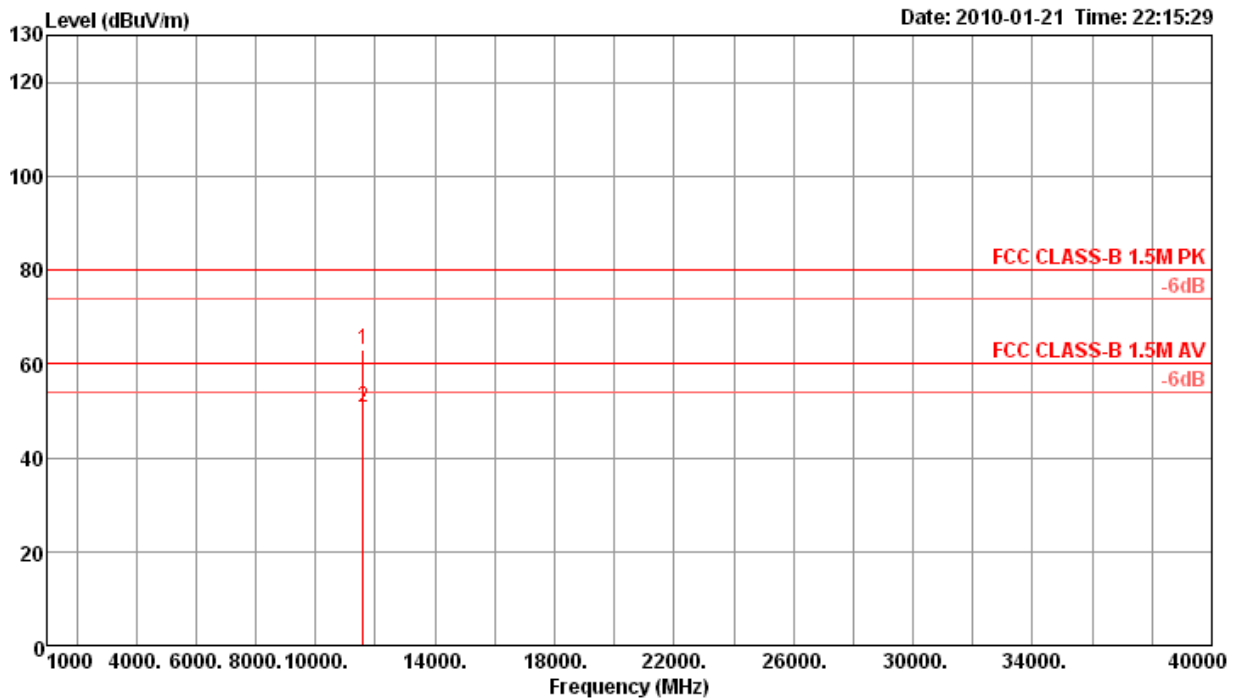

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11600.01	63.07	80.00	-16.93	54.45	4.95	34.85	38.52	330	100	Peak	VERTICAL
2 a	11600.01	50.59	60.00	-9.41	41.97	4.95	34.85	38.52	330	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
- In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Antenna 2>:

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 1, 6, 11 / Ant. 2
Test Date	Jan. 21, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2386.20	52.54	54.00	-1.46	22.63	2.04	0.00	27.87	108	100	Average	VERTICAL
2	2389.20	66.90	74.00	-7.10	36.99	2.04	0.00	27.87	108	100	Peak	VERTICAL
3 a	2412.80	107.05	54.00			2.05	0.00	27.84	108	100	Average	VERTICAL
4 p	2413.00	110.86	74.00			2.05	0.00	27.84	108	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2387.80	58.41	74.00	-15.59	28.50	2.04	0.00	27.87	102	149	Peak	VERTICAL
2	2390.00	47.40	54.00	-6.60	17.48	2.05	0.00	27.87	102	149	Average	VERTICAL
3 a	2437.80	108.31	54.00			2.07	0.00	27.78	102	149	Average	VERTICAL
4 p	2438.00	112.17	74.00			2.07	0.00	27.78	102	149	Peak	VERTICAL
5 !	2483.90	52.48	54.00	-1.52	22.65	2.10	0.00	27.73	102	149	Average	VERTICAL
6	2484.10	60.42	74.00	-13.58	30.59	2.10	0.00	27.73	102	149	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2459.20	104.30	54.00			2.08	0.00	27.76	116	100	Average	VERTICAL
2 p	2460.60	107.44	74.00			2.08	0.00	27.76	116	100	Peak	VERTICAL
3 !	2487.70	53.69	54.00	-0.31	23.89	2.10	0.00	27.70	116	100	Average	VERTICAL
4	2487.90	61.90	74.00	-12.10	32.10	2.10	0.00	27.70	116	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	56
Test Engineer	Alan Huang	Configurations	802.11g CH 1, 6, 11 / Ant. 2
Test Date	Jan. 21, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	53.09	54.00	-0.91	23.17	2.05	0.00	27.87	96	100	Average	VERTICAL
2 !	2390.00	69.04	74.00	-4.96	39.12	2.05	0.00	27.87	96	100	Peak	VERTICAL
3 p	2406.00	111.16	74.00			2.05	0.00	27.84	96	100	Peak	VERTICAL
4 a	2413.80	101.73	54.00			2.05	0.00	27.84	96	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2388.80	67.46	74.00	-6.54	37.55	2.04	0.00	27.87	356	128	Peak	VERTICAL
2 !	2390.00	50.68	54.00	-3.32	20.76	2.05	0.00	27.87	356	128	Average	VERTICAL
3 p	2439.00	116.67	74.00			2.07	0.00	27.78	356	128	Peak	VERTICAL
4 a	2440.40	106.41	54.00			2.07	0.00	27.78	356	128	Average	VERTICAL
5 !	2483.50	51.43	54.00	-2.57	21.60	2.10	0.00	27.73	356	128	Average	VERTICAL
6 !	2484.50	68.82	74.00	-5.18	38.99	2.10	0.00	27.73	356	128	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2454.60	99.26	54.00			2.08	0.00	27.76	109	128	Average	VERTICAL
2 p	2454.60	108.53	74.00			2.08	0.00	27.76	109	128	Peak	VERTICAL
3 !	2483.50	53.48	54.00	-0.52	23.65	2.10	0.00	27.73	109	128	Average	VERTICAL
4 !	2483.50	68.50	74.00	-5.50	38.67	2.10	0.00	27.73	109	128	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<For Antenna 4>:

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 1, 6, 11 / Ant. 4
Test Date	Jan. 21, 2010		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2386.40	52.53	54.00	-1.47	22.62	2.04	0.00	27.87	31	100	Average	VERTICAL
2 !	2390.00	69.22	74.00	-4.78	39.30	2.05	0.00	27.87	31	100	Peak	VERTICAL
3 a	2412.80	110.45	54.00			2.05	0.00	27.84	31	100	Average	VERTICAL
4 p	2413.00	114.34	74.00			2.05	0.00	27.84	31	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.60	59.70	74.00	-14.30	29.79	2.04	0.00	27.87	261	100	Peak	VERTICAL
2 !	2390.00	48.78	54.00	-5.22	18.86	2.05	0.00	27.87	261	100	Average	VERTICAL
3 a	2434.20	109.86	54.00			2.07	0.00	27.81	261	100	Average	VERTICAL
4 p	2435.60	114.30	74.00			2.07	0.00	27.81	261	100	Peak	VERTICAL
5 !	2484.70	52.61	54.00	-1.39	22.78	2.10	0.00	27.73	261	100	Average	VERTICAL
6	2484.70	60.77	74.00	-13.23	30.94	2.10	0.00	27.73	261	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2462.80	109.94	54.00			2.08	0.00	27.76	262	100	Average	VERTICAL
2 p	2463.00	113.83	74.00			2.08	0.00	27.76	262	100	Peak	VERTICAL
3	2487.10	64.78	74.00	-9.22	34.95	2.10	0.00	27.73	262	100	Peak	VERTICAL
4 !	2487.70	53.75	54.00	-0.25	23.95	2.10	0.00	27.70	262	100	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	56
Test Engineer	Alan Huang	Configurations	802.11g CH 1, 6, 11 / Ant. 4
Test Date	Jan. 21, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	53.76	54.00	-0.24	23.84	2.05	0.00	27.87	333	100	Average	VERTICAL
2 !	2390.00	71.92	74.00	-2.08	42.00	2.05	0.00	27.87	333	100	Peak	VERTICAL
3 p	2411.00	111.46	74.00			2.05	0.00	27.84	333	100	Peak	VERTICAL
4 a	2413.40	101.47	54.00			2.05	0.00	27.84	333	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.60	68.75	74.00	-5.25	38.84	2.04	0.00	27.87	332	100	Peak	VERTICAL
2 !	2390.00	52.01	54.00	-1.99	22.09	2.05	0.00	27.87	332	100	Average	VERTICAL
3 a	2438.60	108.34	54.00			2.07	0.00	27.78	332	100	Average	VERTICAL
4 p	2440.60	119.49	74.00			2.07	0.00	27.78	332	100	Peak	VERTICAL
5 !	2483.50	52.53	54.00	-1.47	22.70	2.10	0.00	27.73	332	100	Average	VERTICAL
6 !	2484.70	70.70	74.00	-3.30	40.87	2.10	0.00	27.73	332	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2463.40	101.70	54.00			2.08	0.00	27.76	262	100	Average	VERTICAL
2 p	2466.40	111.34	74.00			2.10	0.00	27.76	262	100	Peak	VERTICAL
3 !	2483.50	53.93	54.00	-0.07	24.10	2.10	0.00	27.73	262	100	Average	VERTICAL
4 !	2483.50	73.41	74.00	-0.59	43.58	2.10	0.00	27.73	262	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<For Antenna 5>:

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11b CH 1, 6, 11 / Ant. 5
Test Date	Jan. 21, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2386.00	59.92	74.00	-14.08	30.01	2.04	0.00	27.87	217	129	Peak	HORIZONTAL
2 !	2386.20	52.94	54.00	-1.06	23.03	2.04	0.00	27.87	217	129	Average	HORIZONTAL
3 a	2411.20	101.11	54.00			2.05	0.00	27.84	217	129	Average	HORIZONTAL
4 p	2413.00	104.82	74.00			2.05	0.00	27.84	217	129	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.00	48.34	54.00	-5.66	18.43	2.04	0.00	27.87	216	100	Average	VERTICAL
2	2389.00	58.11	74.00	-15.89	28.20	2.04	0.00	27.87	216	100	Peak	VERTICAL
3 a	2437.80	101.88	54.00			2.07	0.00	27.78	216	100	Average	VERTICAL
4 p	2438.00	105.77	74.00			2.07	0.00	27.78	216	100	Peak	VERTICAL
5 !	2484.70	50.84	54.00	-3.16	21.01	2.10	0.00	27.73	216	100	Average	VERTICAL
6	2485.10	58.61	74.00	-15.39	28.78	2.10	0.00	27.73	216	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2459.20	99.95	54.00			2.08	0.00	27.76	215	100	Average	VERTICAL
2 p	2460.60	103.69	74.00			2.08	0.00	27.76	215	100	Peak	VERTICAL
3	2487.50	60.45	74.00	-13.55	30.65	2.10	0.00	27.70	215	100	Peak	VERTICAL
4 !	2487.70	53.07	54.00	-0.93	23.27	2.10	0.00	27.70	215	100	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	56
Test Engineer	Alan Huang	Configurations	802.11g CH 1, 6, 11 / Ant. 5
Test Date	Jan. 21, 2010		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.80	72.56	74.00	-1.44	42.64	2.05	0.00	27.87	48	103	Peak	HORIZONTAL
2 !	2390.00	53.68	54.00	-0.32	23.76	2.05	0.00	27.87	48	103	Average	HORIZONTAL
3 p	2415.20	108.54	74.00			2.05	0.00	27.84	48	103	Peak	HORIZONTAL
4 a	2418.40	98.01	54.00			2.07	0.00	27.84	48	103	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2387.00	70.05	74.00	-3.95	40.14	2.04	0.00	27.87	46	100	Peak	HORIZONTAL
2 !	2388.20	50.02	54.00	-3.98	20.11	2.04	0.00	27.87	46	100	Average	HORIZONTAL
3 p	2439.60	111.06	74.00			2.07	0.00	27.78	46	100	Peak	HORIZONTAL
4 a	2440.80	99.11	54.00			2.08	0.00	27.78	46	100	Average	HORIZONTAL
5 !	2484.30	50.12	54.00	-3.88	20.29	2.10	0.00	27.73	46	100	Average	HORIZONTAL
6 !	2485.10	73.82	74.00	-0.18	43.99	2.10	0.00	27.73	46	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2456.20	94.79	54.00			2.08	0.00	27.76	217	100	Average	VERTICAL
2 p	2457.00	104.48	74.00			2.08	0.00	27.76	217	100	Peak	VERTICAL
3 !	2483.50	53.42	54.00	-0.58	23.59	2.10	0.00	27.73	217	100	Average	VERTICAL
4 !	2483.50	71.49	74.00	-2.51	41.66	2.10	0.00	27.73	217	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

For Emission not in Restricted Band


<For 2.4GHz Band>:

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

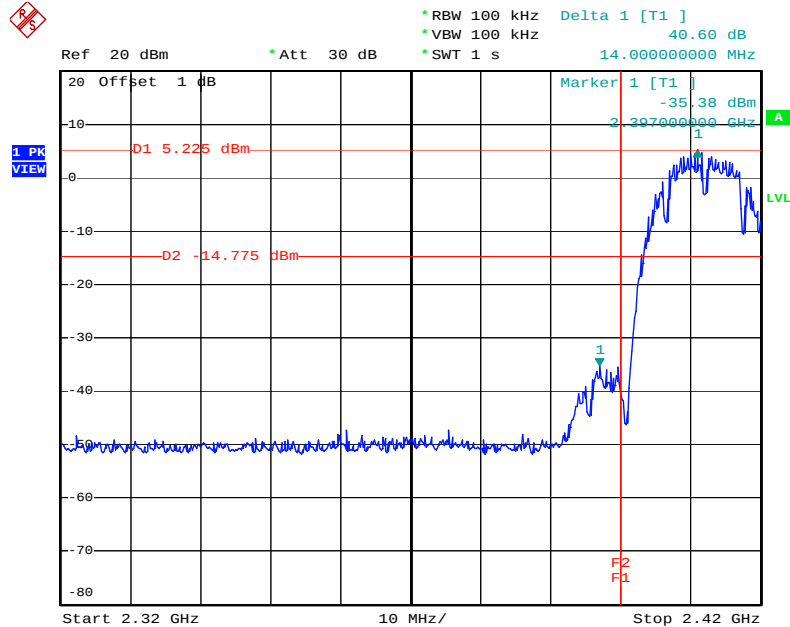


Date: 22.JAN.2010 09:59:41

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

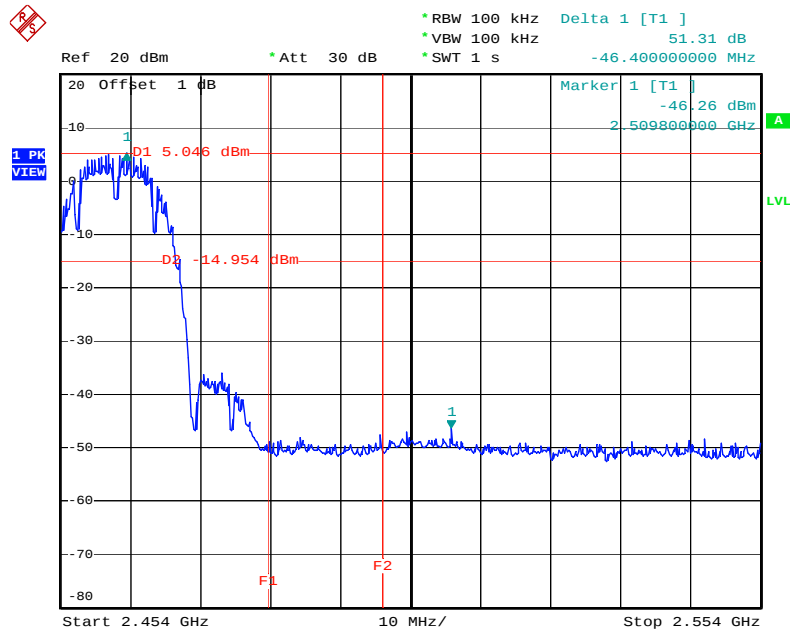


Date: 22.JAN.2010 10:05:06

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

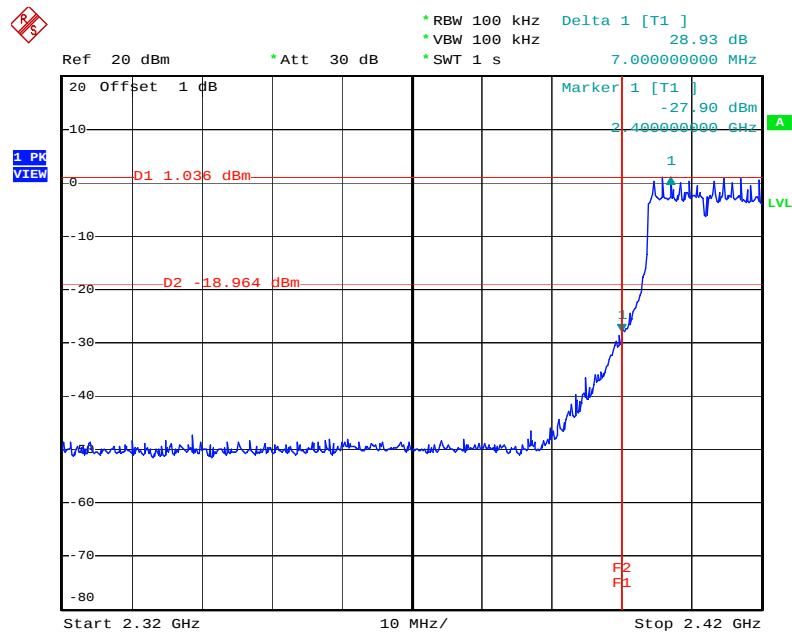

Date: 22.JAN.2010 10:12:45


High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

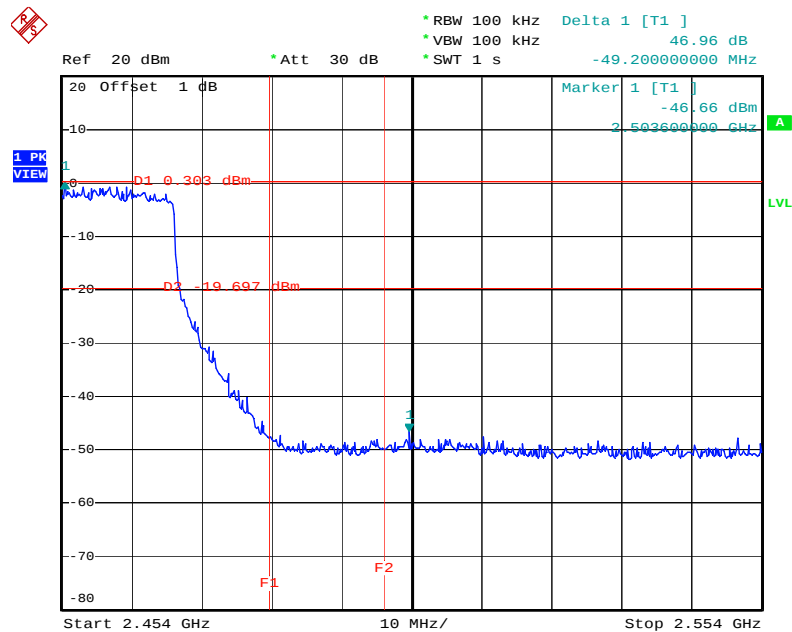

Date: 22.JAN.2010 10:08:28


<For 5GHz Band >:

Low Band Edge Plot on Configuration IEEE 802.11a / 5745 MHz

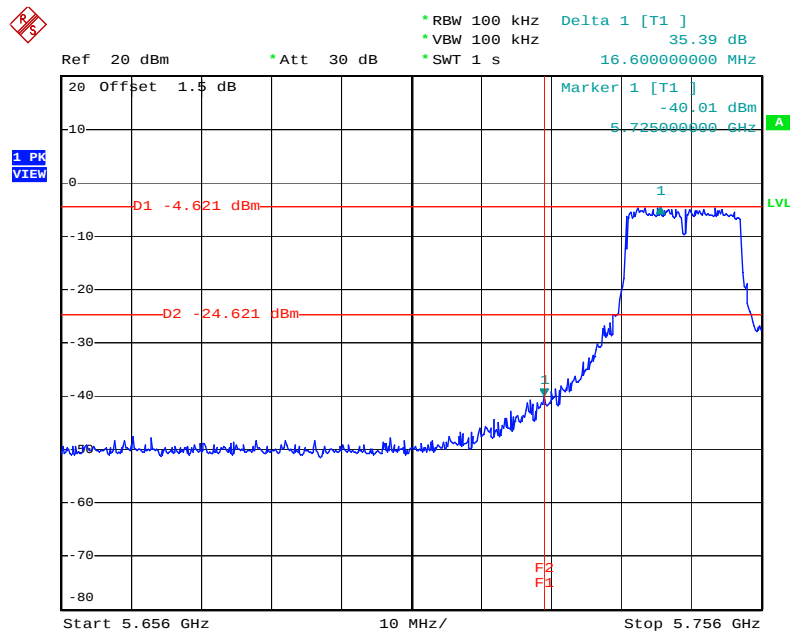


Date: 22.JAN.2010 10:31:30

High Band Edge Plot on Configuration IEEE 802.11a / 5825 MHz

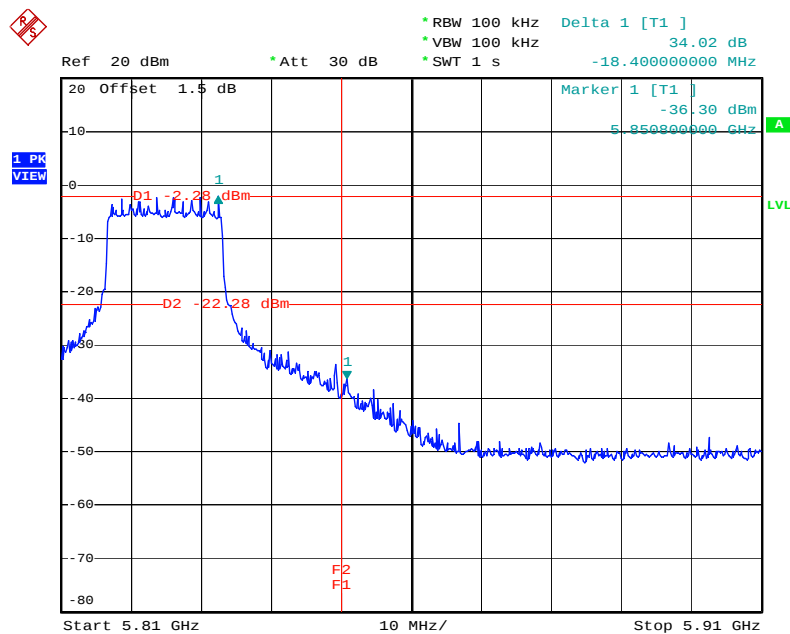


Date: 22.JAN.2010 10:35:15

Low Band Edge Plot on Configuration IEEE 802.11a Turbo / 5760 MHz

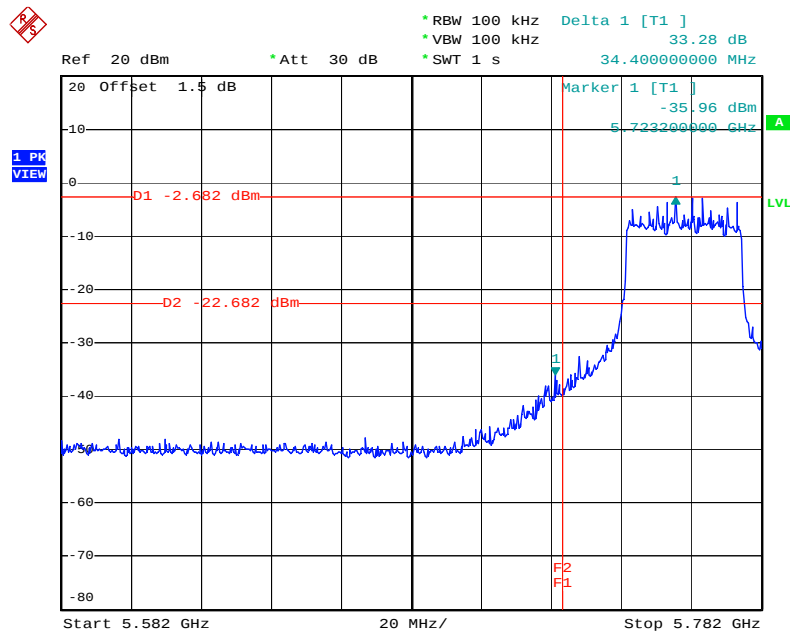

Date: 22.JAN.2010 10:25:46

High Band Edge Plot on Configuration IEEE 802.11a Turbo / 5800 MHz

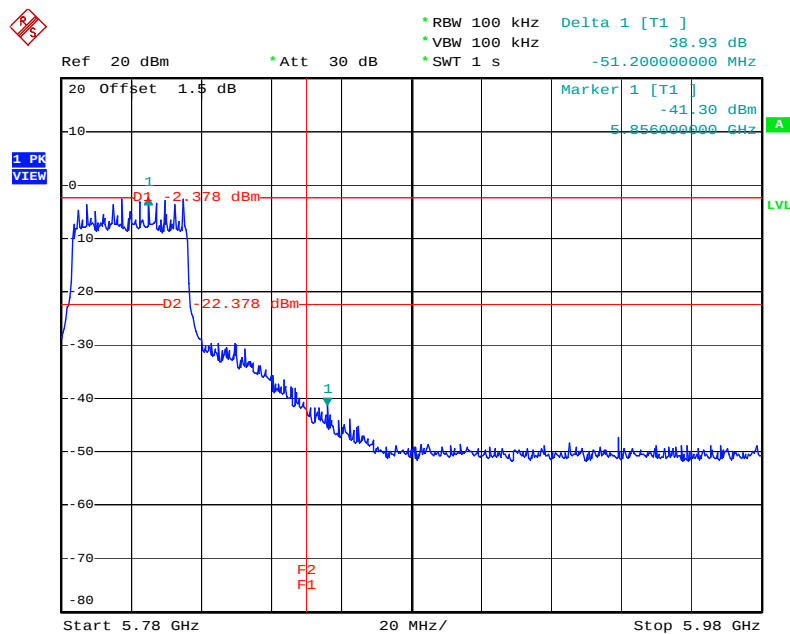

Date: 22.JAN.2010 10:27:49

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 20, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihsu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

PI, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix