

Measurement Report

FCC ID:M697300M4

This report concerns (check one) : Original Grant Class II Change

Issued Date : Jan. 27. 2003
Project No. : 02E2789
Equipment : VGA Card
Model No. : SP7300M4A1X064DV; SP7300M4A1X064DT;
SP7300M4A1X064TV; SP7300M4A1X064PU;
SP7300M4A1V128DV; SP7300M4A1V128DT;
SP7300M4A1V128TV; SP7300M4A1V128PU
Applicant : Sparkle Computer Co., Ltd.
13F, No. 2, Sec. 1, Fu Hsing S. Rd., Taipei,
Taiwan, R.O.C..

Tested by :

Neutron Engineering Inc. EMC Laboratory

Data of Test :

Jan. 02,2003 ~ Jan. 23,2003

Testing Engineer :

Cary Chen

Technical Manager :

Andy Chiu

Authorized Signatory :

George (Yao)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd.,

Shijr Jen, Taipei, Taiwan

TEL : (02) 2646-5426 FAX : (02) 2646-6815



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of R.O.C., or National Institute of Standards and Technology (**NIST**) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Assessment Authorities



Test Standard/Scope/Item Acceptance

FCC Part 15 Subpart B
IEC/CISPR22
AS/NZS 3548
CNS 13438

FCC Part 15 Subpart B
CISPR 22/EN 55022
AS/NZS 3548
VCCI -Technical Requirement
CNS 13438
SS IEC/CISPR 22
IEC/EN 61000-3-2 IEC/EN 61000-4-5
IEC/EN 61000-3-3 IEC/EN 61000-4-6
IEC/EN 61000-4-2 IEC/EN 61000-4-8
IEC/EN 61000-4-3 IEC/EN 61000-4-11
IEC/EN 61000-4-4

Table of Contents	Page
1 General Information	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Equipment Under Tested	5
1.4 OEM Brand/Model	5
1.5 Product Description	5
1.6 Connecting I/O Port(s)	5
1.7 Power Supplied	5
1.8 Products Covered	6
1.9 Model Difference (Series, Versions, if any)	6
1.10 EUT Modifications	6
1.11 Electric Block Diagram	6
1.12 Photos of EUT	6
2 RFI Emissions Measurement	7
2.1 Test Facility	7
2.2 Standard Compliance	7
2.3 Test Methodology	7
2.4 Deviations from Standard Test Method	7
2.5 Sample(s) Tested	7
2.6 Measurement Instrument	7
2.7 Measurement Uncertainty	7
2.8 Tested System Set-Up/Configuration Details	7
Table -1 Equipments Used in Tested System	8
Diagram -1 Block diagram showing the configuration of system tested	9
Table - 2 Equipments Used in Tested System	10
Table - 3 Information of Interface Cable	10
2.9 Max.(Worst Case) RF Emission Evaluation	11
2.10 EUT Operation	11
3 Justification	12
3.1 Limitations	12
3.1.1 Power Line Conducted Emission	12
3.1.2 Radiated Emission Limits	12
3.2 Measurement Justification	13
3.2.1 Conducted Emission	13
3.2.2 Radiated Emission	13
3.3 Measurement Data	13
Table 4 Conducted Emission Data	14
Table 5 Radiated Emission Data	19

Table of Contents

	Page
4 Attachment	24
A. Electric Block Diagram	25
B. EUT Modification Description	26
C. EUT Test Photos	27
D. EUT Photos	34
E. User' s Manual	45
F. Product Labeling	46

1. General Information

1.1 Applicant

Name Sparkle Computer Co., Ltd.
Address 13F, No. 2, Sec. 1, Fu Hsing S. Rd., Taipei, Taiwan, R.O.C.

1.2 Manufacturer

Name N/A
Address N/A

1.3 Equipment Under Tested

Name: VGA Card
Trade Name: SPARKLE
Model No.: SP7300M4A1X064DV; SP7300M4A1X064DT; SP7300M4A1X064TV;
SP7300M4A1X064PU; SP7300M4A1V128DV; SP7300M4A1V128DT;
SP7300M4A1V128TV; SP7300M4A1V128PU

1.4 OEM Brand/Model (if applicable)

OEM Brand(s)/Model(s) except the basic model in sub-clause 1.3 is(are) the follows:
OEM Brand: N/A
Model No.: N/A

1.5 Product Descriptions(Application/Features/Specification)

The EUT is a VGA Card. The summarized features of EUT are described as following:

- GeForce4 TI 4200-8X AGP Bus, with 64/128MB DDR SDRAM on Board
- 2 Dual-rendering pipelines
- 4 texels per clock cycle
- Cube environment mapping
- 64MB/128MB high-speed 128-bit DDR RAM memory
- High-performance 2D rendering engine
- AGP Fast write and AGP Texturing Support

Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual (Attachment - E.)

1.6 Connecting I/O Port(s)

Please refer to the User's Manual (Attachment - E.)

1.7 Power Supplied

Power Source: Supplied from PC.

Power Cord: N/A

Power Rating: N/A

1.8 Products Covered (if applicable)

The sample tested including the following sub-system/module/accessory :

Sub-system/ Module/ Accessory	Model/Type No.	Int. Inst./ Ext. Cont.
N/A	N/A	N/A

1.9 Model Difference (Series, Versions, if any)

Except the basic model no. (model designation of the sample tested in this test report), additional model no. covered is(are) :

There are eight models based on similar electrical circuit except the difference of list below:

Brand	Model NO.	Difference(Memory & I/O Prts)
SPARKLE	SP7300M4A1X064DV	4MX16X8PCS,CRT+VIVO+DVI
SPARKLE	SP7300M4A1X064DT	4MX16X8PCS,CRT+TV+DVI
SPARKLE	SP7300M4A1X064TV	4MX16X8PCS,CRT+TV
SPARKLE	SP7300M4A1X064PU	4MX16X8PCS,Only CRT
SPARKLE	SP7300M4A1V128DV	8MX16X8PCS,CRT+VIVO+DVI
SPARKLE	SP7300M4A1V128DT	8MX16X8PCS,CRT+TV+DVI
SPARKLE	SP7300M4A1V128TV	8MX16X8PCS,CRT+TV
SPARKLE	SP7300M4A1V128PU	8MX16X8PCS,Only CRT

All the above models were tested and the model: SP7300M4A1V128DV was found to be the worst case during the pr-scanning test. This mode of the worst case was used for final testing and collecting test data included in this report.

1.10 EUT Modifications (if applicable)

No any modification required for the EUT to comply with the standards.

Please refer to the Attachment – **B**.

1.11 Electric Block Diagram

Please refer to the Attachment – **A**.

1.12 Photos of EUT

Please refer to the Attachment – **D**.

2. RFI Emissions Measurement

2.1 Test Facility

The test facilities used to collect the test data in this report located at No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

2.2 Standard Compliance

The test data contained in this report relate only to the item(s) listed below :

Limitation Class B

FCC Part15, Subpart B/CISPR 22 :1997+A1:2000

2.3 Test Methodology

Both conducted and radiated testing were performed during the max. EMI emission evaluation.

Antenna to EUT distance is 10 m.

Test procedures according to the technical standards:

FCC Part15, Subpart B / ANSI C63.4 : 1992.

2.4 Deviations from Standard Test Method

N/A

2.5 Sample(s) Tested

The representative sample tested in this reports is(are): SP7300M4A1V128DV

Test results in this test report relate only to the sample(s) tested.

The EUT has been tested according to the following environmental condition:

Input Power	110 Vac/60Hz
Temperature	24
Relative Humidity	60 %

2.6 Measurement Instruments

Valid measurement instruments used in this report refer to **Table-1** enclosed.

2.7 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 % , $U=2\times U_{\text{C}}(y)$

Radiated Emission Measurement ± 2.47 dB

Conducted Emission Measurement ± 2.29 dB

2.8 Tested System Set-Up/Configuration Details

The system was configured for testing in a typical fashion (as a user would normally use) or in-accordance with the operating configuration specified in the user's manual. A Block Diagram(please refer to the Diagram - 1) and Photos(please refer to the attachment - C) showing the set-up/configuration of system tested. In addition, **Table-2** and **Table-3** provide a detail of all equipment items and cables information used in the system tested.

Table -1 Measurement Instruments List

Item	Instruments	Mfr/Brand	Model/Type No.	Serial No.	Calibrated Date	Next Cali. Date	Note
1	LISN	EMCO	3825/2	9605-2539	2002-06-10	2003-06-09	
2	LISN	Rolf Heine	NNB-2/16Z	98083	2002-11-01	2003-10-31	✓
3	LISN	Rolf Heine	NNB-2/16Z	98053	2002-11-15	2003-11-14	✓
4	Pulse Limiter	Electro-Metrics	EM-7600	112644	2002-12-09	2003-12-08	✓
5	50 Terminator	N/A	N/A	N/A	2002-05-10	2003-05-09	✓
6	Test Cable	N/A	C01	N/A	2002-12-10	2003-12-09	✓
7	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3058	2002-10-23	2003-10-22	
8	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3060	2002-10-23	2003-10-22	✓
9	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9161	4022	2002-07-25	2003-07-24	
10	Test Cable	N/A	10M_OS01	N/A	2002-12-10	2003-12-09	
11	Test Cable	N/A	OS01-1/-2	N/A	2002-12-10	2003-12-09	
12	Test Cable	N/A	10M_OS02	N/A	2002-12-10	2003-12-09	✓
13	Test Cable	N/A	OS02-1/-2/-3	N/A	2002-12-10	2003-12-09	✓
14	RF Switch	Anritsu	MP59B	M65982	2001-12-09	2003-12-08	
15	Quasi-Peak Adapter	HP	85650A	2521A00844	2002-10-08	2003-04-07	✓
16	RF Pre-Selector	HP	85685A	2648A00417	2002-10-08	2003-04-07	✓
17	Spectrum Analyzer	HP	85680B	2634A03025	2002-10-08	2003-04-07	✓
18	Spectrum Monitor	HP	85662B	2648A13616	2002-10-08	2003-04-07	✓
19	Pre-Amplifier	Anritsu	MH648A	M09961	2002-12-09	2003-12-08	✓
20	Spectrum Analyzer	ADVAN TEST	R3261C	81720298	2002-08-14	2003-08-13	
21	Test Receiver	R&S	ESH3	860156/018	2002-10-22	2003-10-21	
22	Test Receiver	R&S	ESVP	860687/009	2002-12-06	2003-12-05	
23	Test Receiver	MEB	SMV41	130	2002-12-06	2003-12-05	✓
24	Test Receiver	PMM	PMM 9000	4310J01002	2002-10-06	2003-10-03	
25	Horn Antenna	EMCO	3115	9605-4803	2002-05-20	2003-05-19	
26	Test Receiver	R&S	ESMI	843977/005	2002-11-21	2003-11-20	
27	Pre-Amplifier	R&S	ESMI-Z7	1045.5020.9801	2002-05-20	2003-05-19	
28	Absorbing Clamp	R&S	MDS-21	841077/011	2002-08-23	2003-08-22	
29	Voltage Probe	R&S	ESH2-Z3	841.800/023	2002-08-28	2003-08-27	
30	Signal Generator	HP	8648A	3426A01034	2002-10-11	2004-10-08	
31	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓
32	Turn Table	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓

Remark :

(1)" ✓" indicates the instrument used in Test Report.

(2)" N/A" denotes No Model No. / Serial No. and No Calibration specified.

Diagram - 1

Block diagram showing the configuration of system tested

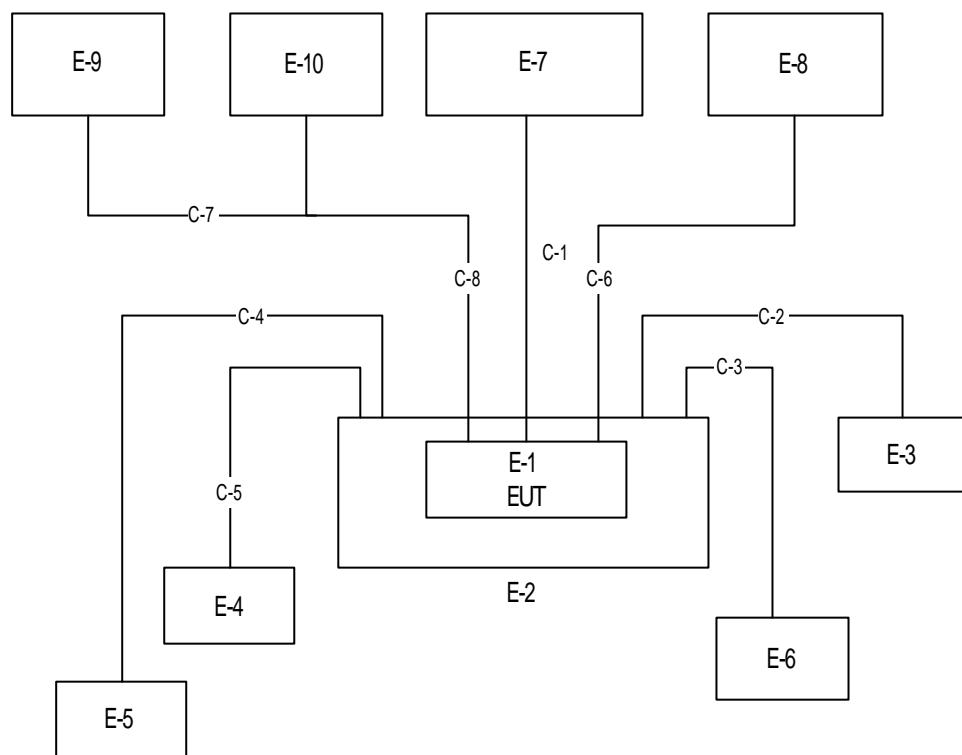


Table - 2 Equipments Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	VGA Card	SPARKLE	SP7300M4A1V128DV	M697300M4	N/A	EUT
E-2	PC	IBM	444	N/A(3)	AAD13M3	
E-3	Printer	SII	DPU-414	N/A(3)	1045105A	
E-4	PS/2 K/B	HP	5181	N/A(3)	N/A	
E-5	PS/2 Mouse	HP	P8131	N/A(3)	5185-1212	
E-6	Modem	ACEEX	DM-1414V	N/A(3)	8041708	
E-7	Monitor	HITACHI	CM753ET	N/A(3)	T8L000003	
E-8	LCD Monitor	I.DDATA	LCD-AD17CS	N/A(3)	UAJ0000082RG	
E-9	Color CCTV Monitor	TVS	CM-10DXA	N/A(3)	BAXB8A507803	
E-10	DVD Player	PHILIPS	DVD711	N/A(3)	N/A	

Note:

- (1) Unless otherwise denoted as EUT in "Remark" column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as in "Remark" column, Neutron consigns the support equipment to the tested system.
- (3) The support equipment was authorized by Declaration of Confirmation.

Table - 3 Information of Interface Cable

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	1.8M	
C-2	YES	NO	1.8M	
C-3	YES	NO	1.5M	
C-4	YES	NO	1.5M	
C-5	YES	NO	1.5M	
C-6	YES	NO	1.9M	
C-7	NO	YES	1.5M	
C-8	NO	YES	1.5M	

Note:

- (1) Unless otherwise marked as in "Remark" column, Neutron consigns the support equipment to the tested system.
- (2) For detachable type I/O cable should be specified the length in cm in "Length" column.

2.9 Max.(Worst Case) RF Emission Evaluation

- (a) Both conducted and radiated testing were performed during the max. EMI emission evaluation.
- (b) The system was configured for testing in a typical fashion (as a customer would normally use it). The EUT was connected to support equipment-personal computer. Peripherals of PC, such as monitor, keyboard, LCD monitor, TV, DVD player modem and printer were contained in this system in order to comply with the CISPR22 (1997) Rules requirement. This operating condition was tested and used to collect the included data.
- (c) To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode 1 VGA 1600*1200/106KHZ/85HZ

Mode 2 VGA/DVI 1280*1024/64KHZ/60HZ

Mode 3 VGA640*480/35KHZ/70HZ;DVI640*480/31.23KHZ/60HZ

Mode 4 DVI 1024*768/48.38KHZ/60HZ;TV AV MODE

Mode 5 DVI 1024*768/48.38KHZ/60HZ;TV S MODE

The EUT system operated Mode1-5, mentioned above was found to be the worst case during the pre-scanning test.

These operation modes were used for final testing and collecting test data included in this report.

2.10 EUT Operation

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The program contained on a PC hard disk and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read (write) from (to) mass storage device (Disk).
2. Send "H" pattern to video port device (Monitor and LCD Monitor).
3. Send " H " pattern to parallel port device (Printer).
4. Send " H " pattern to serial port device (Modem).
5. Send image from DVD player to video port device (TV).
6. Repeated from 2 to 5 continuously.

As the keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

3. Justification

3.1 Limitations

3.1.1 Power Line Conducted Emission (Frequency Range 150KHz-30MHz)

Measurement Frequency Range (MHz)	Mains Terminal		Mains Terminals		Note
	Class A Limits (dBuV)	Class B Limits (dBuV)	Class A Limits (dBuV)	Class B Limits (dBuV)	
QP Mode	AV Mode	QP Mode	AV Mode		
0.15 - 0.50	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 - 5.00	73.00	60.00	56.00	46.00	CISPR
5.00 - 30.0	73.00	60.00	60.00	50.00	CISPR
0.45-1.705	60.00	N/A	48.00	N/A	FCC
1.705-30.0	69.50	N/A	48.00	N/A	FCC

Notes:

- (1). The tighter limit applies at the band edges.
- (2). The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.1.2 Radiated Emission Limits (Frequency Range 30MHz-1000MHz)

Measurement Frequency Range (MHz)	Quasi-Peak Mode		Quasi-Peak Mode		Note
	Class A Limits (dBuV/m)	Class B Limits (dBuV/m)	Class A Limits (dBuV/m)	Class B Limits (dBuV/m)	
	10m	30m	10m	3m	Std.
30.00 -230.00	40.00	30.00	30.00	40.00	CISPR
230.0 -1000.0	47.00	37.00	37.00	47.00	CISPR
30.00 - 88.00	39.00	N/A	30.00	40.00	FCC
88.00 - 216.0	43.50	N/A	33.50	43.50	FCC
216.0 -960.0	46.00	N/A	36.00	46.00	FCC
above 960.0	49.50	N/A	46.00	54.00	FCC

Notes:

- (1). The tighter limit applies at the band edges.
- (2). Emission level (dBuV/m)=20log Emission level (uV/m).
- (3). A measuring distance Of 10m is a primary used. However, either 3m or 10m (instead of 10m) distance my be allowed. If the distance is 3m, add 10dB to the QP-limit above. If the distance is 10m, subtract 10dB from the QP-limit above.

3.2 Measurement Justification

3.2.1 Conducted Emission

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and these signals are then Quasi Peak detector mode and Average detector mode re-measured.

Data of **Table - 4.** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value lower than both QP Mode and AV Mode Limit, EUT shall be deemed to compliance with both QP & AV Limits and then no additional QP Mode or AV Mode measurement performed.

If additional QP or AV Mode measurement needed, and if the QP Mode measured value compliance with the QP Mode Limit and lower than AV Mode Limit, the EUT shall be deemed to meet both QP & AV Limits and then only QP Mode was measured, but AV Mode was not performed.

3.2.2 Radiated Emission

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

Data of **Table - 5.** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP in column of " Remark ".

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

3.3 Measurement Data

Table - 4. Conducted Emission Data

Table - 5. Radiated Emission Data

Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 1

Judgement : Passed by -14.60 dB at 0.16 MHz AVG X QP Line X Neutral

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.16	Line	49.17	*	65.26	55.26	-16.09	(QP)
0.22	Line	38.81	*	62.82	52.82	-24.01	(QP)
9.11	Line	37.82	*	60.00	50.00	-22.18	(QP)
15.23	Line	35.27	*	60.00	50.00	-24.73	(QP)
21.49	Line	37.52	*	60.00	50.00	-22.48	(QP)
25.86	Line	43.03	*	60.00	50.00	-16.97	(QP)
0.16	Neutral	50.97	*	65.57	55.57	-14.60	(QP)
0.22	Neutral	39.61	*	62.78	52.78	-23.17	(QP)
1.96	Neutral	27.85	*	56.00	46.00	-28.15	(QP)
8.37	Neutral	44.63	*	60.00	50.00	-15.37	(QP)
11.75	Neutral	39.27	*	60.00	50.00	-20.73	(QP)
25.86	Neutral	39.63	*	60.00	50.00	-20.37	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 2Judgement : Passed by -15.14 dB at 8.46 MHz AVG X QP Line X Neutral

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.16	Line	48.17	*	65.36	55.36	-17.19	(QP)
0.21	Line	38.61	*	63.33	53.33	-24.72	(QP)
9.11	Line	37.82	*	60.00	50.00	-22.18	(QP)
11.93	Line	37.27	*	60.00	50.00	-22.73	(QP)
21.60	Line	36.53	*	60.00	50.00	-23.47	(QP)
26.28	Line	43.24	*	60.00	50.00	-16.76	(QP)
0.16	Neutral	49.77	*	65.52	55.52	-15.75	(QP)
0.20	Neutral	39.41	*	63.45	53.45	-24.04	(QP)
0.24	Neutral	37.81	*	62.17	52.17	-24.36	(QP)
8.46	Neutral	44.86	*	60.00	50.00	-15.14	(QP)
11.26	Neutral	39.08	*	60.00	50.00	-20.92	(QP)
25.32	Neutral	39.42	*	60.00	50.00	-20.58	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 3Judgement : Passed by -15.14 dB at 8.46 MHz AVG X QP Line X Neutral

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.16	Line	48.17	*	65.57	55.57	-17.40	(QP)
0.20	Line	40.41	*	63.45	53.45	-23.04	(QP)
0.24	Line	38.41	*	62.17	52.17	-23.76	(QP)
9.06	Line	37.82	*	60.00	50.00	-22.18	(QP)
11.44	Line	39.07	*	60.00	50.00	-20.93	(QP)
26.42	Line	43.04	*	60.00	50.00	-16.96	(QP)
0.16	Neutral	48.97	*	65.41	55.41	-16.44	(QP)
0.21	Neutral	38.01	*	63.09	53.09	-25.08	(QP)
0.24	Neutral	38.81	*	61.96	51.96	-23.15	(QP)
8.46	Neutral	44.86	*	60.00	50.00	-15.14	(QP)
11.26	Neutral	39.09	*	60.00	50.00	-20.91	(QP)
24.66	Neutral	40.18	*	60.00	50.00	-19.82	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 4Judgement : Passed by -15.17 dB at 8.37 MHz AVG X QP Line X Neutral

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.16	Line	48.37	*	65.67	55.67	-17.30	(QP)
0.24	Line	36.61	*	61.96	51.96	-25.35	(QP)
9.11	Line	39.22	*	60.00	50.00	-20.78	(QP)
12.06	Line	34.87	*	60.00	50.00	-25.13	(QP)
15.39	Line	34.69	*	60.00	50.00	-25.31	(QP)
26.28	Line	42.64	*	60.00	50.00	-17.36	(QP)
0.16	Neutral	47.97	*	65.36	55.36	-17.39	(QP)
0.23	Neutral	37.41	*	62.45	52.45	-25.04	(QP)
8.37	Neutral	44.83	*	60.00	50.00	-15.17	(QP)
11.26	Neutral	39.68	*	60.00	50.00	-20.32	(QP)
16.40	Neutral	33.96	*	60.00	50.00	-26.04	(QP)
24.79	Neutral	39.39	*	60.00	50.00	-20.61	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 5Judgement : Passed by -15.37 dB at 8.37 MHz AVG X QP Line X Neutral

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.16	Line	47.97	*	65.26	55.26	-17.29	(QP)
0.20	Line	39.61	*	63.61	53.61	-24.00	(QP)
0.25	Line	38.41	*	61.86	51.86	-23.45	(QP)
9.11	Line	37.82	*	60.00	50.00	-22.18	(QP)
12.00	Line	37.87	*	60.00	50.00	-22.13	(QP)
26.00	Line	42.64	*	60.00	50.00	-17.36	(QP)
0.16	Neutral	48.17	*	65.36	55.36	-17.19	(QP)
0.22	Neutral	37.81	*	63.01	53.01	-25.20	(QP)
8.37	Neutral	44.63	*	60.00	50.00	-15.37	(QP)
11.68	Neutral	38.07	*	60.00	50.00	-21.93	(QP)
17.20	Neutral	34.01	*	60.00	50.00	-25.99	(QP)
25.06	Neutral	39.21	*	60.00	50.00	-20.79	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Table 5 Radiated Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 1

Judgement : Passed by -5.31 dB at 68.84 MHz Peak X QP Hor. X Vert.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
68.84	V	43.00	- 18.31	24.69	30.00	- 5.31	(QP)
114.73	V	40.00	- 16.52	23.48	30.00	- 6.52	
115.91	H	38.50	- 16.40	22.10	30.00	- 7.90	
153.81	H	32.40	- 14.47	17.93	30.00	- 12.07	
160.67	H	31.20	- 14.46	16.74	30.00	- 13.26	
183.62	V	39.20	- 16.60	22.60	30.00	- 7.40	
206.55	H	35.10	- 17.73	17.37	30.00	- 12.63	
216.26	H	35.10	- 17.58	17.52	30.00	- 12.48	
229.49	V	40.60	- 16.99	23.61	30.00	- 6.39	
344.26	V	41.90	- 13.43	28.47	37.00	- 8.53	
512.98	V	39.70	- 9.97	29.73	37.00	- 7.27	
513.01	H	42.50	- 9.97	32.53	37.00	- 4.47	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Table 5 Radiated Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 2

Judgement : Passed by -3.27 dB at 513.00 MHz X Peak QP X Hor. Vert.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
108.67	V	43.50	- 17.18	26.32	30.00	- 3.68	
108.81	H	38.70	- 17.16	21.54	30.00	- 8.46	
119.56	V	41.10	- 16.02	25.08	30.00	- 4.92	
129.62	V	41.30	- 15.46	25.84	30.00	- 4.16	
140.38	H	37.70	- 14.89	22.81	30.00	- 7.19	
141.84	H	36.70	- 14.83	21.87	30.00	- 8.13	
205.75	V	41.40	- 17.72	23.68	30.00	- 6.32	
216.28	V	40.40	- 17.58	22.82	30.00	- 7.18	
218.42	H	39.70	- 17.46	22.24	30.00	- 7.76	
513.00	H	43.70	- 9.97	33.73	37.00	- 3.27	
513.01	V	41.20	- 9.97	31.23	37.00	- 5.77	(QP)
710.86	H	38.00	- 6.23	31.77	37.00	- 5.23	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Table 5 Radiated Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 3

Judgement : Passed by -3.18 dB at 160.96 MHz X Peak QP X Hor. Vert.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
115.41	V	43.20	- 16.45	26.75	30.00	- 3.25	
144.14	V	40.90	- 14.75	26.15	30.00	- 3.85	
160.96	H	41.30	- 14.48	26.82	30.00	- 3.18	
161.55	V	40.10	- 14.52	25.58	30.00	- 4.42	(QP)
172.16	H	41.30	- 15.39	25.91	30.00	- 4.09	
179.76	H	42.90	- 16.23	26.67	30.00	- 3.33	
207.71	V	39.60	- 17.73	21.87	30.00	- 8.13	
219.22	V	40.60	- 17.42	23.18	30.00	- 6.82	
604.12	H	37.50	- 7.89	29.61	37.00	- 7.39	
636.58	H	39.60	- 7.34	32.26	37.00	- 4.74	
804.45	V	32.40	- 4.40	28.00	37.00	- 9.00	
805.34	H	36.50	- 4.38	32.12	37.00	- 4.88	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Table 5 Radiated Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 4

Judgement : Passed by -3.44 dB at 146.73 MHz X Peak QP Hor. X Vert.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
116.97	V	41.60	- 16.28	25.32	30.00	- 4.68	
127.02	H	38.40	- 15.58	22.82	30.00	- 7.18	
133.36	H	40.10	- 15.28	24.82	30.00	- 5.18	
146.73	V	41.20	- 14.64	26.56	30.00	- 3.44	
179.65	H	39.10	- 16.23	22.87	30.00	- 7.13	
181.75	V	42.60	- 16.43	26.17	30.00	- 3.83	
201.46	V	43.00	- 17.67	25.33	30.00	- 4.67	
218.04	V	39.30	- 17.50	21.80	30.00	- 8.20	
416.03	H	41.50	- 11.89	29.61	37.00	- 7.39	
648.84	H	34.50	- 7.14	27.36	37.00	- 9.64	
661.72	V	36.00	- 6.95	29.05	37.00	- 7.95	
710.84	H	38.90	- 6.23	32.67	37.00	- 4.33	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Table 5 Radiated Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Mode 5

Judgement : Passed by -3.44 dB at 146.73 MHz X Peak QP Hor. X Vert.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
116.97	V	41.60	- 16.28	25.32	30.00	- 4.68	
140.00	H	38.90	- 14.91	23.99	30.00	- 6.01	
146.73	V	41.20	- 14.64	26.56	30.00	- 3.44	
179.90	H	40.60	- 16.24	24.36	30.00	- 5.64	
181.75	V	42.60	- 16.43	26.17	30.00	- 3.83	
192.00	H	42.70	- 17.26	25.44	30.00	- 4.56	
201.46	V	43.00	- 17.67	25.33	30.00	- 4.67	
416.02	H	42.50	- 11.89	30.61	37.00	- 6.39	
512.98	V	40.00	- 9.97	30.03	37.00	- 6.97	
513.01	H	42.40	- 9.97	32.43	37.00	- 4.57	
663.24	V	39.80	- 6.91	32.89	37.00	- 4.11	
710.84	H	38.90	- 6.23	32.67	37.00	- 4.33	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Attachment

Table Contents

- A. Electric Block Diagram
- B. EUT Modification Description
- C. EUT Photos
- D. EUT Test Photos
- E. User's Manual
- F. Product Labeling
- G. Laboratory Accreditation Certificate

Attachment - A.

Electric Block Diagram

Attachment - B.

EUT Modification Description

Attachment - C.

EUT Test Photos

- 1. Conducted Measurement Photos**
- 2. Radiated Measurement Photos**

Attachment – D

EUT Photos

- 1. Photo # 1 Front View/Rear View**
- 2. Photo # 2 Side View**
- 3. Photo # 3~9 Front View/Rear View**

Attachment – E

User's Manual

Attachment - F

Product Labeling