



FCC ID: M82-AIM8IAC
Report No.: T180522D10-RP1

ISED: 9404A-AIM8IAC

Page: 1 / 64
Rev.: 00

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

INDUSTRY CANADA RSS-247

Test Standard FCC Part 15.247
IC RSS-247 issue 2 and IC RSS-GEN issue 5

Product name Computer

Brand Name ADVANTECH

Model Name FCC: AIM8IACxxxxxxxxxxxxxxxxxxxx; AIM8Ixxxxxxxxxxxxxxxxxxxx;
AIM-x5ATxxxxxxxxxxxxxx (where "x" may be any
alphanumeric character, "-" or blank for marketing purpose
and no impact safety related critical components and
constructions)
ISED: AIM8IAC

Test Result Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:

Sam Chuang
Manager

Tested by:

Jerry Chuang
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180522D10-RP1

Page: 2 / 64
Rev.: 00

Revision History

Rev.	Issue Date	Revisions	Revised By
00	October 30, 2018	Initial Issue	May Lin



Report No.: T180522D10-RP1

Page: 3 / 64
Rev.: 00

Table of contents

1. GENERAL INFORMATION	4
1.1 EUT INFORMATION	4
1.2 EUT CHANNEL INFORMATION	6
1.3 ANTENNA INFORMATION	6
1.4 MEASUREMENT UNCERTAINTY	7
1.5 FACILITIES AND TEST LOCATION	8
1.6 INSTRUMENT CALIBRATION	9
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT	10
2. TEST SUMMERY	11
3. DESCRIPTION OF TEST MODES	12
3.1 THE WORST MODE OF OPERATING CONDITION	12
3.2 THE WORST MODE OF MEASUREMENT	13
3.3 EUT DUTY CYCLE	14
4. TEST RESULT	15
4.1 AC POWER LINE CONDUCTED EMISSION	15
4.2 20dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)	18
4.3 OUTPUT POWER MEASUREMENT	24
4.4 FREQUENCY SEPARATION	26
4.5 NUMBER OF HOPPING	30
4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION	32
4.7 TIME OF OCCUPANCY (DWELL TIME)	37
4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION	39
APPENDIX 1 - PHOTOGRAPHS OF EUT	



Report No.: T180522D10-RP1

Page: 4 / 64
Rev.: 00

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	Advantech Co.Ltd. No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.
Manufacturer	Advantech Co.Ltd. No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.
Equipment	Computer
Model No.	FCC: AIM8IACxxxxxxxxxxxxxxxxxx; AIM8Ixxxxxxxxxxxxxxxxxx; AIM-x5ATxxxxxxxxxxxxx (where "x" may be any alphanumeric character, "-" or blank for marketing purpose and no impact safety related critical components and constructions) ISED: AIM8IAC
Model Discrepancy	FCC: All the above models are identical except for the designation of model numbers. The suffix of (where "x" may be any alphanumeric character, "-" or blank for marketing purpose and no impact safety related critical components and constructions) on model number is just for marketing purpose only.
Received Date	May 22, 2018
Date of Test	June 27 ~ 29, 2018
Output Power(W)	GFSK: 0.0036 8DPSK: 0.0025
Power Supply	1. VDC from Power Adapter Brand: Chicony Model name: A16-018N1A Input: 100-240Vac, 50-60Hz, 1A Output: 5.15Vdc, 3A / 9.1Vdc, 2A 2. Power from Battery: ADVANTECH / AIM-BAT-8 Rating: 3.8Vdc 4900mAh

1.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS

1.2.1 Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

1.2.2 Equal Hopping Frequency Use

The channels of this system will be used equally over the long-term distribution of the hopsets.

1.2.3 Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

1.2.4 System Receiver Input Bandwidth

Each channel bandwidth is 1MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.2.5 Equipment Description

15.247(a)(1) that the Rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

1.3 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BR-1Mbps 2. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 and RSS-GEN Table 1 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.4 ANTENNA INFORMATION

Antenna Type	☒ PIFA ☐ PCB ☐ Dipole ☐ Coils
Antenna Gain	Gain: 0.37dBi

1.5 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 2.96
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.



Report No.: T180522D10-RP1

Page: 8 / 64

Rev.: 00

1.6 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Chuang	-
RF Conducted	Jerry Chuang	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.7 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1012009	09/18/2017	09/17/2018
Power Sensor	Anritsu	MA2411B	917072	09/18/2017	09/17/2018
Base Station	R&S	CMW 500	116875	04/20/2018	04/19/2019
Spectrum Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018
Directional Coupler	Agilent	87301D	MY44350252	07/25/2017	07/24/2018
SUCOFLEX Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Divider	Solvang Technology	2-18GHz 4Way	STI08-0015	07/26/2017	07/25/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	05/14/2018	05/13/2019
Bilog Antenna	Sunol Sciences	JB3	A030105	06/19/2018	06/18/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	02/08/2018	02/07/2019
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	HP	8449B	3008A00965	06/28/2018	06/27/2019
Pre-Amplifier	EMEC	EM330	060609	07/31/2017	07/30/2018
Wideband Radio Communication Tester	R&S	CMW 500	116875	04/20/2018	04/19/2019
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

Remark: Each piece of equipment is scheduled for calibration once a year.



Report No.: T180522D10-RP1

Page: 10 / 64
Rev.: 00

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
LISN	R&S	ENV216	101054	02/06/2018	02/05/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
EMI Test Receiver	R&S	ESCI	101203	11/02/2017	11/01/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

1.8 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

1.9 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, RSS-247 Issue 2 and RSS-GEN Issue 5.



Report No.: T180522D10-RP1

Page: 11 / 64
Rev.: 00

2. TEST SUMMERY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
15.203	-	1.3	Antenna Requirement	Pass
15.207(a)	RSS-GEN 8.8	4.1	AC Conducted Emission	Pass
15.247(a)(1)	RSS-247(5.1)(a)	4.2	20 dB Bandwidth	Pass
-	RSS-GEN 6.7	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(1)	RSS-247(5.4)(b)	4.3	Output Power Measurement	Pass
15.247(a)(1)	RSS-247(5.1)(b)	4.4	Frequency Separation	Pass
15.247(a)(1)(iii)	RSS-247(5.1)(d)	4.5	Number of Hopping	Pass
15.247(d)	RSS-247(5.5)	4.6	Conducted Band Edge	Pass
15.247(d)	RSS-247(5.5)	4.6	Conducted Spurious Emission	Pass
15.247(a)(1)(iii)	RSS-247(5.1)(d)	4.7	Time of Occupancy	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.8	Radiation Band Edge	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.8	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BR-1Mbps (DH5) 8DPSK for EDR-3Mbps (DH5)
Test Channel Frequencies	GFSK for BR-1Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz 8DPSK for EDR-3Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by AC adapter via power cable. Mode 2: EUT power by battery.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by AC adapter via power cable. Mode 2: EUT power by battery.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☒ Horizontal ☐ Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by AC adapter via power cable. Mode 2: EUT power by battery.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (X-Plane and Horizontal) were recorded in this report
3. For below 1G, AC power line conducted emission and radiation emission were performed the EUT transmit at the highest output power channel as worse case.

3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BR-1Mbps	2.9855	6.2609	47.68%	3.22
EDR-3Mbps	2.9855	6.2609	47.68%	3.22

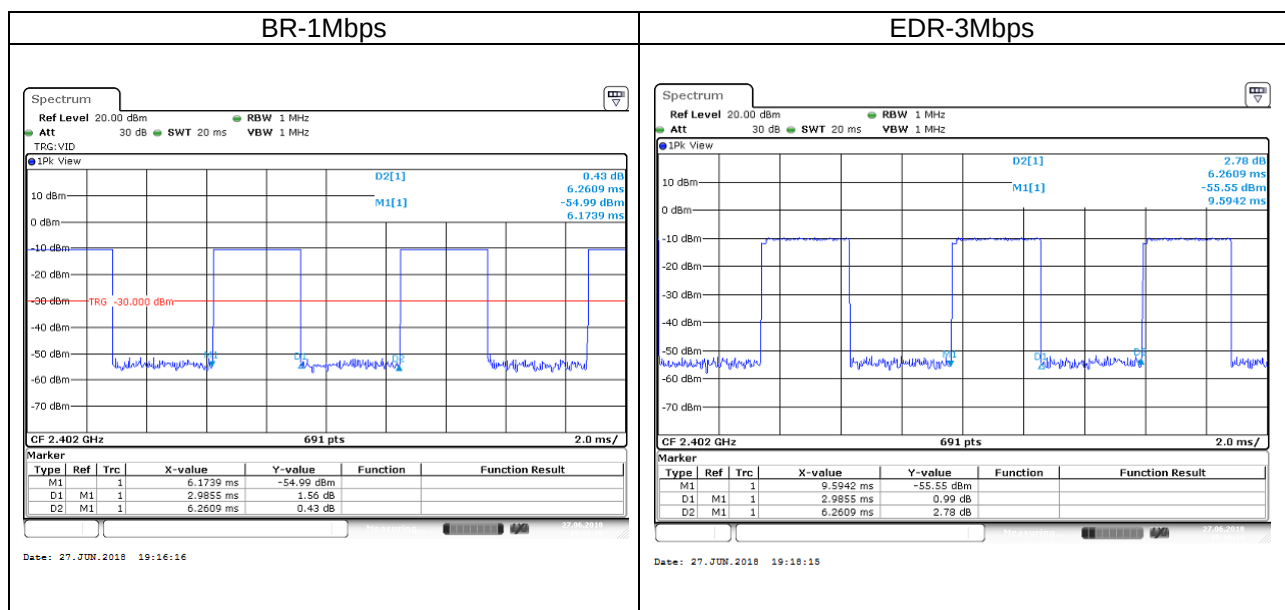

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a) and RSS-GEN section 8.8,

Frequency Range (MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

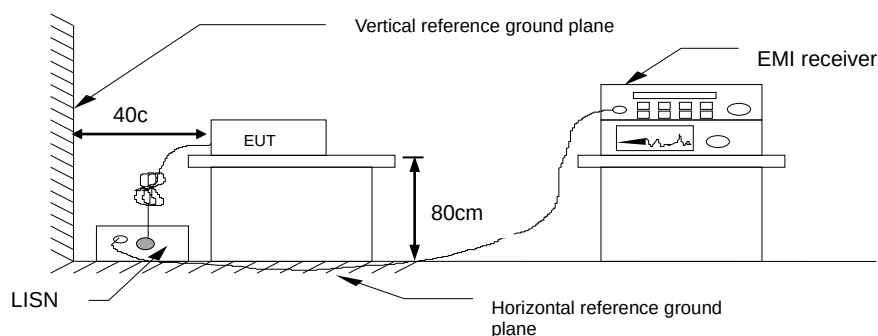

4.1.4 Test Result


Pass.

Report No.: T180522D10-RP1

Page: 16 / 64
Rev.: 00

Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Test Voltage:	120Vac / 60Hz	Test Date	2018/06/29
Phase:	Line	Test Engineer	Dally Hong

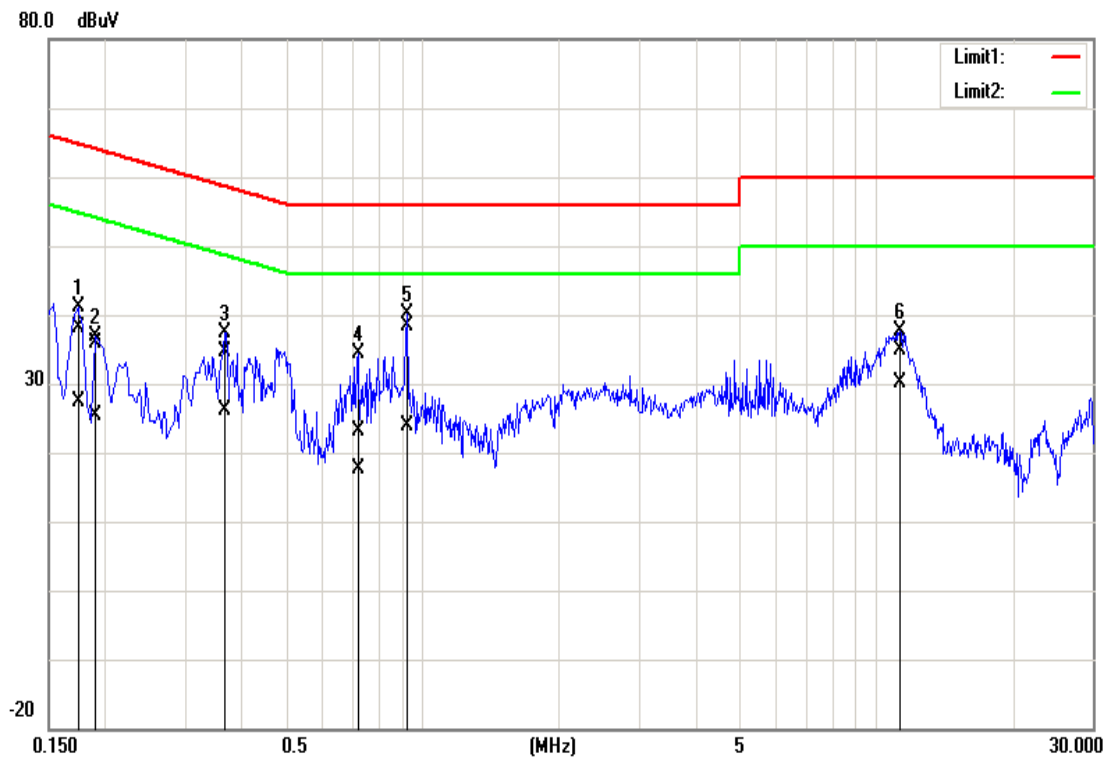


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1740	38.01	27.25	0.11	38.12	27.36	64.77	54.77	-26.65	-27.41	Pass
2	0.1900	35.72	25.38	0.11	35.83	25.49	64.04	54.04	-28.21	-28.55	Pass
3	0.3660	34.57	25.98	0.12	34.69	26.10	58.59	48.59	-23.90	-22.49	Pass
4	0.7220	23.06	17.51	0.13	23.19	17.64	56.00	46.00	-32.81	-28.36	Pass
5	0.9260	38.34	23.82	0.13	38.47	23.95	56.00	46.00	-17.53	-22.05	Pass
6	11.3060	34.59	29.69	0.32	34.91	30.01	60.00	50.00	-25.09	-19.99	Pass

Report No.: T180522D10-RP1

Page: 17 / 64
Rev.: 00

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Test Voltage:	120Vac / 60Hz	Test Date	2018/06/29
Phase:	Neutral	Test Engineer	Dally Hong

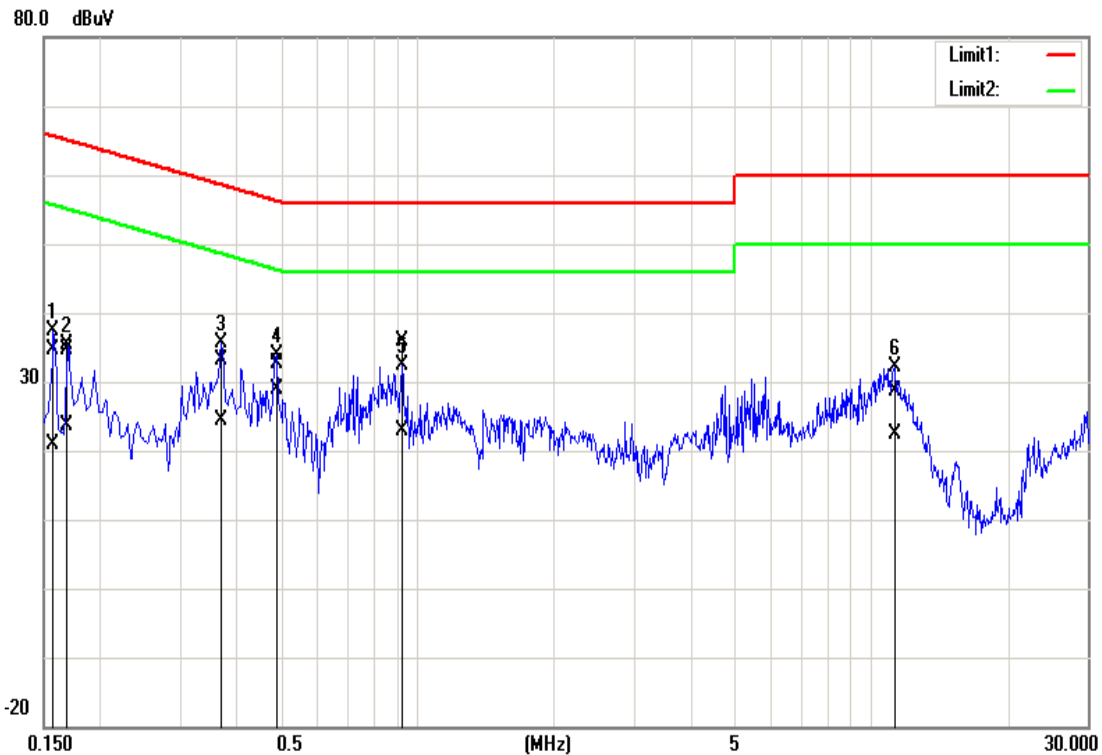

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1580	34.49	20.72	0.14	34.63	20.86	65.57	55.57	-30.94	-34.71	Pass
2	0.1700	34.38	23.57	0.14	34.52	23.71	64.96	54.96	-30.44	-31.25	Pass
3	0.3700	33.05	24.26	0.13	33.18	24.39	58.50	48.50	-25.32	-24.11	Pass
4	0.4900	32.60	28.70	0.13	32.73	28.83	56.17	46.17	-23.44	-17.34	Pass
5	0.9260	35.85	22.65	0.14	35.99	22.79	56.00	46.00	-20.01	-23.21	Pass
6	11.2660	28.19	21.98	0.32	28.51	22.30	60.00	50.00	-31.49	-27.70	Pass

4.2 20dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

4.2.1 Test Limit

According to §15.247(a) (1), RSS-247 section 5.1(a) and RSS-GEN 6.7,

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 11.8.1,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 20 dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup



4.2.4 Test Result

Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	0.9030	1.0507
Mid	2441	0.8986	1.055
High	2480	0.9030	1.0507

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	1.2243	1.3372
Mid	2441	1.2286	1.3372
High	2480	1.2243	1.3372




Report No.: T180522D10-RP1

Page: 20 / 64
Rev.: 00

Test Data


20dB

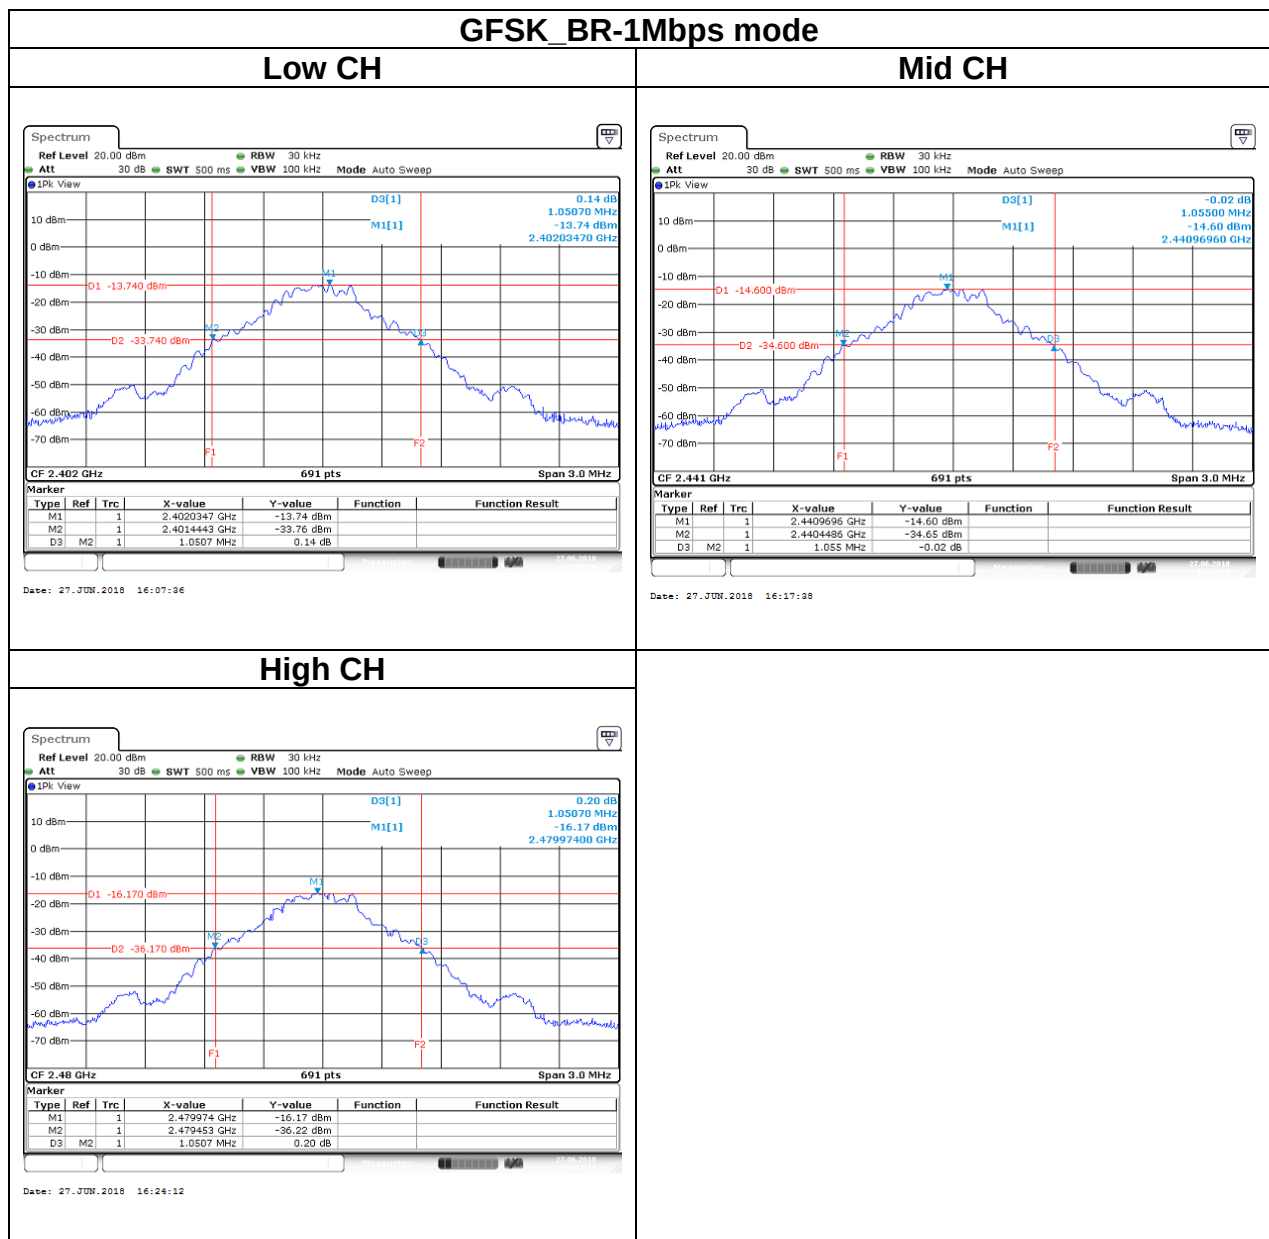





Report No.: T180522D10-RP1

Page: 21 / 64
Rev.: 00

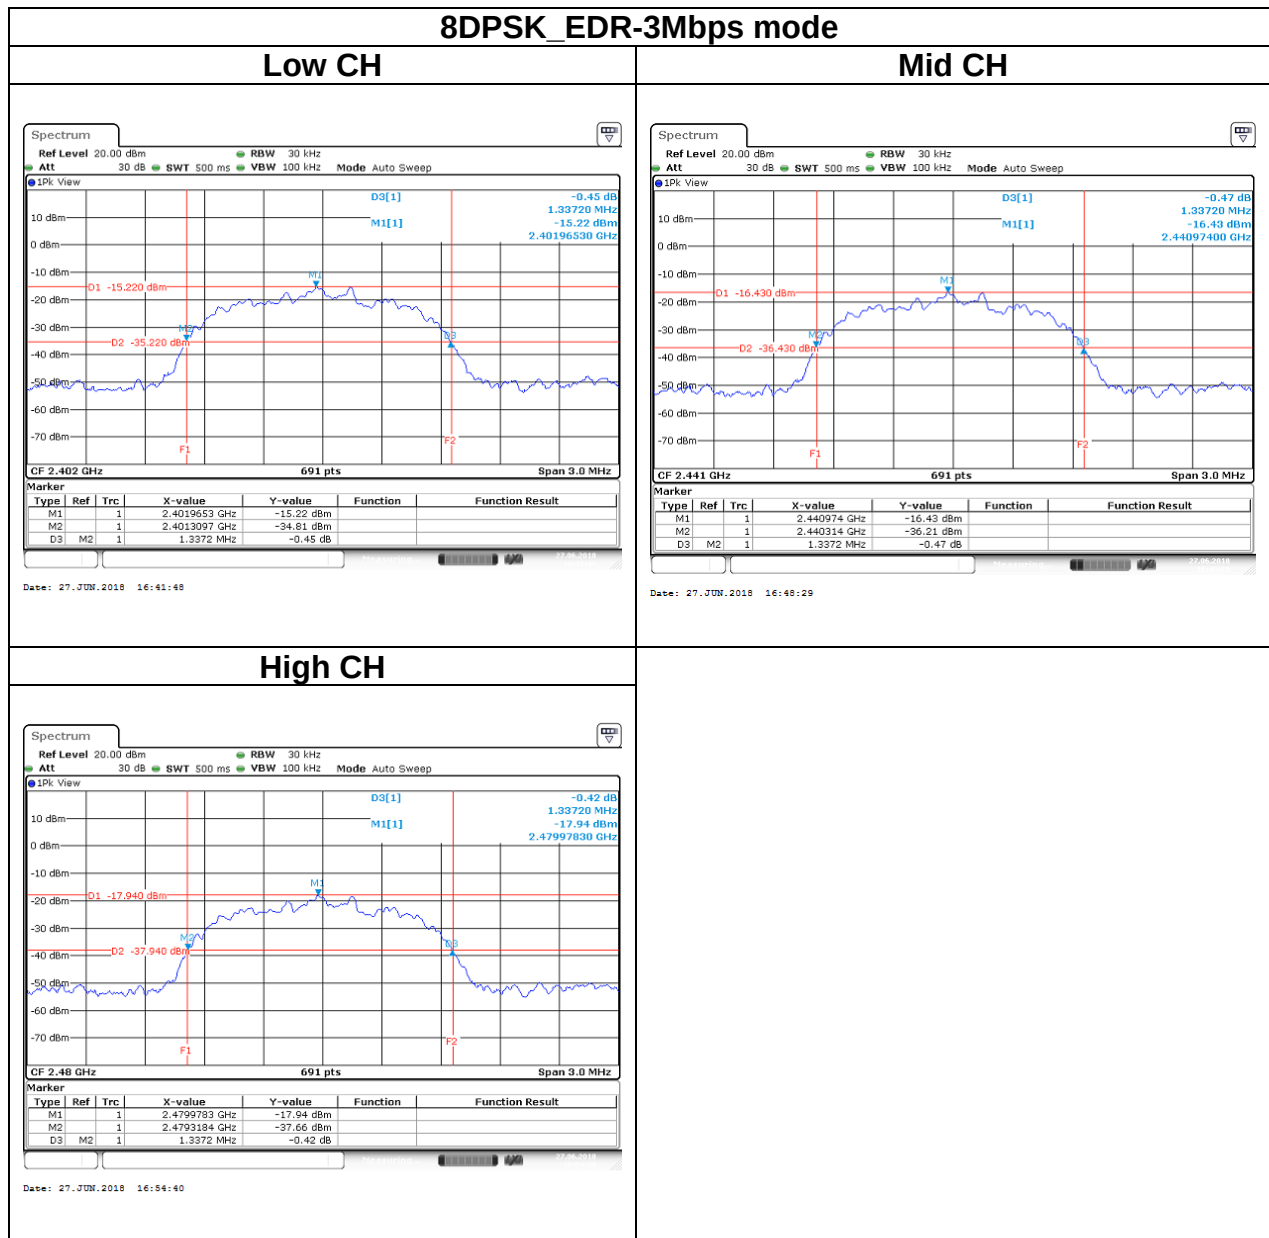

99%OBW

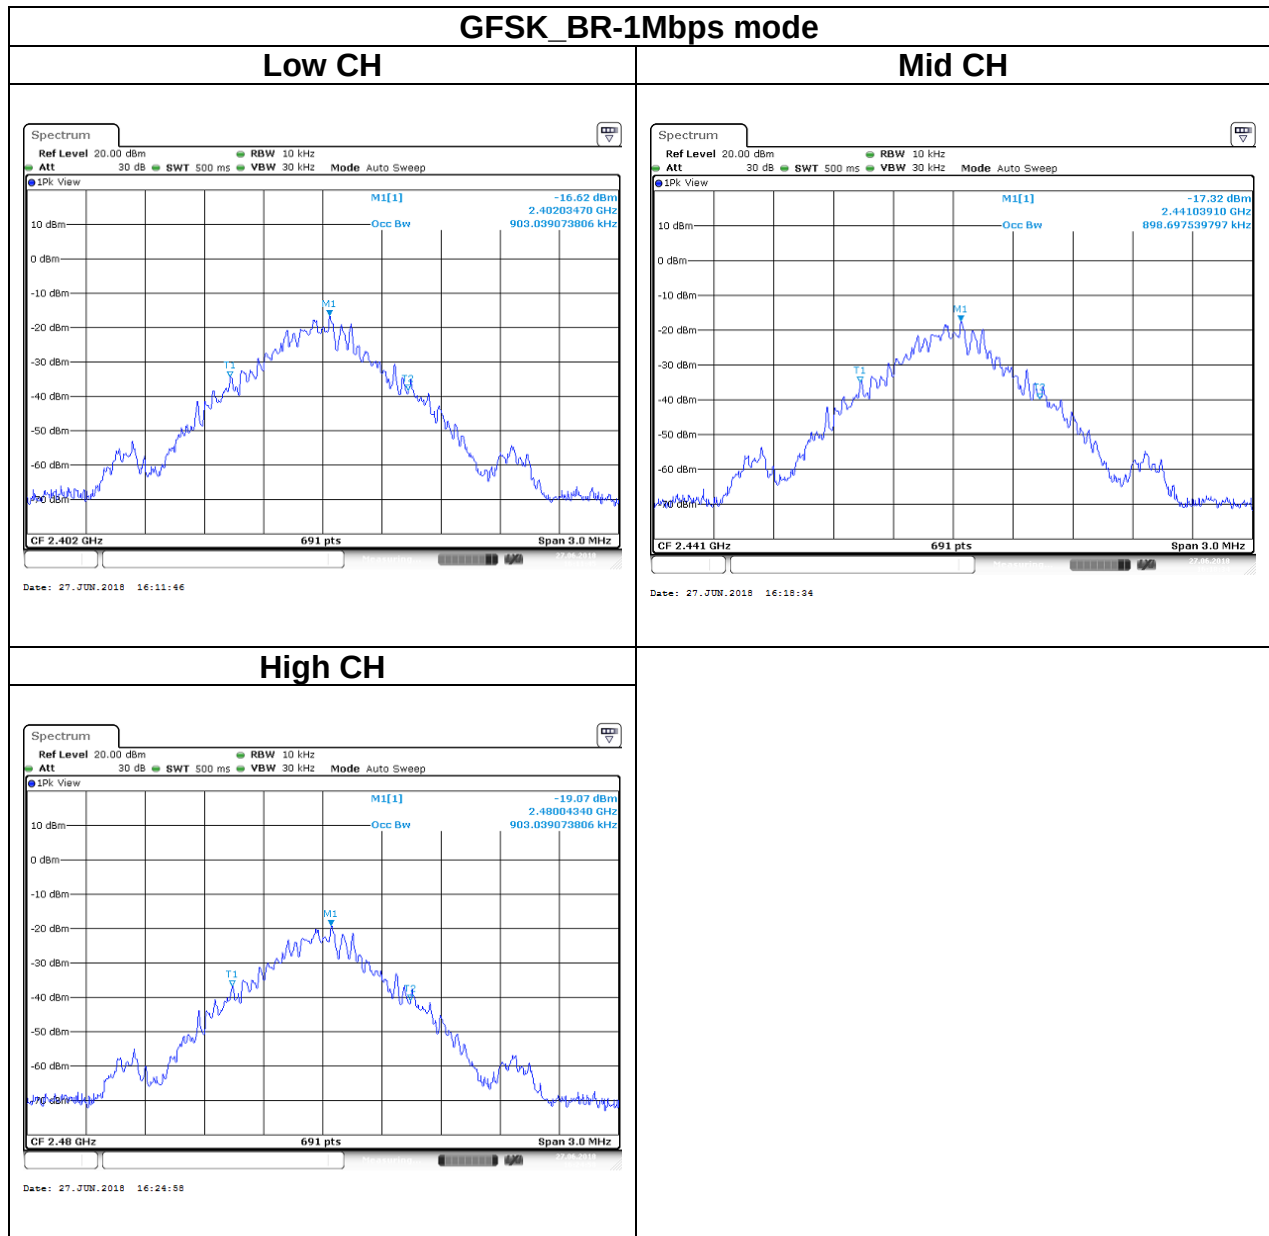

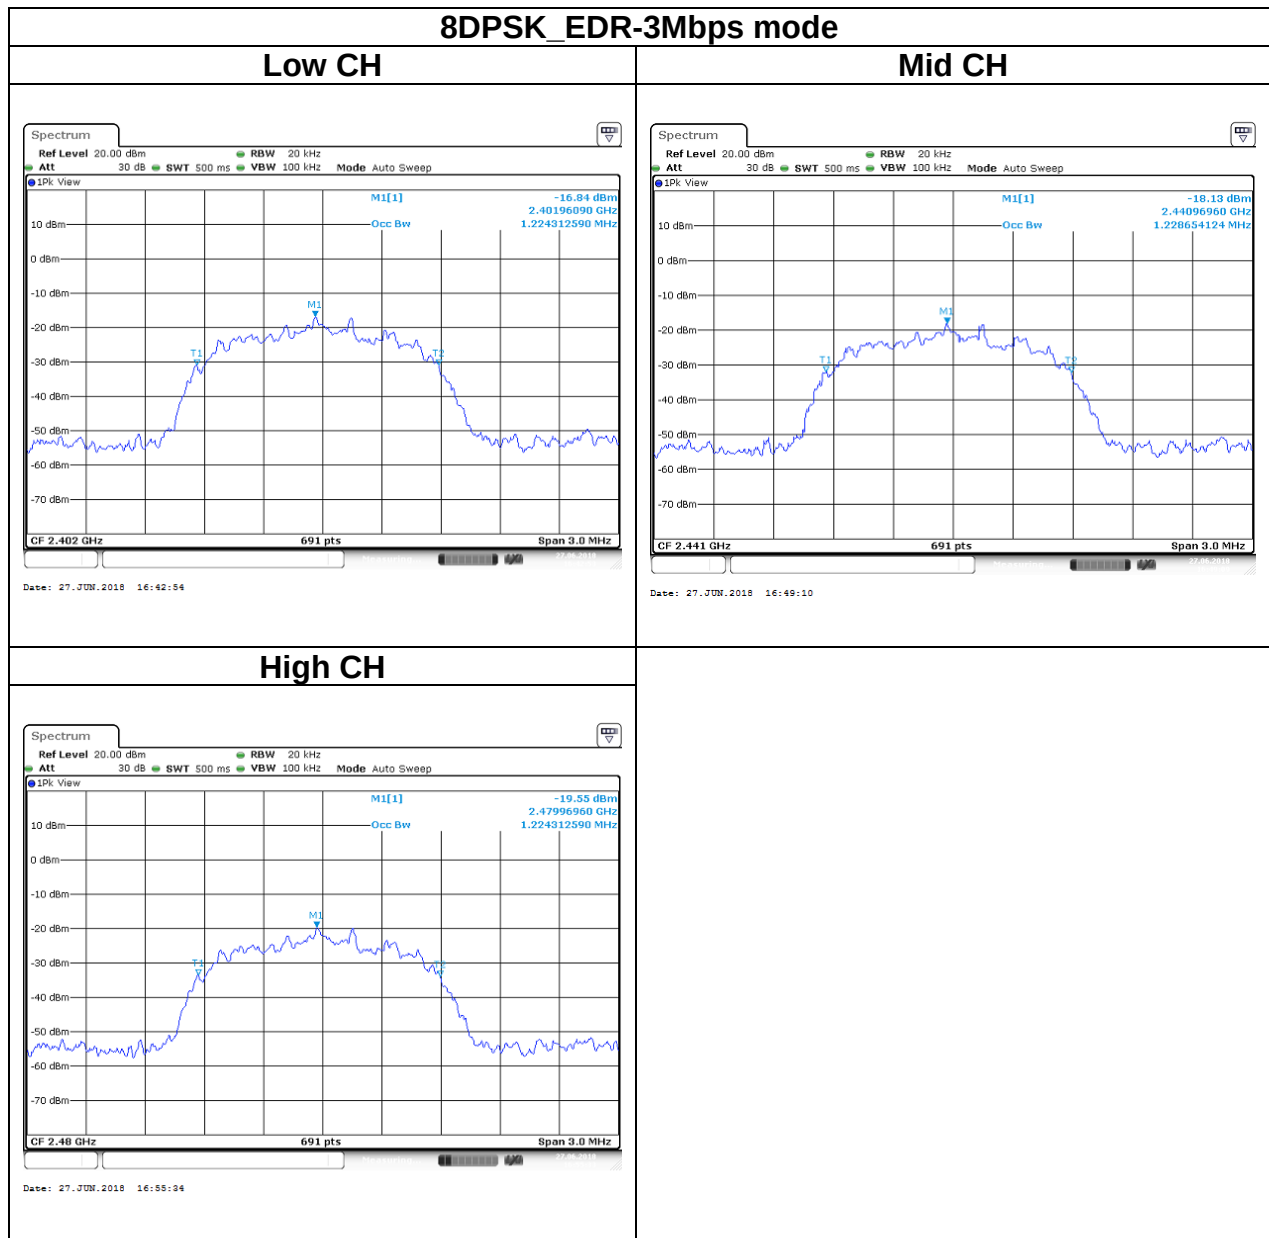

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)(1) and RSS-247 section 5.4(b)

Peak output power :

FCC

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

IC

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.


Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

4.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup



4.3.4 Test Result

Peak output power :

BT								
Config.	CH	Freq. (MHz)	PK Power (dBm)	EIRP PK Power (dBm)	PK Power (W)	EIRP PK Power (W)	FCC/IC Limit (dBm)	IC EIRP Limit (dBm)
GFSK BR-1Mbps (DH5)	0	2402	5.52	5.89	0.0036	0.0039	21	36
	39	2441	5.07	5.44	0.0032	0.0035		
	78	2480	3.15	3.52	0.0021	0.0022		
8DPSK EDR-3Mbps (DH5)	0	2402	3.92	4.29	0.0025	0.0027		
	39	2441	3.02	3.39	0.0020	0.0022		
	78	2480	1.14	1.51	0.0013	0.0014		

Average output power :

BT			
Config.	CH	Freq. (MHz)	AV Power (dBm)
GFSK BR-1Mbps (DH5)	0	2402	5.09
	39	2441	4.66
	78	2480	2.76
8DPSK EDR-3Mbps (DH5)	0	2402	3.76
	39	2441	2.80
	78	2480	0.90

4.4 FREQUENCY SEPARATION

4.4.1 Test Limit

According to §15.247(a)(1) and RSS-247 section 5.1(b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

4.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

4.4.3 Test Setup





4.4.4 Test Result

Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	0.9986	0.700	PASS
Mid	2441	0.9986	0.703	PASS
High	2480	0.9986	0.700	PASS

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	0.9986	0.891	PASS
Mid	2441	0.9986	0.891	PASS
High	2480	0.9986	0.891	PASS

Test Data

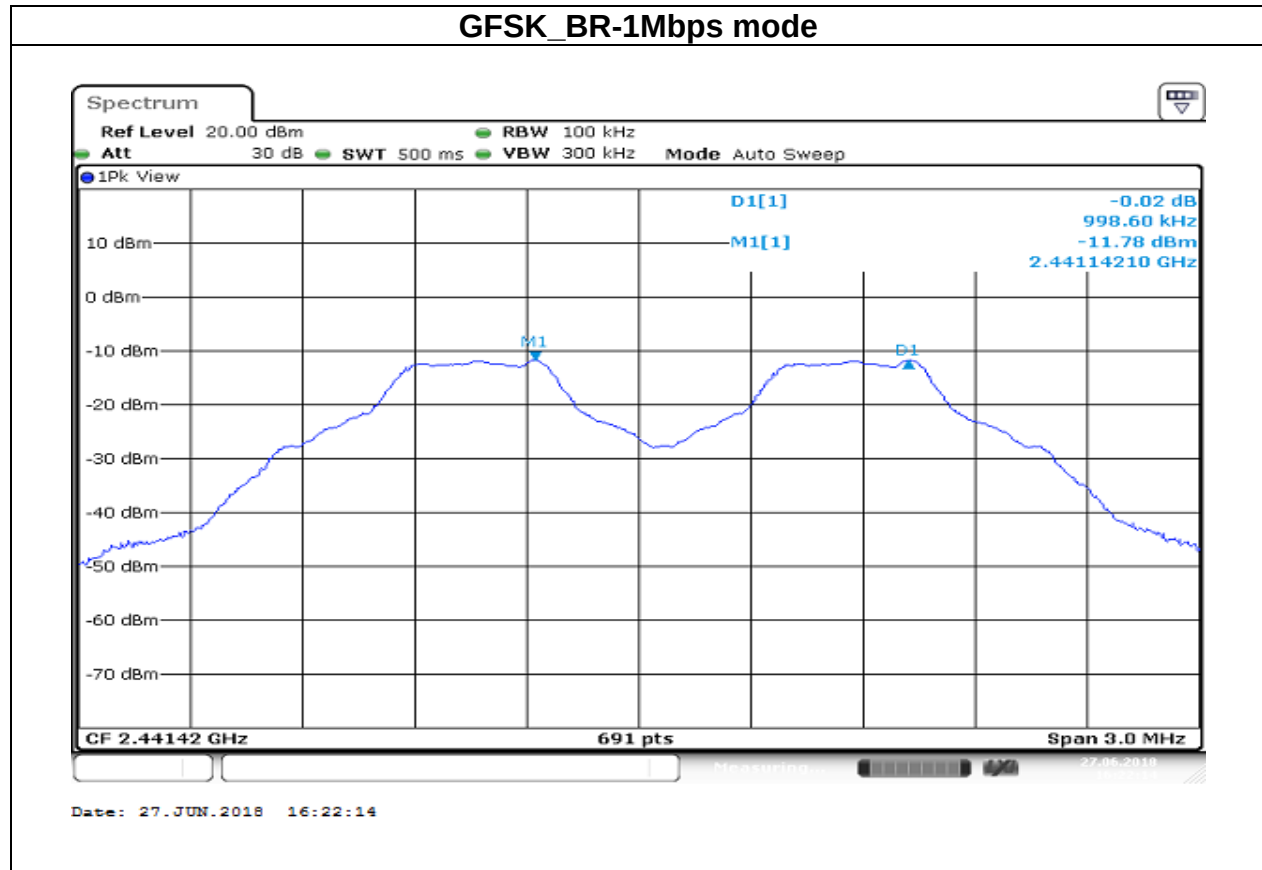

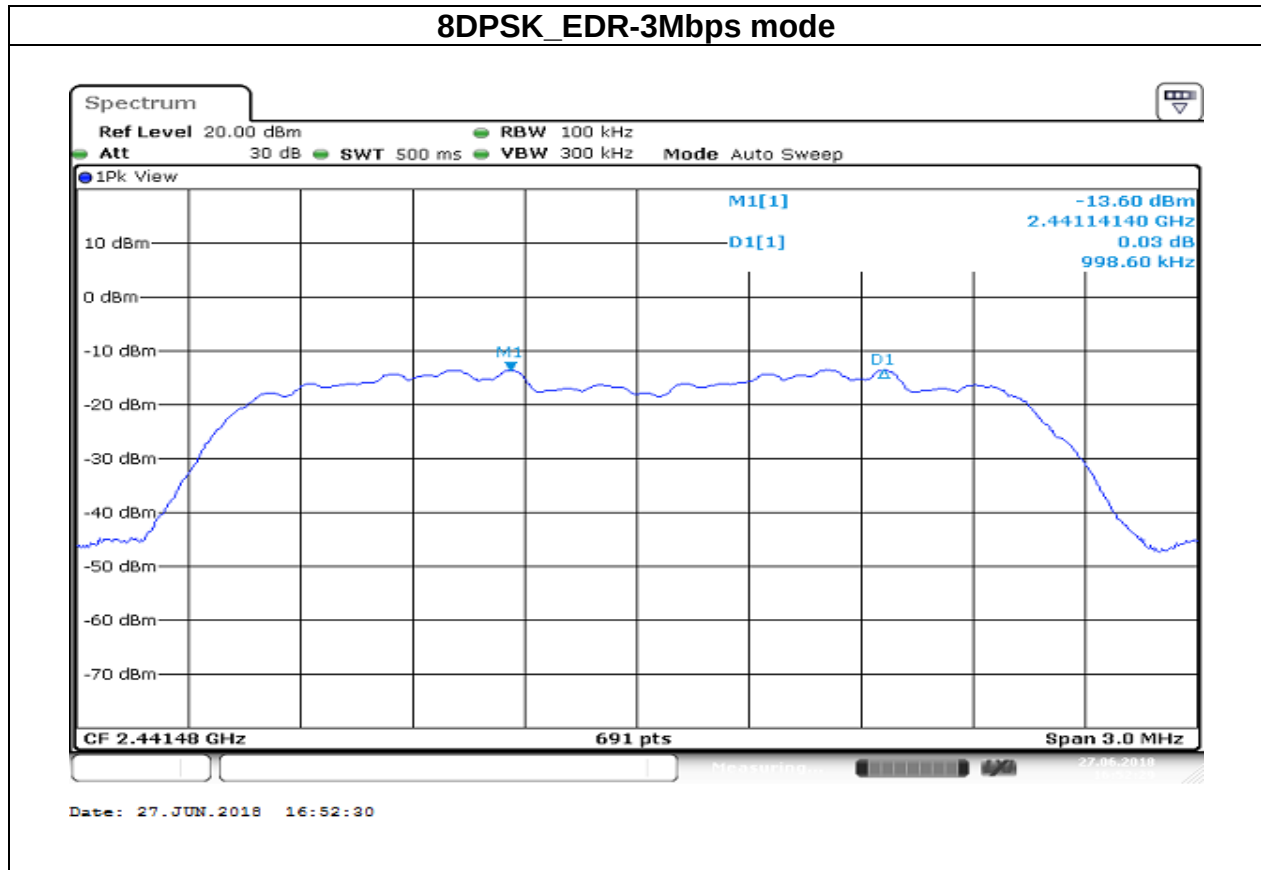

4.5 NUMBER OF HOPPING

4.5.1 Test Limit

According to §15.247(a)(1)(iii) and RSS-247 section 5.1(d)


Frequency hopping system in the 2400-2483.5MHz band shall use at least 15 channels.

4.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


4.5.3 Test Setup

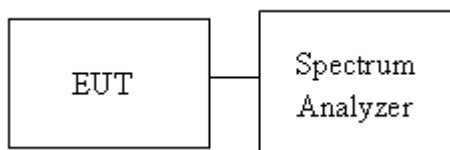

4.5.4 Test Result

Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	

Test Data

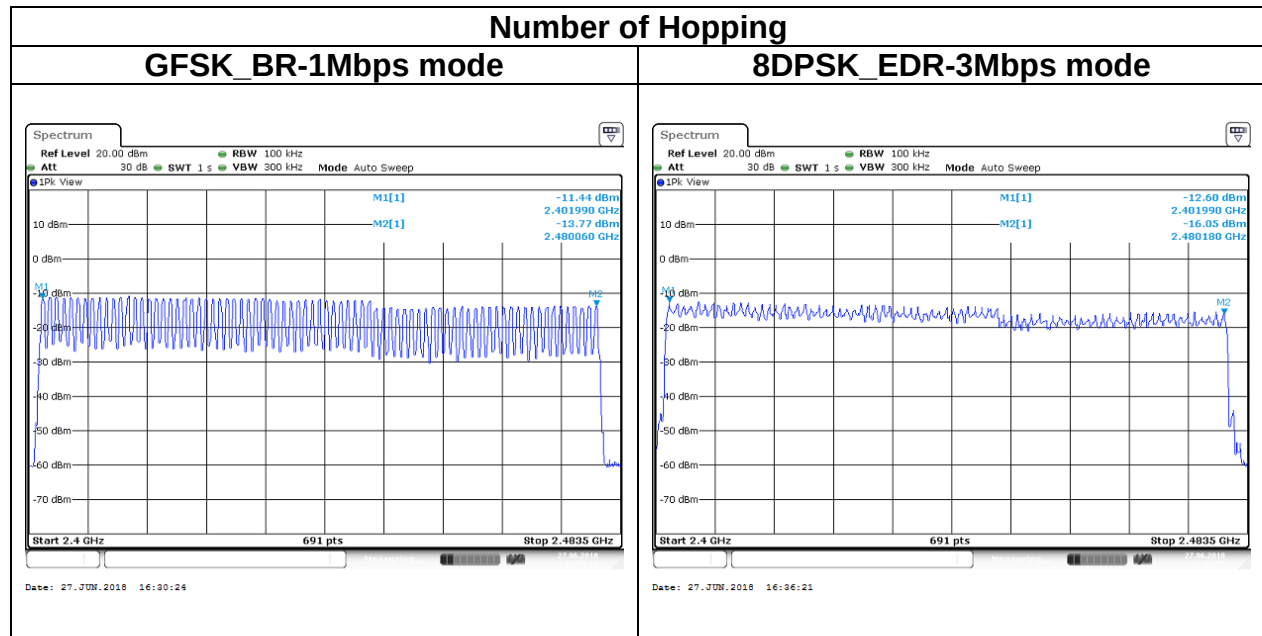

4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit


According to §15.247(d) and RSS-247 section 5.5

Limit	-20 dBc
-------	---------

4.6.2 Test Procedure



1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with both hopping “ON” and “OFF” modes “.



4.6.3 Test Setup







4.6.4 Test Result

Test Data

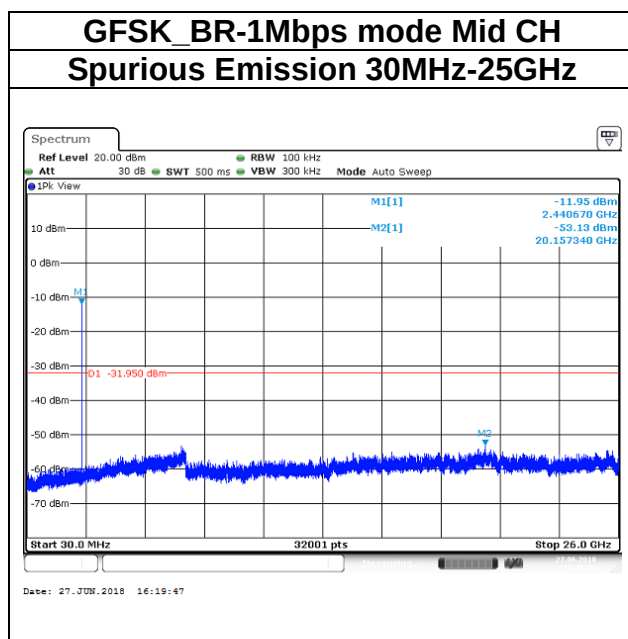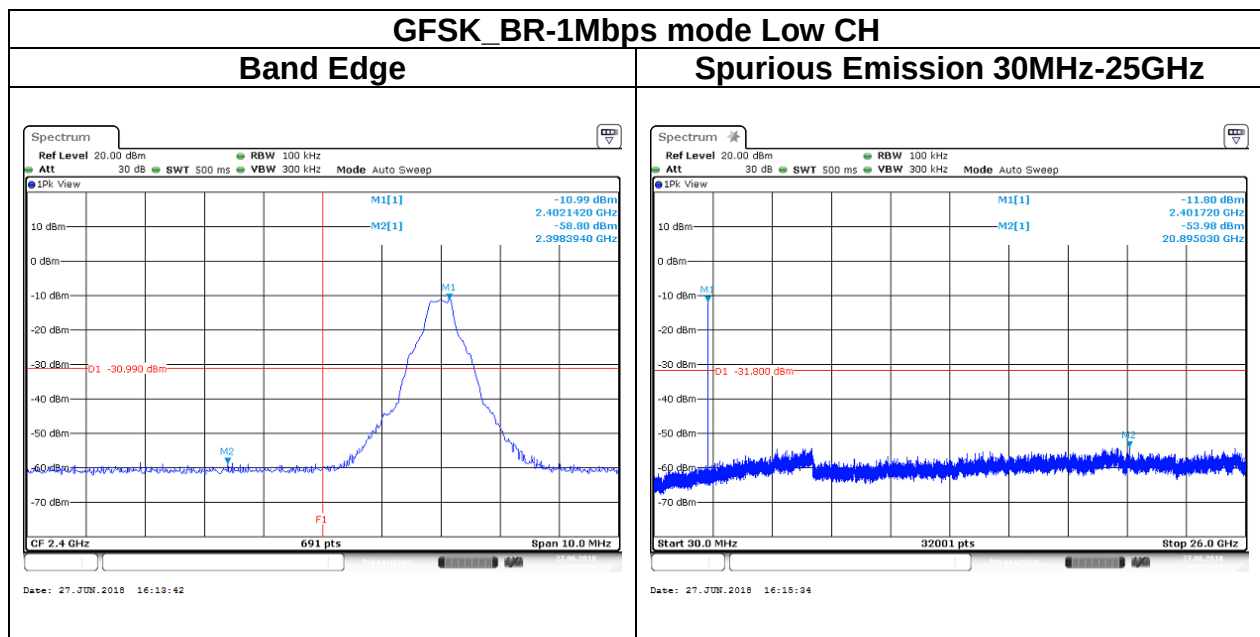

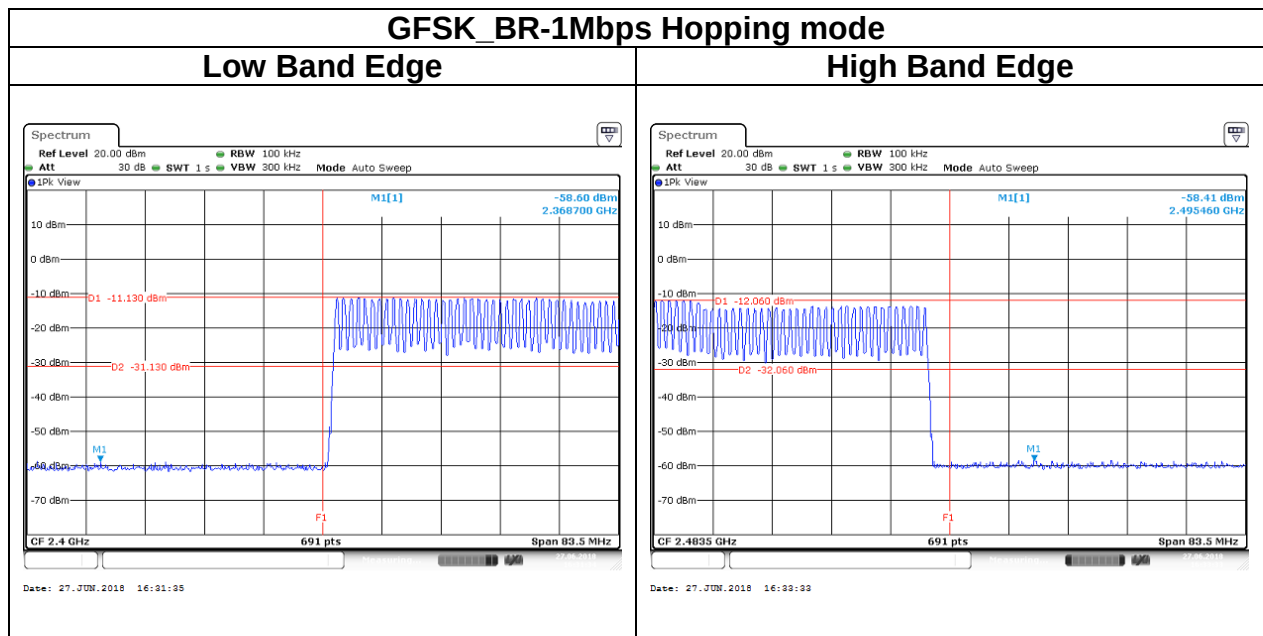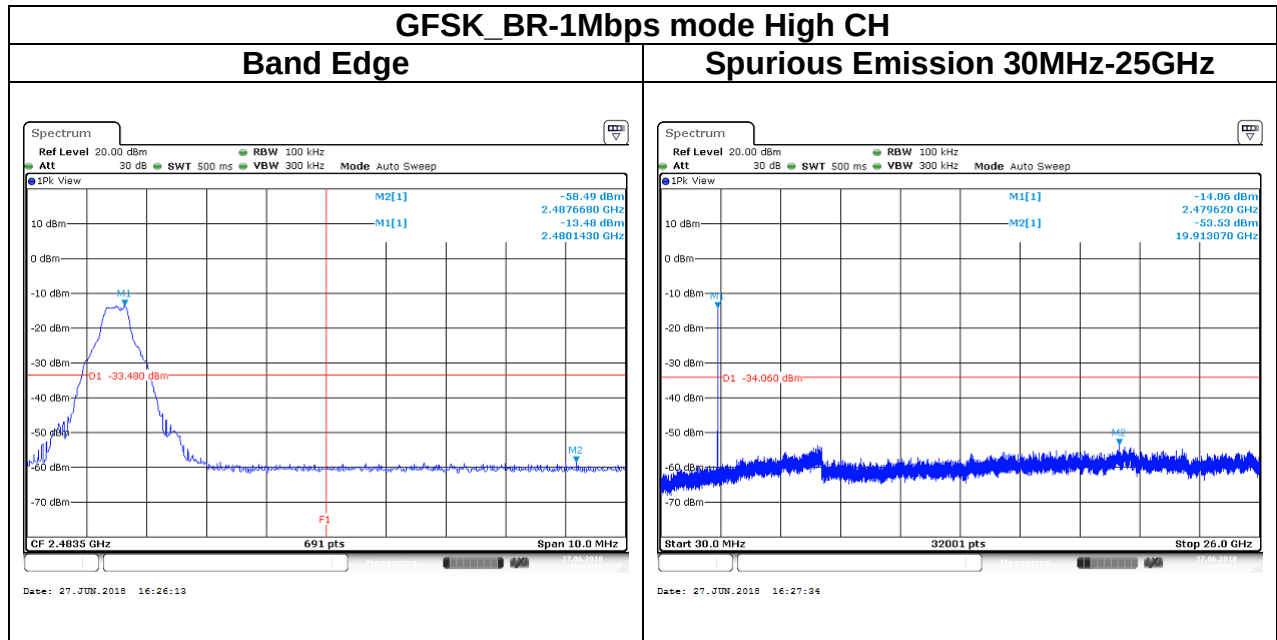

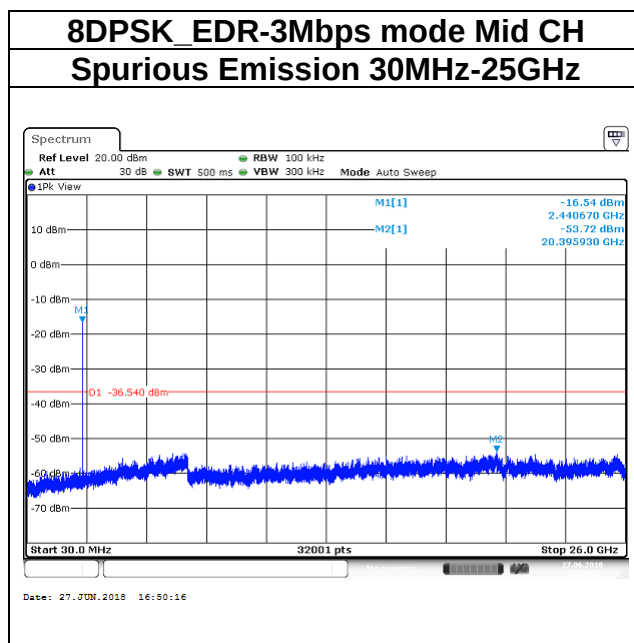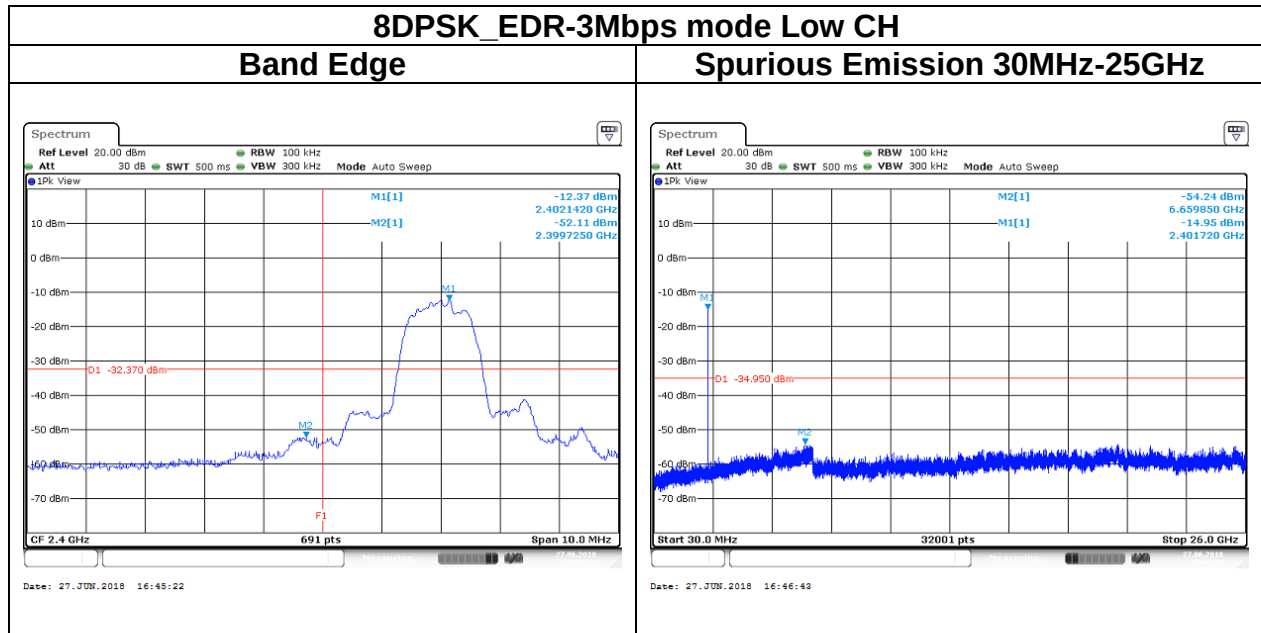

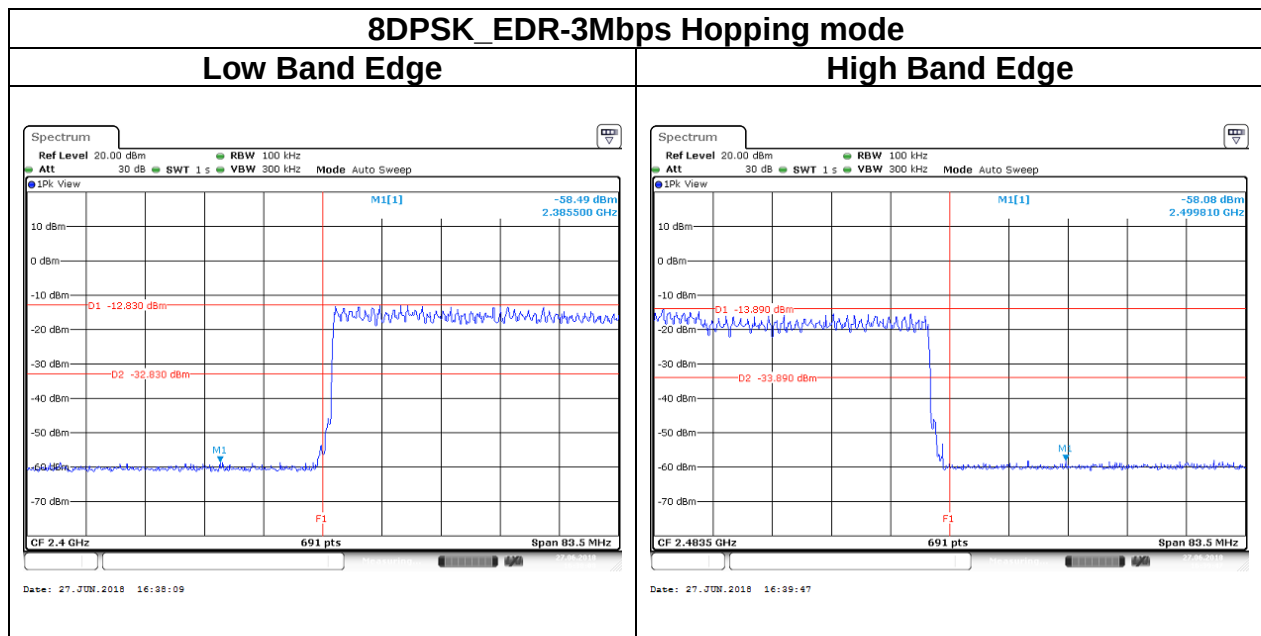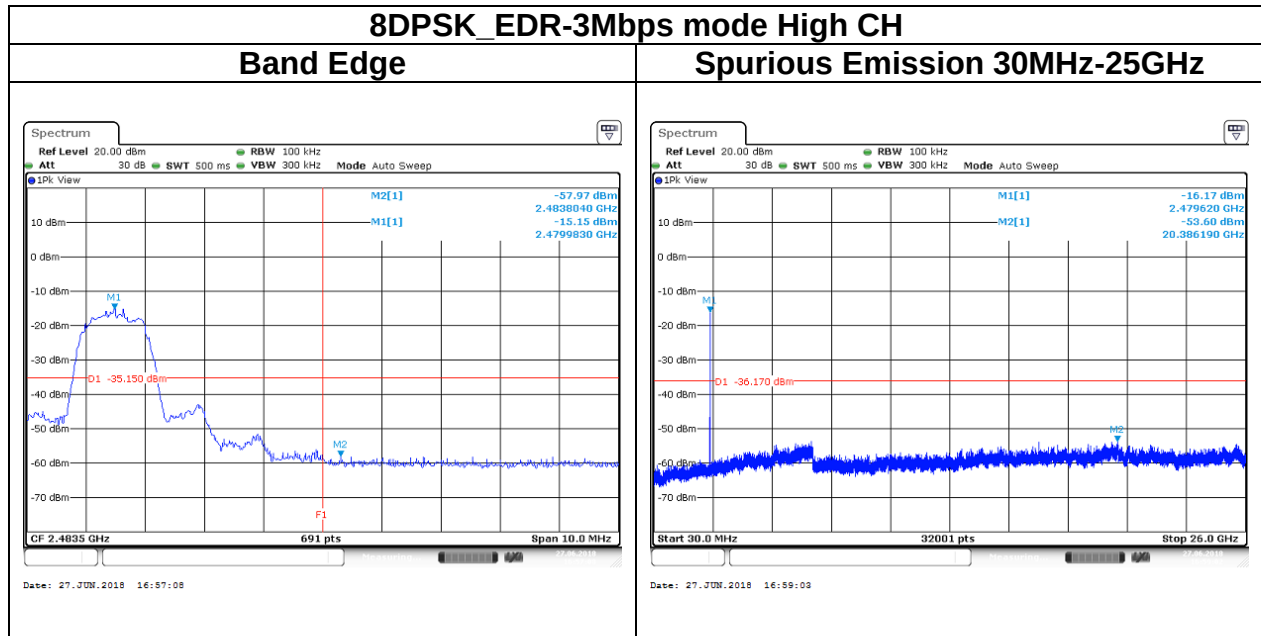

4.7 TIME OF OCCUPANCY (DWEELL TIME)

4.7.1 Test Limit


According to §15.247(a)(1)(iii) and RSS-247 section 5.1(d).

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


4.7.3 Test Setup

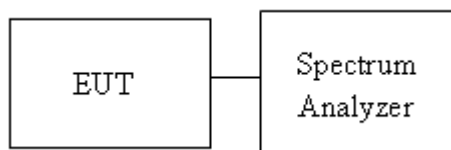

4.7.4 Test Result

Time of Occupancy (Dwell Time)							
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result
				(0.4 * N sec)	(0.4 * N sec)		
BR-1Mbps	2441	2.9855	79	106.67	0.3185	0.4	Pass
EDR-3Mbps	2441	2.9855	79	106.67	0.3185	0.4	
Non-AFH: DH5 Packet permit maximum $1600/ 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 * 0.4 * 79 = 106.6$							
AFH: DH5 Packet permit maximum $800/ 20 / 6 = 6.666$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $6.666 * 0.4 * 20 = 53.33$							

Test Data

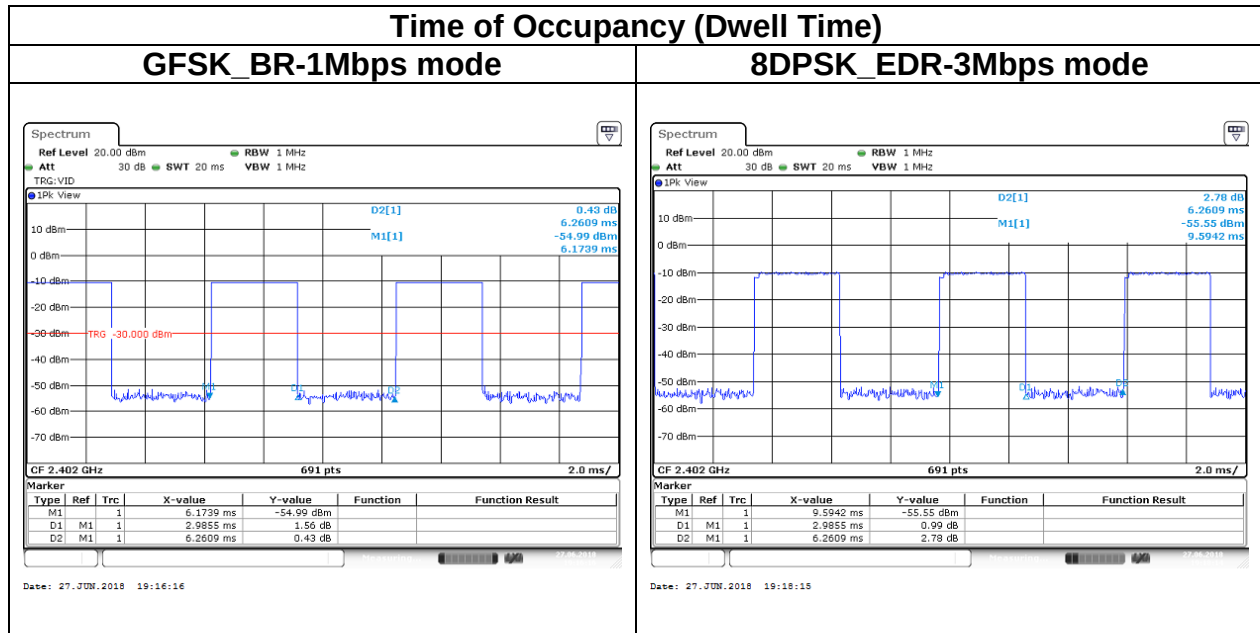

4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.8.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.


Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
4. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - If Duty Cycle $\geq$ 98%, VBW=10Hz.
 - If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW setting
GFSK_BR-1Mbps	48%	2.9855	0.335	360Hz
8DPSK_EDR-3Mbps	48%	2.9855	0.335	360Hz

4.8.3 Test Setup


9kHz ~ 30MHz

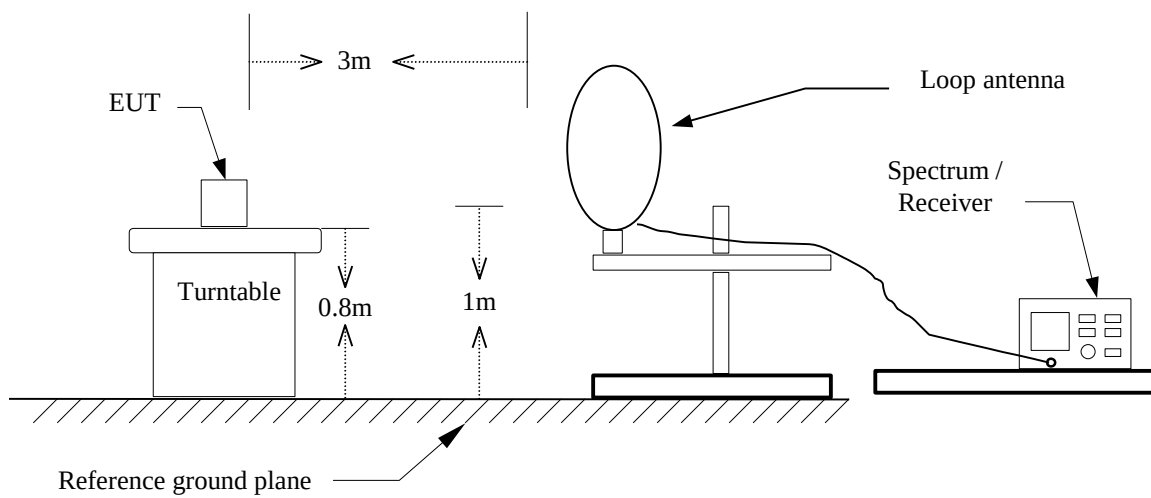

30MHz ~ 1GHz

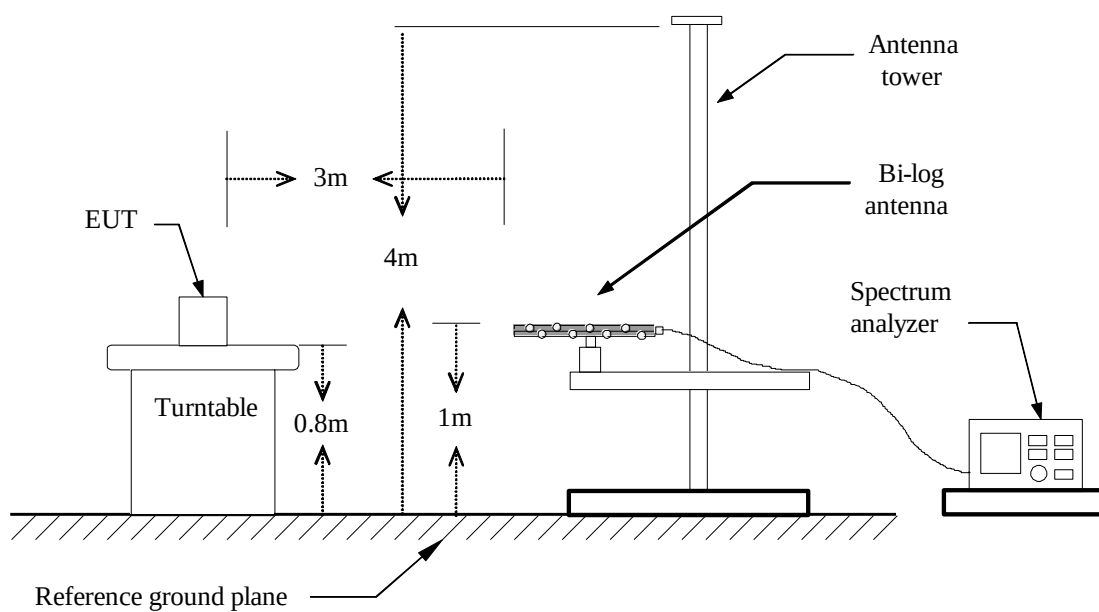


Above 1 GHz

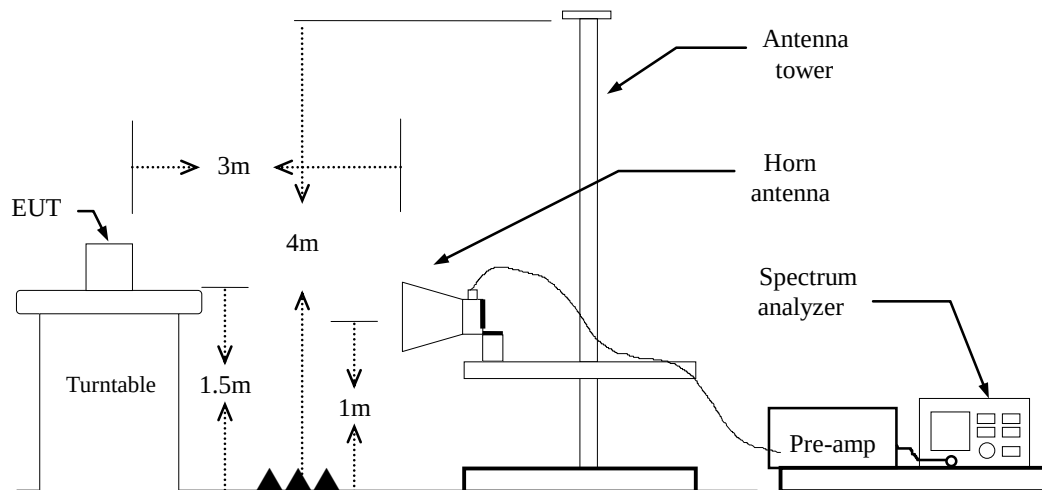

4.8.4 Test Result


Band Edge Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

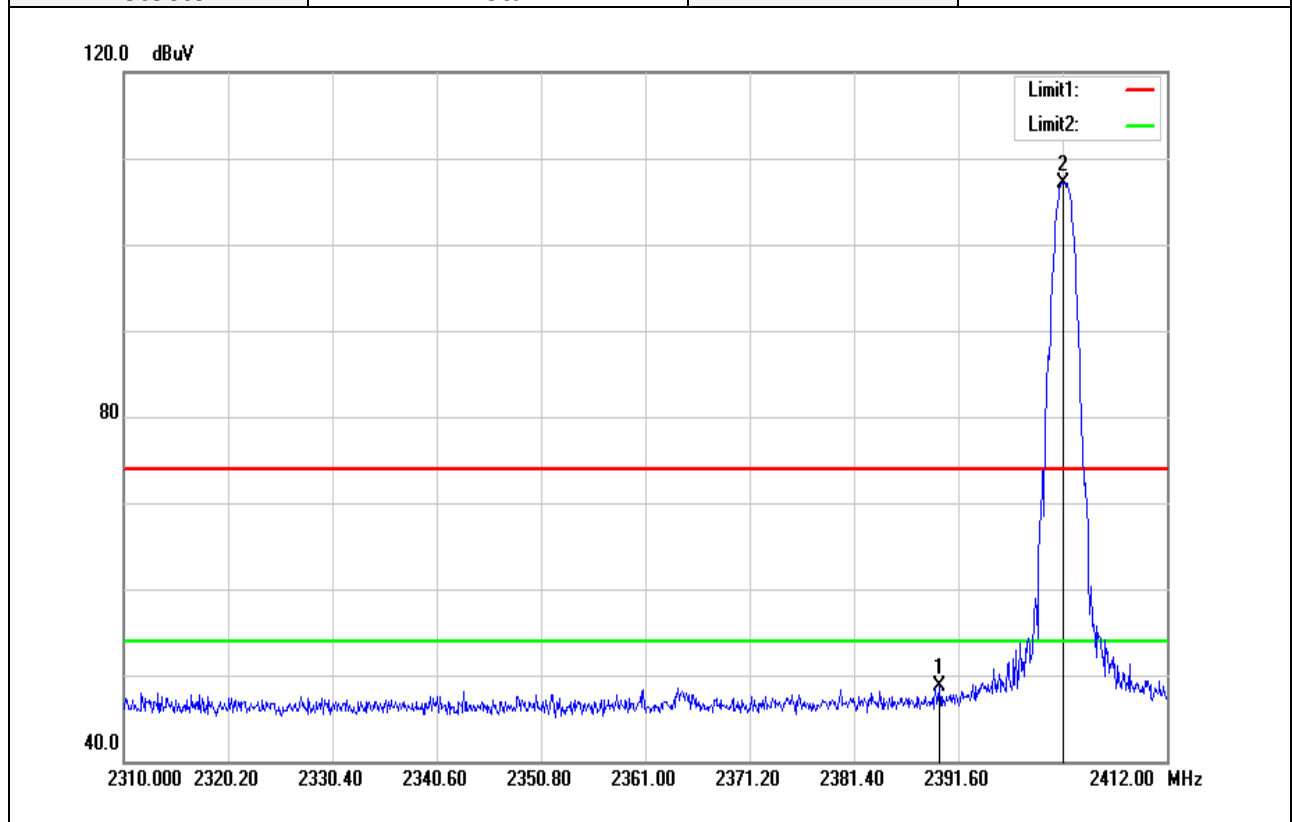

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.764	51.63	-2.98	48.65	74.00	-25.35	peak
2	2401.800	110.06	-2.95	107.11	-	-	peak

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

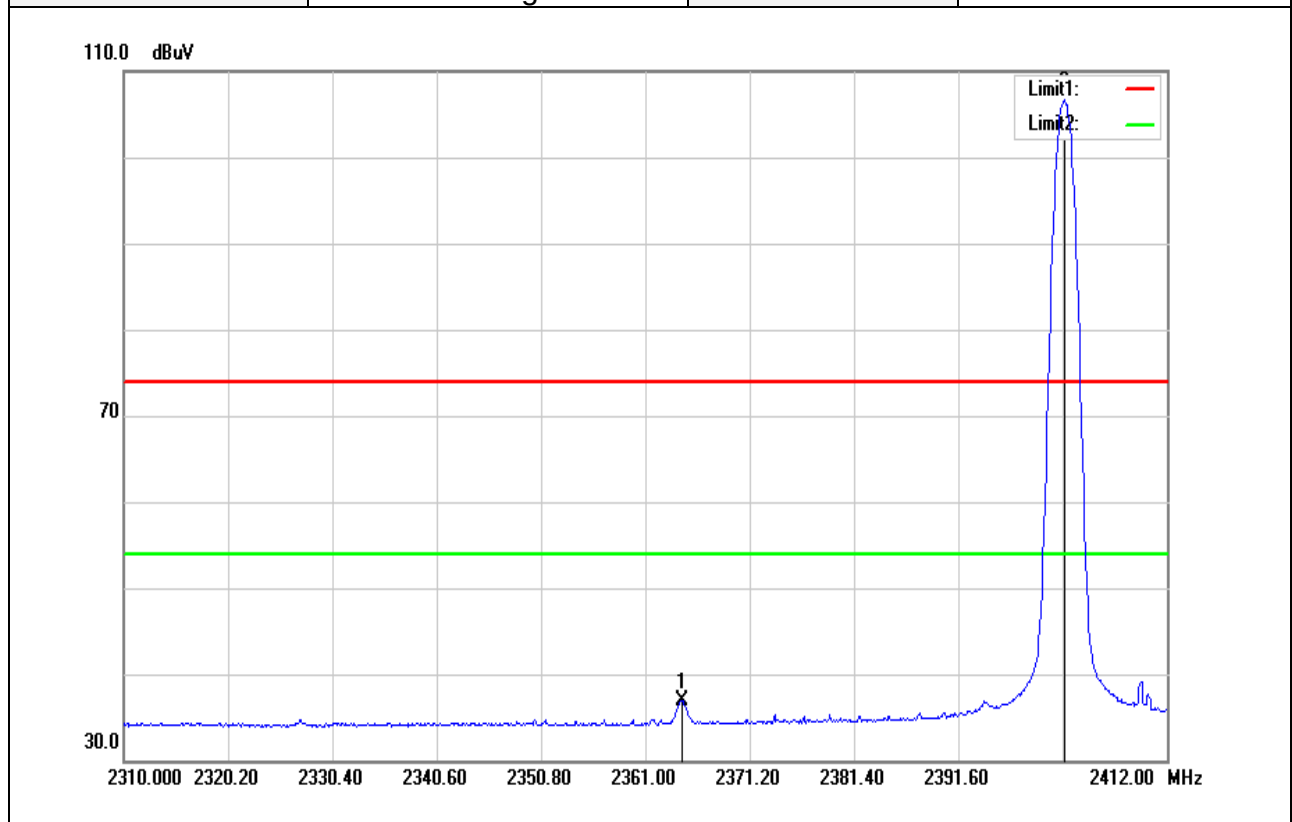


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.570	40.04	-3.07	36.97	54.00	-17.03	AVG
2	2402.004	109.66	-2.95	106.71	-	-	AVG

Report No.: T180522D10-RP1


Page: 45 / 64
Rev.: 00

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

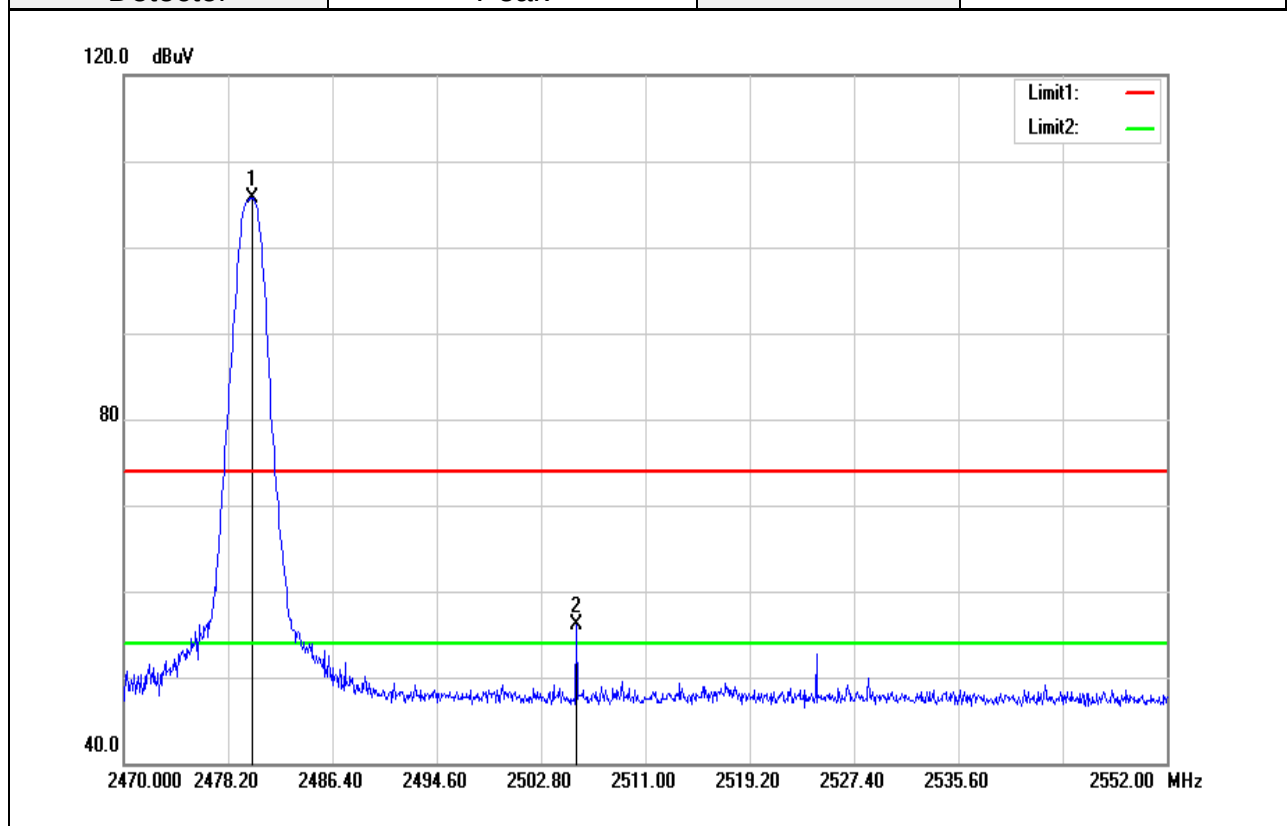


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.086	108.44	-2.70	105.74	-	-	peak
2	2505.588	58.79	-2.63	56.16	74.00	-17.84	peak

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

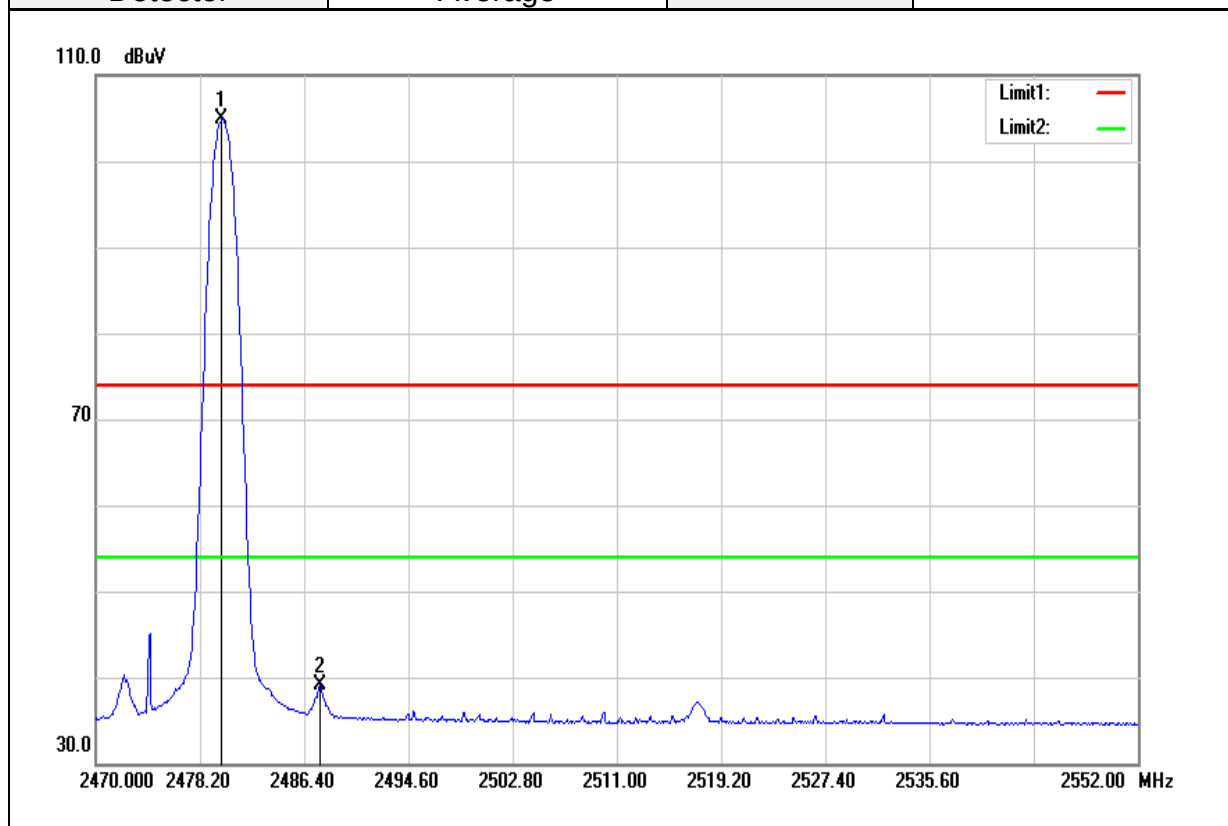


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.922	107.53	-2.70	104.83	-	-	AVG
2	2487.630	41.71	-2.67	39.04	54.00	-14.96	AVG

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

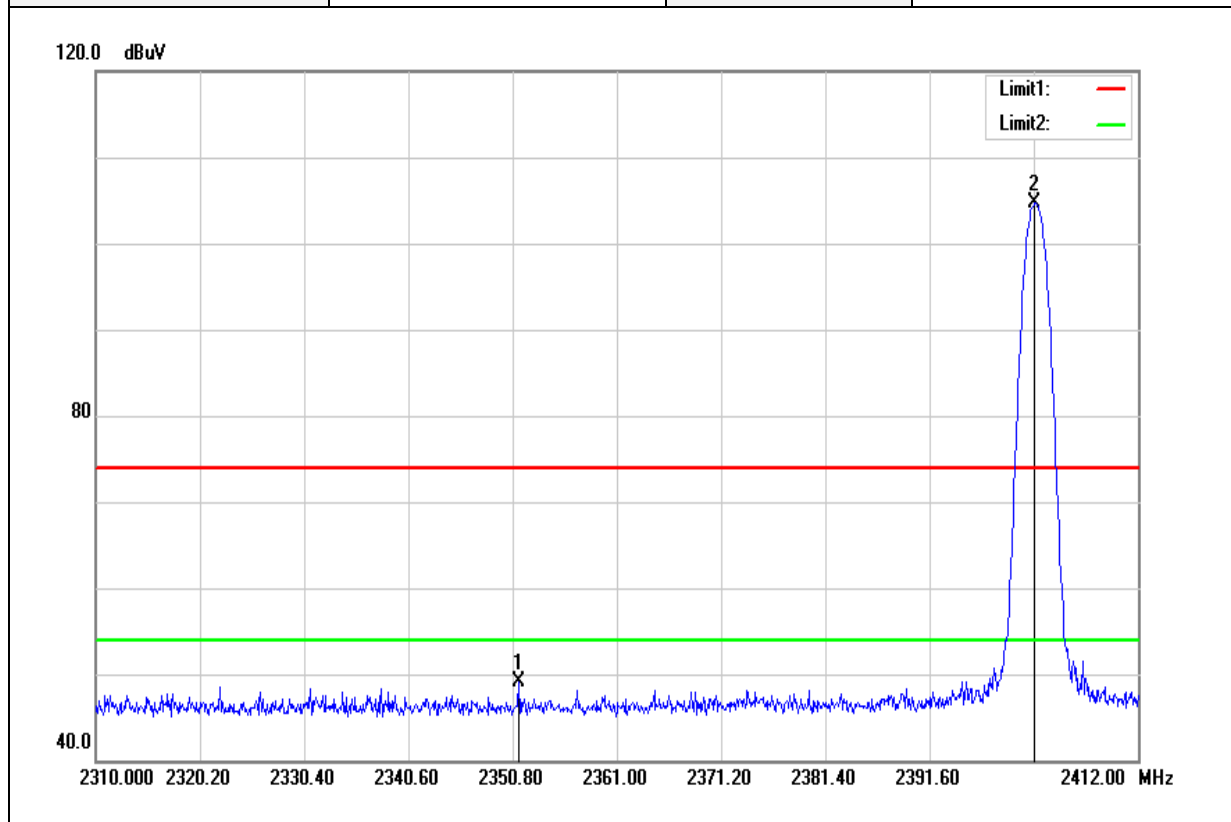


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2351.412	52.12	-3.11	49.01	74.00	-24.99	peak
2	2401.902	107.59	-2.95	104.64	-	-	peak

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

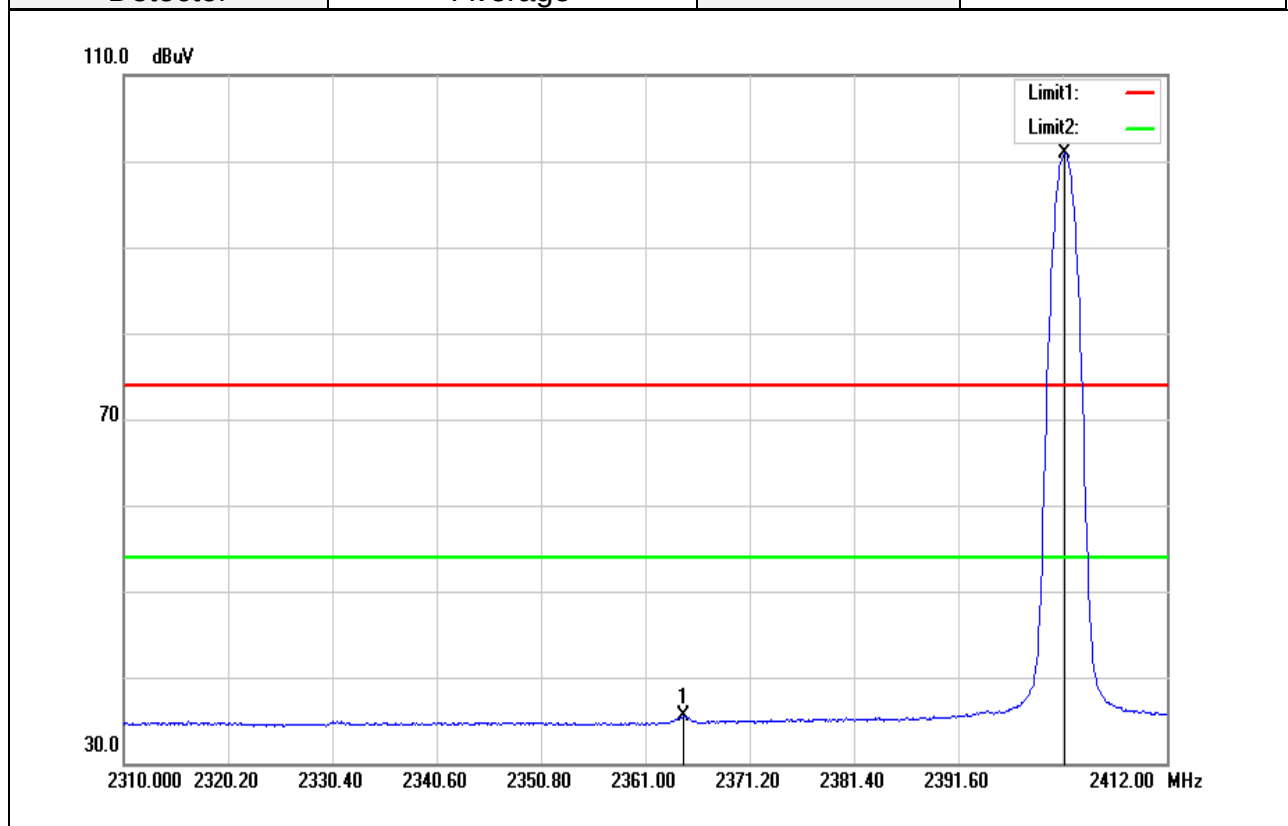

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.774	38.56	-3.07	35.49	54.00	-18.51	AVG
2	2402.004	103.81	-2.95	100.86	-	-	AVG

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

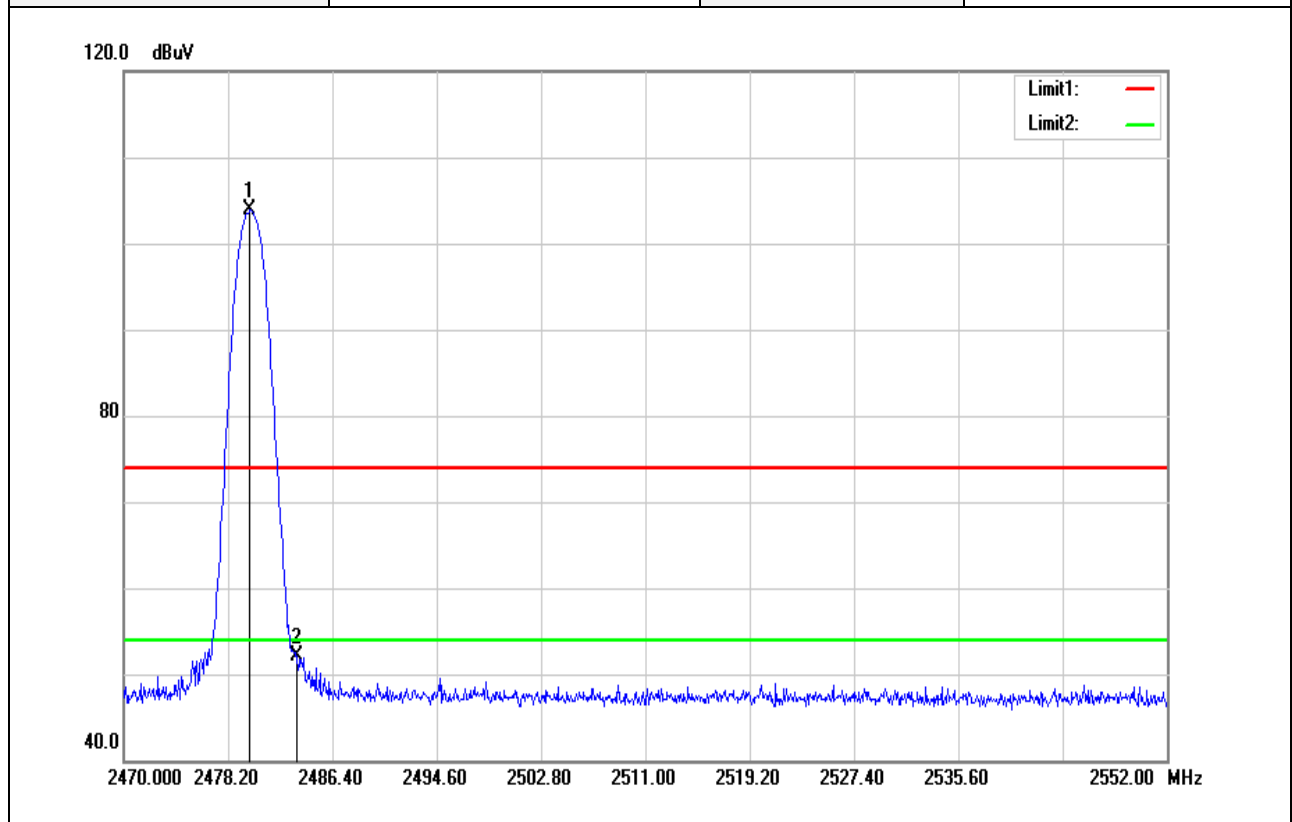


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.922	106.53	-2.70	103.83	-	-	peak
2	2483.612	54.88	-2.69	52.19	74.00	-21.81	peak



Report No.: T180522D10-RP1

Page: 50 / 64
Rev.: 00


Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

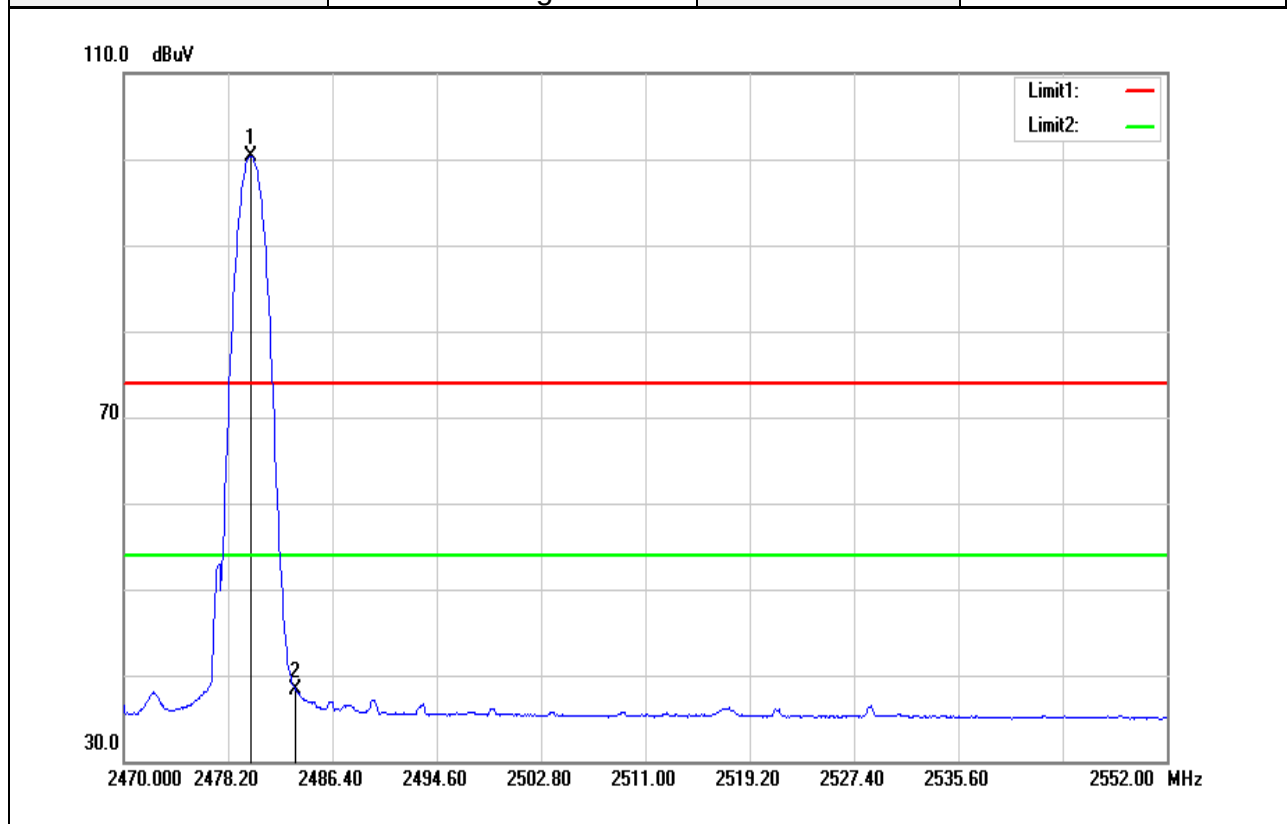

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	103.05	-2.70	100.35	-	-	AVG
2	2483.530	40.92	-2.69	38.23	54.00	-15.77	AVG

Above 1G Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

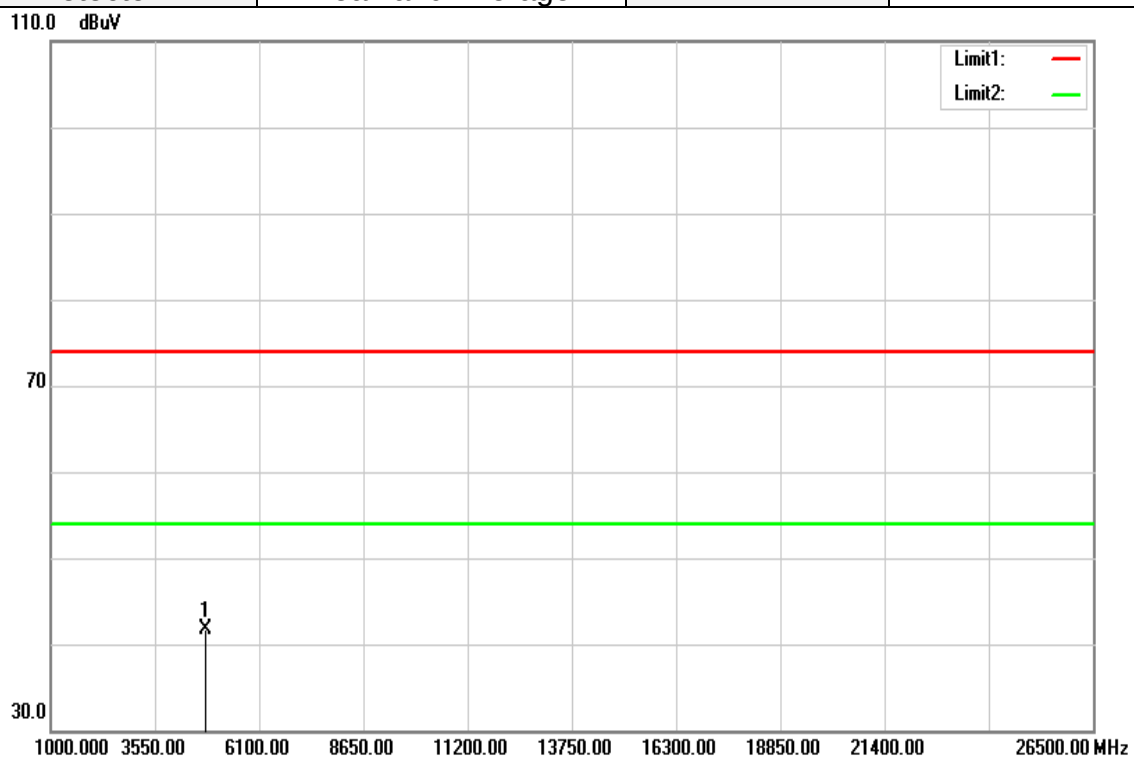


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	37.34	4.34	41.68	74.00	-32.32	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

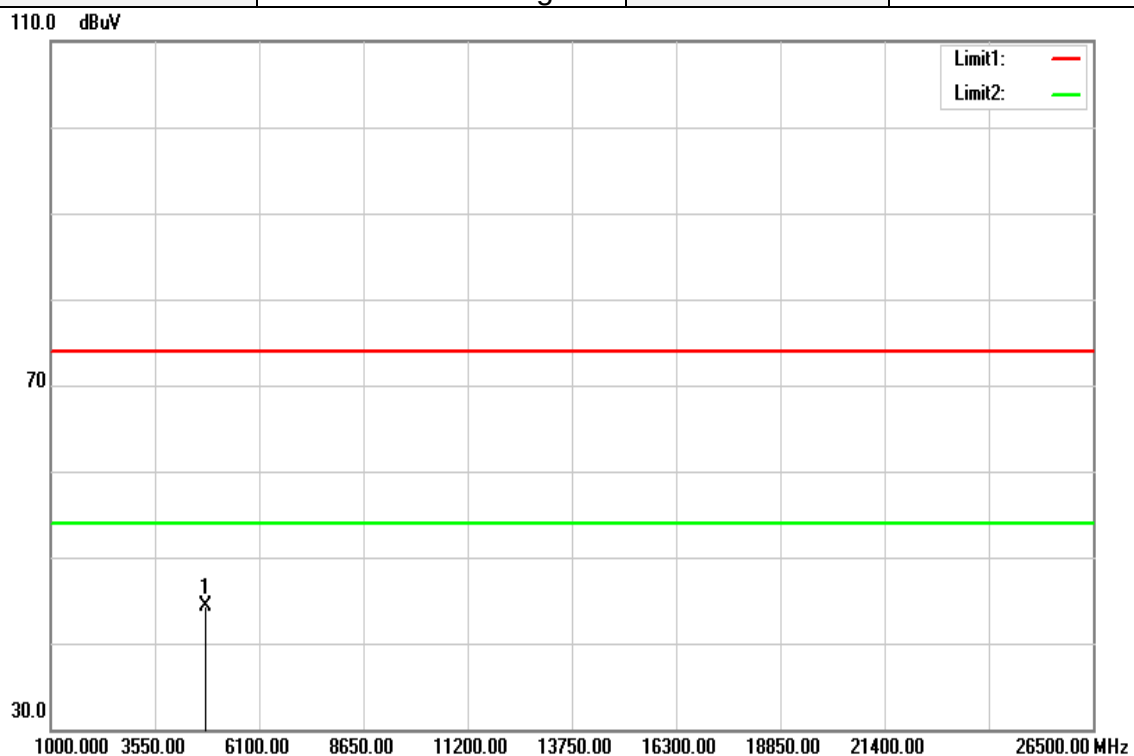


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	39.96	4.34	44.30	74.00	-29.70	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

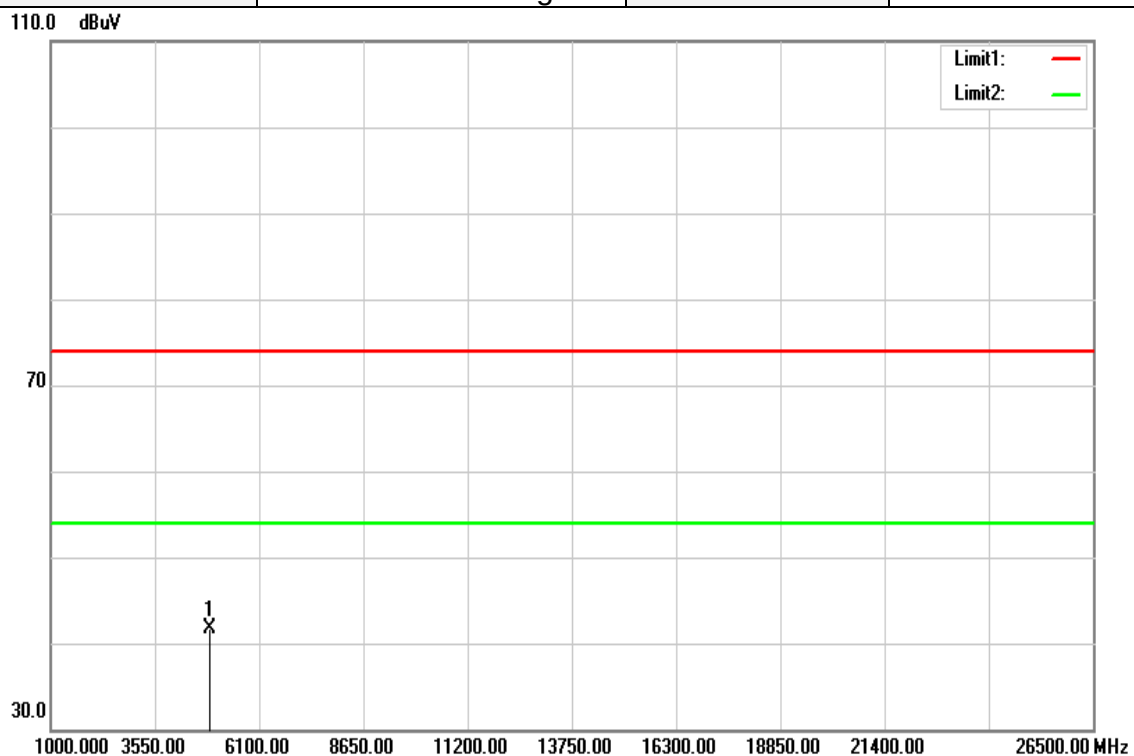


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	37.25	4.49	41.74	74.00	-32.26	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

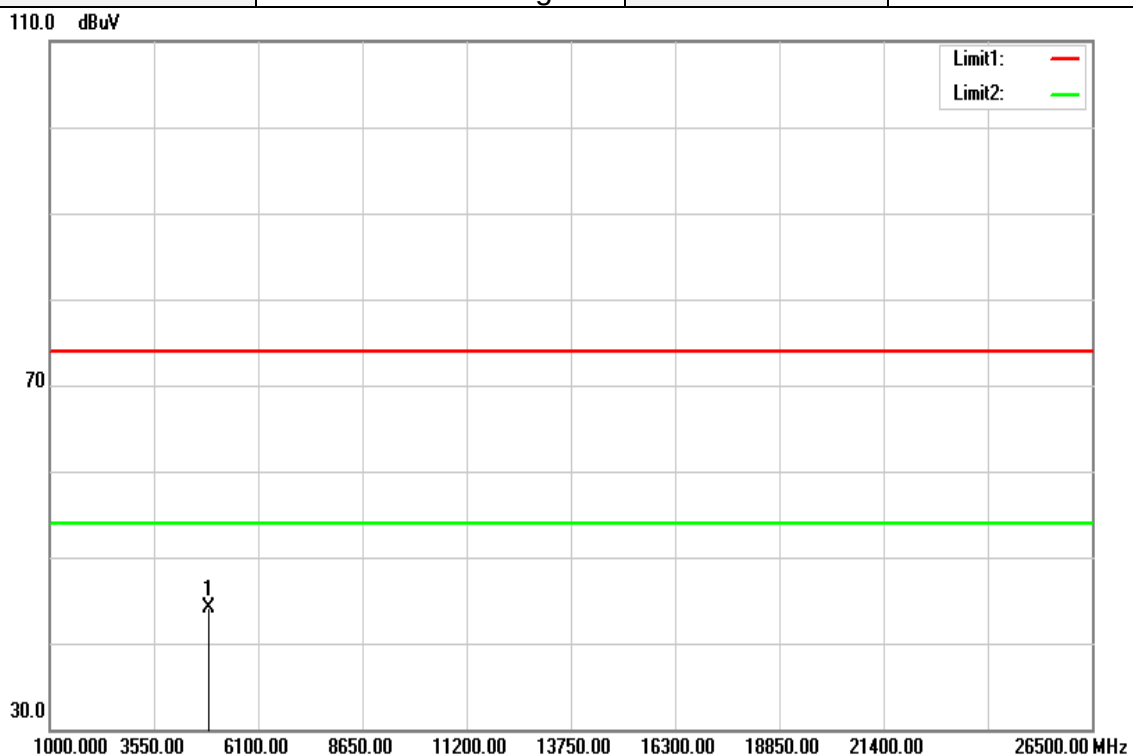


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	39.63	4.49	44.12	74.00	-29.88	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

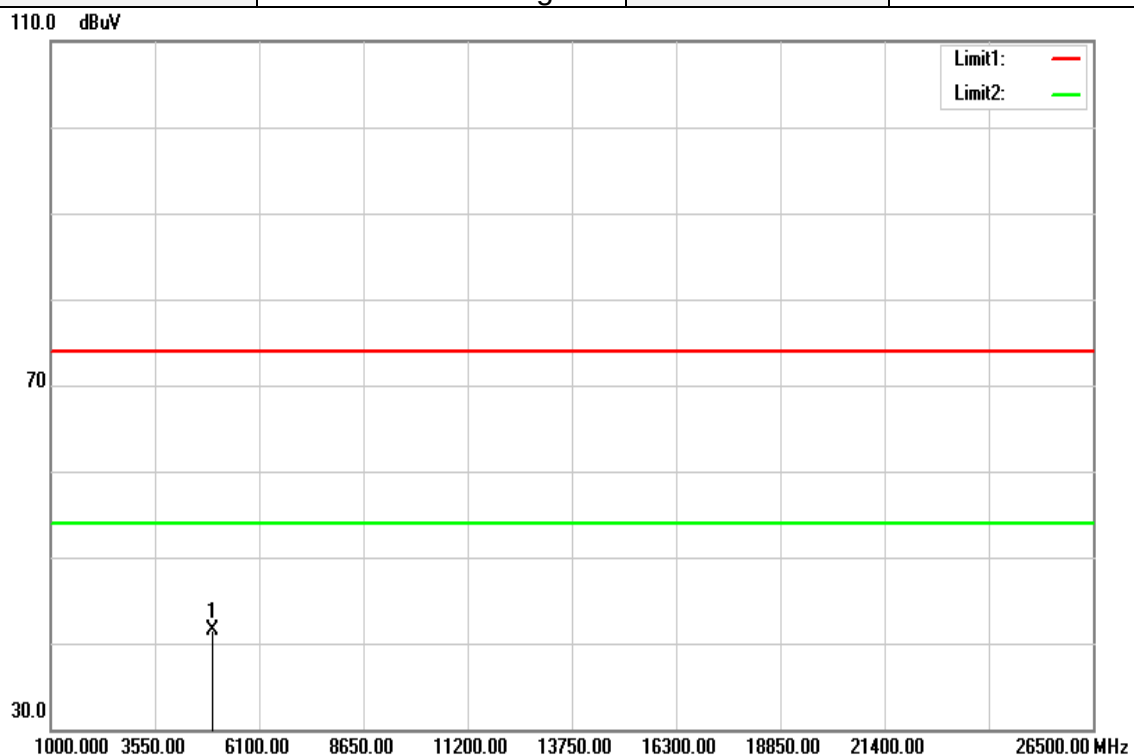


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	36.85	4.61	41.46	74.00	-32.54	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

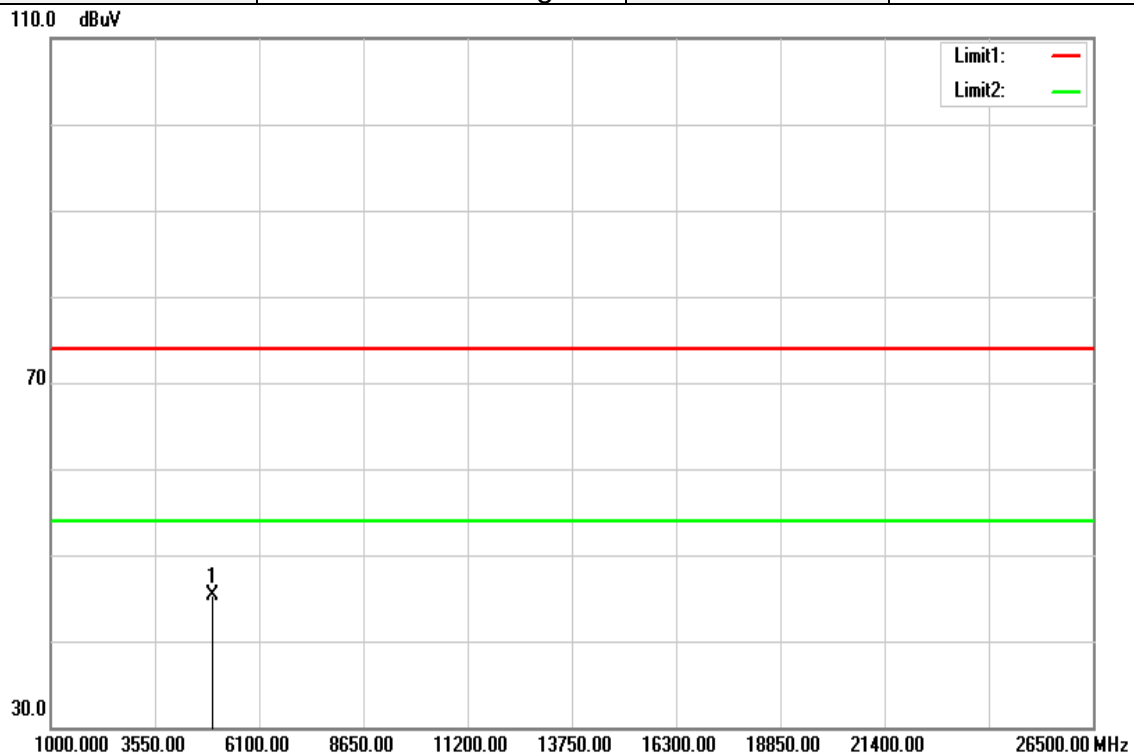


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	40.67	4.61	45.28	74.00	-28.72	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

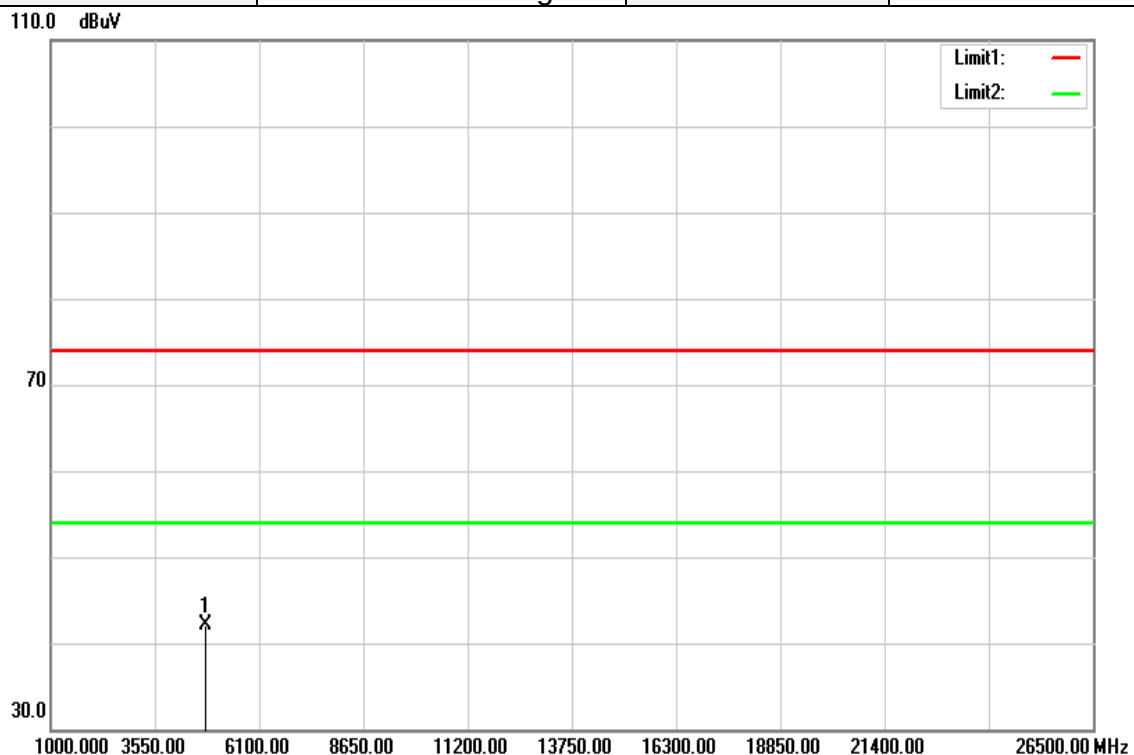


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	37.69	4.34	42.03	74.00	-31.97	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

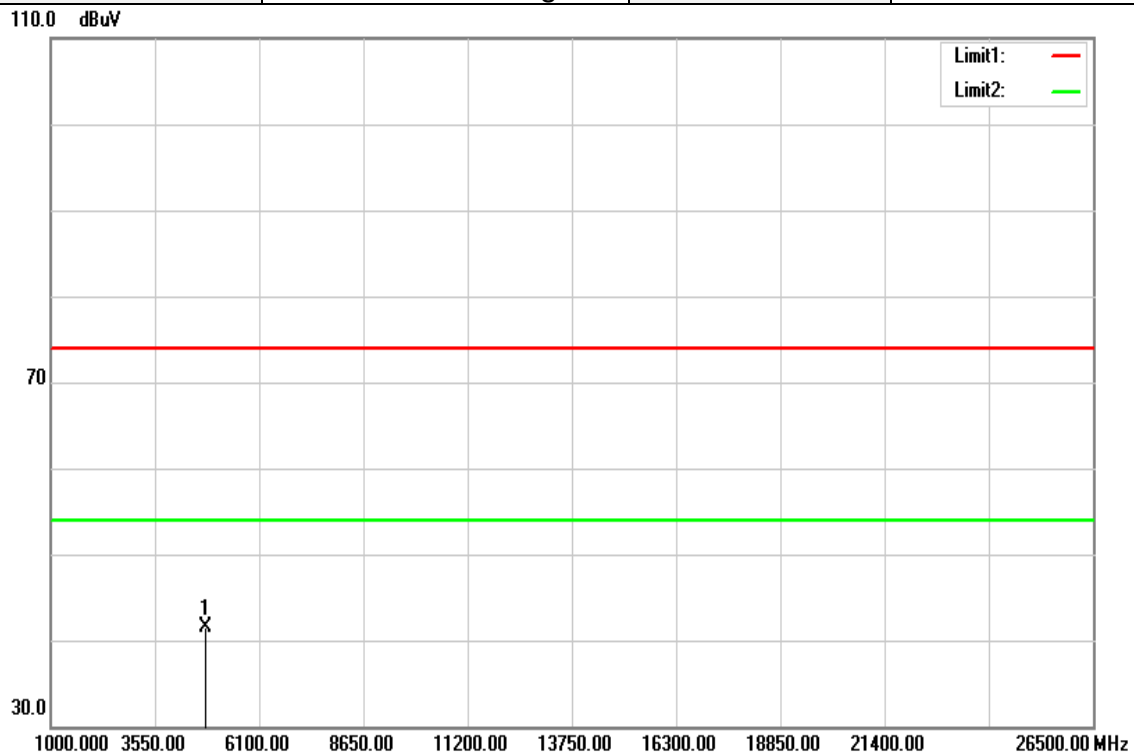


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	37.11	4.34	41.45	74.00	-32.55	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

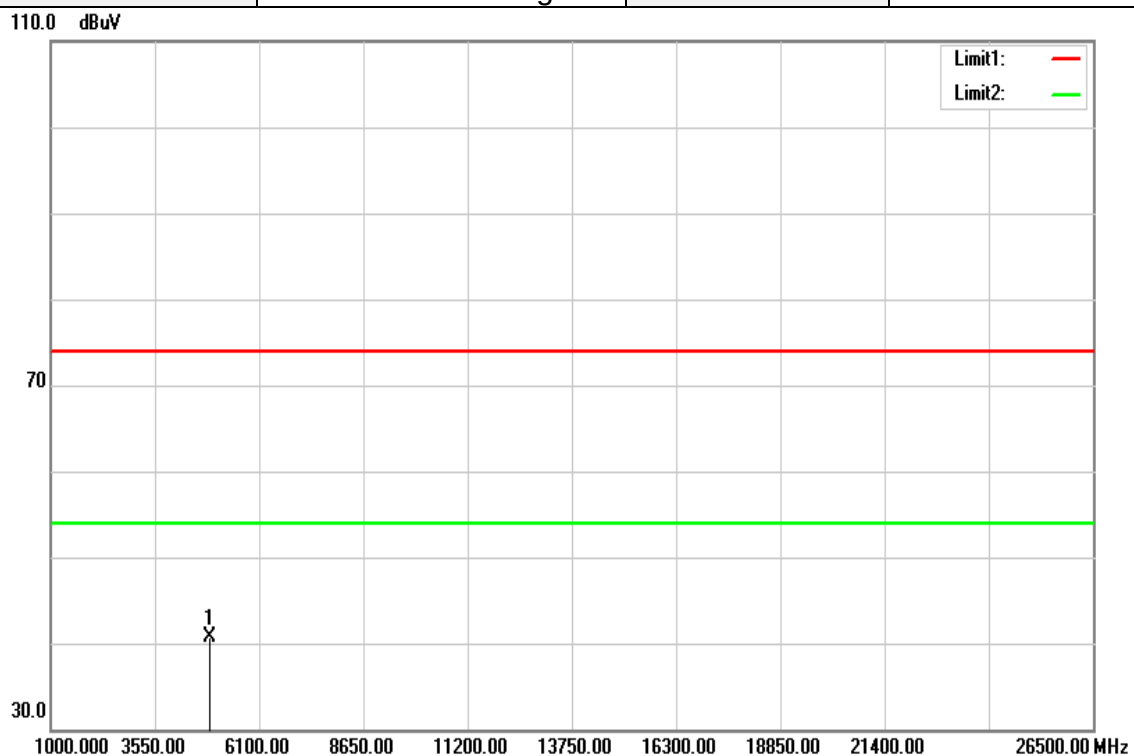


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	36.31	4.49	40.80	74.00	-33.20	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

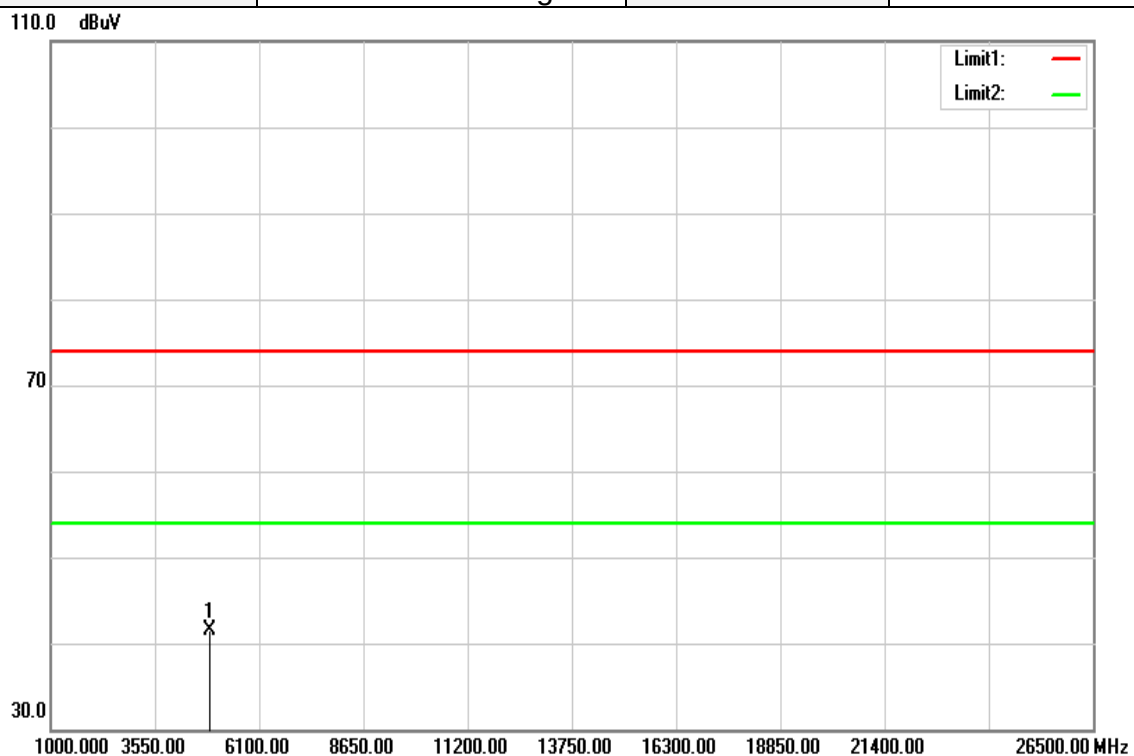


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	36.99	4.49	41.48	74.00	-32.52	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

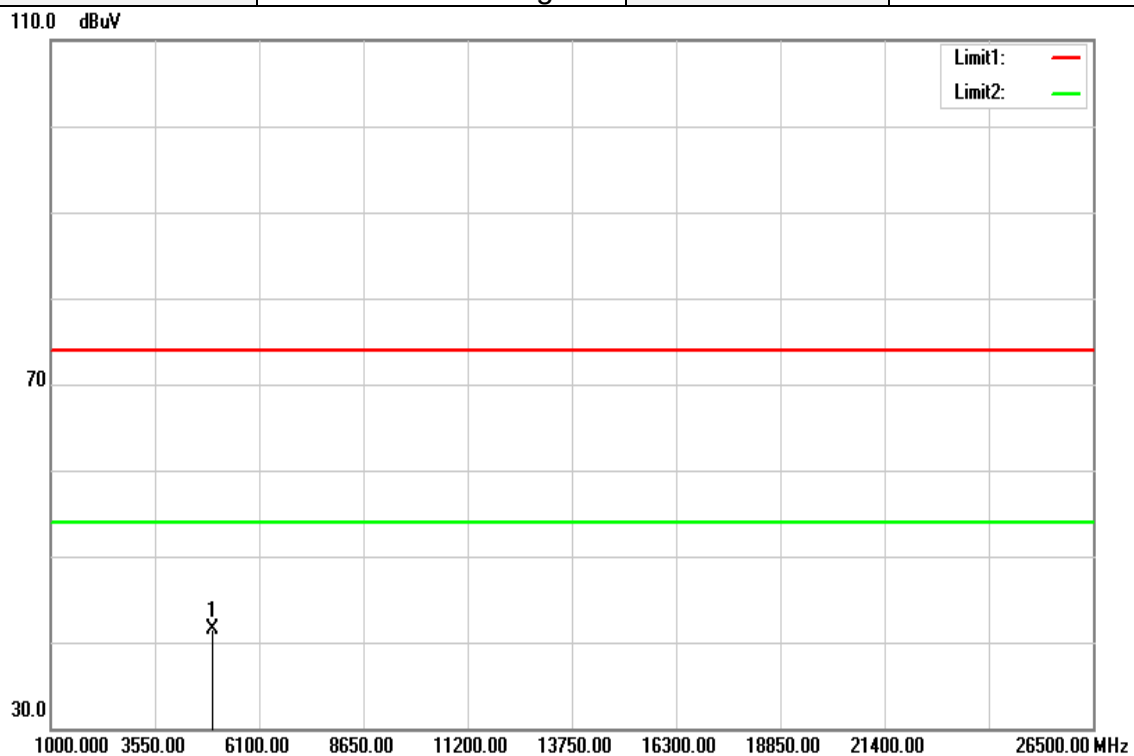


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	36.94	4.61	41.55	74.00	-32.45	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	June 28, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

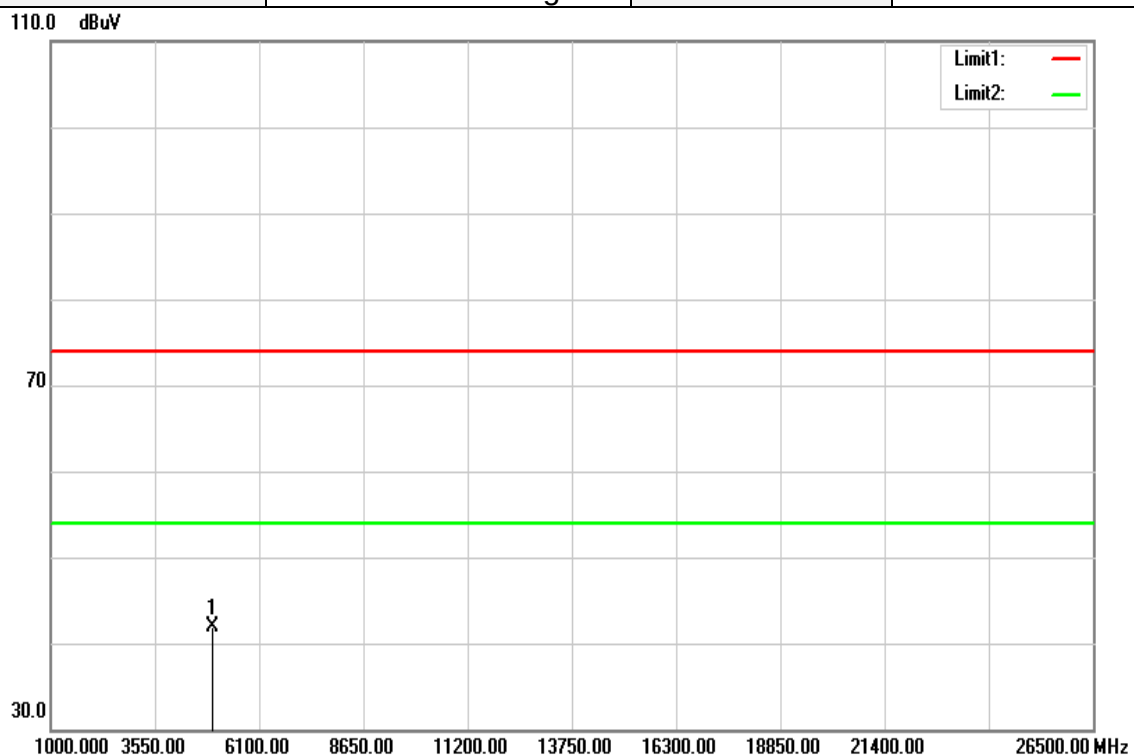


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	37.30	4.61	41.91	74.00	-32.09	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Below 1G Test Data

Test Mode:	Mode 1	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	June 27, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak		

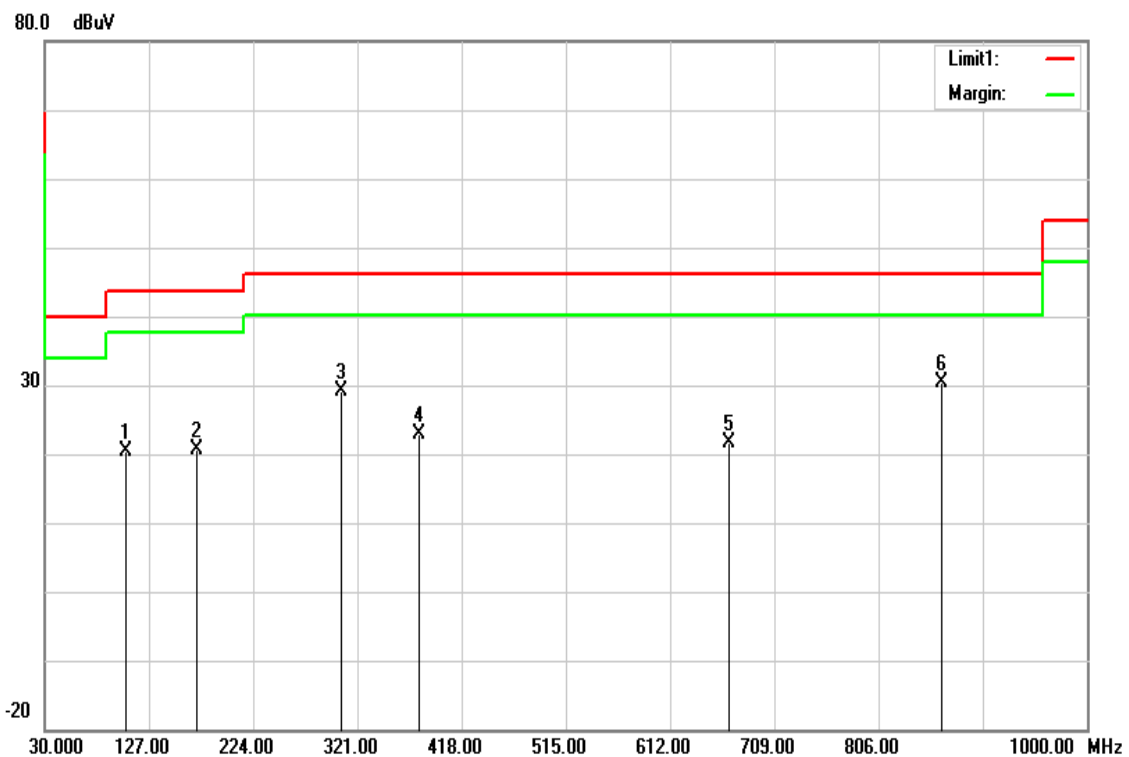


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
105.6600	38.06	-17.56	20.50	43.52	-23.02	peak
171.6200	37.21	-16.66	20.55	43.52	-22.97	peak
306.4500	43.04	-13.93	29.11	46.02	-16.91	peak
378.2300	35.02	-12.08	22.94	46.02	-23.08	peak
666.3200	26.93	-5.34	21.59	46.02	-24.43	peak
864.2000	33.04	-2.62	30.42	46.02	-15.60	peak

Report No.: T180522D10-RP1

Page: 64 / 64
Rev.: 00

Test Mode:	Mode 1	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	June 27, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak		

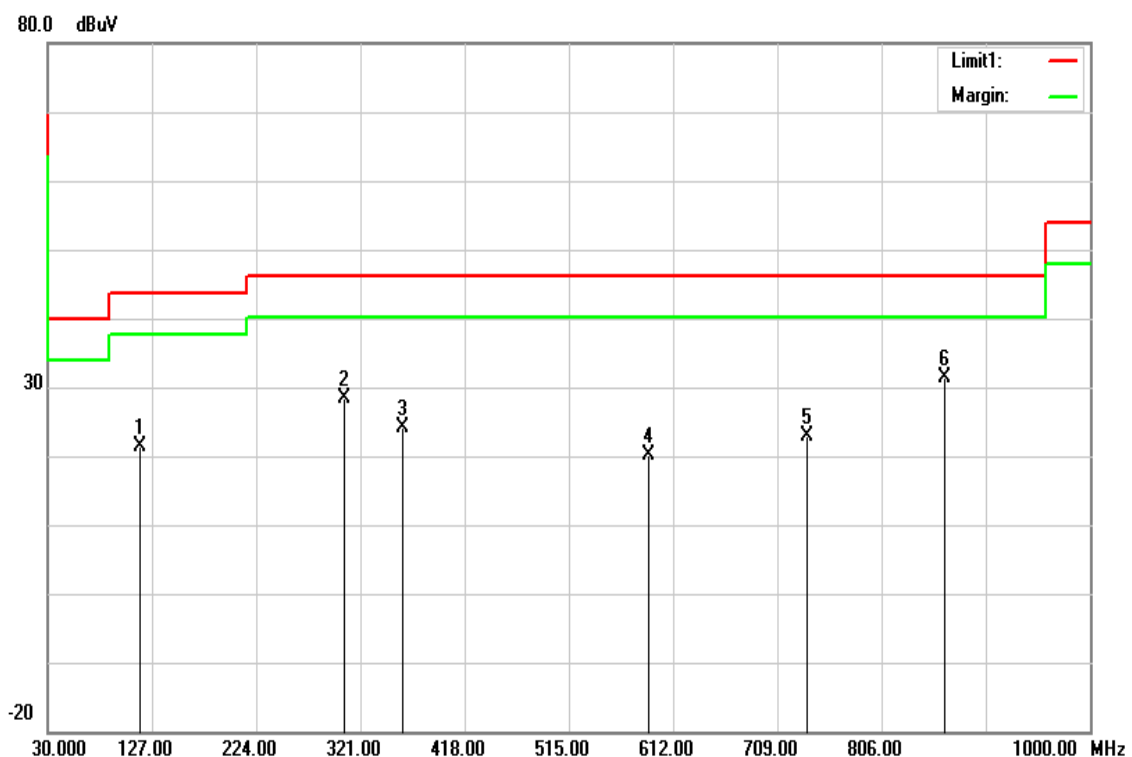

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
115.3600	37.17	-15.82	21.35	43.52	-22.17	peak
305.4800	42.42	-13.94	28.48	46.02	-17.54	peak
359.8000	36.70	-12.67	24.03	46.02	-21.99	peak
588.7200	27.08	-7.07	20.01	46.02	-26.01	peak
737.1300	27.26	-4.44	22.82	46.02	-23.20	peak
864.2000	34.01	-2.62	31.39	46.02	-14.63	peak

--End of Report--