



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**10.4" Fanless Mobile Clinical Assistant**

**Trade Name: Advantech**

**Model:**

**MICA-101XXXXXXXXXXXX**

(“x” can be 0-9 or A-Z or blank or any alphanumeric character )

*Issued to*

**Advantech Co. Ltd.**  
No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,  
Taipei 114, Taiwan, R.O.C.

*Issued by*

**Compliance Certification Services Inc.**  
No. 11, Wu-Gong 6<sup>th</sup> Rd., Wugu Industrial Park,  
Taipei Hsien 248, Taiwan (R.O.C.)  
<http://www.ccsemc.com.tw>  
[service@ccsrf.com](mailto:service@ccsrf.com)



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	6
3.5 DESCRIPTION OF TEST MODES .....	7
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>8</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
4.3 MEASUREMENT UNCERTAINTY .....	9
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>10</b>
5.1 FACILITIES .....	10
5.2 EQUIPMENT.....	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>12</b>
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT .....	12
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>13</b>
7.1 20 DB BANDWIDTH.....	13
7.2 PEAK POWER.....	18
7.3 AVERAGE POWER .....	20
7.4 BAND EDGES MEASUREMENT .....	21
7.5 FREQUENCY SEPARATION .....	30
7.6 NUMBER OF HOPPING FREQUENCY.....	33
7.7 TIME OF OCCUPANCY (DWELL TIME) .....	36
7.8 SPURIOUS EMISSIONS .....	49
7.10 POWERLINE CONDUCTED EMISSIONS.....	64
<b>APPENDIX I RADIO FREQUENCY EXPOSURE.....</b>	<b>67</b>
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>68</b>



## 1. TEST RESULT CERTIFICATION

**Applicant:** Advantech Co. Ltd.  
No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,  
Taipei 114, Taiwan, R.O.C.

**Equipment Under Test:** 10.4" Fanless Mobile Clinical Assistant

**Trade Name:** Advantech

**Model:** MICA-101XXXXXXXXXXXX ("x" can be 0-9 or A-Z or blank or any alphanumeric character )

**Date of Test:** January 21 ~ March 12, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

---

Rex Lai  
Section Manager  
Compliance Certification Services Inc.

*Reviewed by:*

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	10.4" Fanless Mobile Clinical Assistant		
<b>Trade Name</b>	Advantech		
<b>Model Number</b>	MICA-101XXXXXXXXXXXX ("x" can be 0-9 or A-Z or blank or any alphanumeric character )		
<b>Model Discrepancy</b>	All the specification and layout are identical except they come with different model numbers for marketing purposes.		
<b>Power Supply</b>	1. VDC from Power Adapter 2. VDC from Battery Rating: 11.1V, 3760mAh		
<b>Power Adapter Manufacturer</b>	SINPRO	<b>Model</b>	MPU63-106
<b>Power Adapter Power Rating</b>	<b>For MPU63-106</b> I/P: 100-240V, 47-63Hz, 1.62-0.72A O/P: 15V, 4.2A		
<b>Frequency Range</b>	2402 ~ 2480 MHz		
<b>Transmit Power</b>	1.19 dBm		
<b>Modulation Technique</b>	GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps; 8DPSK for 3Mbps		
<b>Transmit Data Rate</b>	1, 2, 3Mbps		
<b>Number of Channels</b>	79 Channels		
<b>Antenna Specification</b>	Gain: -3.3 dBi		
<b>Antenna Designation</b>	PCB Antenna		

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **M82-MICA-101** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: MICA-101) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

The EUT comes with one battery and one power adapter for sale. After the preliminary test, the EUT with power adapter was found to emit the worst emissions and therefore had been tested under standby condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

During the preliminary test, GFSK,  $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis) and docking mode. The worst emission was found in docking mode and the worst case was recorded.

Following channels were selected for the radiated emission and conducted emissions testing only as listed below:

Tested Channel	Modulation Type	Packet Type	Date Rate	Axis
Low, Mid, High	GFSK	DH 5	1	docking mode
Low, Mid, High	8DPSK	DH 5	3	docking mode



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	02/23/2010
Power Meter	Agilent	E4416A	GB41291611	04/05/2010
Power Sensor	Agilent	E9327A	US40441097	06/19/2009

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/07/2009
Test Receiver	Rohde&Schwarz	ESCI	100064	11/29/2009
Switch Controller	TRC	Switch Controller	SC94050010	05/02/2010
4 Port Switch	TRC	4 Port Switch	SC94050020	05/02/2010
Loop Antenna	EMCO	6502	8905/2356	05/28/2010
Horn-Antenna	TRC	HA-0502	06	06/03/2010
Horn-Antenna	TRC	HA-0801	04	10/20/2009
Horn-Antenna	TRC	HA-1201A	01	10/15/2009
Horn-Antenna	TRC	HA-1301A	01	10/15/2009
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/27/2010
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: IC 2324G-1/-2	10/17/2010 11/04/2010
Test S/W			LABVIEW (V 6.1)	

Powerline Conducted Emissions Test Site # 4				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100782	05/31/2010
LISN	R&S	ENV216	100066	05/10/2010
LISN	R&S	ENV 4200	830326/016	04/09/2010
Test S/W		LabVIEW 6.1 (CCS Conduction Test SW Version_01)		



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/-1.7983
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.7046
3M Semi Anechoic Chamber / 1GHz Above	+/-3.0958

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

*Remark: The powerline conducted emission test items was tested at Compliance Certification Services Inc. (Linkou Lab.) The test equipments were listed in page 8 and the test data, please refer page 71-72.*

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4: 2003 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5.3 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

*\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	USB Mouse	Logitech	M-UE58	LZA10752880	FCC DoC	Shielded, 1.8m	N/A
2	LCD Monitor	DELL	2407WFPb	CN-0FC255-46633-6 75-25THS	FCC DoC	D-sub Cable: Shielded, 1.8m with two cores	Unshielded, 1.8m
3.	USB Mouse	HP	MO19UCA	020509284	FCC DoC	USB Cable: Unshielded, 1.8m	N/A
4.	Notebook PC (Remote)	HP	COMPAQ NC 4010	CNU5191L58	FCC DOC	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
5.	AP (Remote)	LEMEL	LM-RT210W	12442028770	H8N-RT210W	N/A	Unshielded, 1.8m

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 20 DB BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10kHz, VBW = 30 kHz, Span = 1.5MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted.*

#### Test Data

##### For GFSK / DH5

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.940
Mid	2441	0.946
High	2480	0.945

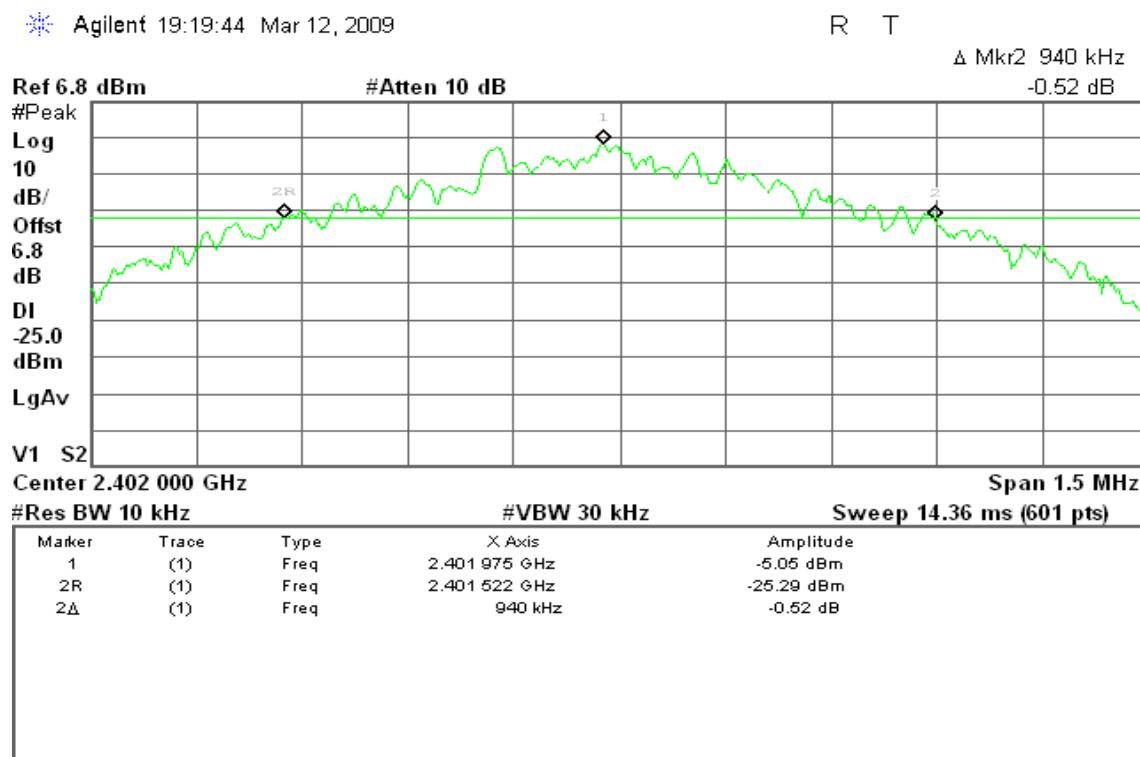
##### For 8DPSK / DH5

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.286
Mid	2441	1.250
High	2480	1.286

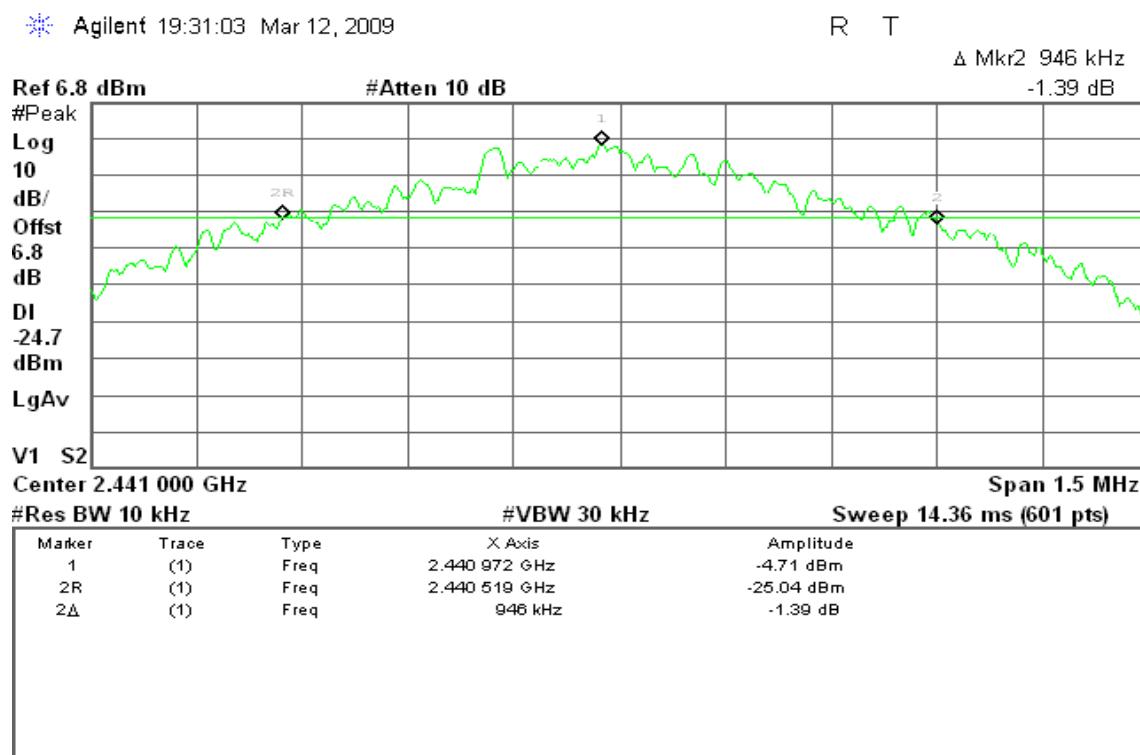
## Test Plot

### For GFSK / DH5

#### 20dB Bandwidth (CH Low)



#### 20dB Bandwidth (CH Mid)



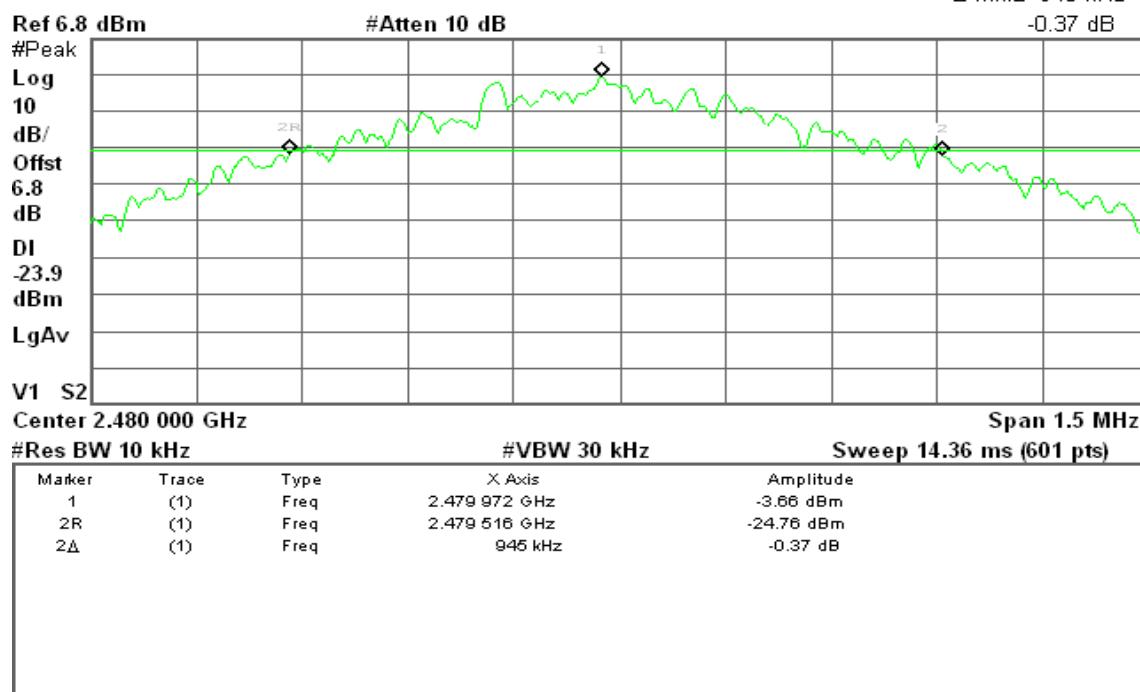
**20dB Bandwidth (CH High)**

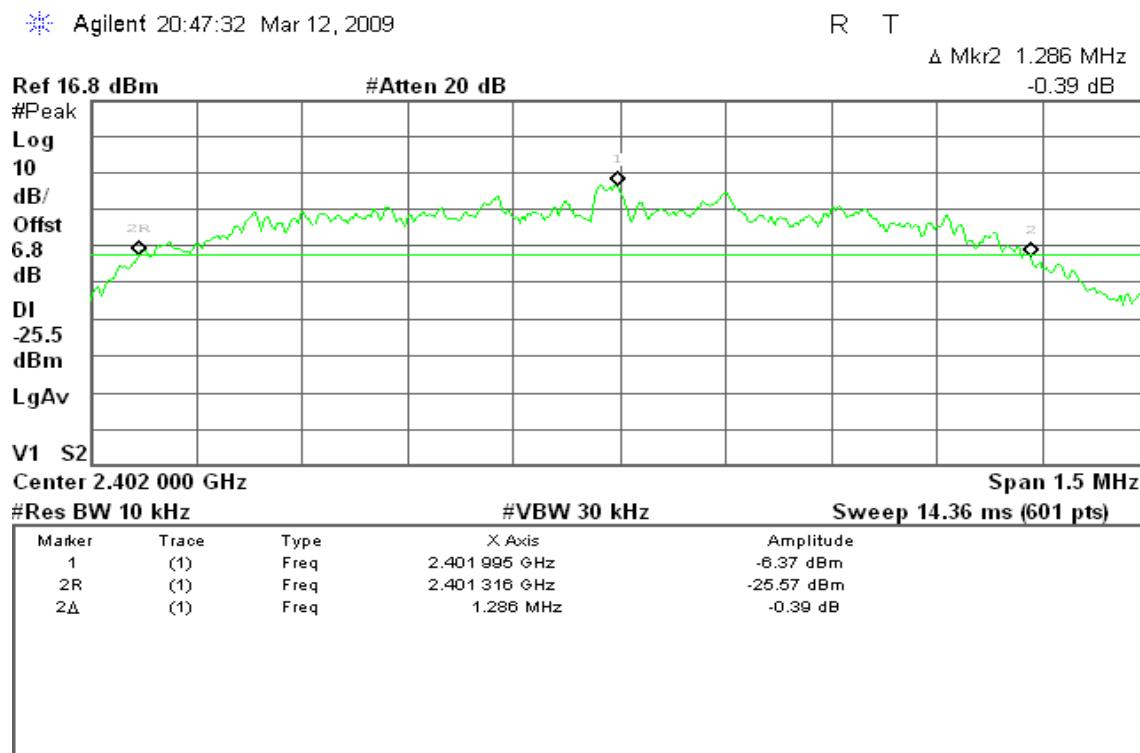
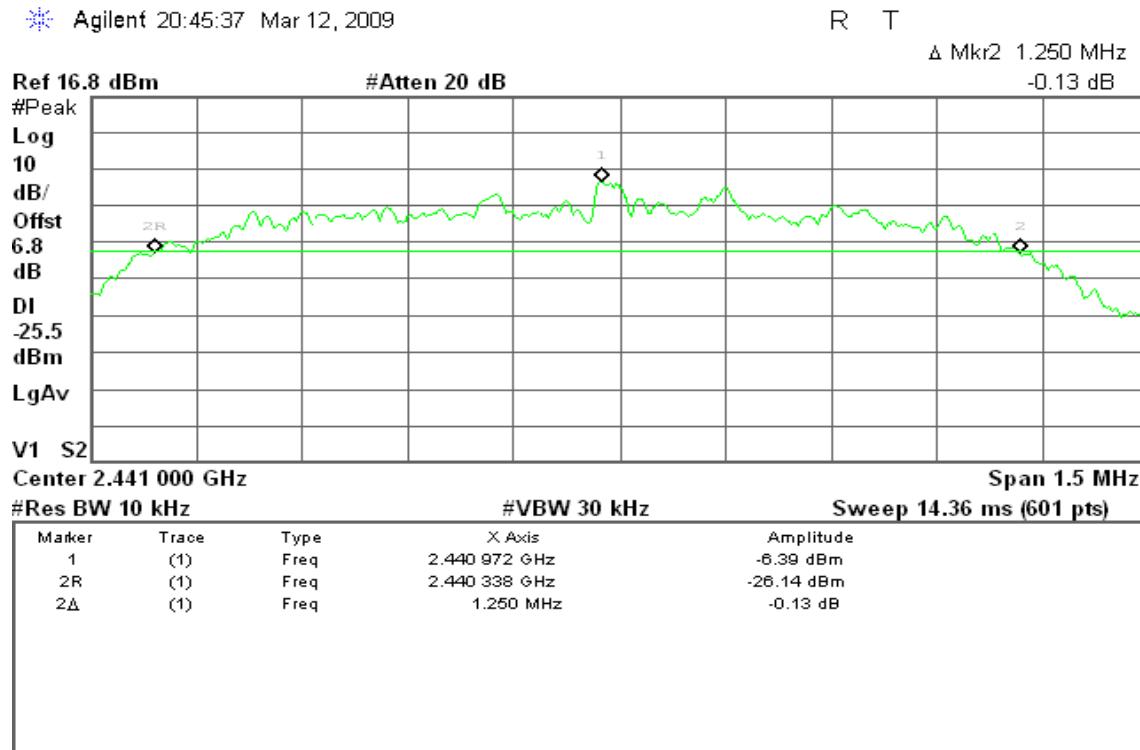
Agilent 19:29:09 Mar 12, 2009

R T

Δ Mkr2 945 kHz

-0.37 dB



**For 8DPSK / DH5**
**20dB Bandwidth (CH Low)**

**20dB Bandwidth (CH Mid)**


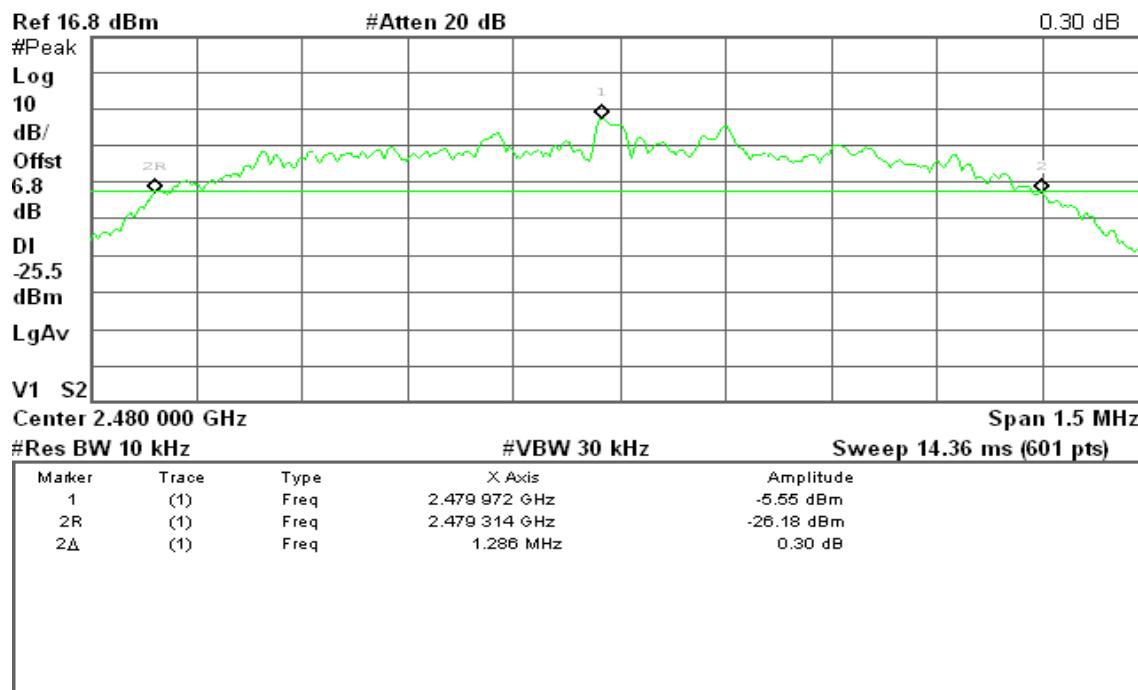
**20dB Bandwidth (CH High)**

Agilent 20:42:19 Mar 12, 2009

R T

Δ Mkr2 1.286 MHz

0.30 dB



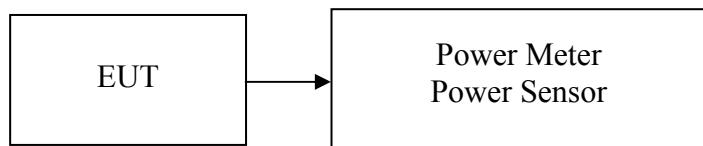
## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted.*

**Test Data****For GFSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	0.46	0.0011	0.125	PASS
Mid	2441	0.68	0.0012		PASS
High	2480	1.19	0.0013		PASS

**For 8DPSK / DH5**

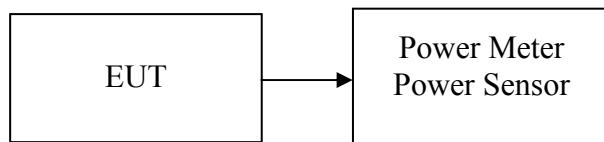
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	0.48	0.0011	0.125	PASS
Mid	2441	0.62	0.0012		PASS
High	2480	1.11	0.0013		PASS

## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted.*

### Test Data

#### For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-1.22	0.0008
Mid	2441	-1.02	0.0008
High	2480	-0.54	0.0009

#### For 8DPSK / DH5

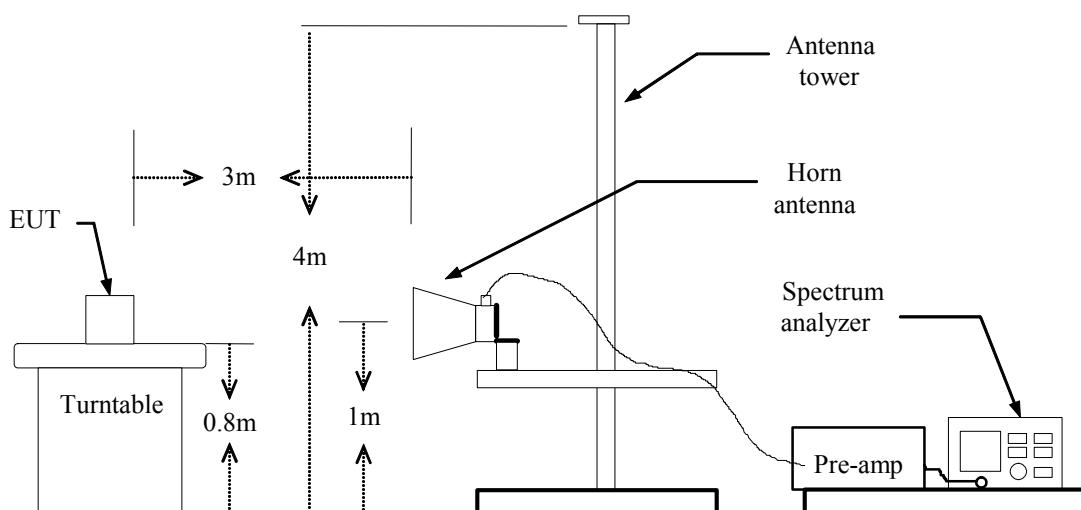
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-4.16	0.0004
Mid	2441	-4.17	0.0004
High	2480	-3.71	0.0004

## 7.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

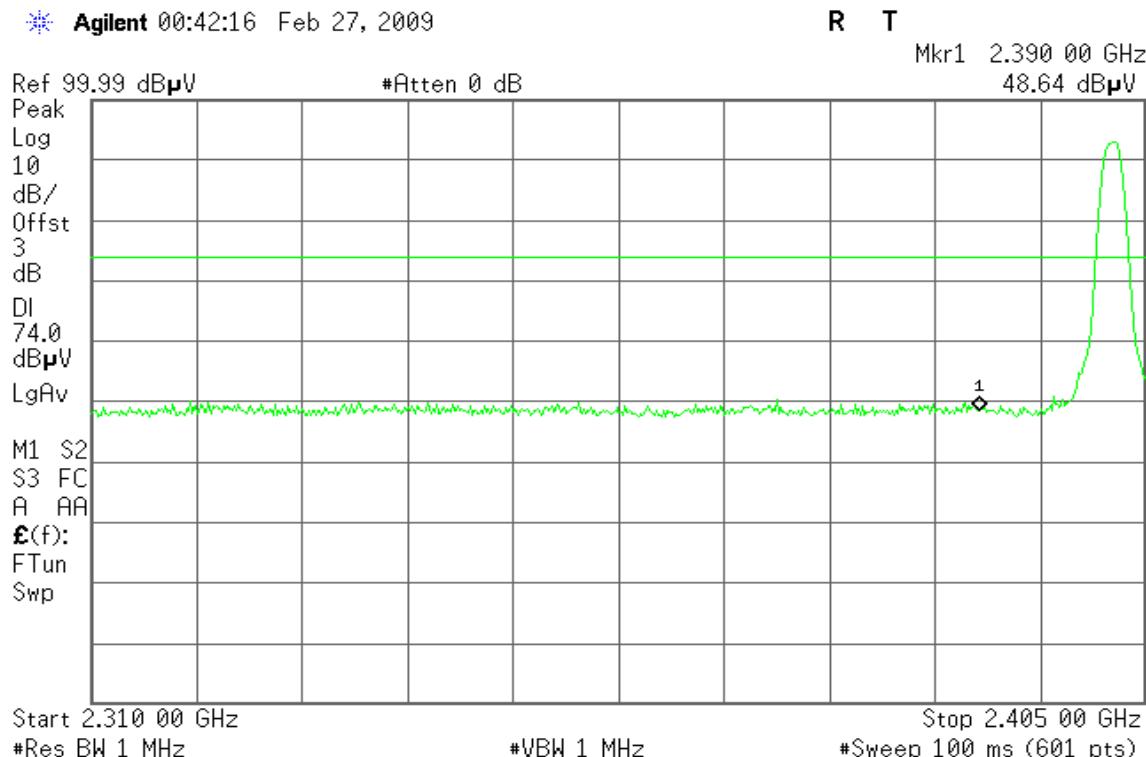
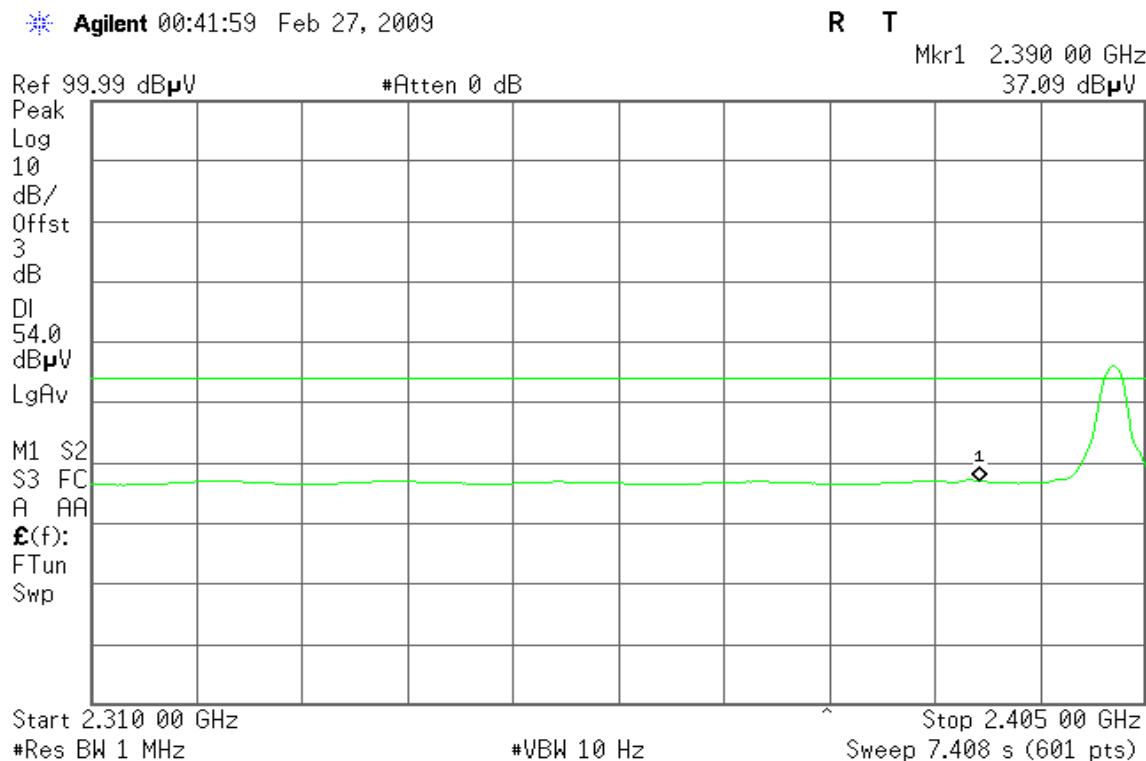


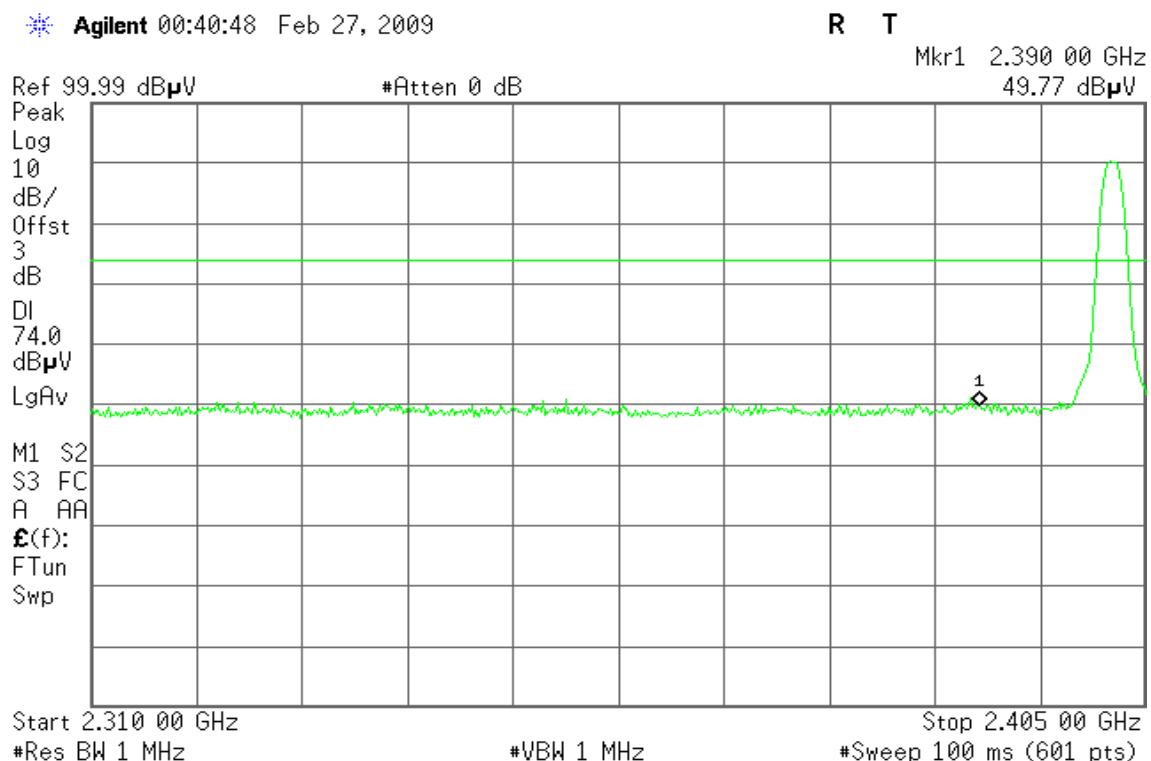
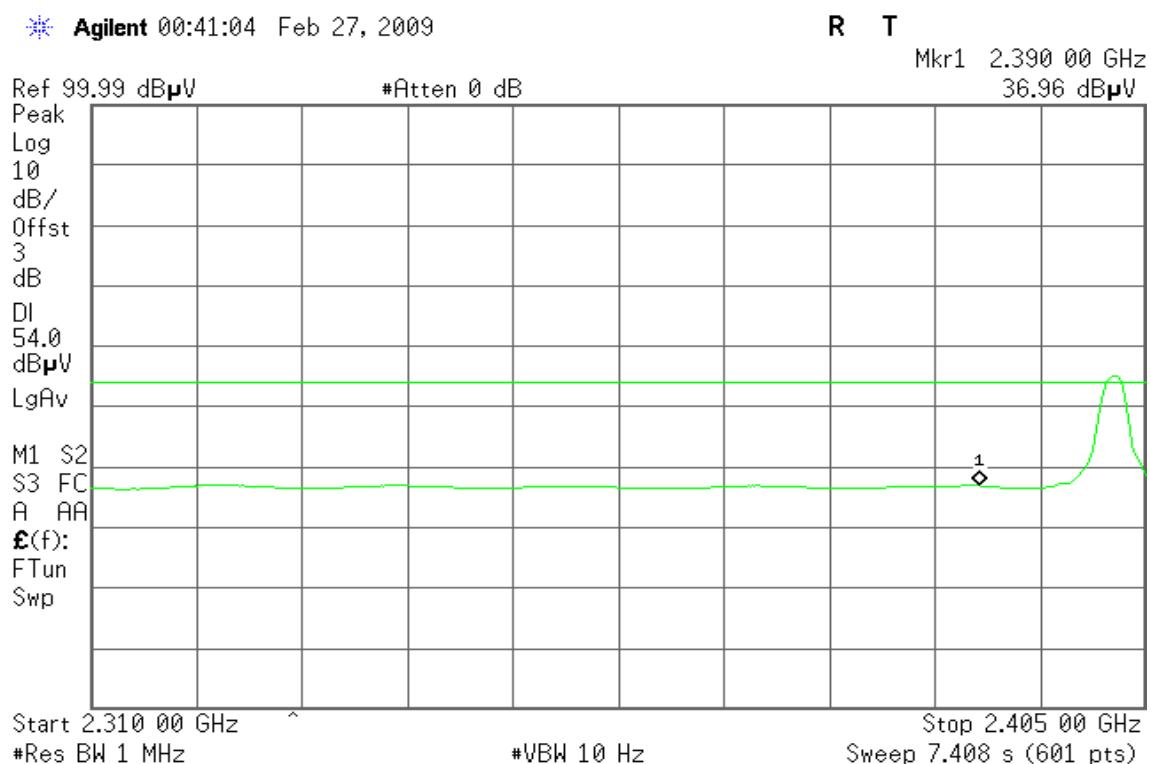
### TEST PROCEDURE

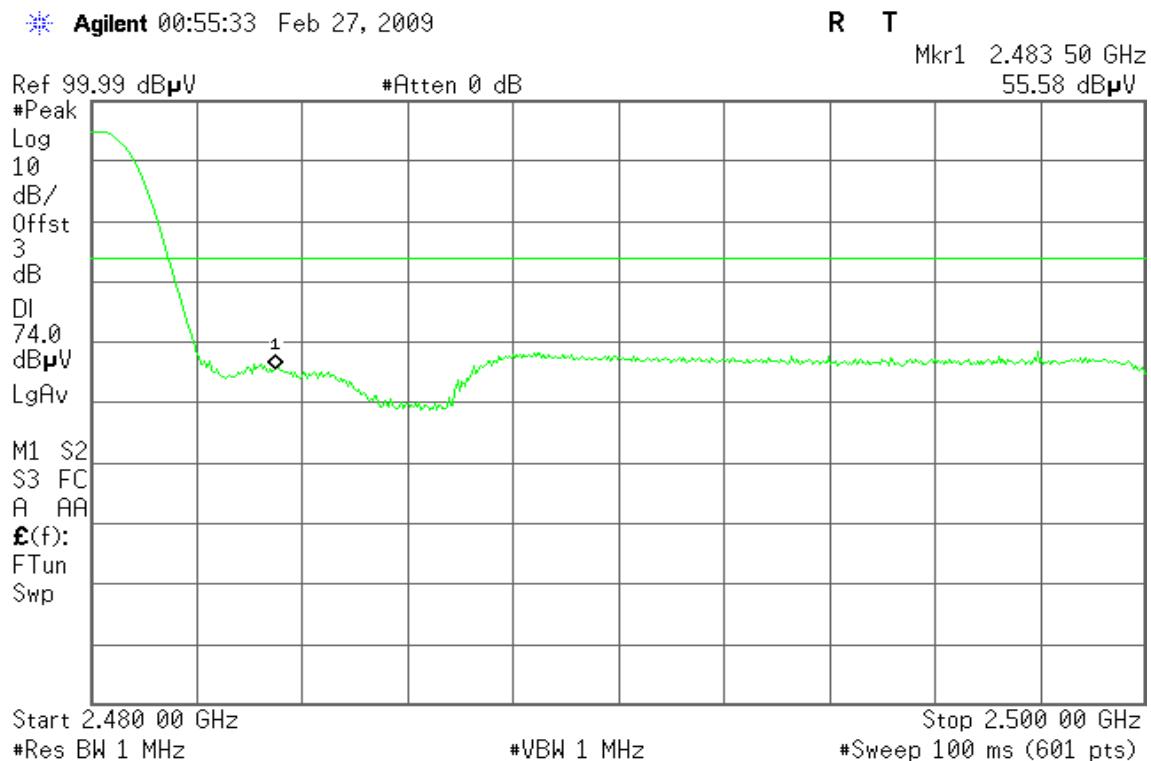
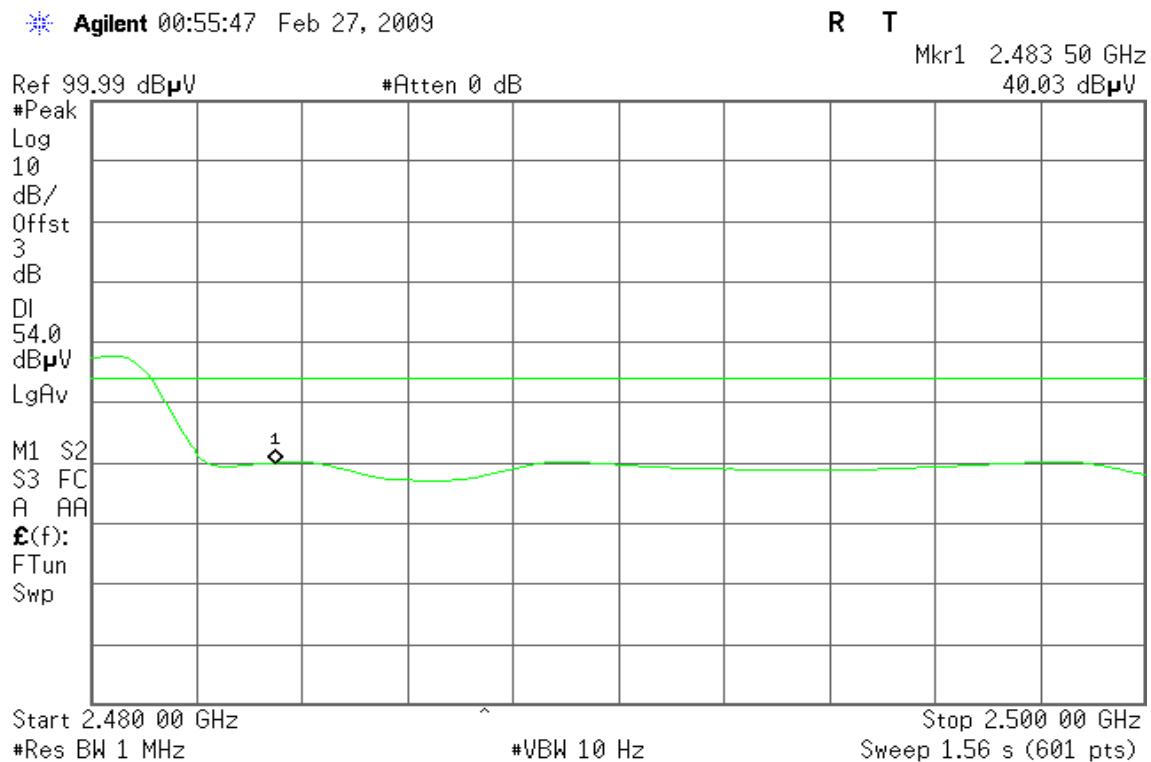
1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

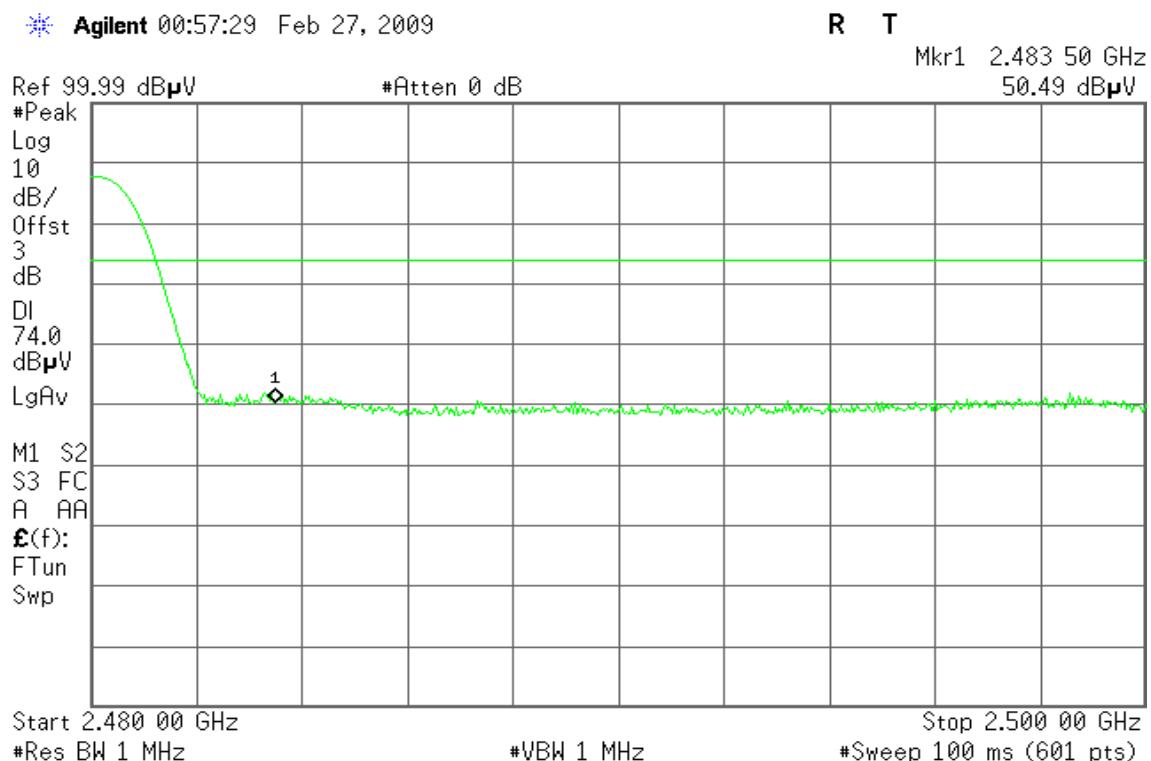
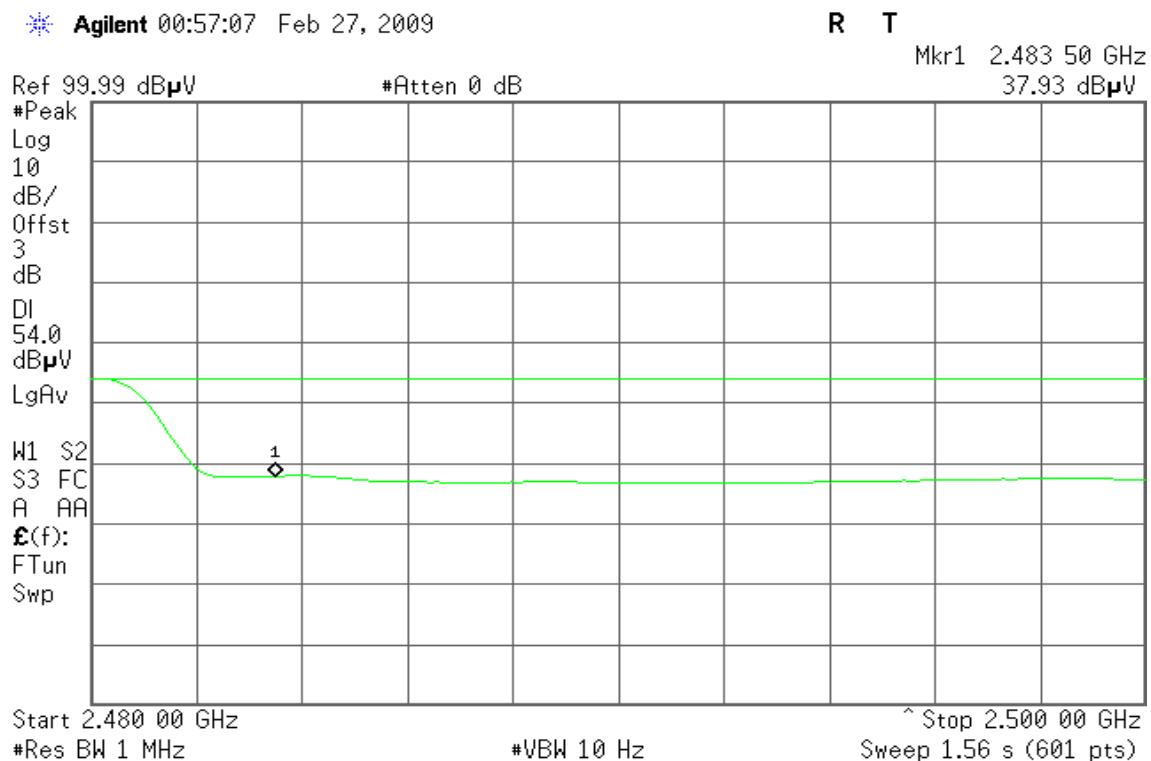
### TEST RESULTS

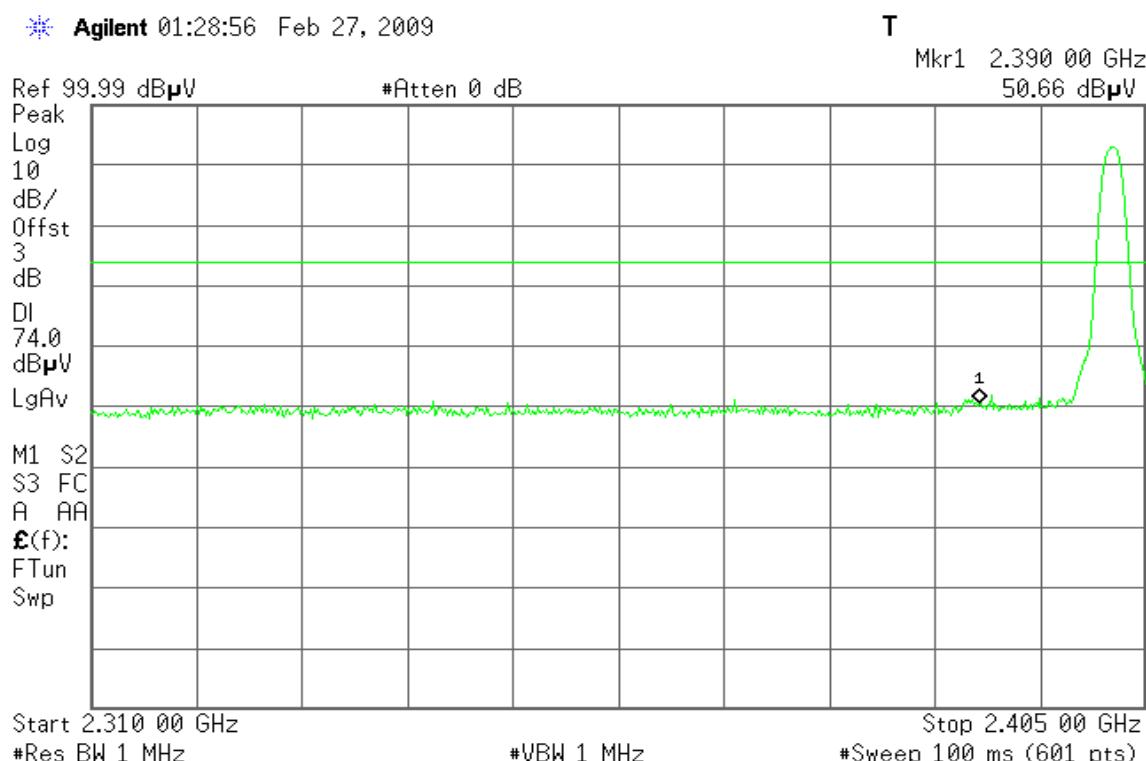
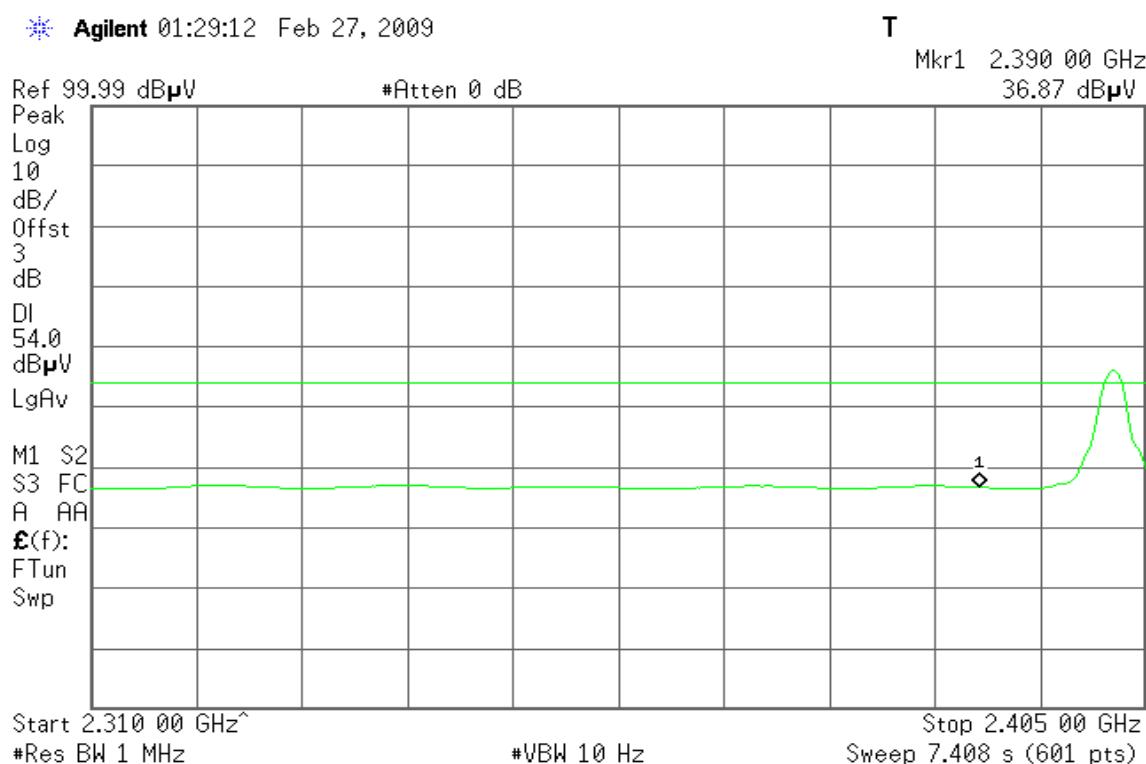
Refer to attach spectrum analyzer data chart.

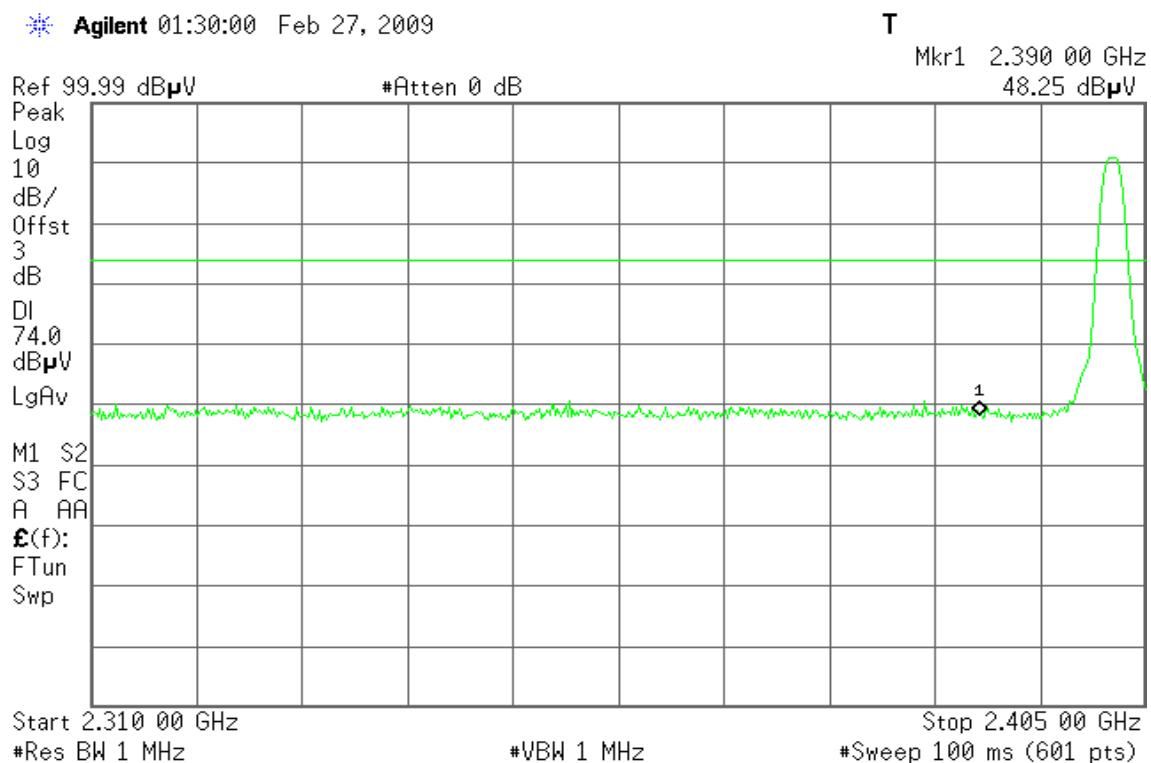
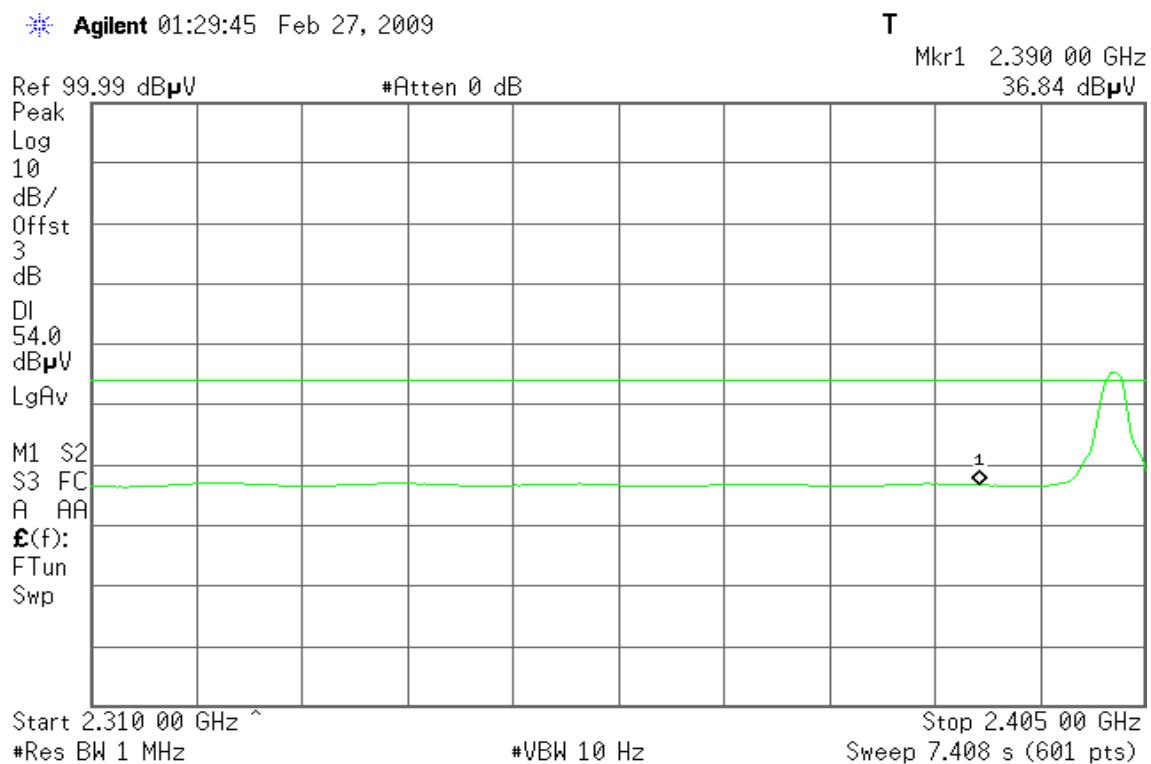
**For GFSK / DH5****Band Edges (CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

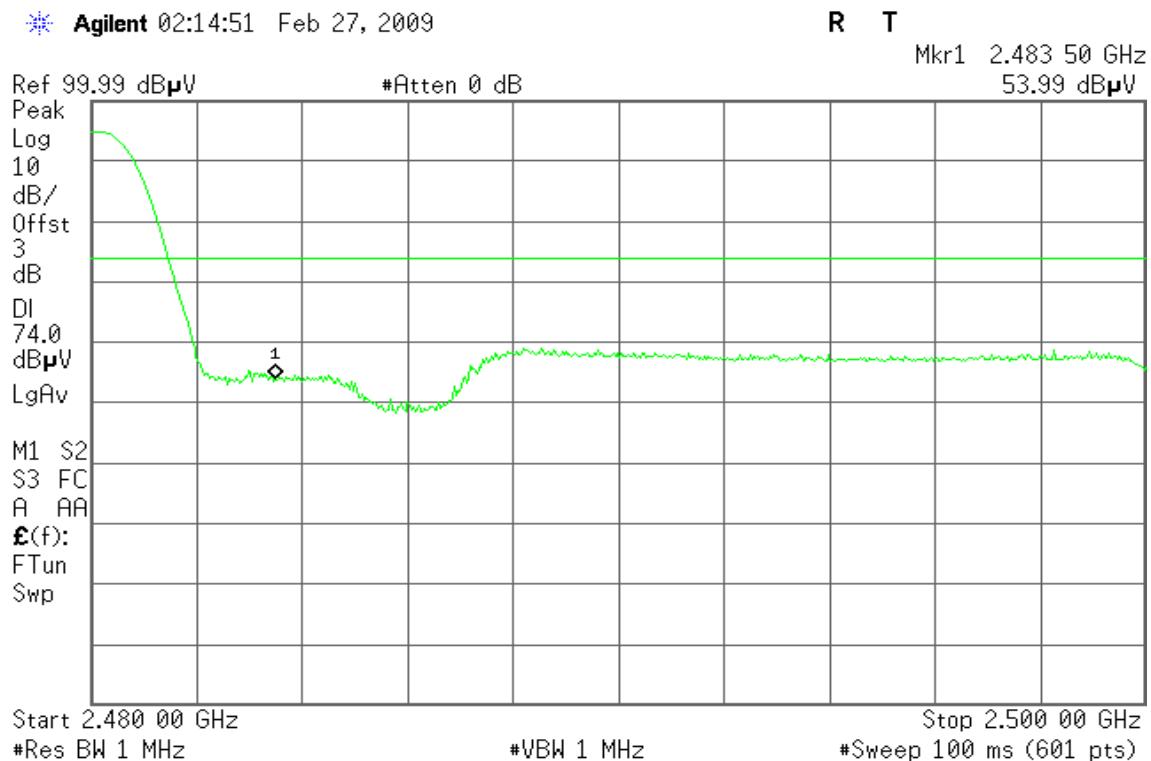
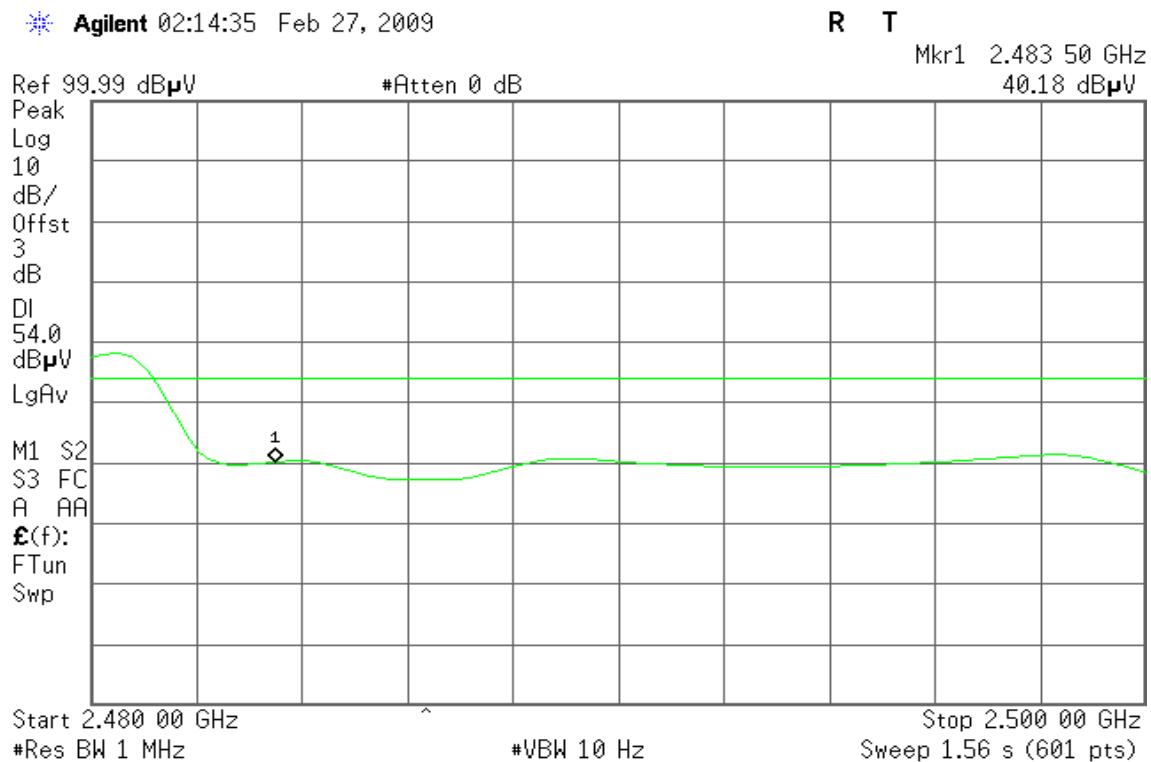
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

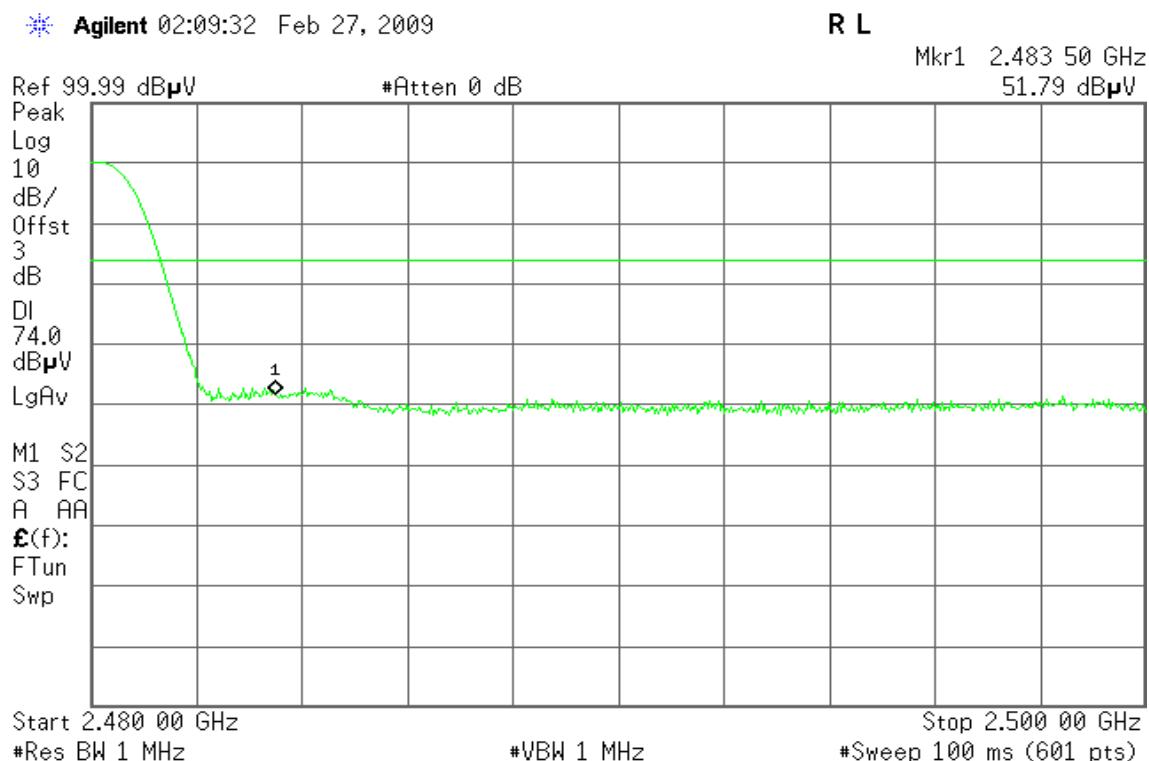
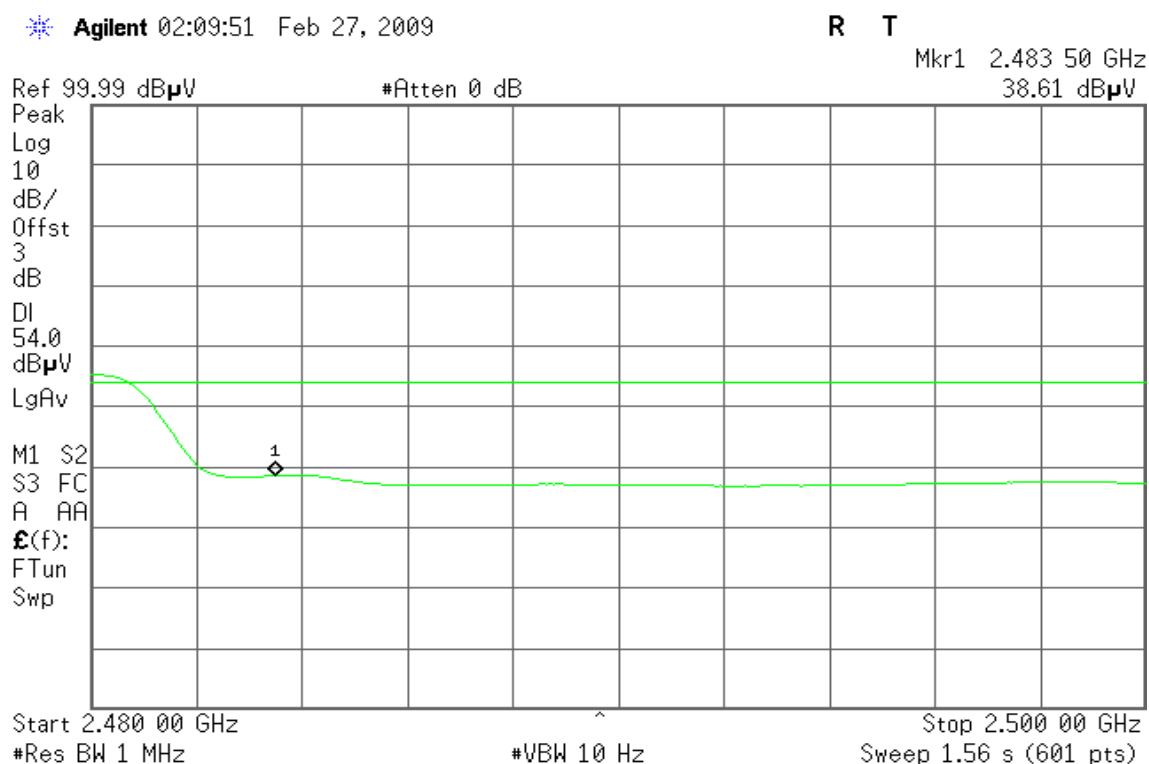
**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**For 8DPSK / DH5****Band Edges (CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

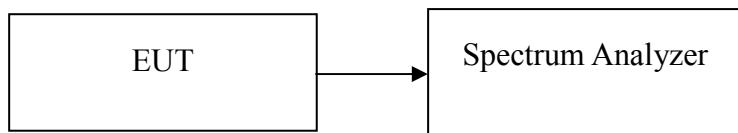
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

## 7.5 FREQUENCY SEPARATION

### LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

### TEST RESULTS

*No non-compliance noted*

### Test Data

#### For GFSK / DH5

Channel Separation (MHz)	Two-thirds of the 20 dB bandwidth	Channel Separation Limit	Result
1.00	631	Two-thirds of the 20 dB bandwidth	Pass

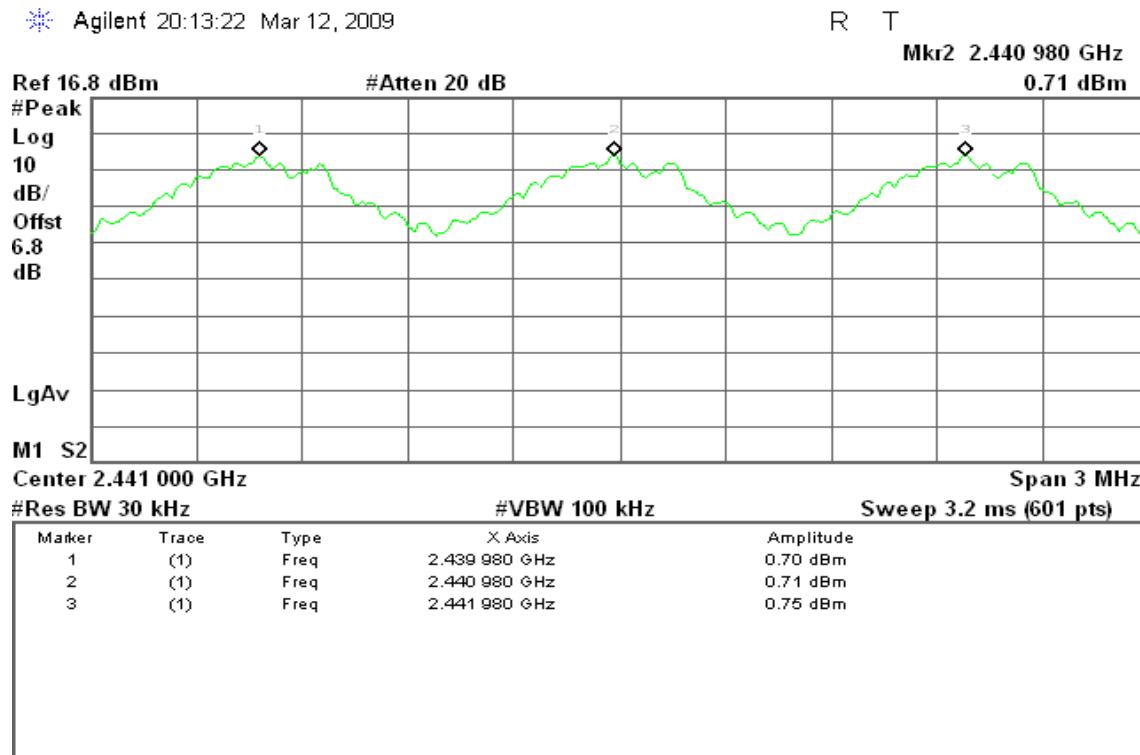
#### For 8DPSK / DH5

Channel Separation (MHz)	Two-thirds of the 20 dB bandwidth	Channel Separation Limit	Result
1.00	857	Two-thirds of the 20 dB bandwidth	Pass

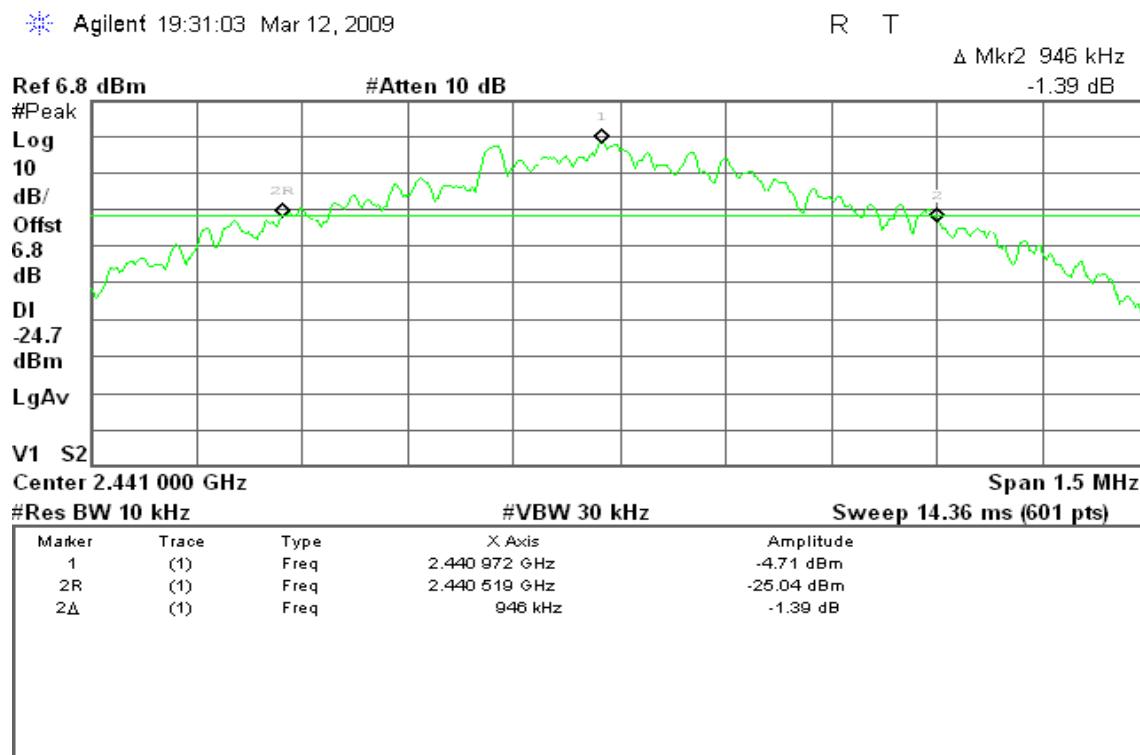
## Test Plot

### For GFSK / DH5

#### Measurement of Channel Separation

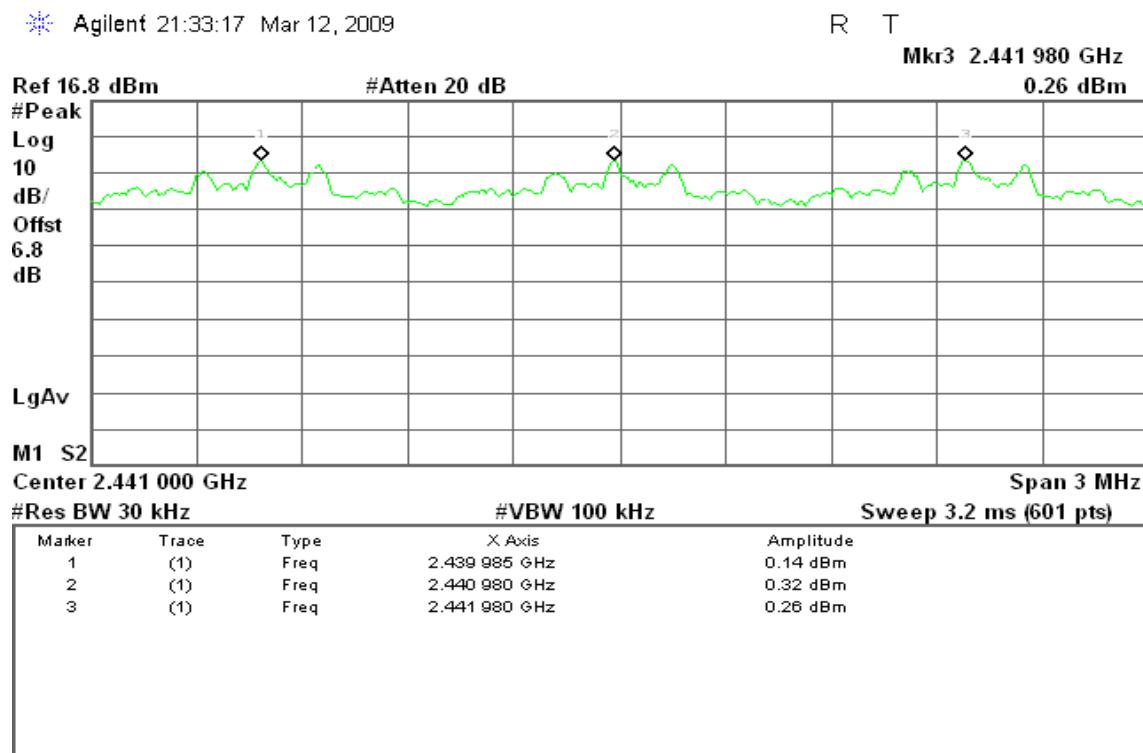


#### Measurement of 20dB Bandwidth

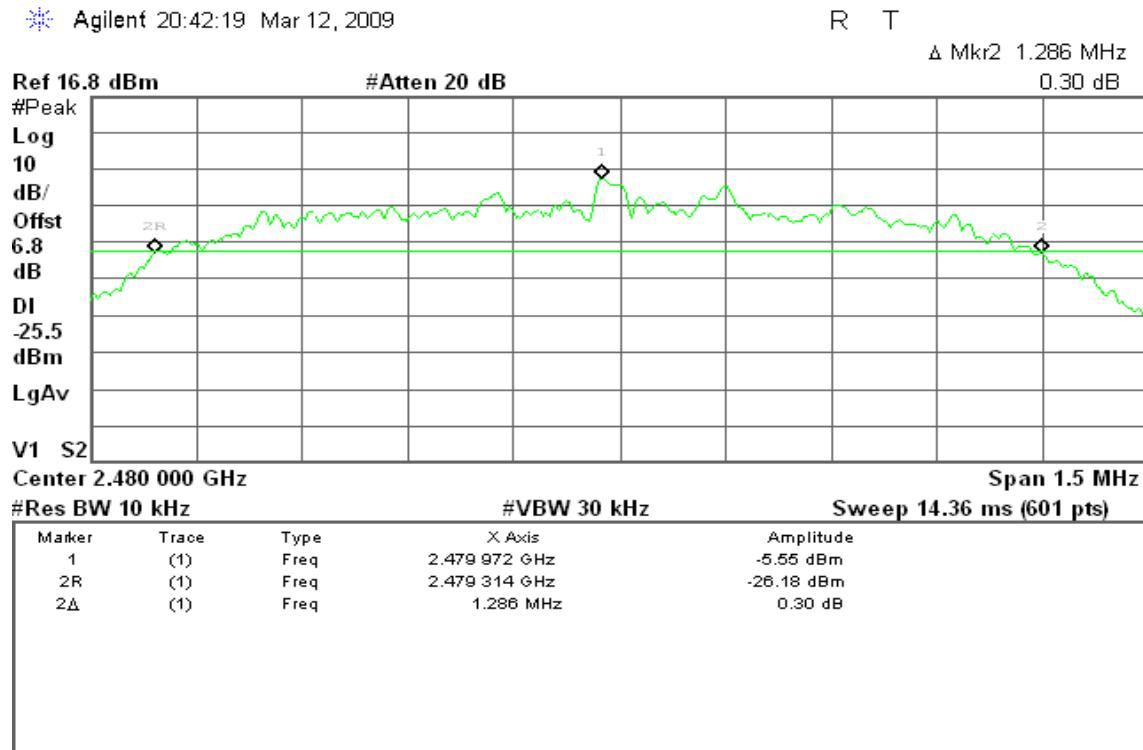


## For 8DPSK / DH5

### Measurement of Channel Separation



### Measurement of 20dB Bandwidth

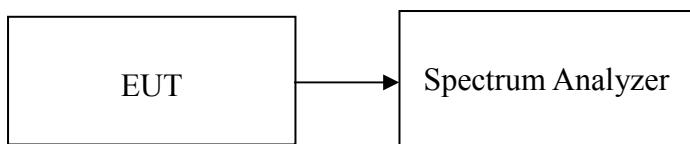


## 7.6 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

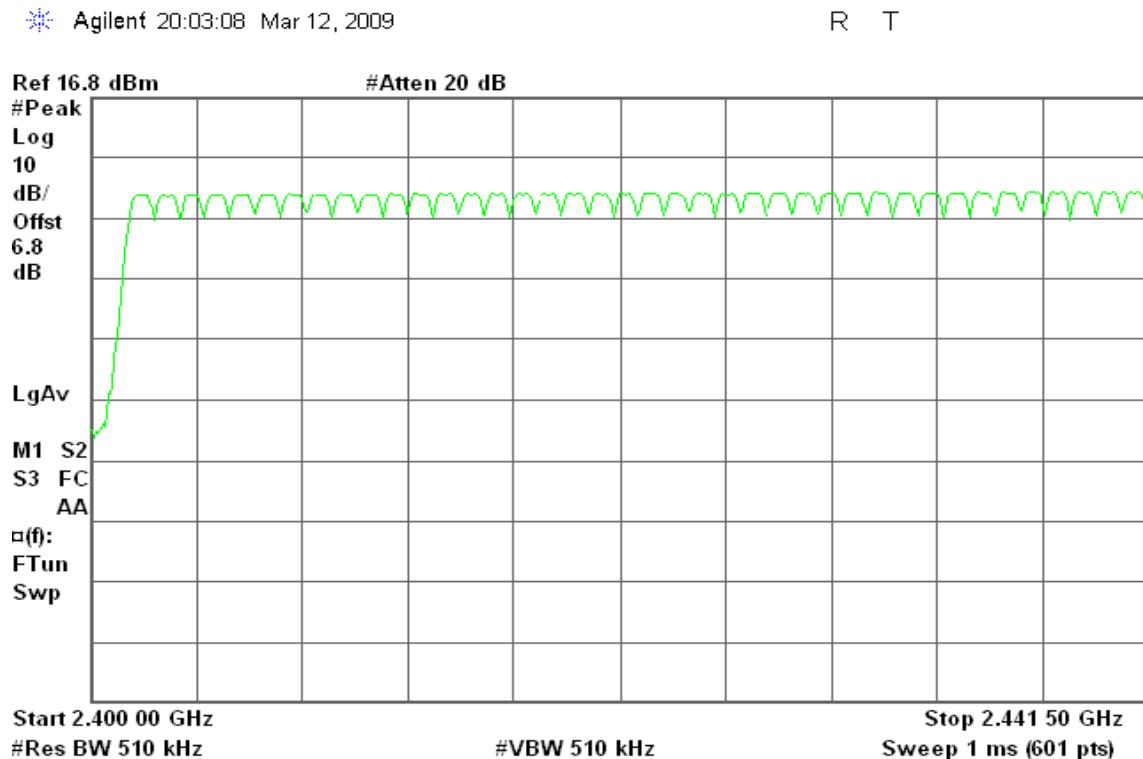
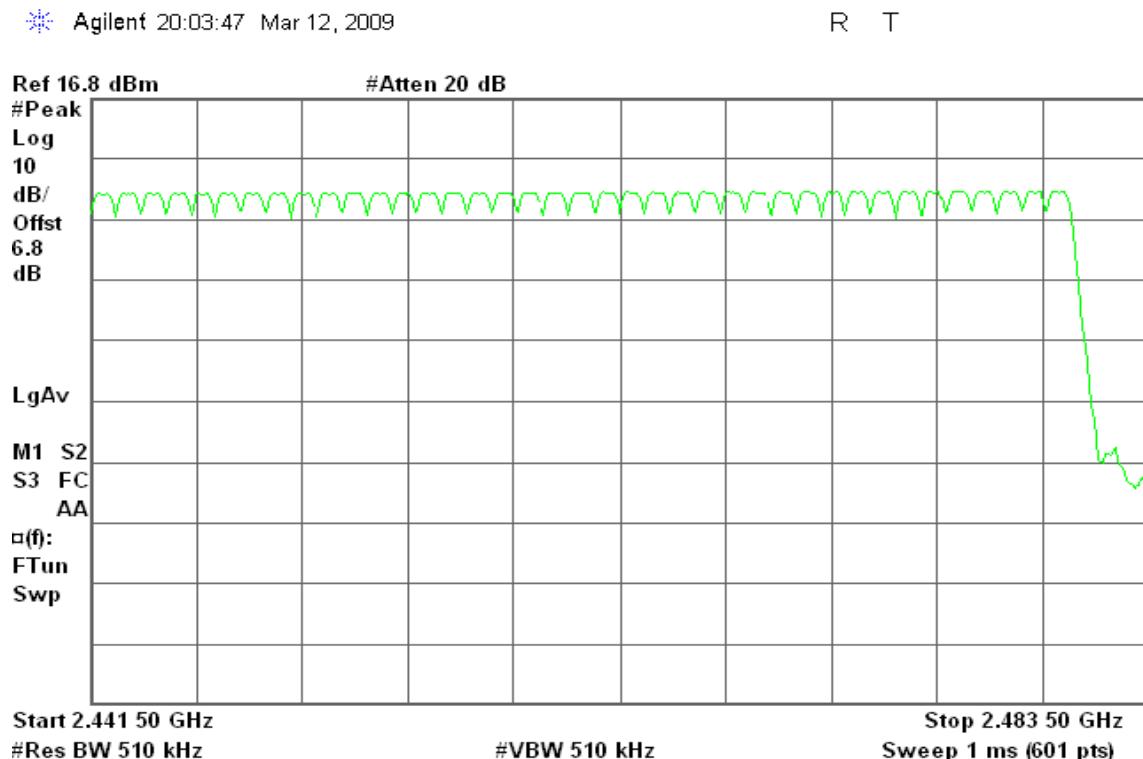
### TEST RESULTS

*No non-compliance noted.*

### Test Data

#### For GFSK / 8DPSK

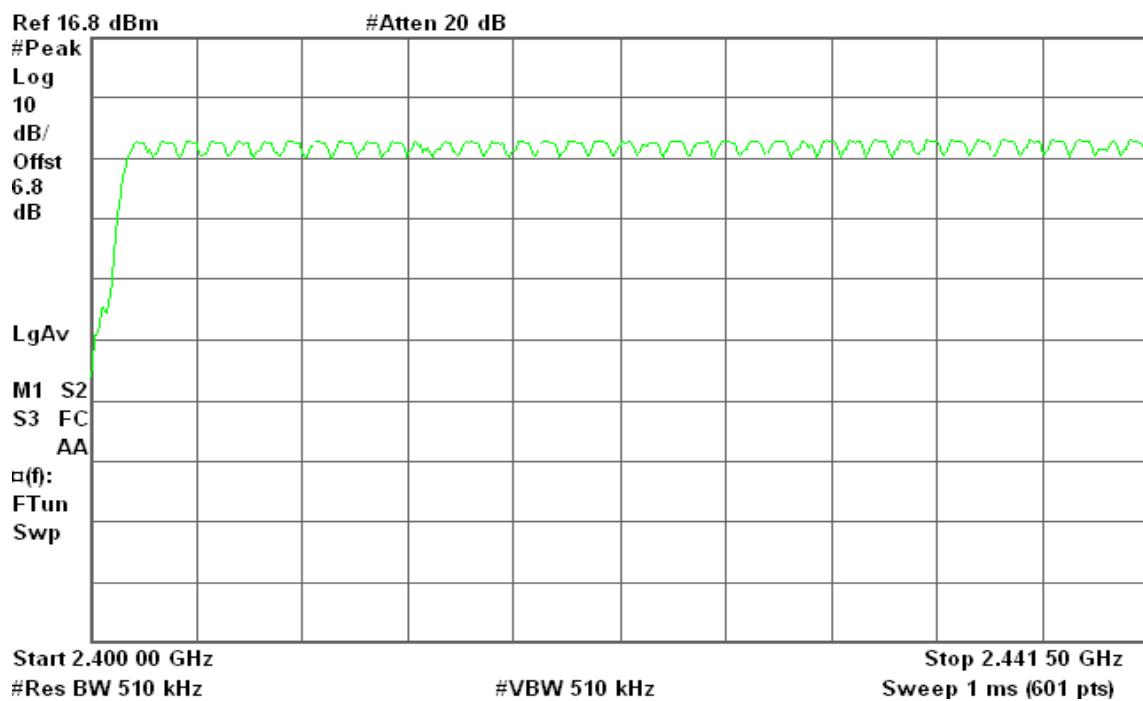
Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

**Test Plot****For GFSK****2.4 GHz – 2.4415 GHz****2.4415 GHz – 2.4835 GHz**

**For 8DPSK****2.4 GHz – 2.4415 GHz**

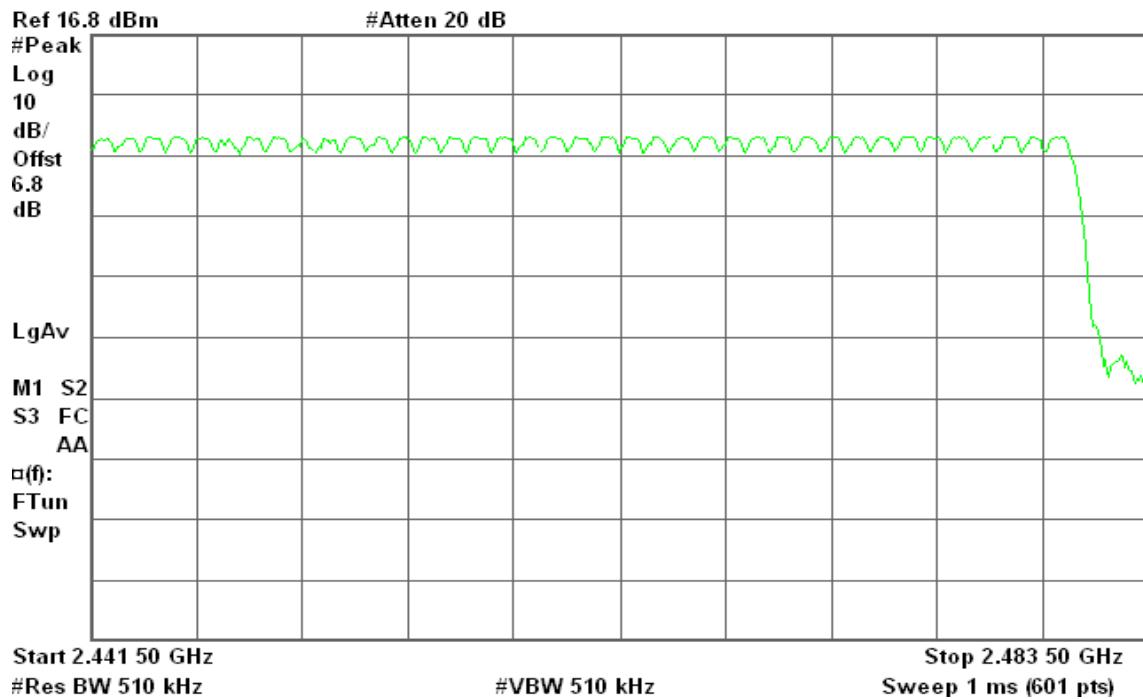
Agilent 21:16:19 Mar 12, 2009

R T

**2.4415 GHz – 2.4835 GHz**

Agilent 21:18:48 Mar 12, 2009

R T

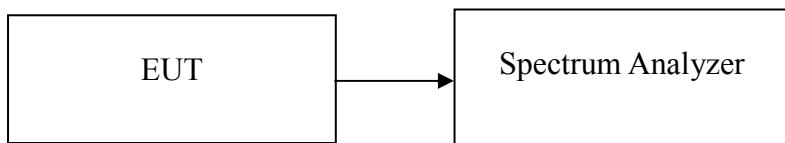


## 7.7 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

*No non-compliance noted.*

**Test Data****For GFSK****DH 1**CH Low:  $0.4000 * (1600/2)/79 * 31.6 = 128.000$  (ms)CH Mid:  $0.4000 * (1600/2)/79 * 31.6 = 128.000$  (ms)CH High:  $0.4000 * (1600/2)/79 * 31.6 = 128.000$  (ms)

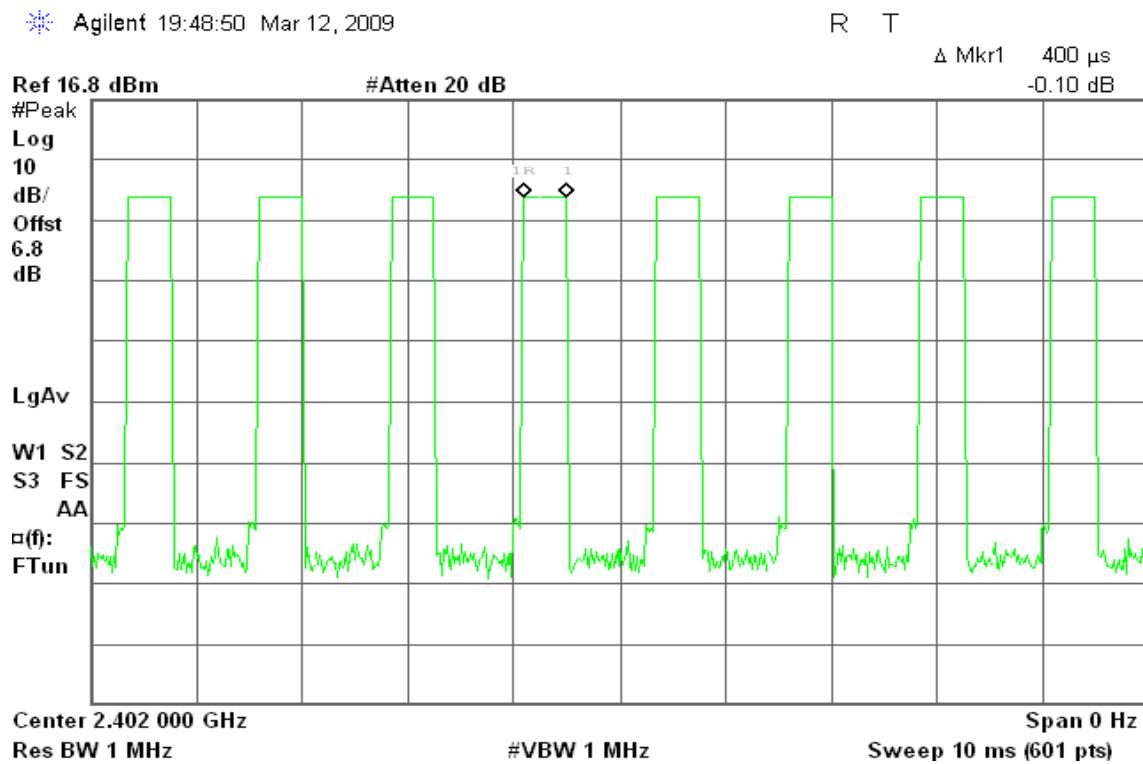
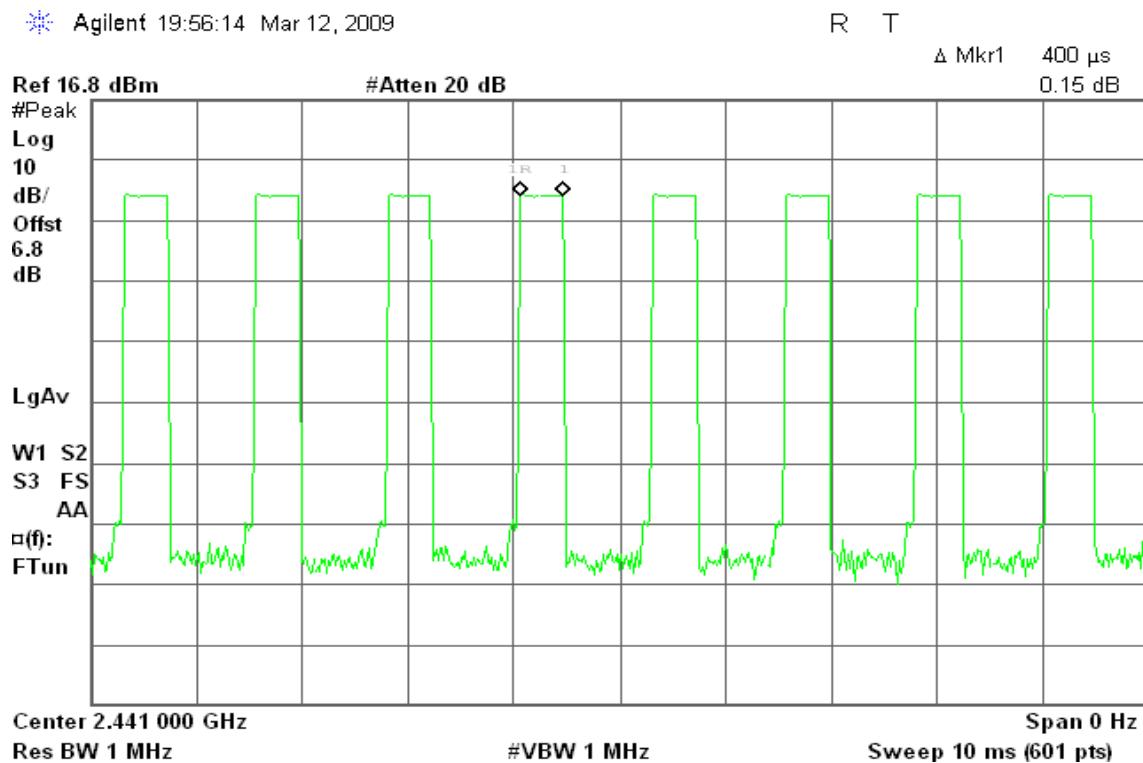
CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.4000	128.000	31.60	400.00	PASS
Mid	0.4000	128.000	31.60		PASS
High	0.4000	128.000	31.60		PASS

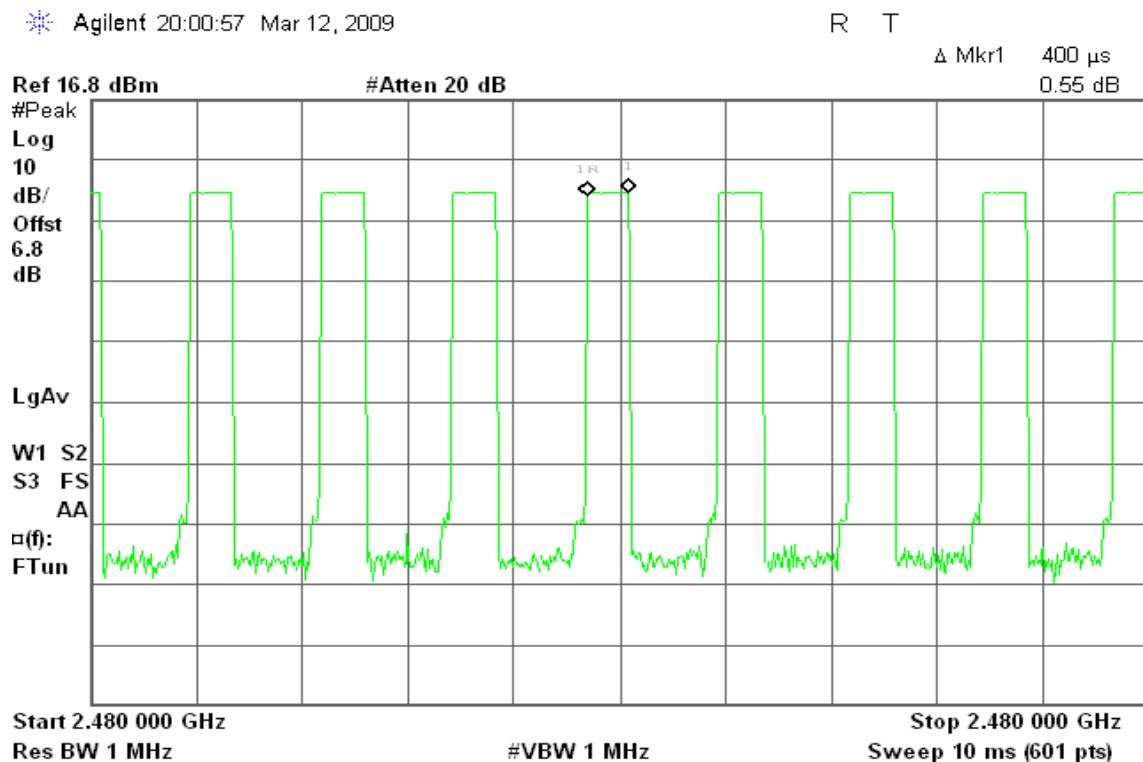
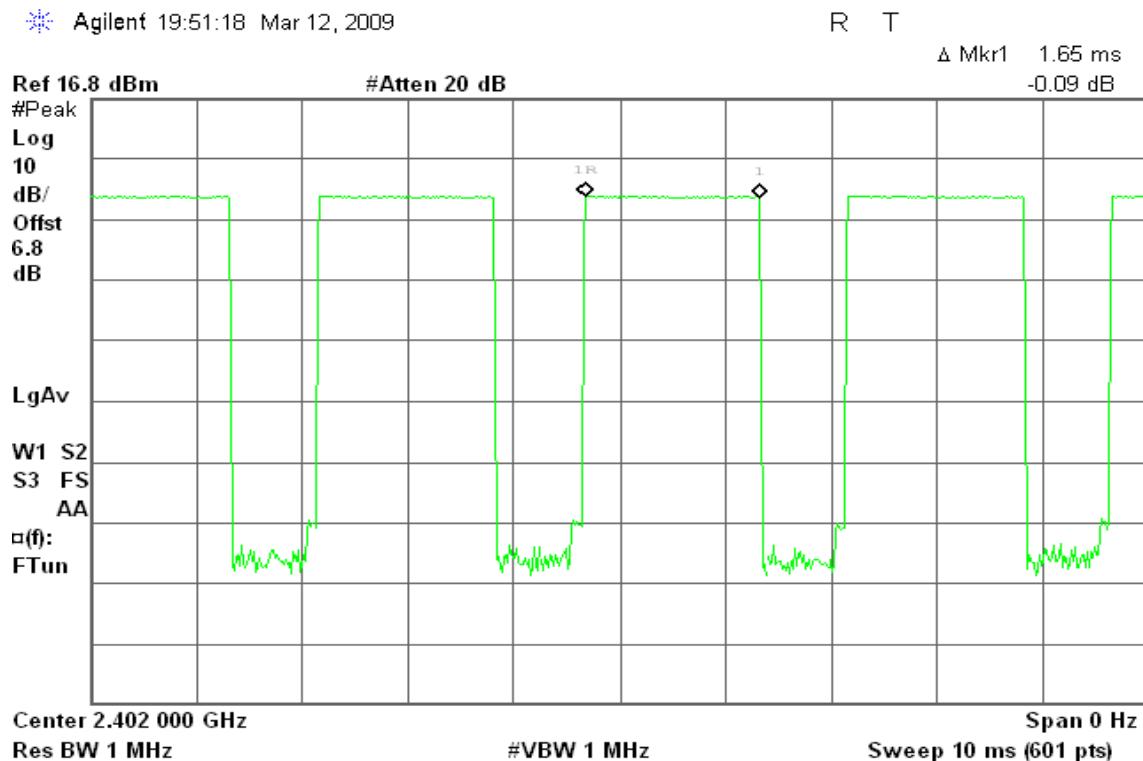
**DH 3**CH Low:  $1.65 * (1600/4)/79 * 31.6 = 264.000$  (ms)CH Mid:  $1.65 * (1600/4)/79 * 31.6 = 264.000$  (ms)CH High:  $1.65 * (1600/4)/79 * 31.6 = 264.000$  (ms)

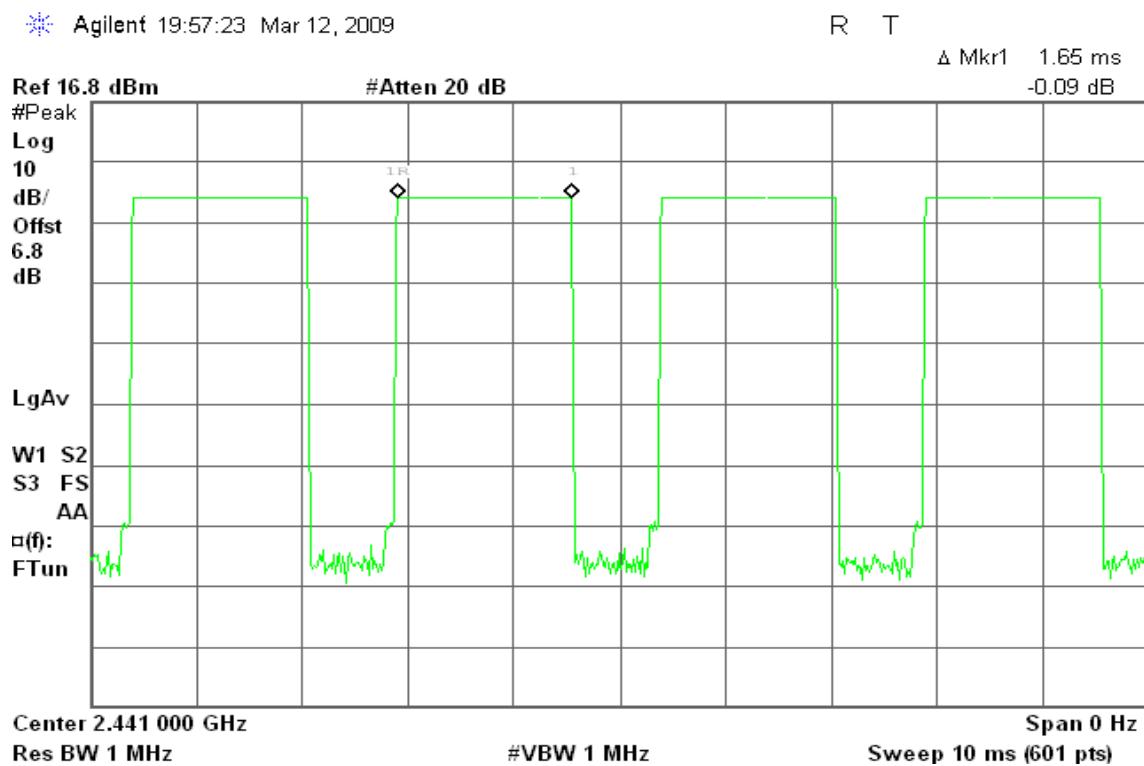
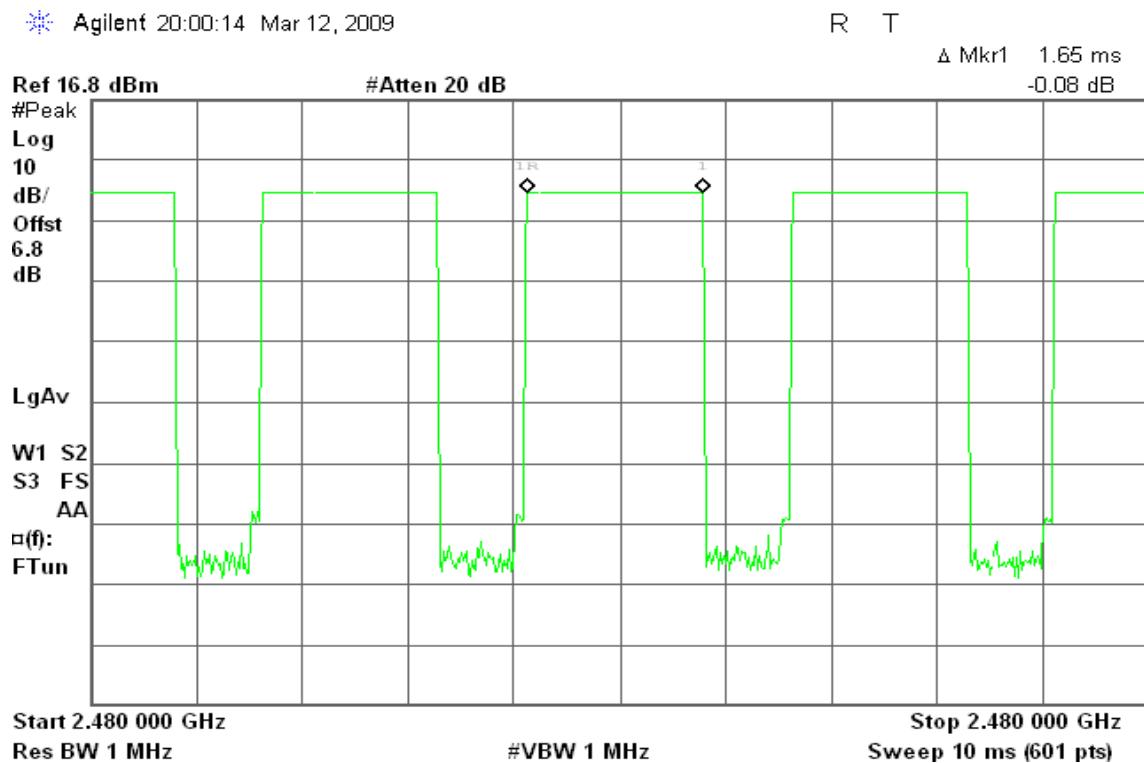
CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.65	264.000	31.60	400.00	PASS
Mid	1.65	264.000	31.60		PASS
High	1.65	264.000	31.60		PASS

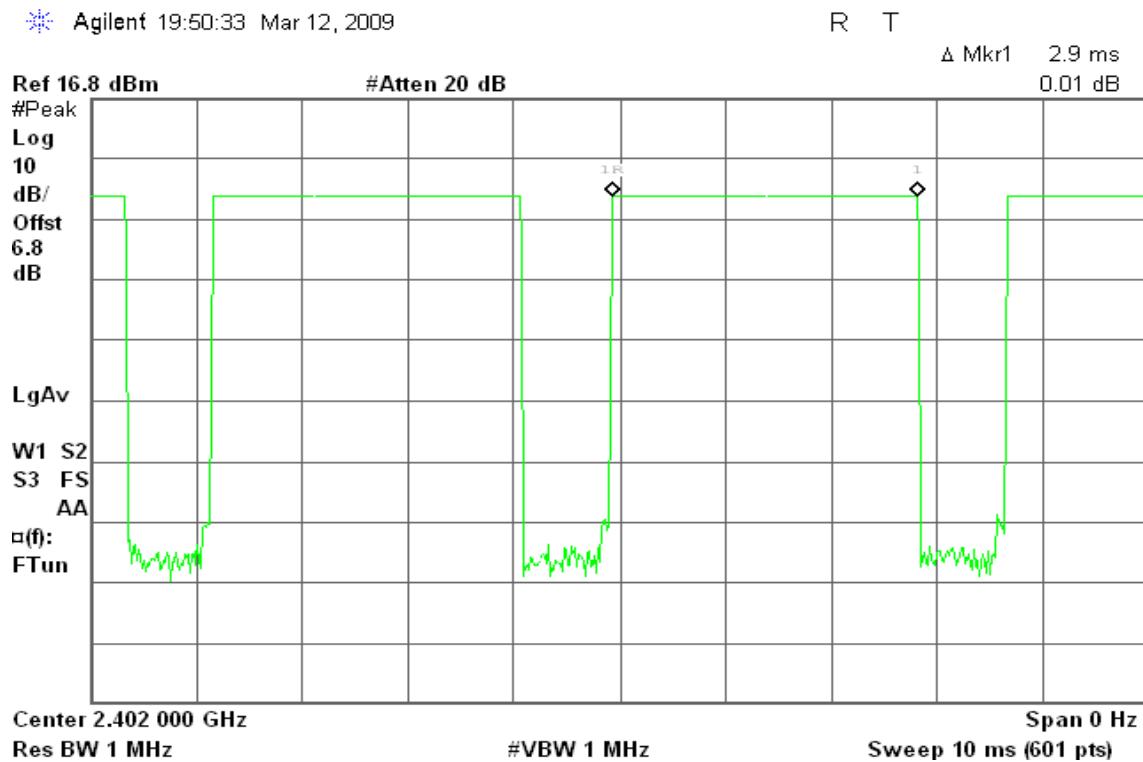
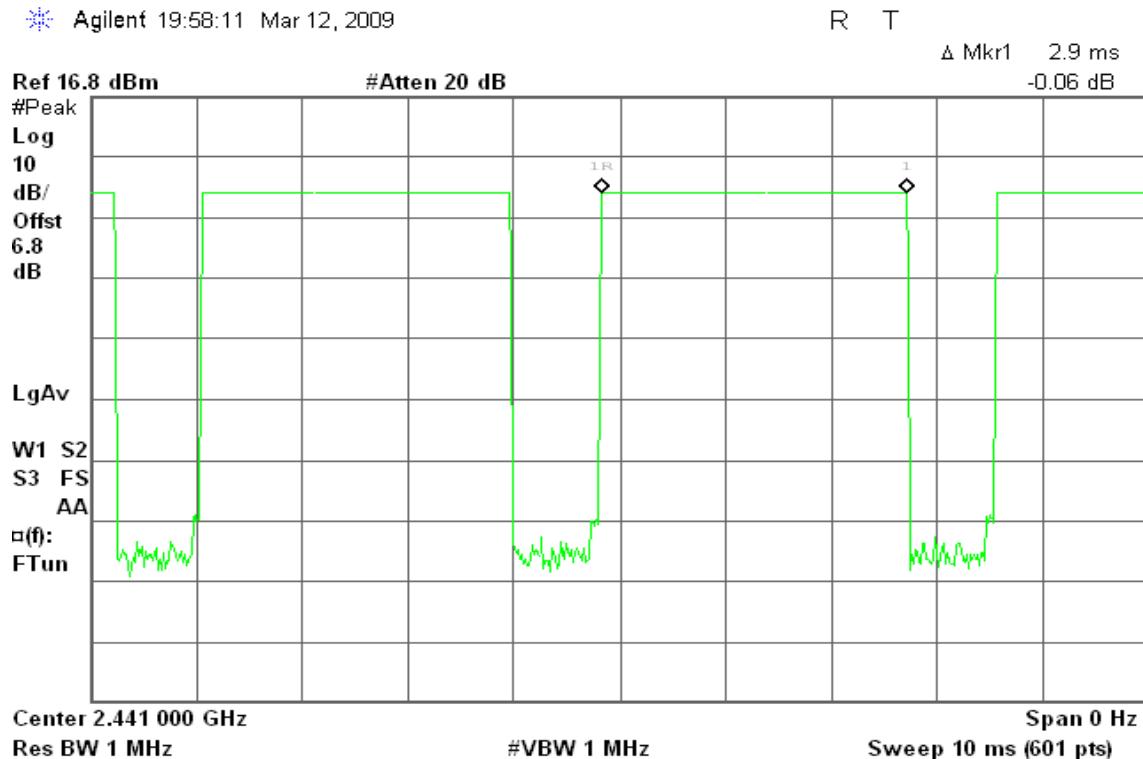
**DH 5**CH Low:  $2.9 * (1600/6)/79 * 31.6 = 309.333$  (ms)CH Mid:  $2.9 * (1600/6)/79 * 31.6 = 309.333$  (ms)CH High:  $2.9 * (1600/6)/79 * 31.6 = 309.333$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.9	309.333	31.60	400.00	PASS
Mid	2.9	309.333	31.60		PASS
High	2.9	309.333	31.60		PASS

**Test Plot****DH 1****(CH Low)****(CH Mid)**

**(CH High)****DH 3****(CH Low)**

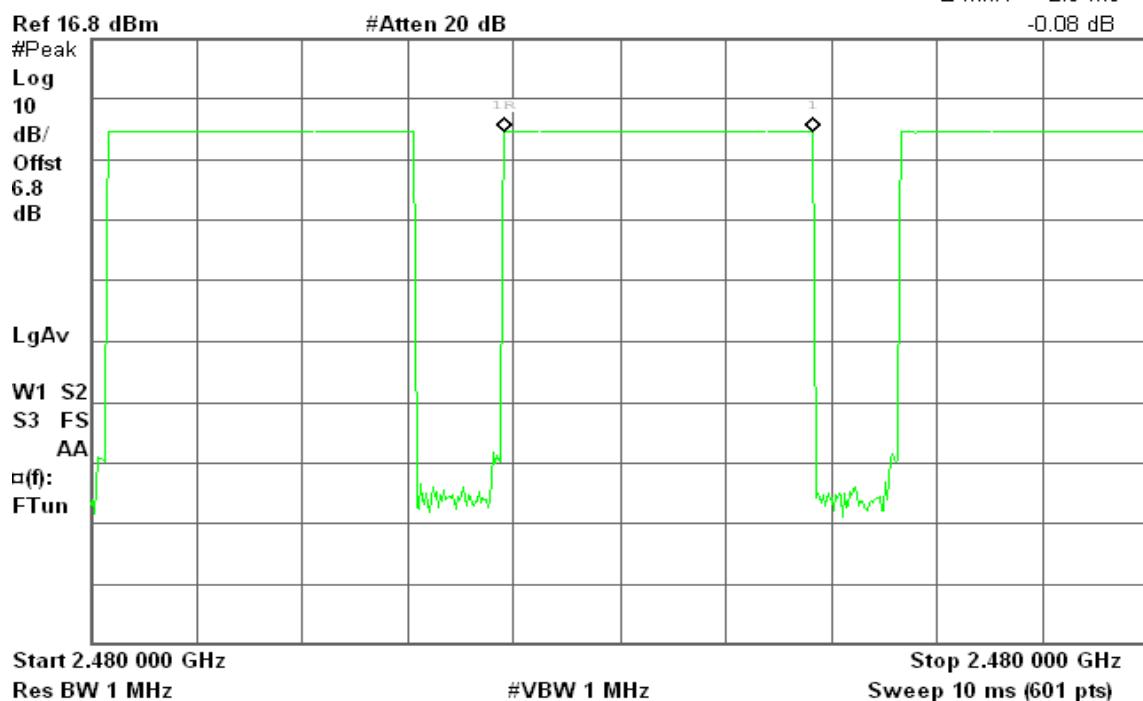
**(CH Mid)****(CH High)**

**DH 5****(CH Low)****(CH Mid)**

## (CH High)

Agilent 19:59:18 Mar 12, 2009

R T

Δ Mkr1 2.9 ms  
-0.08 dB

**For 8DPSK****DH 1**CH Low:  $0.4000 * (1600/2)/79 * 31.6 = 128.000$  (ms)CH Mid:  $0.4000 * (1600/2)/79 * 31.6 = 128.000$  (ms)CH High:  $0.4000 * (1600/2)/79 * 31.6 = 128.000$  (ms)

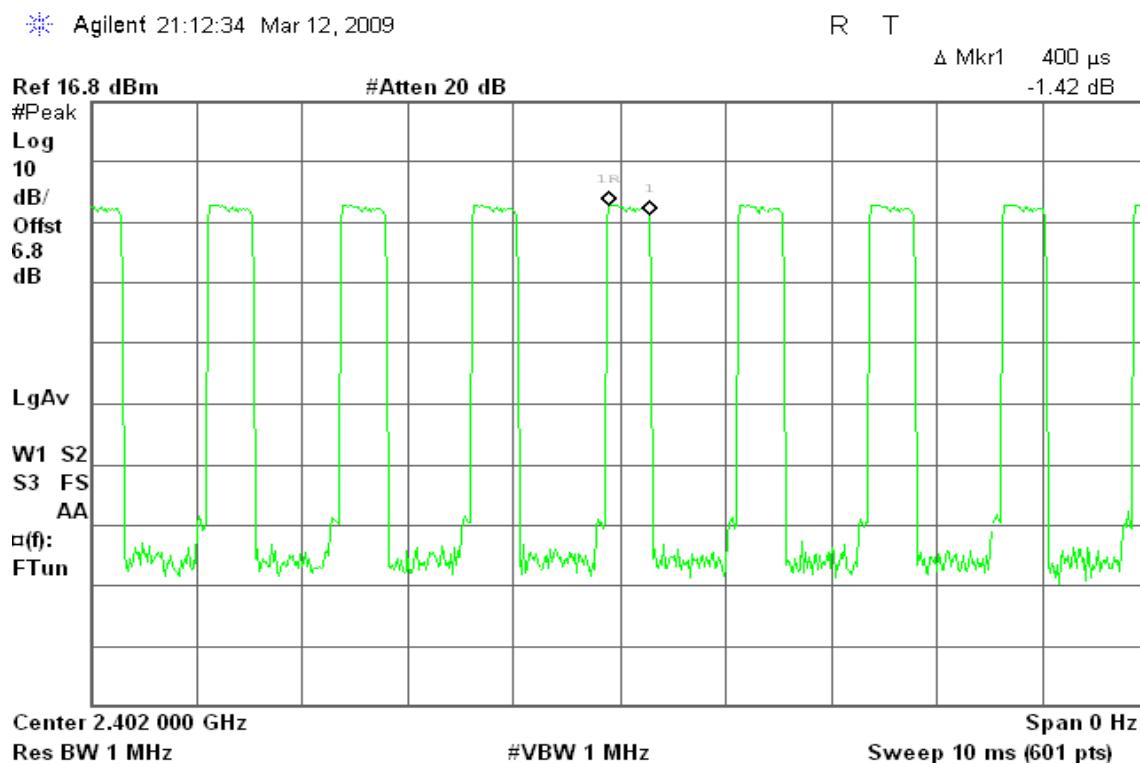
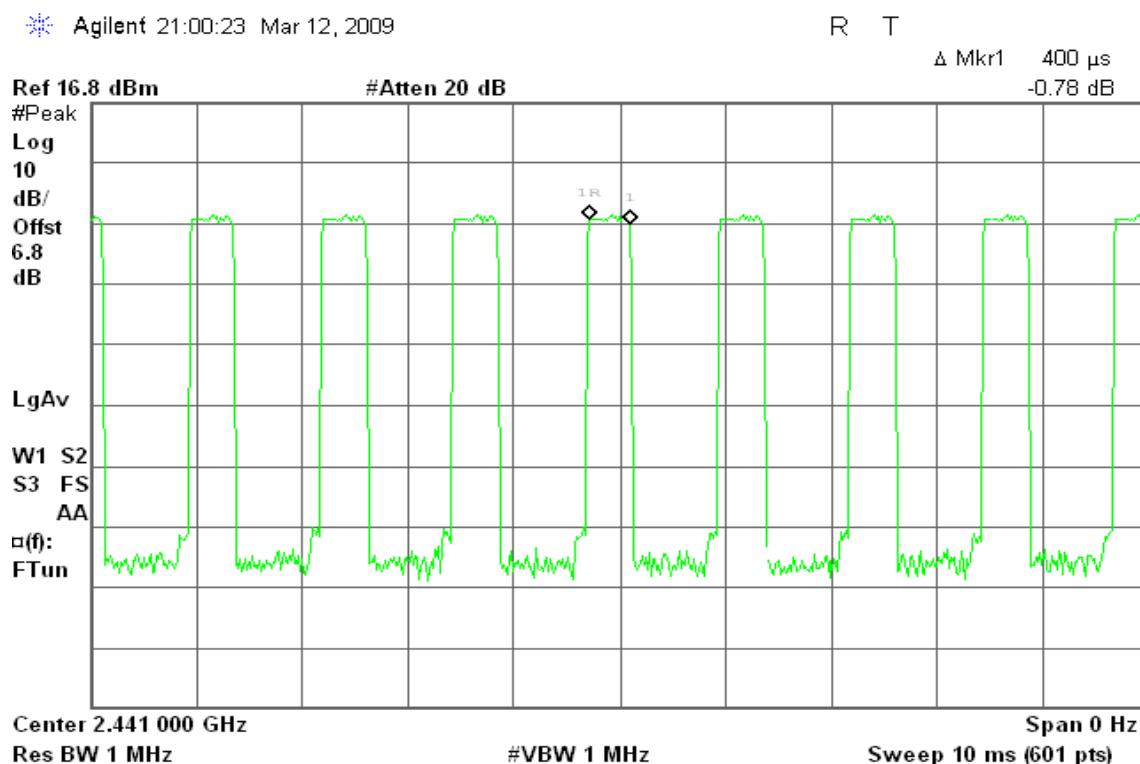
CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.4000	128.000	31.60	400.00	PASS
Mid	0.4000	128.000	31.60		PASS
High	0.4000	128.000	31.60		PASS

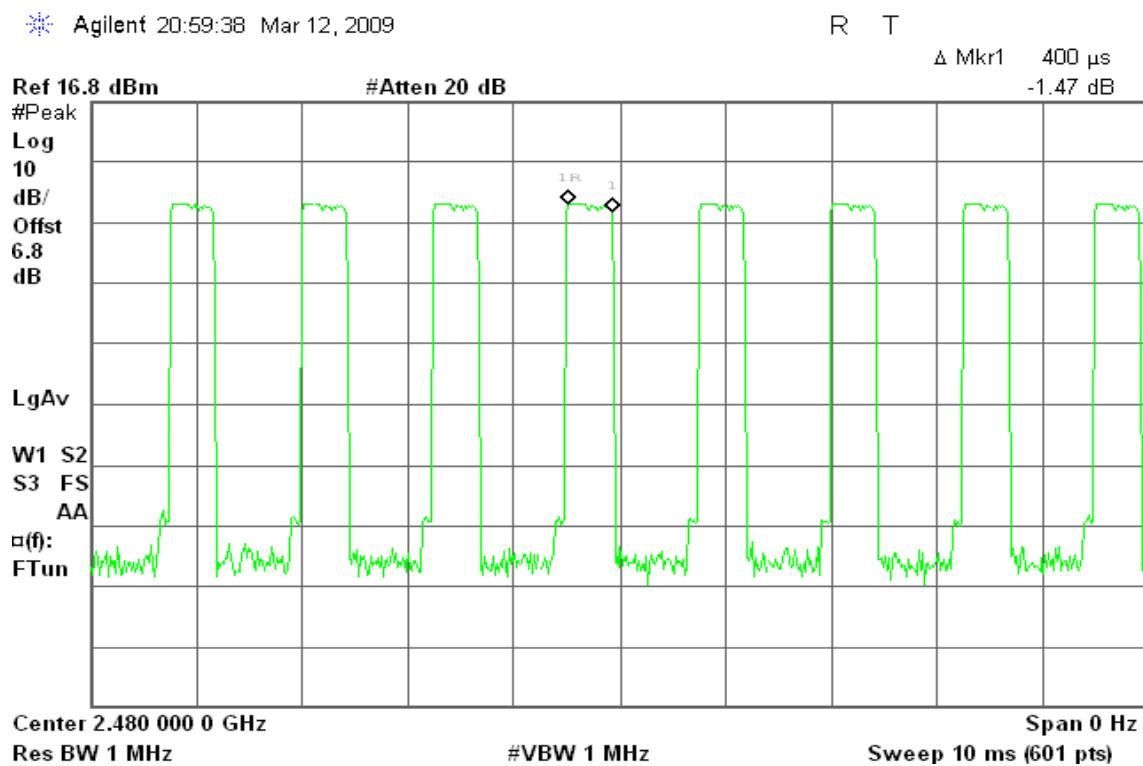
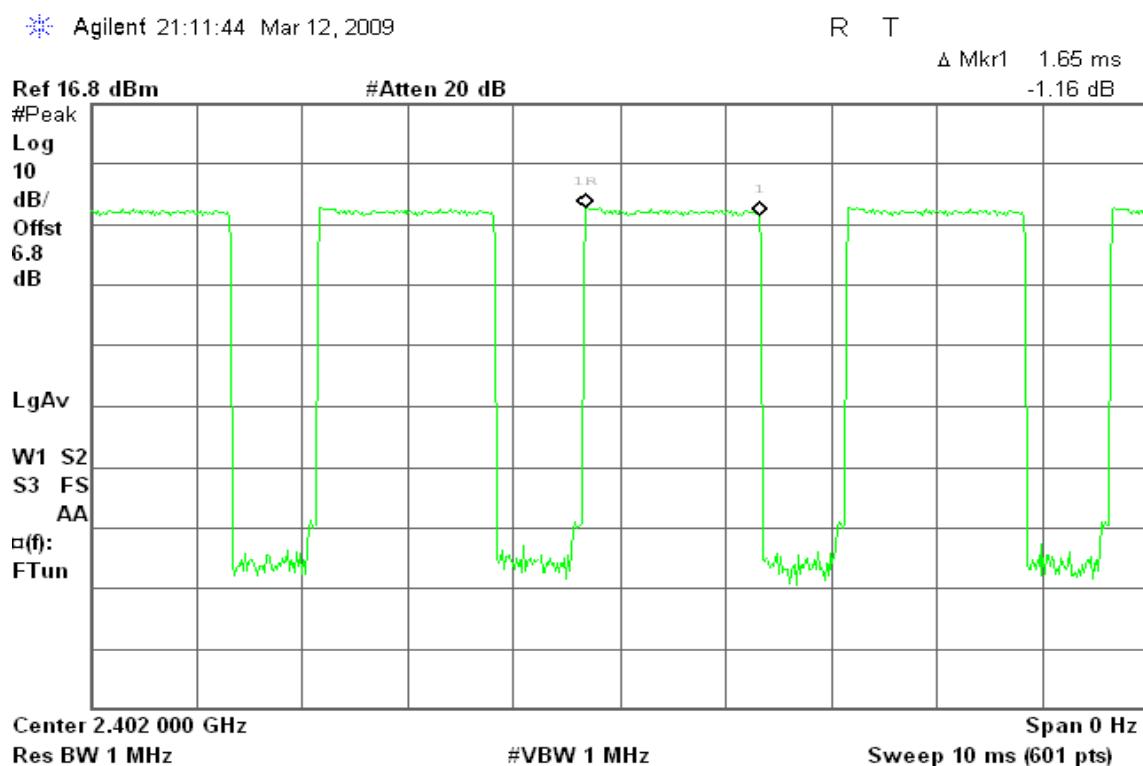
**DH 3**CH Low:  $1.65 * (1600/4)/79 * 31.6 = 264.000$  (ms)CH Mid:  $1.65 * (1600/4)/79 * 31.6 = 264.000$  (ms)CH High:  $1.65 * (1600/4)/79 * 31.6 = 264.000$  (ms)

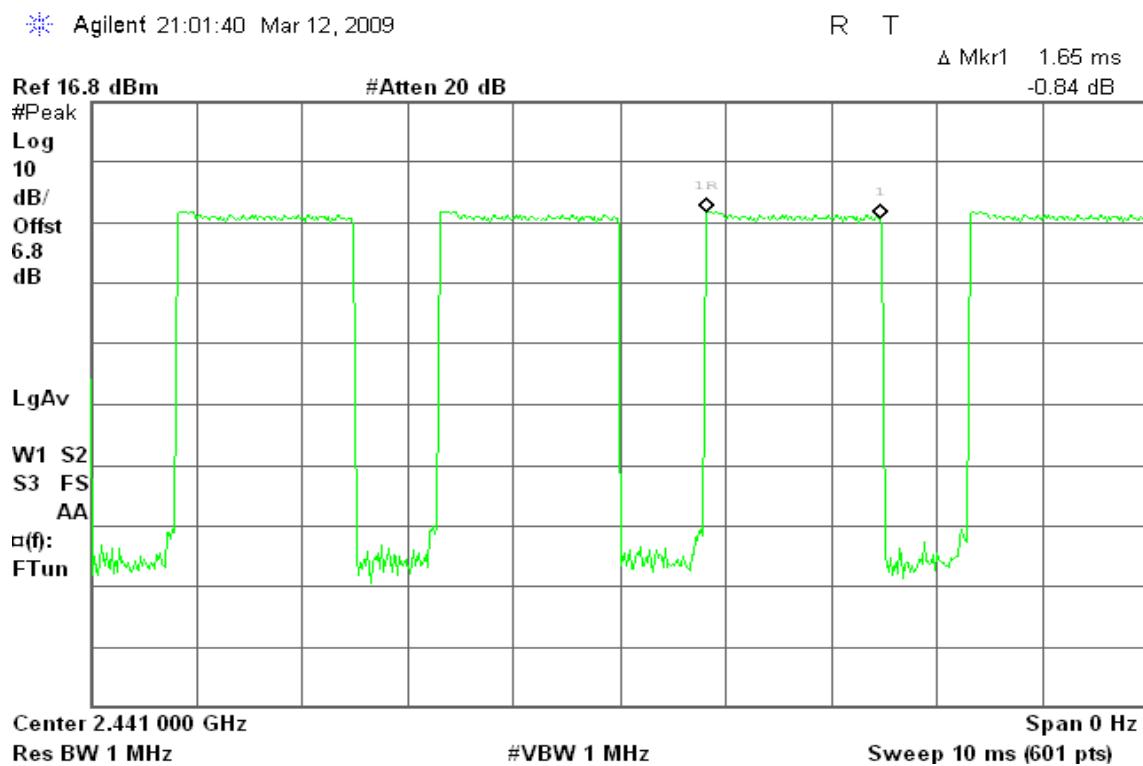
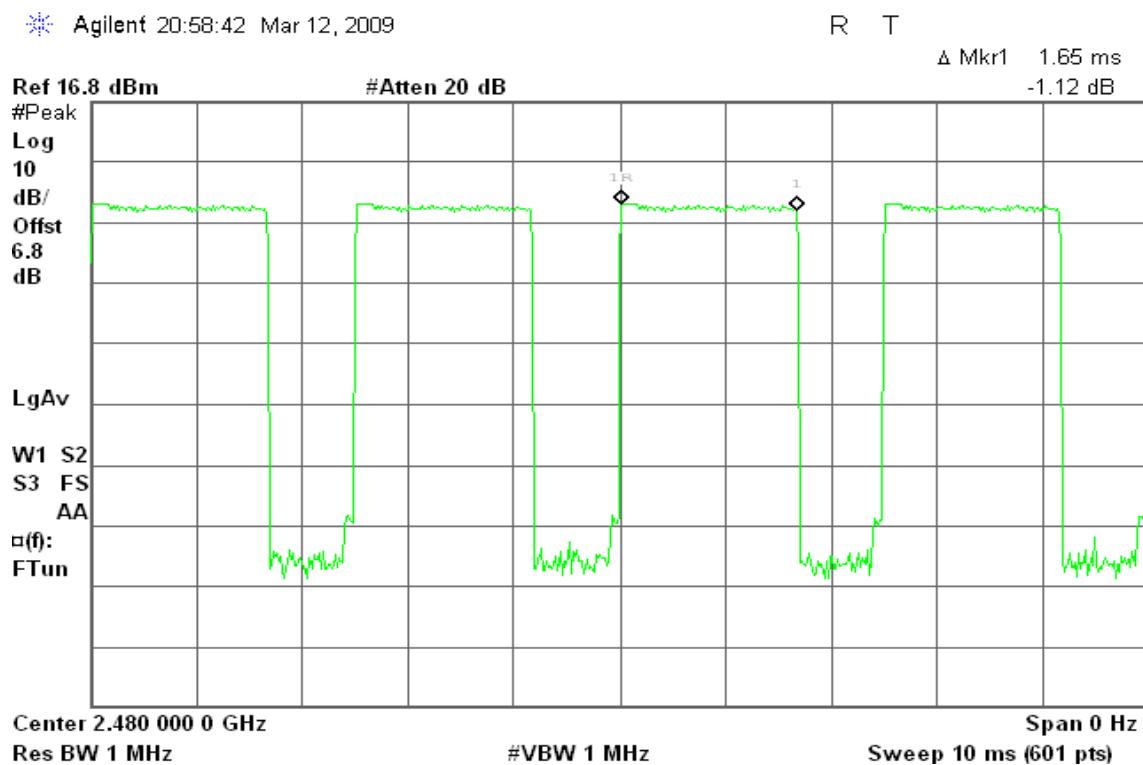
CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.65	264.000	31.60	400.00	PASS
Mid	1.65	264.000	31.60		PASS
High	1.65	264.000	31.60		PASS

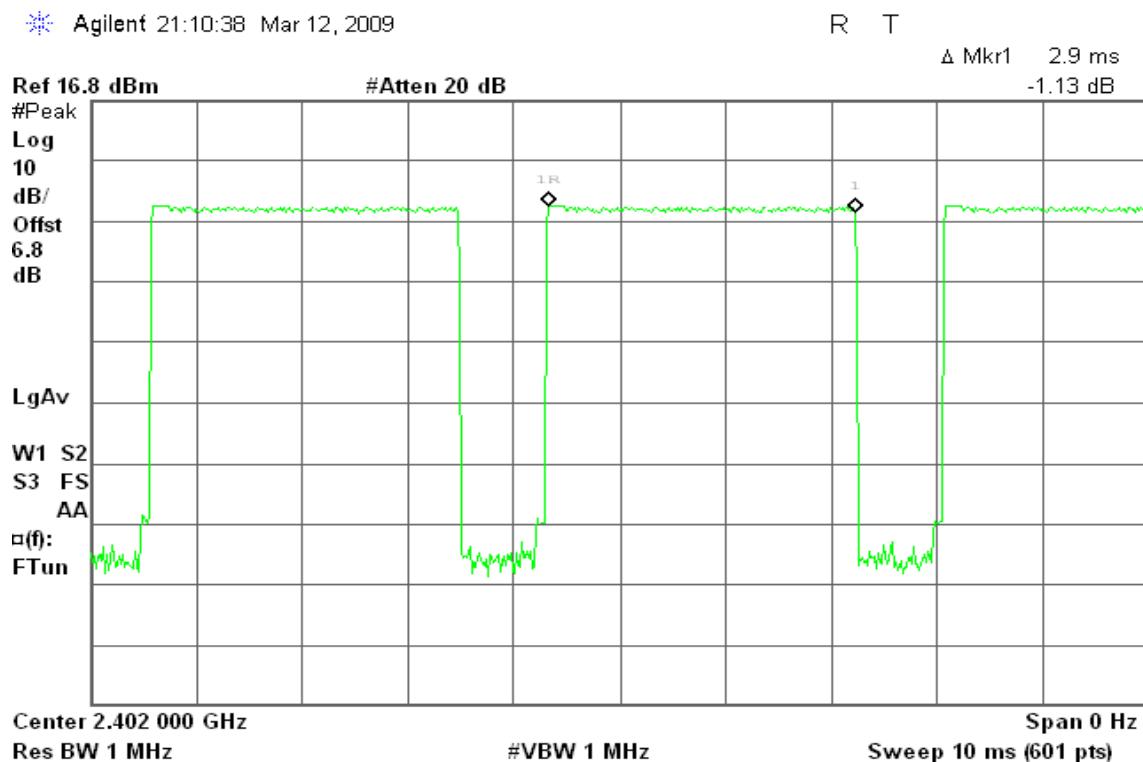
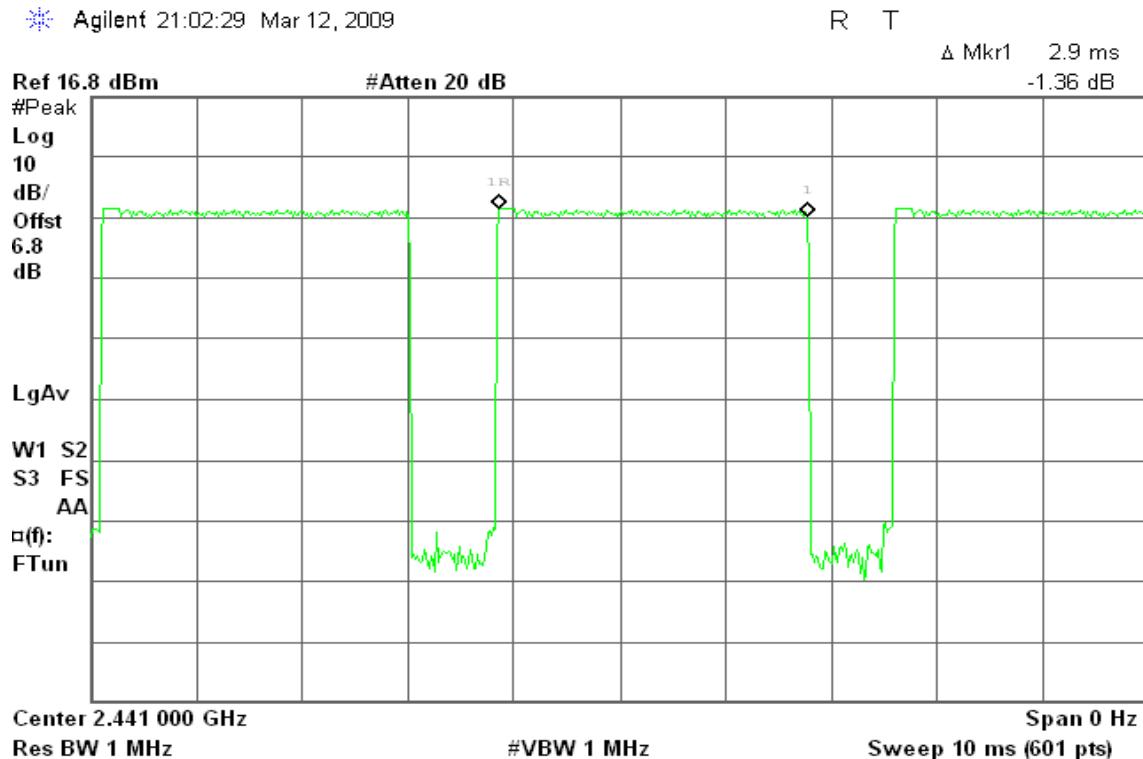
**DH 5**CH Low:  $2.9 * (1600/6)/79 * 31.6 = 309.333$  (ms)CH Mid:  $2.9 * (1600/6)/79 * 31.6 = 309.333$  (ms)CH High:  $2.9 * (1600/6)/79 * 31.6 = 309.333$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.9	309.333	31.60	400.00	PASS
Mid	2.9	309.333	31.60		PASS
High	2.9	309.333	31.60		PASS

**Test Plot****DH 1****(CH Low)****(CH Mid)**

**(CH High)****DH 3****(CH Low)**

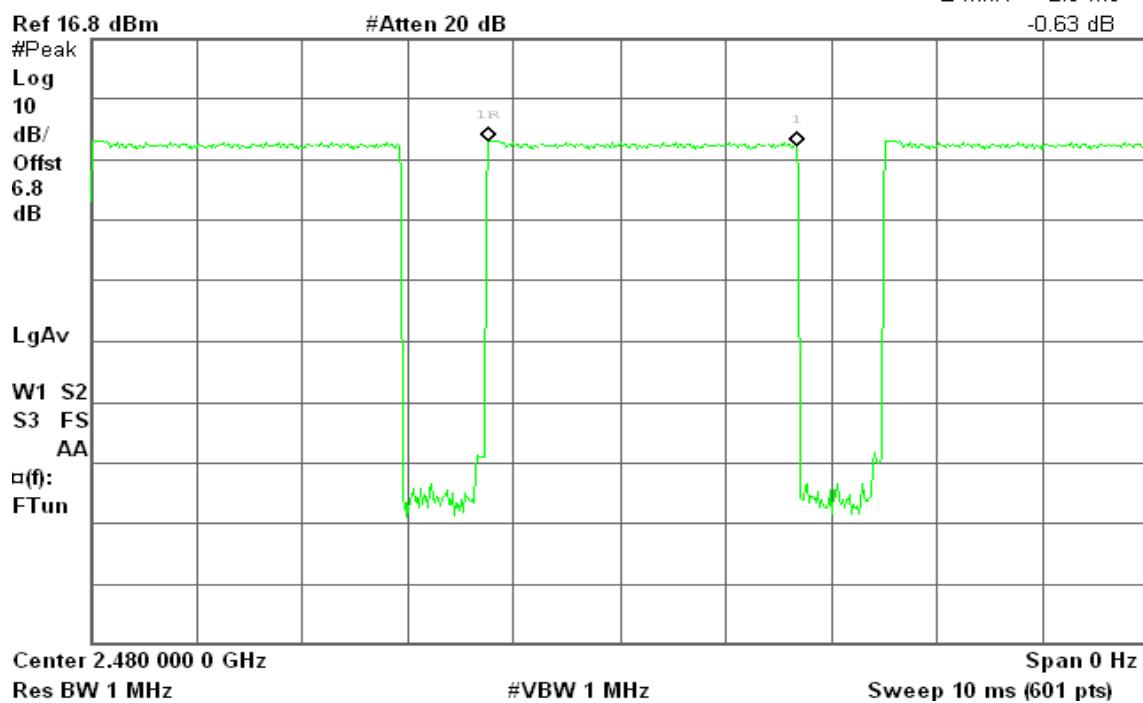
**(CH Mid)****(CH High)**

**DH 5****(CH Low)****(CH Mid)**

## (CH High)

Agilent 20:57:51 Mar 12, 2009

R T

Δ Mkr1 2.9 ms  
-0.63 dB


## 7.8 SPURIOUS EMISSIONS

### 7.8.1 Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

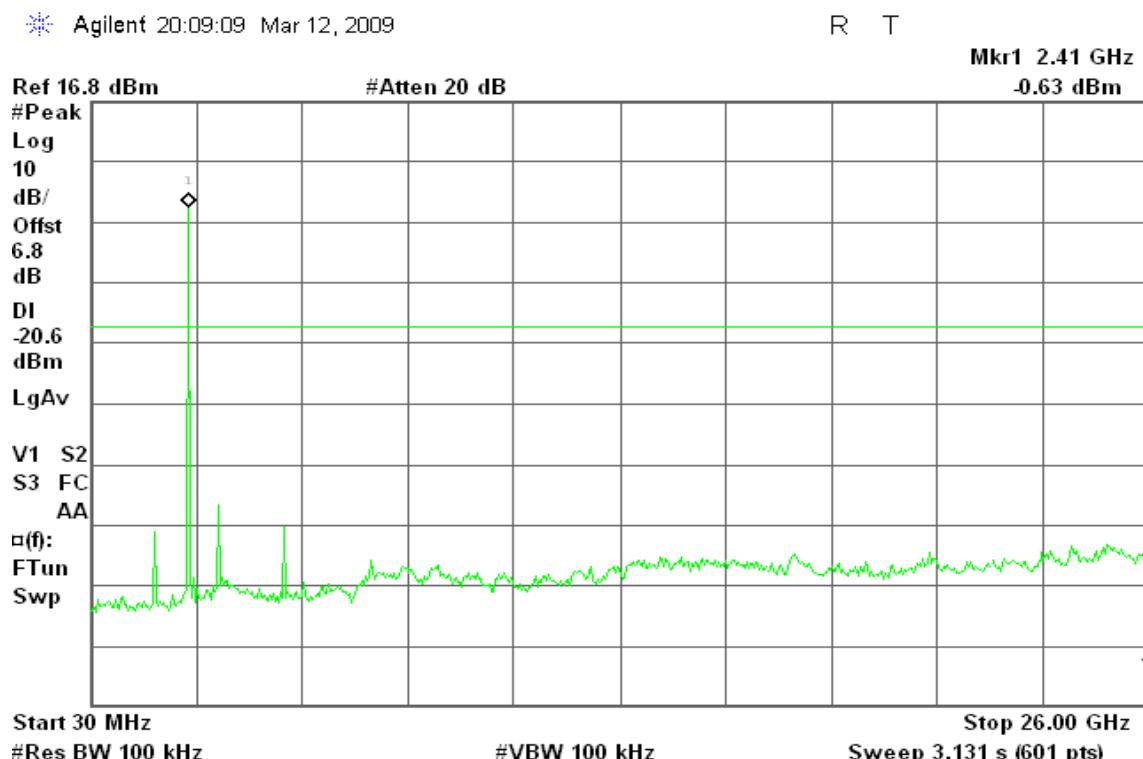
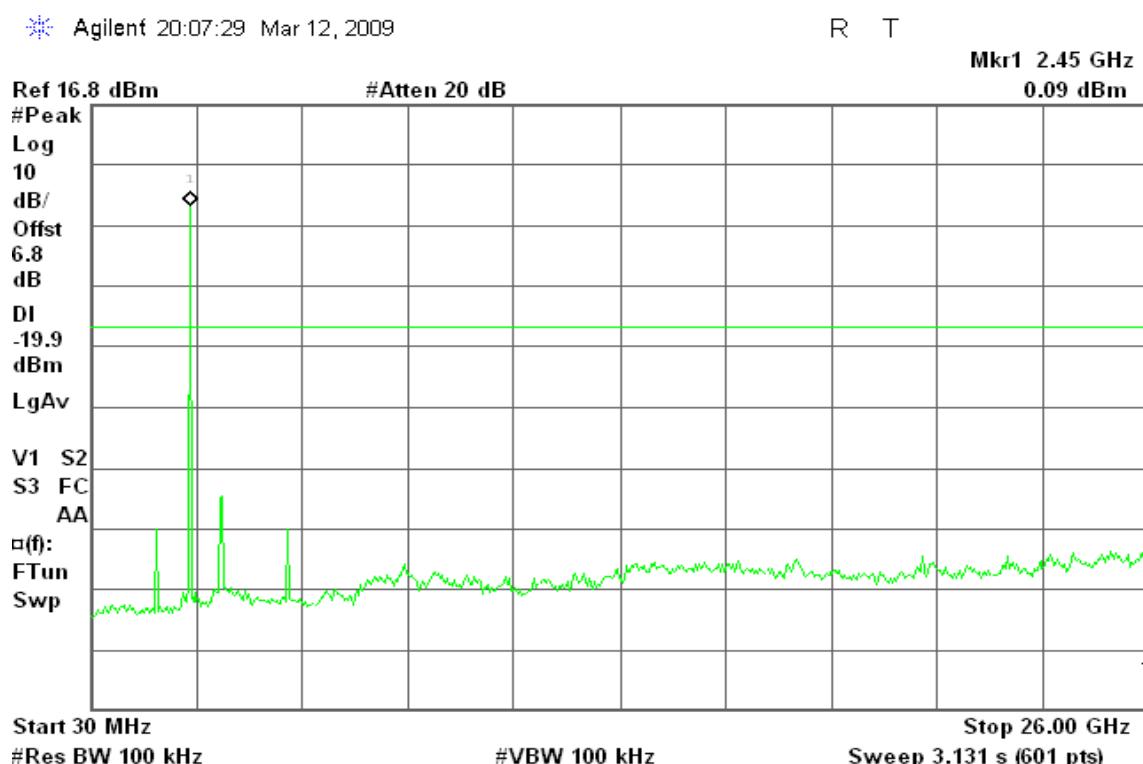
Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

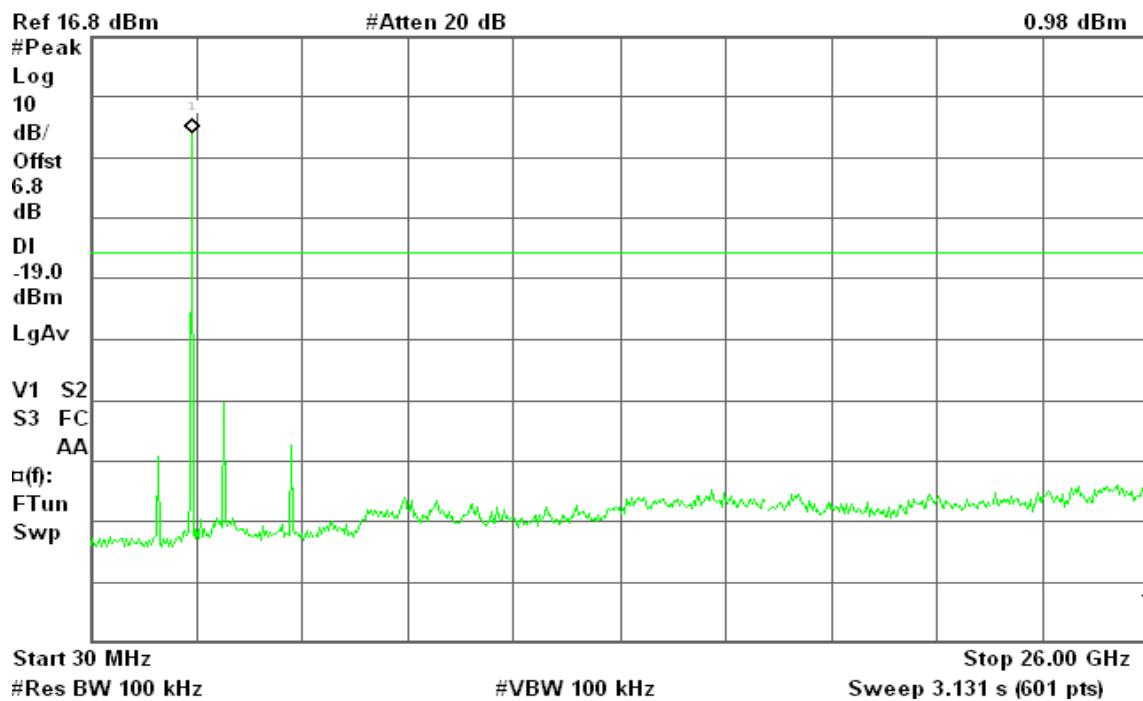
*No non-compliance noted*

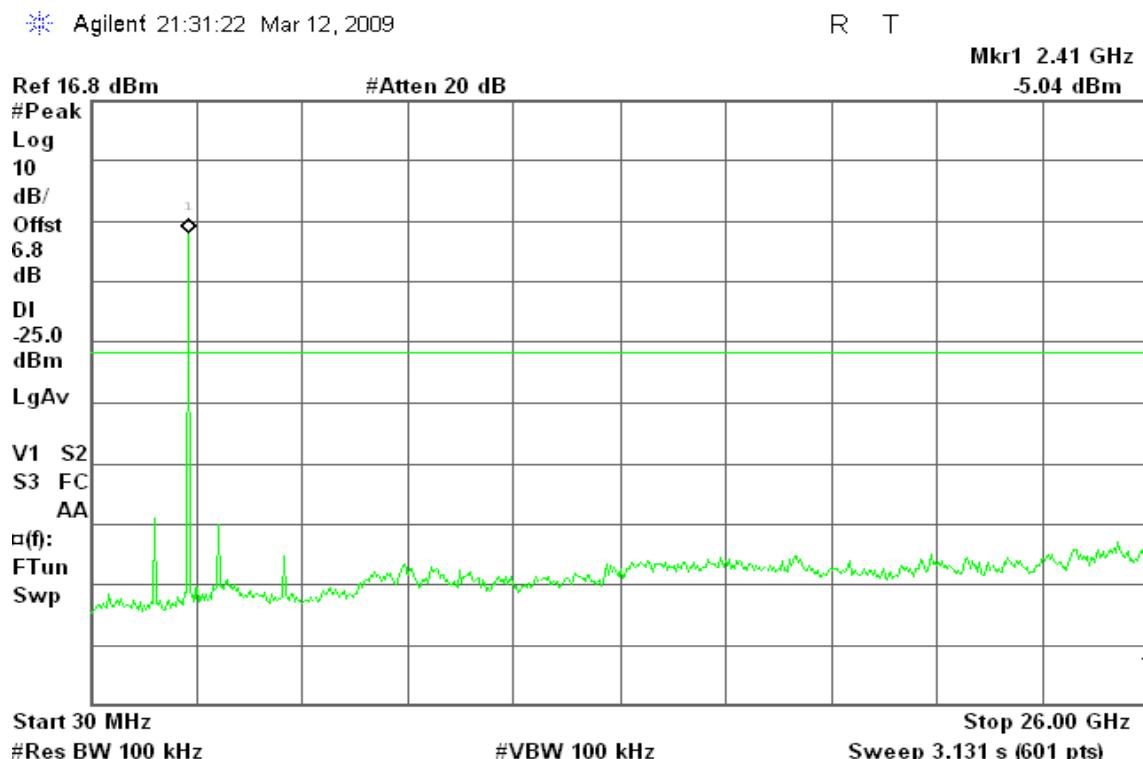
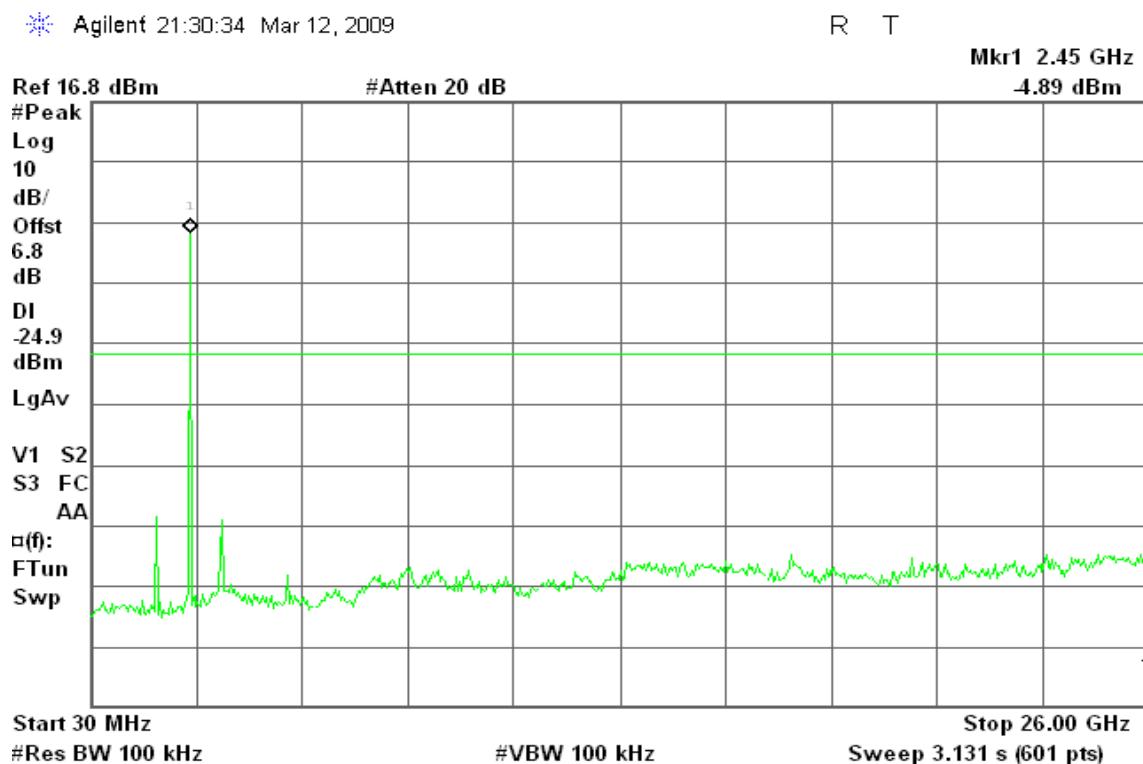
**Test Plot****For GFSK / DH5****CH Low****CH Mid**

**CH High**

Agilent 20:38:34 Mar 12, 2009

R T

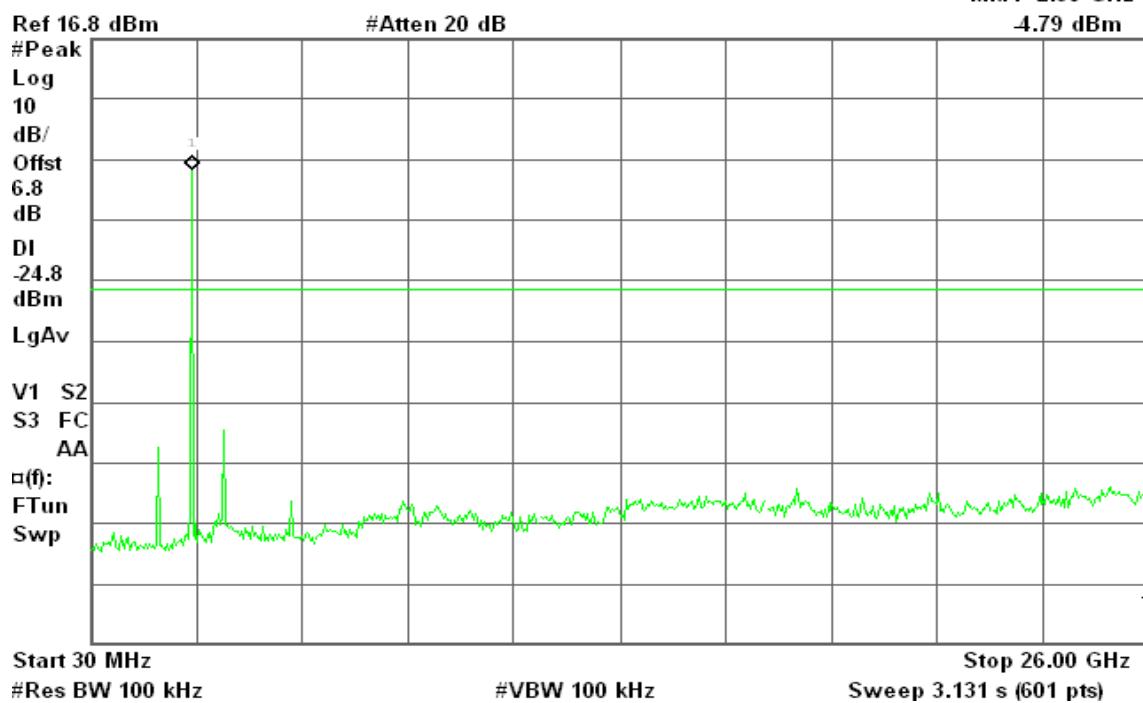
**Mkr1 2.50 GHz**  
**0.98 dBm**

**For 8DPSK / DH5****CH Low****CH Mid**

**CH High**

Agilent 21:29:31 Mar 12, 2009

R T

Mkr1 2.50 GHz  
-4.79 dBm



## 7.8.2 Radiated Emissions

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

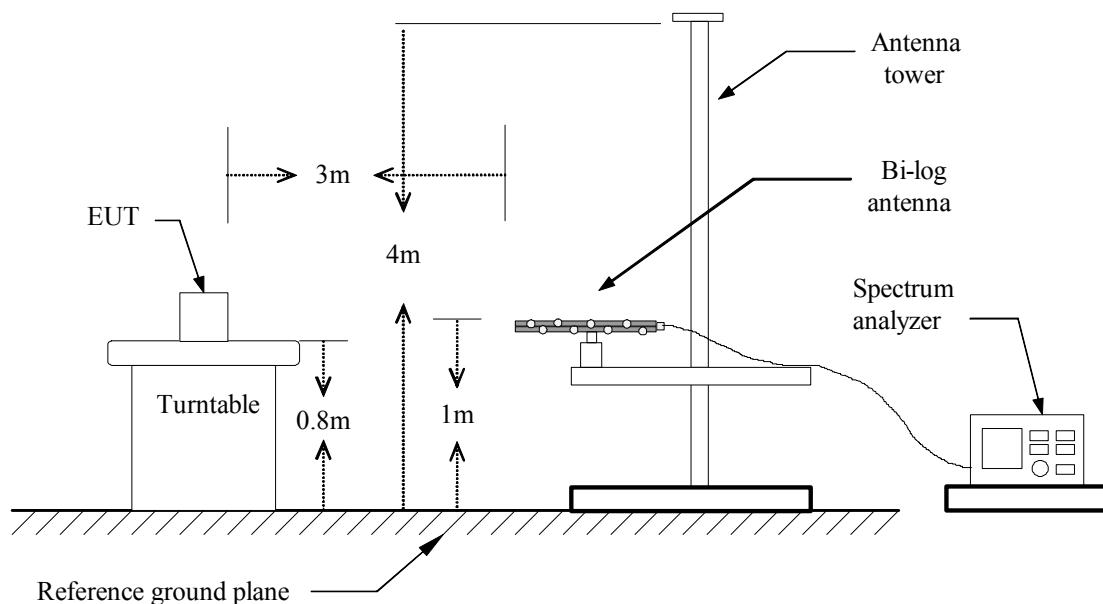
*Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

2. In the emission table above, the tighter limit applies at the band edges.

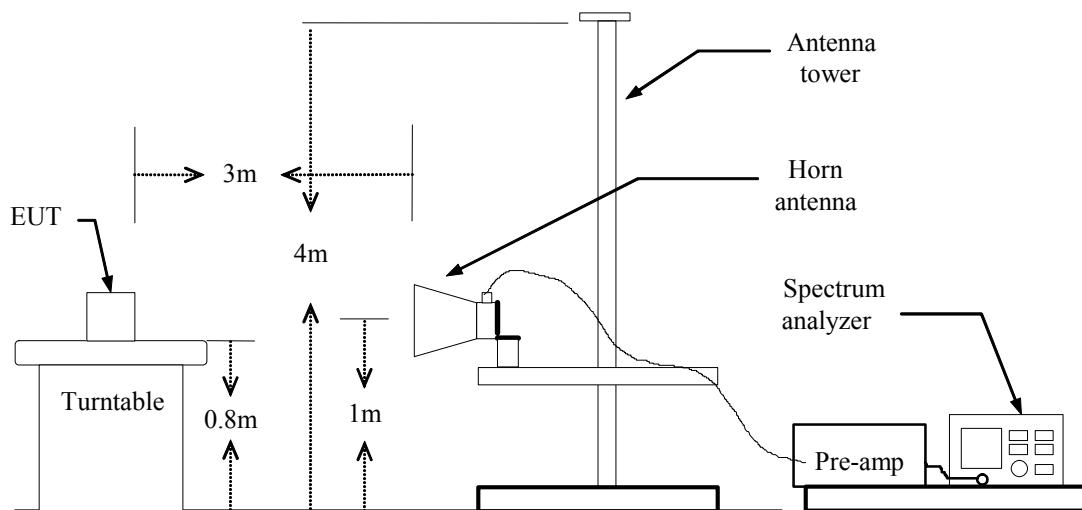
Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## Test Configuration

### Below 1 GHz



### Above 1 GHz





## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** March 6, 2009**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
59.10	V	48.65	-14.75	33.91	40.00	-6.09	Peak
432.55	V	46.54	-5.84	40.70	46.00	-5.30	Peak
527.93	V	44.95	-3.36	41.59	46.00	-4.41	Peak
623.32	V	41.22	-2.42	38.80	46.00	-7.20	Peak
671.82	V	38.90	-2.18	36.73	46.00	-9.27	Peak
720.32	V	34.37	-1.33	33.04	46.00	-12.96	Peak
114.07	H	39.35	-10.21	29.14	43.50	-14.36	Peak
274.12	H	44.36	-8.98	35.38	46.00	-10.62	Peak
367.88	H	46.44	-7.20	39.25	46.00	-6.75	Peak
432.55	H	44.46	-5.84	38.62	46.00	-7.38	Peak
720.32	H	33.95	-1.33	32.62	46.00	-13.38	Peak
796.30	H	35.93	0.17	36.10	46.00	-9.90	Peak

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).

**Above 1 GHz****For GFSK / DH5****Operation Mode:** TX / CH Low**Test Date:** February 27, 2009**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2000.00	V	53.67	---	-2.25	51.42	---	74.00	54.00	-2.58	Peak
2500.00	V	58.89	42.80	-1.42	57.47	41.38	74.00	54.00	-12.62	AVG
2730.00	V	51.61	---	-0.96	50.65	---	74.00	54.00	-3.35	Peak
4800.00	V	62.18	48.15	1.04	63.23	49.19	74.00	54.00	-4.81	AVG
N/A										
1593.33	H	53.58	---	-6.14	47.44	---	74.00	54.00	-6.56	Peak
2000.00	H	53.13	---	-2.25	50.88	---	74.00	54.00	-3.12	Peak
2500.00	H	49.69	---	-1.42	48.27	---	74.00	54.00	-5.73	Peak
2730.00	H	49.56	---	-0.96	48.59	---	74.00	54.00	-5.41	Peak
4800.00	H	60.68	46.26	1.04	61.72	47.30	74.00	54.00	-6.70	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH Mid**Test Date:** February 27, 2009**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1590.00	V	50.37	---	-6.17	44.20	---	74.00	54.00	-9.80	Peak
2000.00	V	53.04	---	-2.25	50.79	---	74.00	54.00	-3.21	Peak
2490.00	V	58.49	42.35	-1.44	57.06	40.91	74.00	54.00	-13.09	AVG
2726.67	V	51.43	---	-0.97	50.46	---	74.00	54.00	-3.54	Peak
4883.33	V	61.31	47.43	1.02	62.33	48.45	74.00	54.00	-5.55	AVG
N/A										
1626.67	H	52.76	---	-5.82	46.94	---	74.00	54.00	-7.06	Peak
2000.00	H	53.36	---	-2.25	51.11	---	74.00	54.00	-2.89	Peak
2486.67	H	49.35	---	-1.44	47.91	---	74.00	54.00	-6.09	Peak
2720.00	H	50.01	---	-0.98	49.03	---	74.00	54.00	-4.97	Peak
4883.33	H	60.89	46.51	1.02	61.91	47.53	74.00	54.00	-6.47	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH High**Test Date:** February 27, 2009**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1653.33	V	50.61	---	-5.56	45.05	---	74.00	54.00	-8.95	Peak
1990.00	V	53.10	---	-2.35	50.75	---	74.00	54.00	-3.25	Peak
2730.00	V	51.84	---	-0.96	50.88	---	74.00	54.00	-3.12	Peak
4958.33	V	61.21	45.78	1.00	62.21	46.78	74.00	54.00	-7.22	AVG
7441.67	V	49.06	---	3.95	53.01	---	74.00	54.00	-0.99	Peak
N/A										
1653.33	H	52.62	---	-5.56	47.06	---	74.00	54.00	-6.94	Peak
2000.00	H	52.97	---	-2.25	50.72	---	74.00	54.00	-3.28	Peak
2730.00	H	51.04	---	-0.96	50.08	---	74.00	54.00	-3.92	Peak
4958.33	H	59.40	45.48	1.00	60.40	46.48	74.00	54.00	-7.52	AVG
7441.67	H	48.69	47.67	3.95	52.64	51.62	74.00	54.00	-2.38	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**For 8DPSK / DH5****Operation Mode:** TX / CH Low**Test Date:** February 27, 2009**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1593.33	V	53.55	---	-6.14	47.41	---	74.00	54.00	-6.59	Peak
1990.00	V	53.13	---	-2.35	50.78	---	74.00	54.00	-3.22	Peak
2490.00	V	58.85	42.33	-1.44	57.41	40.89	74.00	54.00	-13.11	AVG
2726.67	V	51.64	---	-0.97	50.67	---	74.00	54.00	-3.33	Peak
4800.00	V	61.32	47.58	1.04	62.36	48.62	74.00	54.00	-5.38	AVG
N/A										
1593.33	H	53.37	---	-6.14	47.23	---	74.00	54.00	-6.77	Peak
2000.00	H	52.21	---	-2.25	49.96	---	74.00	54.00	-4.04	Peak
2500.00	H	50.39	---	-1.42	48.97	---	74.00	54.00	-5.03	Peak
2730.00	H	51.82	---	-0.96	50.85	---	74.00	54.00	-3.15	Peak
4800.00	H	60.81	46.13	1.04	61.85	47.17	74.00	54.00	-6.83	AVG
N/A										

**Remark:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

**Operation Mode:** TX / CH Mid**Test Date:** February 27, 2009**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1593.33	V	50.78	---	-6.14	44.65	---	74.00	54.00	-9.35	Peak
1990.00	V	54.22	---	-2.35	51.88	---	74.00	54.00	-2.12	Peak
2500.00	V	58.57	44.36	-1.42	57.15	42.94	74.00	54.00	-11.06	AVG
2730.00	V	51.23	---	-0.96	50.26	---	74.00	54.00	-3.74	Peak
4883.33	V	61.03	46.18	1.02	62.05	47.20	74.00	54.00	-6.80	AVG
N/A										
1600.00	H	53.40	---	-6.07	47.33	---	74.00	54.00	-6.67	Peak
2000.00	H	52.23	---	-2.25	49.98	---	74.00	54.00	-4.02	Peak
2726.67	H	50.81	---	-0.97	49.84	---	74.00	54.00	-4.16	Peak
4883.33	H	61.16	47.08	1.02	62.18	48.10	74.00	54.00	-5.90	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH High**Test Date:** February 27, 2009**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1990.00	V	54.12	---	-2.35	51.78	---	74.00	54.00	-2.22	Peak
2726.67	V	52.74	---	-0.97	51.77	---	74.00	54.00	-2.23	Peak
4958.33	V	61.16	46.83	1.00	62.16	47.83	74.00	54.00	-6.17	AVG
7441.67	V	49.81	47.42	3.95	51.37	52.38	74.00	54.00	-2.63	AVG
N/A										
1596.67	H	53.66	---	-6.11	47.55	---	74.00	54.00	-6.45	Peak
1653.33	H	52.92	---	-5.56	47.36	---	74.00	54.00	-6.64	Peak
1993.33	H	51.67	---	-2.31	49.36	---	74.00	54.00	-4.64	Peak
2730.00	H	51.07	---	-0.96	50.10	---	74.00	54.00	-3.90	Peak
4958.33	H	59.88	45.73	1.00	60.89	46.73	74.00	54.00	-7.27	AVG
7441.67	H	48.97	47.58	3.95	52.91	51.53	74.00	54.00	-2.47	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.10 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link

**Test Date:** January 21, 2009

**Temperature:** 20°C

**Tested by:** Alex Tsai

**Humidity:** 58% RH

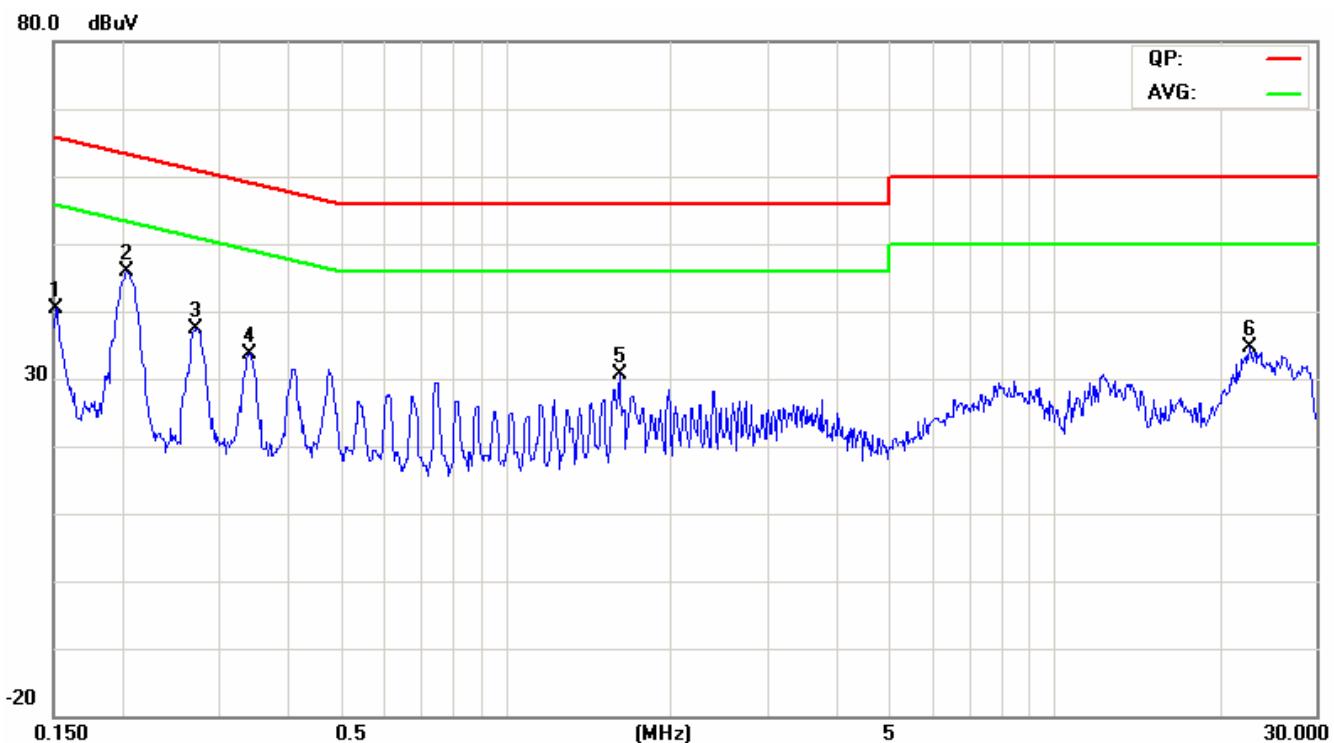
Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.151	15.41	10.69	9.65	25.06	20.34	66.05	56.05	-40.99	-35.71	L1
0.2036	34.86	25.59	9.60	44.46	35.19	63.46	53.46	-19.00	-18.27	L1
0.2719	25.94	17.61	9.60	35.54	27.21	61.06	51.06	-25.52	-23.85	L1
0.3413	21.98	16.77	9.60	31.58	26.37	59.17	49.17	-27.59	-22.80	L1
1.6236	5.32	0.14	9.66	14.98	9.80	56.00	46.00	-41.02	-36.20	L1
22.5614	21.61	15.97	10.45	32.06	26.42	60.00	50.00	-27.94	-23.58	L1
0.151	0.01	-3.47	9.65	9.66	6.18	66.00	56.01	-56.34	-49.83	L2
0.2048	35.23	25.61	9.60	44.83	35.21	63.41	53.41	-18.58	-18.20	L2
0.2727	25.97	17.96	9.60	35.57	27.56	61.03	51.04	-25.46	-23.48	L2
0.4087	21.05	12.88	9.59	30.64	22.47	57.67	47.67	-27.03	-25.20	L2
21.6734	16.97	10.10	10.50	27.47	20.60	60.00	50.00	-32.53	-29.40	L2
26.5182	19.39	14.02	10.73	30.12	24.75	60.00	50.00	-29.88	-25.25	L2

### **Remark:**

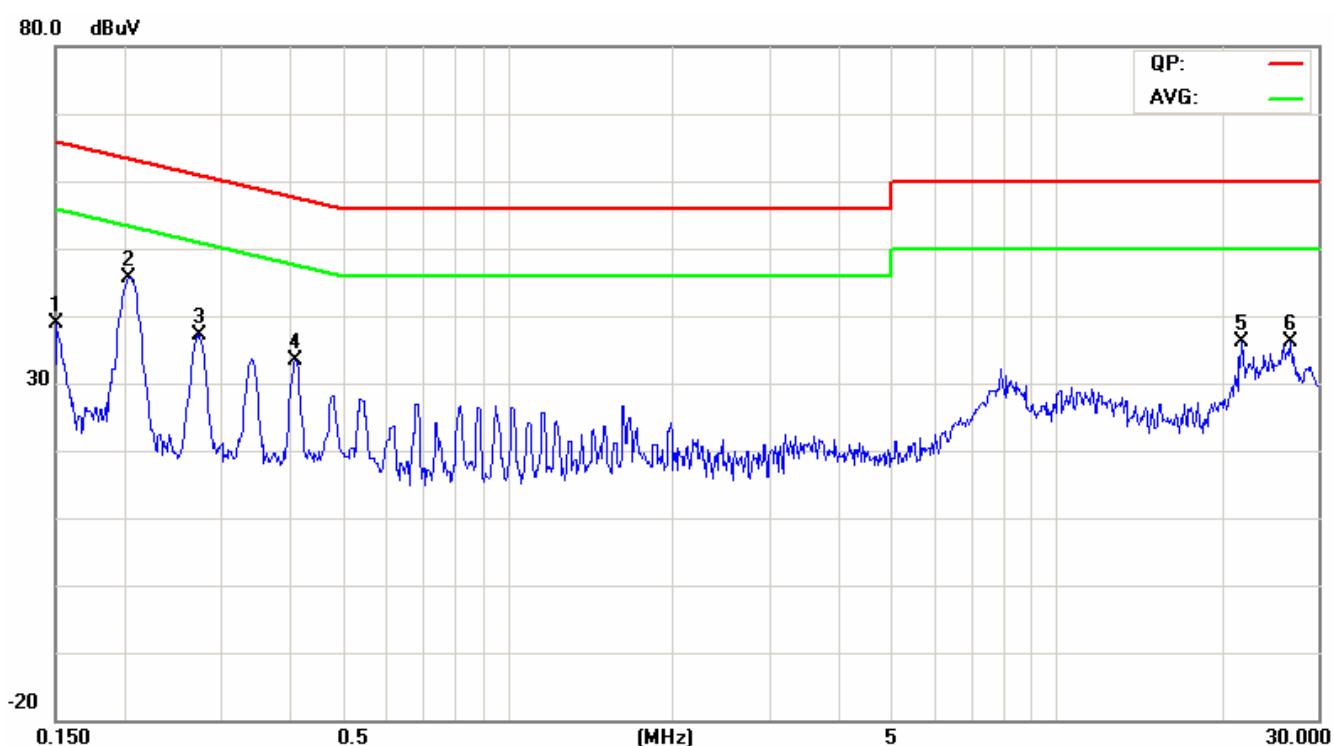
1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

## Test Plots

### *Conducted emissions (Line 1)*



### *Conducted emissions (Line 2)*





## APPENDIX I

## RADIO FREQUENCY EXPOSURE

### LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	10.4" Fanless Mobile Clinical Assistant
<b>Frequency band (Operating)</b>	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Bluetooth: 2.402GHz ~ 2.480GHz
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure ( $S = 5mW/cm^2$ ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ( $S=1mW/cm^2$ )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	1.19 dBm (1.32mW)
<b>Antenna gain (Max)</b>	-3.3 dBi (Numeric gain: 0.67)
<b>Evaluation applied</b>	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A

#### ***Remark:***

1. The maximum output power is 1.19 dBm (1.32mW) at 2480MHz (with 0.67 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm<sup>2</sup> even if the calculation indicates that the power density would be larger.

### TEST RESULTS

No non-compliance noted.

#### ***Remark:***

Please refer to the separated SAR report.