


Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

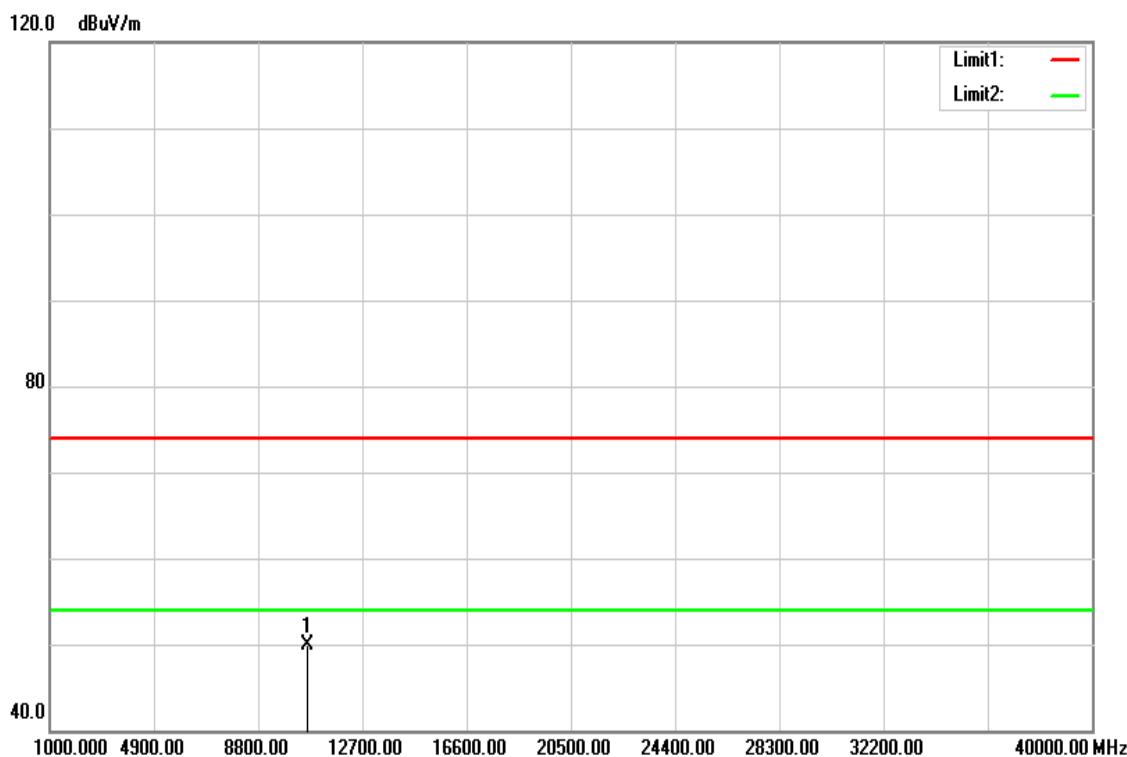

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10620.000	34.78	15.20	49.98	74.00	-24.02	peak
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T170908D07-RP4

Above 1G Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

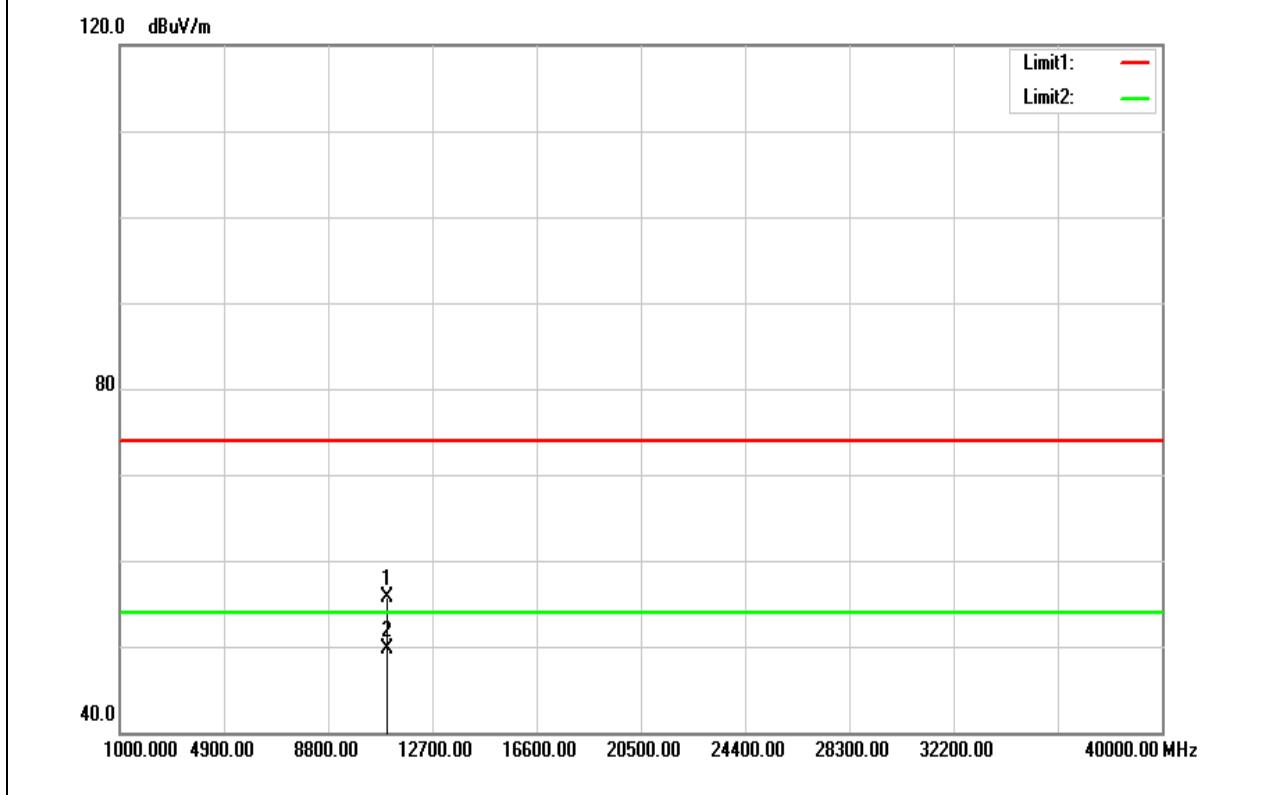


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11000.000	39.73	16.06	55.79	74.00	-18.21	peak
11000.000	33.55	16.06	49.61	54.00	-4.39	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

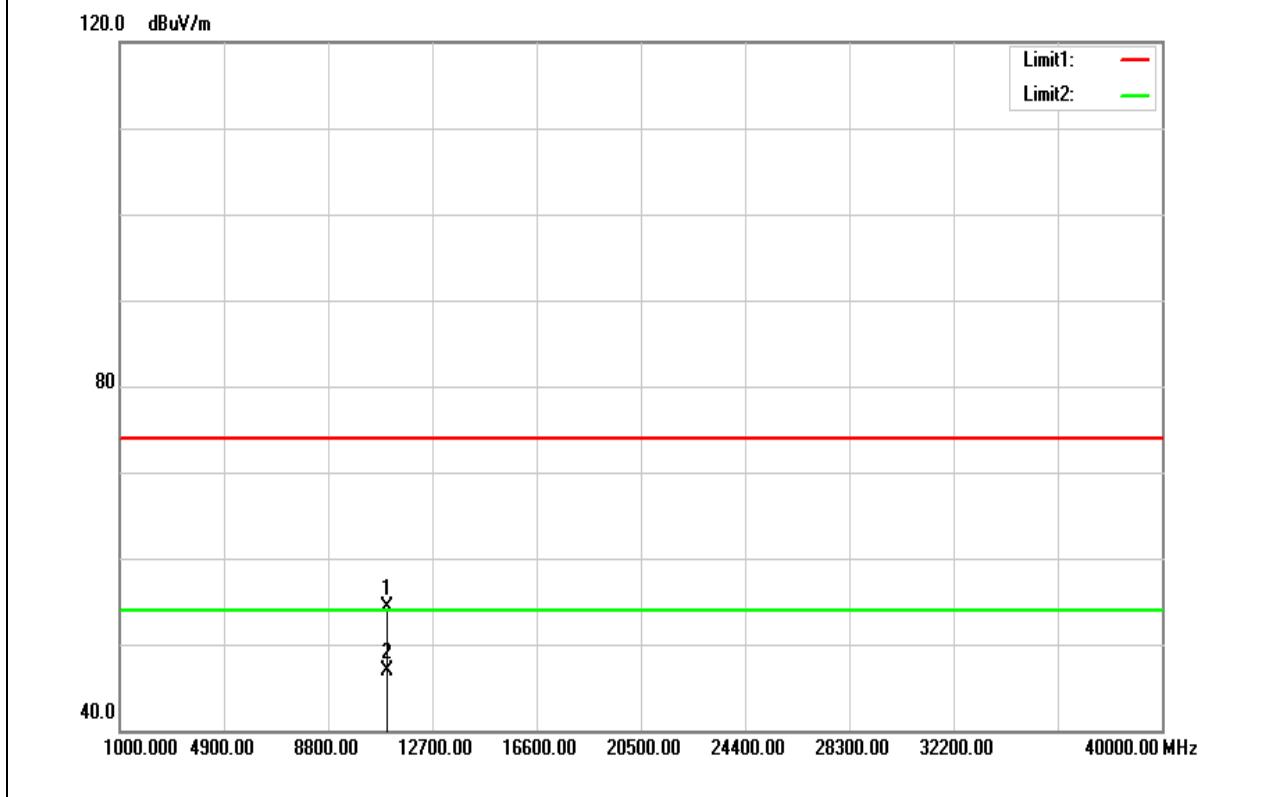


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11000.000	38.22	16.06	54.28	74.00	-19.72	peak
11000.000	30.80	16.06	46.86	54.00	-7.14	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

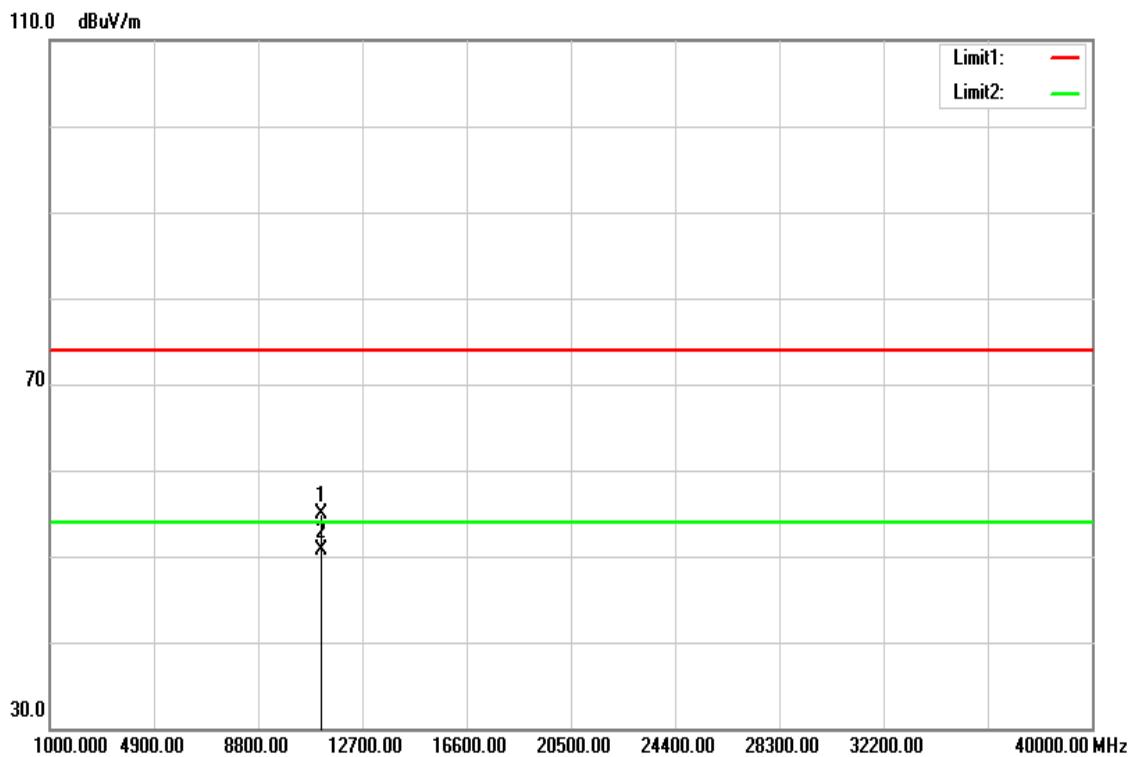


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11160.000	38.77	16.07	54.84	74.00	-19.16	peak
11160.000	34.59	16.07	50.66	54.00	-3.34	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

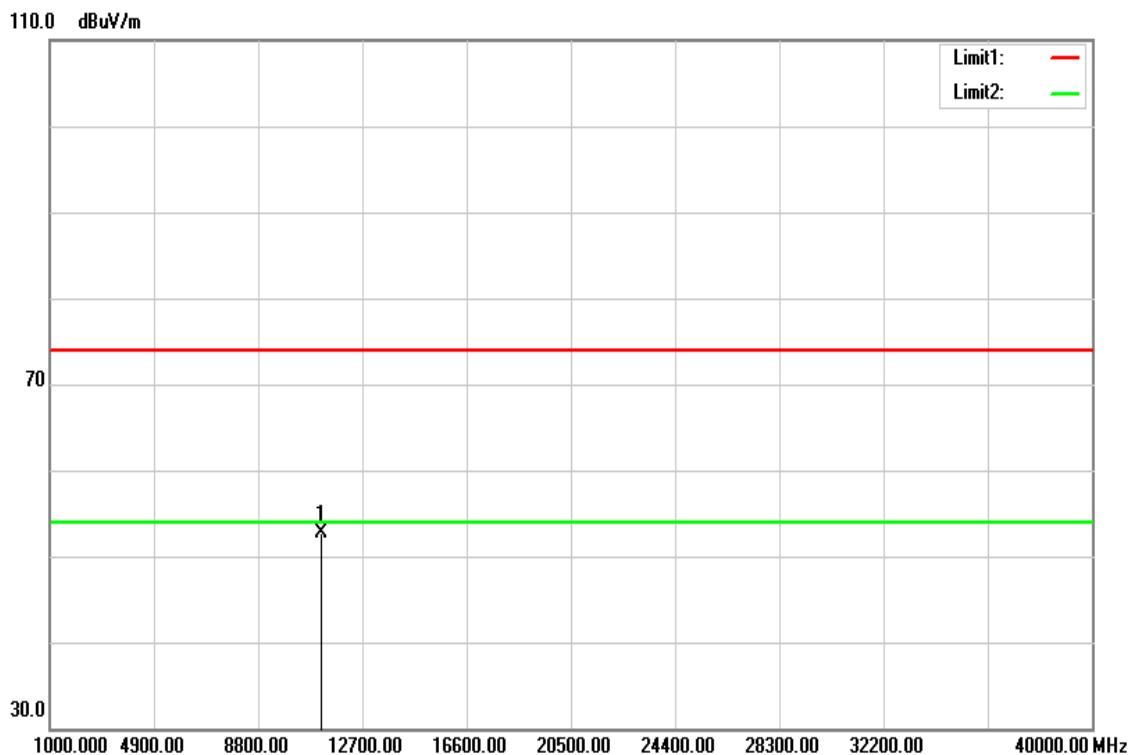


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11160.000	36.73	16.07	52.80	74.00	-21.20	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

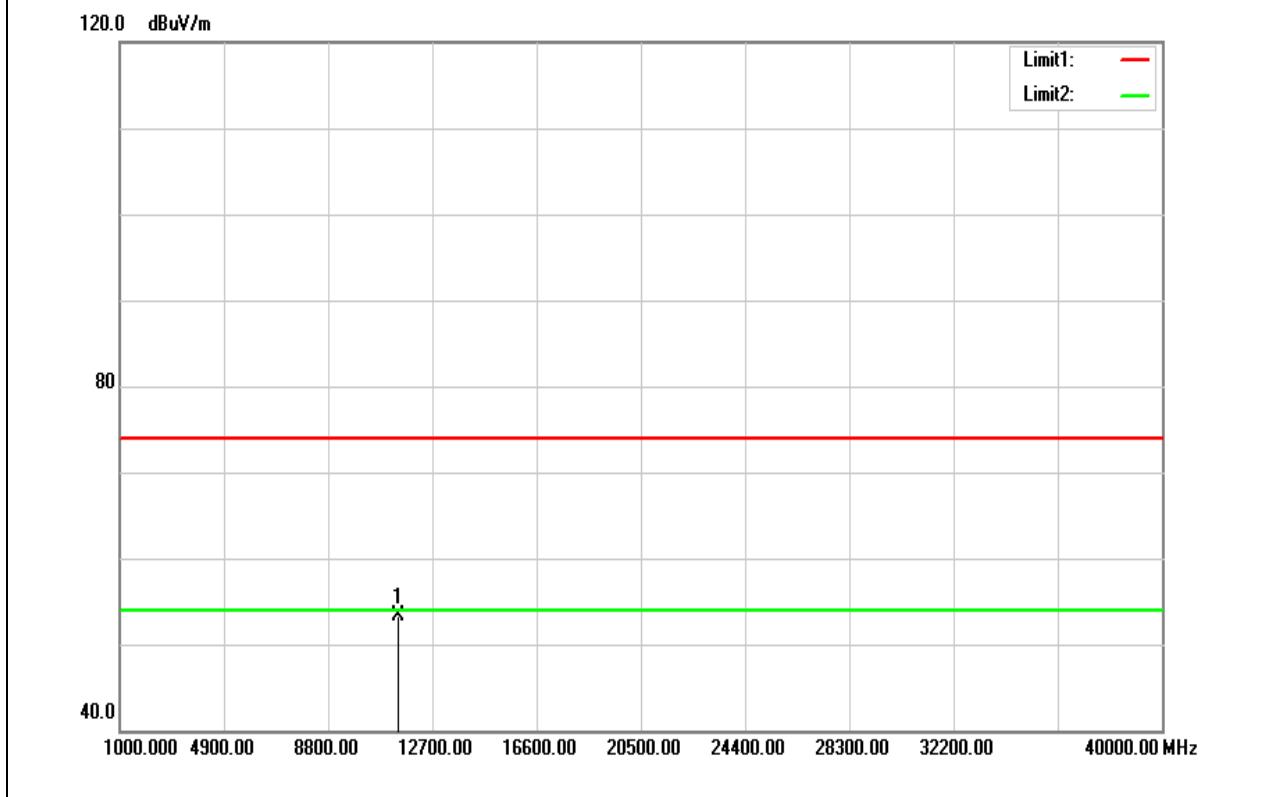

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11400.000	37.22	16.08	53.30	74.00	-20.70	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V




Frequency (MHz)	Reading (dB _{UV})	Correct Factor (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
11400.000	33.89	16.08	49.97	74.00	-24.03	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

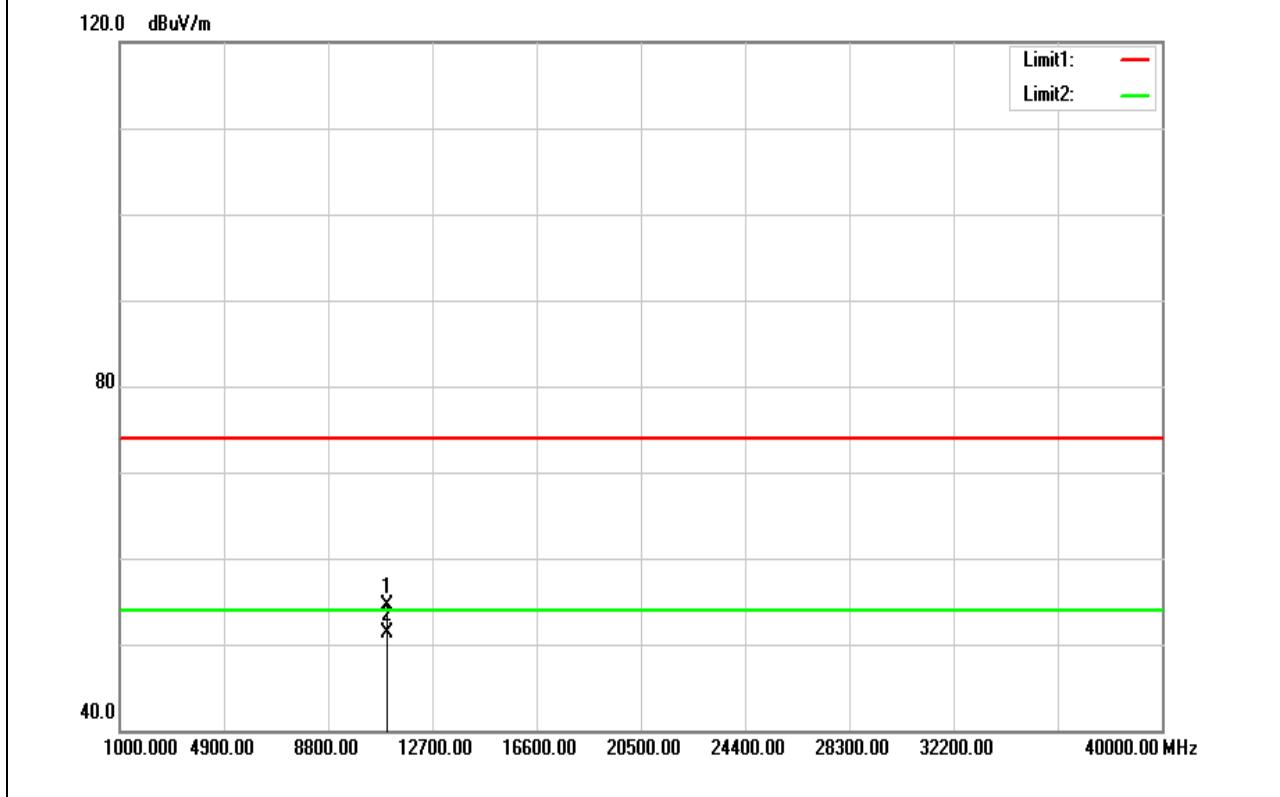


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11000.000	38.38	16.06	54.44	74.00	-19.56	peak
11000.000	35.17	16.06	51.23	54.00	-2.77	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

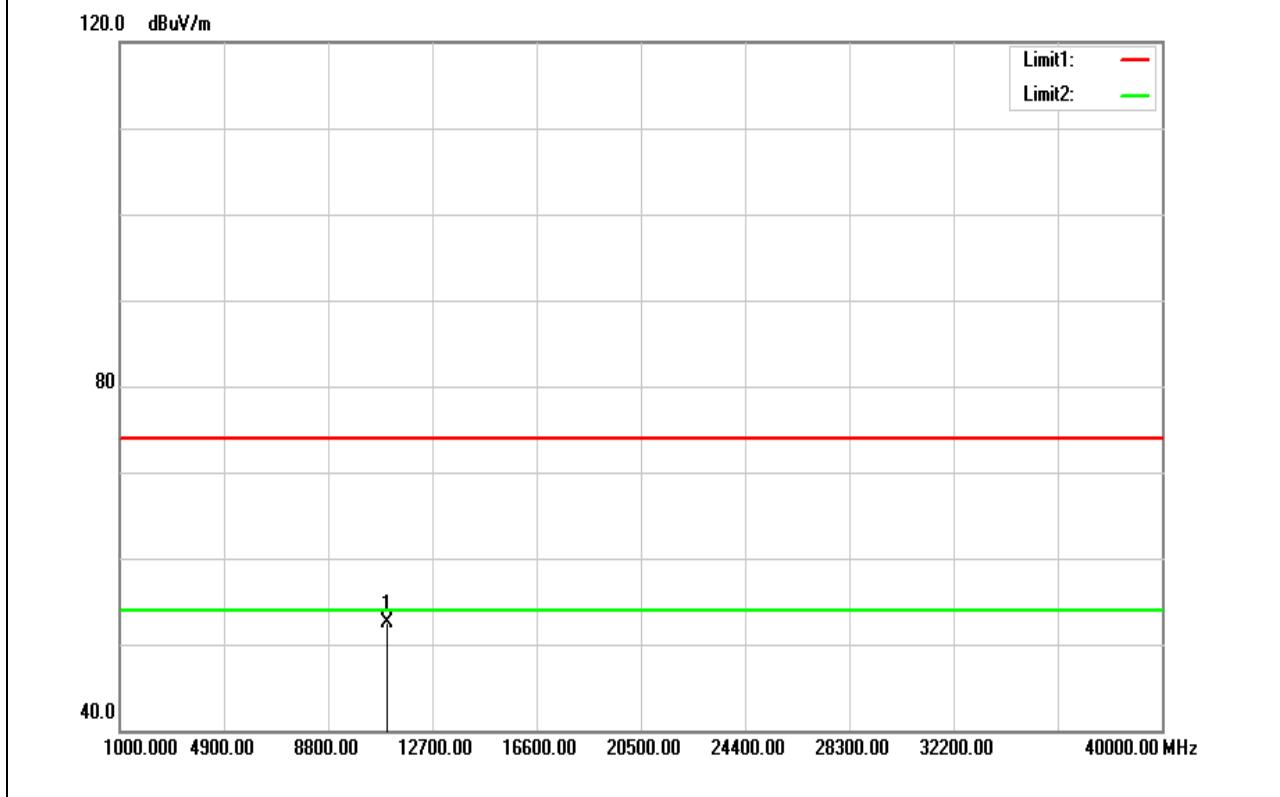


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11000.000	36.43	16.06	52.49	74.00	-21.51	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

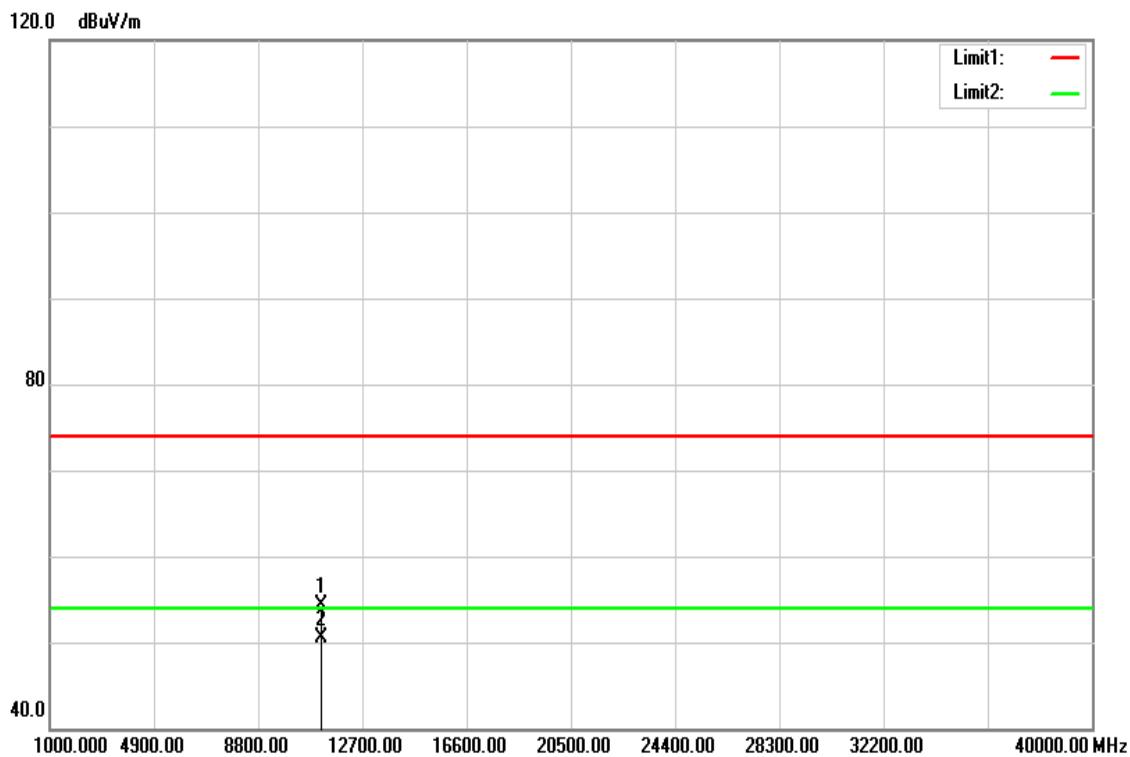


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11160.000	38.16	16.07	54.23	74.00	-19.77	peak
11160.000	34.42	16.07	50.49	54.00	-3.51	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

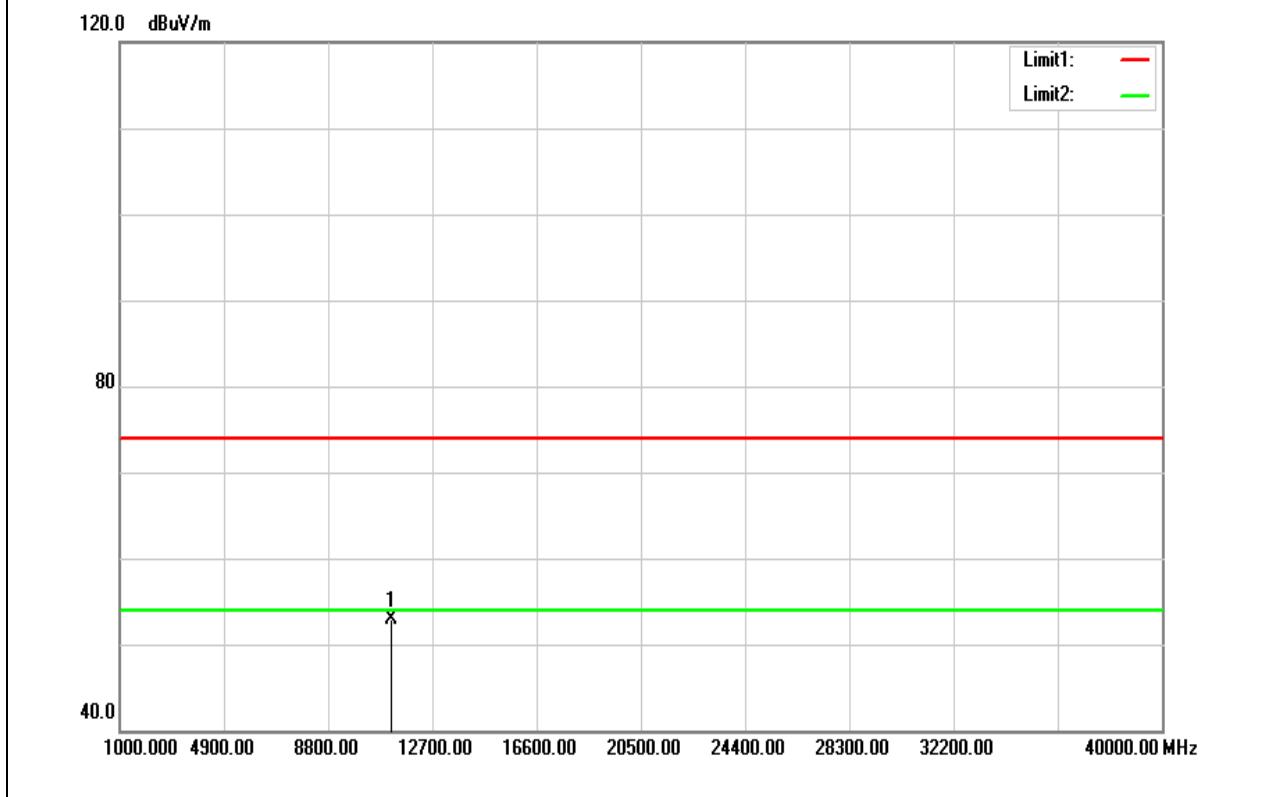


Frequency (MHz)	Reading (dB _{UV})	Correct Factor (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
11160.000	36.92	16.07	52.99	74.00	-21.01	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

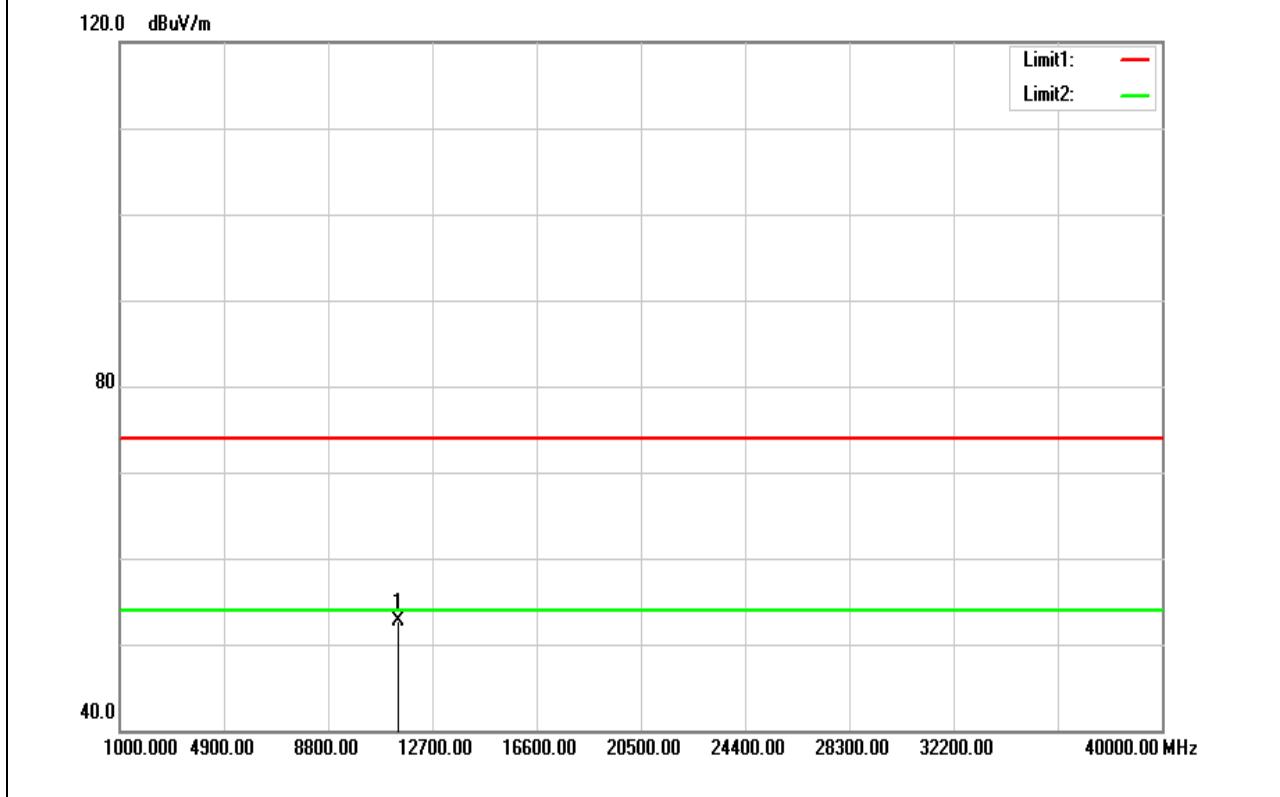


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11400.000	36.65	16.08	52.73	74.00	-21.27	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

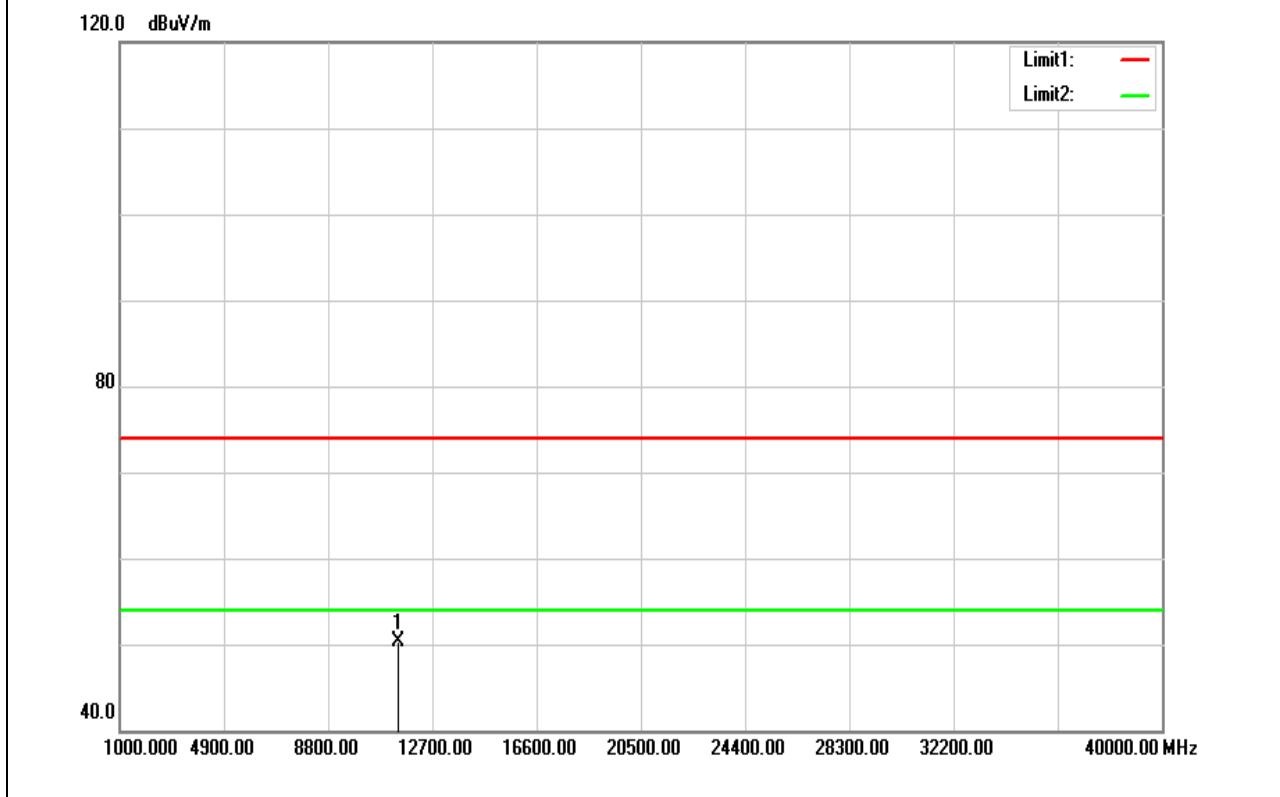


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11400.000	34.23	16.08	50.31	74.00	-23.69	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

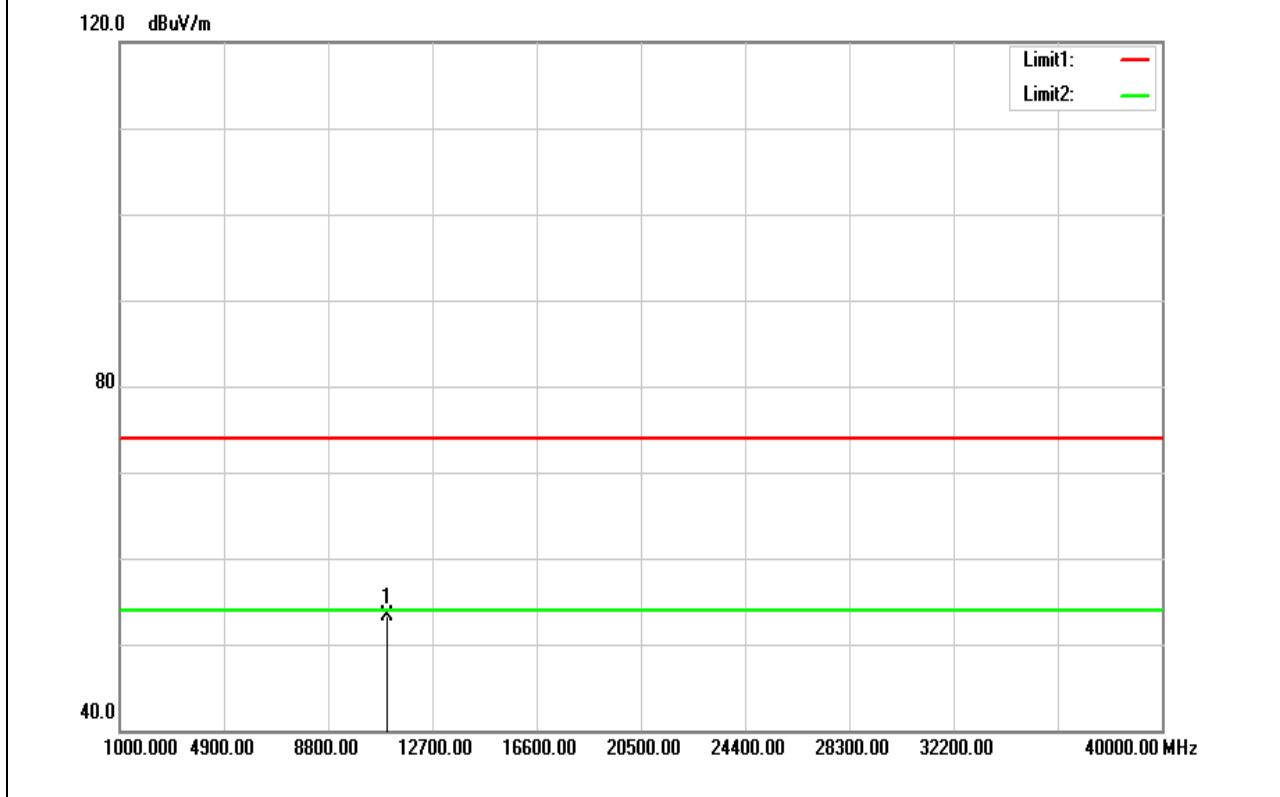


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11020.000	37.26	16.05	53.31	74.00	-20.69	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

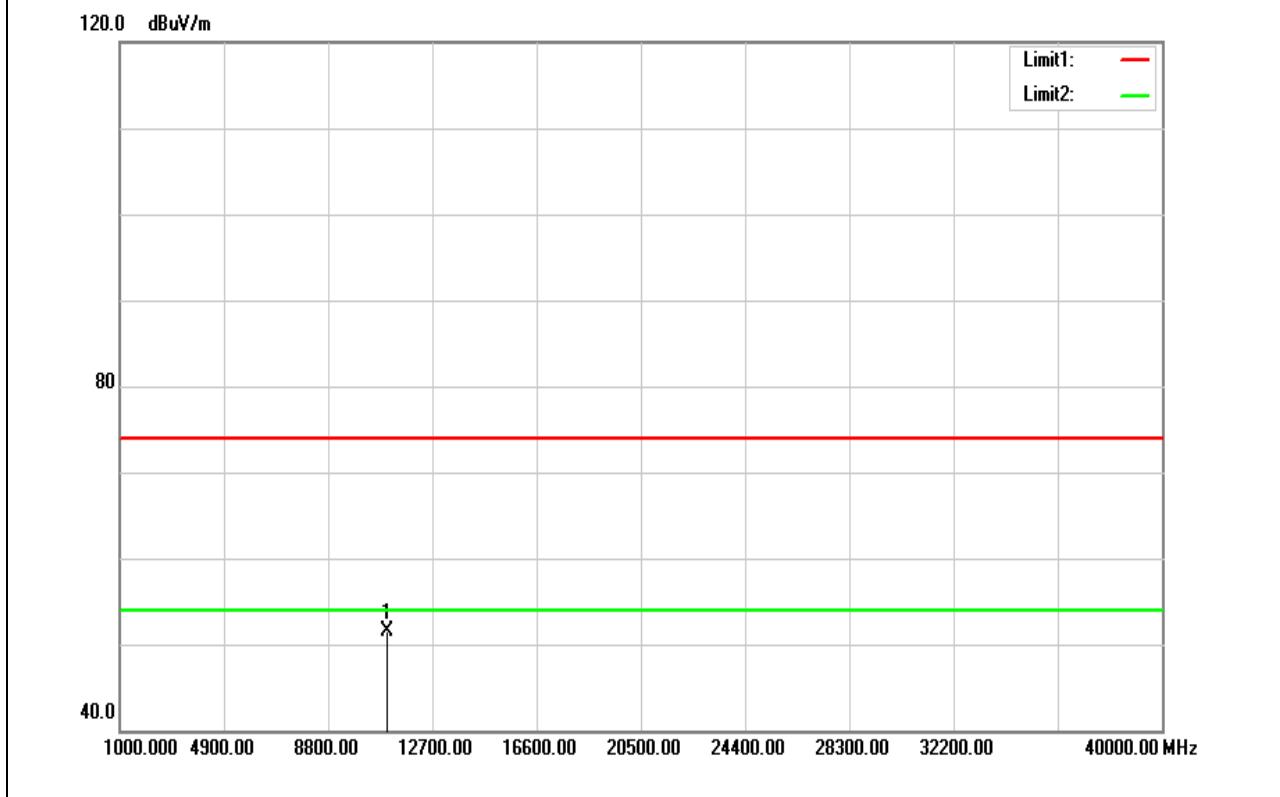


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11020.000	35.42	16.05	51.47	74.00	-22.53	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

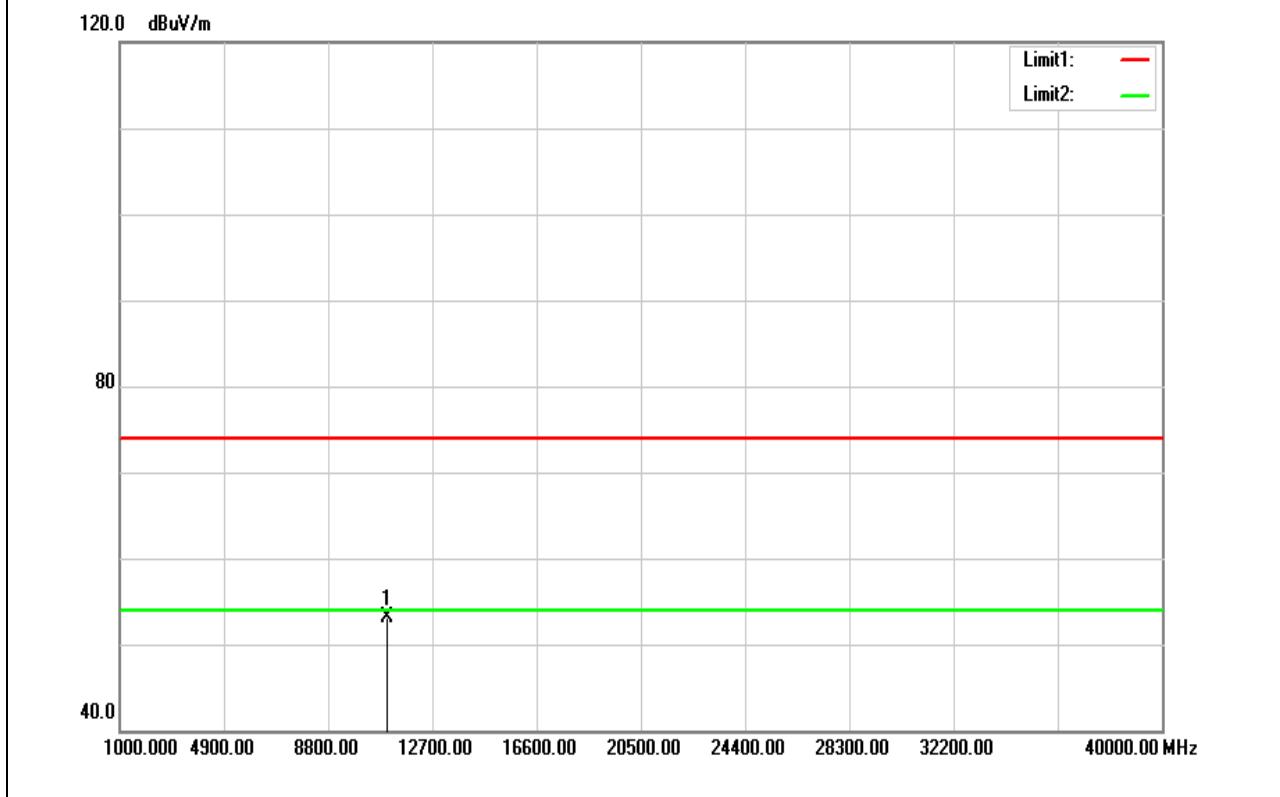


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11000.000	37.10	16.06	53.16	74.00	-20.84	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

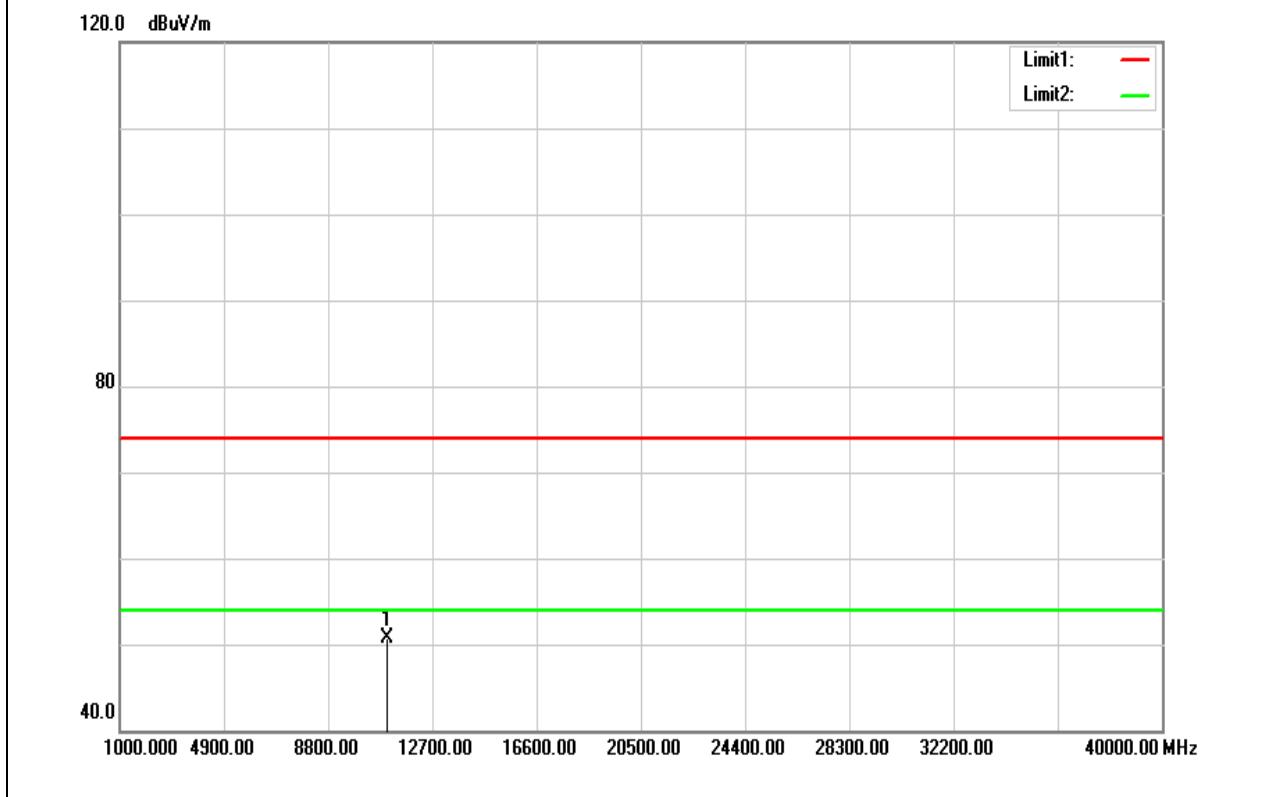


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11000.000	34.70	16.06	50.76	74.00	-23.24	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

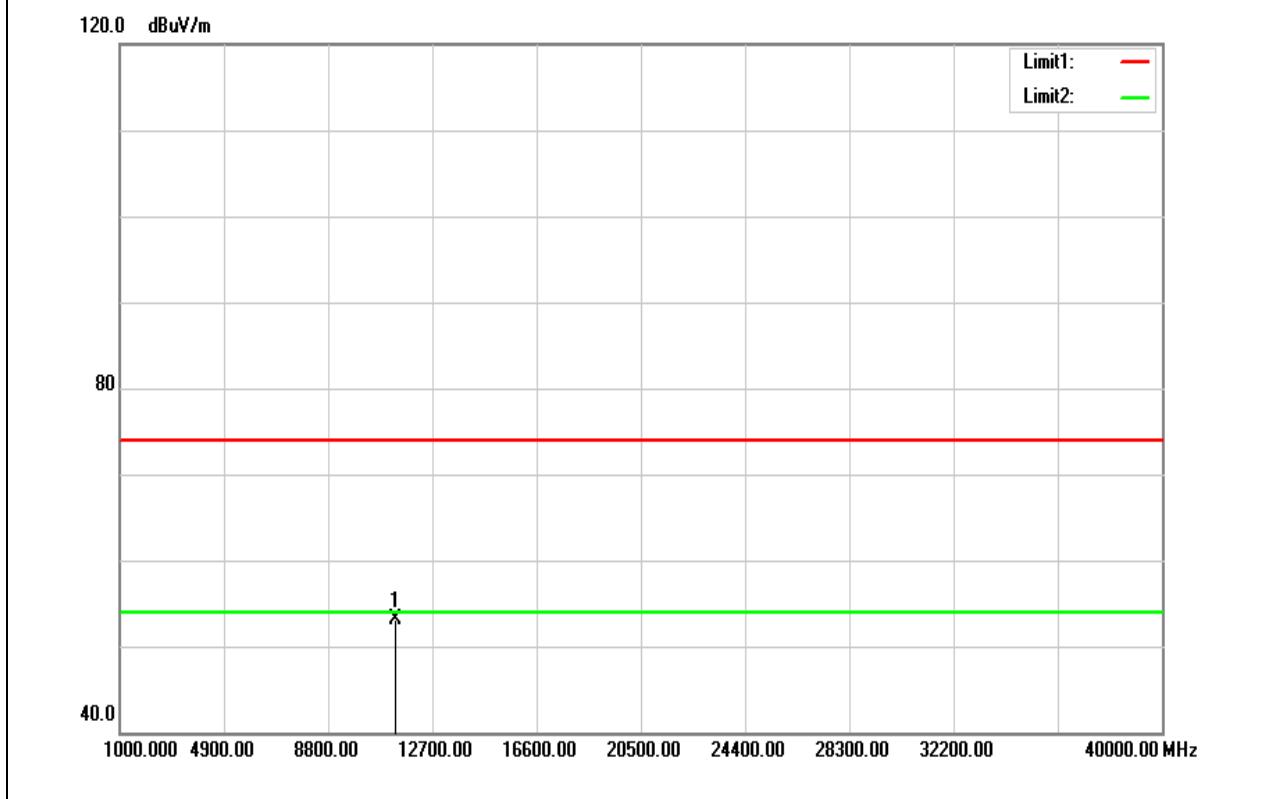


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11340.000	36.99	16.08	53.07	74.00	-20.93	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

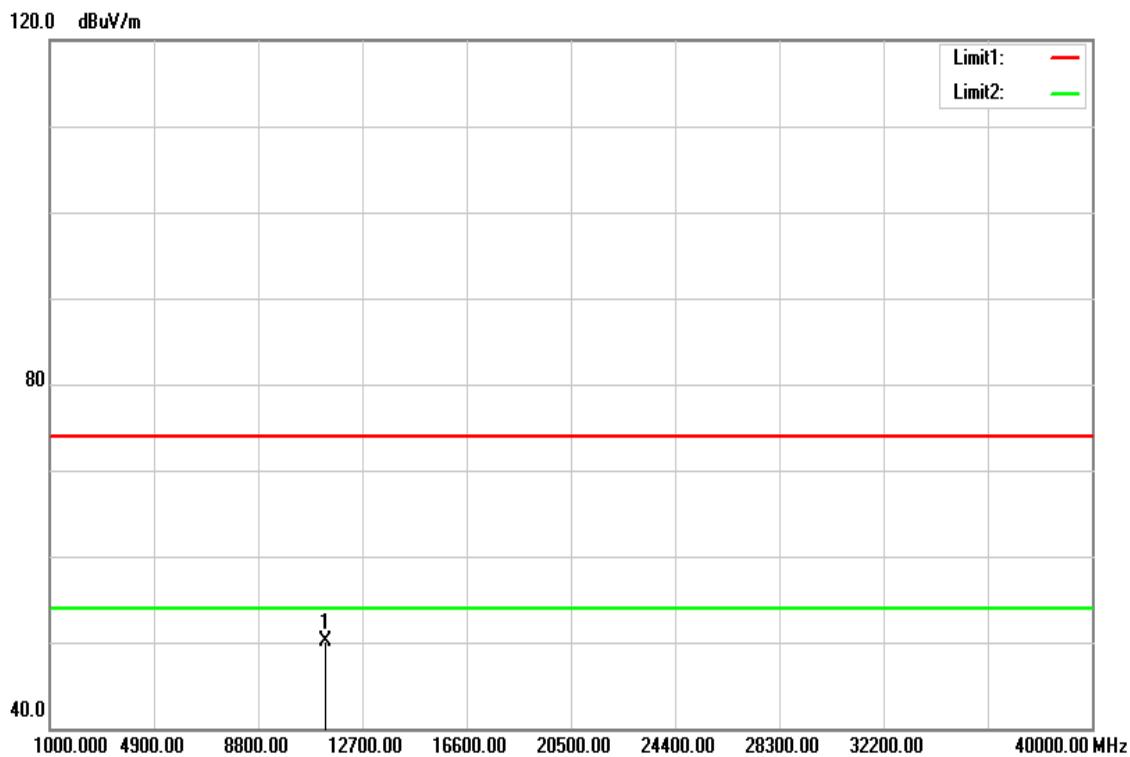

Frequency (MHz)	Reading (dB _{uV})	Correct Factor (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
11340.000	33.93	16.08	50.01	74.00	-23.99	peak
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T170908D07-RP4

Above 1G Test Data for UNII-3

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

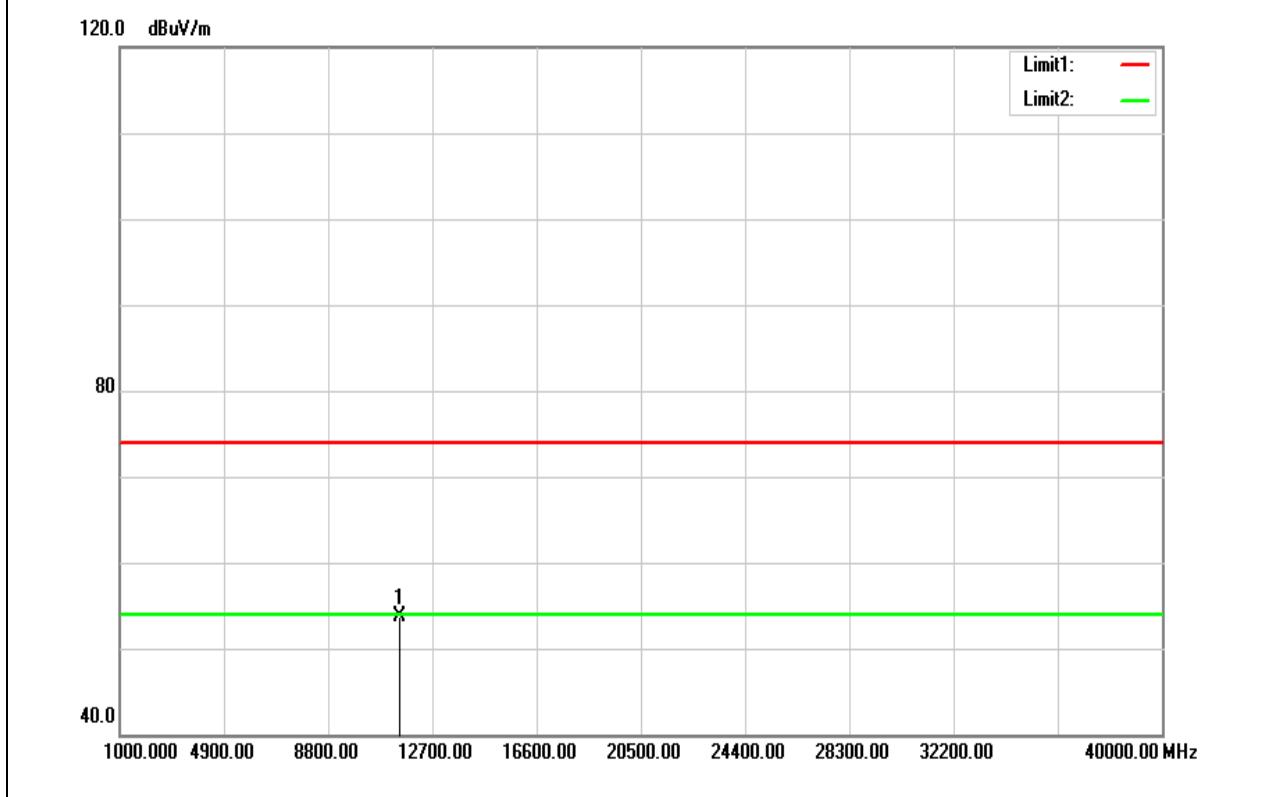


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11490.000	37.69	16.09	53.78	74.00	-20.22	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

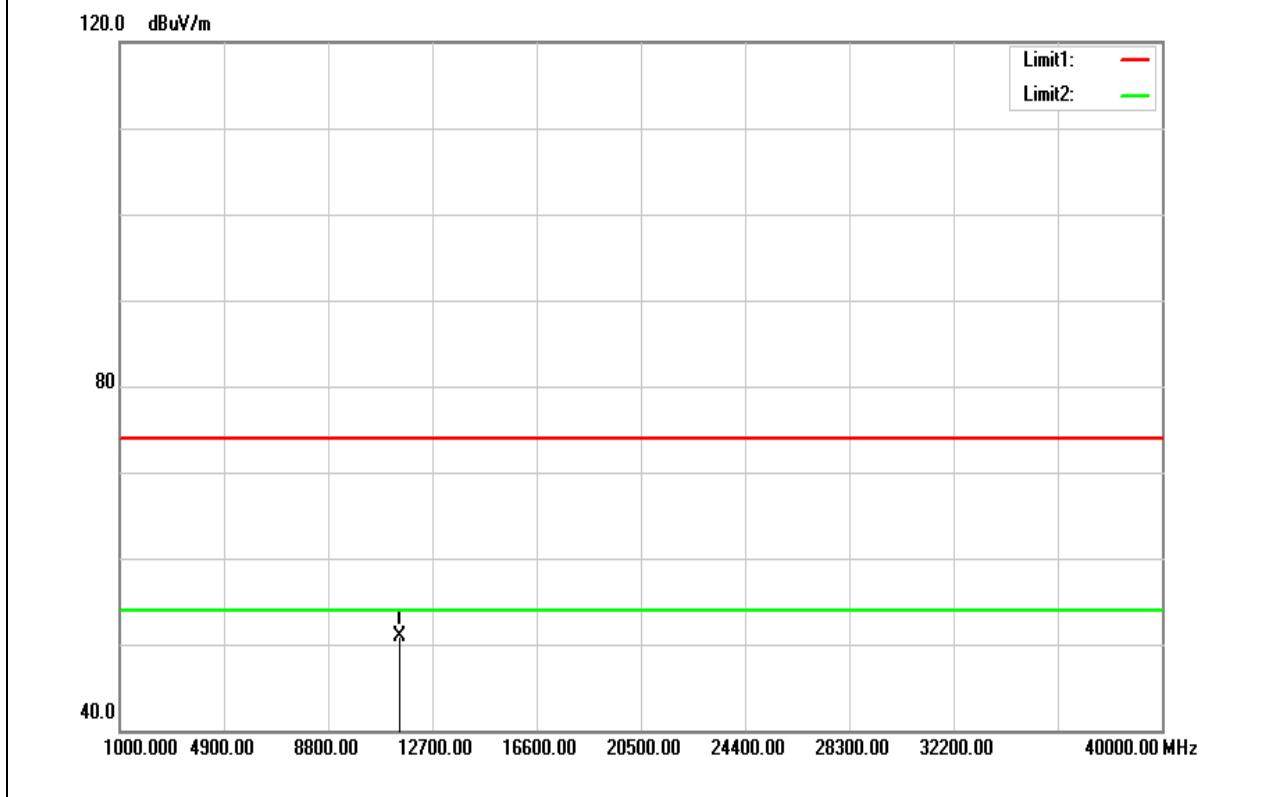


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11490.000	34.84	16.09	50.93	74.00	-23.07	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

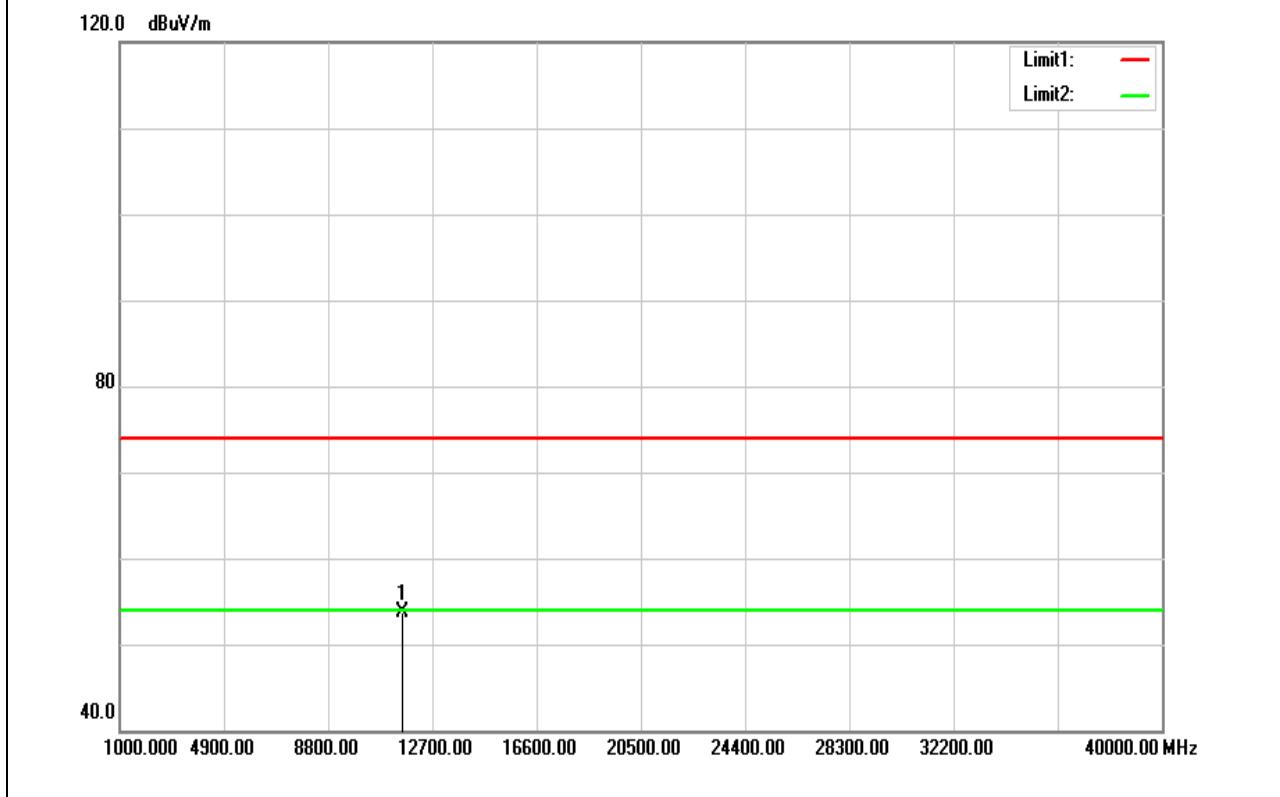


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11570.000	37.77	16.01	53.78	74.00	-20.22	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

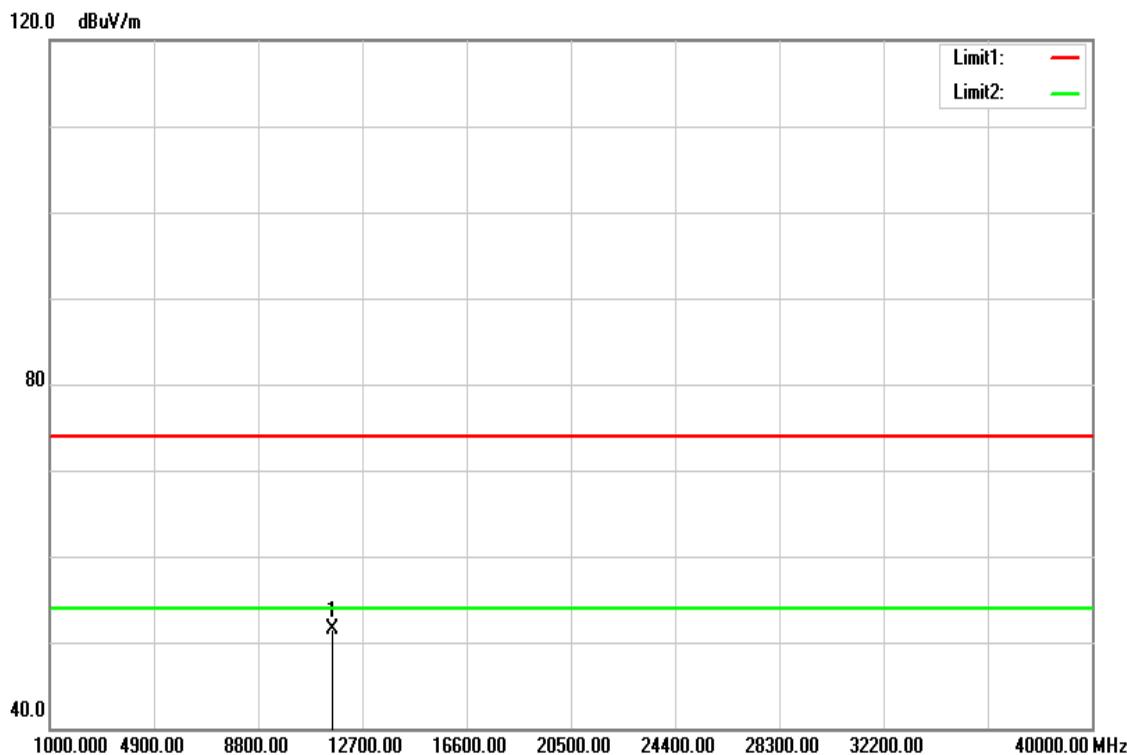


Frequency (MHz)	Reading (dB _{UV})	Correct Factor (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
11570.000	35.53	16.01	51.54	74.00	-22.46	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

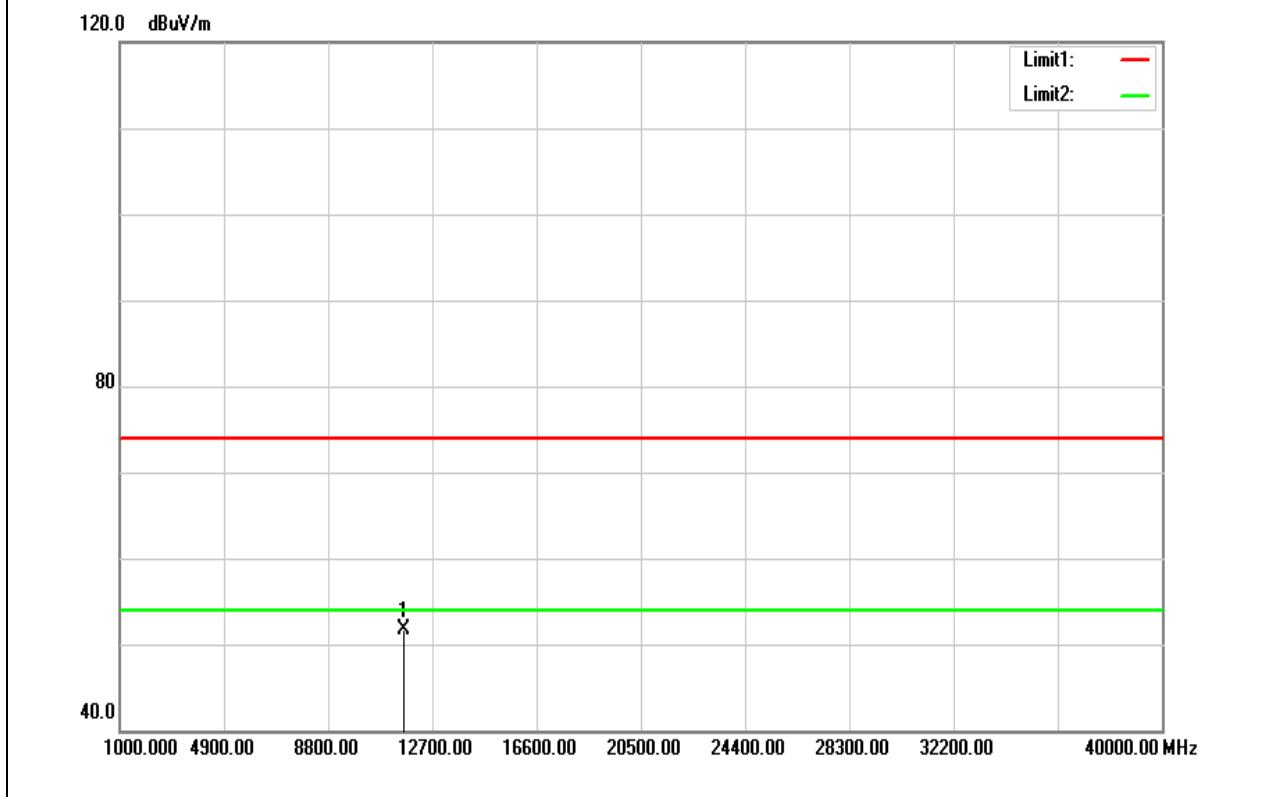


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11650.000	35.78	15.93	51.71	74.00	-22.29	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

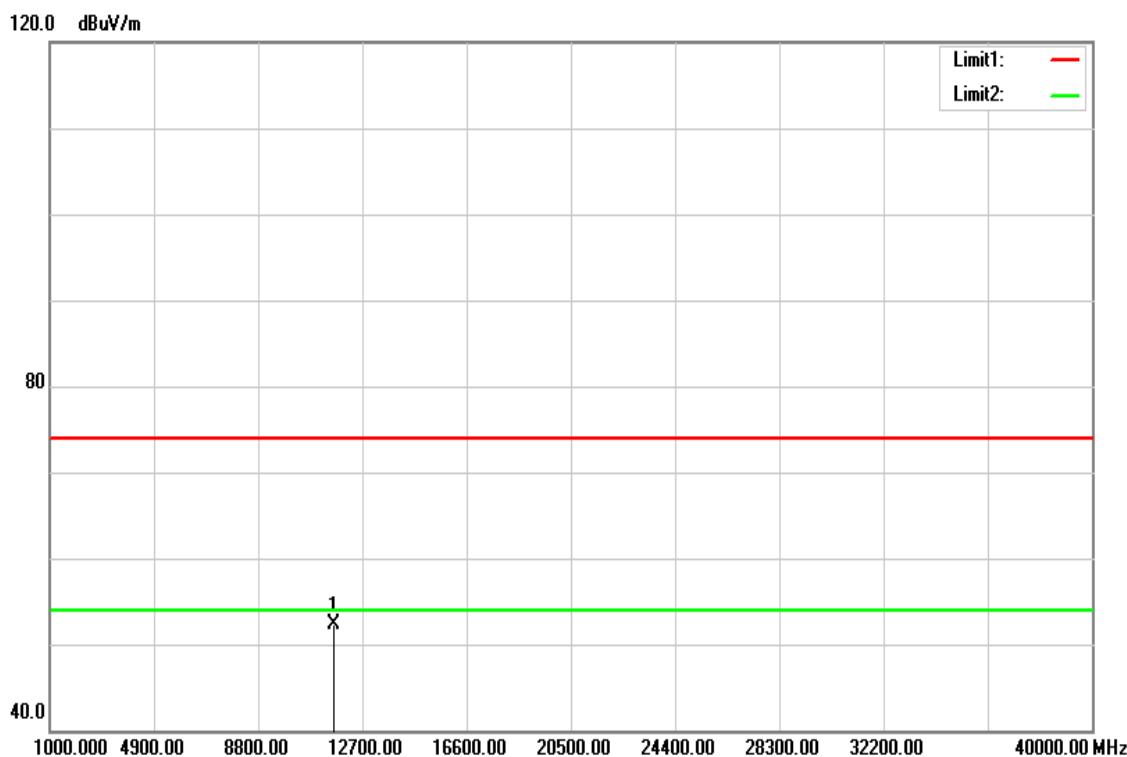


Frequency (MHz)	Reading (dB _{UV})	Correct Factor (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
11650.000	36.37	15.93	52.30	74.00	-21.70	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

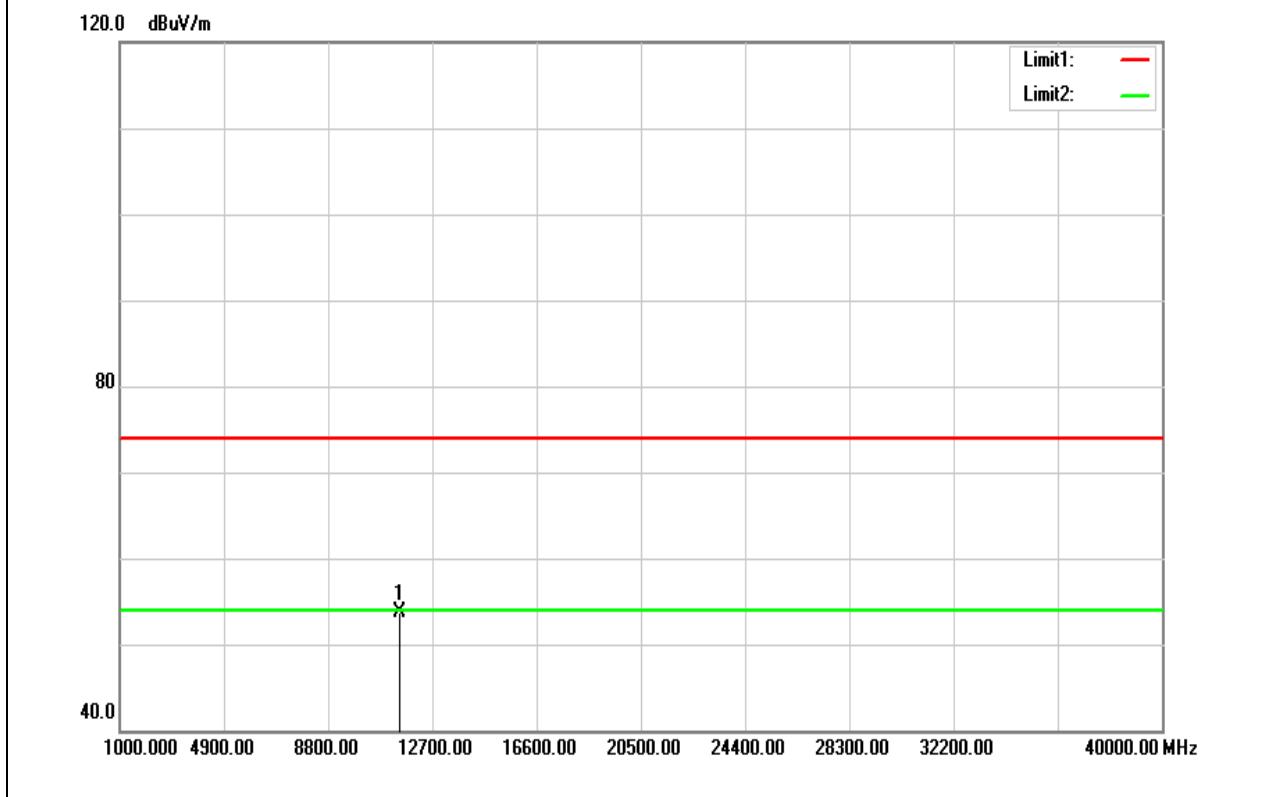


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11490.000	37.58	16.09	53.67	74.00	-20.33	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

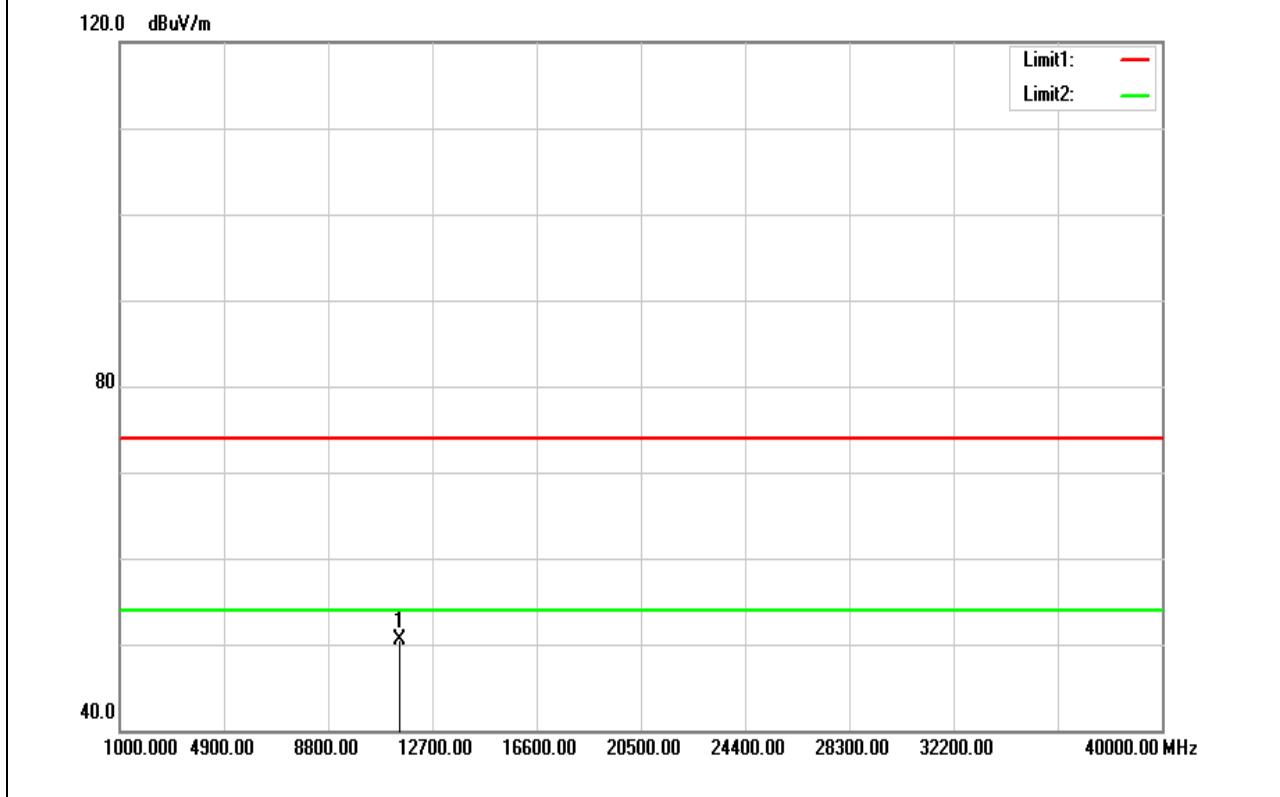


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11490.000	34.48	16.09	50.57	74.00	-23.43	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

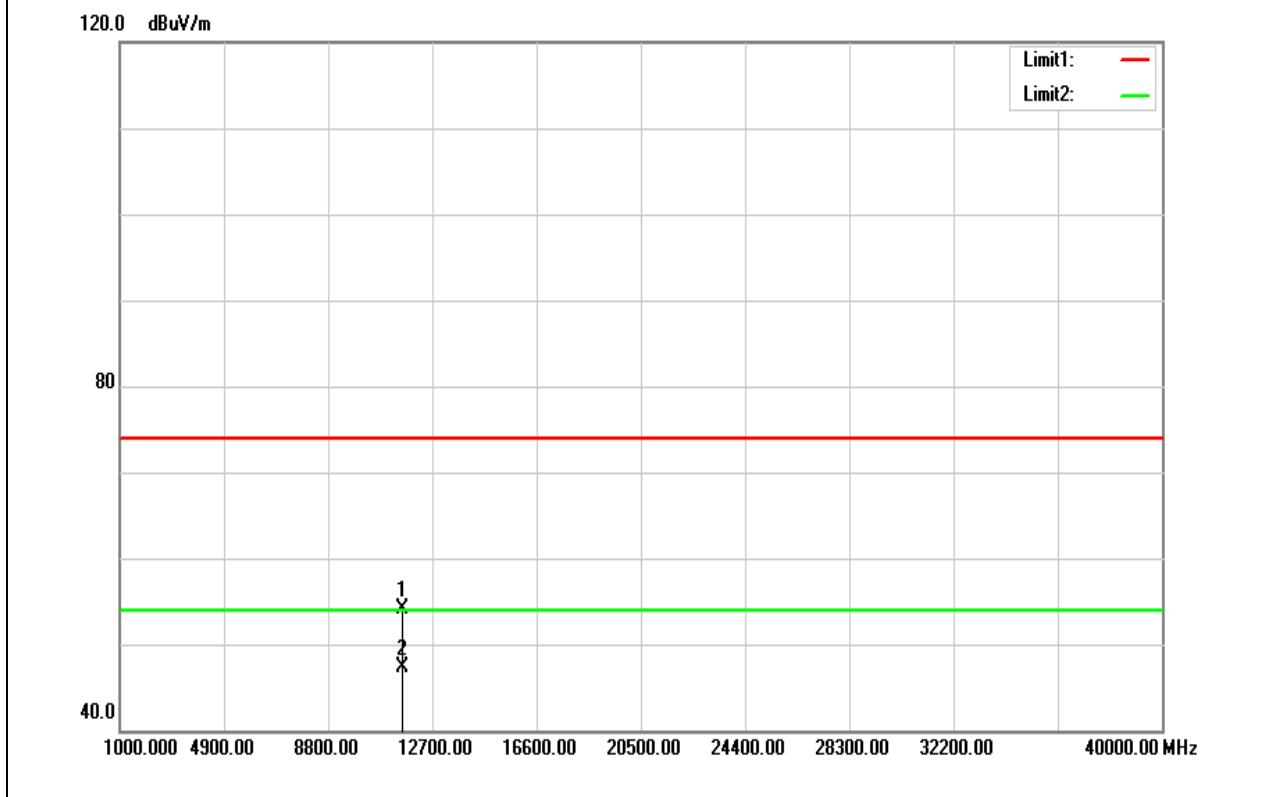


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11570.000	38.02	16.01	54.03	74.00	-19.97	peak
11570.000	31.22	16.01	47.23	54.00	-6.77	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

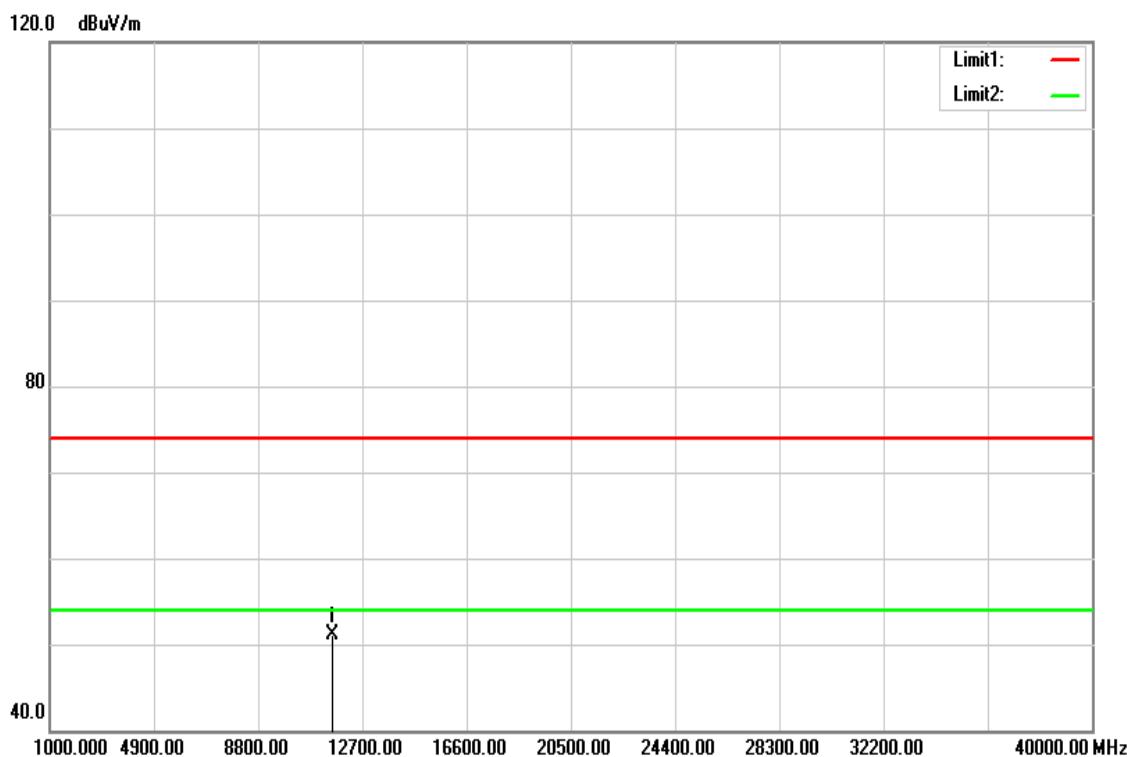


Frequency (MHz)	Reading (dB _{UV})	Correct Factor (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
11570.000	35.16	16.01	51.17	74.00	-22.83	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

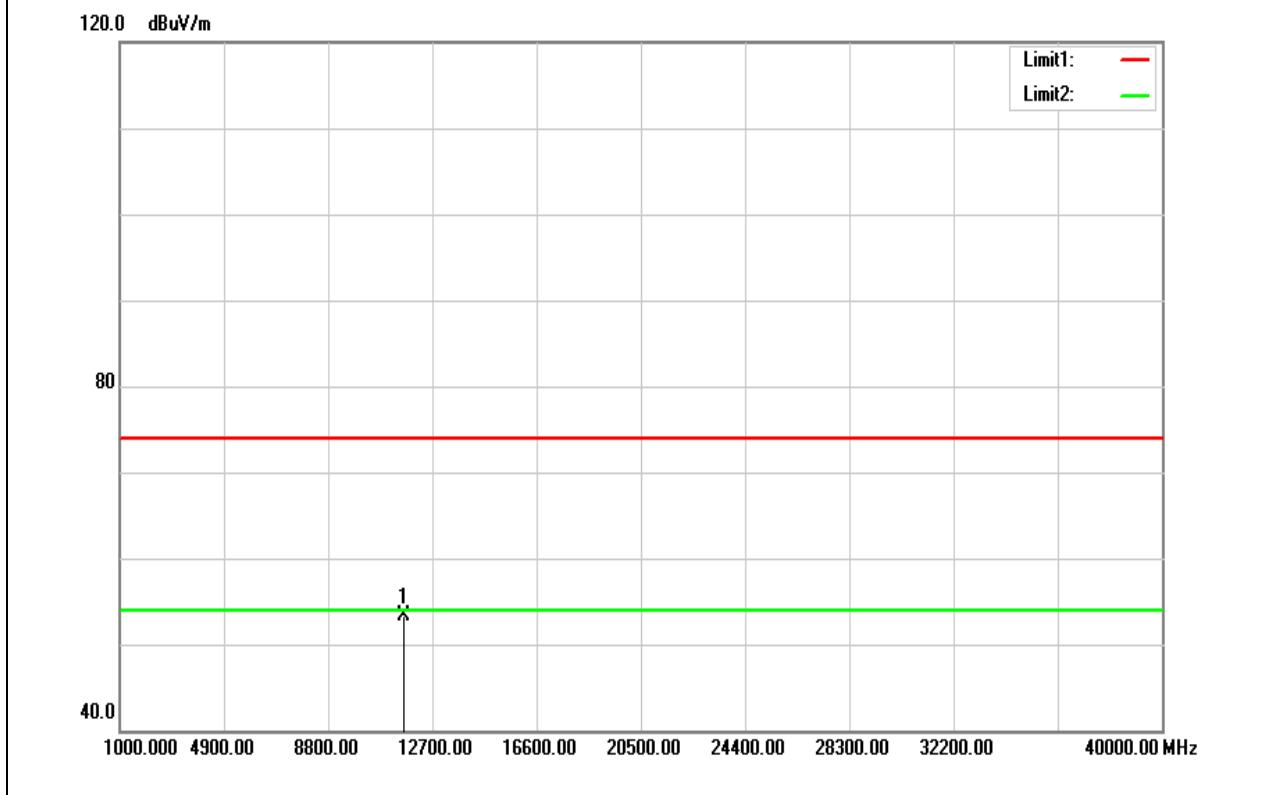


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11650.000	37.36	15.93	53.29	74.00	-20.71	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

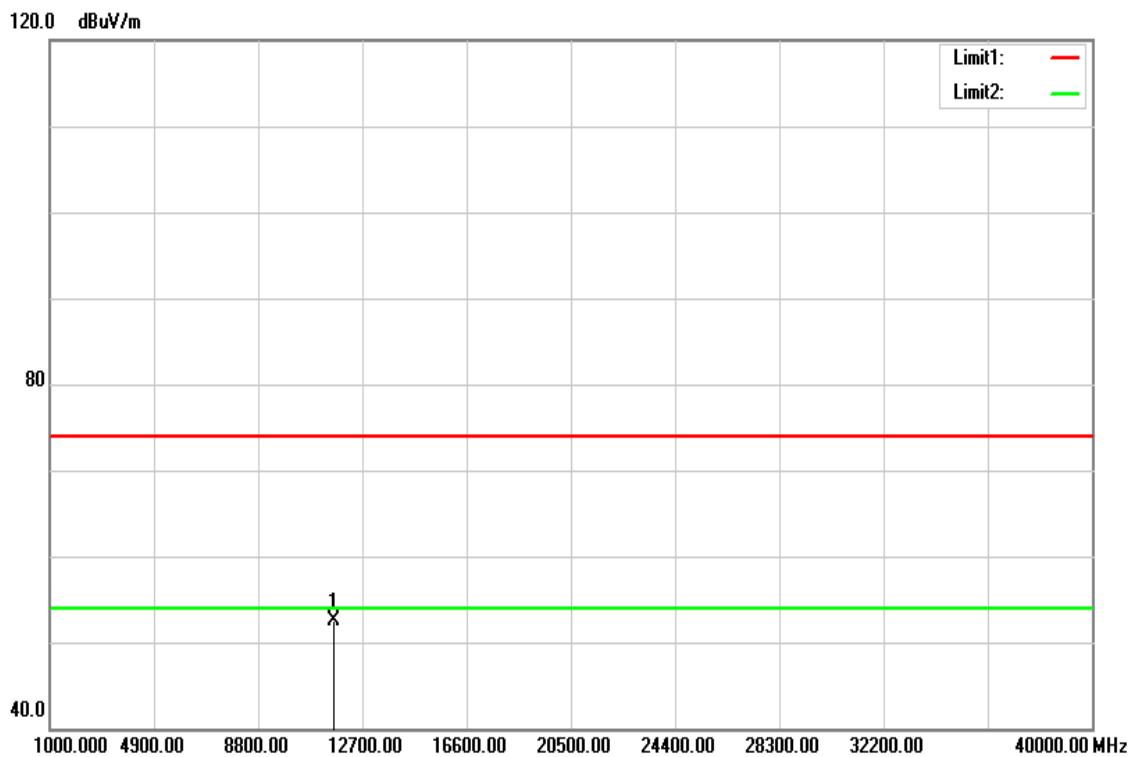


Frequency (MHz)	Reading (dB _{UV})	Correct Factor (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
11650.000	36.49	15.93	52.42	74.00	-21.58	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

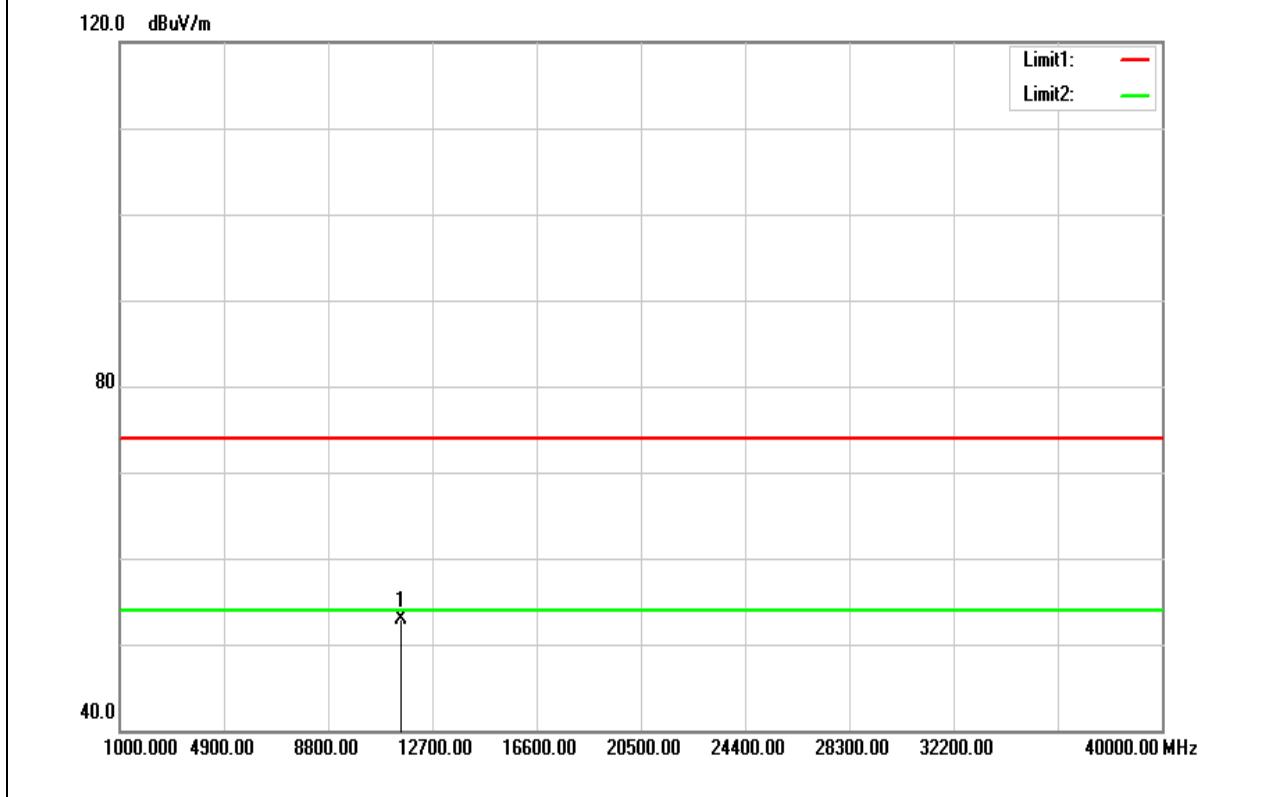


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11510.000	36.77	16.08	52.85	74.00	-21.15	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

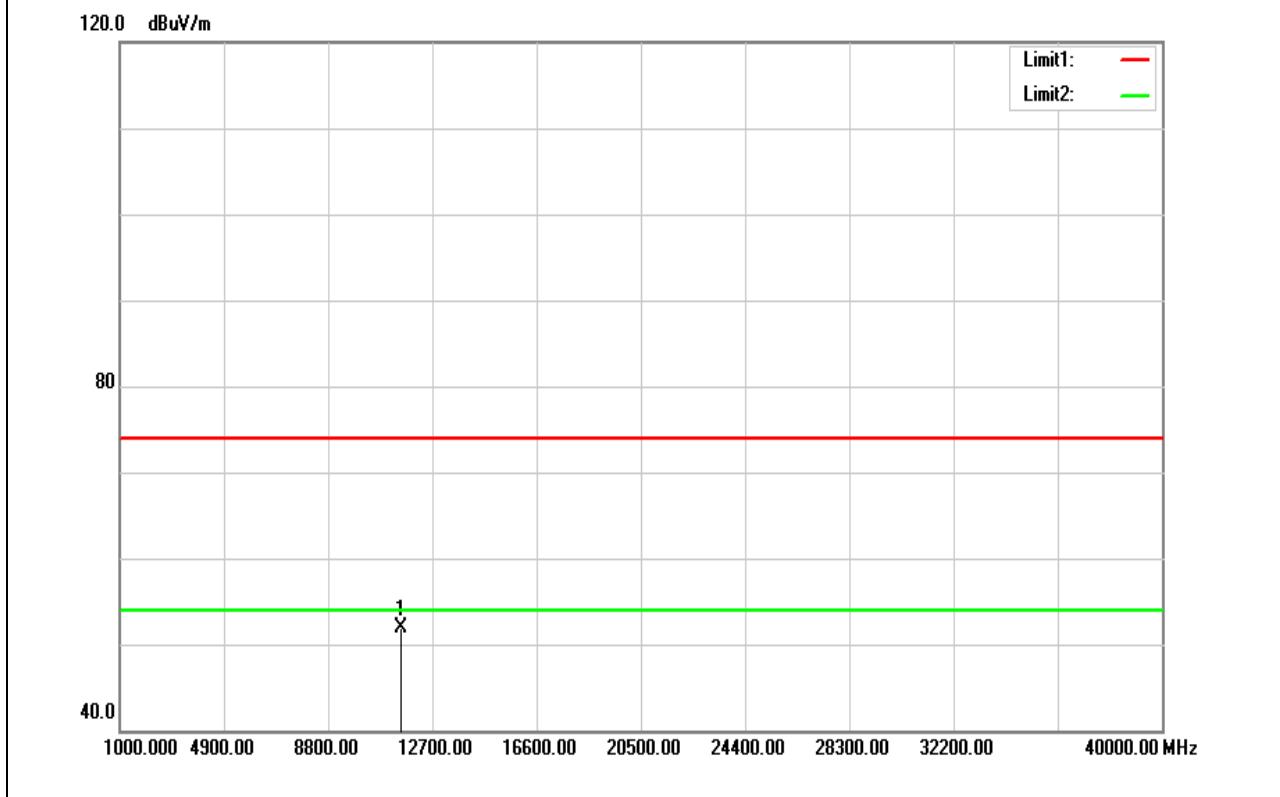


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11510.000	35.91	16.08	51.99	74.00	-22.01	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

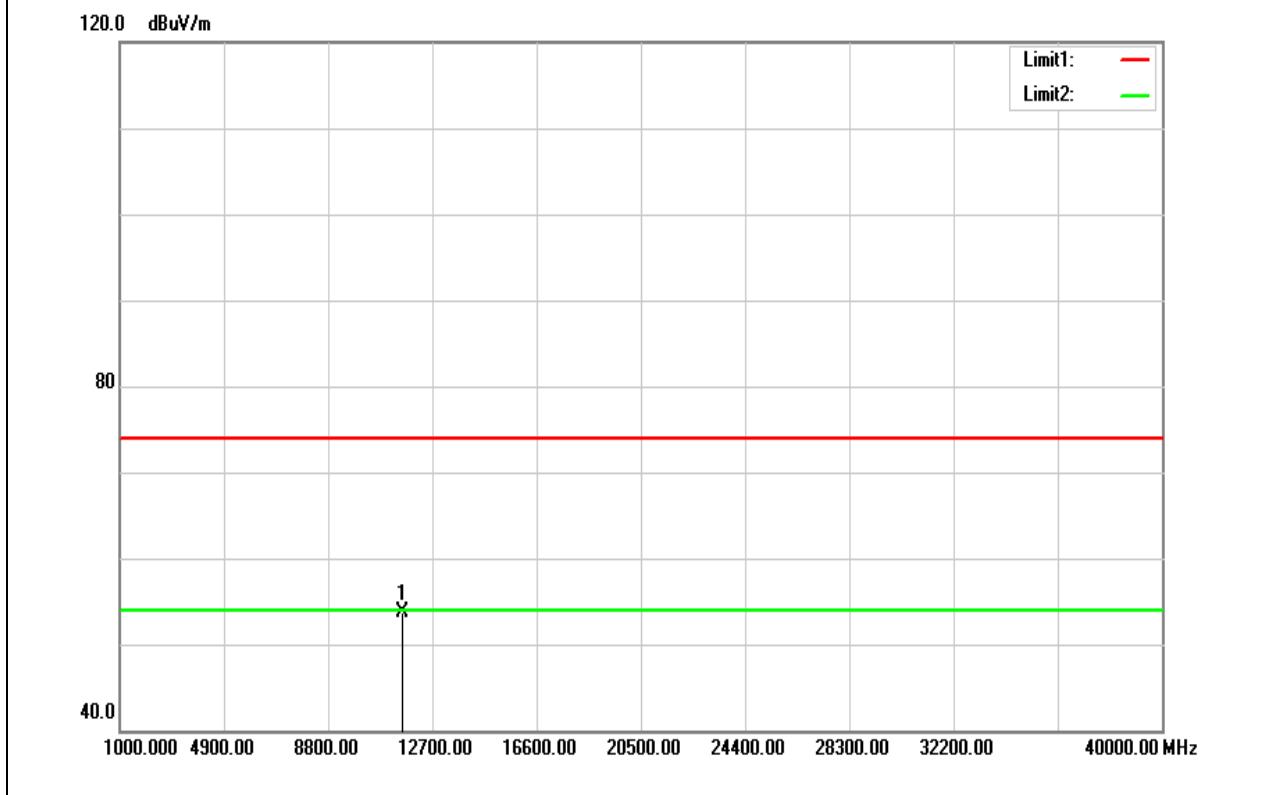


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11590.000	37.74	16.00	53.74	74.00	-20.26	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

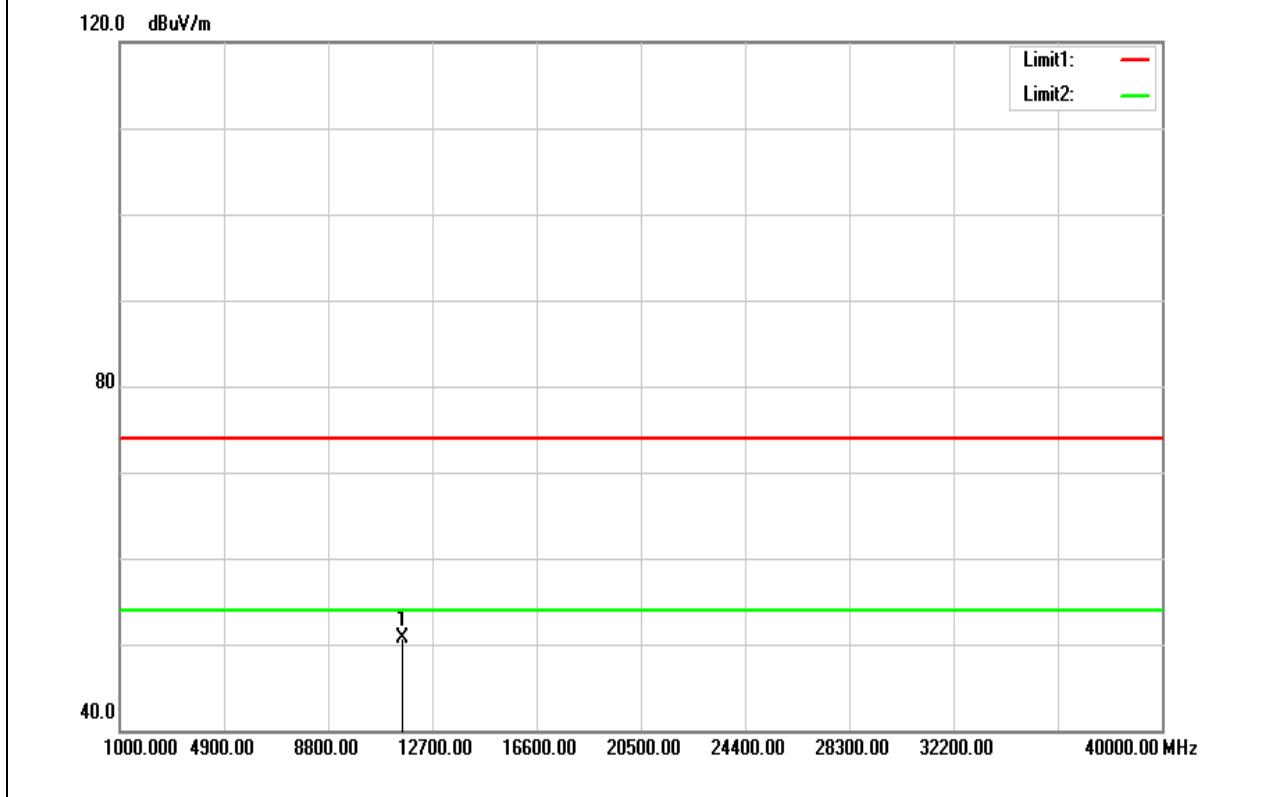

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
11590.000	34.80	16.00	50.80	74.00	-23.20	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

4.6 FREQUENCY STABILITY


4.6.1 Test Limit

According to §15.407(g) manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the operational description.

4.6.2 Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

4.6.3 Test Setup

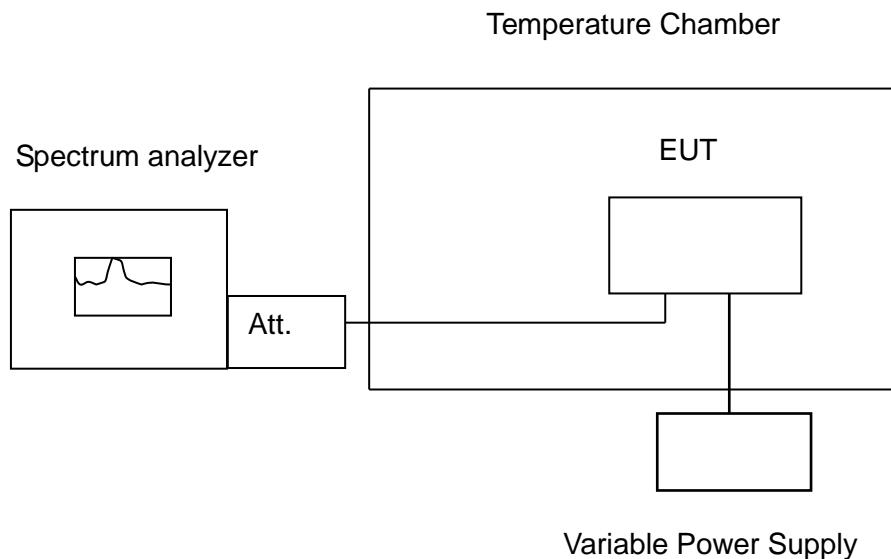

Report No.: T170908D07-RP4

4.6.4 Test Result

Temp. (°C)	Voltage (V)	Measured Frequency		5180		(MHz)		Limit				Result	
		Time (min)				20ppm							
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min				
50	12	5180.03430	5180.03386	5180.03386	5180.03430	6.6216	6.5367	6.5367	6.6216	Pass			
40	12	5180.03734	5180.03386	5180.03430	5180.03473	7.2085	6.5367	6.6216	6.7046	Pass			
30	12	5180.03907	5180.03907	5180.03907	5180.03907	7.5425	7.5425	7.5425	7.5425	Pass			
20	12	5180.05036	5180.05123	5180.05210	5180.05297	9.7220	9.8900	10.0579	10.2259	Pass			
10	12	5180.06556	5180.06512	5180.06469	5180.06469	12.6564	12.5714	12.4884	12.4884	Pass			
0	12	5180.07294	5180.07337	5180.07424	5180.07554	14.0811	14.1641	14.3320	14.5830	Pass			
-10	12	5180.08075	5180.08032	5180.08032	5180.08032	15.5888	15.5058	15.5058	15.5058	Pass			
-20	12	5180.07858	5180.07815	5180.07815	5180.07728	15.1699	15.0869	15.0869	14.9189	Pass			
Temp. (°C)	Voltage (V)	Measured Frequency		5180		(MHz)		Limit				Result	
		Time (min)				20ppm							
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min				
20	10.8	5180.050210	5180.05167	5180.05199	5180.05510	9.6931	9.9749	10.0367	10.6371	Pass			
20	12	5180.050360	5180.05123	5180.05210	5180.05297	9.7220	9.8900	10.0579	10.2259	Pass			
20	13.2	5180.050240	5180.05144	5180.05176	5180.05413	9.6988	9.9305	9.9923	10.4498	Pass			

Temp. (°C)	Voltage (V)	Measured Frequency		5260		(MHz)		Limit				Result	
		Time (min)				20ppm							
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min				
50	12	5260.03430	5260.03473	5260.03473	5260.03517	6.5209	6.6027	6.6027	6.6863	Pass			
40	12	5260.03690	5260.03647	5260.03517	5260.03517	7.0152	6.9335	6.6863	6.6863	Pass			
30	12	5260.04342	5260.03994	5260.03951	5260.03951	8.2548	7.5932	7.5114	7.5114	Pass			
20	12	5260.05427	5260.05384	5260.05340	5260.05166	10.3175	10.2357	10.1521	9.8213	Pass			
10	12	5260.06773	5260.06643	5260.06599	5260.06469	12.8764	12.6293	12.5456	12.2985	Pass			
0	12	5260.07771	5260.07641	5260.07554	5260.07554	14.7738	14.5266	14.3612	14.3612	Pass			
-10	12	5260.08162	5260.08119	5260.08162	5260.08162	15.5171	15.4354	15.5171	15.5171	Pass			
-20	12	5260.07551	5260.07685	5260.07771	5260.07815	14.3555	14.6103	14.7738	14.8574	Pass			
Temp. (°C)	Voltage (V)	Measured Frequency		5260		(MHz)		Limit				Result	
		Time (min)				20ppm							
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min				
20	10.8	5260.05362	5260.05421	5260.05166	5260.05037	10.1939	10.3061	9.8213	9.5760	Pass			
20	12	5260.05427	5260.05384	5260.05340	5260.05166	10.3175	10.2357	10.1521	9.8213	Pass			
20	13.2	5260.05377	5260.05474	5260.05221	5260.05187	10.2224	10.4068	9.9259	9.8612	Pass			

Report No.: T170908D07-RP4

Temp. (°C)	Voltage (V)	Measured Frequency		5500		(MHz)	Limit				Result
		Time (min)				20ppm					
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min		
50	12	5500.03560	5500.03603	5500.03603	5500.03647	6.4727	6.5509	6.5509	6.6309	Pass	
40	12	5500.03734	5500.03690	5500.03647	5500.03603	6.7891	6.7091	6.6309	6.5509	Pass	
30	12	5500.04906	5500.04732	5500.04689	5500.04645	8.9200	8.6036	8.5255	8.4455	Pass	
20	12	5500.05470	5500.05210	5500.05210	5500.05210	9.9455	9.4727	9.4727	9.4727	Pass	
10	12	5500.07164	5500.06686	5500.06643	5500.06643	13.0255	12.1564	12.0782	12.0782	Pass	
0	12	5500.07945	5500.07858	5500.07818	5500.07818	14.4455	14.2873	14.2145	14.2145	Pass	
-10	12	5500.08553	5500.08509	5500.08466	5500.08466	15.5509	15.4709	15.3927	15.3927	Pass	
-20	12	5500.07858	5500.08429	5500.08509	5500.08509	14.2873	15.3255	15.4709	15.4709	Pass	
Temp. (°C)	Voltage (V)	Measured Frequency		5500		(MHz)	Limit				Result
		Time (min)				20ppm					
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min		
20	10.8	5500.05491	5500.05277	5500.05237	5500.05314	9.9836	9.5945	9.5218	9.6618	Pass	
20	12	5500.05470	5500.05210	5500.05210	5500.05210	9.9455	9.4727	9.4727	9.4727	Pass	
20	13.2	5500.05453	5500.05237	5500.05311	5500.05274	9.9145	9.5218	9.6564	9.5891	Pass	

Temp. (°C)	Voltage (V)	Measured Frequency		5745		(MHz)	Limit				Result
		Time (min)				20ppm					
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min		
50	12	5745.03777	5745.03734	5745.03734	5745.03744	6.5744	6.4996	6.4996	6.5170	Pass	
40	12	5745.03951	5745.03907	5745.03864	5745.03821	6.8773	6.8007	6.7258	6.6510	Pass	
30	12	5745.04428	5745.04428	5745.04472	5745.04342	7.7076	7.7076	7.7842	7.5579	Pass	
20	12	5745.05687	5745.05644	5745.05601	5745.05601	9.8990	9.8242	9.7493	9.7493	Pass	
10	12	5745.07250	5745.07077	5745.07033	5745.07164	12.6197	12.3185	12.2419	12.4700	Pass	
0	12	5745.08336	5745.08249	5745.08249	5745.08249	14.5100	14.3586	14.3586	14.3586	Pass	
-10	12	5745.08857	5745.08900	5745.08900	5745.08900	15.4169	15.4917	15.4917	15.4917	Pass	
-20	12	5745.08379	5745.08813	5745.08813	5745.08813	14.5849	15.3403	15.3403	15.3403	Pass	
Temp. (°C)	Voltage (V)	Measured Frequency		5745		(MHz)	Limit				Result
		Time (min)				20ppm					
Operating Frequency:		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min		
20	10.8	5745.05610	5745.05221	5745.05448	5745.05658	9.7650	9.0879	9.4830	9.8486	Pass	
20	12	5745.05687	5745.05644	5745.05601	5745.05601	9.8990	9.8242	9.7493	9.7493	Pass	
20	13.2	5745.05654	5745.05463	5745.05574	5745.05704	9.8416	9.5091	9.7023	9.9286	Pass	

Report No.: T170908D07-RP4

4.7 DYNAMIC FREQUENCY SELECTION

4.7.1 Test Limit

FCC according to §15.407 (h), KDB 905462 D02 "compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection". and KDB 905462 D03 " U-NII client devices without radar detection capability.

IC according RSS-247 section 6.3, and it harmonized with FCC Part 15 DFS rules.

The EIRP refer section 4.3 output power measurement in this report.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth mods	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Table 3: Interference Threshold values, Master or Client incorporating In-Service

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6 – Long Pulse Radar Test Signal

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Report No.: T170908D07-RP4

4.7.2 Test Procedure

Overview Of EUT With Respect To §15.407 (H) Requirements

The firmware installed in the EUT during testing was:

Firmware Rev: 0.0.35.2_20171101.100446

The EUT operates over the 5250-5350 MHz range as a Client Device that does not have radar detection capability.

The EUT uses one transmitter connected to two 50-ohm coaxial antenna ports via a diversity switch. Only one antenna port is connected to the test system since the EUT has one antenna only.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

The EUT utilizes the 802.11a architecture, with a nominal channel bandwidth of 20 MHz.

The rated output power of the Master unit is < 23dBm (EIRP). Therefore the required interference threshold level is -62 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is $-62 + 5 = -57$ dBm.

The calibrated conducted DFS Detection Threshold level is set to -57 dBm. The tested level is lower than the required level hence it provides margin to the limit.

Manufacturer's Statement Regarding Uniform Channel Spreading

The end product implements an automatic channel selection feature at startup such that operation commences on channels distributed across the entire set of allowed 5GHz channels. This feature will ensure uniform spreading is achieved while avoiding non-allowed channels due to prior radar events.

TEST AND MEASUREMENT SYSTEM

System Overview

The measurement system is based on a conducted test method.


The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

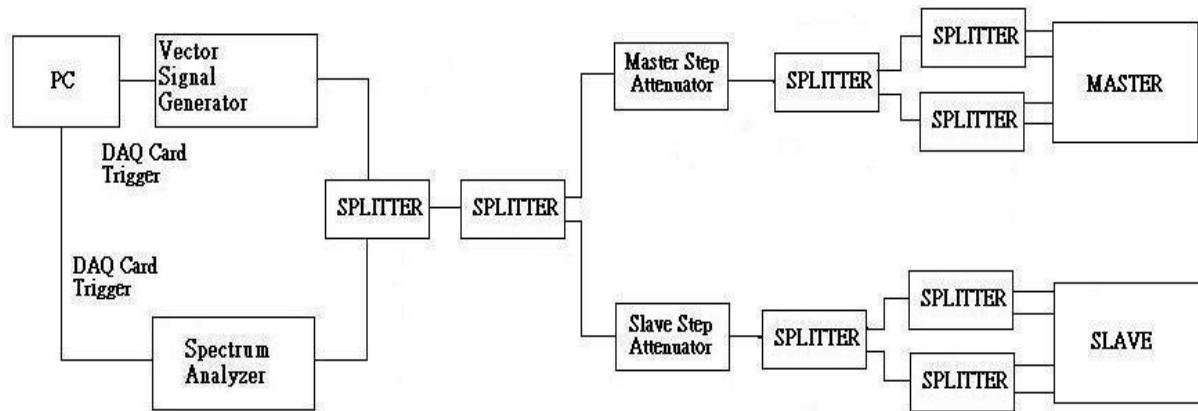Conducted Method System Block Diagram

System Calibration

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of –62 dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from –62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at –62 dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at –62 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.


Adjustment Of Displayed Traffic Level

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.

If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.


Report No.: T170908D07-RP4

4.7.3 Test Setup

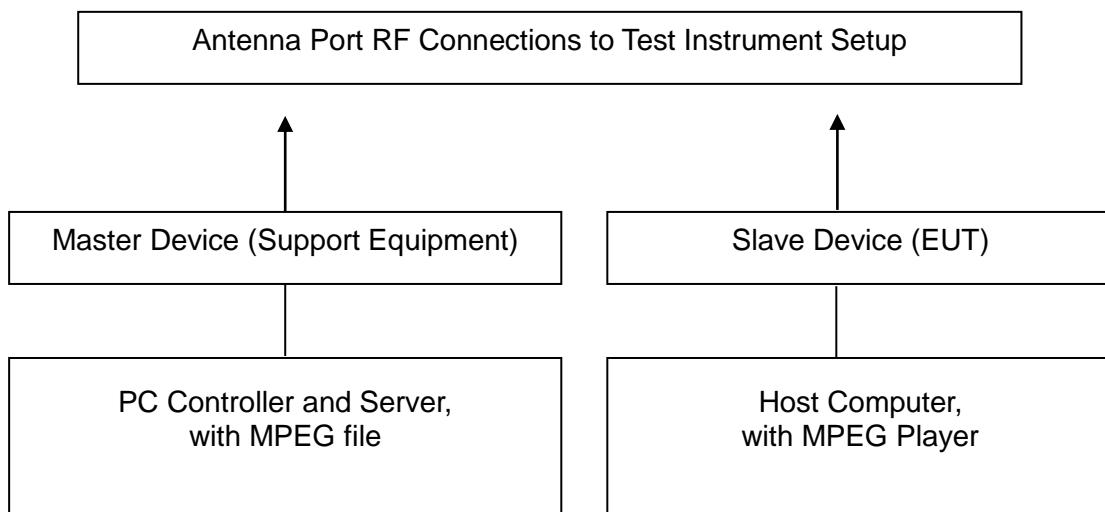


Report No.: T170908D07-RP4

4.7.4 Test Result

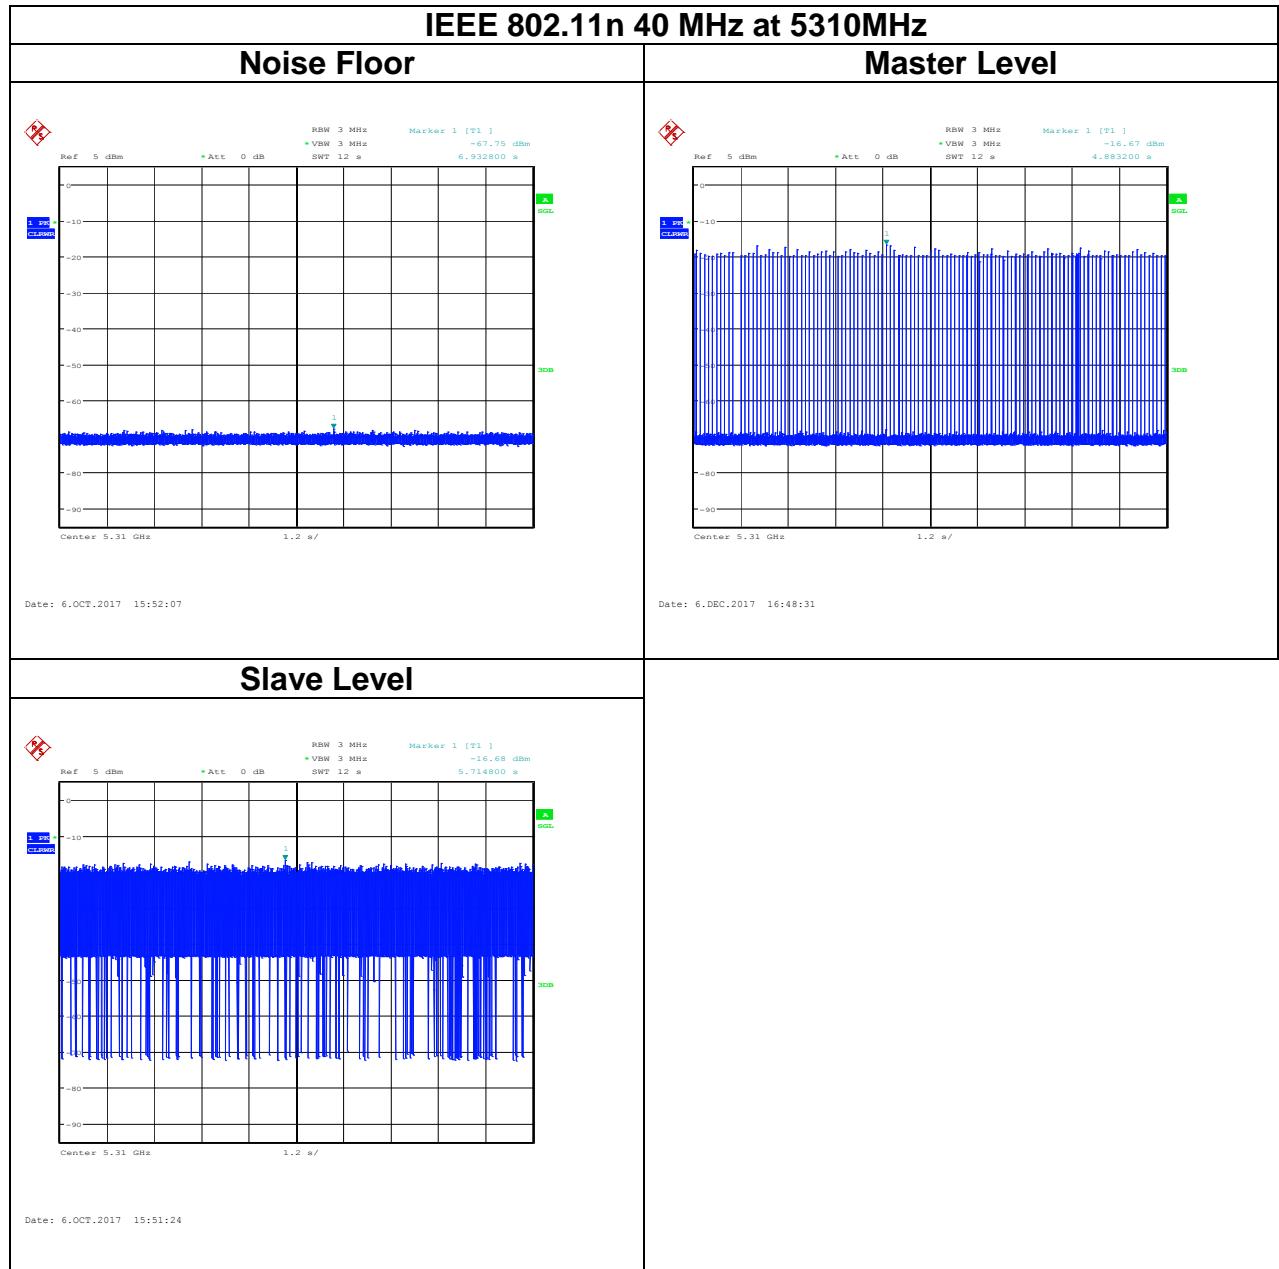

Report No.: T170908D07-RP4

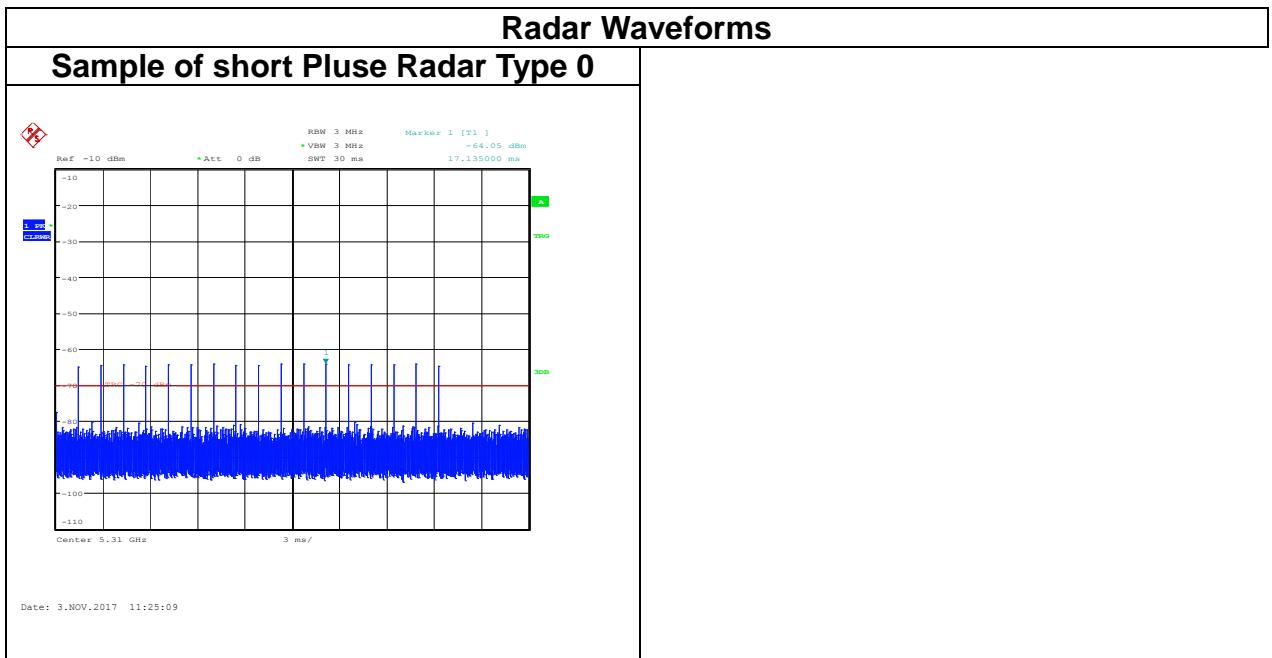

Report No.: T170908D07-RP4

TEST CHANNEL AND METHOD

All tests were performed at a channel center frequency of 5310 MHz utilizing a conducted test method.

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME**GENERAL REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and


Ends no earlier than (Reference Marker + 10 sec).

Report No.: T170908D07-RP4

IEEE 802.11n 40 MHz at 5310

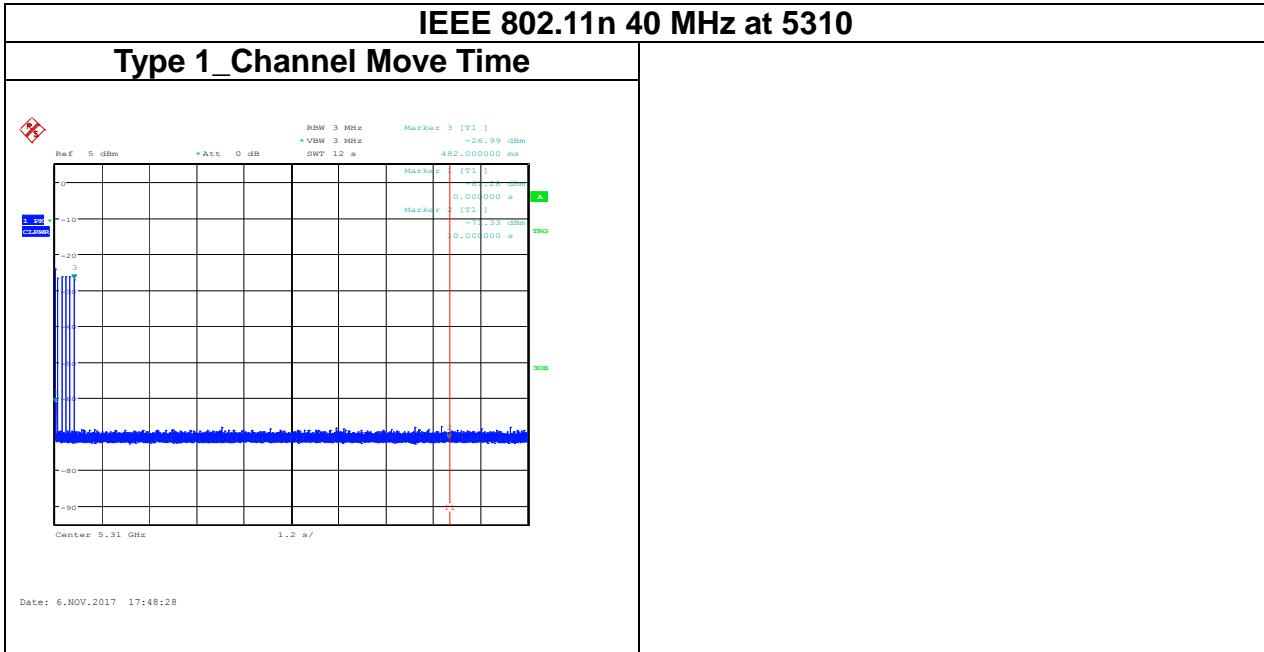

Channel Move Time (s)	Limit (s)
0.4820	10

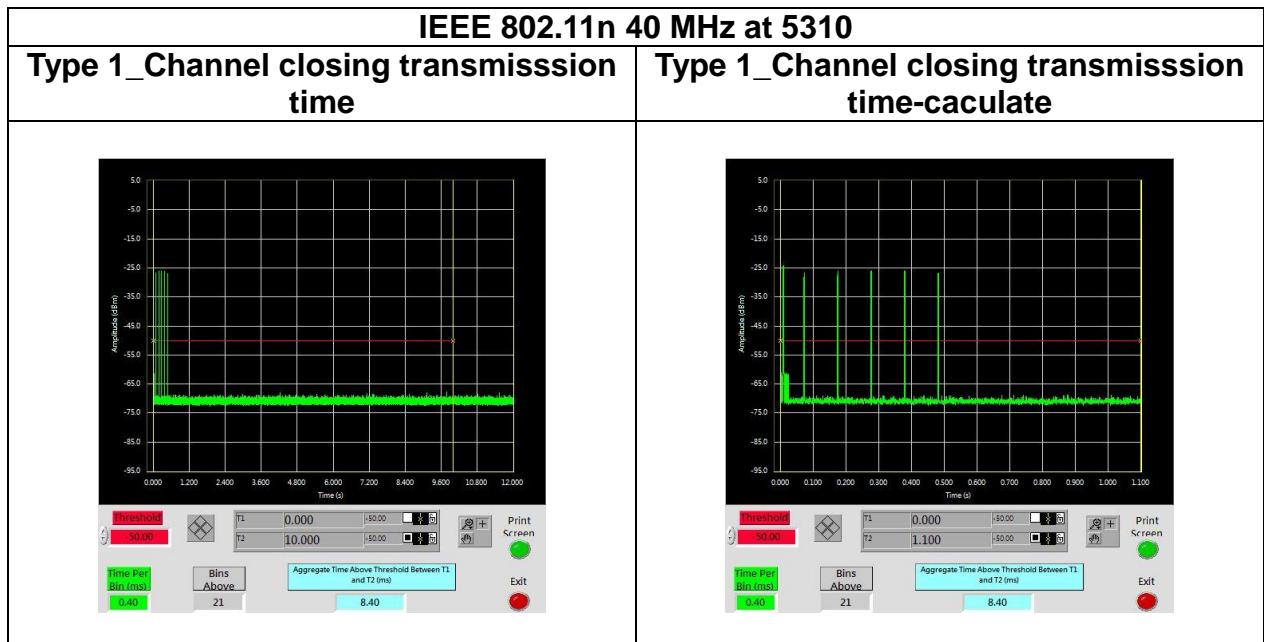

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
8.4	60	-51.6

- End of Test Report -