

# RF TEST REPORT

## FCC / ISED

APPLICANT

**Identiv Inc.**

MODEL NAME

**8216**

FCC ID

**MBPTSKPSC-00**

ISED ID

**7485A-TSKPSCR0**

REPORT NUMBER

**HCTA-2001-008-RF03**

# TEST REPORT

**Date of Issue**  
November 11, 2020

**Test Site**  
Hyundai C-Tech, Inc. dba HCT America, Inc.  
1726 Ringwood Ave, San Jose, CA 95131, USA

|                           |                                                               |
|---------------------------|---------------------------------------------------------------|
| <b>Applicant</b>          | Identiv Inc.                                                  |
| <b>Applicant Address</b>  | 2201 Walnut Avenue, Suite #100, Fremont, CA 94538, USA        |
| <b>FCC ID</b>             | MBPTSKPSC-00                                                  |
| <b>ISED ID</b>            | 7485A-TSKPSC0                                                 |
| <b>Model Name</b>         | 8216                                                          |
| <b>EUT Type</b>           | Physical Access Reader                                        |
| <b>Modulation Type</b>    | 13.56 MHz (ASK), 125 kHz (ASK, PSK, FSK)                      |
| <b>FCC Classification</b> | Low Power Communication Device Transmitter                    |
| <b>FCC Rule Part(s)</b>   | Part 15.225, Part 15.209                                      |
| <b>ISED Rule Part(s)</b>  | RSS-210 Issue 10 (December 2019), RSS-Gen Issue 5(April 2018) |

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Hyundai C-Tech, Inc. dba HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

**Tested By**



Steve In

Test Engineer

**Reviewed By**



Sunwoo Kim

Technical Manager

## REVISION HISTORY

*The revision history for this document is shown in table.*

| TEST REPORT NO.    | DATE       | DESCRIPTION   |
|--------------------|------------|---------------|
| HCTA-2001-008-RF03 | 11/11/2020 | Initial Issue |
|                    |            |               |
|                    |            |               |
|                    |            |               |

## TABLE OF CONTENTS

|                                          |    |
|------------------------------------------|----|
| 1. GENERAL INFORMATION.....              | 4  |
| 2. METHODOLOGY .....                     | 5  |
| 3. INSTRUMENT CALIBRATION .....          | 5  |
| 4. FACILITIES AND ACCREDITATIONS.....    | 6  |
| 5. ANTENNA REQUIREMENTS .....            | 7  |
| 6. MEASUREMENT UNCERTAINTY .....         | 8  |
| 7. DESCRIPTION OF TESTS .....            | 9  |
| 8. SUMMARY OF TEST RESULTS.....          | 18 |
| 9. TEST RESULT .....                     | 19 |
| 9.1 20 dB BANDWIDTH / 99% BANDWIDTH..... | 19 |
| 9.2 FREQUENCY STABILITY .....            | 20 |
| 9.3 RADIATED SPURIOUS EMISSIONS .....    | 21 |
| 9.4. POWERLINE CONDUCTED EMISSIONS.....  | 28 |
| 10. LIST OF TEST EQUIPMENT.....          | 31 |
| APPENDIX A. TEST SETUP PHOTOS .....      | 32 |
| APPENDIX B. PHOTOGRAPHS OF EUT.....      | 33 |

## 1. GENERAL INFORMATION

### EUT DESCRIPTION

|                                             |                                            |
|---------------------------------------------|--------------------------------------------|
| <b>Model</b>                                | 8216                                       |
| <b>EUT Type</b>                             | Physical Access Reader                     |
| <b>Power Supply</b>                         | DC 12V                                     |
| <b>RF Specification</b>                     | 125 kHz : ASK, PSK, FSK<br>13.56 MHz : ASK |
| <b>Operating Environment</b>                | Indoor                                     |
| <b>Operating Temperature <sup>(1)</sup></b> | 0 °C – 49 °C                               |

### RF SPECIFICATION SUBJECT TO THE REPORT

|                                        |                                                                                                   |
|----------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Operating Frequency Range</b>       | 125 kHz, 13.56 MHz                                                                                |
| <b>RF Specification (Modulation)</b>   | 13.56 MHz (ASK), 125 kHz (ASK , FSK, PSK)                                                         |
| <b>Number of Channels</b>              | 13.56 MHz : 1 channel<br>125 kHz : 1 channel                                                      |
| <b>Antenna Specification</b>           | Loop antenna                                                                                      |
| <b>Firmware Version <sup>(2)</sup></b> | V2.3                                                                                              |
| <b>Hardware Version <sup>(2)</sup></b> | Hardware : Keypad Antenna PCBA : Rev0.5 / Main Board : Rev0.1 /<br>Contact Smart Card PCBA : REV0 |
| <b>Date(s) of Tests</b>                | February 7, 2020 ~ February 28, 2020                                                              |

#### Note :

1. Operating temperature is declared by the manufacturer.
2. Firmware and Hardware Version are as received by the client.

## 2. METHODOLOGY

The measurement procedure described in ANSI C63.10( Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C and RSS-GEN issue 5, RSS-210 issue 10.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. To find out the maximum emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested per test setup instruction provided by the manufacturer under continuous Tx operating condition, entering combination of keypad to demonstrate radio transmission during testing.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC (Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at 1726 Ringwood Avenue, San Jose, California 95131, USA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.



### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

**According to FCC 47 CFR §15.203:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB) |
|------------------------------------------|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 2.55                             |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 3.20                             |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 4.73                             |

## 7. DESCRIPTION OF TESTS


### 7.1. 20 dB Bandwidth / 99 % bandwidth

#### Limit

20 dB bandwidth : According to §15.215(c), the bandwidth at 20 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

99% Bandwidth : Section 6.7, RSS-Gen Issue 5

#### Test Configuration

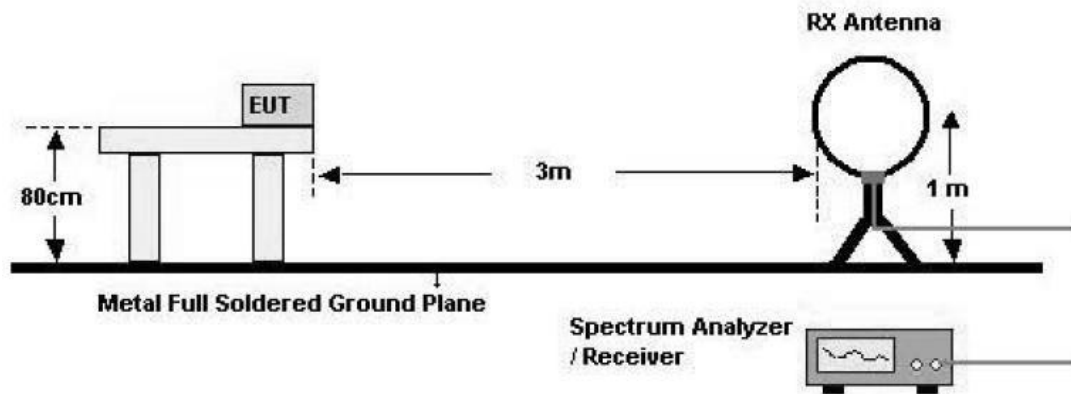

#### Test Procedure (20 dB Bandwidth)

The Spectrum Analyzer setting :

- RBW = 1 kHz
- VBW  $\geq 3 \times$  RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

#### Test Procedure (99 % Bandwidth)

The transmitter output is connected to the spectrum analyzer.

- RBW = 1 kHz
- VBW  $\approx 3 \times$  RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

#### **Note :**

Bandwidth measurement feature in the spectrum analyzer was used to measure 20 dB bandwidth (X dB bandwidth function) and 99 % bandwidth.


## 7.2. Frequency Stability

### Limit

§15.225 (e), RSS-210 Issue 10

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

### Test Configuration

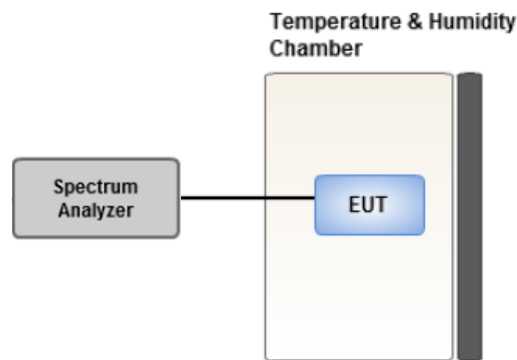

### Test Procedure

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) Frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

### **Note:**

- Temperature humidity chamber is used to adjust the temperature between  $-20^{\circ}\text{C}$  and  $+50^{\circ}\text{C}$
- The primary supply voltage was adjusted between 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

### 7.3. Radiated Test

#### Radiated Emission Limits

| FCC : 47 CFR § 15.209 |                       |                          |
|-----------------------|-----------------------|--------------------------|
| Frequency (MHz)       | Field Strength (uV/m) | Measurement Distance (m) |
| 0.009 – 0.490         | 2400/F(kHz)           | 300                      |
| 0.490 – 1.705         | 24000/F(kHz)          | 30                       |
| 1.705 – 30            | 30                    | 30                       |
| 30-88                 | 100                   | 3                        |
| 88-216                | 150                   | 3                        |
| 216-960               | 200                   | 3                        |
| Above 960             | 500                   | 3                        |


| ISED : RSS-GEN Section 8.9 |                       |                          |
|----------------------------|-----------------------|--------------------------|
| Frequency (MHz)            | Field Strength (uV/m) | Measurement Distance (m) |
| 0.009 – 0.490              | 6.37/F(kHz)           | 300                      |
| 0.490 – 1.705              | 63.7/F(kHz)           | 30                       |
| 1.705 – 30                 | 0.08                  | 30                       |
| 30-88                      | 100                   | 3                        |
| 88-216                     | 150                   | 3                        |
| 216-960                    | 200                   | 3                        |
| Above 960                  | 500                   | 3                        |

#### Operation within the band 13.110 MHz – 14.010 MHz

| FCC : 47 CFR § 15.225 (a), (b), (c), (d) / ISED : RSS-210 ANNEX B.6 |                       |                          |
|---------------------------------------------------------------------|-----------------------|--------------------------|
| Frequency (MHz)                                                     | Field Strength (uV/m) | Measurement Distance (m) |
| 13.553 – 13.567                                                     | 15,848                | 30                       |
| 13.410 ≤ f ≤ 13.553<br>13.567 ≤ f ≤ 13.710                          | 334                   | 30                       |
| 13.110 ≤ f ≤ 13.410<br>13.710 ≤ f ≤ 14.010                          | 106                   | 30                       |

## Test Configuration


Below 30 MHz

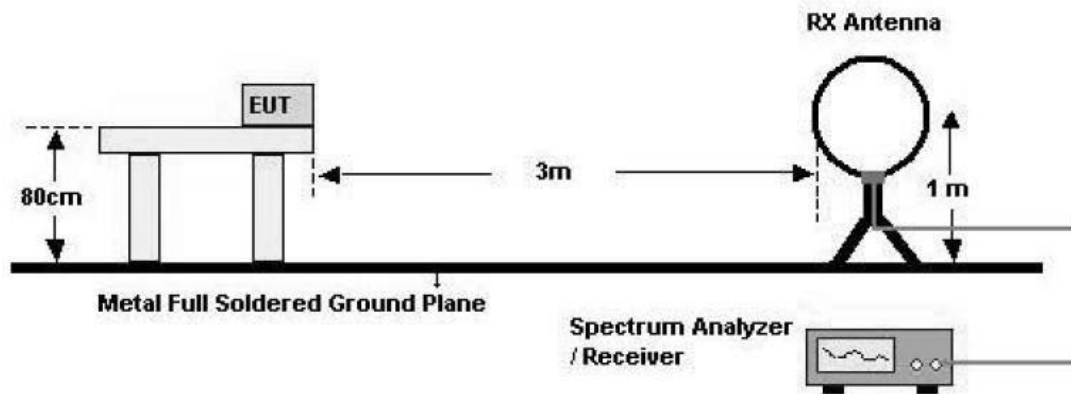

## Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) =  $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$   
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$   
Measurement Distance: 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \cdot \text{RBW}$
9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L) + Distance Factor (D.F)
10. There is a comparison data both open-field test site and alternative test site – semi-Anechoic chamber according to 414788 D01. And the results are properly calibrated.

30 MHz - 1 GHz

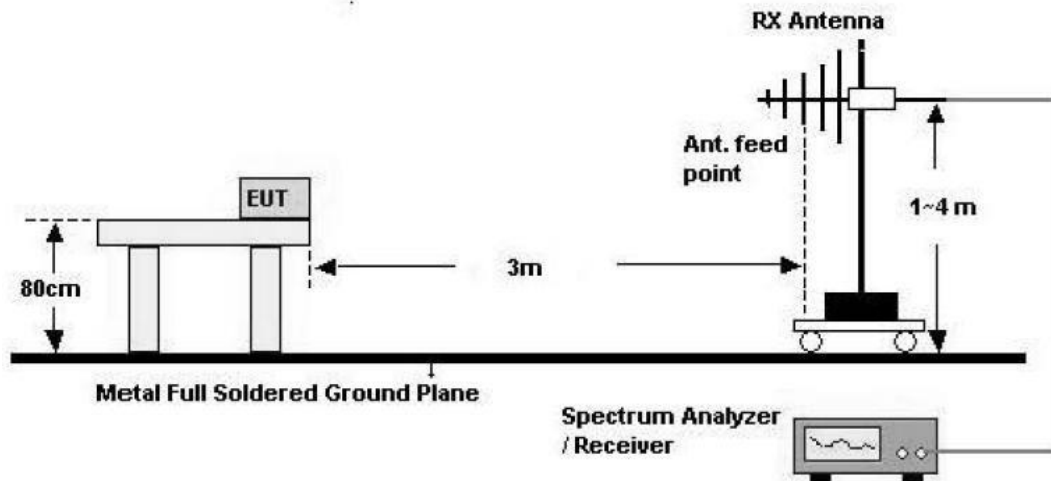

### Test Procedure of Radiated spurious emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

#### (1) Measurement Type (Peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

#### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, the method (1) is mainly used

6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

## 7.4. AC Power line Conducted Emissions

### Limit

47 CFR § 15.207, RSS-GEN Section 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V) |           |
|-----------------------|---------------------|-----------|
|                       | Quasi-peak          | Average   |
| 0.15 to 0.50          | 66 to 56*           | 56 to 46* |
| 0.50 to 5             | 56                  | 46        |
| 5 to 30               | 60                  | 50        |

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

According to FCC KDB 174176 D01 Line Conducted FAQ v01r01 :

### **Devices Operating Above 30 MHz**

For a device with a permanent or detachable antenna operating above 30 MHz, measurements must be performed with the antenna connected as specified in clause 6.2 of ANSI C63.10-2013.

### **Devices Operating Below 30 MHz**

For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna under the following conditions:

- (1) Perform the AC power-line conducted tests with the antenna connected to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band;
- (2) Retest with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network which simulates the antenna in the fundamental frequency band. All measurements must be performed as specified in clause 6.2 of ANSI C63.10-2013.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.5. Worst case configuration and mode

### Radiated test

Measurement loop antenna polarization and EUT azimuth were varied to find the maximum level of emissions out of the EUT. In addition, all X, Y, and Z positions were investigated to find the worst-case position.

Final test was performed by placing the EUT on the typical installation of the right up position (Z) assuming the EUT will be used, mounted on the wall.


### Conducted test

AC Line conducted emission test was performed in two modes because the EUT operates below 30 MHz


- (1) Antenna connected to the EUT
- (2) EUT with RF output terminated with dummy load

## 7.6. Test Configuration

### Radiated Emission

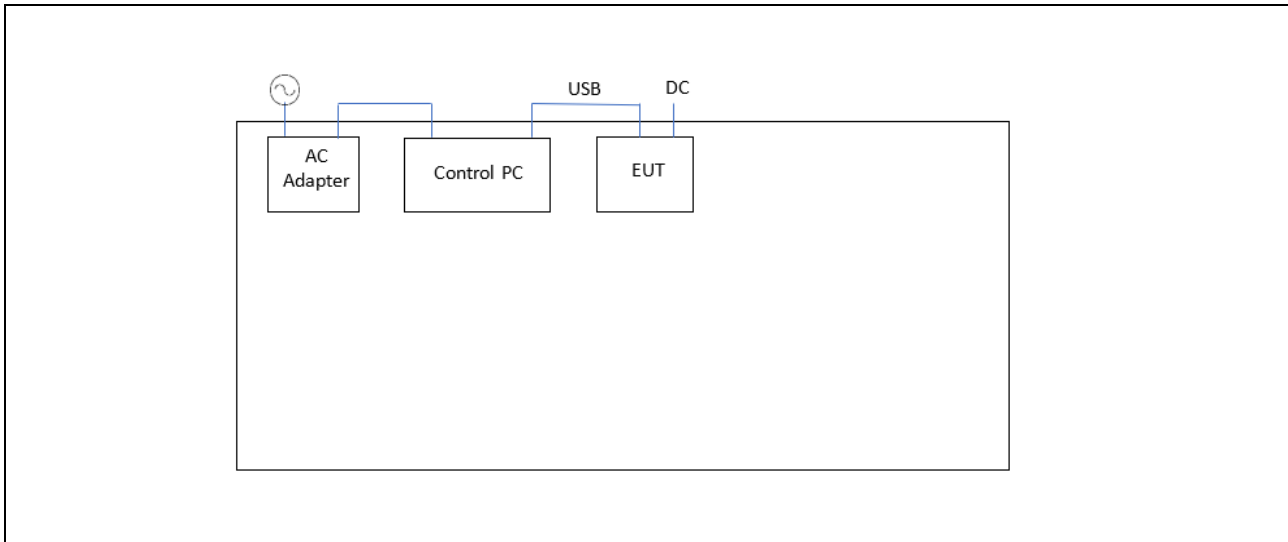

### Conducted Emission

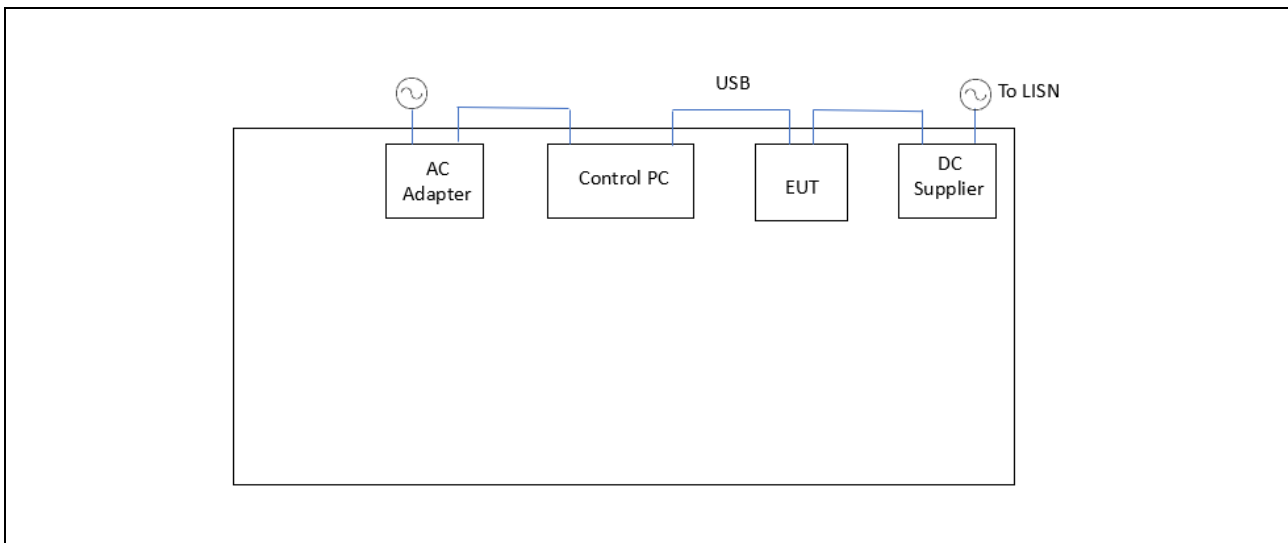

#### Note:

RFID keycard was placed next to the EUT for 13.56 MHz RFID transmission during testing.

The DC power supply was used for AC line conducted emission as a representative configuration per manufacturer during testing.

## 7.7. List of Support Equipment

| Equipment Type   | Model No.   | Serial Number | Manufacturer | Qty | Note                              |
|------------------|-------------|---------------|--------------|-----|-----------------------------------|
| Laptop           | T440        | TP00050A      | Lenovo       | 1   | -                                 |
| AC Adapter       | ADLX65SDC2A | 36200350      | Delta        | 1   | 100-240 VAC, 1.5A<br>50-60Hz      |
| USB cable (1.5m) | -           | -             | -            | 1   | Not shielded<br>No choke attached |
| DC Supply        | PAB18-1A    | 1350582       | Kikusui      | 1   | 0-18 VDC, 1A                      |

## 8. SUMMARY OF TEST RESULTS

| Test Description                                                                                                                         | FCC Part Section(s) | IC Part Section(s)            | Test Limit      | Test Condition | Test Result |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------|-----------------|----------------|-------------|
| 20 dB Bandwidth                                                                                                                          | §15.215 (c)         | -                             | N/A             | Radiated       | PASS        |
| Occupied Bandwidth                                                                                                                       | -                   | Section 6.7<br>RSS-GEN        | N/A             |                | PASS        |
| Radiated E-Field Emissions<br>13.553 MHz - 13.567 MHz                                                                                    | §15.225 (a)         | Annex B.6 (a)(i)<br>RSS-210   | cf. Section 7.3 |                | PASS        |
| Radiated E-Field Emissions<br>$13.410 \text{ MHz} \leq f \leq 13.553 \text{ MHz}$<br>$13.567 \text{ MHz} \leq f \leq 13.710 \text{ MHz}$ | §15.225 (b)         | Annex B.6 (a)(ii)<br>RSS-210  | cf. Section 7.3 |                | PASS        |
| Radiated E-Field Emissions<br>$13.110 \text{ MHz} \leq f \leq 13.410 \text{ MHz}$<br>$13.710 \text{ MHz} \leq f \leq 14.010 \text{ MHz}$ | §15.225 (c)         | Annex B.6 (a)(iii)<br>RSS-210 | cf. Section 7.3 |                | PASS        |
| Radiated Spurious Emissions                                                                                                              | 15.209              | Section 8.9<br>RSS-GEN        | cf. Section 7.3 |                | PASS        |
| Frequency Stability                                                                                                                      | §15.225 (e)         | RSS-210, B.6                  | cf. Section 7.2 |                | PASS        |
| AC Power line Conducted Emissions                                                                                                        | §15.207             | RSS-GEN, 8.8                  | cf. Section 7.4 | Conducted      | PASS        |


## 9. TEST RESULT

### 9.1 20 dB BANDWIDTH / 99% BANDWIDTH

| 13.56 MHz |                 | 20 dB Bandwidth (kHz) | 99% Bandwidth (kHz) | Limit |
|-----------|-----------------|-----------------------|---------------------|-------|
| Mode      | Frequency (MHz) | Result                | Result              |       |
| 13.56 MHz | ASK             | 2.942                 | 2.985               | N/A   |

| 125 kHz |                 | 20 dB Bandwidth (kHz) | 99% Bandwidth (kHz) | Limit |
|---------|-----------------|-----------------------|---------------------|-------|
| Mode    | Frequency (MHz) | Result                | Result              |       |
| 125 kHz | ASK             | 2.891                 | 2.454               | N/A   |
|         | PSK             | 2.902                 | 2.613               |       |
|         | FSK             | 2.907                 | 2.859               |       |

### TEST PLOTS

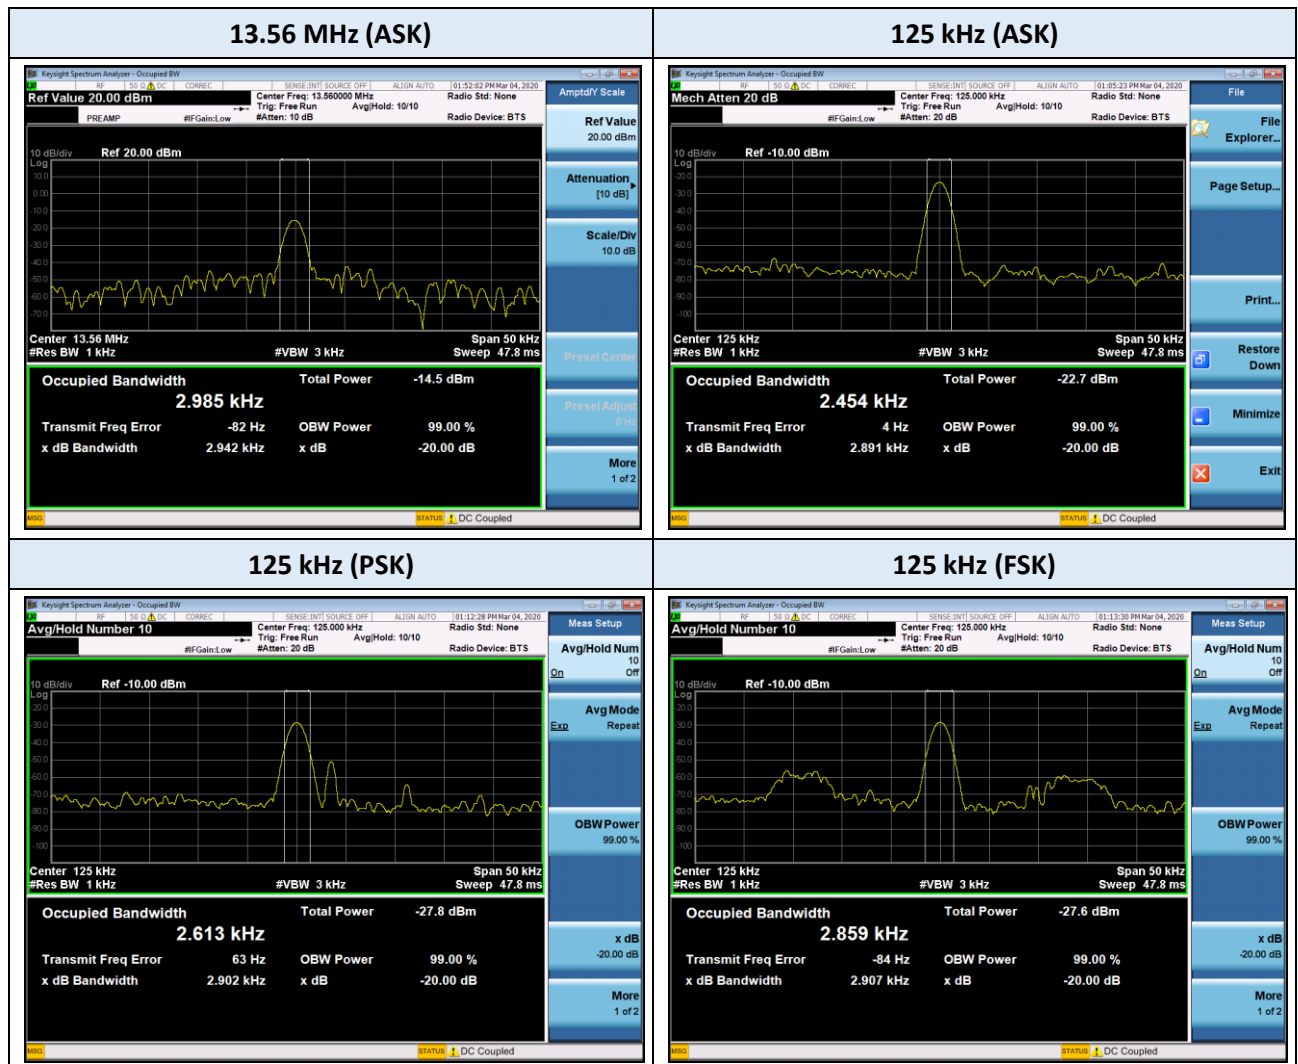

## 9.2 FREQUENCY STABILITY

|                     |                   |
|---------------------|-------------------|
| Operating Frequency | 13.56 MHz         |
| Reference Voltage   | 12 V DC           |
| Limit               | 100 PPM = 1356 Hz |

| Voltage [%] | Power [VDC] | Temp. [°C] | Frequency [MHz] | Frequency Dev. [Hz] | Frequency [ppm] |
|-------------|-------------|------------|-----------------|---------------------|-----------------|
| 100%        | 12.0        | -20        | 13.559825       | -175                | -12.91          |
| 100%        |             | -10        | 13.559832       | -168                | -12.39          |
| 100%        |             | 0          | 13.559835       | -165                | -12.17          |
| 100%        |             | +10        | 13.559805       | -195                | -14.38          |
| 100%        |             | +20(Ref.)  | 13.559813       | -187                | -13.79          |
| 100%        |             | +30        | 13.559762       | -238                | -17.55          |
| 100%        |             | +40        | 13.559775       | -225                | -16.59          |
| 100%        |             | +50        | 13.559790       | -210                | -15.49          |
| High        | 13.8        | +20        | 13.559793       | -207                | -15.27          |
| Low         | 10.2        | +20        | 13.559798       | -203                | -14.90          |

## 9.3 RADIATED SPURIOUS EMISSIONS

### Radiated Electric Field Emission within band 13.110 – 14.010 MHz

#### 13.553 MHz-13.567 MHz

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(1)</sup> (dB) | Total (dBuV/m) | Limit <sup>(4)</sup> (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|-------------------------------|-------------|------------------|
| 13.560          | H            | 52.9           | 21.3                      | 74.2           | 124                           | 49.8        | QP               |
| 13.560          | V            | 50.2           | 21.3                      | 71.5           | 124                           | 52.5        | QP               |

#### 13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(1)</sup> (dB) | Total (dBuV/m) | Limit <sup>(4)</sup> (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|-------------------------------|-------------|------------------|
| 13.452          | H            | 23.6           | 21.3                      | 44.9           | 90.5                          | 45.6        | QP               |
| 13.458          | V            | 20.7           | 21.3                      | 42.0           | 90.5                          | 48.5        | QP               |
| 13.660          | H            | 24.9           | 21.3                      | 46.2           | 90.5                          | 44.3        | QP               |
| 13.660          | V            | 21.4           | 21.3                      | 42.7           | 90.5                          | 47.8        | QP               |

#### 13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz


| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(1)</sup> (dB) | Total (dBuV/m) | Limit <sup>(4)</sup> (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|-------------------------------|-------------|------------------|
| 13.347          | H            | 24.4           | 21.3                      | 45.7           | 80.5                          | 34.8        | QP               |
| 13.348          | V            | 22.7           | 21.3                      | 44.0           | 80.5                          | 36.5        | QP               |
| 13.772          | H            | 26.6           | 21.4                      | 48.0           | 80.5                          | 32.5        | QP               |
| 13.772          | V            | 21.9           | 21.4                      | 43.3           | 80.5                          | 37.2        | QP               |

#### Notes:


- Correction Factor: Antenna Factor + Cable loss
- Limit = specific Limits (dBuV) + Distance extrapolation factor
  - The measurement distance is 3 meters.
  - Distance extrapolation factor = 40 log (specific distance / test distance) (dB)

## TEST PLOTS

### Radiated E-Field Emission (Antenna Position 90°) : 13.110 – 14.010 MHz

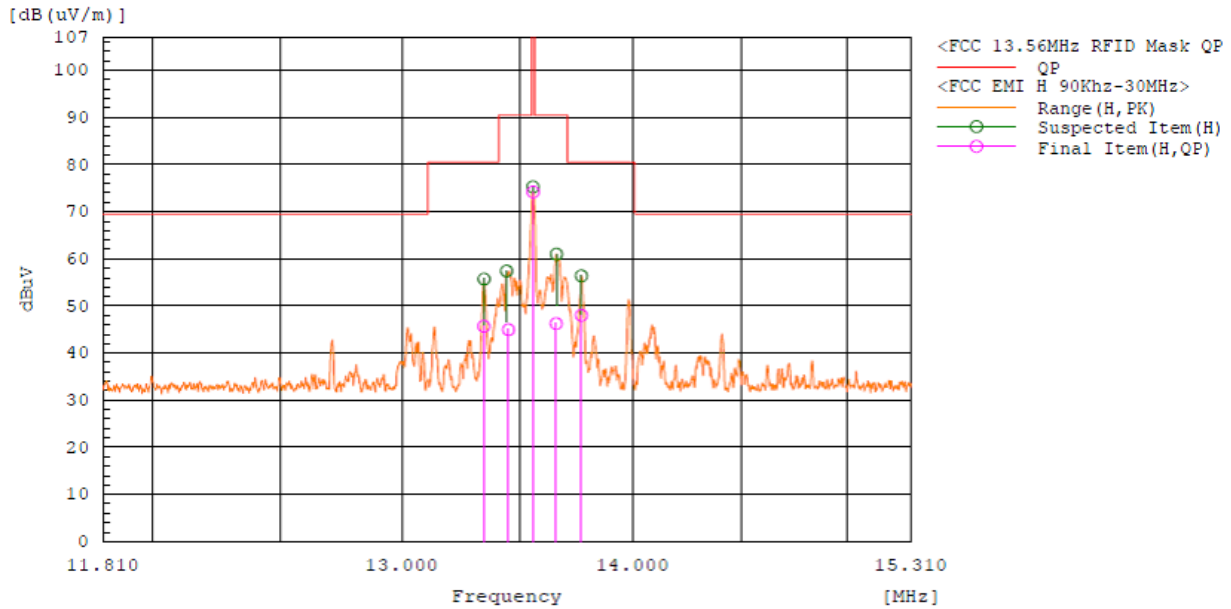

### Radiated E-Field Emission (Antenna Position 180°) : 13.110 – 14.010 MHz

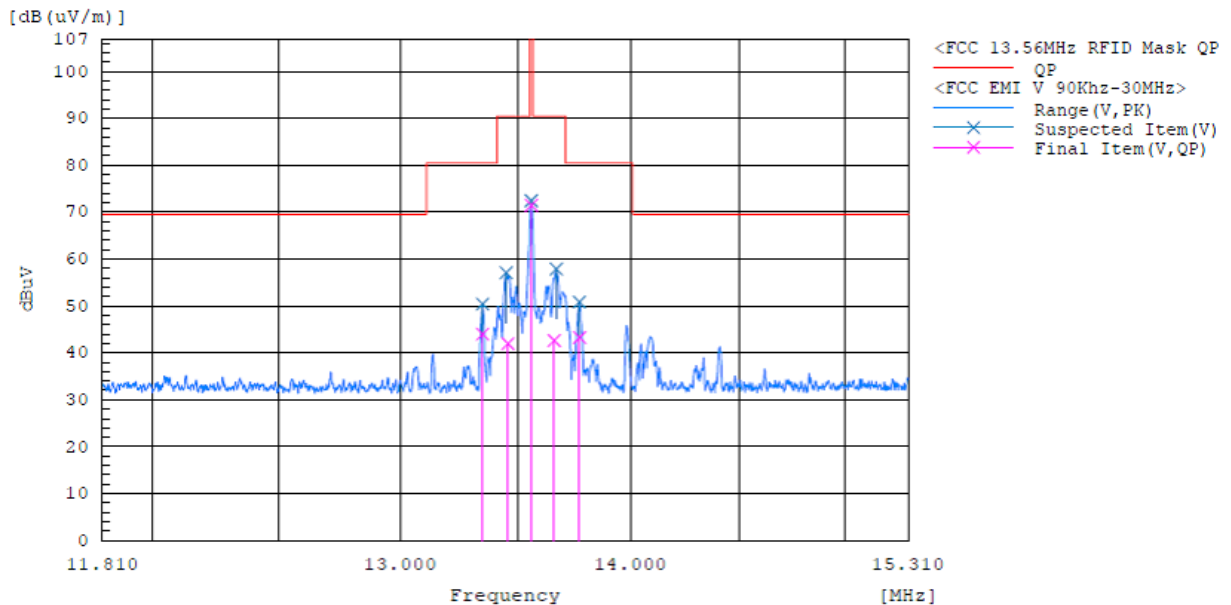

#### Note:

The worst-case plots are included in this report.

## Radiated Spurious Emission

### ASK Modulation

Frequency Range : 9 kHz – 30MHz

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(2)</sup> (dB) | Total (dBuV/m) | Limit <sup>(3)</sup> (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|-------------------------------|-------------|------------------|
| 0.036           | V            | 14.0           | 20.9                      | 34.9           | 116.5                         | 81.6        | QP               |
| 0.072           | V            | 4.4            | 20.1                      | 24.5           | 110.5                         | 86.0        | QP               |
| 0.125           | H            | 35.7           | 19.8                      | 55.5           | 105.7                         | 50.2        | QP               |
| 0.125           | V            | 40.9           | 19.8                      | 60.7           | 105.7                         | 45.0        | QP               |
| 0.375           | H            | 15.6           | 19.7                      | 35.3           | 96.1                          | 60.8        | QP               |
| 1.206           | H            | 12.5           | 20.1                      | 32.6           | 66.0                          | 33.4        | QP               |

#### Notes:

- Correction Factor: Antenna Factor + Cable loss
- Limit = specific Limits (dBuV) + Distance extrapolation factor
  - The measurement distance is 3 meters.
  - Distance extrapolation factor = 40 log (specific distance / test distance) (dB)

Frequency Range : Below 1 GHz

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(2)</sup> (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|----------------|-------------|------------------|
| 48.088          | V            | 47.2           | -12.2                     | 35.0           | 40.0           | 5.0         | QP               |
| 71.994          | V            | 45.1           | -12.5                     | 32.6           | 40.0           | 7.4         | QP               |
| 96.341          | V            | 39.8           | -11.4                     | 28.4           | 43.5           | 15.1        | QP               |
| 395.771         | V            | 35.7           | -4.8                      | 30.9           | 46.0           | 15.1        | QP               |
| 504.217         | V            | 33.3           | -2.1                      | 31.2           | 46.0           | 14.8        | QP               |
| 776.106         | H            | 23.5           | 2.4                       | 25.9           | 46.0           | 20.1        | QP               |

#### Notes:

- Correction Factor: Antenna Factor + Cable loss

## FSK Modulation

Frequency Range : 9 kHz – 30MHz

| Frequency (MHz)      | Polarization | Reading (dBuV) | Corr. <sup>(2)</sup> (dB) | Total (dBuV/m) | Limit <sup>(3)</sup> (dBuV/m) | Margin (dB) | Measurement Type |
|----------------------|--------------|----------------|---------------------------|----------------|-------------------------------|-------------|------------------|
| 0.036                | H            | 11.4           | 20.9                      | 32.3           | 116.5                         | 84.2        | QP               |
| 0.036                | V            | 11.8           | 20.9                      | 32.7           | 116.5                         | 83.8        | QP               |
| 0.125 <sup>(1)</sup> | H            | 31.7           | 19.8                      | 51.5           | 105.7                         | 54.2        | QP               |
| 0.125 <sup>(1)</sup> | V            | 28.4           | 19.8                      | 48.2           | 105.7                         | 57.5        | QP               |
| 0.375                | H            | -2.6           | 19.7                      | 17.1           | 96.1                          | 79.0        | QP               |
| 0.375                | V            | -5.0           | 19.7                      | 14.7           | 96.1                          | 81.4        | QP               |

### Notes:

1. 125 kHz is fundamental frequency
2. Correction Factor: Antenna Factor + Cable loss
3. Limit = specific Limits (dBuV) + Distance extrapolation factor
  - The measurement distance is 3 meters.
  - Distance extrapolation factor = 40 log (specific distance / test distance) (dB)

Frequency Range : Below 1 GHz

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(2)</sup> (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|----------------|-------------|------------------|
| 48.134          | V            | 46.1           | -12.2                     | 33.9           | 40.0           | 6.1         | QP               |
| 96.013          | V            | 41.7           | -11.5                     | 30.2           | 43.5           | 13.3        | QP               |
| 165.942         | V            | 39.7           | -8.6                      | 31.1           | 43.5           | 12.4        | QP               |
| 347.639         | V            | 27.8           | -6.0                      | 21.8           | 46.0           | 24.2        | QP               |
| 449.503         | V            | 33.0           | -3.0                      | 30.0           | 46.0           | 16.0        | QP               |
| 880.721         | H            | 29.1           | 3.5                       | 32.6           | 46.0           | 13.4        | QP               |

### Notes:

1. Correction Factor: Antenna Factor + Cable loss

## PSK Modulation

Frequency Range : 9 kHz – 30MHz

| Frequency (MHz)      | Polarization | Reading (dBuV) | Corr. <sup>(2)</sup> (dB) | Total (dBuV/m) | Limit <sup>(3)</sup> (dBuV/m) | Margin (dB) | Measurement Type |
|----------------------|--------------|----------------|---------------------------|----------------|-------------------------------|-------------|------------------|
| 0.036                | H            | 12.3           | 20.9                      | 33.2           | 116.5                         | 83.3        | QP               |
| 0.036                | V            | 11.2           | 20.9                      | 32.1           | 116.5                         | 84.4        | QP               |
| 0.063                | H            | 10.5           | 20.3                      | 30.8           | 111.7                         | 80.9        | QP               |
| 0.069                | V            | -6.4           | 20.1                      | 13.7           | 110.8                         | 97.1        | QP               |
| 0.125 <sup>(1)</sup> | H            | 32.7           | 19.8                      | 52.5           | 105.7                         | 53.2        | QP               |
| 0.125 <sup>(1)</sup> | V            | 29.3           | 19.8                      | 49.1           | 105.7                         | 56.6        | QP               |
| 0.373                | H            | -9.1           | 19.7                      | 10.6           | 96.2                          | 85.6        | QP               |
| 0.375                | V            | -7.2           | 19.7                      | 12.5           | 96.1                          | 83.6        | QP               |

### Notes:

1. 125 kHz is fundamental frequency
2. Correction Factor: Antenna Factor + Cable loss
3. Limit = specific Limits (dBuV) + Distance extrapolation factor
  - The measurement distance is 3 meters.
  - Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)

Frequency Range : Below 1 GHz


| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. <sup>(2)</sup> (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|---------------------------|----------------|----------------|-------------|------------------|
| 48.172          | V            | 47.1           | -12.3                     | 34.8           | 40.0           | 5.2         | QP               |
| 54.541          | V            | 30.9           | -13.6                     | 17.3           | 40.0           | 22.7        | QP               |
| 96.113          | V            | 44.1           | -11.5                     | 32.6           | 43.5           | 10.9        | QP               |
| 166.034         | V            | 39.5           | -8.6                      | 30.9           | 43.5           | 12.6        | QP               |
| 451.723         | V            | 34.0           | -3.0                      | 31.0           | 46.0           | 15          | QP               |
| 869.753         | H            | 29.4           | 3.5                       | 32.9           | 46.0           | 13.1        | QP               |

### Notes:


1. Correction Factor: Antenna Factor + Cable loss

■ TEST PLOTS

**Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 90°) : ASK**

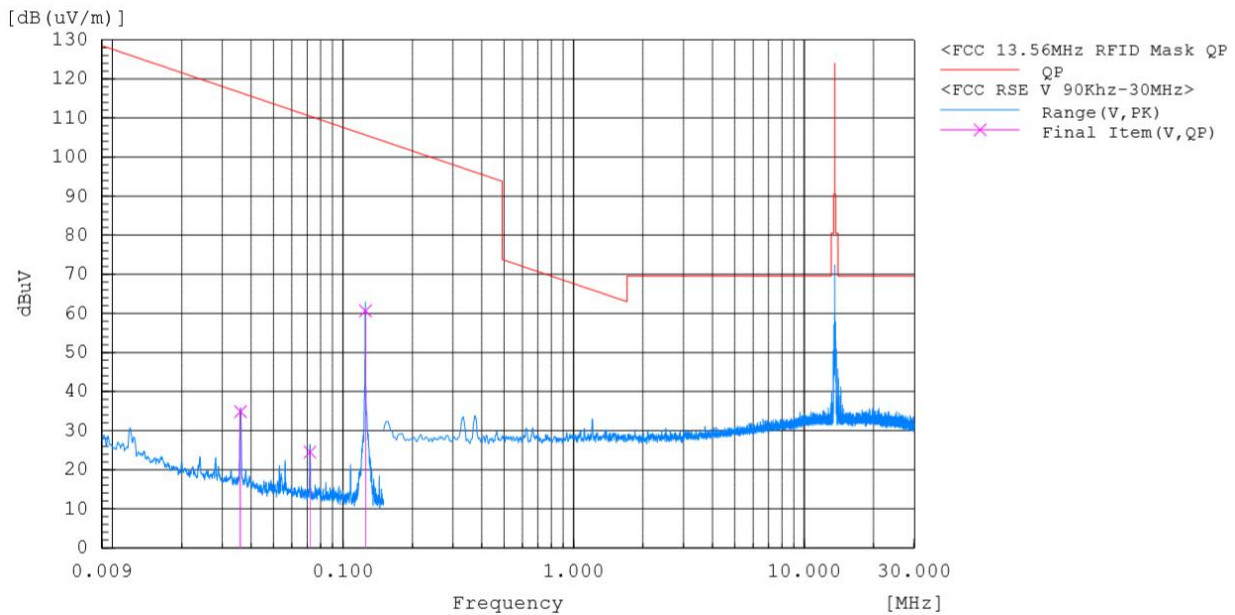


**Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 180°) : ASK**

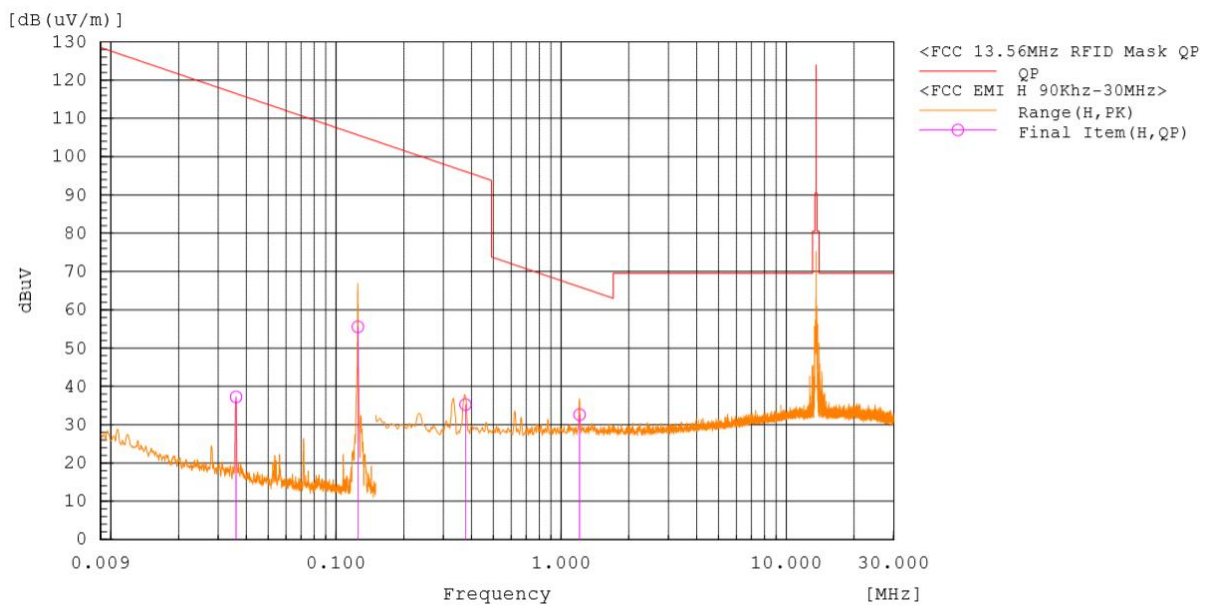

**Note:**

The worst-case plots are included in this report.

▣ TEST PLOTS

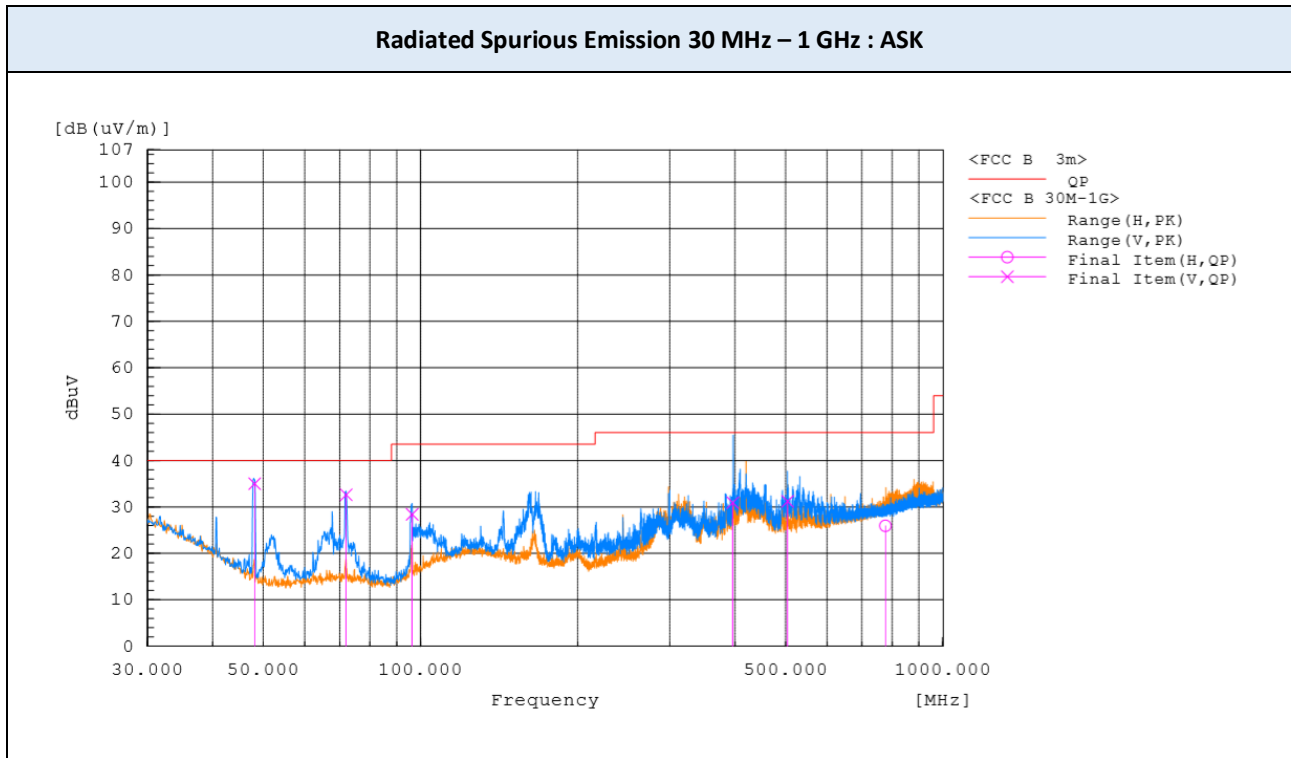

**Note:**

The worst-case plots are included in this report.

## 9.4. POWERLINE CONDUCTED EMISSIONS

AC Main : Device with antenna connected

| Frequency (MHz) | Line | Reading (dBμV) |      | Corr. <sup>1)</sup> (dB) | Level (dBμV) |      | Limit (dBμV) |      | Margin (dB) |      |
|-----------------|------|----------------|------|--------------------------|--------------|------|--------------|------|-------------|------|
|                 |      | QP             | CAV  |                          | QP           | CAV  | QP           | CAV  | QP          | CAV  |
| 0.151           | L1   | -1.1           | -3.7 | 9.8                      | 8.7          | 6.1  | 66           | 56   | 57.3        | 49.9 |
| 0.359           | L1   | -5.5           | -6.8 | 9.7                      | 4.2          | 2.9  | 58.7         | 48.7 | 54.5        | 45.8 |
| 4.151           | L1   | 26.9           | 19.8 | 9.9                      | 36.8         | 29.7 | 56           | 46   | 19.2        | 16.3 |
| 4.342           | L1   | 30.7           | 21.0 | 9.9                      | 40.6         | 30.9 | 56           | 46   | 15.4        | 15.1 |
| 5.241           | L1   | 28.5           | 13.3 | 9.9                      | 38.4         | 23.2 | 60           | 50   | 21.6        | 26.8 |
| 24.001          | L1   | 25.6           | 20.7 | 10.4                     | 36.0         | 31.1 | 60           | 50   | 24.0        | 18.9 |

| Frequency (MHz) | Line | Reading (dBμV) |      | Corr. <sup>1)</sup> (dB) | Level (dBμV) |      | Limit (dBμV) |      | Margin (dB) |      |
|-----------------|------|----------------|------|--------------------------|--------------|------|--------------|------|-------------|------|
|                 |      | QP             | CAV  |                          | QP           | CAV  | QP           | CAV  | QP          | CAV  |
| 0.456           | N    | -4.8           | -6.9 | 9.7                      | 4.9          | 2.8  | 56.8         | 46.8 | 51.9        | 44.0 |
| 0.494           | N    | -0.4           | -5.1 | 9.7                      | 9.3          | 4.6  | 56.1         | 46.1 | 46.8        | 41.5 |
| 4.346           | N    | 30.9           | 21.7 | 9.9                      | 40.8         | 31.6 | 56           | 46   | 15.2        | 14.4 |
| 4.892           | N    | 28.0           | 12.8 | 9.9                      | 37.9         | 22.7 | 56           | 46   | 18.1        | 23.3 |
| 7.989           | N    | 28.6           | 22.0 | 10.0                     | 38.6         | 32.0 | 60           | 50   | 21.4        | 18.0 |
| 24.000          | N    | 25.7           | 20.9 | 10.4                     | 36.1         | 31.3 | 60           | 50   | 23.9        | 18.7 |

AC Main : RF output terminated with dummy load

| Frequency (MHz) | Line | Reading (dBμV) |      | Corr. <sup>1)</sup> (dB) | Level (dBμV) |      | Limit (dBμV) |     | Margin (dB) |      |
|-----------------|------|----------------|------|--------------------------|--------------|------|--------------|-----|-------------|------|
|                 |      | QP             | CAV  |                          | QP           | CAV  | QP           | CAV | QP          | CAV  |
| 2.422           | L1   | 4.8            | -4.8 | 9.8                      | 14.6         | 5.0  | 56           | 46  | 41.4        | 41.0 |
| 2.764           | L1   | -1.3           | -5.6 | 9.8                      | 8.5          | 4.2  | 56           | 46  | 47.5        | 41.8 |
| 4.449           | L1   | 23.7           | 3.3  | 9.9                      | 33.6         | 13.2 | 56           | 46  | 22.4        | 32.8 |
| 4.931           | L1   | 20.6           | 12.2 | 9.9                      | 30.5         | 22.1 | 56           | 46  | 25.5        | 23.9 |
| 5.010           | L1   | 26.4           | 5.7  | 9.9                      | 36.3         | 15.6 | 60           | 50  | 23.7        | 34.4 |
| 23.918          | L1   | 27.0           | 18.7 | 10.4                     | 37.4         | 29.1 | 60           | 50  | 22.6        | 20.9 |


| Frequency (MHz) | Line | Reading (dBμV) |      | Corr. <sup>1)</sup> (dB) | Level (dBμV) |      | Limit (dBμV) |     | Margin (dB) |      |
|-----------------|------|----------------|------|--------------------------|--------------|------|--------------|-----|-------------|------|
|                 |      | QP             | CAV  |                          | QP           | CAV  | QP           | CAV | QP          | CAV  |
| 0.985           | N    | -5.5           | -7.3 | 9.8                      | 4.3          | 2.5  | 56           | 46  | 51.7        | 43.5 |
| 1.282           | N    | -5.4           | -7.2 | 9.8                      | 4.4          | 2.6  | 56           | 46  | 51.6        | 43.4 |
| 4.300           | N    | 21.4           | 4.2  | 9.9                      | 31.3         | 14.1 | 56           | 46  | 24.7        | 31.9 |
| 4.569           | N    | 26.8           | 6.1  | 9.9                      | 36.7         | 16.0 | 56           | 46  | 19.3        | 30.0 |
| 5.126           | N    | 27.1           | 7.5  | 9.9                      | 37.0         | 17.4 | 60           | 50  | 23.0        | 32.6 |
| 24.202          | N    | 25.0           | 20.0 | 10.4                     | 35.4         | 30.4 | 60           | 50  | 24.6        | 19.6 |

**Note :**


1. Quasi-peak(Final Result) = Reading Value + Correction Factor

■ TEST PLOTS

AC Line Conducted Emission (L1) : EUT with RF output

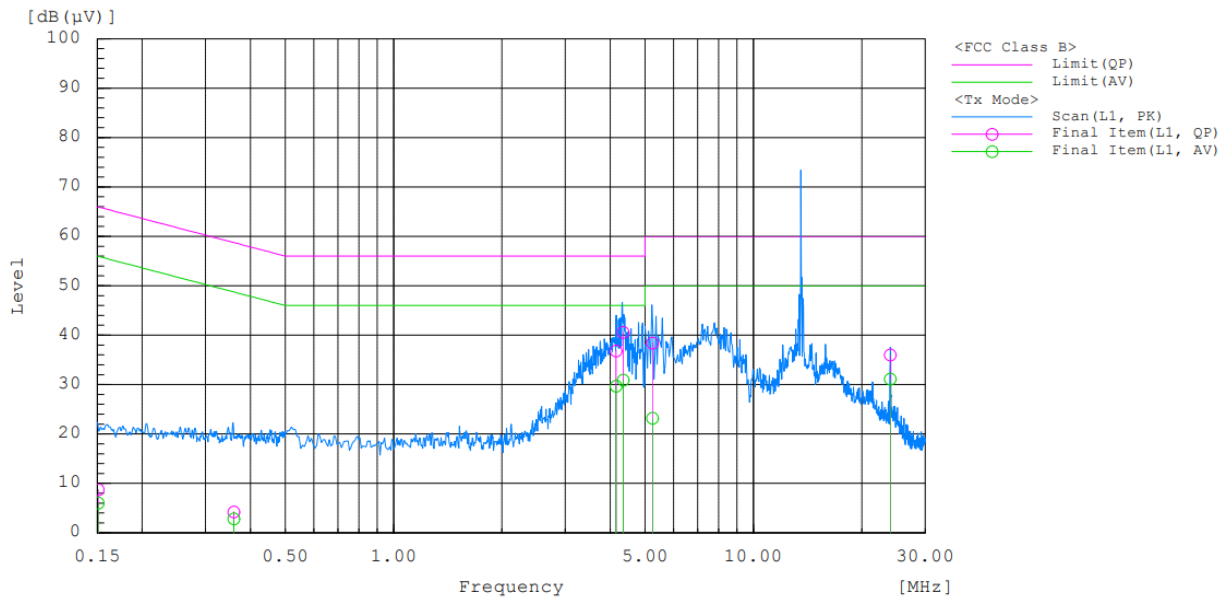

AC Line Conducted Emission (N) : EUT with RF output

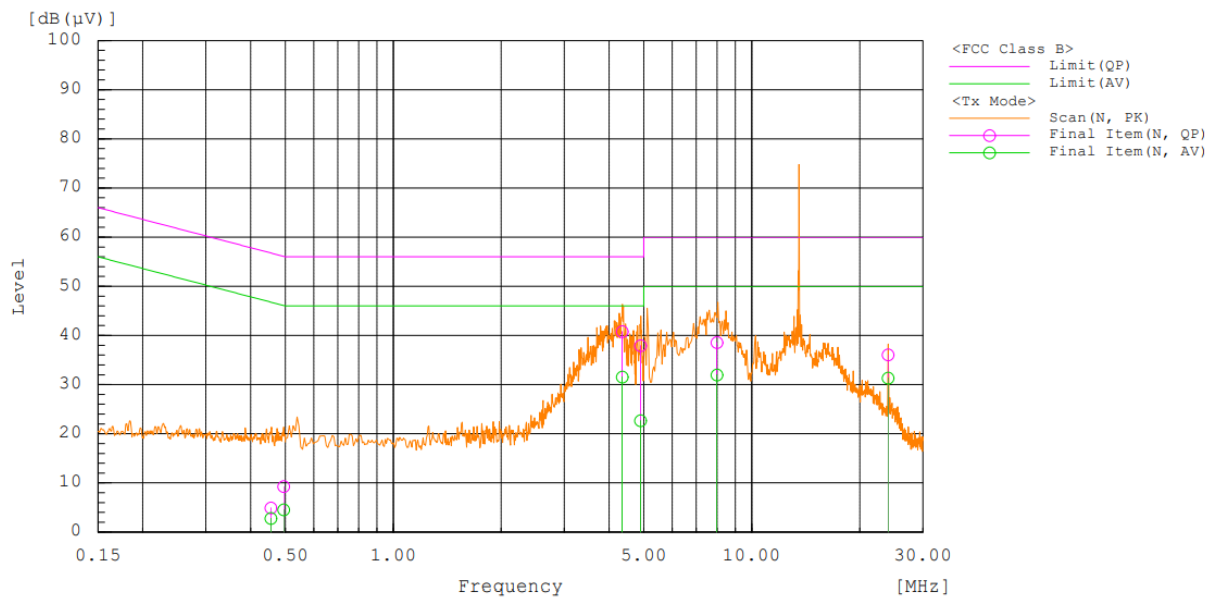


**Note :**


Peak at the 13.56 MHz is a fundamental frequency of HF

■ TEST PLOTS

AC Line Conducted Emission (L1) : RF output terminated with dummy load

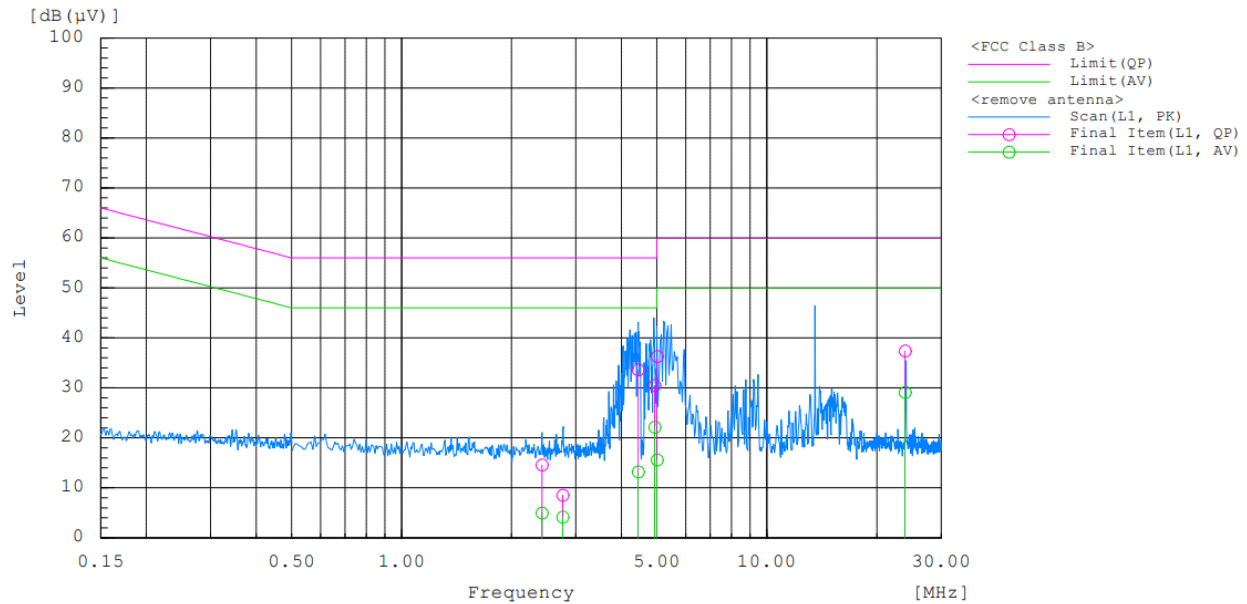

AC Line Conducted Emission (N) : RF output terminated with dummy load

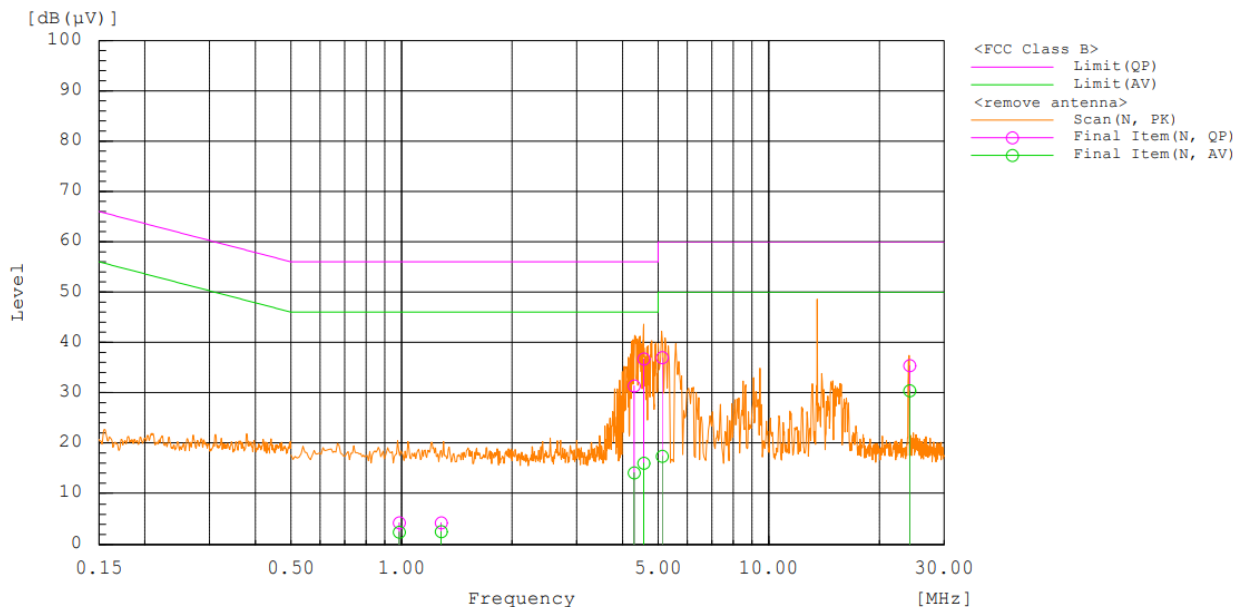

## 10. LIST OF TEST EQUIPMENT

| No.                                 | Instrument                            | Model No. | Calibration Due (mm/dd/yy) | Manufacture     | Serial No. |
|-------------------------------------|---------------------------------------|-----------|----------------------------|-----------------|------------|
| <input checked="" type="checkbox"/> | Signal Analyzer<br>(20 Hz ~ 40.0 GHz) | ESU40     | 12/20/2020                 | ROHDE & SCHWARZ | 100529     |
| <input checked="" type="checkbox"/> | Signal Analyzer<br>(10 Hz ~ 26.5 GHz) | N9020A    | 11/08/2020                 | Keysight        | MY52091291 |
| <input checked="" type="checkbox"/> | BI-LOG Antenna<br>(30 MHz ~ 1 GHz)    | JB6       | 11/29/2020                 | Sunol           | A071116    |
| <input checked="" type="checkbox"/> | Attenuator<br>(20 dB, DC ~ 26.5 GHz)  | 8493C     | 12/13/2020                 | HP              | 09072      |
| <input checked="" type="checkbox"/> | POWER AMP<br>(0.3GHz ~ 1GHz)          | 8447D     | 10/08/2020                 | HP              | 2944       |
| <input checked="" type="checkbox"/> | Loop Antenna<br>(0.009 ~ 30 MHz)      | HLA 6121  | 08/27/2020                 | TESEQ           | 43964      |
| <input checked="" type="checkbox"/> | EMI Test Receiver                     | ESR3      | 12/20/2020                 | Rohde & Schwarz | 102363     |
| <input checked="" type="checkbox"/> | LISN                                  | 3816/2SH  | 01/19/2021                 | EMCO            | 00205729   |
| <input checked="" type="checkbox"/> | LISN                                  | ENV216    | 01/19/2021                 | Rohde & Schwarz | 101349     |
| <input checked="" type="checkbox"/> | Temp & Humidity Chamber               | TH-ME     | 09/05/2020                 | JEIO TECH       | 5070515    |
| <input checked="" type="checkbox"/> | Frequency Counter                     | 53181A    | 08/02/2020                 | Agilent         | MY40002090 |

### **Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date

## APPENDIX A. TEST SETUP PHOTOS

*The setup photos are provided as a separate document*

## **APPENDIX B. PHOTOGRAPHS OF EUT**

### **B.1. EXTERNAL PHOTOS**

*The setup photos are provided as a separate document*

### **B.2. INTERNAL PHOTOS**

*The setup photos are provided as a separate document*

***END OF TEST REPORT***