




Ref Lvl 102 dBμV
Delta 1 [T1] 0.22 dB
2.805611 ms
RBW 1 MHz
VBW 3 MHz
SWT 100 ms
RF Att 10 dB
Unit dBμV

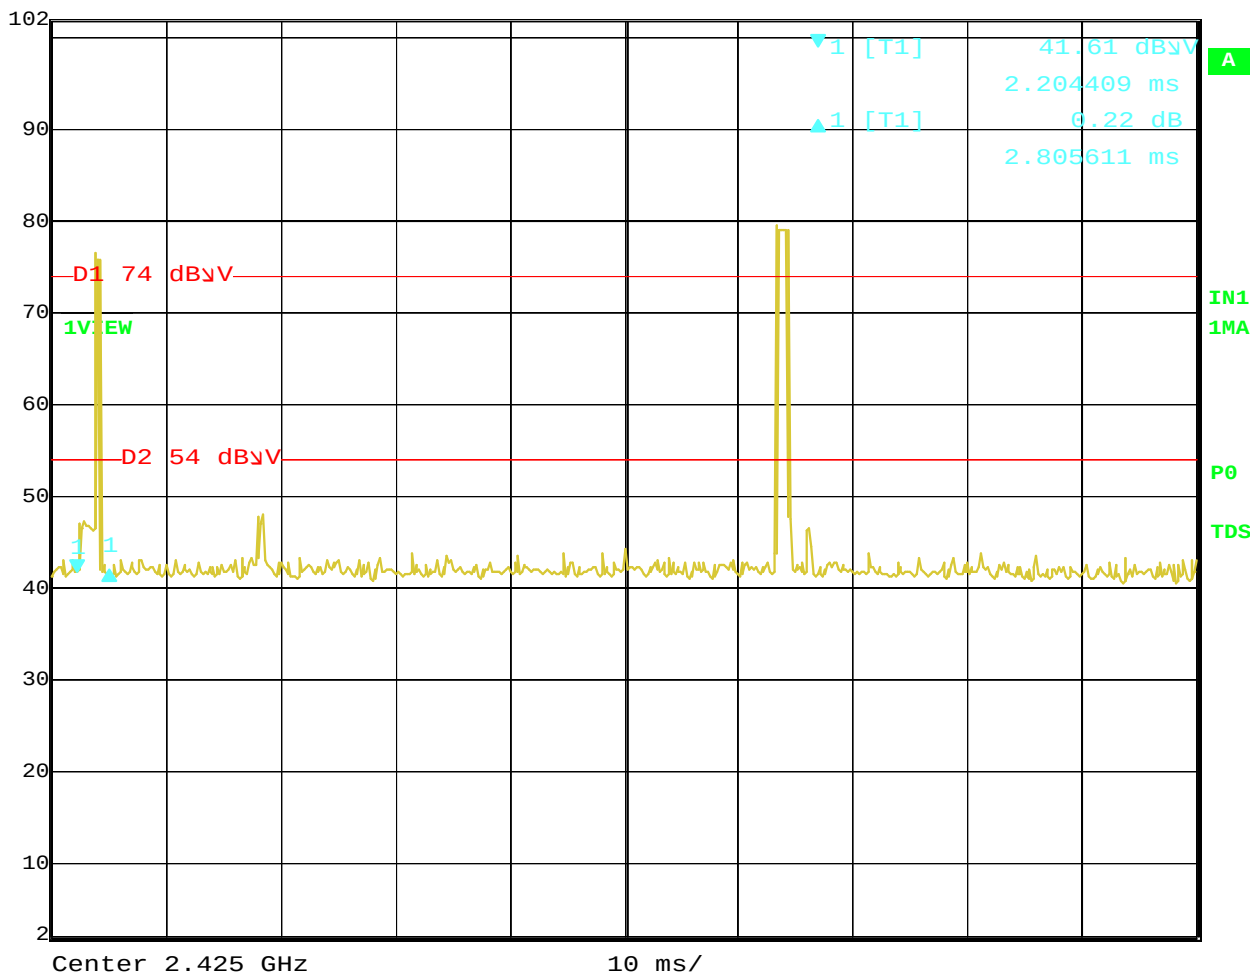


Date: 22.MAY.2014 07:38:28

Time of One Pulse – Advertising Mode



Ref Lvl 102 dBμV
Delta 1 [T1] 5.70 dB
62.324649 ms
RBW 1 MHz
VBW 3 MHz
SWT 100 ms
RF Att 10 dB
Unit dBμV

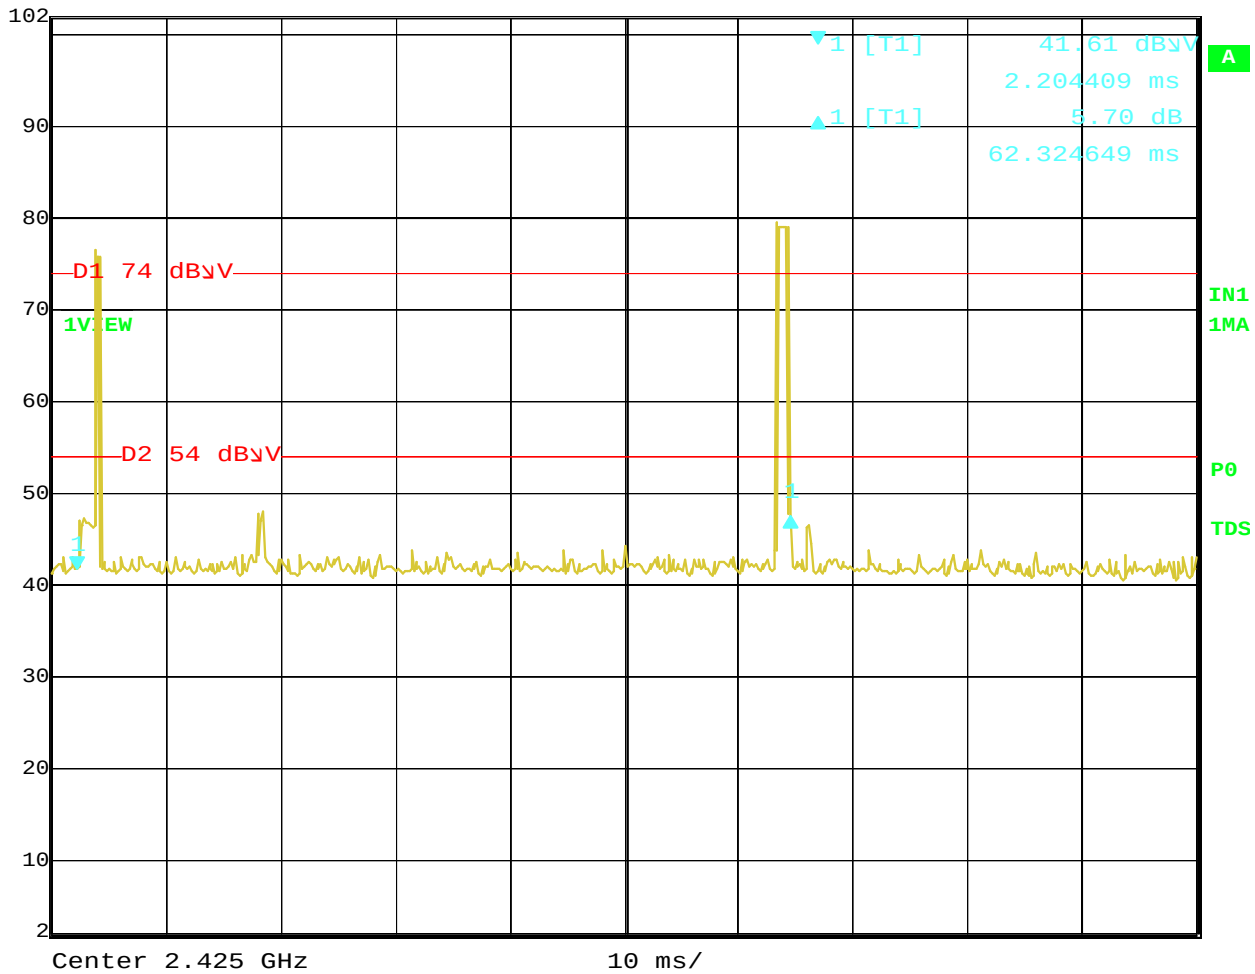


Date: 22.MAY.2014 07:38:09

Time Between Pulses – Advertising Mode – The duty cycle is less than 10% -- thus the full 20 dB peak to average ratio is allowed

$$\text{Duty Cycle} = 2.805611 \text{ ms} / (62.324649 \text{ ms} - 2.805611 \text{ ms}) = 4.71\%$$



Ref Lvl	Delta 1 [T1]	RBW	1 MHz	RF Att	10 dB
102 dBμV	4.70 dB	VBW	3 MHz		
	1.402806 ms	SWT	100 ms	Unit	dBμV

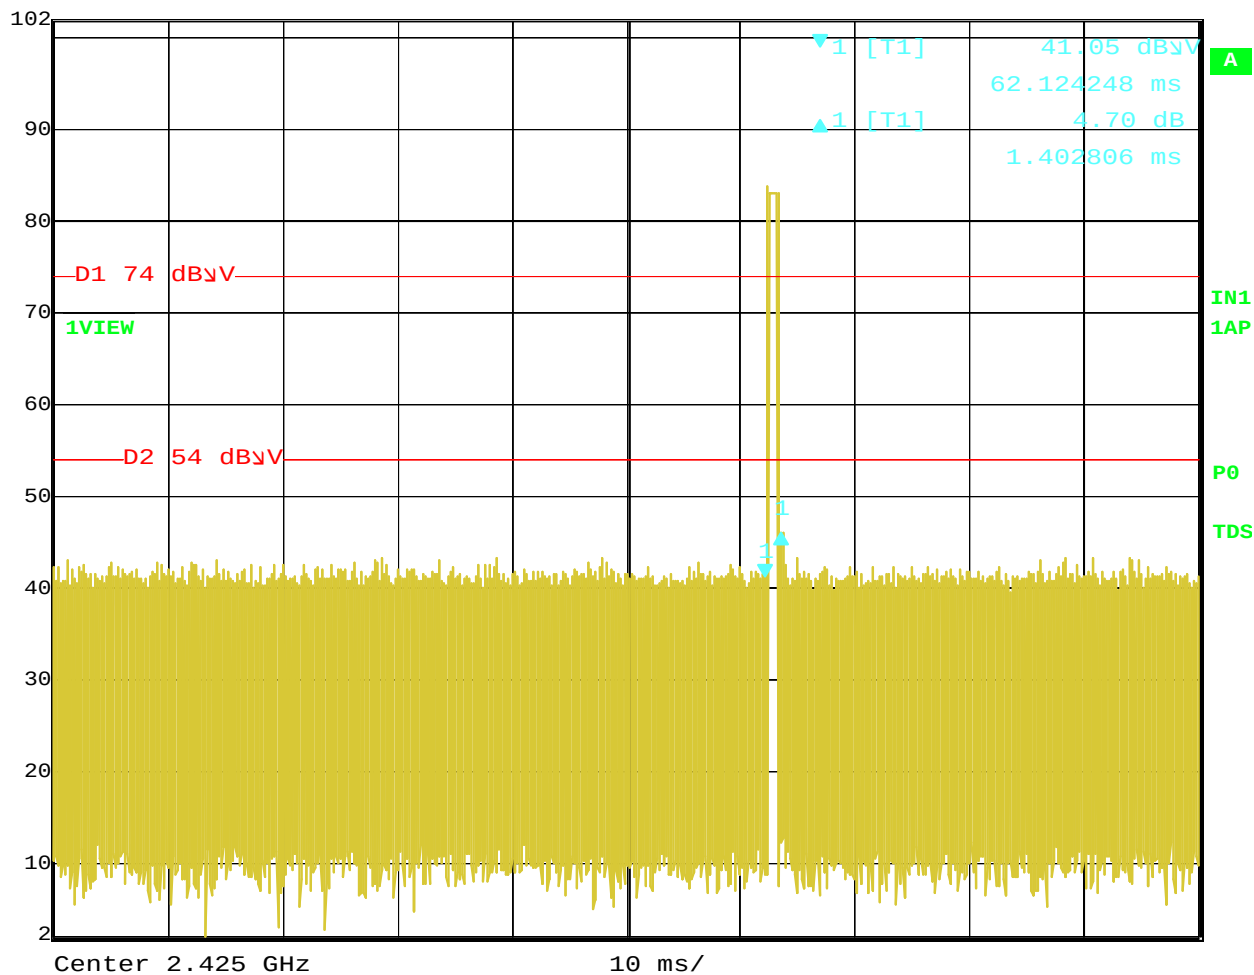


Date: 22.MAY.2014 07:42:50

Time of One Pulse – Pairing Mode



Ref Lvl 102 dBμV
Delta 1 [T1] 0.75 dB
120.641283 ms
RBW 1 MHz
VBW 3 MHz
SWT 200 ms
RF Att 10 dB
Unit dBμV

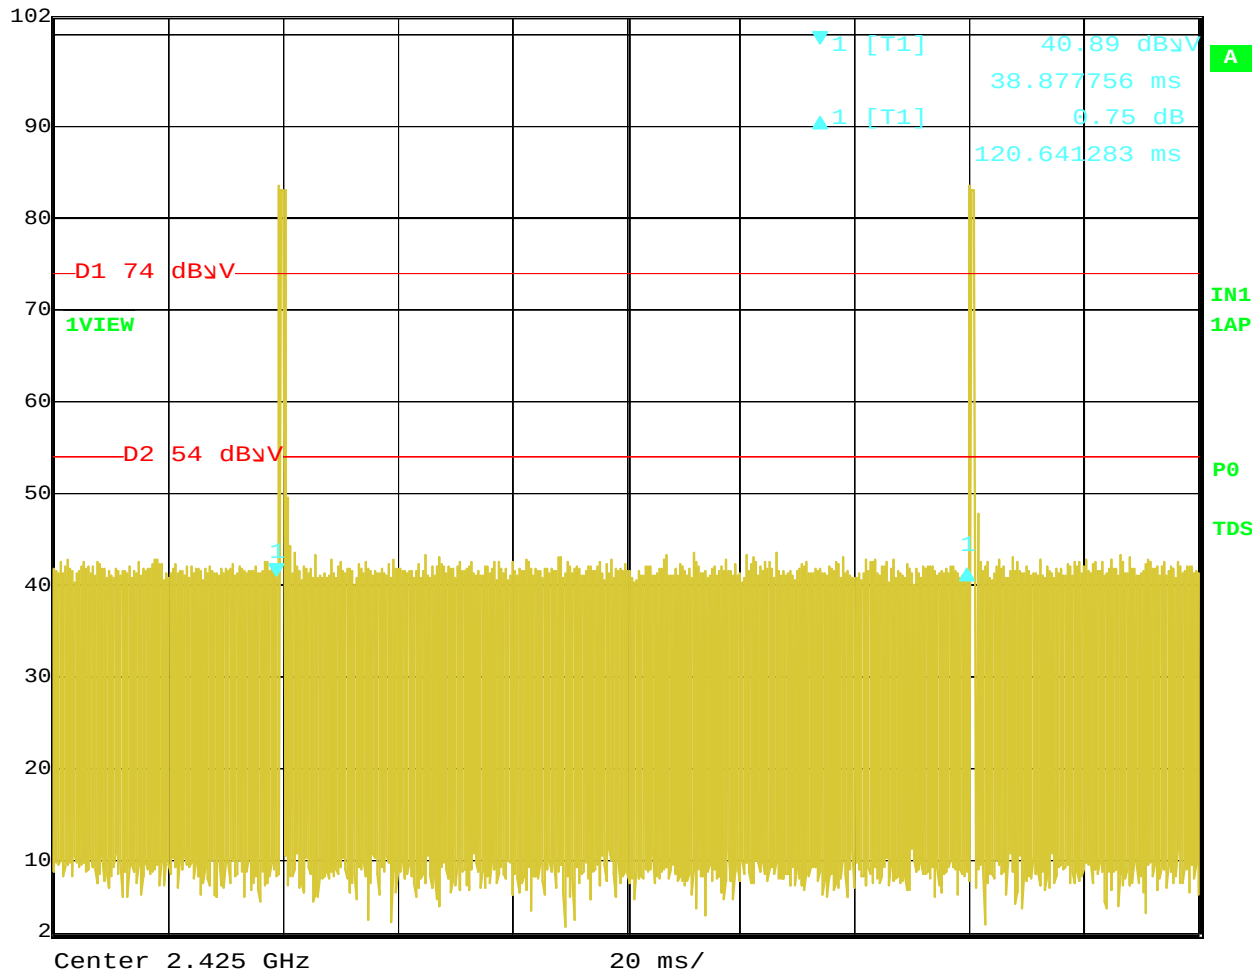

Date: 22.MAY.2014 07:43:32

Time Between Pulses – Pairing Mode – The duty cycle is less than 10% -- thus the full 20 dB peak to average ratio is allowed

$$\text{Duty Cycle} = 1.402806 \text{ ms} / 100 \text{ ms} = 1.403\%$$