

EMC TEST REPORT

Applicant TAKAYA Corporation

FCC ID MK4IN-RAT2-S

Product Reactivation Device

Model IN-RAT2-S

Report No. R2311A1311-E1

Issue Date January 29, 2024

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Fan Guangchang

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	6
2.4	Test Mode	7
3	Test Case Results	8
3.1	Radiated Emission.....	8
3.2	Conducted Emission.....	11
4	Uncertainty Measurement.....	14
5	Main Test Instruments	15
	ANNEX A: The EUT Appearance	16
	ANNEX B: Test Setup Photos	17

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: December 11, 2023 ~ December 17, 2023			
Date of Sample Received: December 4, 2023			
<p>Note:</p> <p>All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p>			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: jack.fan@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	TAKAYA Corporation
Applicant address	661-1 Ibara-cho, Ibara-shi, Okayama, Japan
Manufacturer	TAKAYA Corporation
Manufacturer address	661-1 Ibara-cho, Ibara-shi, Okayama, Japan

2.2 General Information

EUT Description	
Device Type	Movable Device
Model	IN-RAT2-S
SN	22000217
HW Version	19077P01-PWB-V11
SW Version	19077S01-V14
Power Rating	DC 5V from Adapter.
Connecting I/O Port(s)	Please refer to the User's Manual.
Antenna Type	Internal Antenna
Frequency	22.2 kHz (Tx only)
EUT Accessory	
Adapter	Manufacturer: Unifive Technology Co., Ltd. Model:UN312-0520 Input: 100-240V 50/60Hz 0.4A Output: DC 5.0V 2.0A 10.0W
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2023)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	Adapter + EUT +STANBY

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1	/
Conducted Emission	Mode 1	/

During the test, the preliminary test was performed in all modes, the test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 10 meters below 1GHz. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.


The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

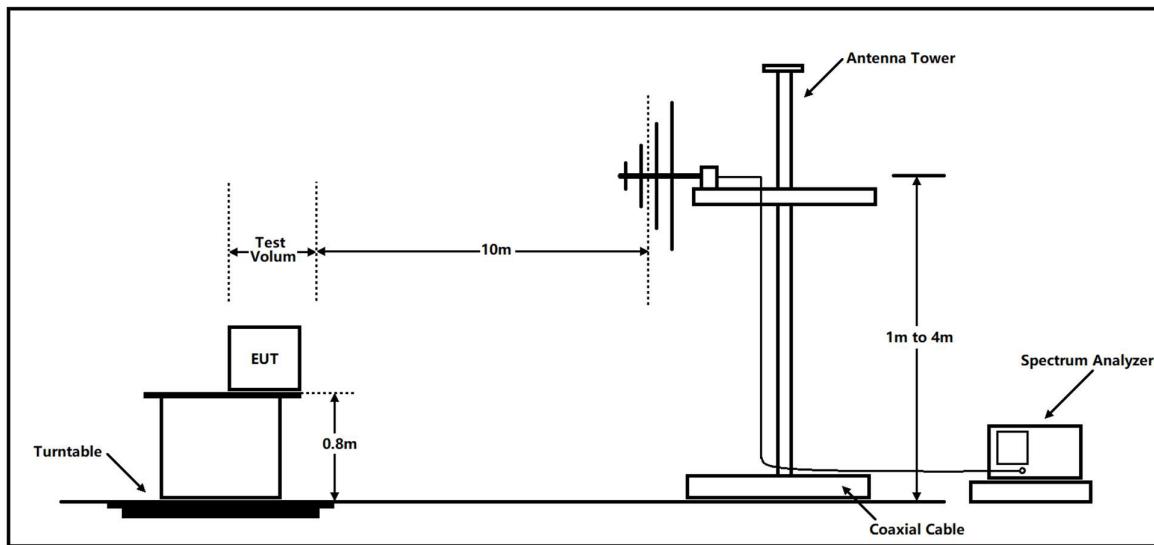Test Setup**Below 1GHz**

Note: Area side: 21mX12m

Limits**Class B**

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	30.0	Quasi-peak
88-216	33.5	Quasi-peak
216 – 960	36.0	Quasi-peak
960-1000	44.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak


Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

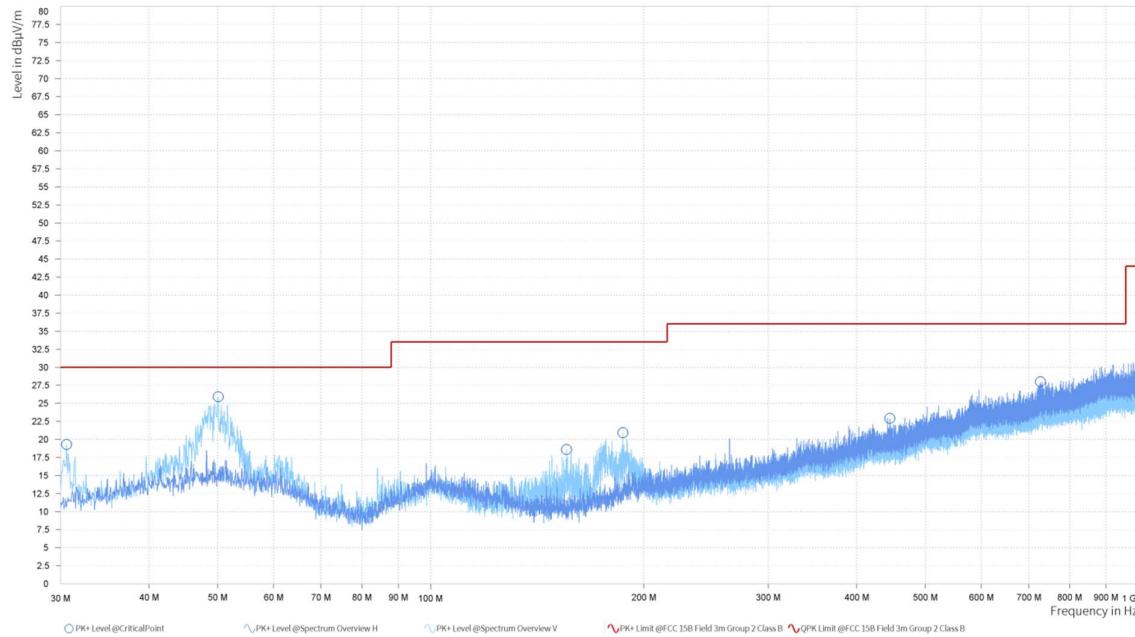

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
30.593	19.29	30.00	10.71	1.00	V	217.2	-11.88
50.101	25.72	30.00	4.28	2.00	V	223.1	-8.00
155.561	18.62	33.50	14.88	1.00	V	54.5	-13.29
186.871	20.92	33.50	12.58	2.00	V	0	-11.57
445.268	22.91	36.00	13.09	2.00	H	214.3	-4.09
727.053	27.99	36.00	8.01	2.00	H	78.7	0.46

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

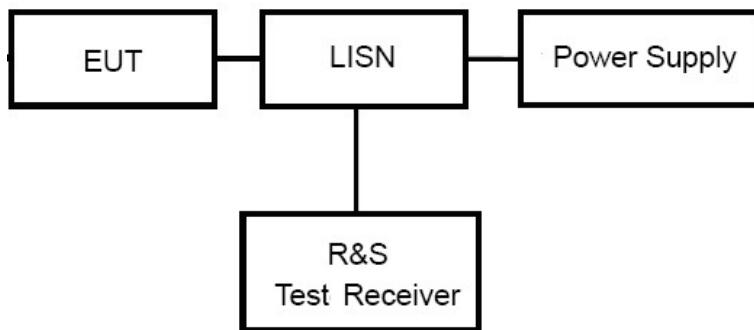

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits


Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50

*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

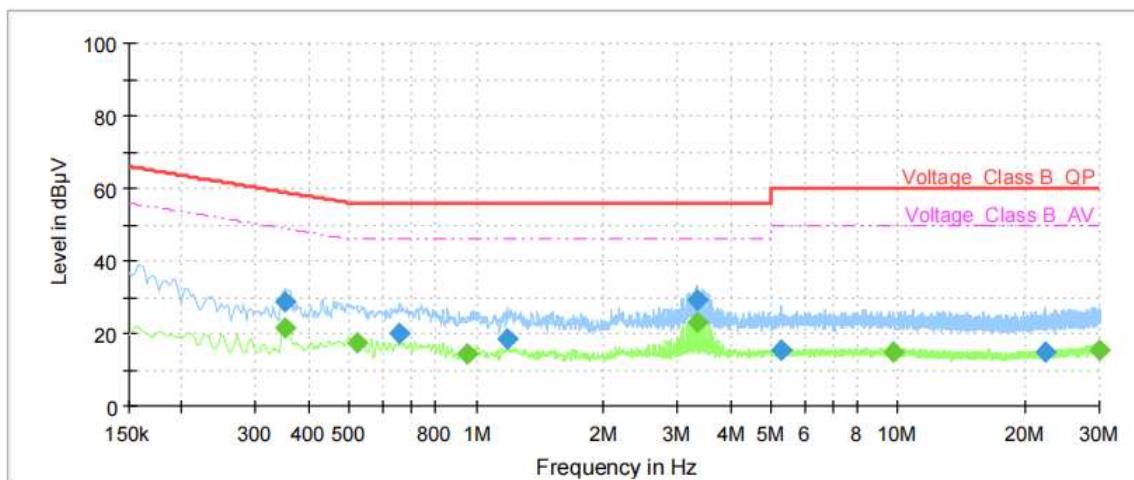


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.35	28.78	---	58.90	30.12	1000.0	9.000	L1	ON	21.0
0.35	---	21.78	48.90	27.12	1000.0	9.000	L1	ON	21.0
0.52	---	17.53	46.00	28.47	1000.0	9.000	L1	ON	20.8
0.66	19.76	---	56.00	36.24	1000.0	9.000	L1	ON	20.7
0.96	---	14.57	46.00	31.43	1000.0	9.000	L1	ON	20.3
1.18	18.59	---	56.00	37.41	1000.0	9.000	L1	ON	20.1
3.35	---	23.06	46.00	22.94	1000.0	9.000	L1	ON	19.5
3.35	29.39	---	56.00	26.61	1000.0	9.000	L1	ON	19.5
5.28	15.29	---	60.00	44.71	1000.0	9.000	L1	ON	19.5
9.73	---	14.64	50.00	35.36	1000.0	9.000	L1	ON	19.6
22.40	14.86	---	60.00	45.14	1000.0	9.000	L1	ON	19.7
29.84	---	15.54	50.00	34.46	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

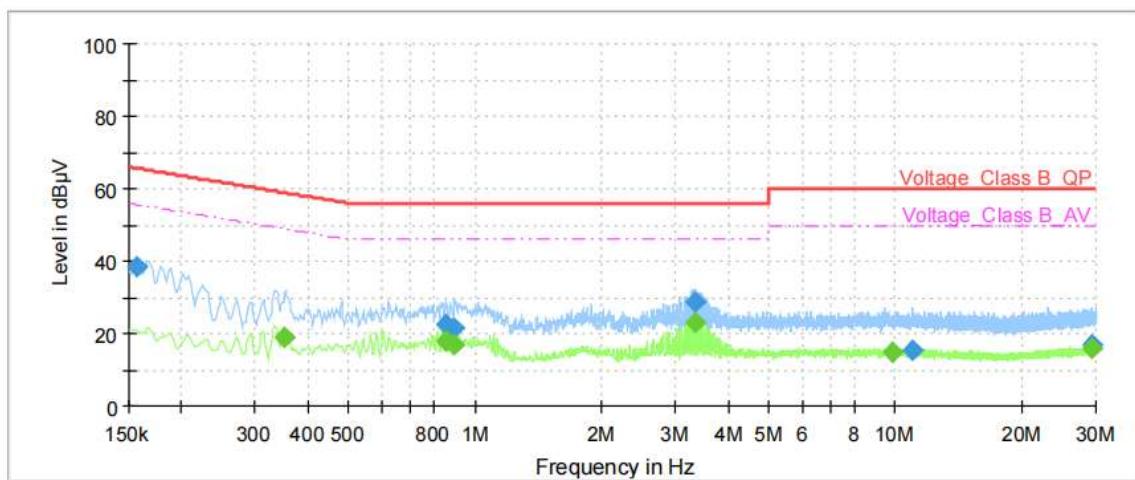

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	38.52	---	65.63	27.11	1000.0	9.000	N	ON	21.0
0.35	---	18.99	48.90	29.91	1000.0	9.000	N	ON	21.0
0.85	---	18.06	46.00	27.94	1000.0	9.000	N	ON	20.4
0.86	22.36	---	56.00	33.64	1000.0	9.000	N	ON	20.4
0.89	21.78	---	56.00	34.22	1000.0	9.000	N	ON	20.3
0.89	---	16.89	46.00	29.11	1000.0	9.000	N	ON	20.3
3.35	---	22.99	46.00	23.01	1000.0	9.000	N	ON	19.5
3.35	28.77	---	56.00	27.23	1000.0	9.000	N	ON	19.5
9.85	---	14.65	50.00	35.35	1000.0	9.000	N	ON	19.6
10.97	15.19	---	60.00	44.81	1000.0	9.000	N	ON	19.6
29.24	17.02	---	60.00	42.98	1000.0	9.000	N	ON	19.7
29.26	---	15.83	50.00	34.17	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	3.39 dB	1.96
Radiated Emission 200MHz – 1GHz	3.82 dB	1.96
Conducted Emission	2.57 dB	2

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESR	102720	2023-09-19	2024-09-18
EMI Test Receiver	R&S	ESR	102721	2023-09-19	2024-09-18
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01614	2023-09-13	2026-09-12
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01615	2023-10-19	2026-10-18
Software	R&S	ELEKTRA	5.00.2	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2023-05-12	2024-05-11
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****