



World Standardization Certification & Testing CO., LTD
World Standardization Safety and EMC Testing Centre

FCC 47 CFR PART 15 SUBPART C

TEST REPORT

Report Number: WSCT08030049E-RF

FCC ID: MKFARI53

For

MAIN UNIT

Model: MCM-9

Trade Name: N/A

Prepared for

Kenwo Industries Limited
Unit 1-2, 7/F, Block A, Hi-Tech Ind Ctr 5 Pak Tin Par Street
Tsuen Wan, Hong Kong

Prepared by

WORLD STANDARDIZATION CERTIFICATION & TESTING CO., LTD.
1-2/F, DACHONG KEJI BUILDING NO.25 OF TONGGU ROAD,
NANSHAN DISTRICT, SHENZHEN. PRC

TEL: 86-755-26996142
FAX: 86-755-26996253

***Note:** This report shall not be reproduced except in full, without the written approval of World standardization Certification & Testing CO., LTD. This document may be altered or revised by World standardization Certification & Testing CO., LTD. personnel only, and shall be noted in the revision section of the document.*

Applicant: Kenwo Industries Limited
REPORT NUMBER: WSCT08030049E-RF FCC ID: MKFARI53



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS AND LISTING	8
6. SETUP OF EQUIPMENT UNDER TEST	9
6.1 SETUP CONFIGURATION OF EUT	9
6.2 SUPPORT EQUIPMENT	9
7. FCC PART 15.209 REQUIREMENTS.....	10
7.1 RADIATED EMISSIONS.....	10
8. FCC PART 15.207 REQUIREMENTS	14



1. TEST RESULT CERTIFICATION

Applicant: Kenwo Industries Limited
Unit 1-2, 7/F, Block A, Hi-Tech Ind Ctr 5 Pak Tin Par Street
Tsuen Wan, Hong Kong

Equipment Under Test: MAIN UNIT

Trade Name: N/A

Model: MCM-9

Date of Test: January 07~25, 2008


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C Section 15.209	No non-compliance noted

We hereby certify that:

The above equipment was tested by World Standardization Certification & Testing Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209.

The test results of this report relate only to the tested sample identified in this report.

Approved by:



Kallen Wang/ General Manager

Tested By:



Henry Yang / Testing Engineer



2. EUT DESCRIPTION

Product	MAIN UNIT
Trade Name	N/A
Model Number	MCM-9
Model Difference	N/A
Power Supply	DC 12.6V powered by the battery

Remark: This submittal(s) (test report) is intended for FCC ID: MKFARI53 filing to comply with Section 15.205, 15.207, 15.209 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.231.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT is manual transmitter which has been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1-2/F, Dachong Science&Technology Building, No.28 of Tonggu Road, Nanshan District, ShenZhen.PRC.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by FCC. Oct 06.2007. The certificate registration number is 276008 to perform Electromagnetic Interference tests according to FCC PART 15 and CISPR 22 requirements.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
Call Help	OMIKRON	400RP	N/A	N/A	0.5m	DC Cable 0.5m

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15.209 REQUIREMENTS

7.1 RADIATED EMISSIONS

LIMIT

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

NOTE: In the above emission table, the tighter limit applies at the band edges.

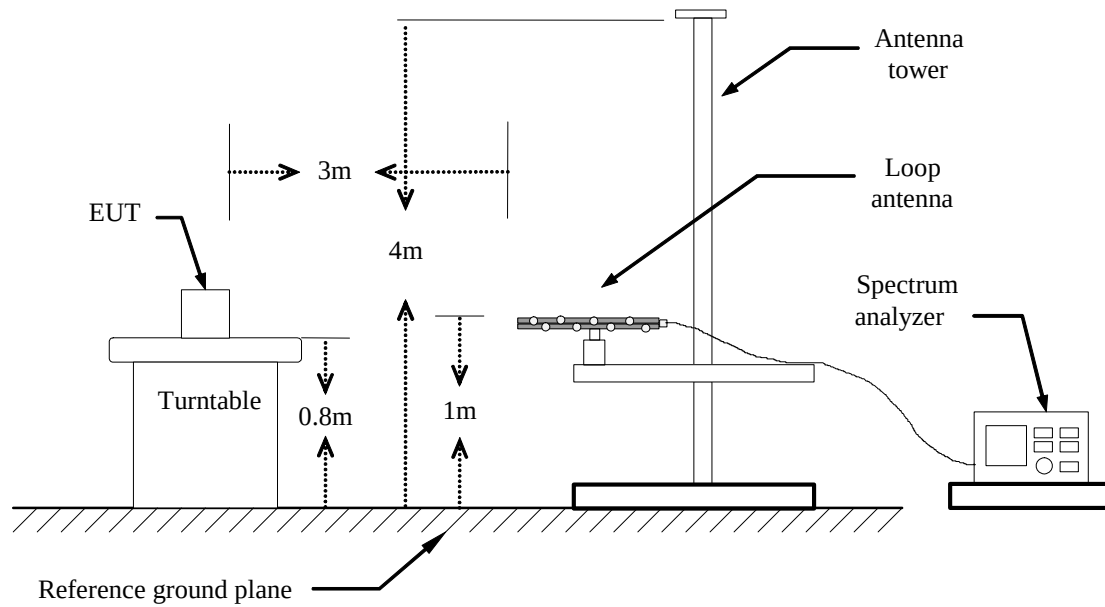
MEASUREMENT EQUIPMENT USED

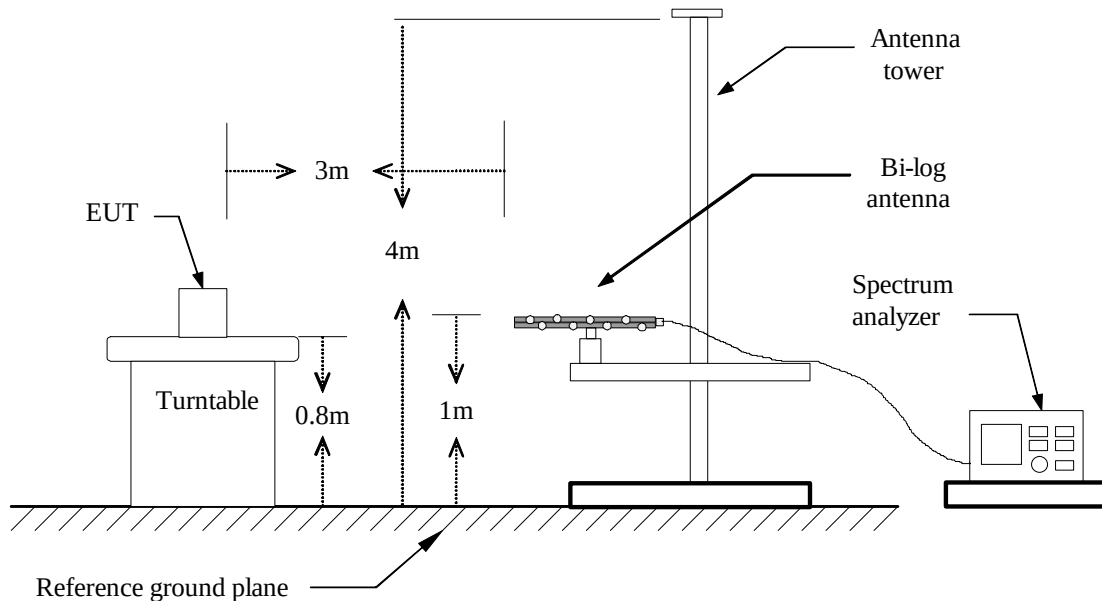
966 RF CHAMBER				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300398	03/15/2009
EMI Test Receiver	R&S	ESCI	100005	03/15/2009
Pre Amplifier	HP	HP8447E	2945A02715	03/15/2009
Antenna	Sunol Sciences Corporation	JB3	A021907	03/15/2009
Turn Table	CCS	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CCS	N/A	N/A	N.C.R
RF Comm. Test set	HP	8920B	US36142091	N.C.R
Site NSA	C&C	N/A	N/A	03/15/2009
Horn Antenna	TRC	N/A	N/A	03/15/2009
Loop Antenna	ARA	PLA-1030/B	1028	03/15/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Applicant: Kenwo Industries Limited

REPORT NUMBER: WSCT08030049E-RF FCC ID: MKFARI53

Test Configuration**Below 30MHZ**

BELOW 1GHZ**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete



Operation Mode: RFID transmitting

Test Date: March 19, 2008

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/AV)	Reading value (dBuV)	Correction Factor (dB)	Corrected value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
0.125	V	AV	52.00	-12.00	40.00	105.66	65.66
69.96	V	Peak	43.56	-12.36	31.20	40.00	8.80
119.36	V	Peak	47.39	-15.23	32.16	43.50	11.34
571.32	V	Peak	44.95	-8.36	36.59	46.00	9.41
0.125	H	AV	53.00	-12.00	41.00	105.66	64.66
111.82	H	Peak	49.15	-15.03	34.12	43.50	9.38
309.45	H	Peak	47.31	-9.63	37.68	46.00	8.32
721.23	H	Peak	42.02	-6.13	35.89	46.00	10.11

8. FCC PART 15.207 REQUIREMENTS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site G				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCS30	100343	03/15/2009
LISN	AFJ	LS16	16010222119	03/15/2009
LISN	Meestec	AN3016	04/10040	03/15/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

Not applicable (Since the EUT is powered by battery)

**APPENDIX 1
PHOTOGRAPHS OF TEST SETUP****Radiated Emission Set up Photos**