

Nemko Korea Co., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333

FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer:

Hansol Electronics Inc.

#27-29, Hanchun-ri, Ducksan-Myun,

Jinchun-Kun, Choongbuk, Korea

Attn : Mr. S. P. Yang

Dates of Issue : January 15, 2003

Test Report No. : NK2DE021

Test Site : Nemko Korea Co., Ltd.

EMC site, Korea

FCC ID

MSAB15GF

Brand Name

Hansol

Contact Person

Hansol Electronics Inc.

#27-29, Hanchun-ri, Ducksan-Myun, Jinchun-Kun,

Choongbuk, Korea

Mr. S. P. Yang

Telephone No. : +82 43 530 8503

FCC Rule Part(s):

Part 15 & 2

Classification :

FCC Class B Device

EUT Type:


15" TFT LCD Monitor

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Tested By : T. H. Ryu
Engineer



Reviewed By : H.H. Kim
Manager & Chief Engineer

Hansol Electronics Inc.

FCC ID:MSAB15GF

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
GENERAL TEST CONDITION	5
DESCRIPTION OF TEST (Conducted Emissions)	6
DESCRIPTION OF TEST (Radiated Emissions)	7
TEST DATA (Conducted Emissions)	9
TEST DATA (Radiated Emissions)	11
PLOT OF EMISSION	13
SAMPLE CALCULATIONS	17
ACCURACY of MEASUREMENT	18
TEST EQUIPMENT	19
RECOMMENDATION/CONCLUSION	20
APPENDIX A - LABELLING REQUIREMENTS	21
APPENDIX B - CIRCUIT DIAGRAM	22
APPENDIX C - PHOTOGRAPHS of TEST SET-UP	23
APPENDIX D - EUT PHOTOGRAPHS	25
APPENDIX E - USER'S MANUAL	39
APPENDIX F - SCHEMATIC DIAGRAM	40

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

Responsible Party* :	Hansol Electronics Inc.
Contact Person :	Mr. S. P. Yang Tel No.: +82 43 530 8503
Manufacturer :	Hansol Electronics Inc. #27-29, Hanchun-ri, Ducksan-Myun, Jinchun-Kun, Choongbuk, Korea Tel No.: +82 43 530 8503

- FCC ID: MSAB15GF
- Model: B15GF
- Brand Name: Hansol
- EUT Type: 15" TFT LCD Monitor
- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: January 3, 2003 to January 8, 2003
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2DE021

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Hansol Electronics Inc.**

FCC ID : **MSAB15GF, 15" TFT LCD Monitor.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

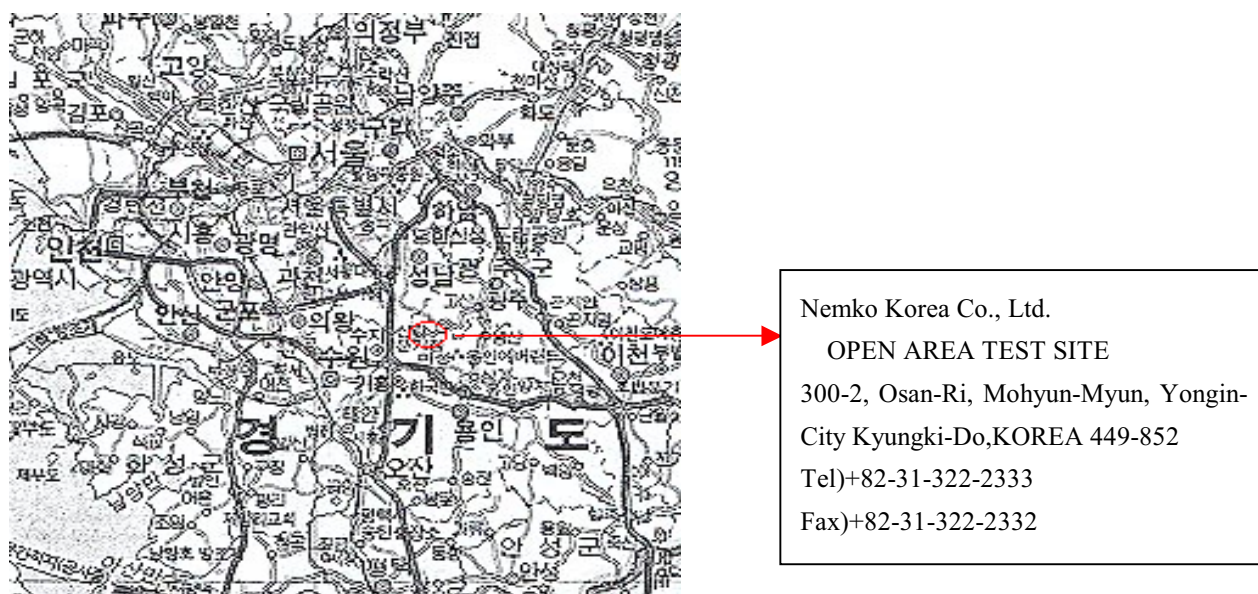


Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

TEST CONDITIONS & EUT INFORMATION

Operating During Test

The EUT was operated by the software. The PC sent “H” pattern to monitor(EUT) and The monitor displayed “H” pattern on screen. It also sent “H” pattern to printer, then the printer printed it out. This software had above all functions conduct in order.

And a sinusoidal signal of 1kHz from HDD was played continuously.

Support Equipment

PC	DELL, Model: Precision 340 1.8m unshielded AC power cable	S/N: 7XGG618
Monitor(EUT)	Hansol, FCC ID: MSAB15GF 1.5m unshielded AC power cable 1.8m shielded D-sub cable	S/N: N/A
Keyboard	Silitek Yet Foundate, Model: SK-8110 1.8m unshielded Din cable	S/N: N/A
PS/2 Mouse	IntelliMouse , Model: X06-08477 1.5m unshielded Din cable	S/N: N/A
USB Mouse	Logitech , Model: M-UB48 1.5m shield Din cable	S/N: LZA71148729
Speaker	1.5m unshielded cable	S/N:N/A
Printer	HP, Model No: C5870K 1.5m unshielded AC power cable 1.8m Shield D-sub cable	S/N: SG88R131GW

EUT Information

Clock	12MHz(Y300), 14.318MHz(Y100)
Chipset(s)	MST9010(U100), 61P4(U300)
Horizontal Frequency	60kHz(Max)
Vertical Frequency	75Hz(Max)
LCD Panel	M150XN / AU Optronics Corp.
Main Board	H550(A) / Hansol
Combo Board	IPHS-2L / IPT research Co., Ltd.
	FLFI 521-01A / Frontek Co., Ltd.
Port(s)	VGA, Audio In, Headphone

Description of Test Modes

The EUT was pre-tested under the following resolutions mode:

1. 1024 X 768 (75.029Hz/ 60.023kHz), clock frequency 78.75MHz
2. 800 X 600 (75.0Hz/ 46.875kHz), clock frequency 49.5MHz
3. 640 X 480 (75.0Hz/ 37.5kHz), clock frequency 31.5MHz

The worst emission level was found when the EUT was tested under 1024 X 768 resolution, therefore, the test data this mode was recorded in the report.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and Kyoritsu KNW-408 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (PMM, PMM9000).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

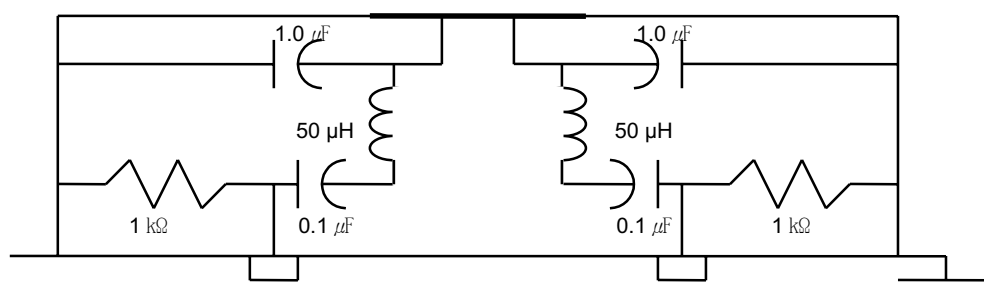


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.(Rohde Schwarz HL025)

The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

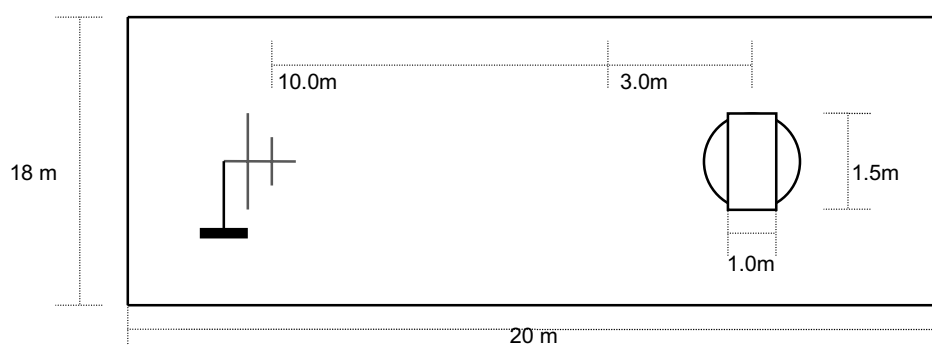


Fig. 3. Dimensions of Outdoor Test Site

TEST DATA

Conducted Emissions

FCC ID : MSAB15GF

Combo Board : IPHS-2L / IPT research Co., Ltd.

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.20	48.6	40.1	L	63.6	53.6	15.0	13.5
0.30	37.0	27.8	L	60.3	50.3	23.3	22.5
4.07	31.3	22.1	N	56.0	46.0	24.7	23.9
7.35	30.4	21.5	L	60.0	50.0	29.6	28.5
8.15	34.2	24.1	L	60.0	50.0	25.8	25.9
11.62	29.6	18.5	L	60.0	50.0	30.4	31.5

Table 1. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
- 4.LINE : L =Line , N = Neutral



 Tested by **T. H. Ryu**

TEST DATA

Conducted Emissions

FCC ID : MSAB15GF

Combo Board : FLFI 521-01A / Frontek Co., Ltd.

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.18	43.7	33.4	N	64.7	54.7	21.0	21.3
0.23	35.7	26.6	N	62.4	52.4	26.7	25.8
0.29	30.1	22.0	N	60.5	50.5	30.4	28.5
2.26	32.6	27.5	L	56.0	46.0	23.4	18.5
2.37	33.5	27.2	L	56.0	46.0	22.5	18.8
18.96	33.0	22.3	L	60.0	50.0	27.0	27.7

Table 2. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
4. LINE : L =Line , N = Neutral



 Tested by **T. H. Ryu**

TEST DATA

Radiated Emissions

FCC ID : MSAB15GF

Combo Board : IPHS-2L / IPT research Co., Ltd.

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
139.29	46.4	H	-14.3	32.1	43.5	11.4
188.05	42.4	H	-13.4	29.0	43.5	14.5
208.94	46.1	H	-13.5	32.6	43.5	10.9
264.66	41.2	H	-12.2	29.0	46.0	17.0
278.58	48.4	H	-11.8	36.6	46.0	9.4
292.51	40.1	H	-11.5	28.6	46.0	17.4

Table 3. Radiated Measurements at 3meters

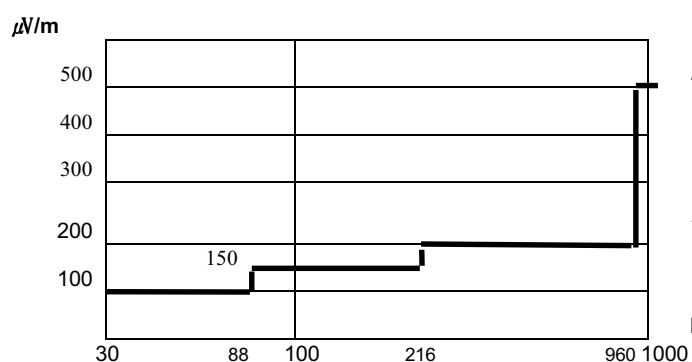


Fig. 3. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4.

Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

Tested by T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB15GF

Combo Board : FLFI 521-01A / Frontek Co., Ltd

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
139.25	43.5	H	-14.3	29.2	43.5	14.3
153.28	39.1	H	-12.7	26.4	43.5	17.1
209.02	45.1	H	-13.5	31.6	43.5	11.9
222.97	39.2	H	-13.2	26.0	46.0	20.0
278.69	45.0	H	-11.8	33.2	46.0	12.8
292.64	41.1	H	-11.5	29.6	46.0	16.4

Table 4. Radiated Measurements at 3meters

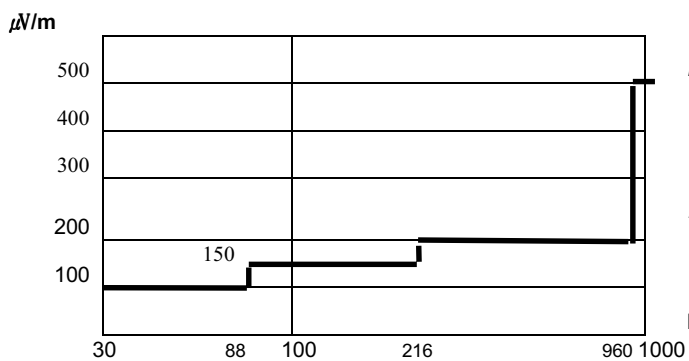


Fig. 3. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4.

Above 1GHz the limit is 500 μ V/m.


NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

Tested by T. H. Ryu

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line, IPHS-2L)**

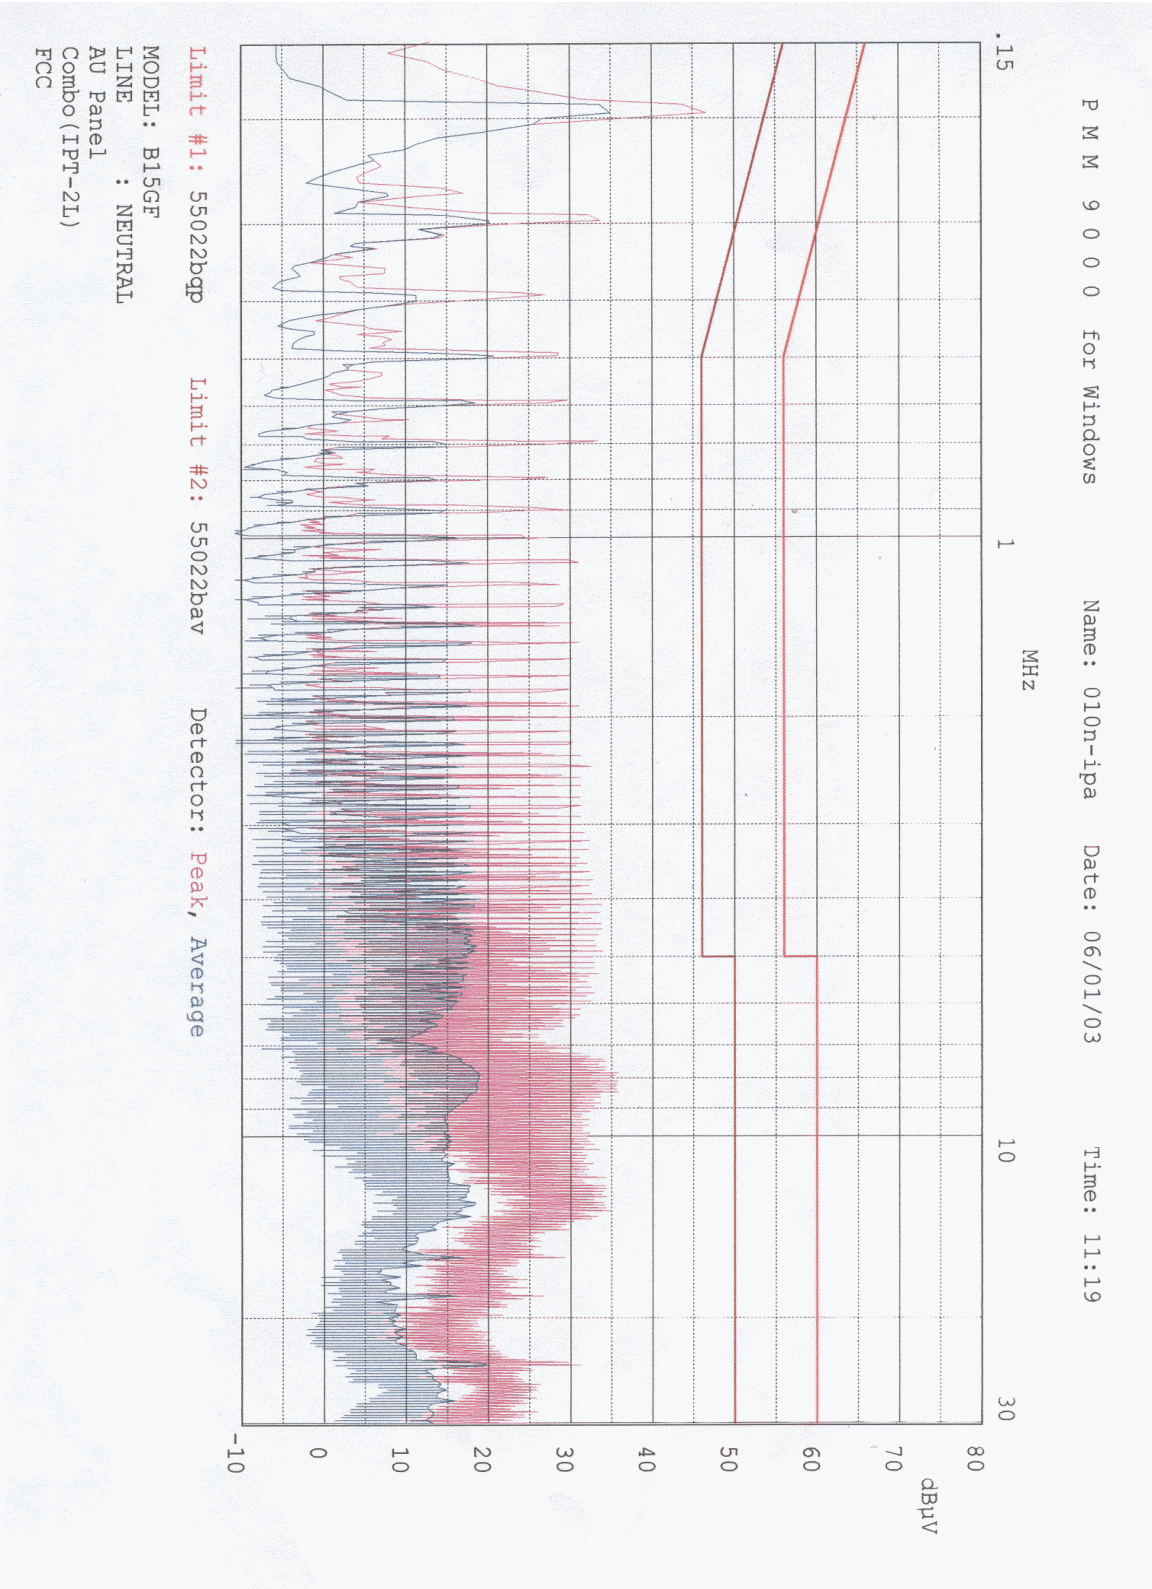

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Neutral, IPHS-2L)

