

RF Test Report

Applicant : ASUSTeK COMPUTER INC.
Applicant Address : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Product Type : Tablet
Trade Name : ASUS
Model Number : B3000DQ1
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Received Date : Dec. 22, 2021
Test Period : Jan. 08 ~ Feb. 23, 2022
Issued Date : Feb. 25, 2022

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Frequency Range : 9 kHz to 40 GHz

Test Firm MRA designation number: TW0010

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Revisions	Revised By
00	Jan. 26, 2022	Initial Issue	Vivien Li
01	Feb. 18, 2022	Update chapter 3.1 (P.8)	Vivien Li
		Update chapter 5.2 (P.27)	
02	Feb. 25, 2022	Update chapter 3.4 (P.10)	Vivien Li
		Update chapter 5.1 (P.27 / 28)	

Verification of Compliance

Applicant : ASUSTeK COMPUTER INC.

Applicant Address : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

Product Type : Tablet

Trade Name : ASUS

Model Number : B3000DQ1

FCC ID : MSQ-PAD-B3000DQ1

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By :

(Kai Yu Yang)

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology.....	8
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step.....	8
3.3.	Configuration of Test System Details.....	9
3.4.	Test Instruments	10
3.5.	Test Site Environment.....	14
4	Measurement Procedure.....	15
4.1.	AC Power Line Conducted Emission Measurement.....	15
4.2.	Radiated Emission Measurement.....	17
4.3.	Maximum Conducted Output Power Measurement.....	21
4.4.	6 dB RF Bandwidth Measurement.....	22
4.5.	Maximum Power Density Measurement.....	23
4.6.	Out of Band Conducted Emissions Measurement.....	24
4.7.	Antenna Measurement	24
5	Test Results	25
5.1	Conducted Emission.....	25
5.2	Conducted Test Results.....	29
5.3	Radiated Emission Measurement.....	43
Appendix A. Test Setup Photographs		

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	

2 EUT Description

Applicant	ASUSTeK COMPUTER INC. 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan		
Product Type	Tablet		
Trade Name	ASUS		
Model No.	B3000DQ1		
FCC ID	MSQ-PAD-B3000DQ1		
Frequency Range	2402 ~ 2480 MHz		
Modulation Type	GFSK		
Operate Temp. Range	5 ~ 35 °C		
EUT Power Rating	DC 15 V, 3 A		
RF Output Power	LE, GFSK:	0.00347 W	
	2LE, GFSK:	0.00370 W	
	BLR C2, GFSK:	0.00344 W	
	BLR C8, GFSK:	0.00344 W	

Antenna list :

Antenna Source	ANT	Manufacturer	Part No. (Vendor)	ASUS Part No.	Type	Frequency (MHz)	Max. Gain (dBi)
1	Main	INPAQ	WAG-F-LB-00-060	14008-04980100	PIFA Antenna	2402 – 2480	1.10

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: LE, GFSK Continuous TX Mode
Mode 3: 2LE, GFSK Continuous TX Mode
Mode 4: BLR C2, GFSK Continuous TX Mode
Mode 5: BLR C8, GFSK Continuous TX Mode

Final-Test Mode
Mode 1: Transmit Mode
Mode 2: LE, GFSK Continuous TX Mode
Mode 3: 2LE, GFSK Continuous TX Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1 : The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.


Note 2 : The device is used with adapter (number : AD10360) performing the test.

3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	Turn on TX function.
4	EUT run test program.

3.3. Configuration of Test System Details

Conducted Emissions / Radiated Emissions

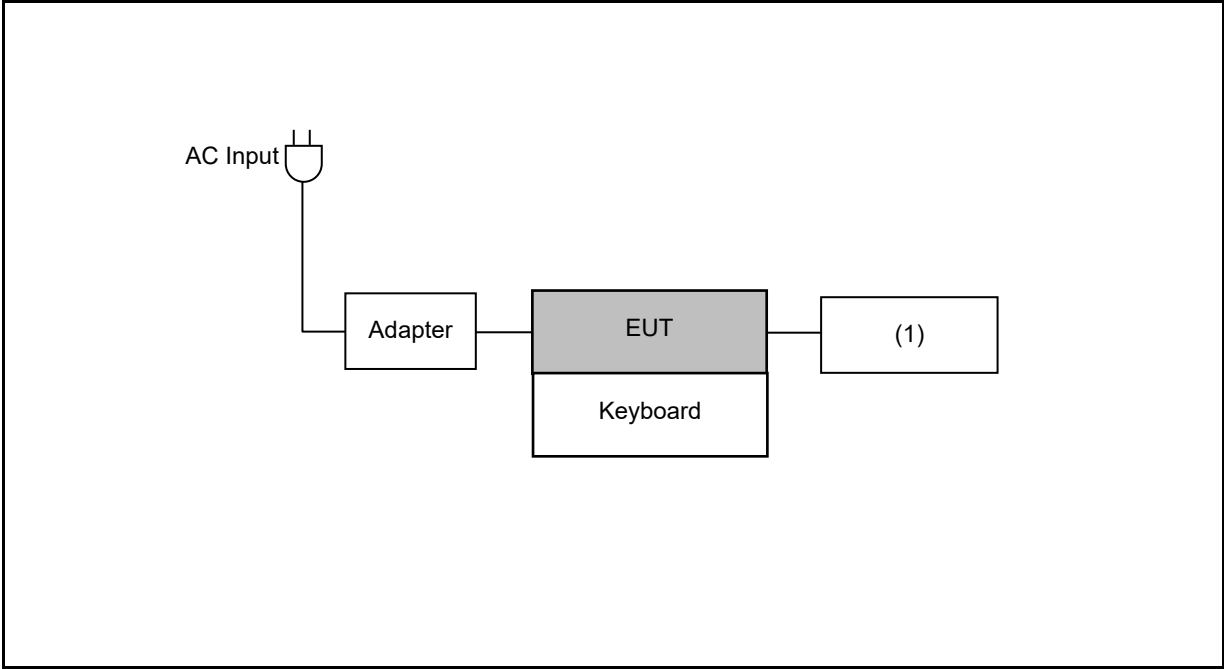

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Earphone	YUJI	Y201	---	---

3.4. Test Instruments

For Conducted Emission

Test Period: Jan. 08 ~ Feb. 23, 2022

Testing Engineer: Brian Lin, Louis Shen

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 21, 2021	1 year
☐	Test Receiver	R&S	ESCI	100722	Nov. 02, 2021	1 year
☐	Test Receiver	R&S	ESCI	101000	Nov. 26, 2021	1 year
☒	LISN	R&S	ENV216	101040	Mar. 29, 2021	1 year
☒	LISN	R&S	ENV216	101041	Apr. 08, 2021	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	May 28, 2021	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

For Conducted

Test Period: Jan. 15, 2022

Testing Engineer: Brian Lin

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Power Sensor	Anritsu	MA2411B	1126022	Sep. 03, 2021	1 year
☐	Power Meter	Anritsu	ML2495A	1135009	Sep. 03, 2021	1 year
☒	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
☒	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 17, 2021	1 year
☐	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 23, 2021	1 year
☐	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 09, 2021	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
☐	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 30, 2021	1 year
☐	Signal Generator	Keysight	N5182B	MY53052569	Apr. 20, 2021	1 year
☐	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 20, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Feb. 01, 2021	1 year
☐	RF Communication Test Set	HP	8920A	3344A03297	Aug. 10, 2021	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions
Test Period: Jan. 12, 2022
Testing Engineer: Marc Yeh

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 18, 2021	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
☒	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 19, 2021	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 15, 2021	1 year
☐	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 06, 2021	1 year
☐	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330A1F	001	Jul. 23, 2021	1 year
☐	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 21, 2021	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025A1F	002	Jul. 26, 2021	1 year
☐	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Aug. 19, 2021	1 year
☒	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Apr. 07, 2021	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 19, 2021	1 year
☐	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 09, 2021	1 year
☐	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 24, 2021	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 24, 2021	1 year
☐	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2021	1 year
☐	RF Cable	EMCI	EMC104-N-N-6000	TE01-1	Feb. 19, 2021	1 year

Note: N.C.R. = No Calibration Request.

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	Feb. 19, 2021	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A100	J11005	Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A900	J11004	Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 06, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Feb. 01, 2021	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

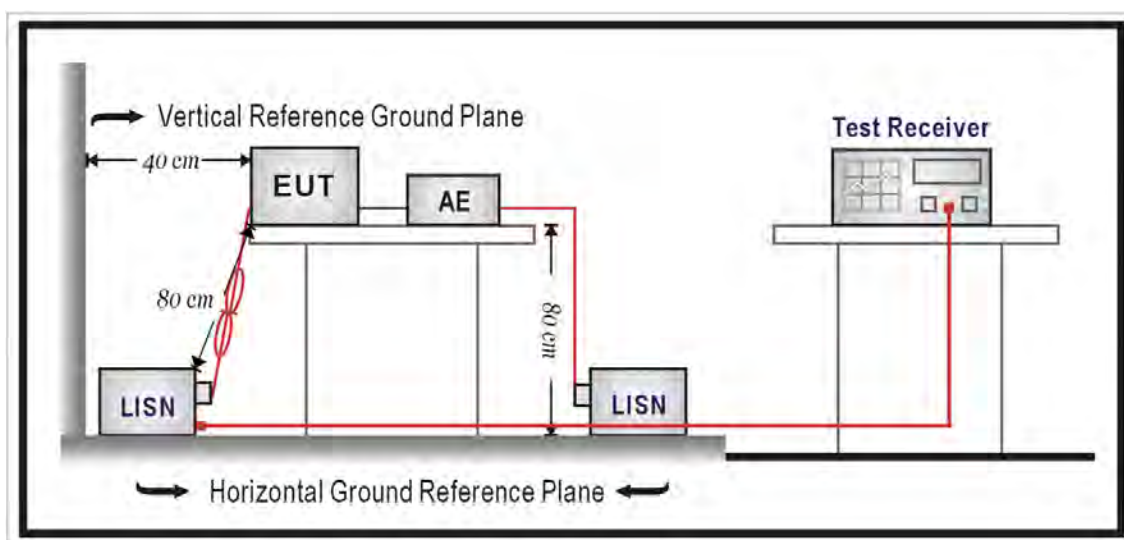

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

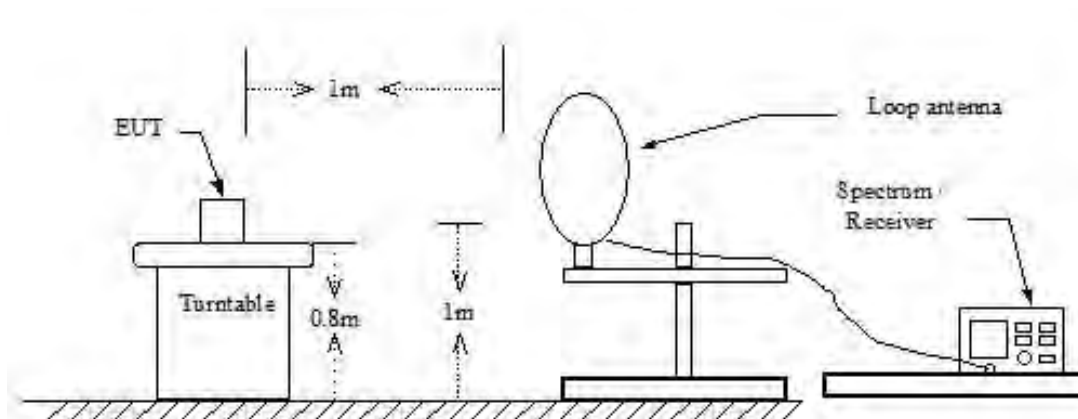

Below 1 GHz

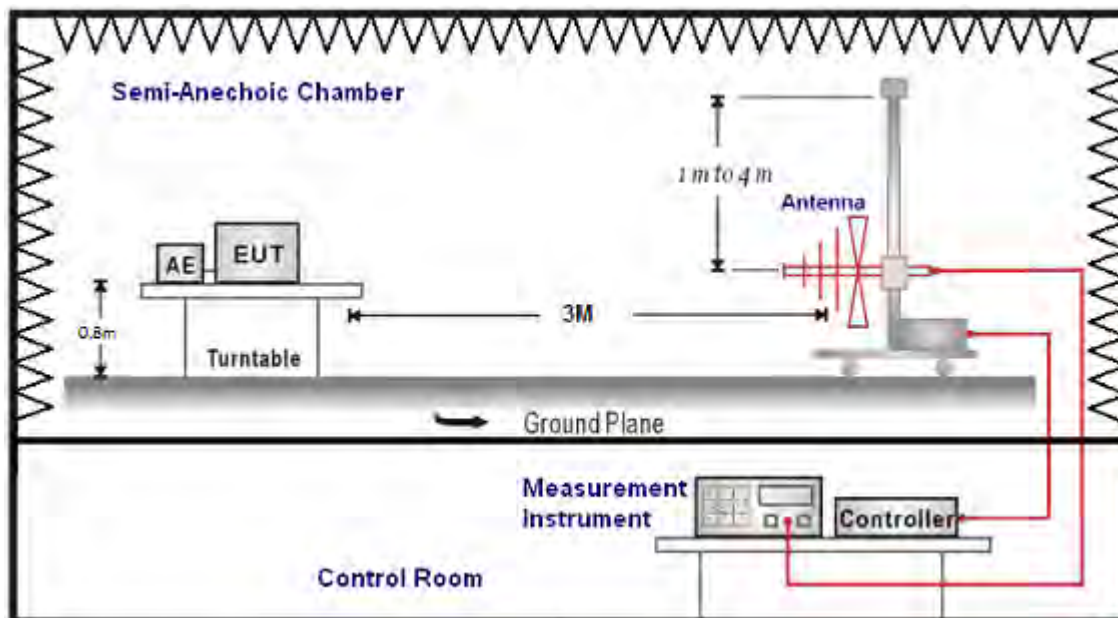

Above 1 GHz

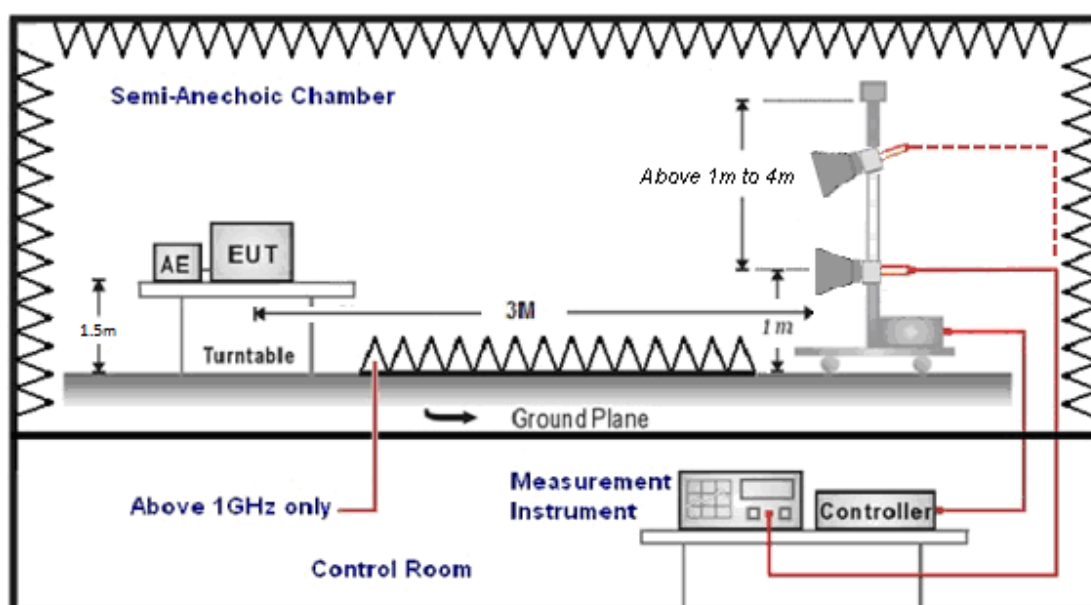

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

■ Other Description

1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, there is no need to evaluate the average.

4.The average measurement was not performed when the peak measured data is under the limit of average detection.


5.The emission level of other frequencies is much lower than the limit and not shown in test report.

4.3. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

■ Test Setup

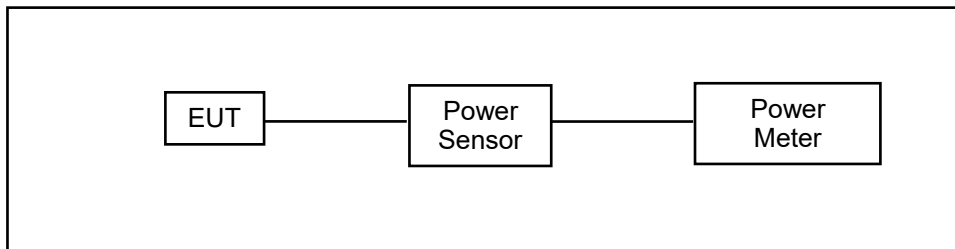

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


4.4. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ Test Setup

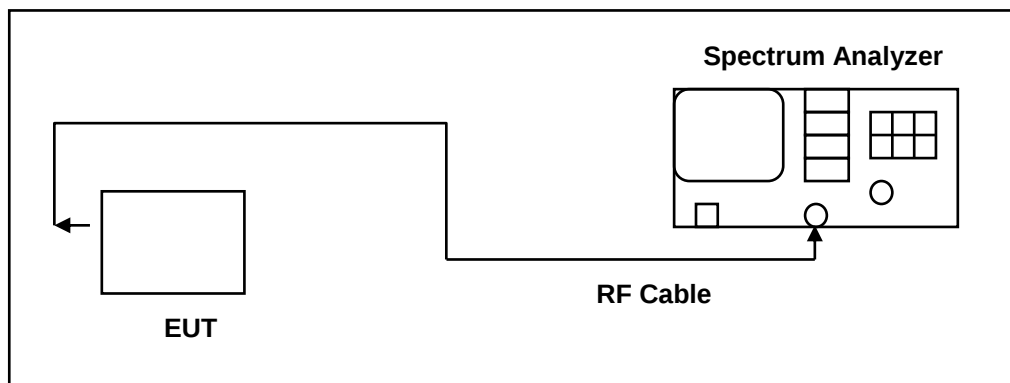

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

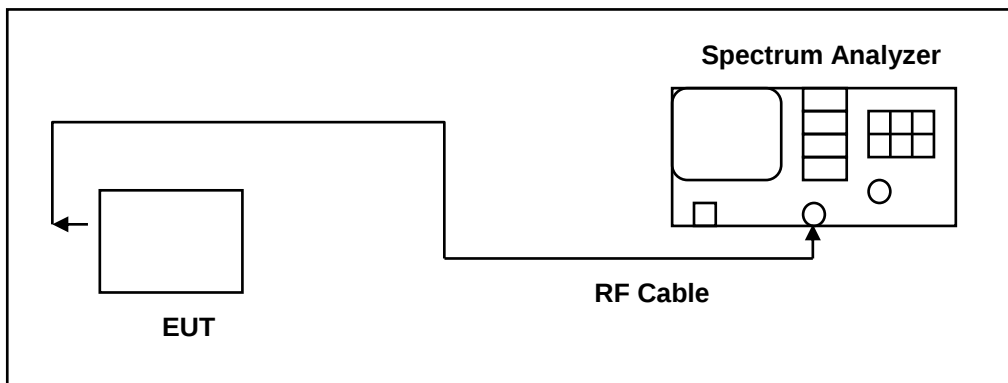

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

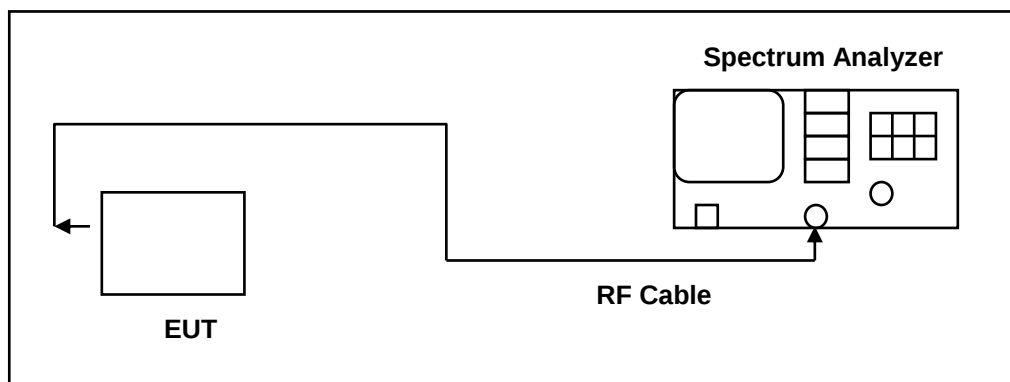

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

5.1 Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

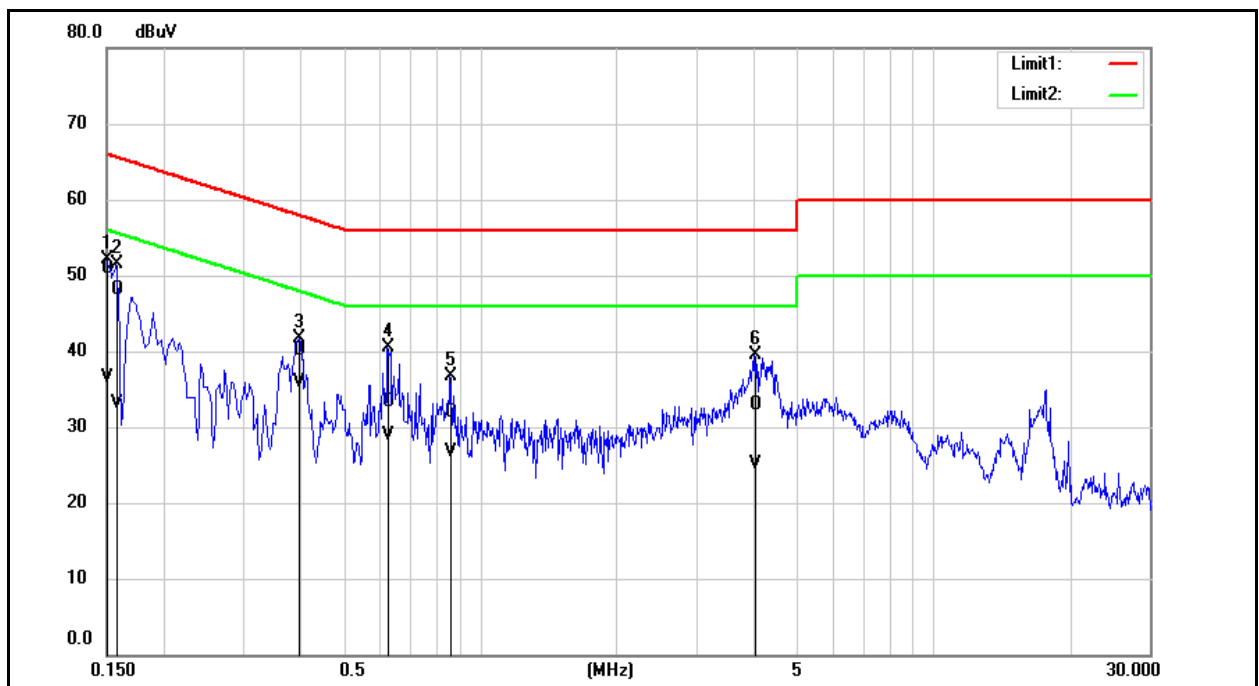


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	41.13	26.85	9.74	50.87	36.59	66.00	56.00	-15.13	-19.41	Pass
2	0.1580	38.43	23.41	9.74	48.17	33.15	65.57	55.57	-17.40	-22.42	Pass
3	0.3980	30.41	26.08	9.74	40.15	35.82	57.90	47.90	-17.75	-12.08	Pass
4	0.6260	23.53	19.10	9.75	33.28	28.85	56.00	46.00	-22.72	-17.15	Pass
5	0.8580	22.08	17.04	9.75	31.83	26.79	56.00	46.00	-24.17	-19.21	Pass
6	4.0380	22.98	15.24	9.84	32.82	25.08	56.00	46.00	-23.18	-20.92	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading (dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

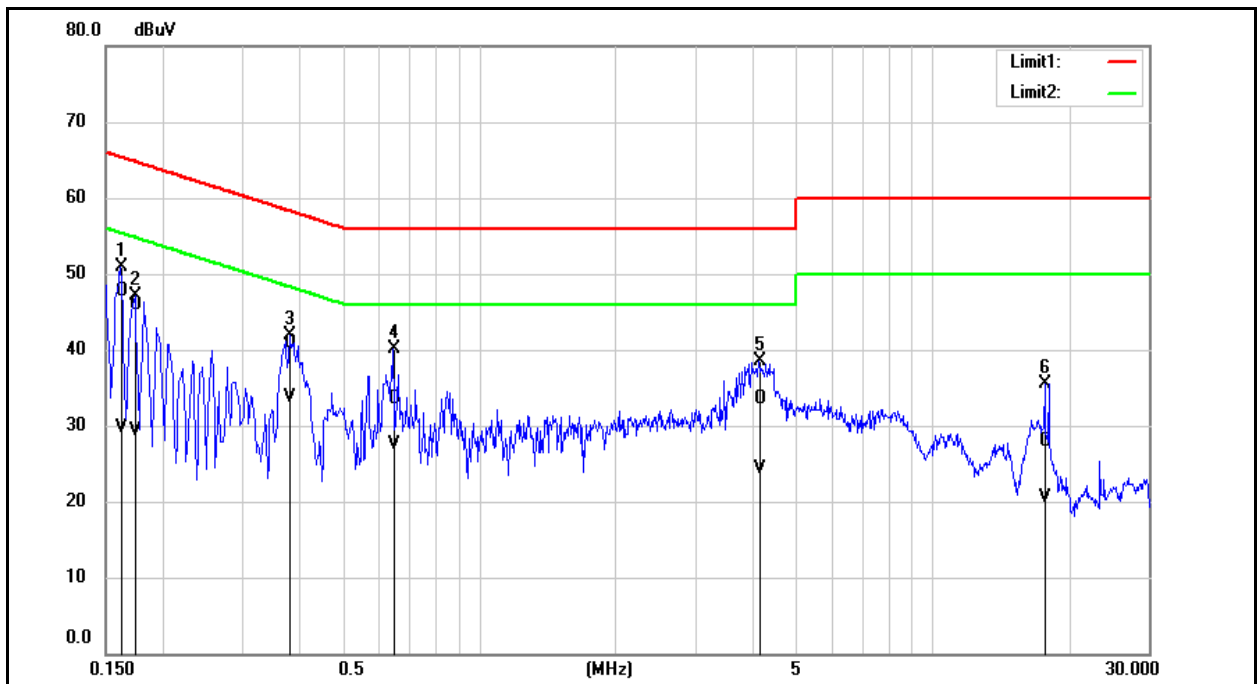


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	37.90	20.02	9.74	47.64	29.76	65.36	55.36	-17.72	-25.60	Pass
2	0.1740	36.07	19.65	9.74	45.81	29.39	64.77	54.77	-18.96	-25.38	Pass
3	0.3820	31.13	24.03	9.73	40.86	33.76	58.24	48.24	-17.38	-14.48	Pass
4	0.6460	23.71	17.84	9.74	33.45	27.58	56.00	46.00	-22.55	-18.42	Pass
5	4.1500	23.62	14.44	9.86	33.48	24.30	56.00	46.00	-22.52	-21.70	Pass
6	17.6700	17.75	10.44	10.15	27.90	20.59	60.00	50.00	-32.10	-29.41	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading (dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 240 V/50 Hz
Mode:	Mode 1		
Description:			

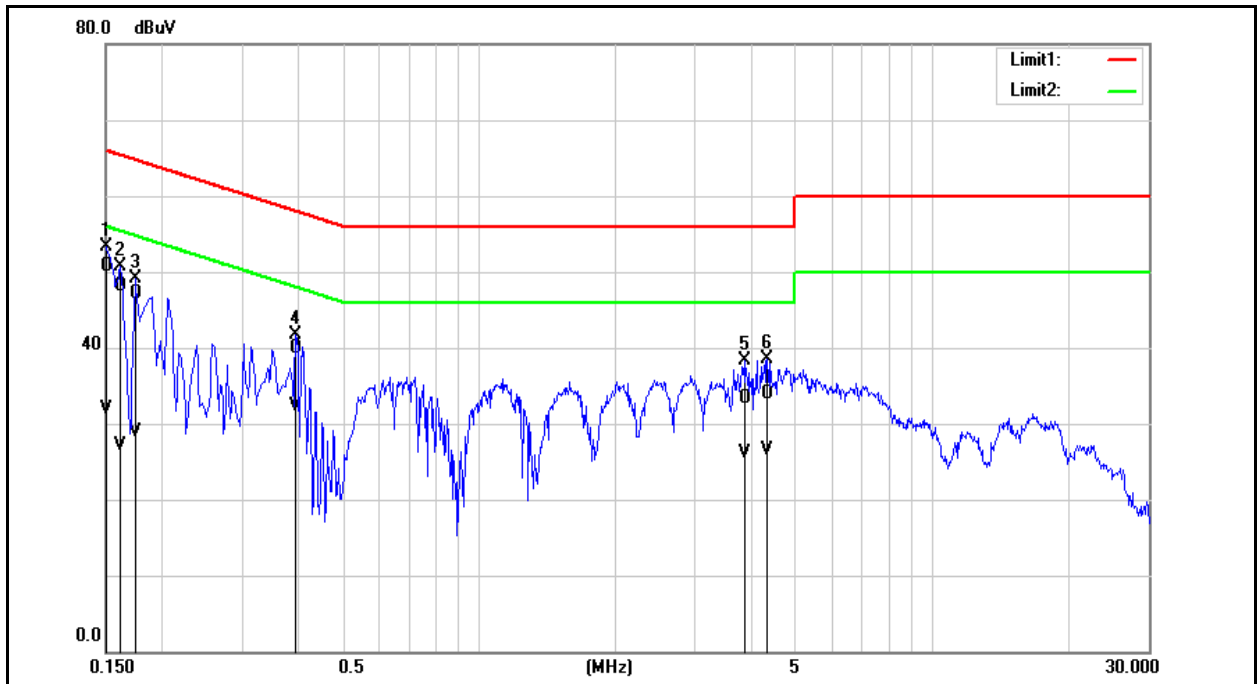


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	41.00	22.12	9.74	50.74	31.86	66.00	56.00	-15.26	-24.14	Pass
2	0.1620	38.27	17.40	9.74	48.01	27.14	65.36	55.36	-17.35	-28.22	Pass
3	0.1740	37.38	19.24	9.74	47.12	28.98	64.77	54.77	-17.65	-25.79	Pass
4	0.3940	30.20	22.47	9.74	39.94	32.21	57.98	47.98	-18.04	-15.77	Pass
5	3.8420	23.49	16.23	9.84	33.33	26.07	56.00	46.00	-22.67	-19.93	Pass
6	4.3340	24.12	16.57	9.85	33.97	26.42	56.00	46.00	-22.03	-19.58	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading (dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 240 V/50 Hz
Mode:	Mode 1		
Description:			

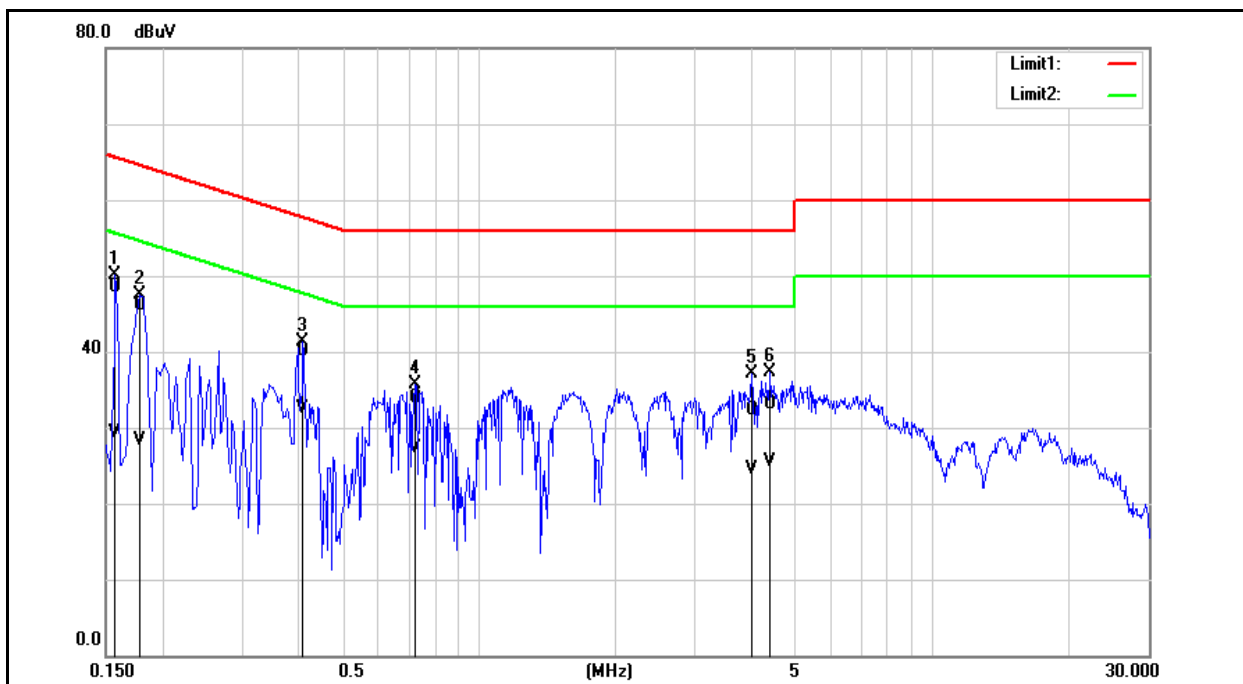

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	38.84	19.50	9.74	48.58	29.24	65.57	55.57	-16.99	-26.33	Pass
2	0.1780	36.45	18.61	9.73	46.18	28.34	64.58	54.58	-18.40	-26.24	Pass
3	0.4100	30.36	22.79	9.73	40.09	32.52	57.65	47.65	-17.56	-15.13	Pass
4	0.7260	24.07	17.54	9.75	33.82	27.29	56.00	46.00	-22.18	-18.71	Pass
5	3.9900	22.50	14.73	9.85	32.35	24.58	56.00	46.00	-23.65	-21.42	Pass
6	4.4060	23.15	15.58	9.86	33.01	25.44	56.00	46.00	-22.99	-20.56	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading (dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2 Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
Mode 2	2402	Default	QRCT Toolkit v4.0 Version 4.0.00175.0
	2440	Default	
	2480	Default	
Mode 3	2402	Default	
	2440	Default	
	2480	Default	
Mode 4	2402	Default	
	2440	Default	
	2480	Default	
Mode 5	2402	Default	
	2440	Default	
	2480	Default	

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	2.18	0.00165	2.55	0.00180	≤ 30
2440	2.27	0.00169	2.63	0.00183	≤ 30
2480	5.06	0.00321	5.40	0.00347	≤ 30

Test Mode	Mode 3				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	2.22	0.00167	2.78	0.00190	≤ 30
2440	2.33	0.00171	2.92	0.00196	≤ 30
2480	5.09	0.00323	5.68	0.00370	≤ 30

Test Mode	Mode 4				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	2.16	0.00164	2.52	0.00179	≤ 30
2440	2.15	0.00164	2.50	0.00178	≤ 30
2480	5.03	0.00318	5.37	0.00344	≤ 30

Test Mode	Mode 5				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	2.15	0.00164	2.50	0.00178	≤ 30
2440	2.13	0.00163	2.48	0.00177	≤ 30
2480	5.01	0.00317	5.36	0.00344	≤ 30


Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	669.900	≥ 500
2440	672.700	≥ 500
2480	670.400	≥ 500

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	1158.000	≥ 500
2440	1157.000	≥ 500
2480	1158.000	≥ 500

■ Test Graphs

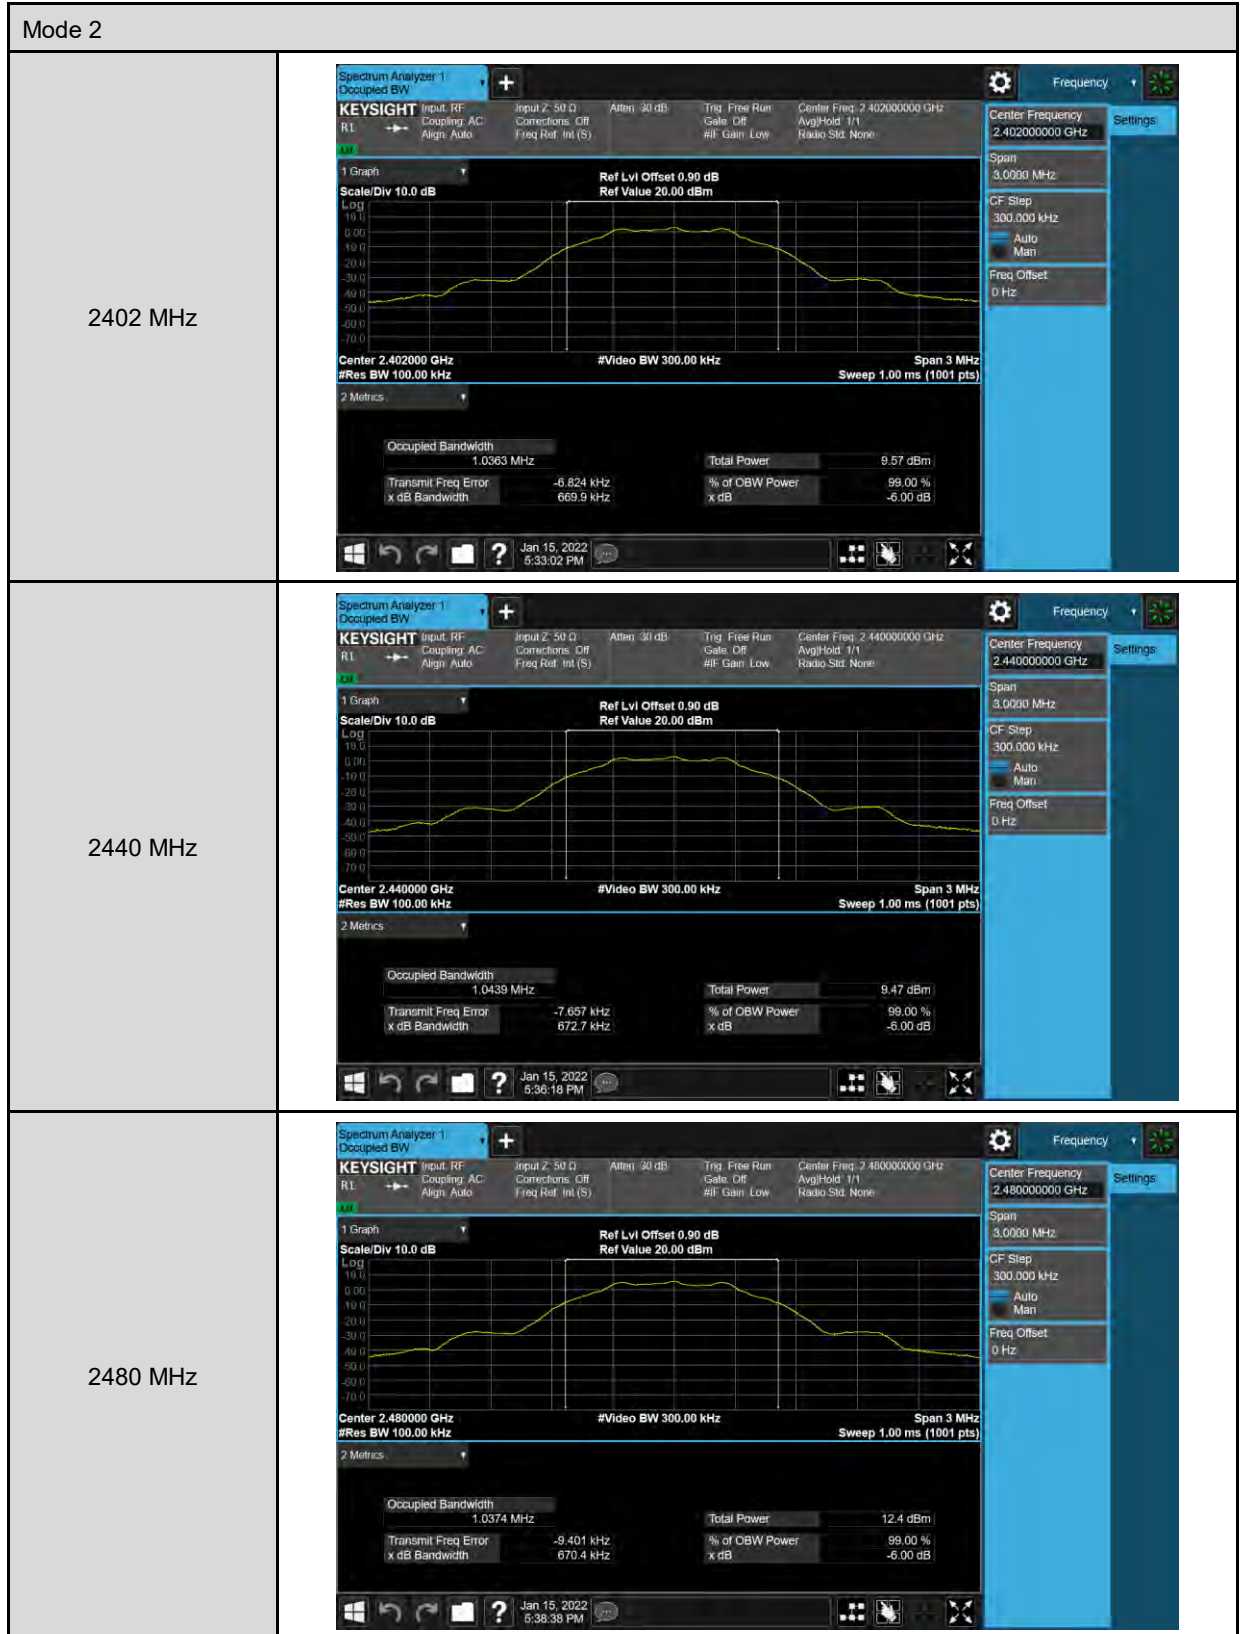


Mode 3 2402 MHz	 Keysight Spectrum Analyzer 1: Occupied BW Center Frequency: 2.40200000 GHz Span: 6.0000 MHz CF Step: 600.000 kHz Ref Lvl Offset: 0.90 dB Ref Value: 20.00 dBm Occupied Bandwidth: 2.0391 MHz Total Power: 10.2 dBm Transmit Freq Error: 1.906 kHz % of OBW Power: 99.00 % x dB Bandwidth: 1.158 MHz x dB -6.00 dB Jan 15, 2022 5:42:14 PM
2440 MHz	 Keysight Spectrum Analyzer 1: Occupied BW Center Frequency: 2.44000000 GHz Span: 6.0000 MHz CF Step: 600.000 kHz Ref Lvl Offset: 0.90 dB Ref Value: 20.00 dBm Occupied Bandwidth: 2.0351 MHz Total Power: 10.1 dBm Transmit Freq Error: 198 Hz % of OBW Power: 99.00 % x dB Bandwidth: 1.157 MHz x dB -6.00 dB Jan 15, 2022 5:45:33 PM
2480 MHz	 Keysight Spectrum Analyzer 1: Occupied BW Center Frequency: 2.48000000 GHz Span: 6.0000 MHz CF Step: 600.000 kHz Ref Lvl Offset: 0.90 dB Ref Value: 20.00 dBm Occupied Bandwidth: 2.0311 MHz Total Power: 13.0 dBm Transmit Freq Error: -3.432 kHz % of OBW Power: 99.00 % x dB Bandwidth: 1.158 MHz x dB -6.00 dB Jan 15, 2022 5:47:55 PM


Maximum Power Density Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-11.750	≤ 8
2440	-12.040	≤ 8
2480	-9.110	≤ 8

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-14.760	≤ 8
2440	-14.840	≤ 8
2480	-11.880	≤ 8

■ Test Graphs

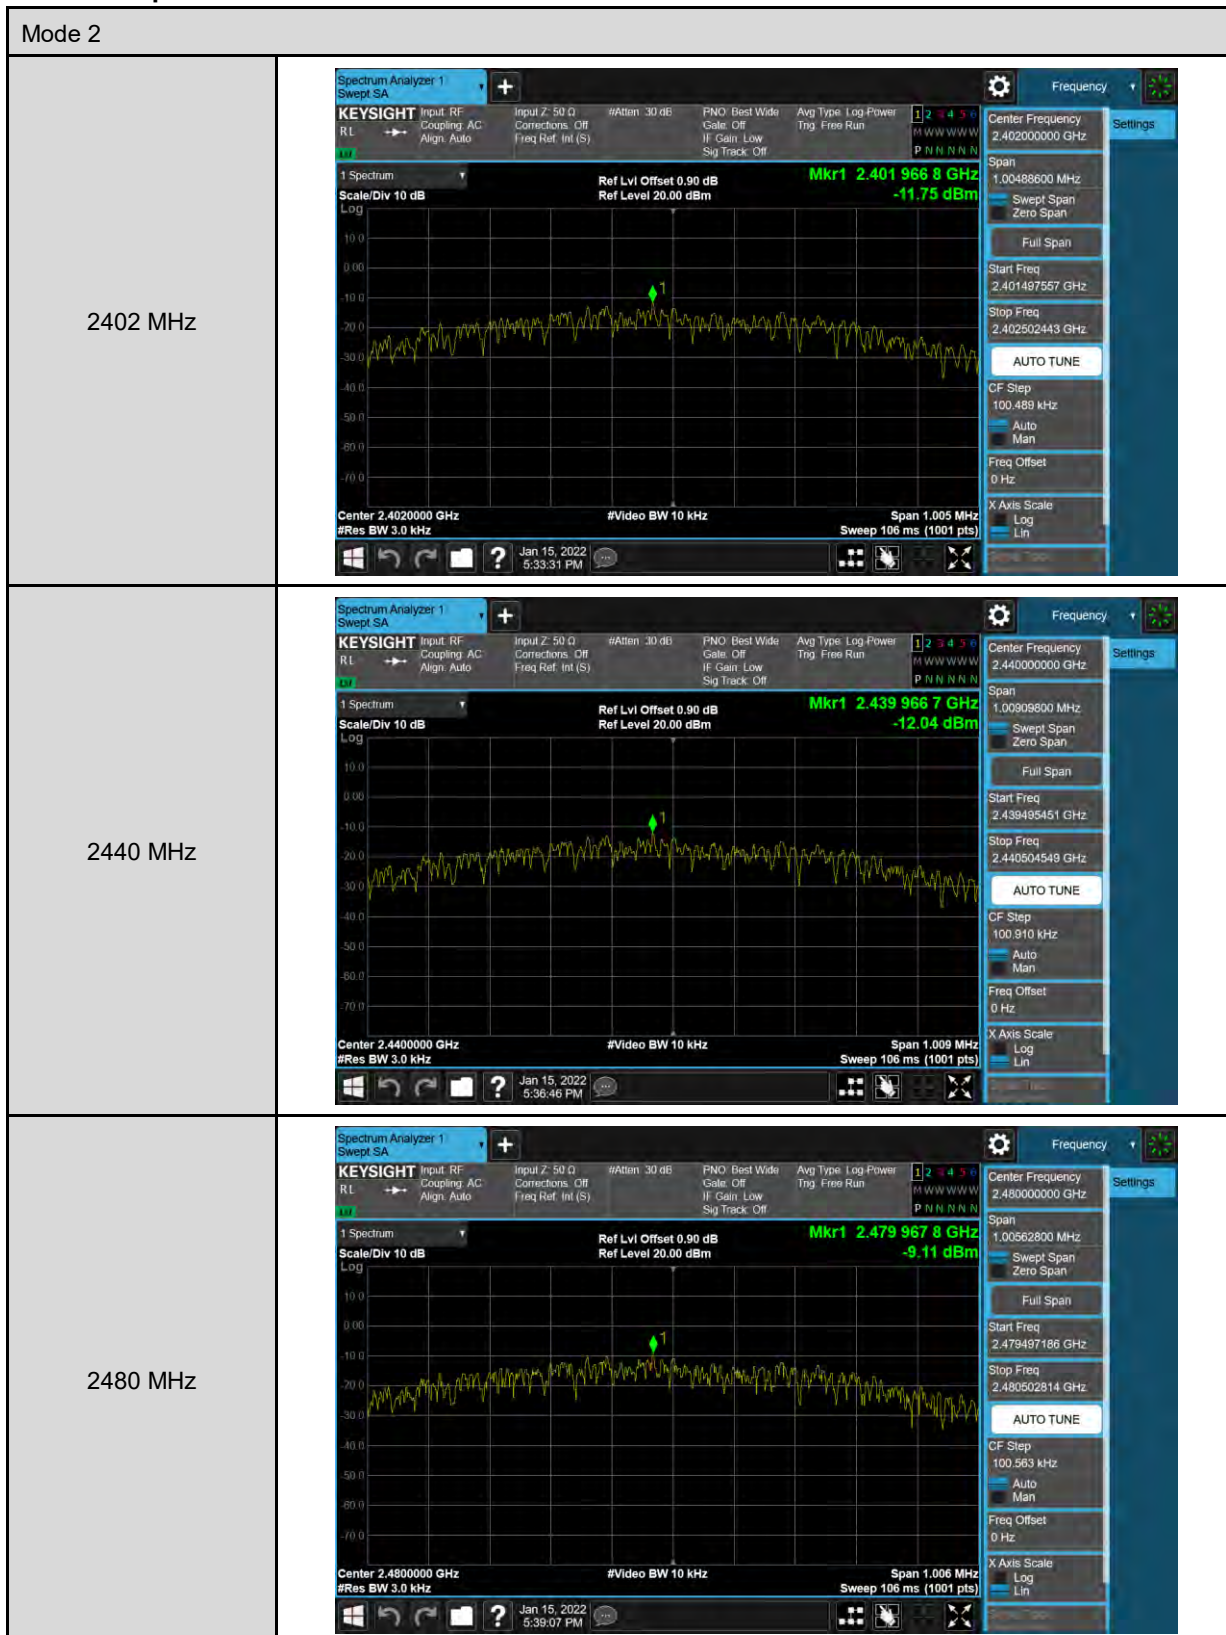


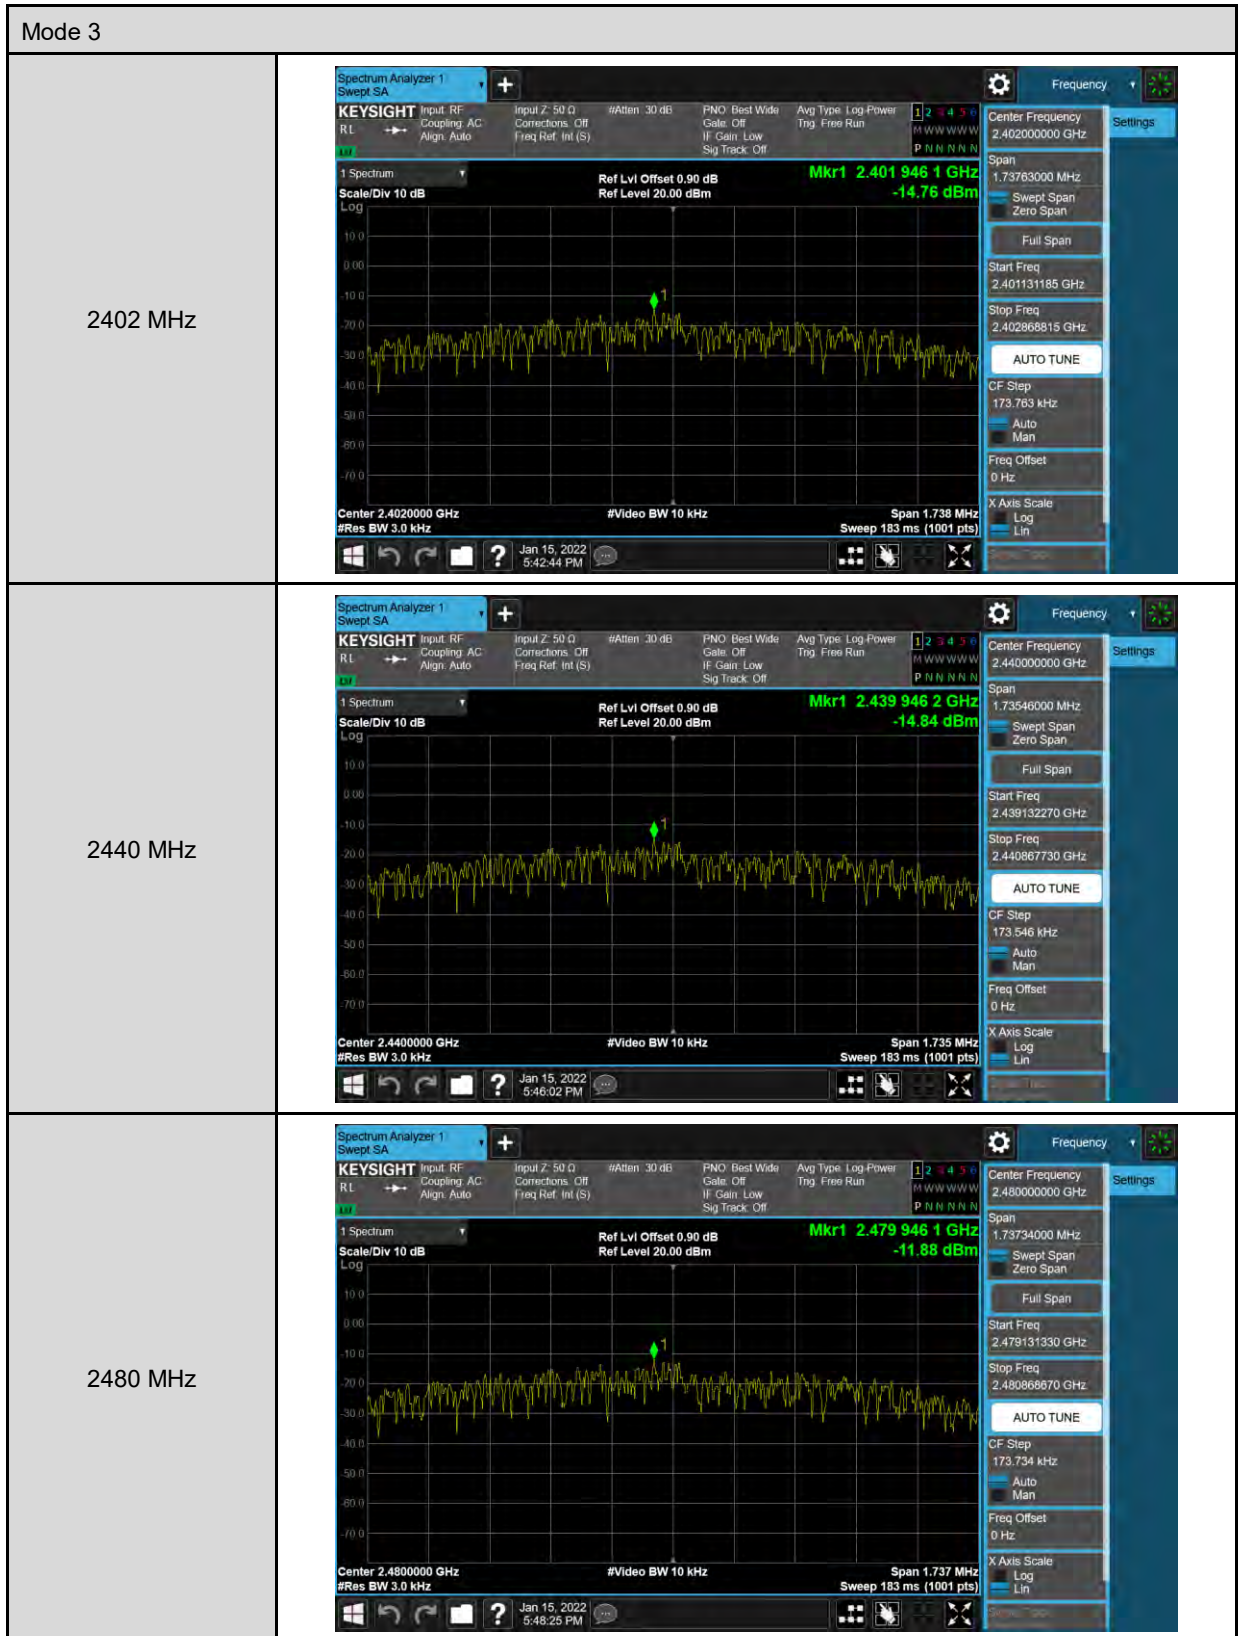

Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

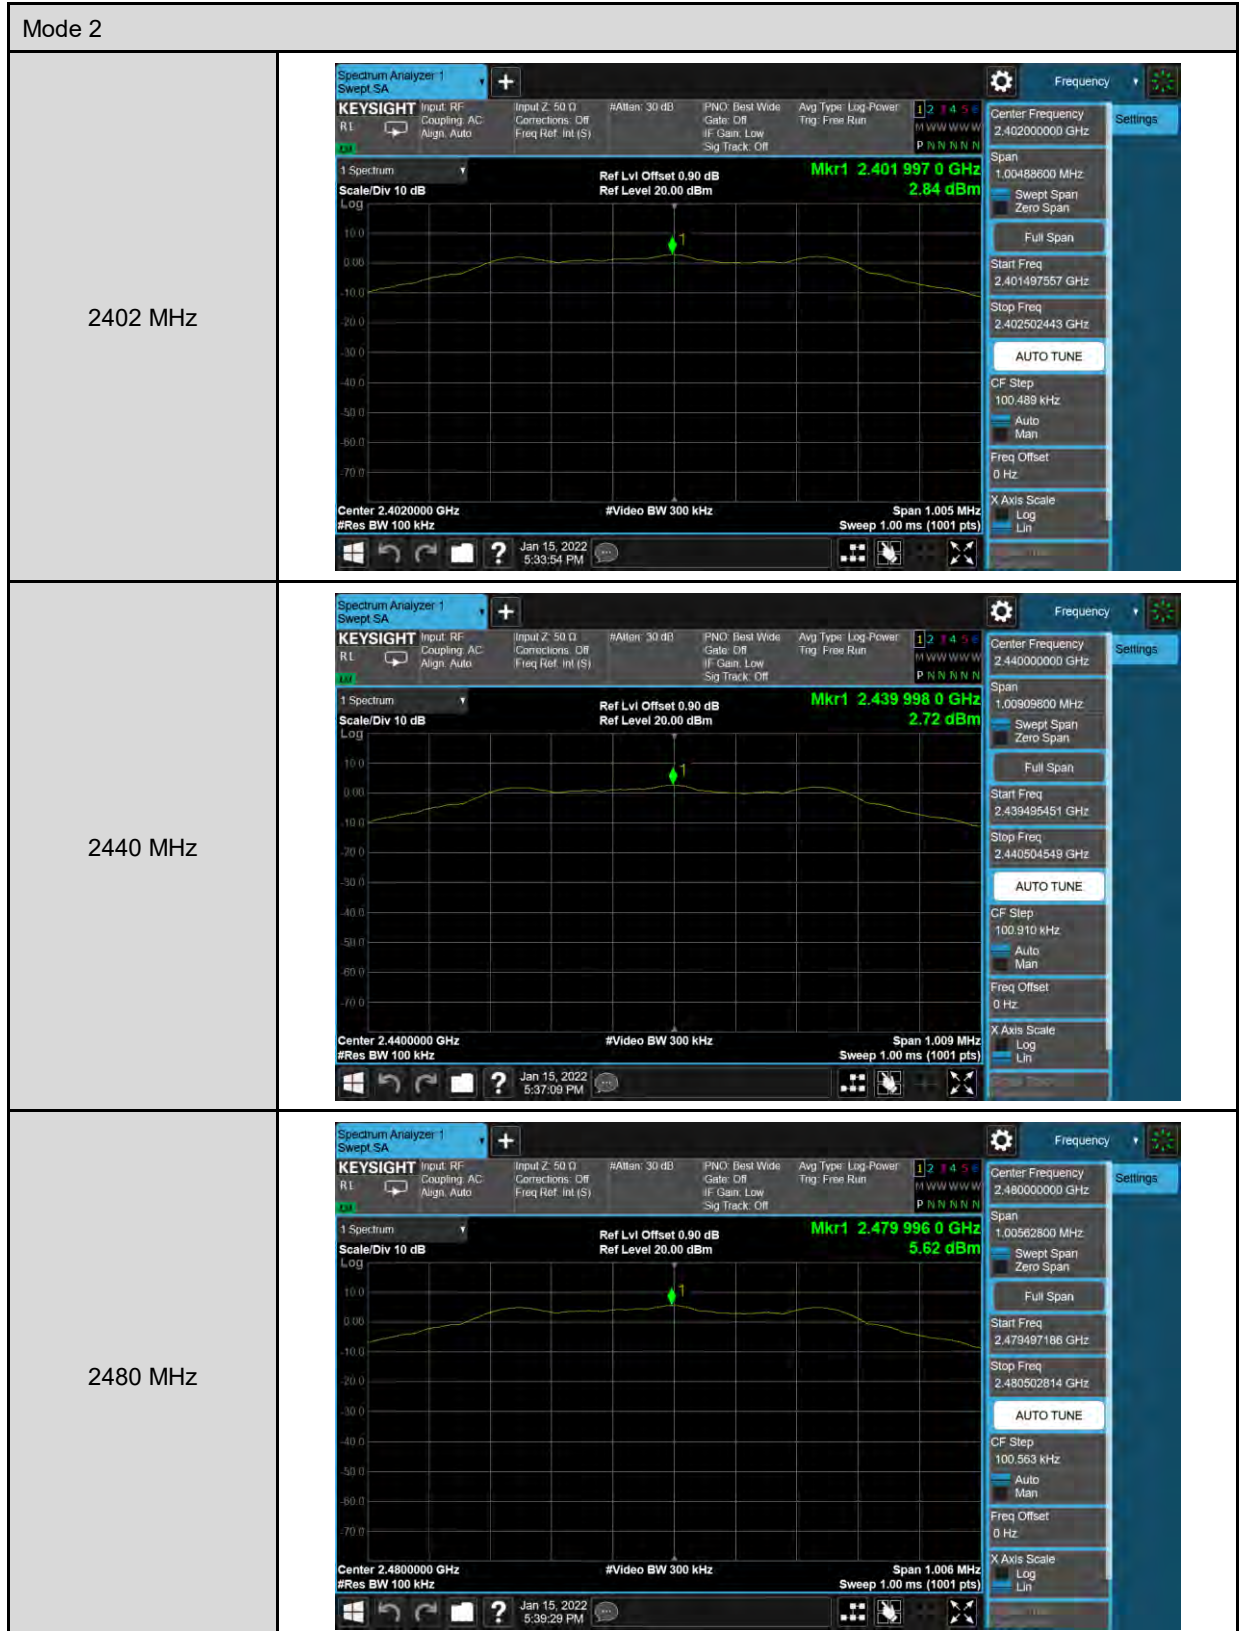



Out of Band Conducted Emissions


Mode 2																									
2402 MHz	 Center Frequency: 12.515000000 GHz Span: 24.9700000 GHz Start Freq: 30.0000000 MHz Stop Freq: 25.000000000 GHz AUTO TUNE CF Step: 2.497000000 GHz Freq Offset: 0 Hz X Axis Scale: Log 5 Marker Table <table><thead><tr><th>Mode</th><th>Trace</th><th>Scale</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2401.5 GHz</td><td>1.554 dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.7728 GHz</td><td>-39.39 dBm</td><td></td><td></td></tr></tbody></table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2401.5 GHz	1.554 dBm			2	N	1	f	24.7728 GHz	-39.39 dBm		
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																		
1	N	1	f	2401.5 GHz	1.554 dBm																				
2	N	1	f	24.7728 GHz	-39.39 dBm																				
2440 MHz	 Center Frequency: 12.515000000 GHz Span: 24.9700000 GHz Start Freq: 30.0000000 MHz Stop Freq: 25.000000000 GHz AUTO TUNE CF Step: 2.497000000 GHz Freq Offset: 0 Hz X Axis Scale: Log 5 Marker Table <table><thead><tr><th>Mode</th><th>Trace</th><th>Scale</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2440.2 GHz</td><td>2.844 dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.7790 GHz</td><td>-39.51 dBm</td><td></td><td></td></tr></tbody></table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2440.2 GHz	2.844 dBm			2	N	1	f	24.7790 GHz	-39.51 dBm		
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																		
1	N	1	f	2440.2 GHz	2.844 dBm																				
2	N	1	f	24.7790 GHz	-39.51 dBm																				
2480 MHz	 Center Frequency: 12.515000000 GHz Span: 24.9700000 GHz Start Freq: 30.0000000 MHz Stop Freq: 25.000000000 GHz AUTO TUNE CF Step: 2.497000000 GHz Freq Offset: 0 Hz X Axis Scale: Log 5 Marker Table <table><thead><tr><th>Mode</th><th>Trace</th><th>Scale</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2480.2 GHz</td><td>4.251 dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.7409 GHz</td><td>-40.00 dBm</td><td></td><td></td></tr></tbody></table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2480.2 GHz	4.251 dBm			2	N	1	f	24.7409 GHz	-40.00 dBm		
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																		
1	N	1	f	2480.2 GHz	4.251 dBm																				
2	N	1	f	24.7409 GHz	-40.00 dBm																				

Mode 3

2402 MHz



2440 MHz

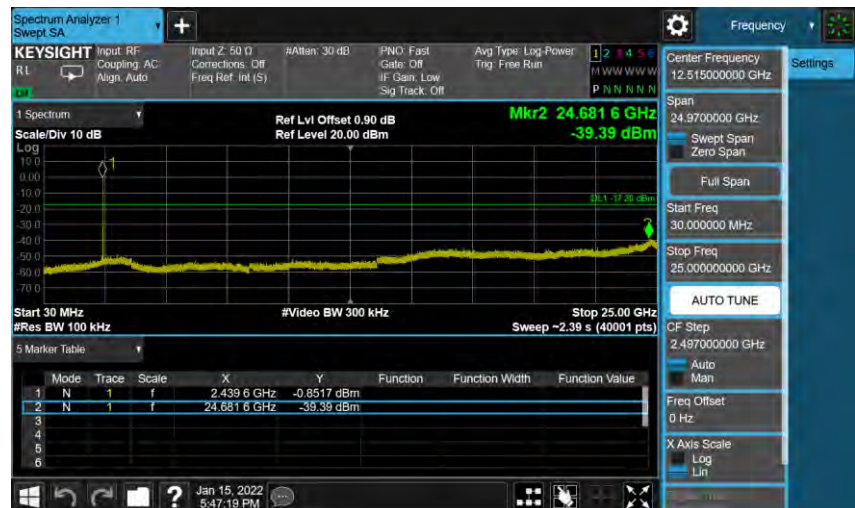

2480 MHz



Conducted Band Edge




Mode 3

2402 MHz




2480 MHz

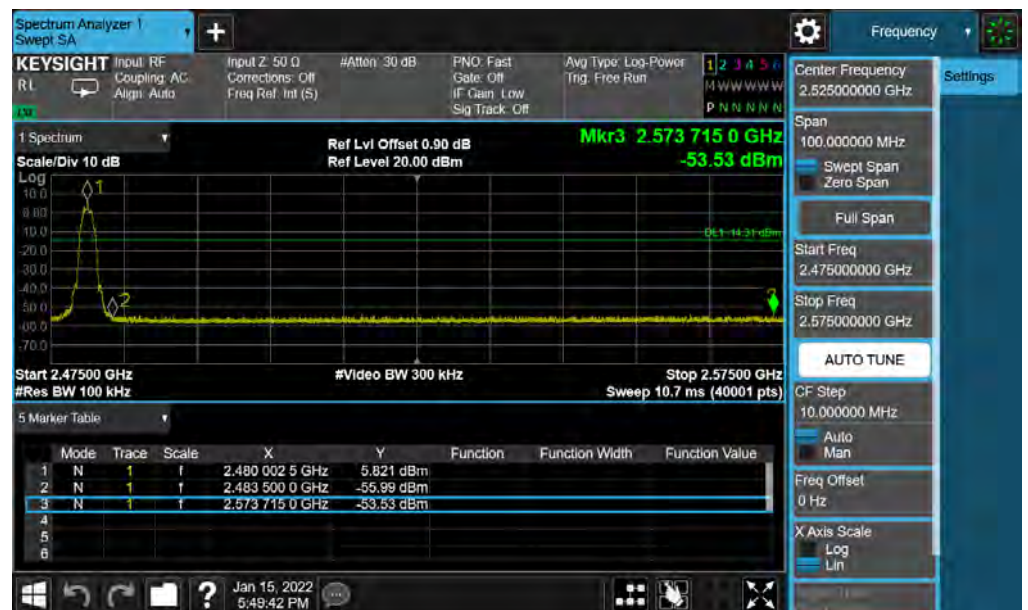

5.3 Radiated Emission Measurement


Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2480 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

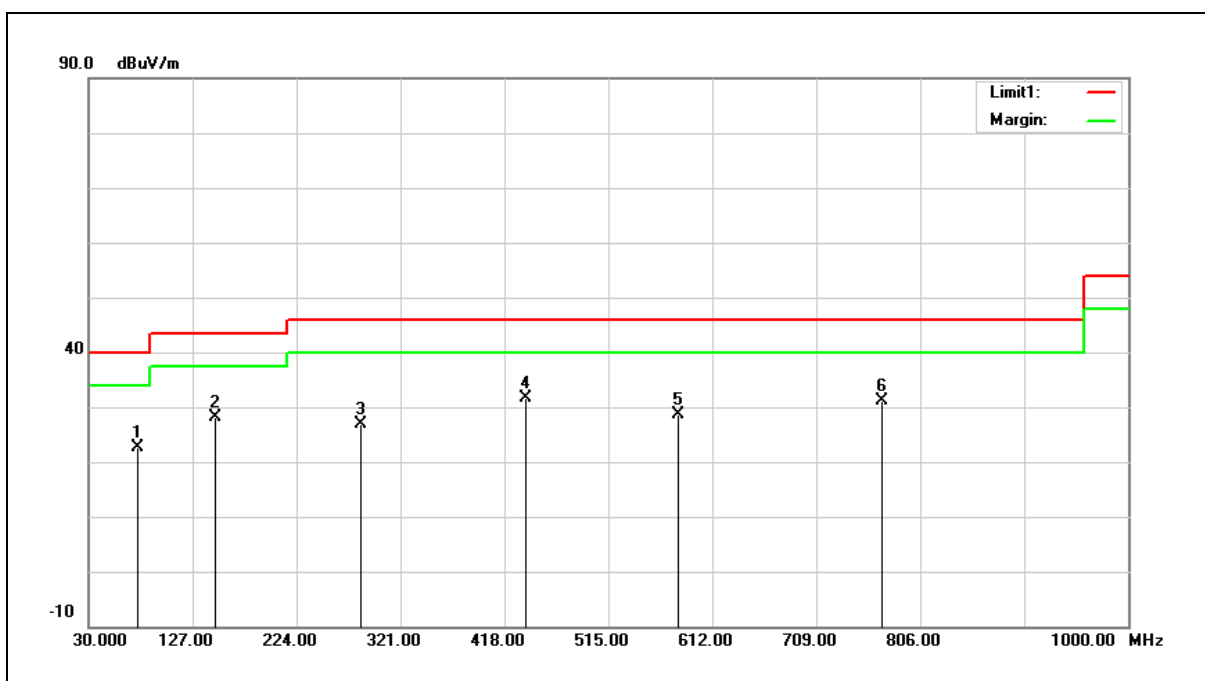


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	75.5900	33.56	-10.81	22.75	40.00	-17.25	QP
2	148.3400	34.89	-6.75	28.14	43.50	-15.36	QP
3	284.1400	32.63	-5.79	26.84	46.00	-19.16	QP
4	438.3700	34.46	-2.72	31.74	46.00	-14.26	QP
5	579.9900	28.67	-0.02	28.65	46.00	-17.35	QP
6	770.1100	27.83	3.31	31.14	46.00	-14.86	QP

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2480 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

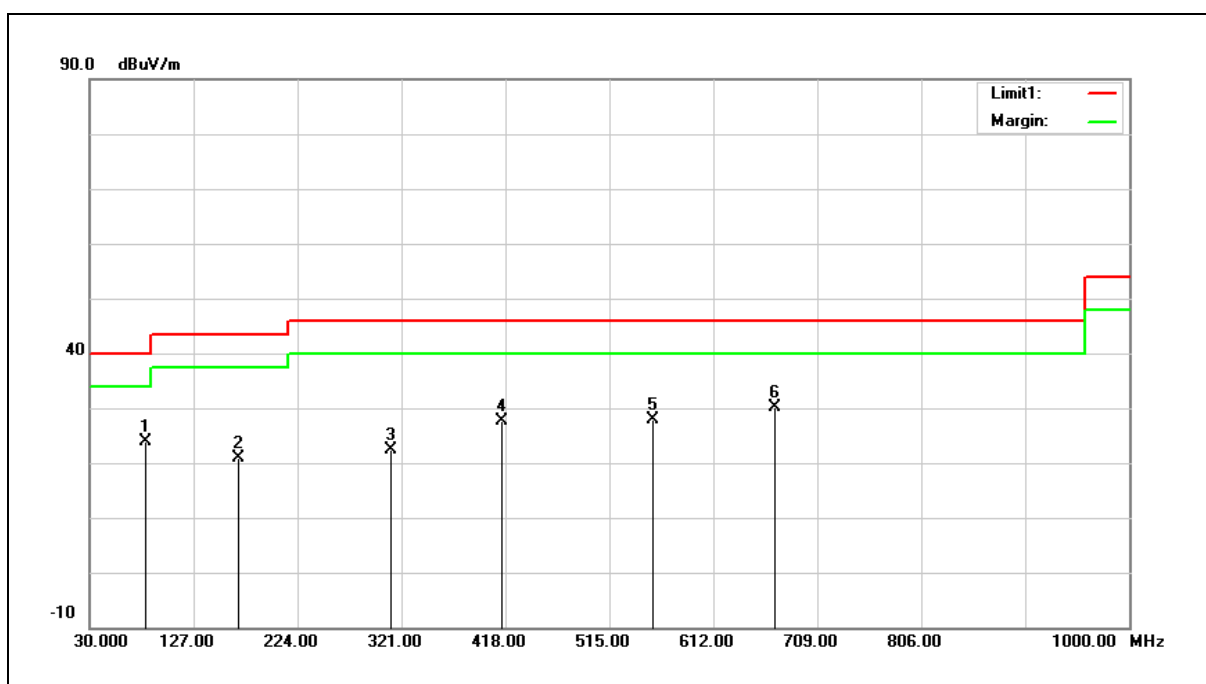


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	82.3800	36.13	-12.23	23.90	40.00	-16.10	QP
2	168.7100	27.62	-6.71	20.91	43.50	-22.59	QP
3	311.3000	27.56	-5.27	22.29	46.00	-23.71	QP
4	415.0900	30.59	-3.07	27.52	46.00	-18.48	QP
5	555.7400	28.54	-0.71	27.83	46.00	-18.17	QP
6	669.2300	28.63	1.54	30.17	46.00	-15.83	QP

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

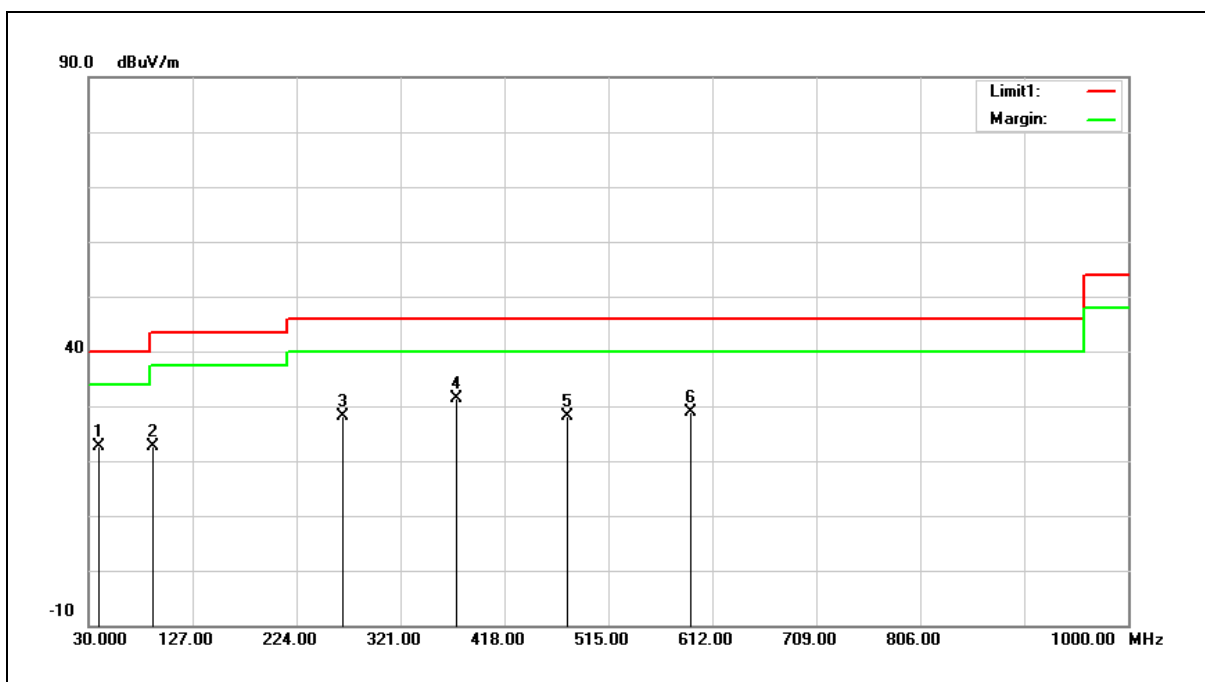

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	29.87	-7.19	22.68	40.00	-17.32	QP
2	90.1400	35.75	-13.12	22.63	43.50	-20.87	QP
3	267.6500	34.47	-6.43	28.04	46.00	-17.96	QP
4	373.3800	35.48	-4.03	31.45	46.00	-14.55	QP
5	477.1700	30.21	-2.19	28.02	46.00	-17.98	QP
6	591.6300	28.47	0.31	28.78	46.00	-17.22	QP

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

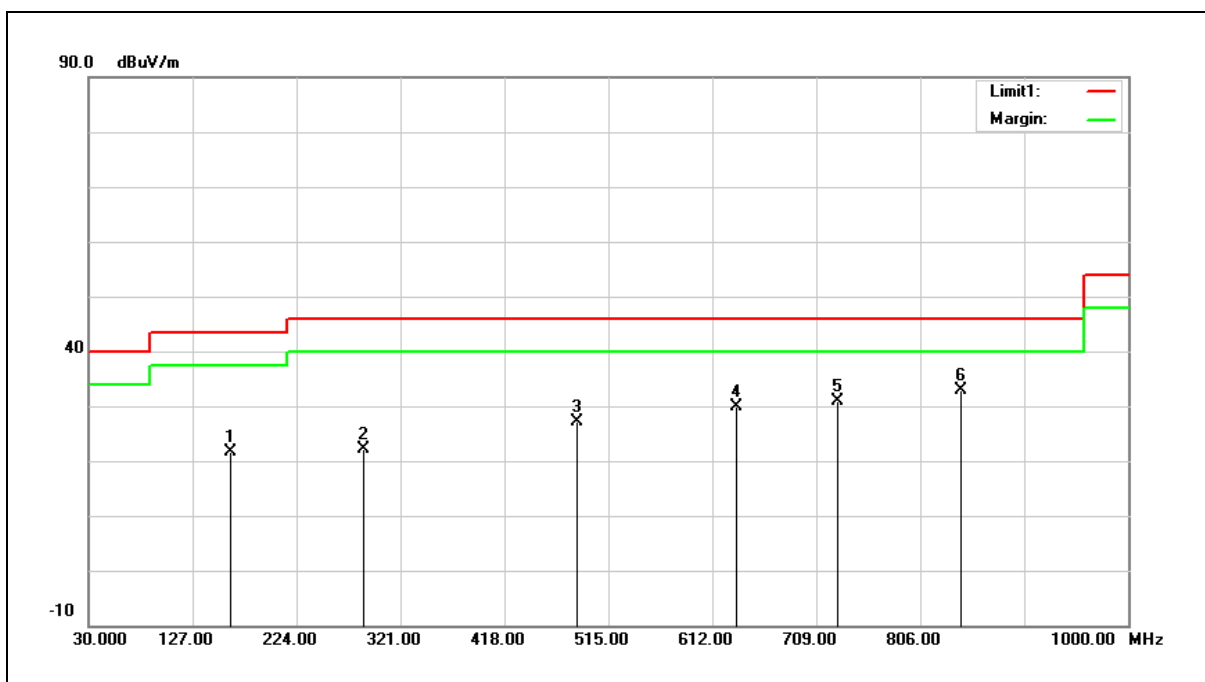


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	162.8900	28.17	-6.52	21.65	43.50	-21.85	QP
2	287.0500	27.69	-5.68	22.01	46.00	-23.99	QP
3	485.9000	29.32	-2.07	27.25	46.00	-18.75	QP
4	634.3100	29.00	0.93	29.93	46.00	-16.07	QP
5	729.3700	28.34	2.60	30.94	46.00	-15.06	QP
6	843.8300	28.38	4.50	32.88	46.00	-13.12	QP

Harmonic


Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

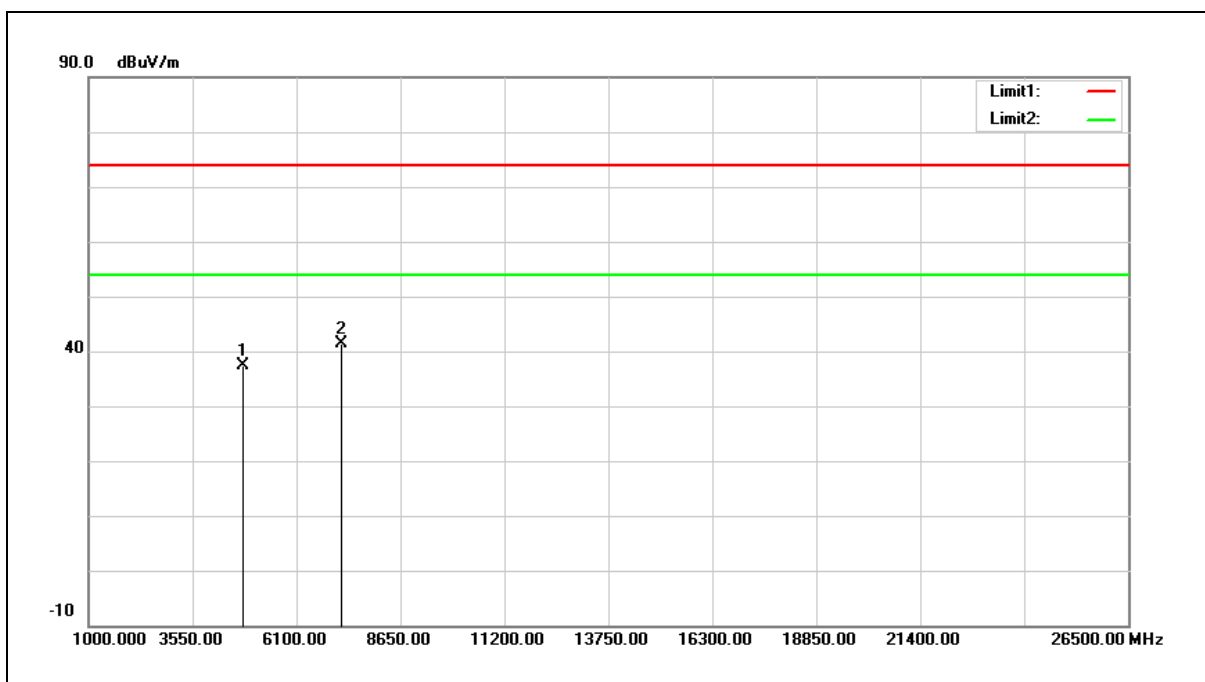


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	38.36	-1.04	37.32	74.00	-36.68	peak
2	7206.000	35.42	6.04	41.46	74.00	-32.54	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

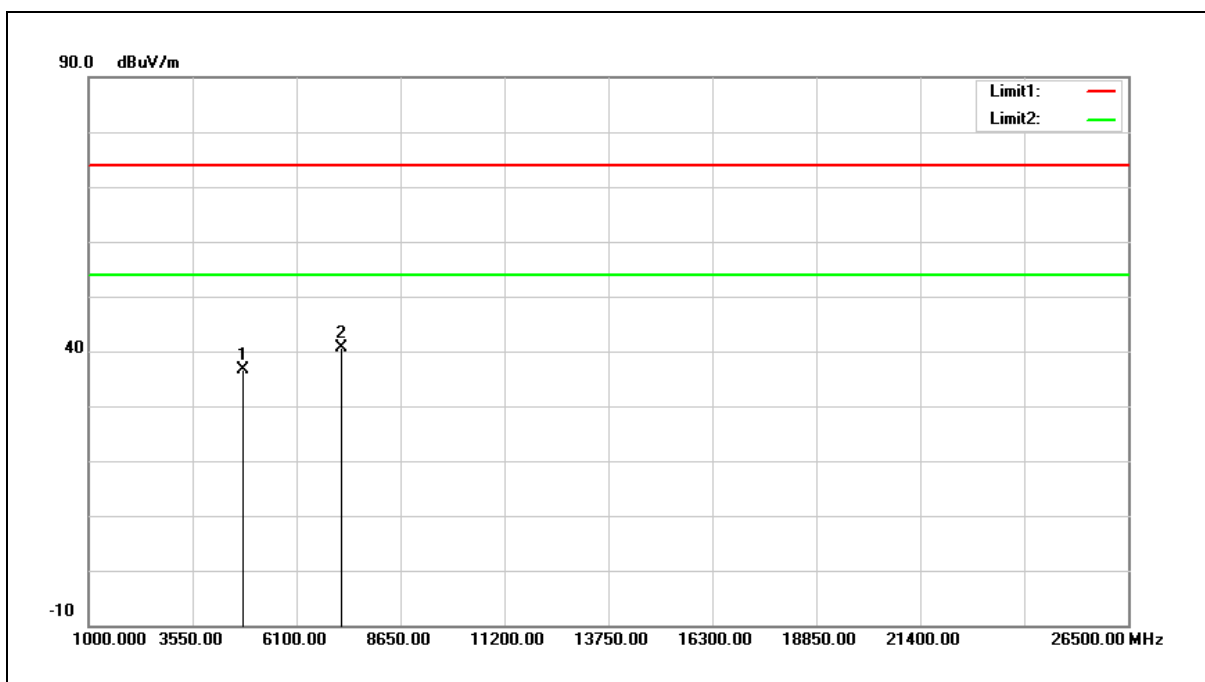


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	37.78	-1.04	36.74	74.00	-37.26	peak
2	7206.000	34.53	6.04	40.57	74.00	-33.43	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

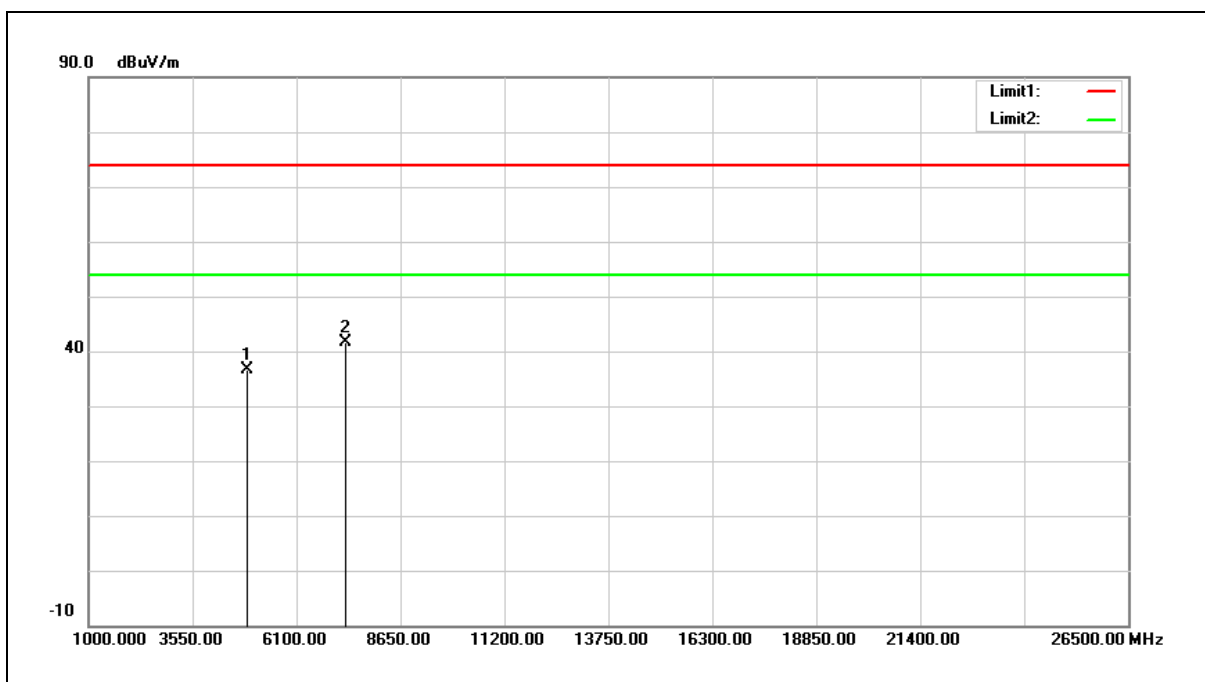


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	37.37	-0.78	36.59	74.00	-37.41	peak
2	7320.000	35.22	6.49	41.71	74.00	-32.29	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

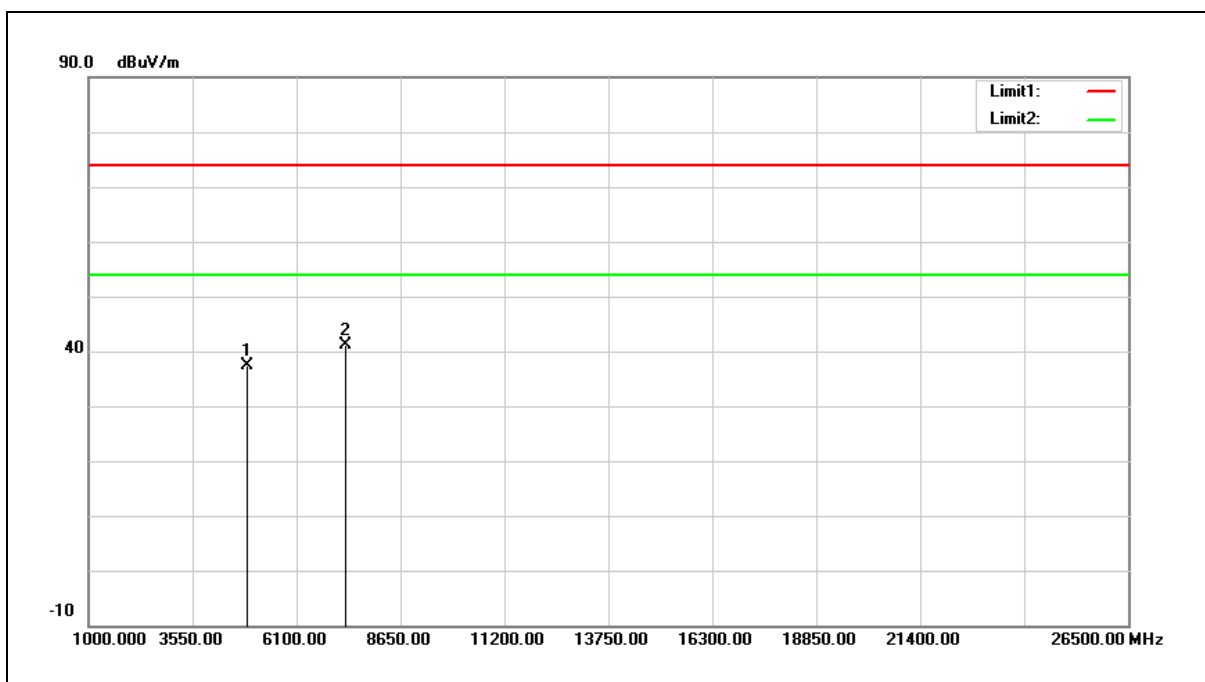


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	38.04	-0.78	37.26	74.00	-36.74	peak
2	7320.000	34.71	6.49	41.20	74.00	-32.80	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

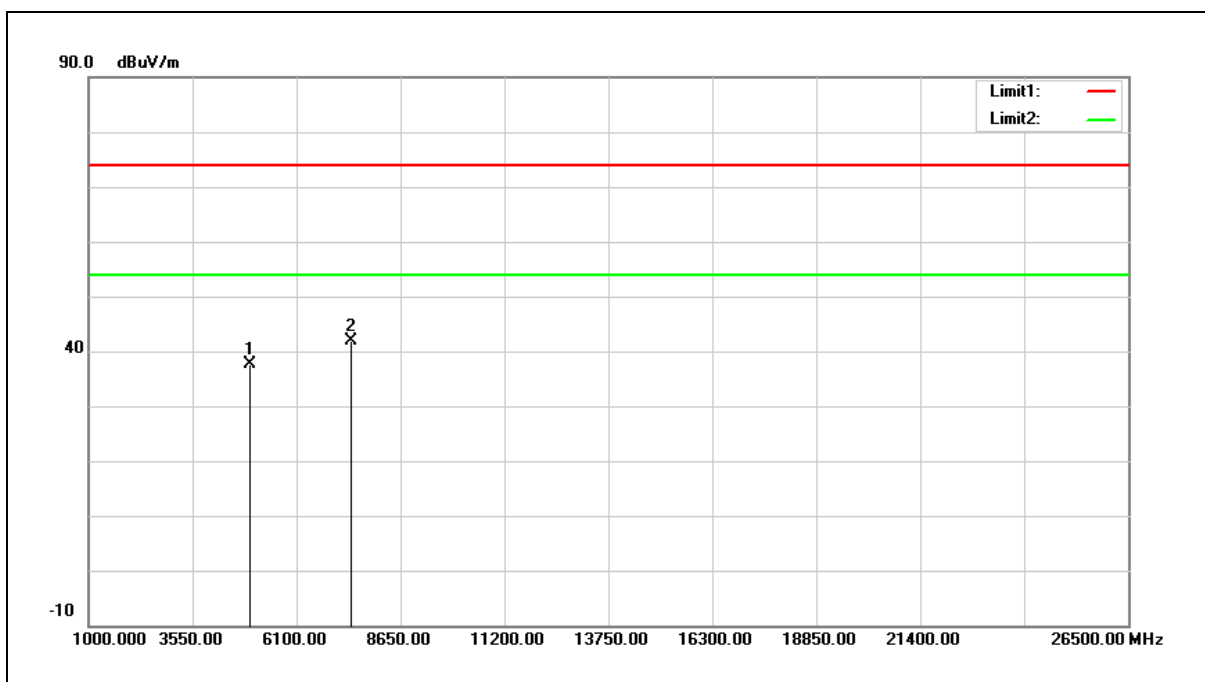


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	38.24	-0.50	37.74	74.00	-36.26	peak
2	7440.000	34.97	6.95	41.92	74.00	-32.08	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

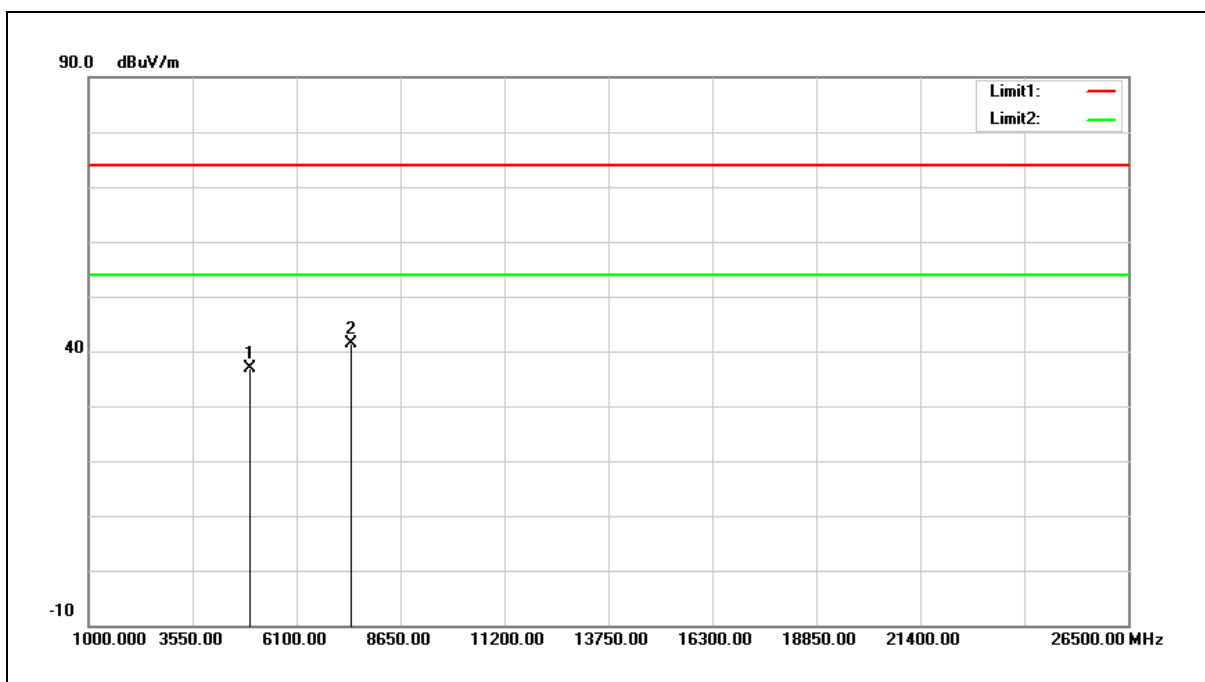


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.29	-0.50	36.79	74.00	-37.21	peak
2	7440.000	34.52	6.95	41.47	74.00	-32.53	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

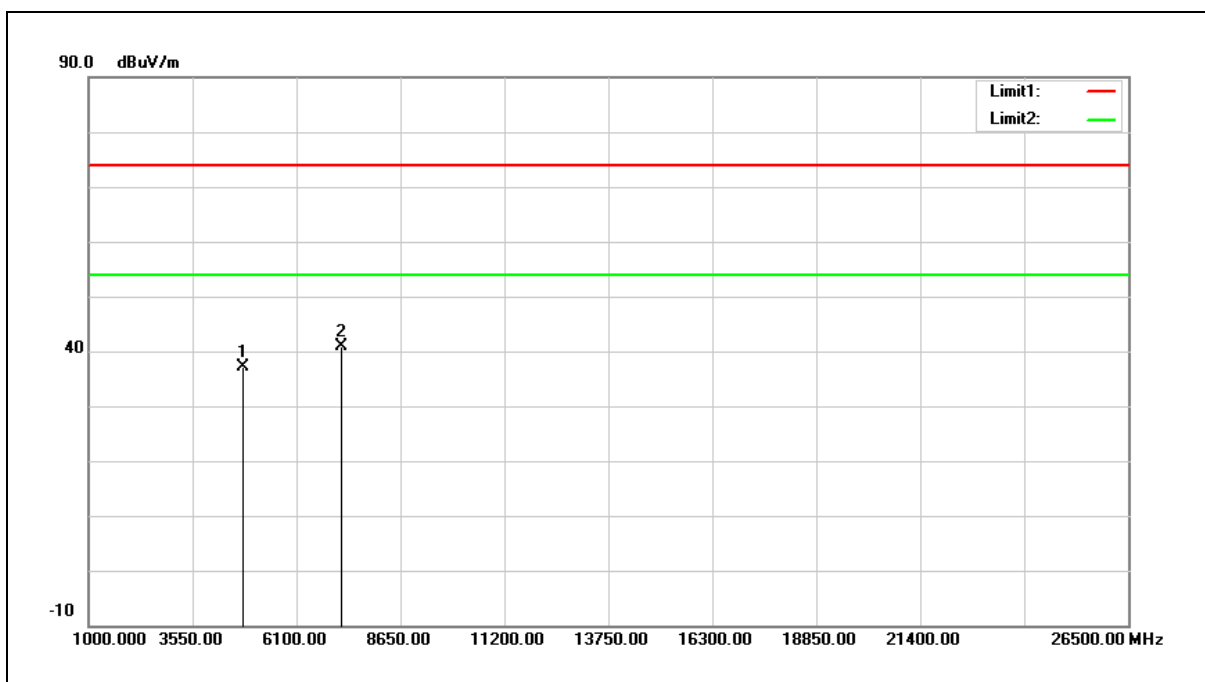


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	38.14	-1.04	37.10	74.00	-36.90	peak
2	7206.000	34.73	6.04	40.77	74.00	-33.23	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

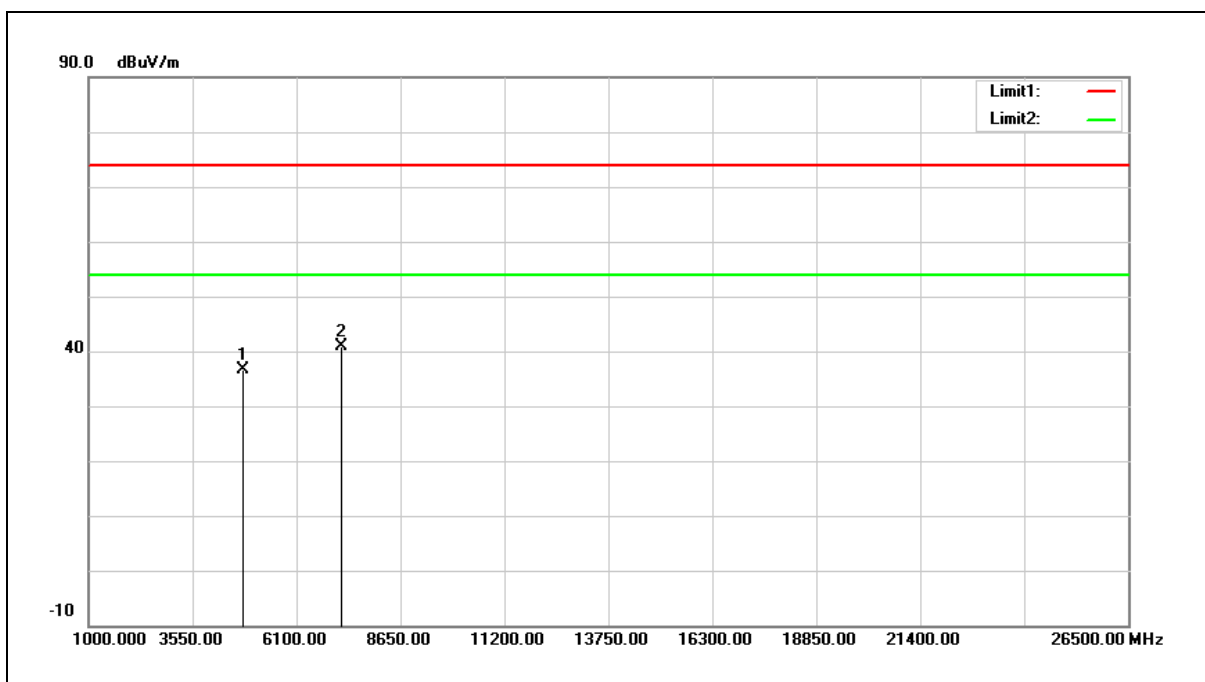


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	37.78	-1.04	36.74	74.00	-37.26	peak
2	7206.000	34.84	6.04	40.88	74.00	-33.12	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

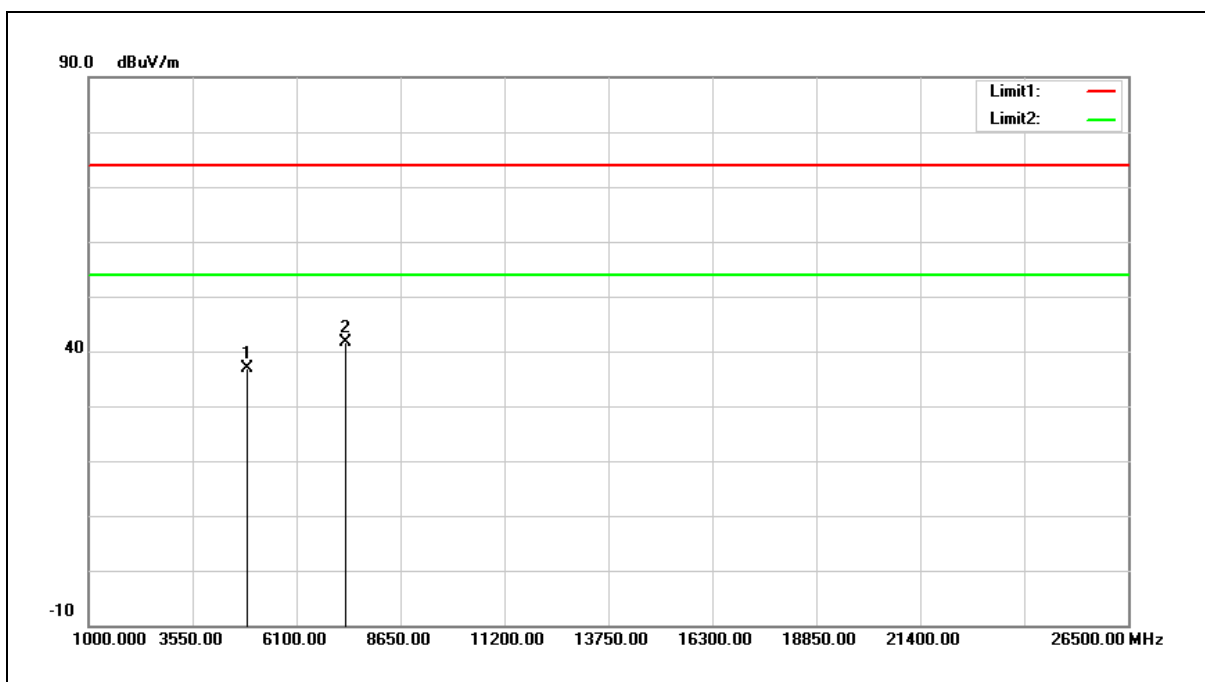


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	37.62	-0.78	36.84	74.00	-37.16	peak
2	7320.000	35.25	6.49	41.74	74.00	-32.26	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

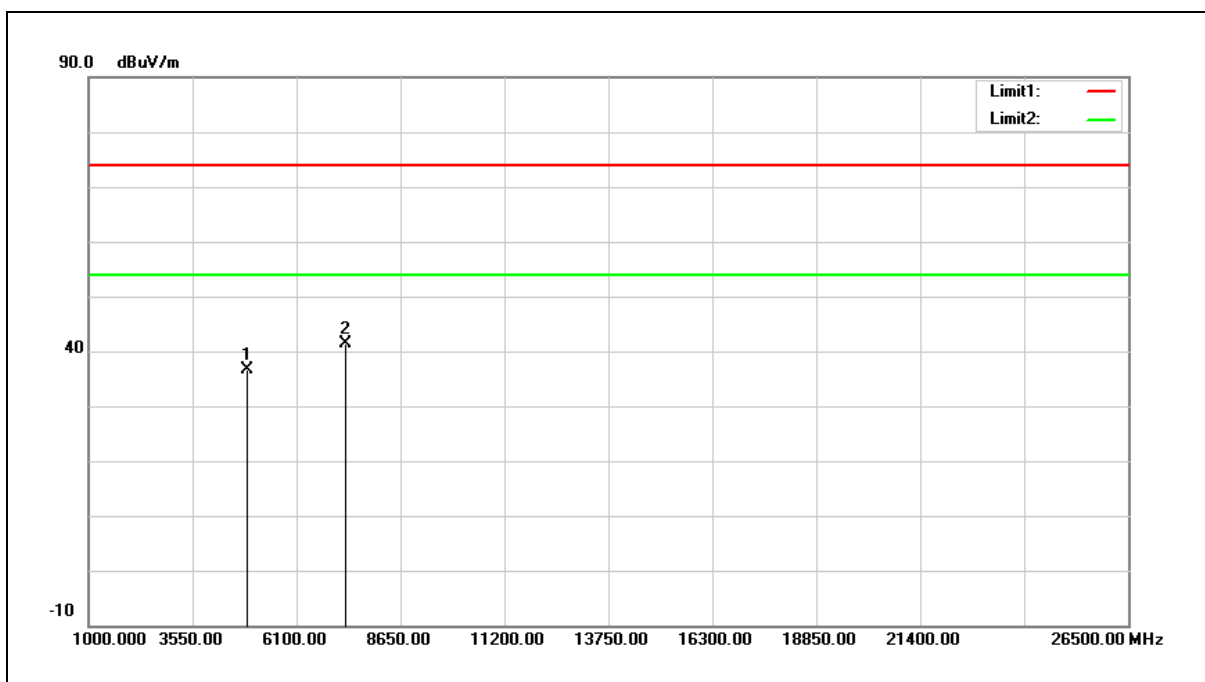


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	37.51	-0.78	36.73	74.00	-37.27	peak
2	7320.000	34.88	6.49	41.37	74.00	-32.63	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

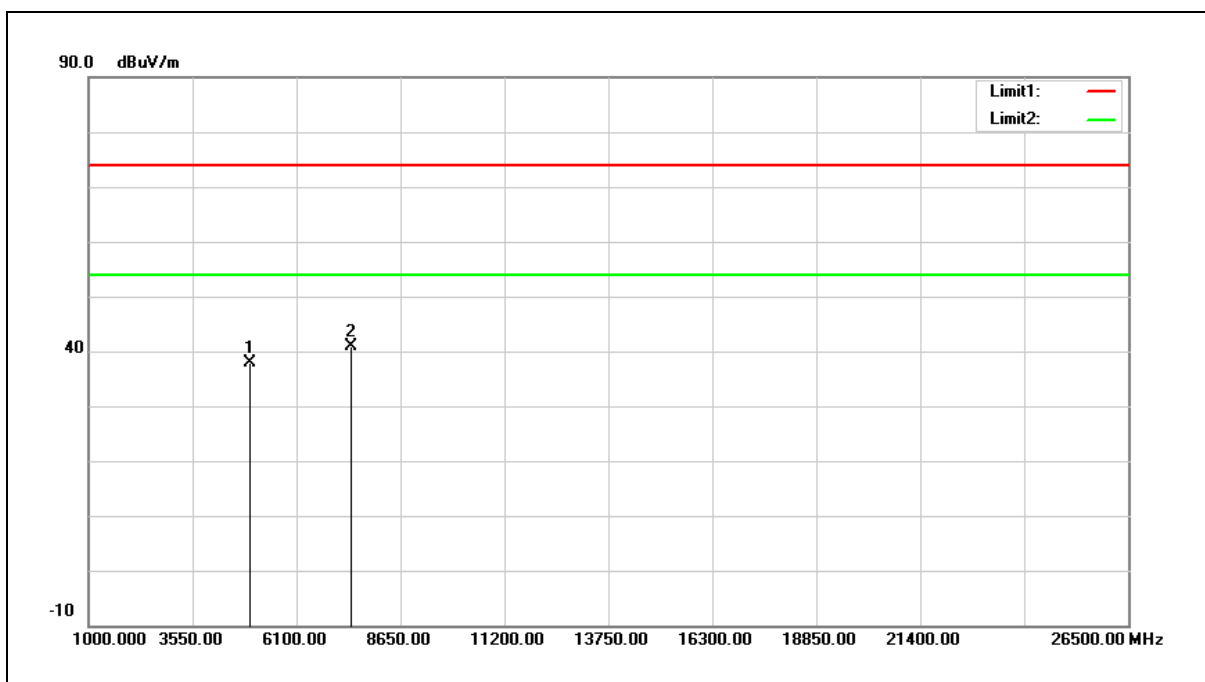


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	38.49	-0.50	37.99	74.00	-36.01	peak
2	7440.000	33.94	6.95	40.89	74.00	-33.11	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

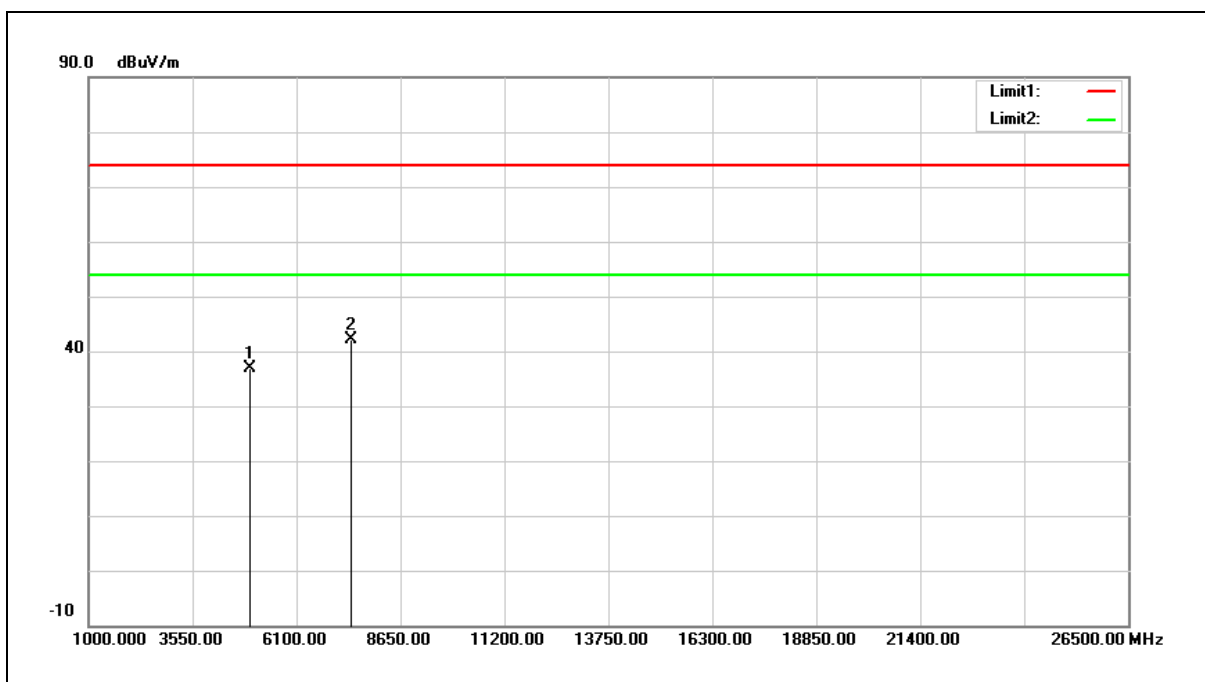


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.49	-0.50	36.99	74.00	-37.01	peak
2	7440.000	35.10	6.95	42.05	74.00	-31.95	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz)		
Ant.Polar.:	Horizontal		

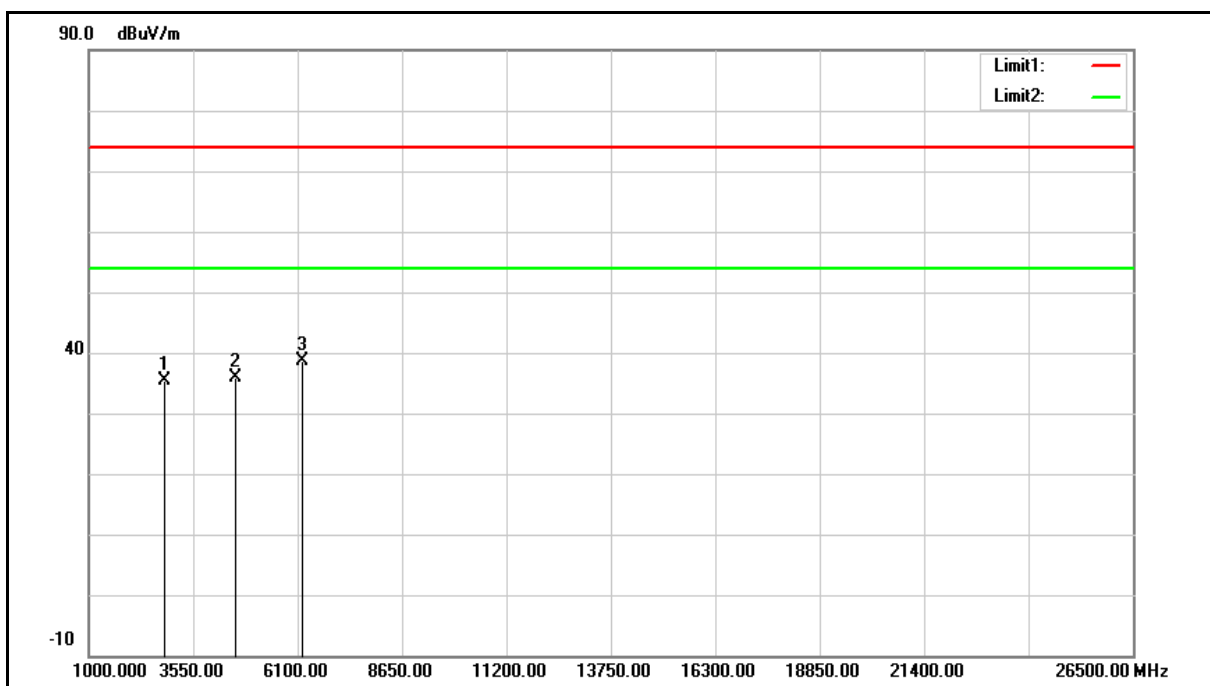


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	41.20	-5.89	35.31	74.00	-38.69	peak
2	4570.000	37.80	-1.85	35.95	74.00	-38.05	peak
3	6202.000	35.82	2.70	38.52	74.00	-35.48	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz)		
Ant.Polar.:	Vertical		

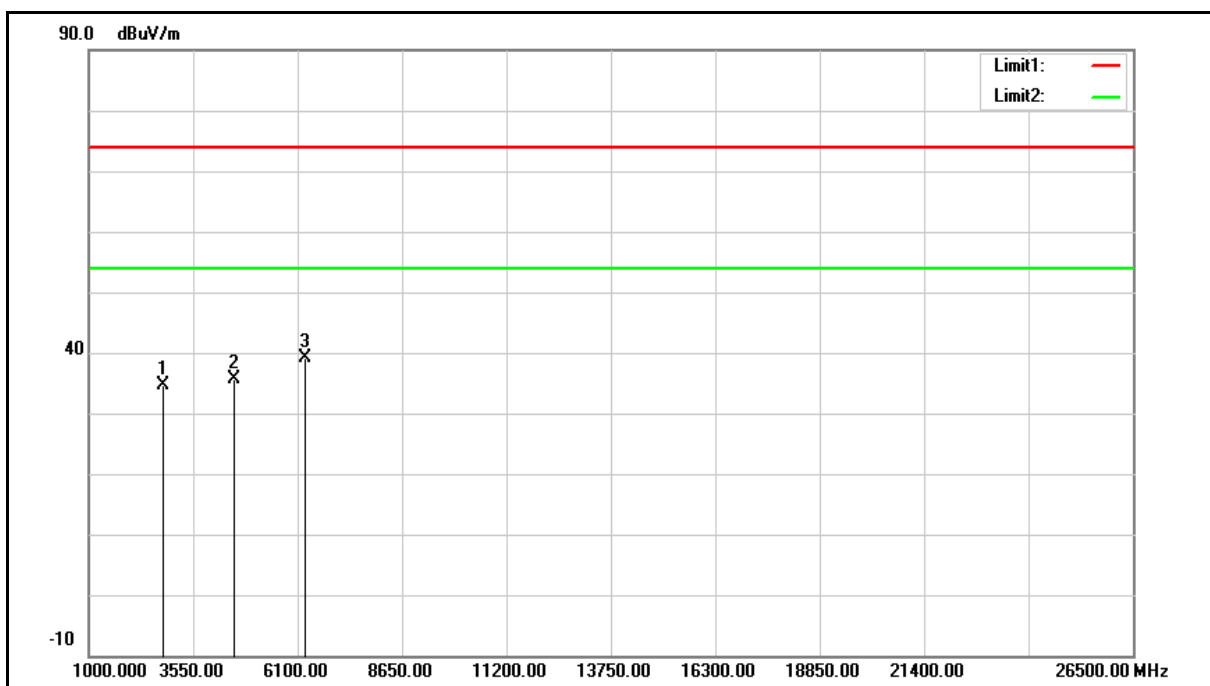


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	40.56	-5.89	34.67	74.00	-39.33	peak
2	4553.000	37.44	-1.91	35.53	74.00	-38.47	peak
3	6270.000	36.19	2.95	39.14	74.00	-34.86	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

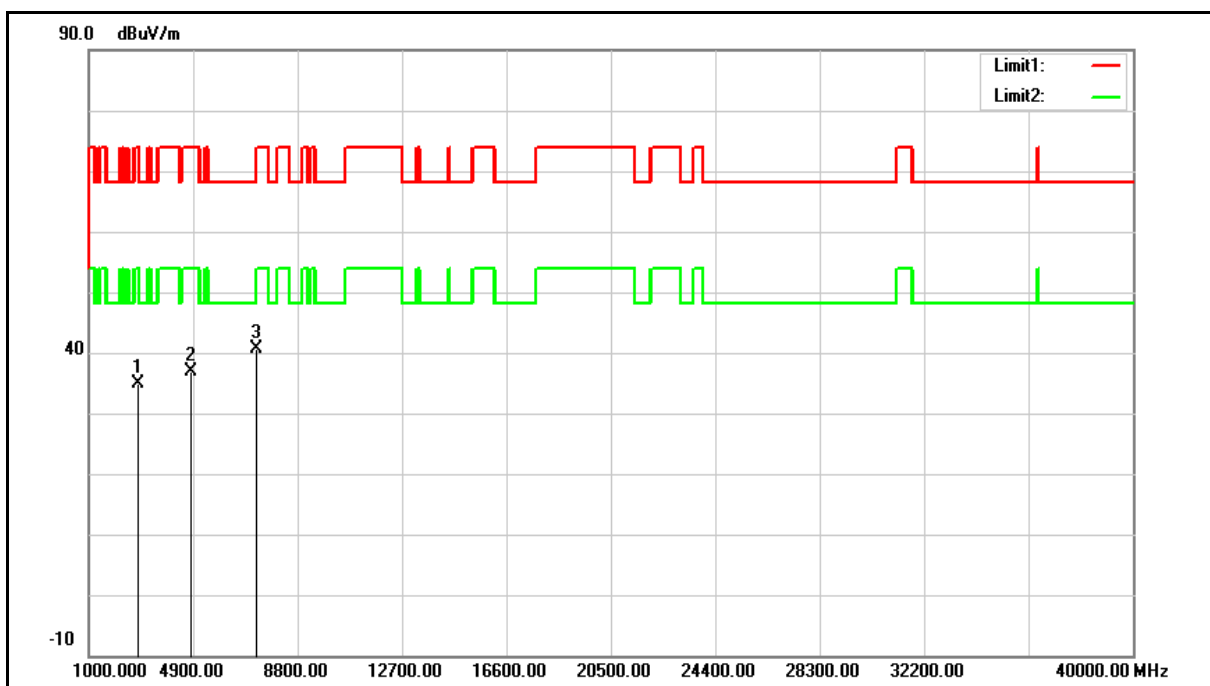

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	40.75	-5.89	34.86	74.00	-39.14	peak
2	4825.000	37.78	-0.97	36.81	74.00	-37.19	peak
3	7273.000	34.25	6.30	40.55	74.00	-33.45	peak


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

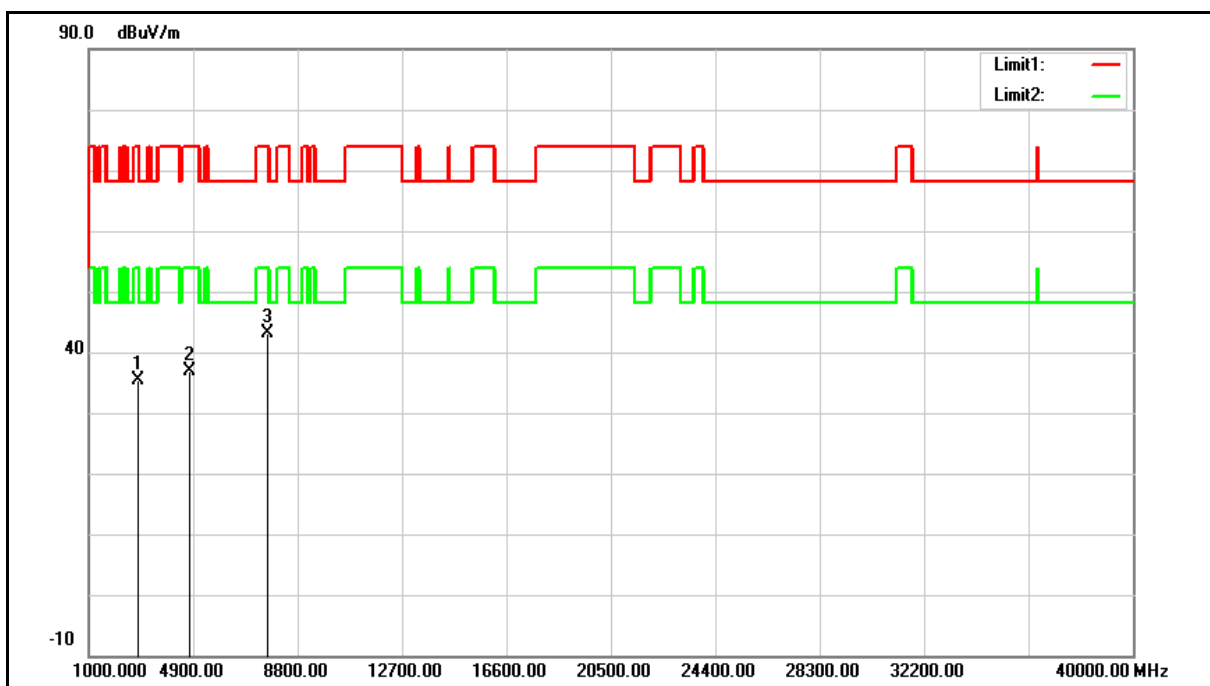

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	41.22	-5.89	35.33	74.00	-38.67	peak
2	4757.000	38.09	-1.21	36.88	74.00	-37.12	peak
3	7647.000	35.50	7.54	43.04	74.00	-30.96	peak


Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

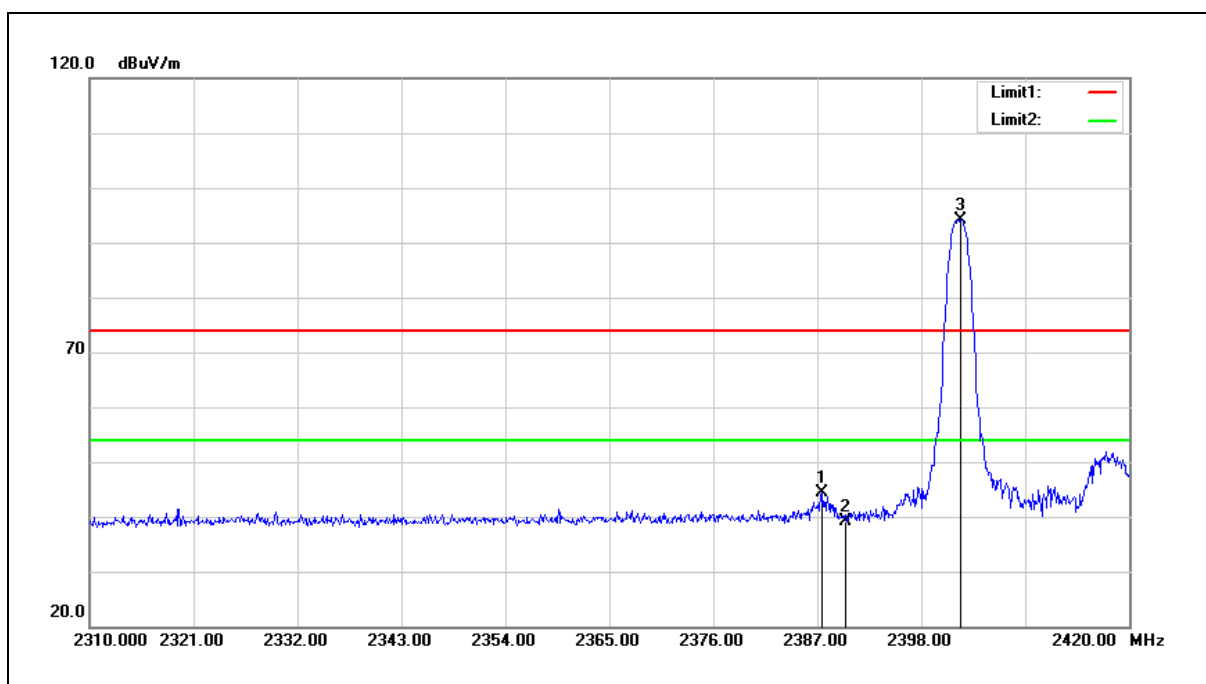


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.550	51.66	-7.32	44.34	74.00	-29.66	peak
2	2390.000	46.40	-7.30	39.10	74.00	-34.90	peak
3	2402.180	101.33	-7.25	94.08	74.00	20.08	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

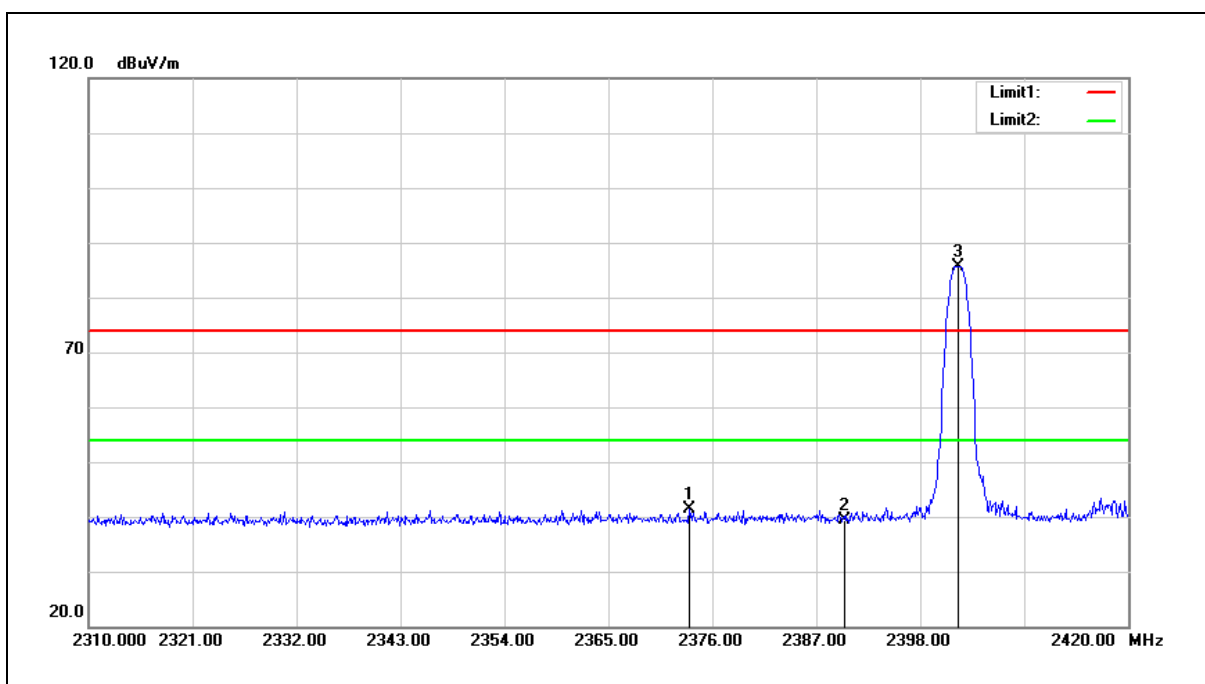


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.580	48.74	-7.37	41.37	74.00	-32.63	peak
2	2390.000	46.62	-7.30	39.32	74.00	-34.68	peak
3	2402.070	92.94	-7.25	85.69	74.00	11.69	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

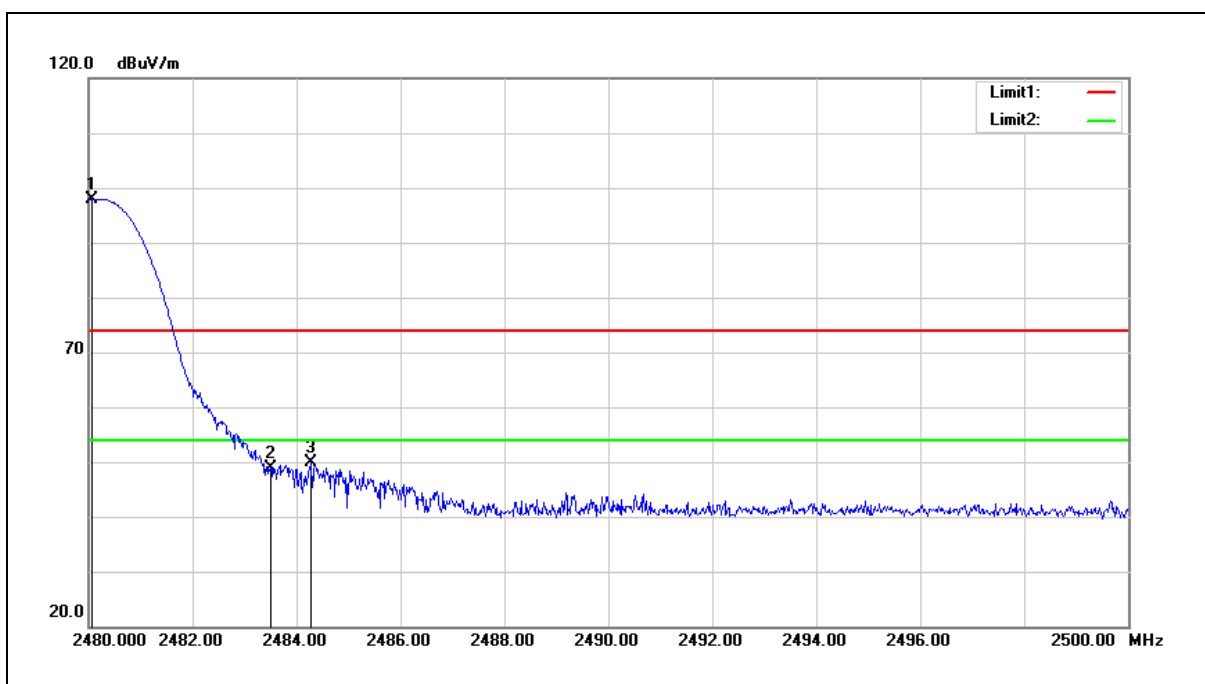


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	104.94	-6.95	97.99	74.00	23.99	peak
2	2483.500	55.86	-6.94	48.92	74.00	-25.08	peak
3	2484.280	56.75	-6.92	49.83	74.00	-24.17	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

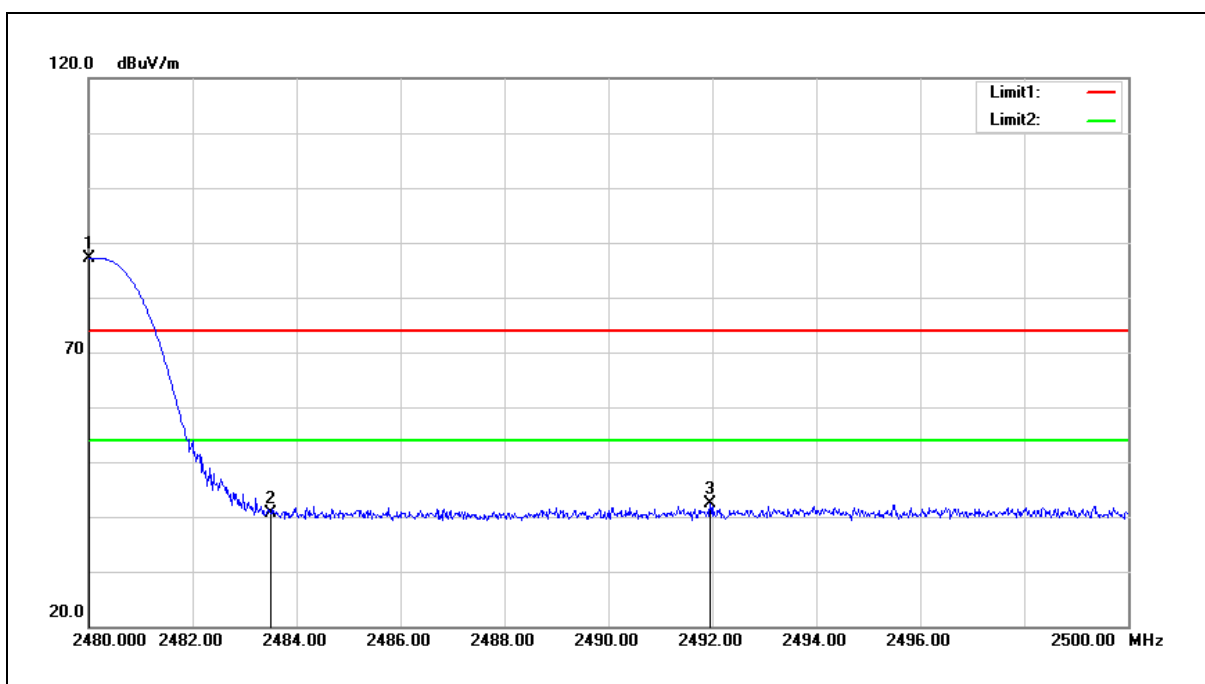


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	94.10	-6.95	87.15	74.00	13.15	peak
2	2483.500	47.49	-6.94	40.55	74.00	-33.45	peak
3	2491.960	49.35	-6.90	42.45	74.00	-31.55	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

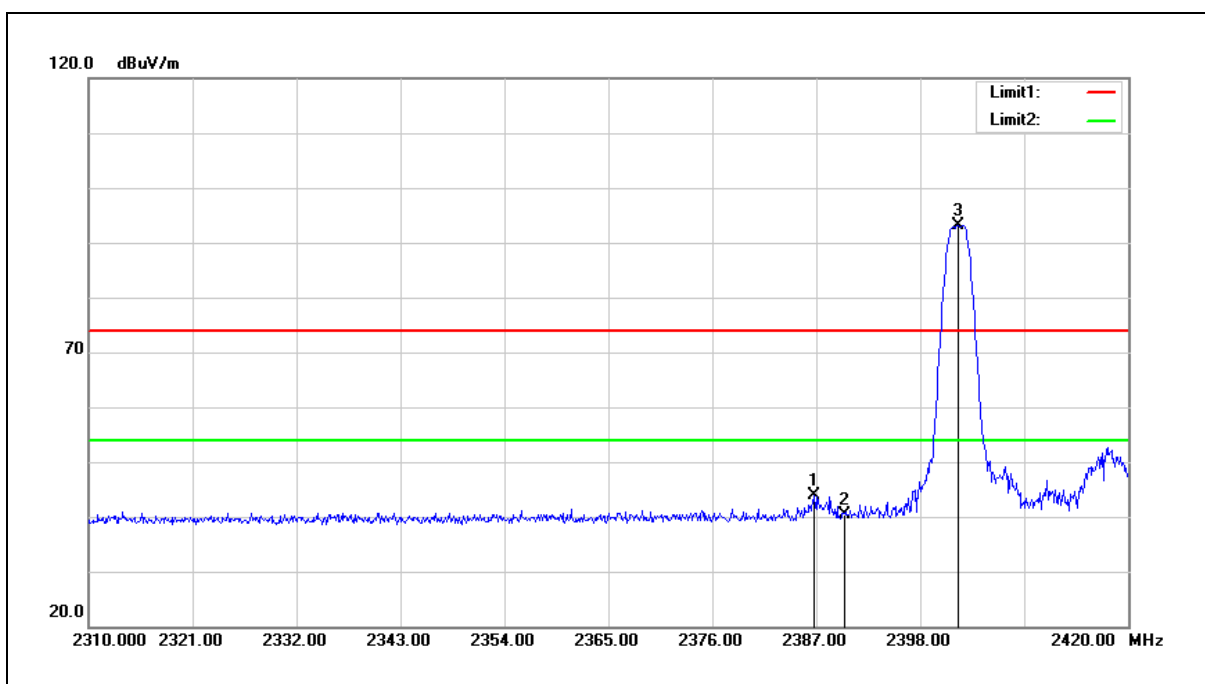


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.780	51.24	-7.33	43.91	74.00	-30.09	peak
2	2390.000	47.78	-7.30	40.48	74.00	-33.52	peak
3	2401.960	100.49	-7.25	93.24	74.00	19.24	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

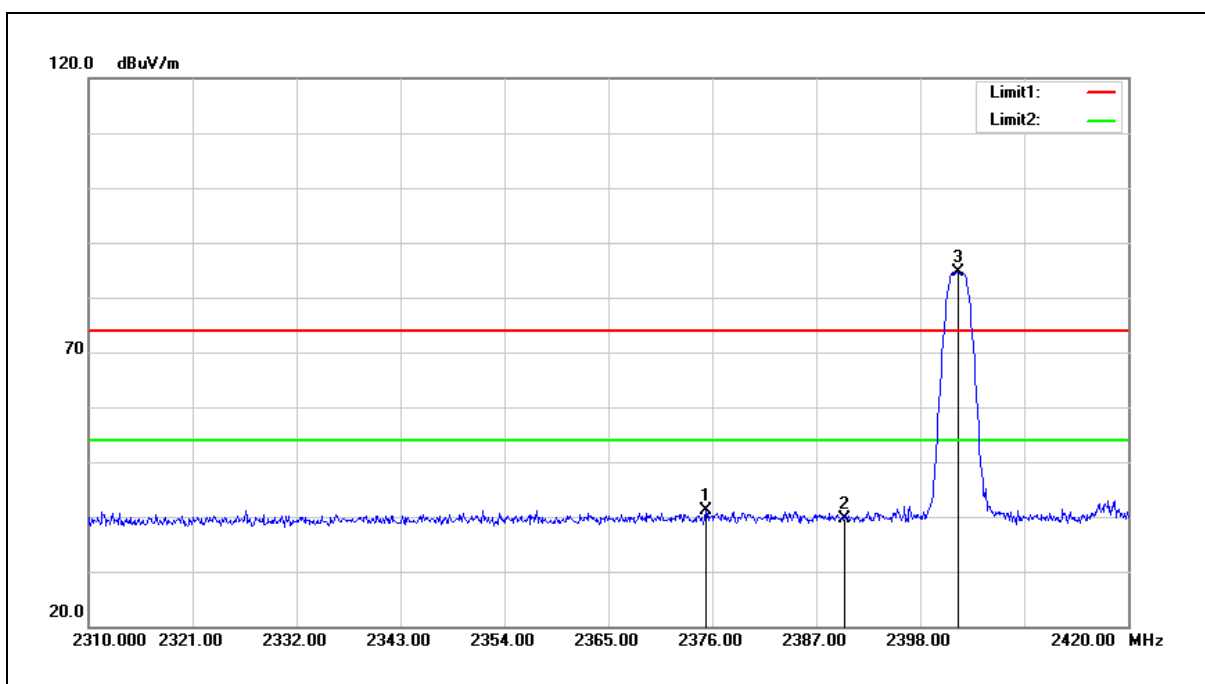


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.340	48.55	-7.37	41.18	74.00	-32.82	peak
2	2390.000	46.93	-7.30	39.63	74.00	-34.37	peak
3	2401.960	91.91	-7.25	84.66	74.00	10.66	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

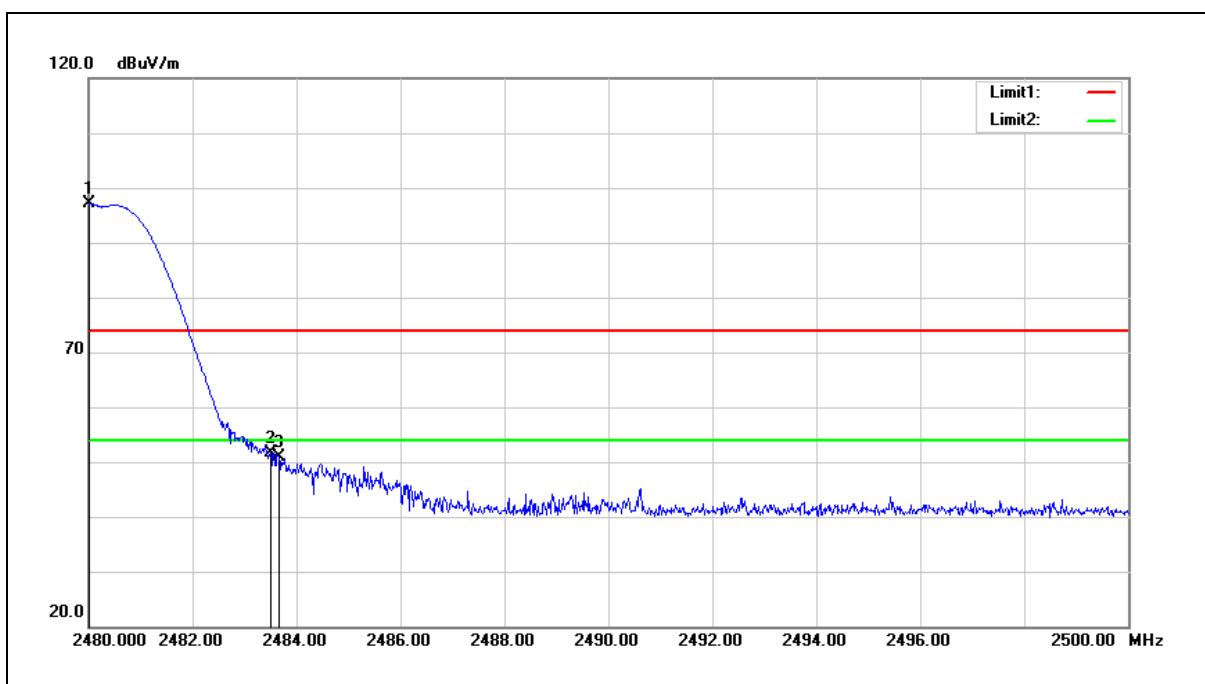

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	103.99	-6.95	97.04	74.00	23.04	peak
2	2483.500	58.50	-6.94	51.56	74.00	-22.44	peak
3	2483.660	57.77	-6.94	50.83	74.00	-23.17	peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

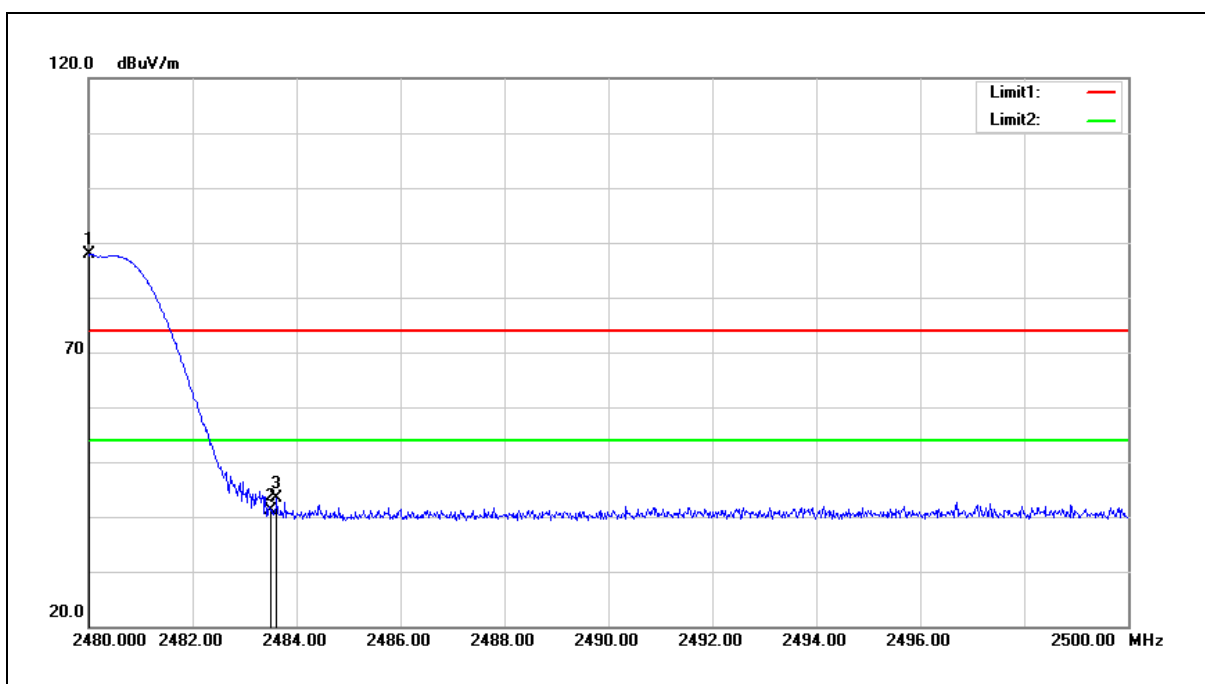

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.020	94.82	-6.95	87.87	74.00	13.87	peak
2	2483.500	48.11	-6.94	41.17	74.00	-32.83	peak
3	2483.620	50.28	-6.94	43.34	74.00	-30.66	peak

---END---