



RADIO TEST REPORT

FCC ID : MSQ-RTBE6J00
Equipment : ROG Rapture GT-BE19000 WiFi 7 Tri-band Gaming Router,
ROG Rapture GT-BE19000AI Tri-band WiFi 7 AI Gaming Router
Brand Name : ASUS
Model Name : GT-BE19000, GT-BE19000AI
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 04, 2024, and testing was started from May 08, 2024 and completed on Jun. 03, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Rex Liao

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards13

1.3 Testing Location Information13

1.4 Measurement Uncertainty13

2 Test Configuration of EUT14

2.1 The Worst Case Measurement Configuration14

2.2 EUT Operation during Test14

2.3 Accessories15

2.4 Support Equipment.....15

2.5 Test Setup Diagram16

3 Transmitter Test Result17

3.1 Unwanted Emissions17

4 Test Equipment and Calibration Data21

Appendix A. Test Results of Unwanted Emissions

Appendix B. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(b)	Unwanted Emissions	PASS	-

Note: Reference to Sporton Project No.: 422102-01.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen
Report Producer: Sophia Shiung



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	4TX
5.15-5.25GHz	802.11n HT20	20	4TX
5.15-5.25GHz	802.11n HT20-BF	20	4TX
5.15-5.25GHz	802.11ac VHT20	20	4TX
5.15-5.25GHz	802.11ac VHT20-BF	20	4TX
5.15-5.25GHz	802.11ax HEW20	20	4TX
5.15-5.25GHz	802.11ax HEW20-BF	20	4TX
5.15-5.25GHz	802.11be EHT20	20	4TX
5.15-5.25GHz	802.11be EHT20-BF	20	4TX
5.15-5.25GHz	802.11n HT40	40	4TX
5.15-5.25GHz	802.11n HT40-BF	40	4TX
5.15-5.25GHz	802.11ac VHT40	40	4TX
5.15-5.25GHz	802.11ac VHT40-BF	40	4TX
5.15-5.25GHz	802.11ax HEW40	40	4TX
5.15-5.25GHz	802.11ax HEW40-BF	40	4TX
5.15-5.25GHz	802.11be EHT40	40	4TX



Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11be EHT40-BF	40	4TX
5.15-5.25GHz	802.11ac VHT80	80	4TX
5.15-5.25GHz	802.11ac VHT80-BF	80	4TX
5.15-5.25GHz	802.11ax HEW80	80	4TX
5.15-5.25GHz	802.11ax HEW80-BF	80	4TX
5.15-5.25GHz	802.11be EHT80	80	4TX
5.15-5.25GHz	802.11be EHT80-BF	80	4TX
5.15-5.35GHz	802.11ac VHT160	160	4TX
5.15-5.35GHz	802.11ac VHT160-BF	160	4TX
5.15-5.35GHz	802.11ax HEW160	160	4TX
5.15-5.35GHz	802.11ax HEW160-BF	160	4TX
5.15-5.35GHz	802.11be EHT160	160	4TX
5.15-5.35GHz	802.11be EHT160-BF	160	4TX
5.25-5.35GHz	802.11a	20	4TX
5.25-5.35GHz	802.11n HT20	20	4TX
5.25-5.35GHz	802.11n HT20-BF	20	4TX
5.25-5.35GHz	802.11ac VHT20	20	4TX
5.25-5.35GHz	802.11ac VHT20-BF	20	4TX
5.25-5.35GHz	802.11ax HEW20	20	4TX
5.25-5.35GHz	802.11ax HEW20-BF	20	4TX
5.25-5.35GHz	802.11be EHT20	20	4TX
5.25-5.35GHz	802.11be EHT20-BF	20	4TX
5.25-5.35GHz	802.11n HT40	40	4TX
5.25-5.35GHz	802.11n HT40-BF	40	4TX
5.25-5.35GHz	802.11ac VHT40	40	4TX
5.25-5.35GHz	802.11ac VHT40-BF	40	4TX
5.25-5.35GHz	802.11ax HEW40	40	4TX
5.25-5.35GHz	802.11ax HEW40-BF	40	4TX
5.25-5.35GHz	802.11be EHT40	40	4TX
5.25-5.35GHz	802.11be EHT40-BF	40	4TX
5.25-5.35GHz	802.11ac VHT80	80	4TX
5.25-5.35GHz	802.11ac VHT80-BF	80	4TX
5.25-5.35GHz	802.11ax HEW80	80	4TX
5.25-5.35GHz	802.11ax HEW80-BF	80	4TX
5.25-5.35GHz	802.11be EHT80	80	4TX
5.25-5.35GHz	802.11be EHT80-BF	80	4TX
5.47-5.725GHz	802.11a	20	4TX
5.47-5.725GHz	802.11n HT20	20	4TX
5.47-5.725GHz	802.11n HT20-BF	20	4TX
5.47-5.725GHz	802.11ac VHT20	20	4TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11ac VHT20-BF	20	4TX
5.47-5.725GHz	802.11ax HEW20	20	4TX
5.47-5.725GHz	802.11ax HEW20-BF	20	4TX
5.47-5.725GHz	802.11be EHT20	20	4TX
5.47-5.725GHz	802.11be EHT20-BF	20	4TX
5.47-5.725GHz	802.11n HT40	40	4TX
5.47-5.725GHz	802.11n HT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT40	40	4TX
5.47-5.725GHz	802.11ac VHT40-BF	40	4TX
5.47-5.725GHz	802.11ax HEW40	40	4TX
5.47-5.725GHz	802.11ax HEW40-BF	40	4TX
5.47-5.725GHz	802.11be EHT40	40	4TX
5.47-5.725GHz	802.11be EHT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT80	80	4TX
5.47-5.725GHz	802.11ac VHT80-BF	80	4TX
5.47-5.725GHz	802.11ax HEW80	80	4TX
5.47-5.725GHz	802.11ax HEW80-BF	80	4TX
5.47-5.725GHz	802.11be EHT80	80	4TX
5.47-5.725GHz	802.11be EHT80-BF	80	4TX
5.47-5.725GHz	802.11ac VHT160	160	4TX
5.47-5.725GHz	802.11ac VHT160-BF	160	4TX
5.47-5.725GHz	802.11ax HEW160	160	4TX
5.47-5.725GHz	802.11ax HEW160-BF	160	4TX
5.47-5.725GHz	802.11be EHT160	160	4TX
5.47-5.725GHz	802.11be EHT160-BF	160	4TX
5.725-5.85GHz	802.11a	20	4TX
5.725-5.85GHz	802.11n HT20	20	4TX
5.725-5.85GHz	802.11n HT20-BF	20	4TX
5.725-5.85GHz	802.11ac VHT20	20	4TX
5.725-5.85GHz	802.11ac VHT20-BF	20	4TX
5.725-5.85GHz	802.11ax HEW20	20	4TX
5.725-5.85GHz	802.11ax HEW20-BF	20	4TX
5.725-5.85GHz	802.11be EHT20	20	4TX
5.725-5.85GHz	802.11be EHT20-BF	20	4TX
5.725-5.85GHz	802.11n HT40	40	4TX
5.725-5.85GHz	802.11n HT40-BF	40	4TX
5.725-5.85GHz	802.11ac VHT40	40	4TX
5.725-5.85GHz	802.11ac VHT40-BF	40	4TX
5.725-5.85GHz	802.11ax HEW40	40	4TX
5.725-5.85GHz	802.11ax HEW40-BF	40	4TX



Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT40	40	4TX
5.725-5.85GHz	802.11be EHT40-BF	40	4TX
5.725-5.85GHz	802.11ac VHT80	80	4TX
5.725-5.85GHz	802.11ac VHT80-BF	80	4TX
5.725-5.85GHz	802.11ax HEW80	80	4TX
5.725-5.85GHz	802.11ax HEW80-BF	80	4TX
5.725-5.85GHz	802.11be EHT80	80	4TX
5.725-5.85GHz	802.11be EHT80-BF	80	4TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

For EUT 1 and EUT 3:

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 6GHz	WLAN 2.4GHz	WLAN 5GHz					
1	1	-	-	WHA Yu	C660-510587-A	Dipole Antenna	I-PEX	Note 1
2	2	-	-	WHA Yu	C660-510588-A	Dipole Antenna	I-PEX	
3	3	-	-	WHA Yu	C660-510589-A	Dipole Antenna	I-PEX	
4	4	-	-	WHA Yu	C660-510590-A	Dipole Antenna	I-PEX	
5	-	1	1	WHA Yu	C660-510591-A	Dipole Antenna	I-PEX	
6	-	4	4	WHA Yu	C660-510592-A	Dipole Antenna	I-PEX	
7	-	3	3	WHA Yu	C660-510593-A	Dipole Antenna	I-PEX	
8	-	2	2	WHA Yu	C660-510594-A	Dipole Antenna	I-PEX	

For EUT 2 and EUT 4-5:

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 6GHz	WLAN 2.4GHz	WLAN 5GHz					
1	1	-	-	WHA Yu	C660-510587-AW1	Dipole Antenna	I-PEX	Note 1
2	2	-	-	WHA Yu	C660-510588-AW1	Dipole Antenna	I-PEX	
3	3	-	-	WHA Yu	C660-510589-AW1	Dipole Antenna	I-PEX	
4	4	-	-	WHA Yu	C660-510590-AW1	Dipole Antenna	I-PEX	
5	-	1	1	WHA Yu	C660-510591-AW1	Dipole Antenna	I-PEX	
6	-	4	4	WHA Yu	C660-510592-AW1	Dipole Antenna	I-PEX	
7	-	3	3	WHA Yu	C660-510593-AW1	Dipole Antenna	I-PEX	
8	-	2	2	WHA Yu	C660-510594-AW1	Dipole Antenna	I-PEX	

Note 1

Ant.	Antenna Gain (dBi)									
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 6	WLAN 6GHz UNII 7	WLAN 6GHz UNII 8	
1	-	-	-	-	-	1.75	1.52	2.13	2.17	
2	-	-	-	-	-	1.95	2.41	2.19	1.64	
3	-	-	-	-	-	1.61	1.96	1.51	1.93	
4	-	-	-	-	-	1.98	1.44	1.47	2.21	
5	2.09	1.52	1.17	1.98	1.08	-	-	-	-	
6	1.84	2.29	2.9	3.09	2.51	-	-	-	-	
7	2.91	2.7	3.04	2.48	3.39	-	-	-	-	
8	2.14	1.21	1.19	3.23	1.87	-	-	-	-	

Item	Directional gain (dBi)									
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 6	WLAN 6GHz UNII 7	WLAN 6GHz UNII 8	
4T1S	5.99	4.72	5.97	5.72	5.64	5.99	5.46	5.38	5.5	
4T2S	2.99	2.7	3.04	3.23	3.39	2.99	2.46	2.38	2.5	

Note 2: The above information(excepting antenna gain and directional gain) was declared by manufacturer.

Note 3: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.



Note 4: **For 2.4GHz function:**

For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11ax/be mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

1.1.3 EUT Operational Condition

EUT Power Type	From Power Adapter	
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Weather Band	<input checked="" type="checkbox"/> With 5600~5650MHz	<input type="checkbox"/> Without 5600~5650MHz
Function	<input type="checkbox"/> Outdoor P2M	<input checked="" type="checkbox"/> Indoor P2M
	<input type="checkbox"/> Fixed P2P	<input type="checkbox"/> Client
	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Channel Puncturing Function	<input type="checkbox"/> Supported Static Puncturing	
	<input type="checkbox"/> Supported Dynamic Puncturing (Reduce BW)	
	<input checked="" type="checkbox"/> Unsupported	
Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU
Test Software Version	accessMtool v3.3.0.4	

Note: The above information was declared by manufacturer.

1.1.4 Table for Multiple Listing

Equipment Name	Model Name	Description
ROG Rapture GT-BE19000 WiFi 7 Tri-band Gaming Router	GT-BE19000	The two model names for different equipment names served as marketing strategy.
ROG Rapture GT-BE19000AI Tri-band WiFi 7 AI Gaming Router	GT-BE19000AI	

Note 1: From the above models, model: GT-BE19000 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.1.5 Table for Component Source

Source Component	Main	Second
Integrated circuit packaging (Location: UP1)	<u>FCBGA Package</u> Brand: Broadcom / Model: BCM84891L	<u>FCFBGA Package</u> Brand: Broadcom / Model: BCM84891L
2.5G Ethernet	Brand: REALTEK / Model: RTL8372	Brand: BRCM / Model: BCM50904EL
Flash	Nand Flash 2GB	eMMC flash 32GB
DDR4	2G Byte	4G Byte
X'TAL near 2.5G Ethernet	Brand: ELE / Model: X3S025000BA1HB-HZ (Location: YR1 / Frequency: 25MHz)	Brand: SIWARD / Model: XTL581140-B63-304 (Location: YBP1 / Frequency: 50MHz)

Note: The above information was declared by manufacturer.

1.1.6 Table for EUT Information

The EUTs are identical to each other except for differences listed below:

Difference \ EUT	1	2	3	4	5
Enclosure / Antenna Color (Note 1)	Black	White	Black	White	White
Heatsink Color on the Back of the EUT	Red	Black	Red	Black	Blue-purple gradient
Integrated circuit packaging (Location: UP1)	Main source		Second source		
2.5G Ethernet	Main source			Second source	
Flash	Main source			Second source	
DDR4	Main source			Second source	
X'TAL near 2.5G Ethernet	Main source			Second source	
AI Module	N/A			✓	
PMOS Switch Circuit Design	Type 1			Type 2	
RJ-45 Cable as Accessory	RJ-45 cable 1			RJ-45 cable 2	

Note 1: EUT 1 & EUT 3 (Color: Black), and EUT 2 & EUT 4~5 (Color: White) are equipped with different set of antennas. The difference between two sets is antenna model names only.

Note 2: The above information was declared by manufacturer.



1.1.7 Table for EUT Supports Functions

Function	Support Type
AP Router	Master
Bridge	Slave without radar detection
Extender	Master
Mesh	Master

Note 1: After evaluating, AP Router mode was selected to test and recorded in the report.

Note 2: The above information was declared by manufacturer.

1.1.8 Table for Radio Function

Radio 1	Radio 2	Radio 3
WLAN 2.4GHz	WLAN 5GHz UNII 1~3	WLAN 6GHz UNII 5~8

Note: The above information was declared by manufacturer.

1.1.9 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR422102AB.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Add EUT 3~5 (Please refer to section 1.1.5 and 1.1.6 for detailed information.) 2. Add "RJ-45 cable 2" as accessory only for EUT 5.	Unwanted Emissions < 1GHz for EUT 3 and EUT 5.
3. Add the new equipment name "ROG Rapture GT-BE19000AI Tri-band WiFi 7 AI Gaming Router" with new model name "GT-BE19000AI" for marketing strategy.	After evaluation, it does not need to re-test.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date	Remark
Radiated < 1GHz	03CH03-CB	George Fan	22.7-23.8 / 56-59	May 08, 2024	For EUT 3
	03CH06-CB	Gordon Hung	21.9~23.1 / 60~62	Jun. 03, 2025	For EUT 5

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

For EUT 3

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.1 dB	Confidence levels of 95%

For EUT 5

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	<ol style="list-style-type: none"> 1. After evaluating, the worst case was found at Z axis, so the measurement will follow this same test configuration. 2. The EUT performed testing at 2.4GHz, 5GHz and 6GHz, and the worst case was found at 2.4GHz in the original report. Thus, the measurement will follow this same test configuration. 3. The EUT performed testing with Adapter 1 and Adapter 3, and "Adapter 3" was found as worst case in the original report. Thus, the measurement will follow this same test configuration.
1	EUT 3 in Z axis_WLAN 2.4GHz + Adapter 3
2	EUT 5 in Z axis_WLAN 2.4GHz + Adapter 3
For operating, mode 1 is the worst case and it was recorded in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + WWAN
Refer to Sporton Test Report No.: FA422102-04 for Co-location RF Exposure Evaluation.	

2.2 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



2.3 Accessories

Power	Brand	Model	Rating	Remark
Adapter 1	AcBel	ADD011	INPUT: 100-240V~ 1.7A, 50-60Hz OUTPUT: +19.5V, 3.33A, 65.0W MAX.	With the DC cable: Non-shielded, 1.5m
Adapter 2	AcBel	ADD011	INPUT: 100-240V~ 1.7A, 50-60Hz OUTPUT: +19.5V, 3.33A, 65.0W MAX.	With the DC cable: Non-shielded, 1.5m
Adapter 3	LEI	MU60B3120500-A1	INPUT: 100-240V~50/60Hz, 1.5A OUTPUT: 12.0V, 5.0A	-
Others				
RJ-45 cable 1 (For EUT 1~4 use)*1: Shielded, 1.5m				
RJ-45 cable 2 (For EUT 5 use)*1: Shielded, 1.5m				
Power cord*1: Non-shielded, 0.9m for Adapter 1 and Adapter 2 use				


Note 1: Adapter 1 & Adapter 2 is identical.

Note 2: Refer to photographs of EUT for the detail information of difference between Adapter 1 & Adapter 2.

2.4 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.5 Test Setup Diagram

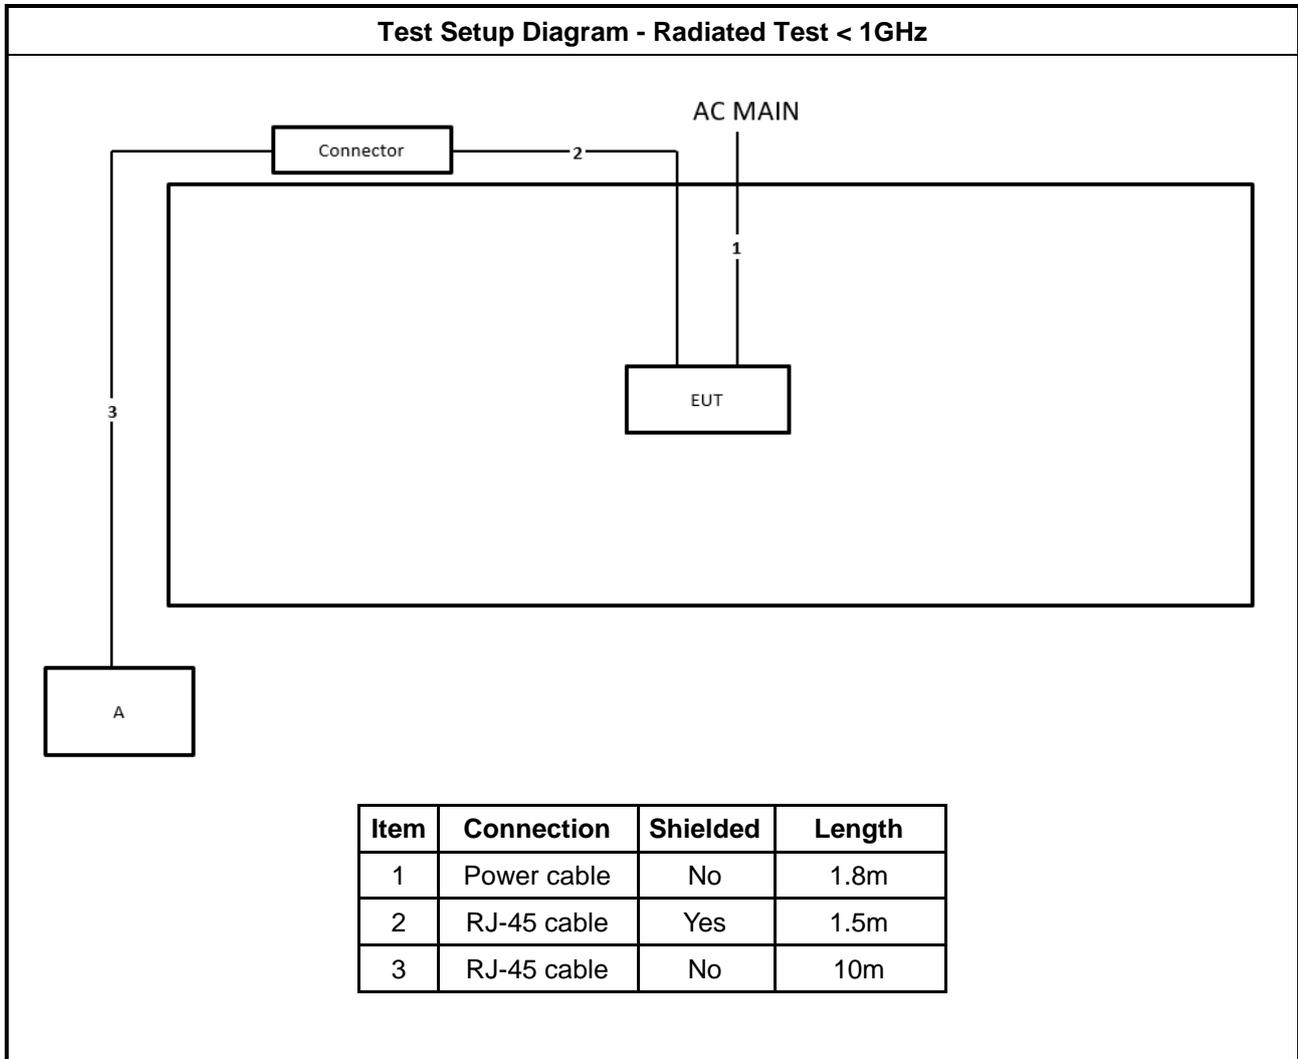



3 Transmitter Test Result

3.1 Unwanted Emissions

3.1.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.1.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). 	
<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor]. 	
<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<ul style="list-style-type: none"> ▪ For radiated measurement. 	
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
<ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level. 	
<ul style="list-style-type: none"> ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported. 	

3.1.4 Test Setup

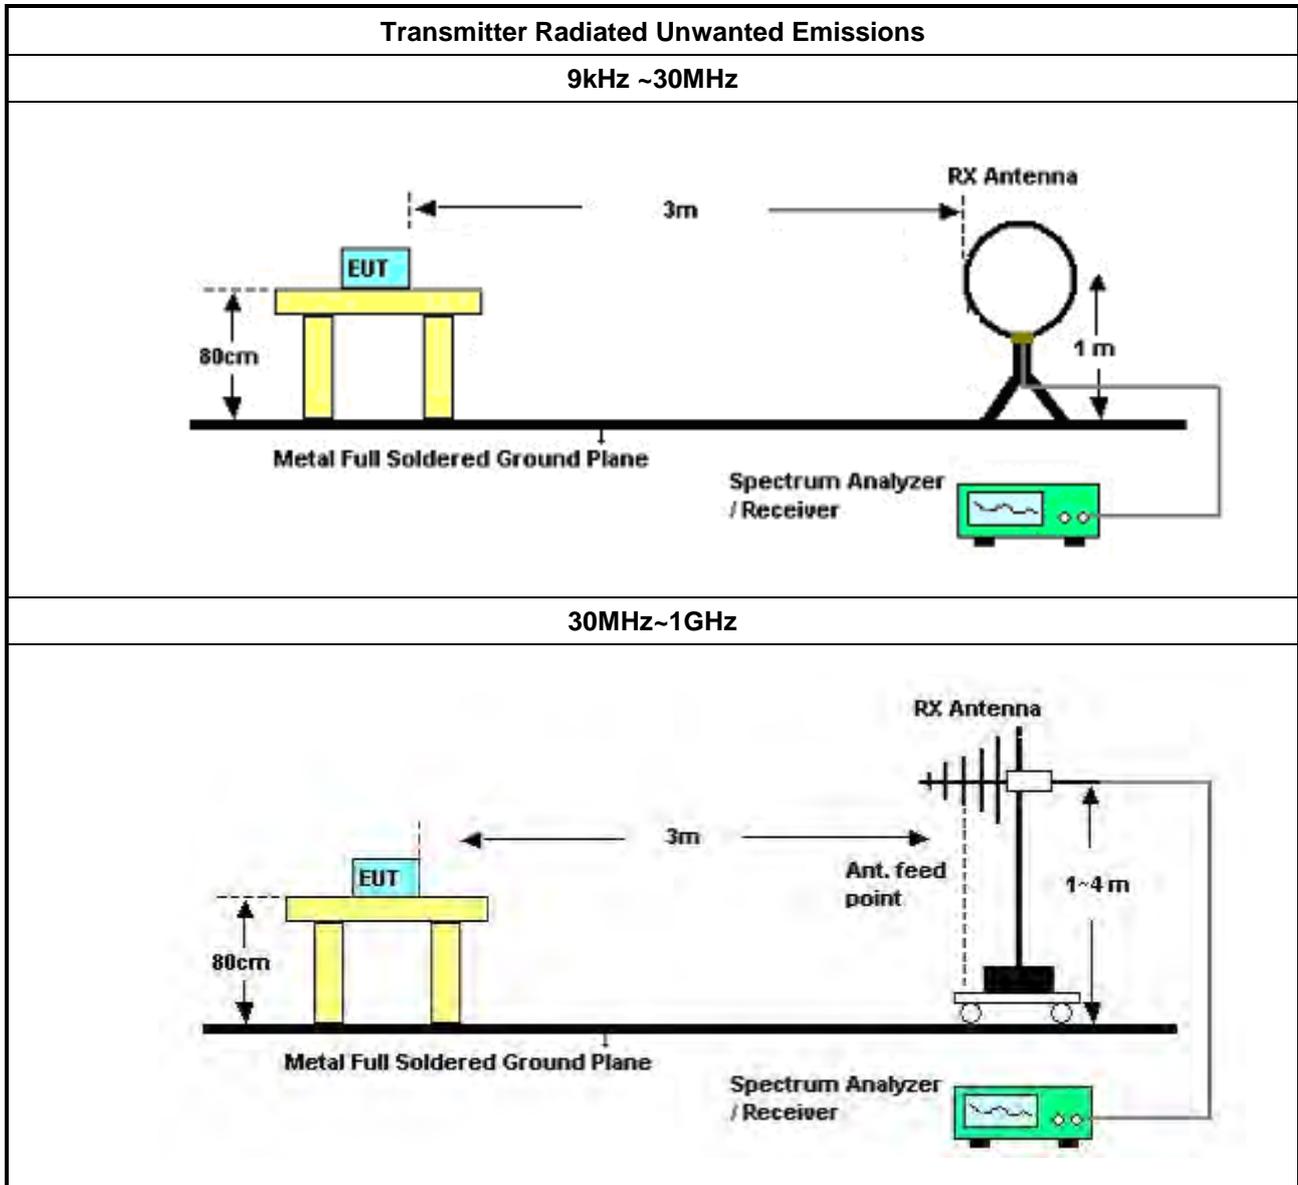

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: $\text{Antenna factor (AF)} + \text{Cable loss (CL)} + \text{Read level (Raw)} - \text{Preamp factor (PA)} (\text{if applicable}) = \text{Level}$.



3.1.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.1.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix A



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH03-CB	30 MHz ~ 1 GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH03-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112B& N-6-06	2888&AT-N0605	30MHz ~ 1GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH03-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 13, 2023	Oct. 12, 2024	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8447D	2944A10259	9kHz ~ 1.3GHz	Jan. 08, 2024	Jan. 07, 2025	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 12, 2023	Jun. 11, 2024	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 13, 2023	Jun. 12, 2024	Radiation (03CH03-CB)
RF Cable-low	Woken	RG402	Low Cable-02+29	30MHz ~ 1GHz	Apr. 25, 2024	Apr. 24, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH06-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH06-CB	30 MHz ~ 1 GHz	Aug. 02, 2024	Aug. 01, 2025	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Jul. 29, 2024	Jul. 28, 2025	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	310N	187290	0.1MHz ~ 1GHz	Nov. 02, 2024	Nov. 01, 2025	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 20, 2024	Aug. 19, 2025	Radiation (03CH06-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH06-CB)
RF Cable-low	Woken	RG402	Low Cable-05+68	30MHz~1GHz	Oct. 24, 2024	Oct. 23, 2025	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)

Note: Calibration Interval of instruments listed above is one year.


NCR means Non-Calibration required.



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	36.79M	35.72	40.00	-4.28	Horizontal

Mode 1

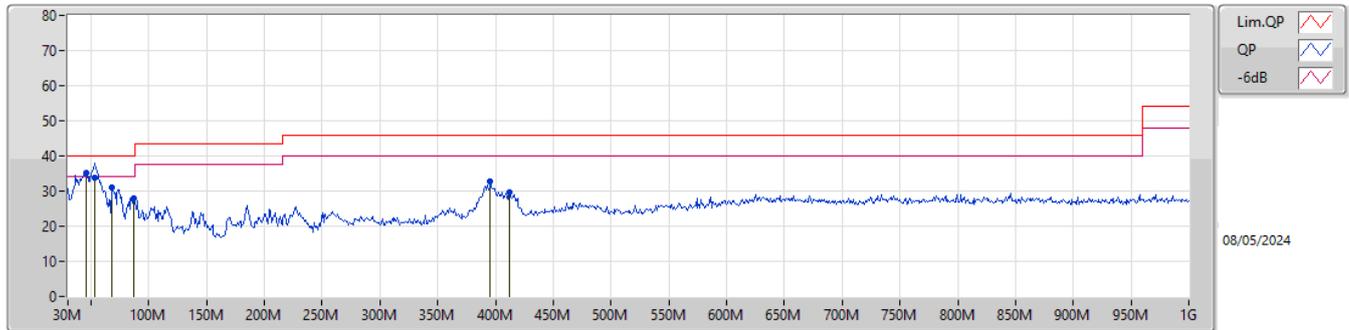

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	45.52M	35.33	40.00	-4.67	-10.80	3	Vertical	210	1.00	"Worst"	46.13	16.13	0.86	27.79
QP	53.28M	33.91	40.00	-6.09	-13.56	3	Vertical	360	1.00	-	47.47	13.23	0.94	27.73
PK	67.83M	31.11	40.00	-8.89	-14.21	3	Vertical	275	1.00	-	45.32	12.25	1.07	27.53
PK	87.23M	28.04	40.00	-11.96	-11.91	3	Vertical	303	1.00	-	39.95	14.68	1.19	27.78
PK	395.69M	32.59	46.00	-13.41	-4.02	3	Vertical	299	1.25	-	36.61	21.43	2.47	27.92
PK	412.18M	29.49	46.00	-16.51	-3.26	3	Vertical	285	1.25	-	32.75	22.24	2.52	28.02

Mode 1

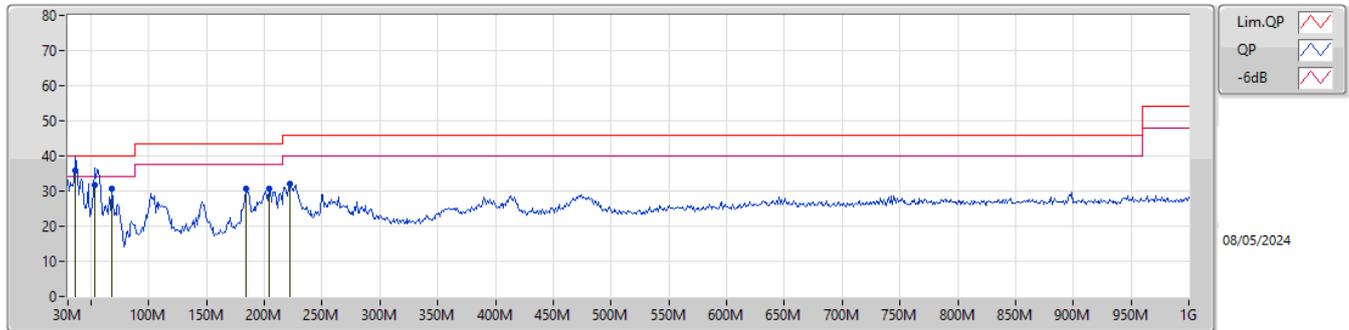

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	36.79M	35.72	40.00	-4.28	-6.57	3	Horizontal	360	2.00	"Worst"	42.29	20.48	0.77	27.82
QP	53.28M	31.59	40.00	-8.41	-13.56	3	Horizontal	23	3.00	-	45.15	13.23	0.94	27.73
PK	67.83M	30.68	40.00	-9.32	-14.21	3	Horizontal	1	3.00	-	44.89	12.25	1.07	27.53
PK	184.23M	30.64	43.50	-12.86	-10.72	3	Horizontal	29	1.25	-	41.36	15.06	1.69	27.47
PK	204.6M	30.68	43.50	-12.82	-10.47	3	Horizontal	344	1.00	-	41.15	15.17	1.77	27.41
PK	222.06M	31.97	46.00	-14.03	-10.25	3	Horizontal	8	1.25	-	42.22	15.23	1.85	27.33